



EDR (8DPSK): Left Side - Transmitting

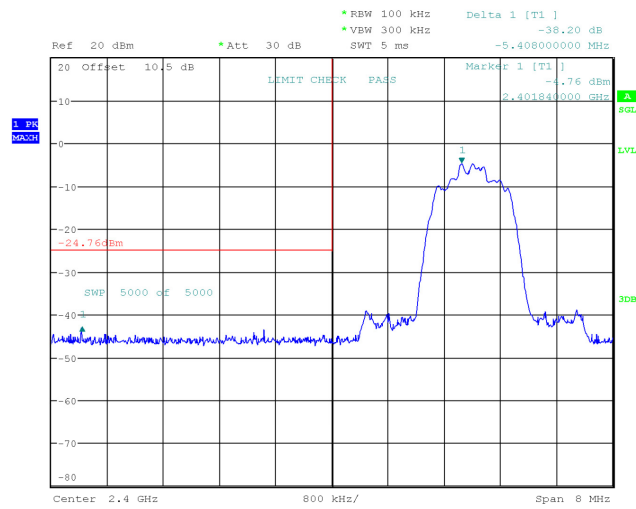

ProjectNo.:RKSA240319001 Tester:Loki Shi
Date: 17.MAY.2024 18:53:20

EDR (8DPSK): Right Side - Transmitting

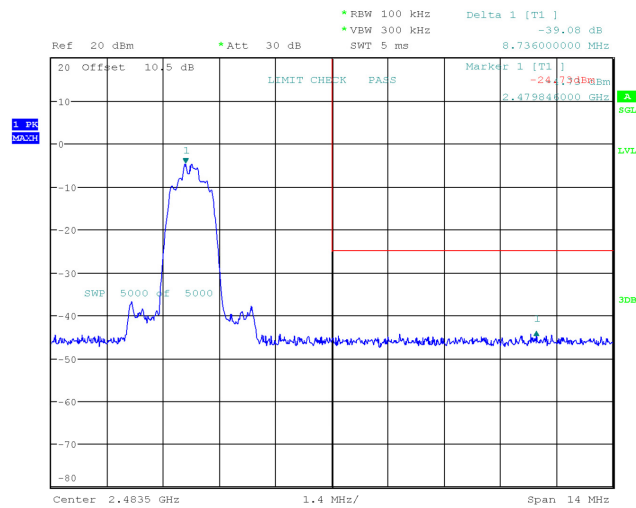

ProjectNo.:RKSA240319001 Tester:Loki Shi
Date: 17.MAY.2024 19:01:45

Ref 20 dBm *Att 30 dB SWT 5 ms -6.088000000 MHz

20 Offset 10.5 dB

LEMIT CHECK PASS

Marker 1 [T1] -5.17 dBm 2.403450000 GHz

-25.17 dBm

SWP 5000 of 5000

1

Center 2.4 GHz 800 kHz/ Span 8 MHz

Ref 20 dBm *Att 30 dB SWT 5 ms 10.416000000 MHz

RBW 100 kHz Delta 1 [T1] -38.58 dB
VBW 300 kHz

10.5 dB

LEMIT CHECK PASS

MarkKx 1 [T1] -25.14 dBm
2.4835000 GHz


1.4 MHz

Center 2.4835 GHz Span 1.4 MHz

SWP 5000 of 5000


Page 75 of 78

EDR ($\pi/4$ -DQPSK): Left Side- Hopping

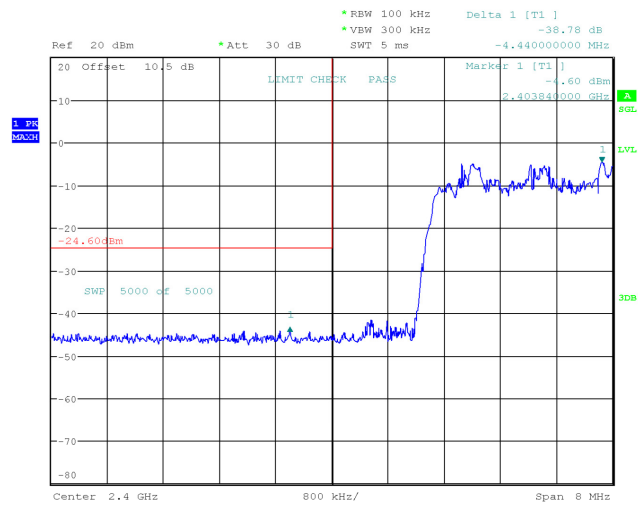

ProjectNo.:RKSA240319001 Tester:Loki Shi
Date: 17.MAY.2024 18:01:42

EDR ($\pi/4$ -DQPSK): Right Side- Hopping

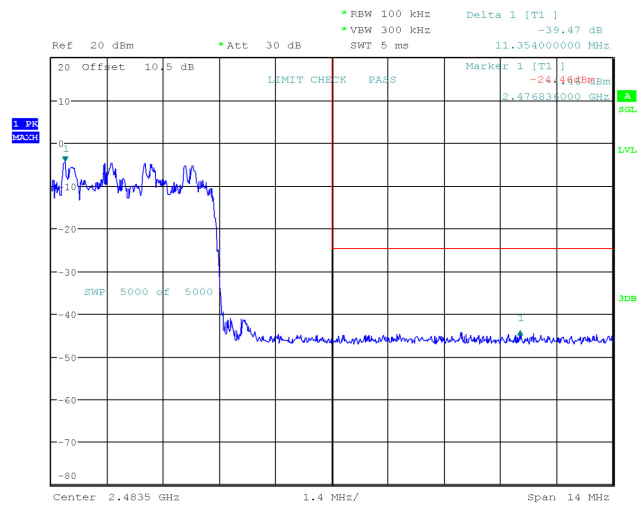

ProjectNo.:RKSA240319001 Tester:Loki Shi
Date: 17.MAY.2024 18:06:02

Ref. 20 dBm *Att. 30 dB SWT 5 ms -5.216000000 MHz

20 Offset 10.5 dB

LIMIT CHECK PASS

Marker 1 [T1] -4.48 dBm 2.40384000 GHz

1 PR MAGN

SWP 5000 of 5000

Center 2.4 GHz 800 kHz/ Span 8 MHz

[illegible]

Page 77 of 78

Declarations

1. The laboratory is not responsible for the authenticity of any information provided by the applicant. Information from the applicant that may affect test results is marked with “★”.
2. The test data was only valid for the test sample(s).
3. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
4. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
5. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor $k=2$ with the 95.45% confidence interval.

******* END OF REPORT *******