



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: Feitian Technologies Co., Ltd.

Address: Floor 17th, Tower B, Huizhi Mansion, No.9 Xueqing Road, Haidian District, Beijing, China

FCC ID: ZD3FTM200

Product Name: Android POS Terminal

Standard(s): 47 CFR Part 15, Subpart E(15.407)
ANSI C63.10-2013
KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR230743940-00E

Date Of Issue: 2023/9/22

Reviewed By: Calvin Chen

Title: RF Engineer

Approved By: Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

DOCUMENT REVISION HISTORY	5
1. GENERAL INFORMATION	6
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
1.2 DESCRIPTION OF TEST CONFIGURATION.....	9
1.2.1 EUT Operation Condition:.....	9
1.2.2 Support Equipment List and Details	10
1.2.3 Support Cable List and Details	10
1.2.4 Block Diagram of Test Setup.....	11
1.3 MEASUREMENT UNCERTAINTY	12
2. SUMMARY OF TEST RESULTS	13
3. REQUIREMENTS AND TEST PROCEDURES	14
3.1 AC LINE CONDUCTED EMISSIONS.....	14
3.1.1 Applicable Standard.....	14
3.1.2 EUT Setup.....	15
3.1.3 EMI Test Receiver Setup	15
3.1.4 Test Procedure	16
3.1.5 Corrected Amplitude & Margin Calculation.....	16
3.2 RADIATION SPURIOUS EMISSIONS.....	17
3.2.1 Applicable Standard.....	17
3.2.2 EUT Setup.....	18
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup	18
3.2.4 Test Procedure	19
3.2.5 Corrected Amplitude & Margin Calculation.....	19
3.3 EMISSION BANDWIDTH.....	20
3.3.1 Applicable Standard.....	20
3.3.2 EUT Setup.....	20
3.3.3 Test Procedure	20
3.4 MAXIMUM CONDUCTED OUTPUT POWER.....	22
3.4.1 Applicable Standard.....	22
3.4.2 EUT Setup.....	22
3.4.3 Test Procedure	22
3.5 MAXIMUM POWER SPECTRAL DENSITY	23
3.5.1 Applicable Standard.....	23
3.5.2 EUT Setup.....	23
3.5.3 Test Procedure	24
3.7 DUTY CYCLE	25
3.7.1 EUT Setup.....	25
3.7.2 Test Procedure	25
3.8 ANTENNA REQUIREMENT.....	26
3.8.1 Applicable Standard.....	26
3.8.2 Judgment.....	26

4. Test DATA AND RESULTS	27
4.1 AC LINE CONDUCTED EMISSIONS	27
4.2 RADIATION SPURIOUS EMISSIONS	30
4.3 EMISSION BANDWIDTH:	51
4.4 MAXIMUM CONDUCTED OUTPUT POWER:	86
4.5 MAXIMUM POWER SPECTRAL DENSITY:	89
4.6 DUTY CYCLE:	108
5. EUT PHOTOGRAPHS	110
6. TEST SETUP PHOTOGRAPHS	111

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR230743940-00E	Original Report	2023/9/22

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

1.1.1 General:

EUT Name:	Android POS Terminal
EUT Model:	M200
Operation Frequency:	5180-5240 MHz (802.11a/n ht20/ac vht20) 5190-5230 MHz(802.11n ht40/ac vht40) 5210MHz(802.11ac vht80) 5260-5320 MHz (802.11a/n ht20/ac vht20) 5270-5310 MHz(802.11n ht40/ac vht40) 5290 MHz(802.11ac vht80) 5500-5720 MHz (802.11a/n ht20/ac vht20) 5510-5710 MHz(802.11n ht40/ac vht40) 5530-5690MHz(802.11ac vht80) 5745-5825 MHz (802.11a/n ht20/ac vht20) 5755-5795 MHz(802.11n ht40/ac vht40) 5775MHz(802.11ac vht80)
Maximum Average Output Power (Conducted):	13.96dBm (5150-5250 MHz) 13.43dBm (5250-5350 MHz) 13.35dBm (5470-5725 MHz) 12.97dBm (5725-5850 MHz)
Modulation Type:	OFDM-BPSK, QPSK, 16QAM, 64QAM,256QAM
Rated Input Voltage:	DC 24V from adapter
Serial Number:	2941-1
EUT Received Date:	2023/8/2
EUT Received Status:	Good

1.1.2 Operation Frequency Detail: For 802.11a/n ht20/ac vht20:

5150-5250MHz Band		5250-5350 MHz Band		5470-5725 MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
40	5200	56	5280	104	5520	153	5765
44	5220	60	5300	108	5540	157	5785
48	5240	64	5320	112	5560	161	5805
/	/	/	/	116	5580	165	5825
/	/	/	/	120	5600	/	/
/	/	/	/	124	5620	/	/
/	/	/	/	128	5640	/	/
/	/	/	/	132	5660	/	/
/	/	/	/	136	5680	/	/
/	/	/	/	140	5700	/	/
/	/	/	/	144	5720	/	/

Per section 15.31(m), the below channels were performed the test as below:

Test Channel	Test Frequency (MHz)			
	5150-5250MHz Band	5250-5350 MHz Band	5470-5725 MHz Band	5725-5850MHz Band
Lowest	5180	5260	5500	5745
Middle	5200	5280	5580	5785
Highest	5240	5320	5700	5825
Additional	/	/	5720	/

For 802.11n ht40/ac vht40:

5150-5250MHz Band		5250-5350 MHz Band		5470-5725 MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755
46	5230	62	5310	110	5550	159	5795
/	/	/	/	118	5590	/	/
/	/	/	/	126	5630	/	/
/	/	/	/	134	5670	/	/
/	/	/	/	142	5710	/	/

Per section 15.31(m), the below channels were performed the test as below:

Test Channel	Test Frequency (MHz)			
	5150-5250MHz Band	5250-5350 MHz Band	5470-5725 MHz Band	5725-5850MHz Band
Lowest	5190	5270	5510	5755
Middle	/	/	5550	/
Highest	5230	5310	5670	5795
Additional	/	/	5710	/

For 802.11ac vht80:

5150-5250MHz Band		5250-5350 MHz Band		5470-5725 MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775
/	/	/	/	122	5610	/	/
/	/	/	/	138	5690	/	/

Per section 15.31(m), the below channels were performed the test as below:

Test Channel	Test Frequency (MHz)			
	5150-5250MHz Band	5250-5350 MHz Band	5470-5725 MHz Band	5725-5850MHz Band
Lowest	/	/	5530	/
Middle	5210	5290	5610	5775
Highest	/	/	/	/
Additional	/	/	5690	/

Note: Additional channels cross the band 5470-5725MHz and 5725-5850 MHz, Conducted output power/ Power Spectral Density/bandwidth test with the additional channel to compliance with stricter limit of the two bands(5470-5725MHz more stricter).

1.1.3 Antenna Information Detail▲:

Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
FPC	50	5.15~5.25GHz	-0.61dBi
		5.25~5.35GHz	0.24dBi
		5.47~5.725GHz	2.87dBi
		5.725~5.85GHz	3.4dBi
The Method of §15.203 Compliance: ☒ Antenna was permanently attached to the unit. ☐ Antenna use a unique type of connector to attach to the EUT. ☐ Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.			

1.1.4 Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
Adapter	SHENZHEN HONOR ELECTRONIC CO.,LTD.	ADS-65HI-19A-2 24065E	Input: 100-240V 50/60Hz 1.5A Output: 24V 2.7A 64.8W

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:			The system was configured for testing in Engineering Mode, which was provided by the manufacturer.	
Equipment Modifications:			No	
EUT Exercise Software:			SP Meta Tool.exe	
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer ▲:				
5150-5250 MHz Band:				
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting
802.11a	Lowest	5180	6Mbps	16
	Middle	5200	6Mbps	16
	Highest	5240	6Mbps	16
802.11 ac vht20	Lowest	5180	MCS0	16
	Middle	5200	MCS0	16
	Highest	5240	MCS0	16
802.11 ac vht40	Lowest	5190	MCS0	16
	Highest	5230	MCS0	16
802.11ac vht80	Middle	5210	MCS0	16
5250-5350 MHz Band:				
Test Modes	Test Channels	Test Frequency	Data rate	Power Level Setting
802.11a	Lowest	5260	6Mbps	16
	Middle	5280	6Mbps	16
	Highest	5320	6Mbps	16
802.11 ac vht20	Lowest	5260	MCS0	16
	Middle	5280	MCS0	16
	Highest	5320	MCS0	16
802.11 ac vht40	Lowest	5270	MCS0	16
	Highest	5310	MCS0	16
802.11ac vht80	Middle	5290	MCS0	16
5470-5725 MHz Band:				
Test Modes	Test Channels	Test Frequency	Data rate	Power Level Setting
802.11a	Lowest	5500	6Mbps	16
	Middle	5580	6Mbps	16
	Highest	5700	6Mbps	16
	Additional	5720	6Mbps	16
802.11 ac vht20	Lowest	5500	MCS0	16
	Middle	5580	MCS0	16
	Highest	5700	MCS0	16
	Additional	5720	MCS0	16
802.11 ac vht40	Lowest	5510	MCS0	15
	Middle	5550	MCS0	15
	Highest	5670	MCS0	15
	Additional	5710	MCS0	15

802.11ac vht80	Lowest	5530	MCS0	15
	Additional	5610	MCS0	15
5725-5850 MHz Band:				
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting
802.11a	Lowest	5745	6Mbps	16
	Middle	5785	6Mbps	16
	Highest	5825	6Mbps	16
802.11 ac vht20	Lowest	5745	MCS0	16
	Middle	5785	MCS0	16
	Highest	5825	MCS0	16
802.11 ac vht40	Lowest	5755	MCS0	15
	Highest	5795	MCS0	15
802.11ac vht80	Middle	5775	MCS0	15

Note:

The system support 802.11a/n ht20/n ht40/ac vht20/vht40/vht80, the vht20/vht40 were reduced since the identical parameters with 802.11 ac vht20 and vht40.

The above are the worst-case data rates, which are determined for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations.


1.2.2 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Lenovo	Laptop	T460S	60PDTEK8
PHILIPS	Monitor	24PFF5595/T3	XM2A2124000343
SanDisk	TF Card	32 GB	521005904698
HP	USB Disk	HPFD206W-32	PAA6918477
CLC	Earphone	Whiteview5.0	EP21107125
TOTO LINK	Router	X5000R	X5000RK9T0560
Unknown	IC Card	Unknown	Unknown

1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Power Cable	No	No	1.2	Adapter	LISN1
Power Cable	No	Yes	1.2	Adapter	EUT
RJ45 Cable	No	No	10	EUT	Router
Earphone Cable	No	No	1.2	EUT	Earphone
HDMI Cable	No	No	0.8	EUT	Monitor
USB Cable	No	No	0.8	EUT	Laptop

AC line conducted emissions:



1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1℃
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
§15.207(a)	AC line conducted emissions	Compliant
FCC§15.205& §15.209 &§15.407(b)	Radiated Spurious Emissions	Compliant
FCC§15.407(a) (e)	Emission Bandwidth	Compliant
FCC§15.407(a)	Maximum Conducted Output Power	Compliant
FCC§15.407 (a)	Power Spectral Density	Compliant
§15.203	Antenna Requirement	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

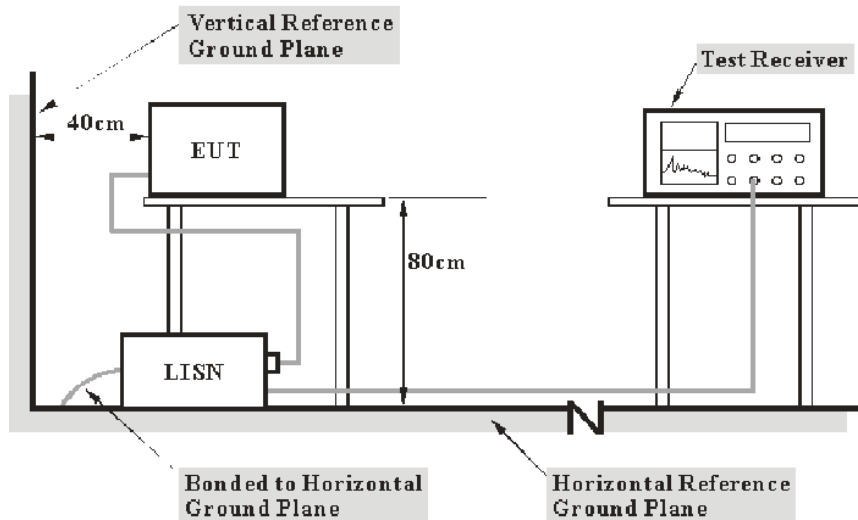
(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

3.1.2 EUT Setup



Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.2 Radiation Spurious Emissions

3.2.1 Applicable Standard

FCC §15.407 (b);

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.

(4) For transmitters operating solely in the 5.725-5.850 GHz band:

(i) All emissions shall be limited to a level of - 27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(8) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(9) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.

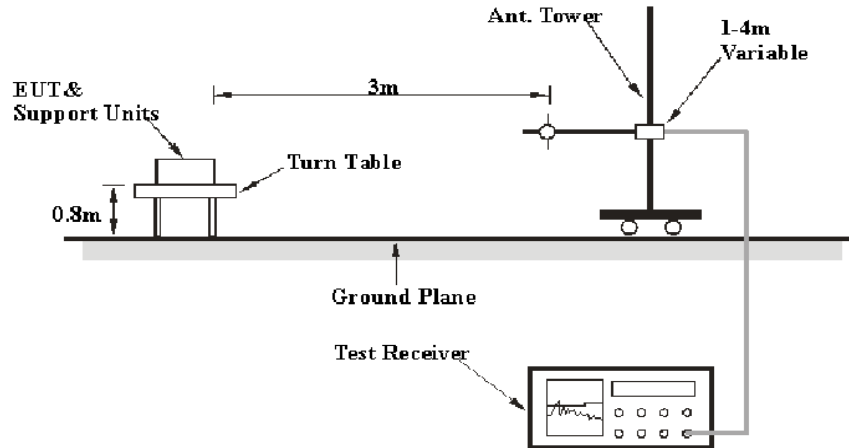
(10) The provisions of § 15.205 apply to intentional radiators operating under this section.

(11) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

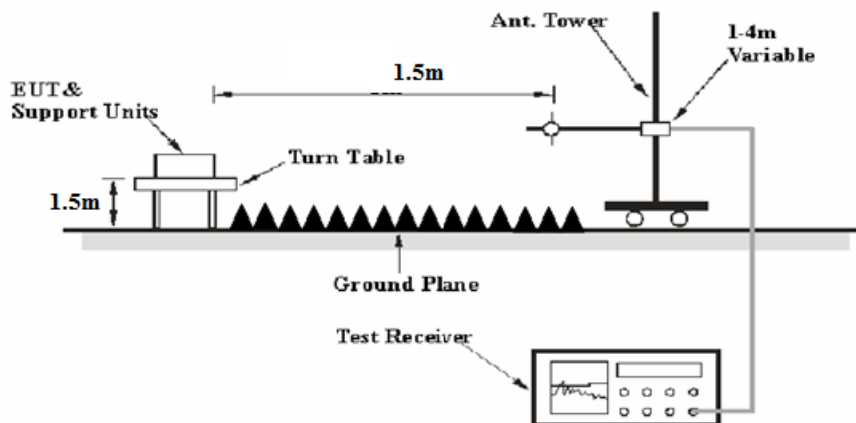
(c) The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

3.2.2 EUT Setup

Below 1GHz:



1-40 GHz:



The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was FCC 15.209, FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30MHz-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 40GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.4 Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

According to C63.10, the above 1G test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.5m

Distance extrapolation Factor = $20 \log (\text{specific distance } [3m] / \text{test distance } [1.5m])$ dB= 6.02 dB

All emissions under the average limit and under the noise floor have not recorded in the report.

3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Factor = Antenna Factor + Cable Loss- Amplifier Gain

For 30MHz-1GHz:

Result = Reading + Factor

For 1GHz-40GHz

Result = Reading + Factor-Distance extrapolation Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.3 Emission Bandwidth

3.3.1 Applicable Standard

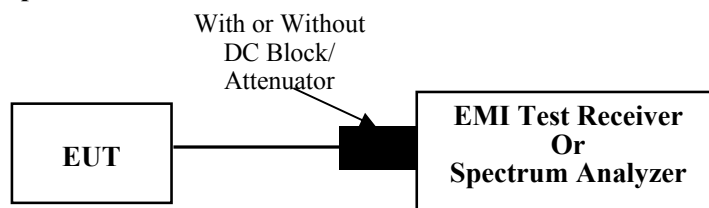
FCC §15.407 (a),(h)

(h)(2) Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating with any part of its 26 dB emission bandwidth in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

FCC §15.407 (e)

Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

3.3.2 EUT Setup



3.3.3 Test Procedure

26dB Emission Bandwidth:

According to ANSI C63.10-2013 Section 12.4.1

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = peak.
- d) Trace mode = max hold
- e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

6 dB emission bandwidth:

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

- a) Set RBW = 100 kHz.
 - b) Set the video bandwidth (VBW) ≥ 3 RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Sweep = auto couple.
 - f) Allow the trace to stabilize.
 - g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described in this section. For devices that use channel aggregation refer to III.A and III.C for determining emission bandwidth.

99% Occupied Bandwidth:

According to ANSI C63.10-2013 Section 12.4.2&6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

3.4 Maximum Conducted Output Power

3.4.1 Applicable Standard

FCC §15.407(a) (1)(iv)

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

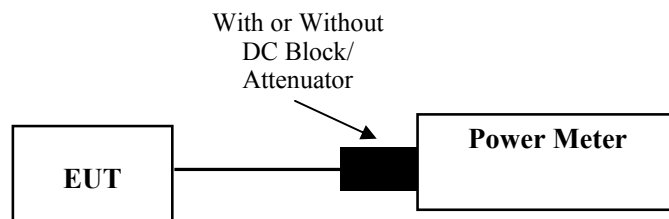
FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

3.4.2 EUT Setup



3.4.3 Test Procedure

According to ANSI C63.10-2013 Section 12.3.3.1

Method PM-G is measurement using a gated RF average power meter. Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.5 Maximum Power Spectral Density

3.5.1 Applicable Standard

FCC §15.407(a) (1)(iv)

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

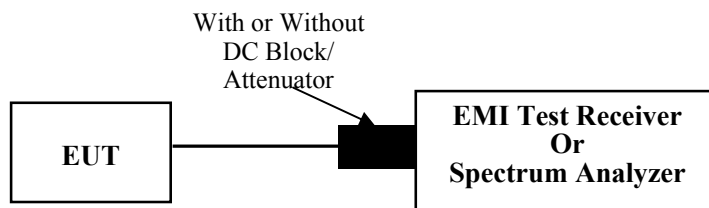
FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

3.5.2 EUT Setup



3.5.3 Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Duty cycle $\geq 98\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-1 should be applied.

Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$

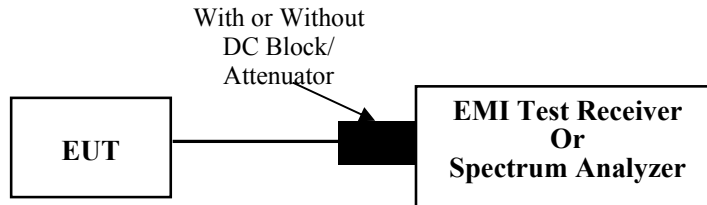
KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-2 should be applied.

Duty cycle $< 98\%$, duty cycle variations exceed $\pm 2\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-3 should be applied.

3.7 Duty Cycle

3.7.1 EUT Setup



3.7.2 Test Procedure

According to ANSI C63.10-2013 Section 12.2

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
- 3) Set $VBW \geq RBW$. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

3.8 Antenna Requirement

3.8.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.8.2 Judgment

Result: Compliant. Please refer to the Antenna Information detail in Section 1.

4. Test DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	2941-1	Test Date:	2023/8/16
Test Site:	CE	Test Mode:	Transmitting(maximum output power mode (802.11a 5200MHz))
Tester:	David Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.1	Relative Humidity: (%)	65	ATM Pressure: (kPa)	100.5
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2023/03/31	2024/03/30
R&S	EMI Test Receiver	ESR3	102726	2023/03/31	2024/03/30
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2023/08/06	2024/08/05
Audix	Test Software	E3	190306 (V9)	N/A	N/A

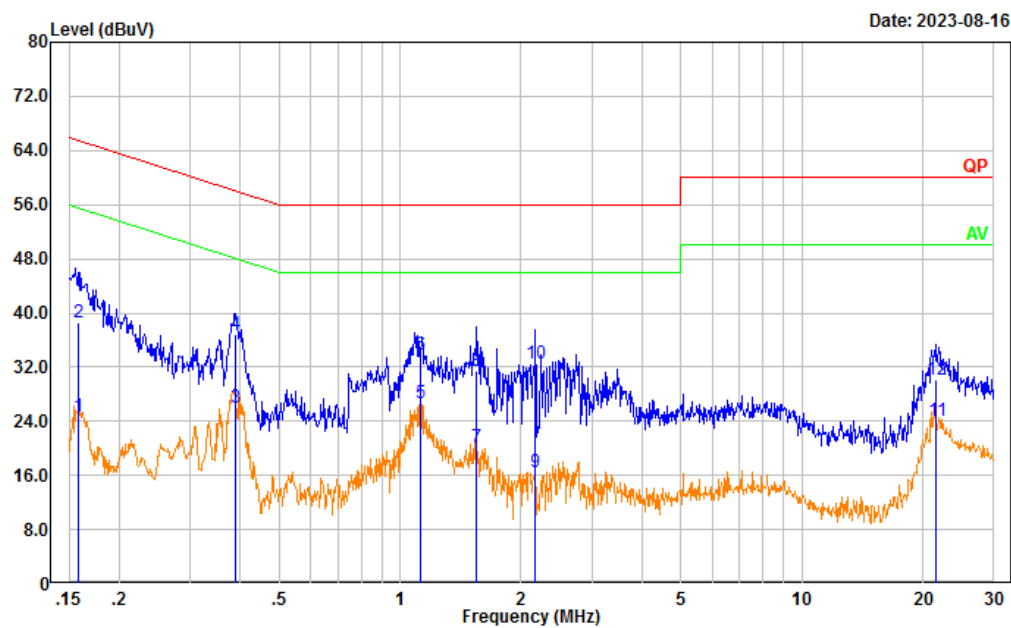
* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Project No.: CR230743940-RF

Tester: David Huang

Port: Line

Note:



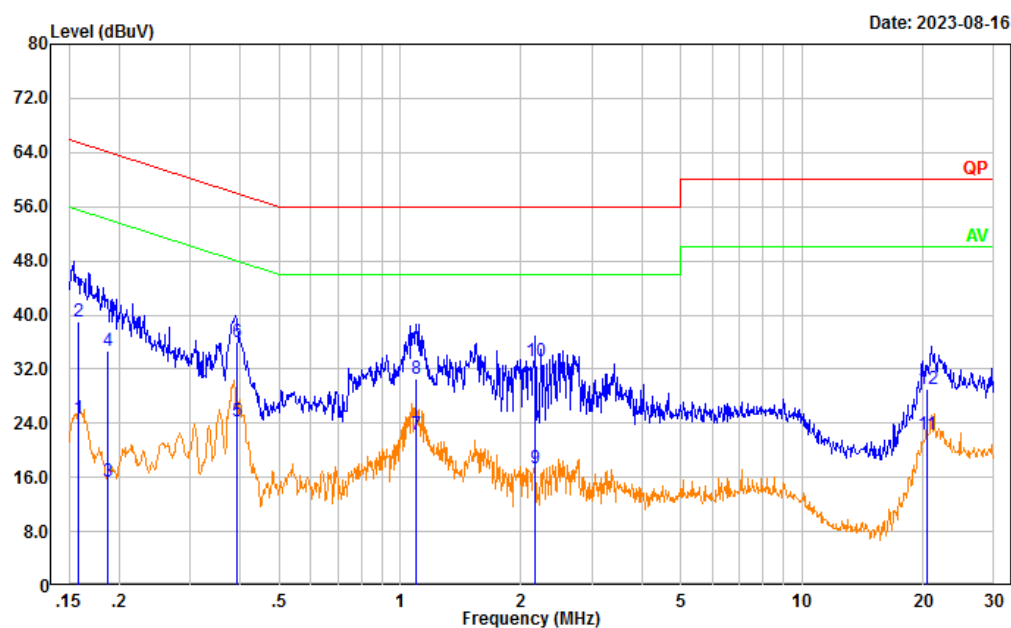
No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.158	15.03	9.61	24.64	55.55	30.91	Average
2	0.158	28.93	9.61	38.54	65.55	27.01	QP
3	0.388	16.31	9.61	25.92	48.10	22.18	Average
4	0.388	27.30	9.61	36.91	58.10	21.19	QP
5	1.120	16.98	9.62	26.60	46.00	19.40	Average
6	1.120	24.21	9.62	33.83	56.00	22.17	QP
7	1.553	10.57	9.63	20.20	46.00	25.80	Average
8	1.553	21.84	9.63	31.47	56.00	24.53	QP
9	2.173	6.84	9.63	16.47	46.00	29.53	Average
10	2.173	22.99	9.63	32.62	56.00	23.38	QP
11	21.622	14.35	9.81	24.16	50.00	25.84	Average
12	21.622	20.23	9.81	30.04	60.00	29.96	QP

Project No.: CR230743940-RF

Tester: David Huang

Port: neutral

Note:



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.158	15.01	9.61	24.62	55.58	30.96	Average
2	0.158	29.36	9.61	38.97	65.58	26.61	QP
3	0.187	5.89	9.61	15.50	54.17	38.67	Average
4	0.187	24.99	9.61	34.60	64.17	29.57	QP
5	0.392	14.66	9.61	24.27	48.02	23.75	Average
6	0.392	26.31	9.61	35.92	58.02	22.10	QP
7	1.100	12.70	9.62	22.32	46.00	23.68	Average
8	1.100	20.85	9.62	30.47	56.00	25.53	QP
9	2.172	7.72	9.63	17.35	46.00	28.65	Average
10	2.172	23.54	9.63	33.17	56.00	22.83	QP
11	20.499	12.73	9.70	22.43	50.00	27.57	Average
12	20.499	19.30	9.70	29.00	60.00	31.00	QP

4.2 Radiation Spurious Emissions

Serial Number:	2941-1	Test Date:	2023/8/17
Test Site:	966-1, 966-2	Test Mode:	Transmitting
Tester:	Vic Du, Tao Zhu	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	26.6~27.6	Relative Humidity: (%)	60~69	ATM Pressure: (kPa)	100

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020/10/19	2023/10/18
R&S	EMI Test Receiver	ESR3	102724	2023/3/31	2024/3/30
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2023/7/16	2024/7/15
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2023/7/16	2024/7/15
Sonoma	Amplifier	310N	186165	2023/7/16	2024/7/15
Audix	Test Software	E3	201021 (V9)	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020/10/13	2023/10/12
R&S	Spectrum Analyzer	FSV40	101591	2023/3/31	2024/3/30
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2023/8/6	2024/8/5
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2023/8/6	2024/8/5
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2022/11/9	2023/11/8
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021/2/5	2024/2/4
Quinstar	Preamplifier	QLW-18405536-JO	15964001005	2022/9/16	2023/9/15
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2023/8/6	2024/8/5
E-Microwave	Band Rejection Filter	5150-5850MHz	OE01902423	2023/8/6	2024/8/5
Mini Circuits	High Pass Filter	VHF-6010+	31119	2023/8/6	2024/8/5
PASTERNAK	Horn Antenna	PE9850/2F-20	072001	2021/2/5	2024/2/4

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

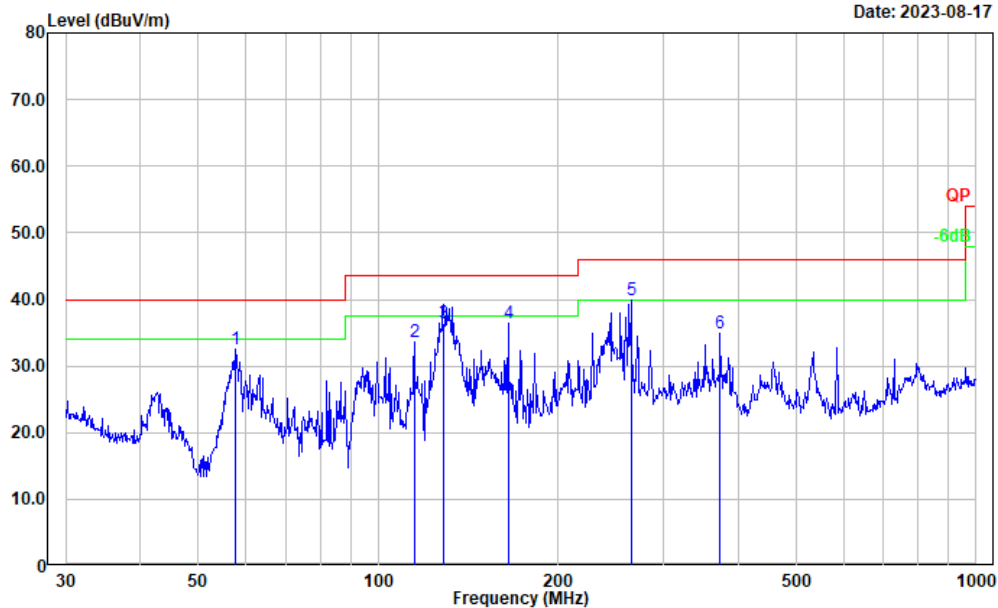
Please refer to the below table and plots.

After pre-scan in the X, Y and Z axes of orientation, the worst case is below:

1) 30MHz-1GHz (maximum output power mode(802.11a 5200MHz))

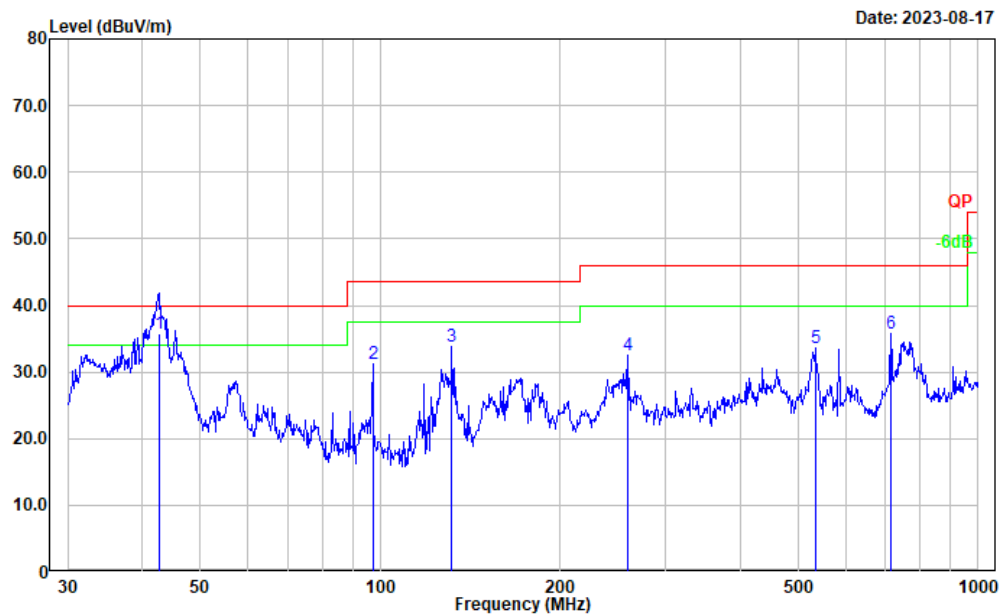
Project No.: CR230743940-RF
Tester: Vic Du
Test Mode: Transmitting
Polarization: horizontal
Note:

Date: 2023-08-17



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	57.796	49.79	-17.35	32.44	40.00	7.56	Peak
2	114.917	45.44	-11.90	33.54	43.50	9.96	Peak
3	128.563	47.61	-11.28	36.33	43.50	7.17	QP
4	164.908	49.01	-12.50	36.51	43.50	6.99	Peak
5	264.746	52.20	-12.29	39.91	46.00	6.09	Peak
6	373.311	44.38	-9.40	34.98	46.00	11.02	Peak

Project No.: CR230743940-RF
Tester: Vic Du
Test Mode: Transmitting
Polarization: vertical
Note:



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	42.600	48.62	-12.82	35.80	40.00	4.20	QP
2	97.115	46.34	-15.05	31.29	43.50	12.21	Peak
3	131.758	45.18	-11.39	33.79	43.50	9.71	Peak
4	259.234	44.90	-12.48	32.42	46.00	13.58	Peak
5	533.832	39.65	-6.00	33.65	46.00	12.35	Peak
6	714.173	39.24	-3.39	35.85	46.00	10.15	Peak

2) 1GHz-40GHz:**5150-5250MHz****802.11a:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5180MHz							
5180.000	68.27	PK	H	38.68	100.93	N/A	N/A
5180.000	58.43	AV	H	38.68	91.09	N/A	N/A
5180.000	63.51	PK	V	38.68	96.17	N/A	N/A
5180.000	53.59	AV	V	38.68	86.25	N/A	N/A
5150.000	29.80	PK	H	38.64	62.42	74.00	11.58
5150.000	16.69	AV	H	38.64	49.31	54.00	4.69
10360.000	34.20	PK	H	19.18	47.36	68.20	20.84
15540.000	41.52	PK	H	22.44	57.94	74.00	16.06
15540.000	28.64	AV	H	22.44	45.06	54.00	8.94
Middle Channel: 5200 MHz							
5200.000	68.83	PK	H	38.70	101.51	N/A	N/A
5200.000	58.73	AV	H	38.70	91.41	N/A	N/A
5200.000	63.48	PK	V	38.70	96.16	N/A	N/A
5200.000	53.29	AV	V	38.70	85.97	N/A	N/A
10400.000	33.74	PK	H	19.16	46.88	68.20	21.32
15600.000	42.19	PK	H	22.41	58.58	74.00	15.42
15600.000	29.67	AV	H	22.41	46.06	54.00	7.94
High Channel: 5240 MHz							
5240.000	68.51	PK	H	38.85	101.34	N/A	N/A
5240.000	58.85	AV	H	38.85	91.68	N/A	N/A
5240.000	63.52	PK	V	38.85	96.35	N/A	N/A
5240.000	53.49	AV	V	38.85	86.32	N/A	N/A
5350.000	29.15	PK	H	39.03	62.16	74.00	11.84
5350.000	16.45	AV	H	39.03	49.46	54.00	4.54
10480.000	33.85	PK	H	18.86	46.69	68.20	21.51
15720.000	42.79	PK	H	22.28	59.05	74.00	14.95
15720.000	29.63	AV	H	22.28	45.89	54.00	8.11

802.11 ac vht20:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5180MHz							
5180.000	69.04	PK	H	38.68	101.70	N/A	N/A
5180.000	59.36	AV	H	38.68	92.02	N/A	N/A
5180.000	65.28	PK	V	38.68	97.94	N/A	N/A
5180.000	55.42	AV	V	38.68	88.08	N/A	N/A
5150.000	31.92	PK	H	38.64	64.54	74.00	9.46
5150.000	17.11	AV	H	38.64	49.73	54.00	4.27
10360.000	33.59	PK	H	19.18	46.75	68.20	21.45
15540.000	42.36	PK	H	22.44	58.78	74.00	15.22
15540.000	29.74	AV	H	22.44	46.16	54.00	7.84
Middle Channel: 5200 MHz							
5200.000	69.31	PK	H	38.70	101.99	N/A	N/A
5200.000	59.42	AV	H	38.70	92.10	N/A	N/A
5200.000	65.38	PK	V	38.70	98.06	N/A	N/A
5200.000	55.62	AV	V	38.70	88.30	N/A	N/A
10400.000	33.45	PK	H	19.16	46.59	68.20	21.61
15600.000	42.17	PK	H	22.41	58.56	74.00	15.44
15600.000	29.64	AV	H	22.41	46.03	54.00	7.97
High Channel: 5240 MHz							
5240.000	69.47	PK	H	38.85	102.30	N/A	N/A
5240.000	59.89	AV	H	38.85	92.72	N/A	N/A
5240.000	65.20	PK	V	38.85	98.03	N/A	N/A
5240.000	55.34	AV	V	38.85	88.17	N/A	N/A
5350.000	29.68	PK	H	39.03	62.69	74.00	11.31
5350.000	16.77	AV	H	39.03	49.78	54.00	4.22
10480.000	33.69	PK	H	18.86	46.53	68.20	21.67
15720.000	42.46	PK	H	22.28	58.72	74.00	15.28
15720.000	29.37	AV	H	22.28	45.63	54.00	8.24

802.11ac vht40:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5190 MHz							
5190.000	66.54	PK	H	38.69	99.21	N/A	N/A
5190.000	56.41	AV	H	38.69	89.08	N/A	N/A
5190.000	62.18	PK	V	38.69	94.85	N/A	N/A
5190.000	52.37	AV	V	38.69	85.04	N/A	N/A
5150.000	35.34	PK	H	38.64	67.96	74.00	6.04
5150.000	15.12	AV	H	38.64	47.74	54.00	6.26
10380.000	33.69	PK	H	19.17	46.84	68.20	21.36
15570.000	40.25	PK	H	22.43	56.66	74.00	17.34
15570.000	27.36	AV	H	22.43	43.77	54.00	10.23
High Channel: 5230 MHz							
5230.000	66.79	PK	H	38.81	99.58	N/A	N/A
5230.000	56.82	AV	H	38.81	89.61	N/A	N/A
5230.000	62.66	PK	V	38.81	95.45	N/A	N/A
5230.000	52.51	AV	V	38.81	85.30	N/A	N/A
5350.000	29.66	PK	H	39.03	62.67	74.00	11.33
5350.000	16.45	AV	H	39.03	49.46	54.00	4.54
10460.000	33.39	PK	H	18.94	46.31	68.20	21.89
15690.000	41.20	PK	H	22.29	57.47	74.00	16.53
15690.000	28.31	AV	H	22.29	44.58	54.00	9.42

802.11ac vht80:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
5210.000	63.55	PK	H	38.74	96.27	N/A	N/A
5210.000	53.08	AV	H	38.74	85.80	N/A	N/A
5210.000	58.69	PK	V	38.74	91.41	N/A	N/A
5210.000	48.77	AV	V	38.74	81.49	N/A	N/A
5150.000	35.59	PK	H	38.64	68.21	74.00	5.79
5150.000	19.46	AV	H	38.64	52.08	54.00	1.92
5350.000	29.13	PK	H	39.03	62.14	74.00	11.86
5350.000	16.47	AV	H	39.03	49.48	54.00	4.52
10420.000	33.42	PK	H	19.09	46.49	68.20	21.71
15630.000	40.33	PK	H	22.37	56.68	74.00	17.32
15630.000	27.56	AV	H	22.37	43.91	54.00	10.09

Note:

Result = Reading + Factor- Distance extrapolation Factor

Distance extrapolation Factor = $20 \log (\text{specific distance [3m]}/\text{test distance [1.5m]})$ dB= 6.02 dB

5250-5350MHz:**802.11a:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel:				5260	MHz		
5260.000	70.22	PK	H	38.90	103.10	N/A	N/A
5260.000	60.34	AV	H	38.90	93.22	N/A	N/A
5260.000	65.72	PK	V	38.90	98.60	N/A	N/A
5260.000	55.88	AV	V	38.90	88.76	N/A	N/A
5150.000	30.60	PK	H	38.64	63.22	74.00	10.78
5150.000	17.20	AV	H	38.64	49.82	54.00	4.18
10520.000	34.78	PK	H	18.93	47.69	68.20	20.51
15780.000	42.32	PK	H	22.26	58.56	74.00	15.44
15780.000	29.60	AV	H	22.26	45.84	54.00	8.16
Middle Channel:				5280	MHz		
5280.000	70.18	PK	H	38.91	103.07	N/A	N/A
5280.000	60.49	AV	H	38.91	93.38	N/A	N/A
5280.000	65.48	PK	V	38.91	98.37	N/A	N/A
5280.000	55.34	AV	V	38.91	88.23	N/A	N/A
10560.000	36.33	PK	H	19.20	49.51	68.20	18.69
15840.000	44.78	PK	H	22.34	61.10	74.00	12.90
15840.000	31.20	AV	H	22.34	47.52	54.00	6.48
High Channel:				5320	MHz		
5320.000	71.32	PK	H	38.97	104.27	N/A	N/A
5320.000	61.38	AV	H	38.97	94.33	N/A	N/A
5320.000	66.69	PK	V	38.97	99.64	N/A	N/A
5320.000	56.82	AV	V	38.97	89.77	N/A	N/A
5350.000	31.48	PK	H	39.03	64.49	74.00	9.51
5350.000	17.14	AV	H	39.03	50.15	54.00	3.85
10640.000	38.43	PK	H	19.50	51.91	74.00	22.09
10640.000	25.36	AV	H	19.50	38.84	54.00	15.16
15960.000	43.29	PK	H	22.22	59.49	74.00	14.51
15960.000	30.28	AV	H	22.22	46.48	54.00	7.52

802.11ac 20:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5260 MHz							
5260.000	69.87	PK	H	38.90	102.75	N/A	N/A
5260.000	59.67	AV	H	38.90	92.55	N/A	N/A
5260.000	64.82	PK	V	38.90	97.70	N/A	N/A
5260.000	54.33	AV	V	38.90	87.21	N/A	N/A
5150.000	30.02	PK	H	38.64	62.64	74.00	11.36
5150.000	16.86	AV	H	38.64	49.48	54.00	4.52
10520.000	34.12	PK	H	18.93	47.03	68.20	21.17
15780.000	41.78	PK	H	22.26	58.02	74.00	15.98
15780.000	28.69	AV	H	22.26	44.93	54.00	9.07
Middle Channel: 5280 MHz							
5280.000	69.92	PK	H	38.91	102.81	N/A	N/A
5280.000	59.84	AV	H	38.91	92.73	N/A	N/A
5280.000	65.36	PK	V	38.91	98.25	N/A	N/A
5280.000	55.48	AV	V	38.91	88.37	N/A	N/A
10560.000	34.64	PK	H	19.20	47.82	68.20	20.38
15840.000	41.64	PK	H	22.34	57.96	74.00	16.04
15840.000	28.66	AV	H	22.34	44.98	54.00	9.02
High Channel: 5320 MHz							
5320.000	70.44	PK	H	38.97	103.39	N/A	N/A
5320.000	60.71	AV	H	38.97	93.66	N/A	N/A
5320.000	65.33	PK	V	38.97	98.28	N/A	N/A
5320.000	55.89	AV	V	38.97	88.84	N/A	N/A
5350.000	32.09	PK	H	39.03	65.10	74.00	8.90
5350.000	17.06	AV	H	39.03	50.07	54.00	3.93
10640.000	37.53	PK	H	19.50	51.01	74.00	22.99
10640.000	24.66	AV	H	19.50	38.14	54.00	15.86
15960.000	41.25	PK	H	22.22	57.45	74.00	16.55
15960.000	28.41	AV	H	22.22	44.61	54.00	9.39

802.11 ac 40:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5270 MHz							
5270.000	66.33	PK	H	38.91	99.22	N/A	N/A
5270.000	56.23	AV	H	38.91	89.12	N/A	N/A
5270.000	62.32	PK	V	38.91	95.21	N/A	N/A
5270.000	52.14	AV	V	38.91	85.03	N/A	N/A
5150.000	29.85	PK	H	38.64	62.47	74.00	11.53
5150.000	16.77	AV	H	38.64	49.39	54.00	4.61
10540.000	33.74	PK	H	19.07	46.79	68.20	21.41
15810.000	36.48	PK	H	22.28	52.74	74.00	21.26
15810.000	23.55	AV	H	22.28	39.81	54.00	14.19
High Channel: 5310 MHz							
5310.000	67.69	PK	H	38.95	100.62	N/A	N/A
5310.000	57.51	AV	H	38.95	90.44	N/A	N/A
5310.000	62.37	PK	V	38.95	95.30	N/A	N/A
5310.000	52.72	AV	V	38.95	85.65	N/A	N/A
5350.000	33.68	PK	H	39.03	66.69	74.00	7.31
5350.000	17.49	AV	H	39.03	50.50	54.00	3.50
10620.000	34.54	PK	H	19.49	48.01	74.00	25.99
10620.000	21.58	AV	H	19.49	35.05	54.00	18.95
15930.000	37.04	PK	H	22.33	53.35	74.00	20.65
15930.000	24.39	AV	H	22.33	40.70	54.00	13.30

802.11ac 80:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Middle Channel:				5290	MHz		
5290.000	64.27	PK	H	38.92	97.17	N/A	N/A
5290.000	53.74	AV	H	38.92	86.64	N/A	N/A
5290.000	60.33	PK	V	38.92	93.23	N/A	N/A
5290.000	50.28	AV	V	38.92	83.18	N/A	N/A
5150.000	29.63	PK	H	38.64	62.25	74.00	11.75
5150.000	16.68	AV	H	38.64	49.30	54.00	4.70
5350.000	33.47	PK	H	39.03	66.48	74.00	7.52
5350.000	18.26	AV	H	39.03	51.27	54.00	2.73
10580.000	33.62	PK	H	19.34	46.94	68.20	21.26
15870.000	35.80	PK	H	22.39	52.17	74.00	21.83
15870.000	22.33	AV	H	22.39	38.70	54.00	15.30

5470-5725MHz**802.11a:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5500 MHz							
5500.000	71.57	PK	H	39.32	104.87	N/A	N/A
5500.000	61.72	AV	H	39.32	95.02	N/A	N/A
5500.000	63.46	PK	V	39.32	96.76	N/A	N/A
5500.000	53.54	AV	V	39.32	86.84	N/A	N/A
5470.000	30.22	PK	H	39.27	63.47	68.20	4.73
11000.000	33.79	PK	H	19.83	47.60	74.00	26.40
11000.000	20.48	AV	H	19.83	34.29	54.00	19.71
16500.000	35.16	PK	H	22.73	51.87	68.20	16.33
Middle Channel: 5580 MHz							
5580.000	71.48	PK	H	39.43	104.89	N/A	N/A
5580.000	61.39	AV	H	39.43	94.80	N/A	N/A
5580.000	63.57	PK	V	39.43	96.98	N/A	N/A
5580.000	53.38	AV	V	39.43	86.79	N/A	N/A
11160.000	34.61	PK	H	19.97	48.56	74.00	25.44
11160.000	21.38	AV	H	19.97	35.33	54.00	18.67
16740.000	35.27	PK	H	23.68	52.93	68.20	15.27
High Channel: 5700 MHz							
5700.000	71.64	PK	H	39.51	105.13	N/A	N/A
5700.000	61.68	AV	H	39.51	95.17	N/A	N/A
5700.000	63.25	PK	V	39.51	96.74	N/A	N/A
5700.000	53.44	AV	V	39.51	86.93	N/A	N/A
5725.000	31.64	PK	H	39.48	65.10	68.20	3.10
11400.000	33.77	PK	H	20.93	48.68	74.00	25.32
11400.000	20.49	AV	H	20.93	35.40	54.00	32.80
17100.000	33.82	PK	H	26.19	53.99	68.20	16.72

802.11ac 20:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5500 MHz							
5500.000	71.39	PK	H	39.32	104.69	N/A	N/A
5500.000	60.43	AV	H	39.32	93.73	N/A	N/A
5500.000	63.69	PK	V	39.32	96.99	N/A	N/A
5500.000	53.28	AV	V	39.32	86.58	N/A	N/A
5470.000	30.32	PK	H	39.27	63.57	68.20	4.63
11000.000	33.62	PK	H	19.83	47.43	74.00	26.57
11000.000	20.80	AV	H	19.83	34.61	54.00	19.39
16500.000	34.81	PK	H	22.73	51.52	68.20	16.68
Middle Channel: 5580 MHz							
5580.000	71.37	PK	H	39.43	104.78	N/A	N/A
5580.000	61.58	AV	H	39.43	94.99	N/A	N/A
5580.000	63.82	PK	V	39.43	97.23	N/A	N/A
5580.000	53.42	AV	V	39.43	86.83	N/A	N/A
11160.000	33.73	PK	H	19.97	47.68	74.00	26.32
11160.000	20.46	AV	H	19.97	34.41	54.00	19.59
16740.000	36.41	PK	H	23.68	54.07	68.20	14.13
High Channel: 5700 MHz							
5700.000	71.62	PK	H	39.51	105.11	N/A	N/A
5700.000	61.38	AV	H	39.51	94.87	N/A	N/A
5700.000	63.69	PK	V	39.51	97.18	N/A	N/A
5700.000	53.78	AV	V	39.51	87.27	N/A	N/A
5725.000	31.14	PK	H	39.48	64.60	68.20	3.60
11400.000	34.40	PK	H	20.93	49.31	74.00	24.69
11400.000	21.65	AV	H	20.93	36.56	54.00	17.44
17100.000	34.07	PK	H	26.19	54.24	68.20	13.96

802.11ac 40:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5510 MHz							
5510.000	67.32	PK	H	39.35	100.65	N/A	N/A
5510.000	57.19	AV	H	39.35	90.52	N/A	N/A
5510.000	58.35	PK	V	39.35	91.68	N/A	N/A
5510.000	48.69	AV	V	39.35	82.02	N/A	N/A
5470.000	32.21	PK	H	39.27	65.46	68.20	2.74
11020.000	33.84	PK	H	19.85	47.67	74.00	26.33
11020.000	20.63	AV	H	19.85	34.46	54.00	19.54
16530.000	34.73	PK	H	23.02	51.73	68.20	16.47
Middle Channel: 5550 MHz							
5550.000	67.39	PK	H	39.46	100.83	N/A	N/A
5550.000	57.32	AV	H	39.46	90.76	N/A	N/A
5550.000	58.48	PK	V	39.46	91.92	N/A	N/A
5550.000	48.68	AV	V	39.46	82.12	N/A	N/A
11100.000	35.82	PK	H	19.95	49.75	74.00	24.25
11100.000	22.41	AV	H	19.95	36.34	54.00	17.66
16650.000	36.54	PK	H	23.65	54.17	68.20	14.03
High Channel: 5670 MHz							
5670.000	68.37	PK	H	39.50	101.85	N/A	N/A
5670.000	58.14	AV	H	39.50	91.62	N/A	N/A
5670.000	59.35	PK	V	39.50	92.83	N/A	N/A
5670.000	49.66	AV	V	39.50	83.14	N/A	N/A
5725.000	30.42	PK	H	39.48	63.88	68.20	4.32
11340.000	33.68	PK	H	20.77	48.43	74.00	25.57
11340.000	20.21	AV	H	20.77	34.96	54.00	19.04
17010.000	34.40	PK	H	25.56	53.94	68.20	14.26

802.11ac 80:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5530				MHz			
5530.000	65.25	PK	H	39.40	98.63	N/A	N/A
5530.000	55.67	AV	H	39.40	89.05	N/A	N/A
5530.000	55.79	PK	V	39.40	89.17	N/A	N/A
5530.000	45.67	AV	V	39.40	79.05	N/A	N/A
5470.000	30.24	PK	H	39.27	63.49	68.20	4.71
11060.000	34.28	PK	H	19.90	48.16	74.00	25.84
11060.000	21.34	AV	H	19.90	35.22	54.00	18.78
16590.000	34.82	PK	H	23.59	52.39	68.20	15.81
High Channel: 5610				MHz			
5610.000	65.68	PK	H	39.43	99.09	N/A	N/A
5610.000	55.69	AV	H	39.43	89.10	N/A	N/A
5610.000	55.74	PK	V	39.43	89.15	N/A	N/A
5610.000	45.29	AV	V	39.43	78.70	N/A	N/A
5725.000	30.42	PK	H	39.48	63.88	68.20	4.32
11220.000	34.27	PK	H	20.13	48.38	74.00	25.62
11220.000	21.39	AV	H	20.13	35.50	54.00	18.50
16830.000	35.20	PK	H	24.13	53.31	68.20	14.89

5725-5850MHz:**802.11a:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5745MHz							
5745.000	72.29	PK	H	39.46	105.73	N/A	N/A
5745.000	62.18	AV	H	39.46	95.62	N/A	N/A
5745.000	65.78	PK	V	39.46	99.22	N/A	N/A
5745.000	55.37	AV	V	39.46	88.81	N/A	N/A
5725.000	32.15	PK	H	39.48	65.61	122.20	56.59
5720.000	30.96	PK	H	39.49	64.43	110.80	46.37
5700.000	30.12	PK	H	39.51	63.61	105.20	41.59
5650.000	29.77	PK	H	39.49	63.24	68.20	4.96
11490.000	35.64	PK	H	20.67	50.29	74.00	23.71
11490.000	22.45	AV	H	20.67	37.10	54.00	16.90
17235.000	33.66	PK	H	26.76	54.40	68.20	13.80
Middle Channel: 5785 MHz							
5785.000	71.92	PK	H	39.44	105.34	N/A	N/A
5785.000	62.77	AV	H	39.44	96.19	N/A	N/A
5785.000	65.30	PK	V	39.44	98.72	N/A	N/A
5785.000	55.43	AV	V	39.44	88.85	N/A	N/A
11570.000	33.13	PK	H	20.83	47.94	74.00	26.06
11570.000	20.17	AV	H	20.83	34.98	54.00	19.02
17355.000	37.08	PK	H	27.74	58.80	68.20	9.40
High Channel: 5825 MHz							
5825.000	72.68	PK	H	39.46	106.12	N/A	N/A
5825.000	62.52	AV	H	39.46	95.96	N/A	N/A
5825.000	65.48	PK	V	39.46	98.92	N/A	N/A
5825.000	55.73	AV	V	39.46	89.17	N/A	N/A
5850.000	31.07	PK	H	39.49	64.54	122.20	57.66
5855.000	30.77	PK	H	39.51	64.26	110.80	46.54
5875.000	30.69	PK	H	39.60	64.27	105.20	40.93
5925.000	30.18	PK	H	39.68	63.84	68.20	4.36
11650.000	34.05	PK	H	21.07	49.10	74.00	24.90
11650.000	21.78	AV	H	21.07	36.83	54.00	17.17
17475.000	37.60	PK	H	28.61	60.19	68.20	8.01

802.11ac 20:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5745MHz							
5745.000	72.23	PK	H	39.46	105.67	N/A	N/A
5745.000	62.10	AV	H	39.46	95.54	N/A	N/A
5745.000	65.39	PK	V	39.46	98.83	N/A	N/A
5745.000	55.42	AV	V	39.46	88.86	N/A	N/A
5725.000	33.83	PK	H	39.48	67.29	122.20	54.91
5720.000	30.45	PK	H	39.49	63.92	110.80	46.88
5700.000	30.08	PK	H	39.51	63.57	105.20	41.63
5650.000	29.67	PK	H	39.49	63.14	68.20	5.06
11490.000	33.42	PK	H	20.67	48.07	74.00	25.93
11490.000	20.48	AV	H	20.67	35.13	54.00	18.87
17235.000	39.30	PK	H	26.76	60.04	68.20	8.16
Middle Channel: 5785 MHz							
5785.000	71.56	PK	H	39.44	104.98	N/A	N/A
5785.000	61.66	AV	H	39.44	95.08	N/A	N/A
5785.000	64.72	PK	V	39.44	98.14	N/A	N/A
5785.000	54.38	AV	V	39.44	87.80	N/A	N/A
11570.000	34.10	PK	H	20.83	48.91	74.00	25.09
11570.000	21.62	AV	H	20.83	36.43	54.00	17.57
17355.000	37.52	PK	H	27.74	59.24	68.20	8.96
High Channel: 5825 MHz							
5825.000	71.91	PK	H	39.46	105.35	N/A	N/A
5825.000	62.16	AV	H	39.46	95.60	N/A	N/A
5825.000	64.85	PK	V	39.46	98.29	N/A	N/A
5825.000	54.72	AV	V	39.46	88.16	N/A	N/A
5850.000	31.80	PK	H	39.49	65.27	122.20	56.93
5855.000	30.82	PK	H	39.51	64.31	110.80	46.49
5875.000	30.77	PK	H	39.60	64.35	105.20	40.85
5925.000	30.44	PK	H	39.68	64.10	68.20	4.10
11650.000	35.10	PK	H	21.07	50.15	74.00	23.85
11650.000	22.38	AV	H	21.07	37.43	54.00	16.57
17475.000	37.65	PK	H	28.61	60.24	68.20	7.96

802.11ac 40:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5755 MHz							
5755.000	68.66	PK	H	39.45	102.09	N/A	N/A
5755.000	58.71	AV	H	39.45	92.14	N/A	N/A
5755.000	61.56	PK	V	39.45	94.99	N/A	N/A
5755.000	51.70	AV	V	39.45	85.13	N/A	N/A
5725.000	32.33	PK	H	39.48	65.79	122.20	56.41
5720.000	31.38	PK	H	39.49	64.85	110.80	45.95
5700.000	30.21	PK	H	39.51	63.70	105.20	41.50
5650.000	29.96	PK	H	39.49	63.43	68.20	4.77
11510.000	34.43	PK	H	20.67	49.08	74.00	24.92
11510.000	21.52	AV	H	20.67	36.17	54.00	17.83
17265.000	33.66	PK	H	26.94	54.58	68.20	13.62
High Channel: 5795 MHz							
5795.000	68.37	PK	H	39.43	101.78	N/A	N/A
5795.000	58.39	AV	H	39.43	91.80	N/A	N/A
5795.000	61.65	PK	V	39.43	95.06	N/A	N/A
5795.000	51.48	AV	V	39.43	84.89	N/A	N/A
5850.000	30.45	PK	H	39.49	63.92	122.20	58.28
5855.000	30.73	PK	H	39.51	64.22	110.80	46.58
5875.000	30.50	PK	H	39.60	64.08	105.20	41.12
5925.000	30.15	PK	H	39.68	63.81	68.20	4.39
11590.000	34.68	PK	H	20.88	49.54	74.00	24.46
11590.000	21.37	AV	H	20.88	36.23	54.00	17.77
17385.000	33.67	PK	H	28.07	55.72	68.20	12.48

802.11ac 80:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
5775.000	65.88	PK	H	39.44	99.30	N/A	N/A
5775.000	55.15	AV	H	39.44	88.57	N/A	N/A
5775.000	58.49	PK	V	39.44	91.91	N/A	N/A
5775.000	47.58	AV	V	39.44	81.00	N/A	N/A
5725.000	32.61	PK	H	39.48	66.07	122.20	56.13
5720.000	32.48	PK	H	39.49	65.95	110.80	44.85
5700.000	31.11	PK	V	39.51	64.60	105.20	40.60
5650.000	30.63	PK	V	39.49	64.10	68.20	4.10
5850.000	31.28	PK	V	39.49	64.75	122.20	57.45
5855.000	31.25	PK	V	39.51	64.74	110.80	46.06
5875.000	31.22	PK	V	39.60	64.80	105.20	40.40
5925.000	30.78	PK	V	39.68	64.44	68.20	3.76
11550.000	33.46	PK	V	20.78	48.22	74.00	25.78
11550.000	20.48	AV	V	20.78	35.24	54.00	18.76
17325.000	34.23	PK	V	27.41	55.62	68.20	12.58

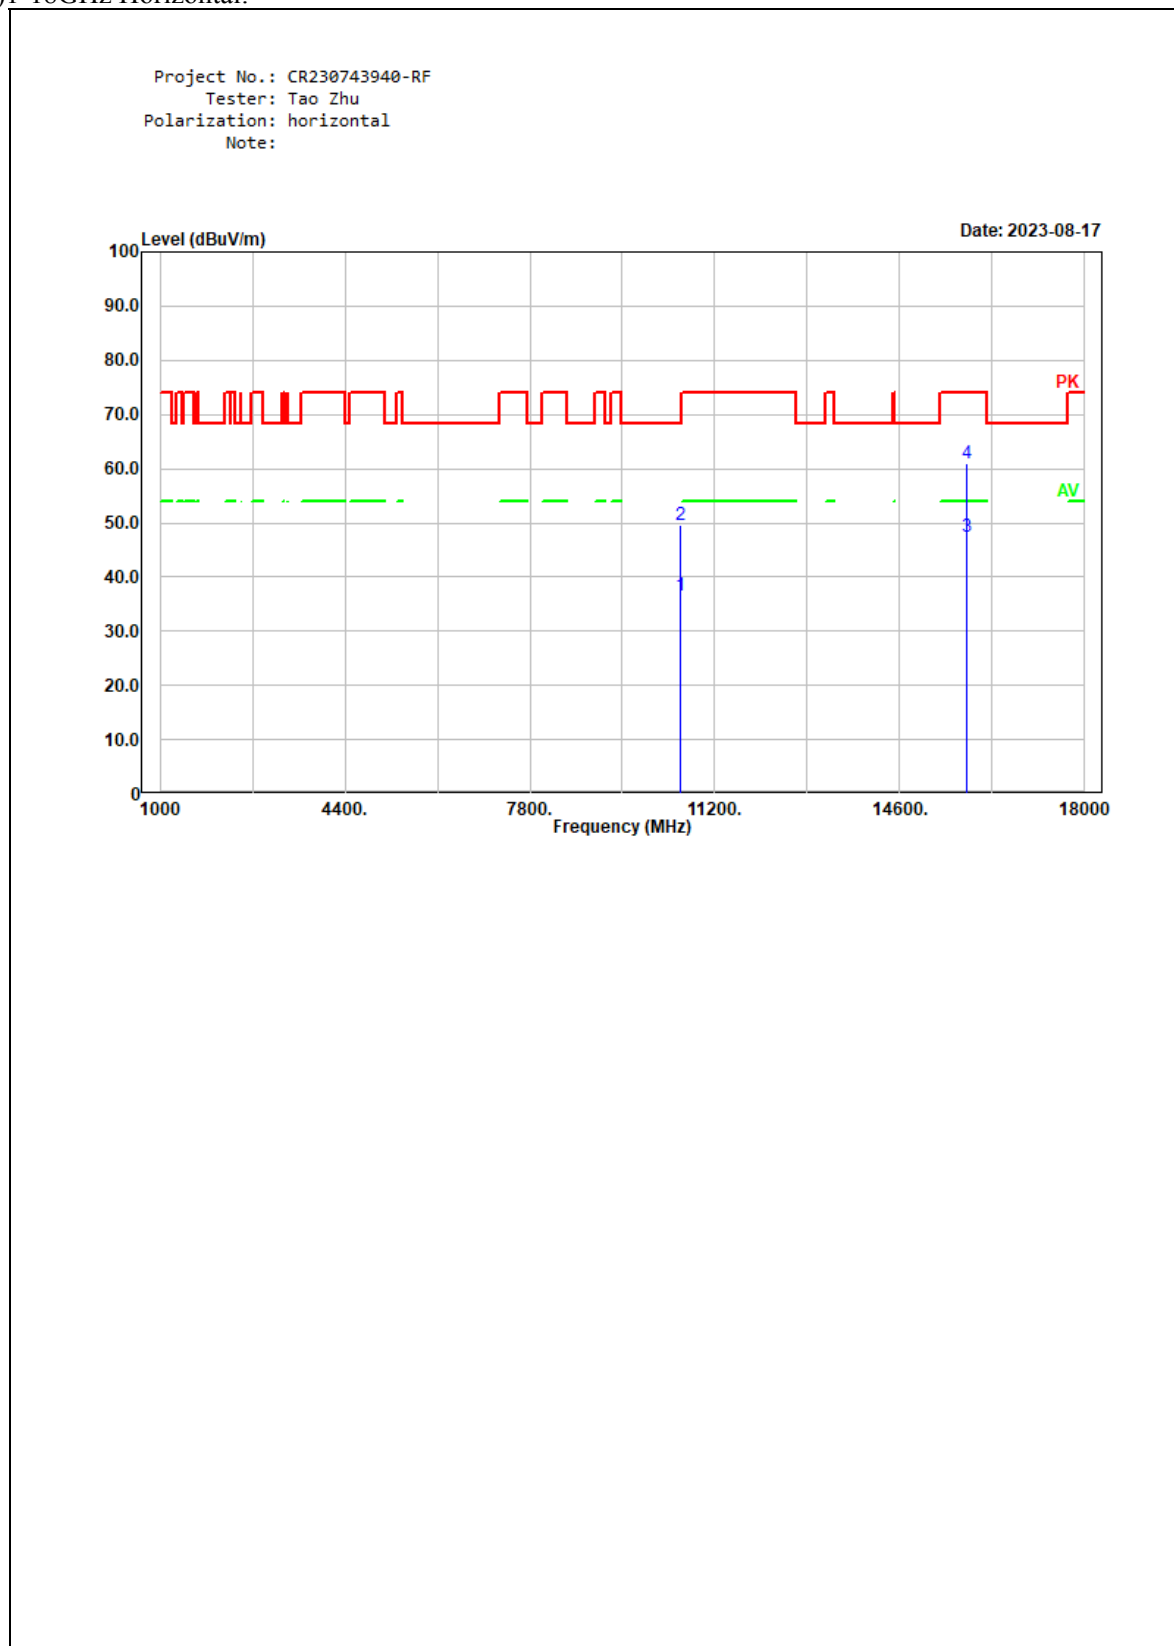
Note:

Result = Reading + Factor- Distance extrapolation Factor

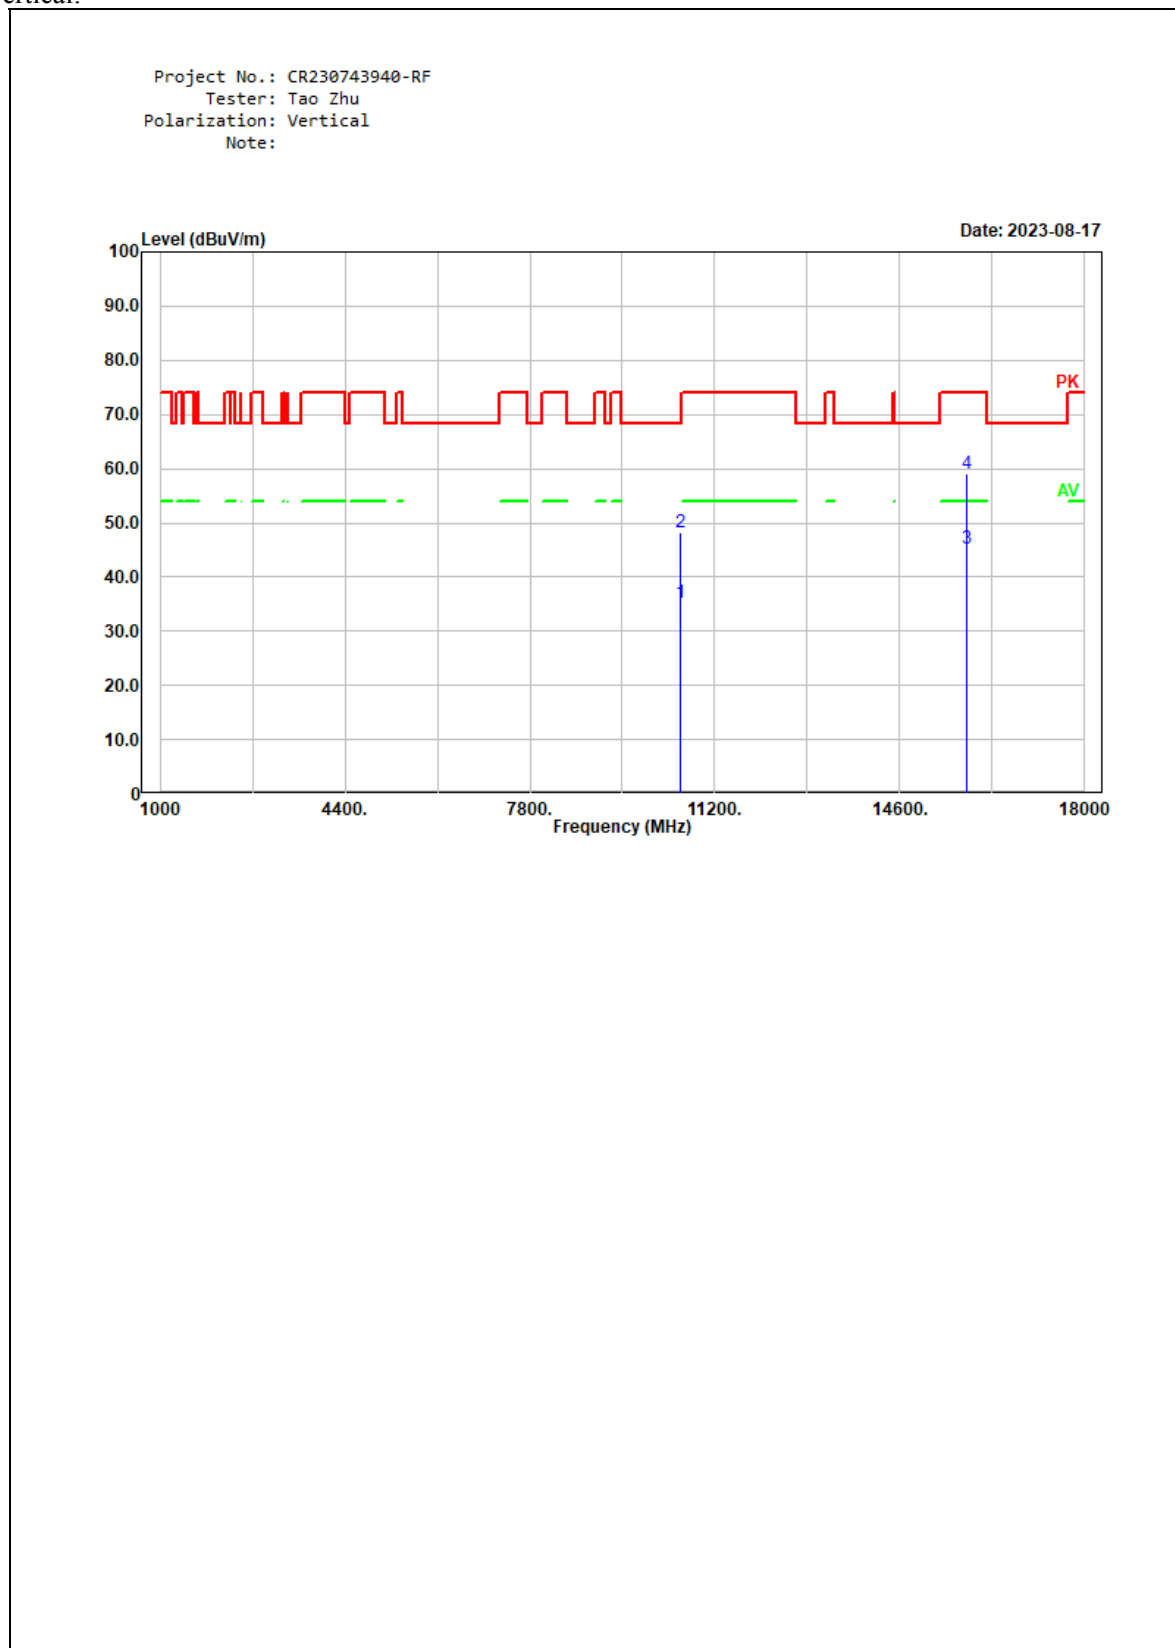
Distance extrapolation Factor = $20 \log (\text{specific distance [3m]}/\text{test distance [1.5m]})$ dB= 6.02 dB

Worst Test plots (802.11a 5280MHz was the worst)

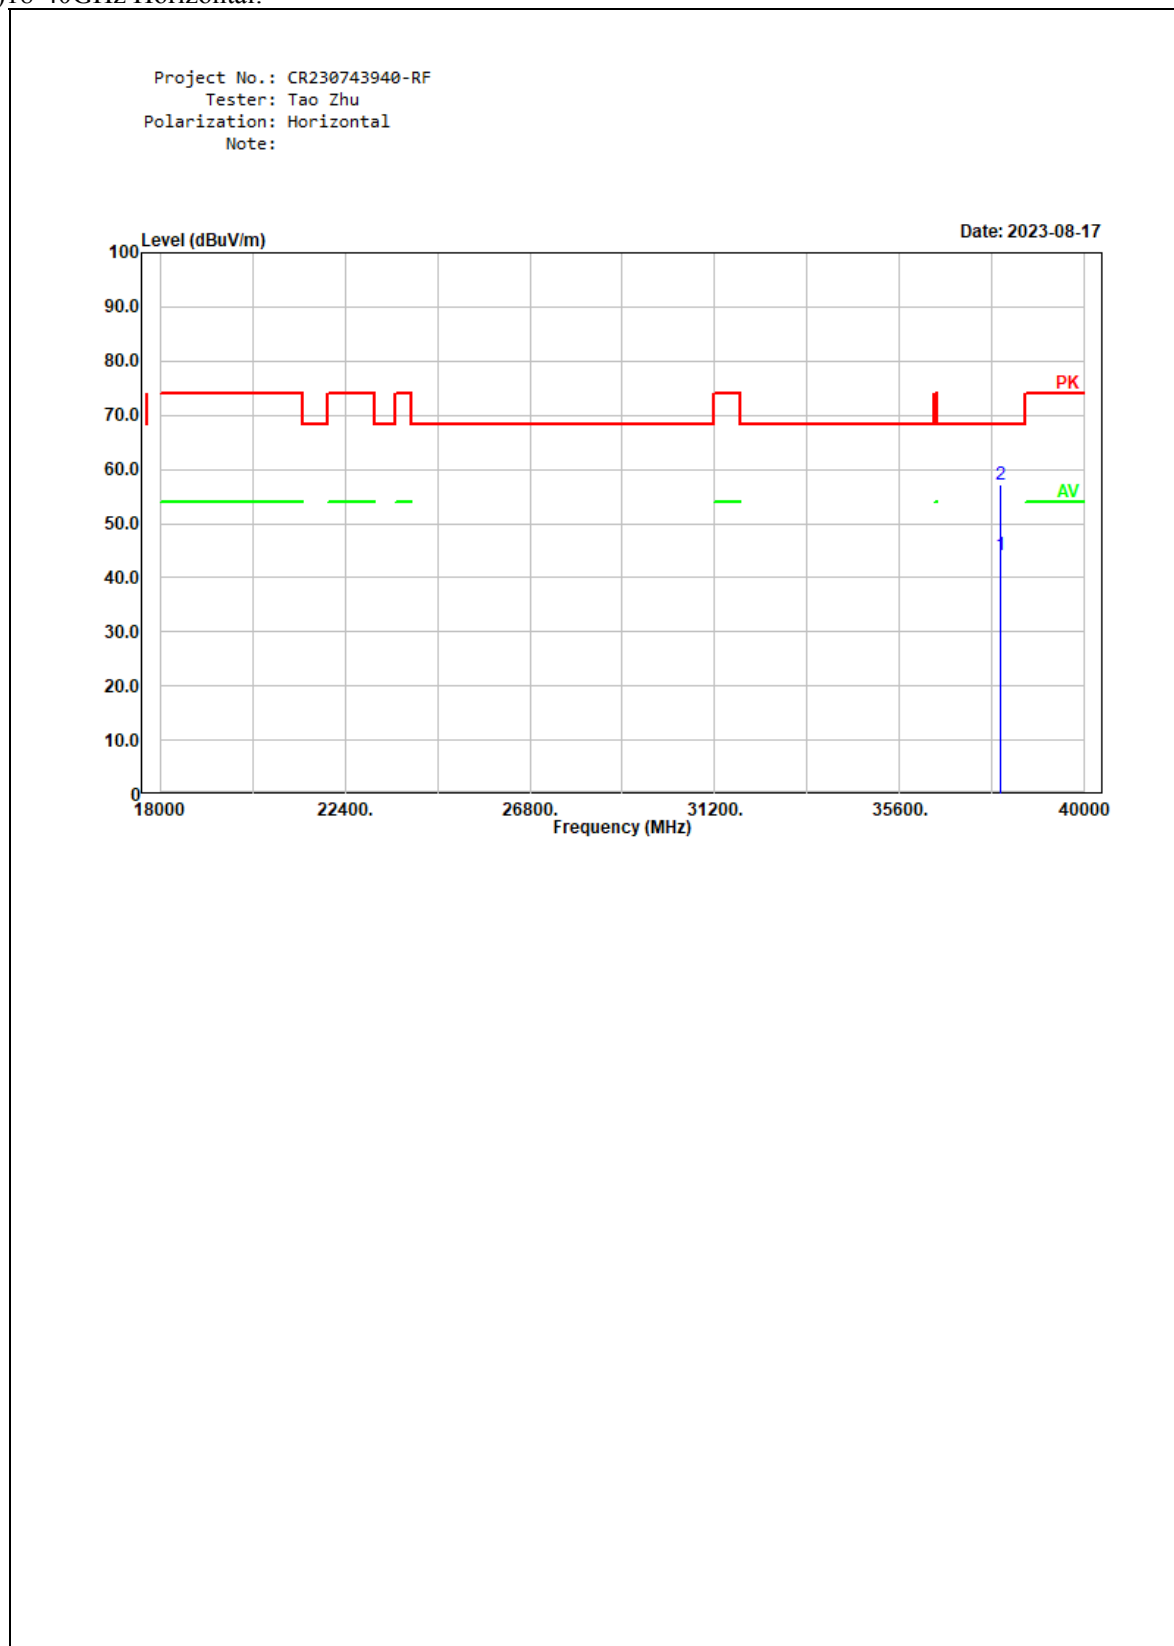
1) 1-18GHz Horizontal:



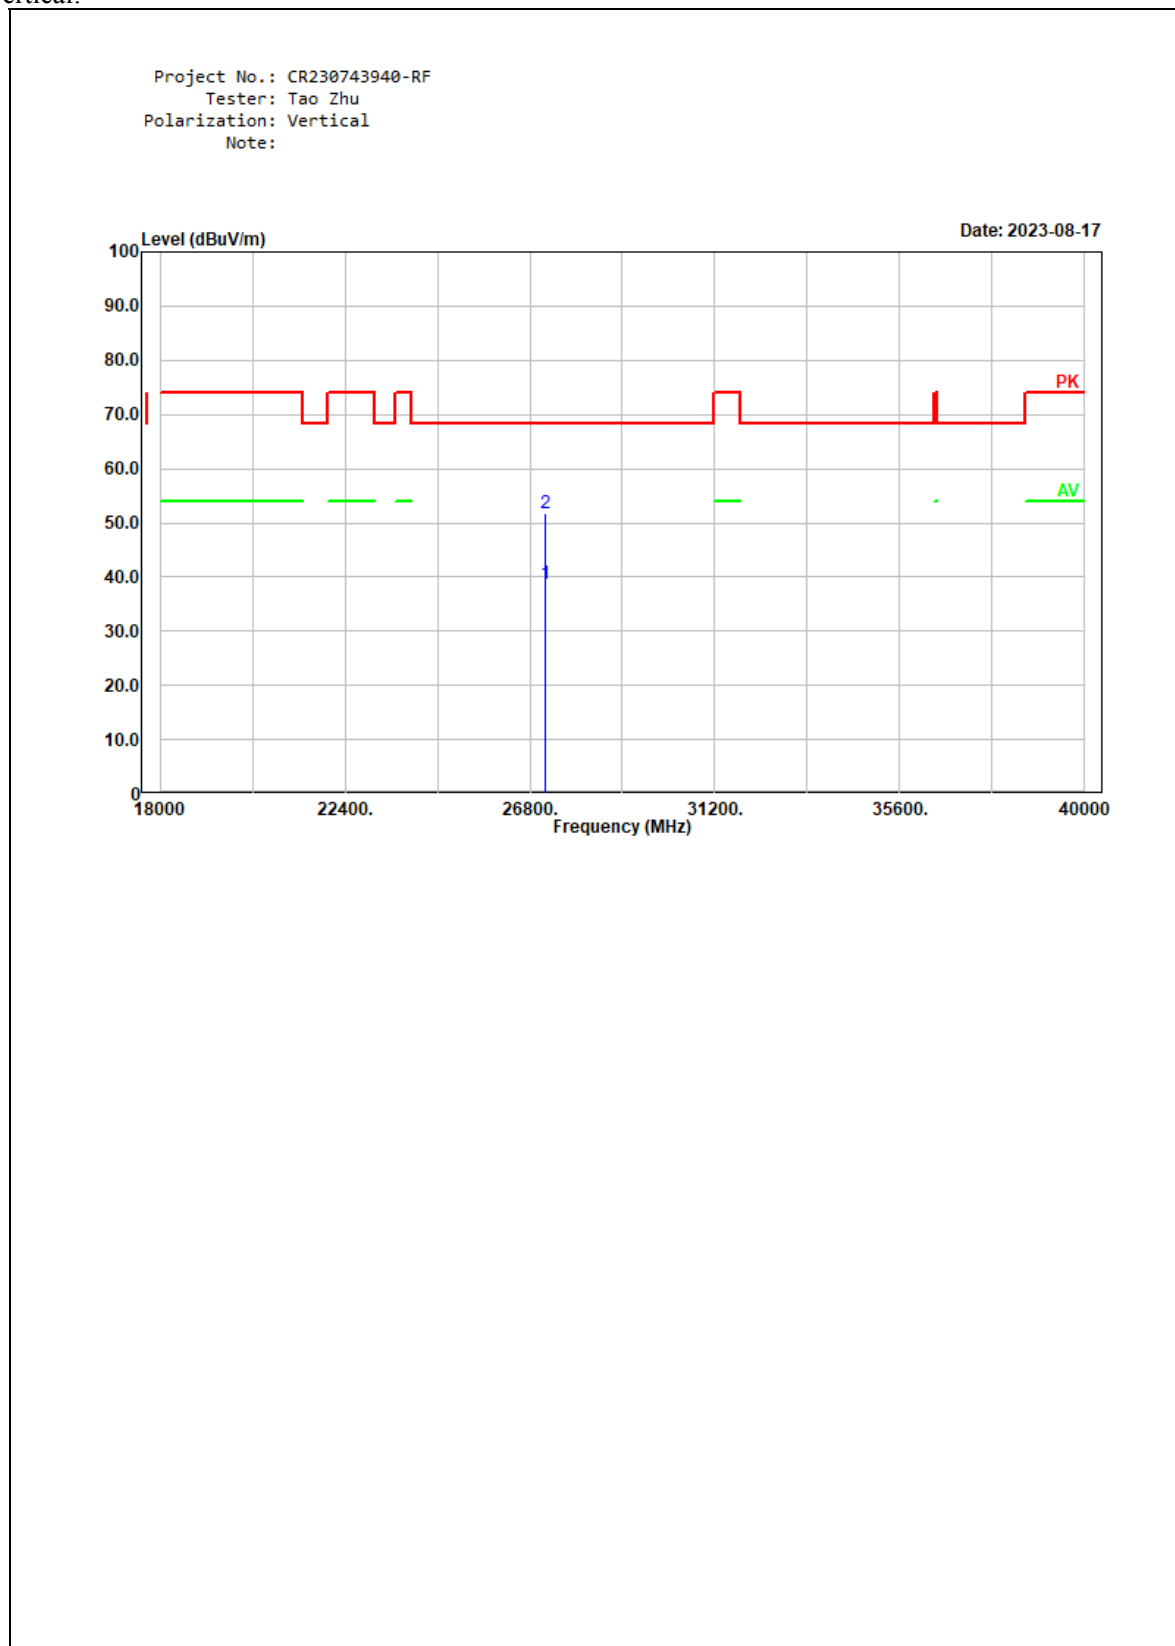
Vertical:



2) 18-40GHz Horizontal:



Vertical:



4.3 Emission Bandwidth:

Serial Number:	2941-1	Test Date:	2023/8/11~2023/8/12
Test Site:	RF	Test Mode:	Transmitting
Tester:	LingLing Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.5~26.2	Relative Humidity: (%)	60~61	ATM Pressure: (kPa)	100.2~100.3
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	100147	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211003	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

5150-5250 MHz:

Test Modes	Test Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180	20.481	16.795
	5200	20.577	16.859
	5240	20.385	16.859
802.11ac vht20	5180	20.769	17.821
	5200	20.865	17.821
	5240	20.577	17.821
802.11ac vht40	5190	40.865	36.41
	5230	40.705	36.282
802.11ac vht80	5210	81.731	75.385

5250-5350 MHz:

Test Modes	Test Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5260	20.673	16.923
	5280	20.385	16.859
	5320	20.673	16.859
802.11ac vht20	5260	20.385	17.885
	5280	20.577	17.821
	5320	20.481	17.821
802.11ac vht40	5270	40.705	36.282
	5310	40.865	36.41
802.11ac vht80	5290	82.051	75.385

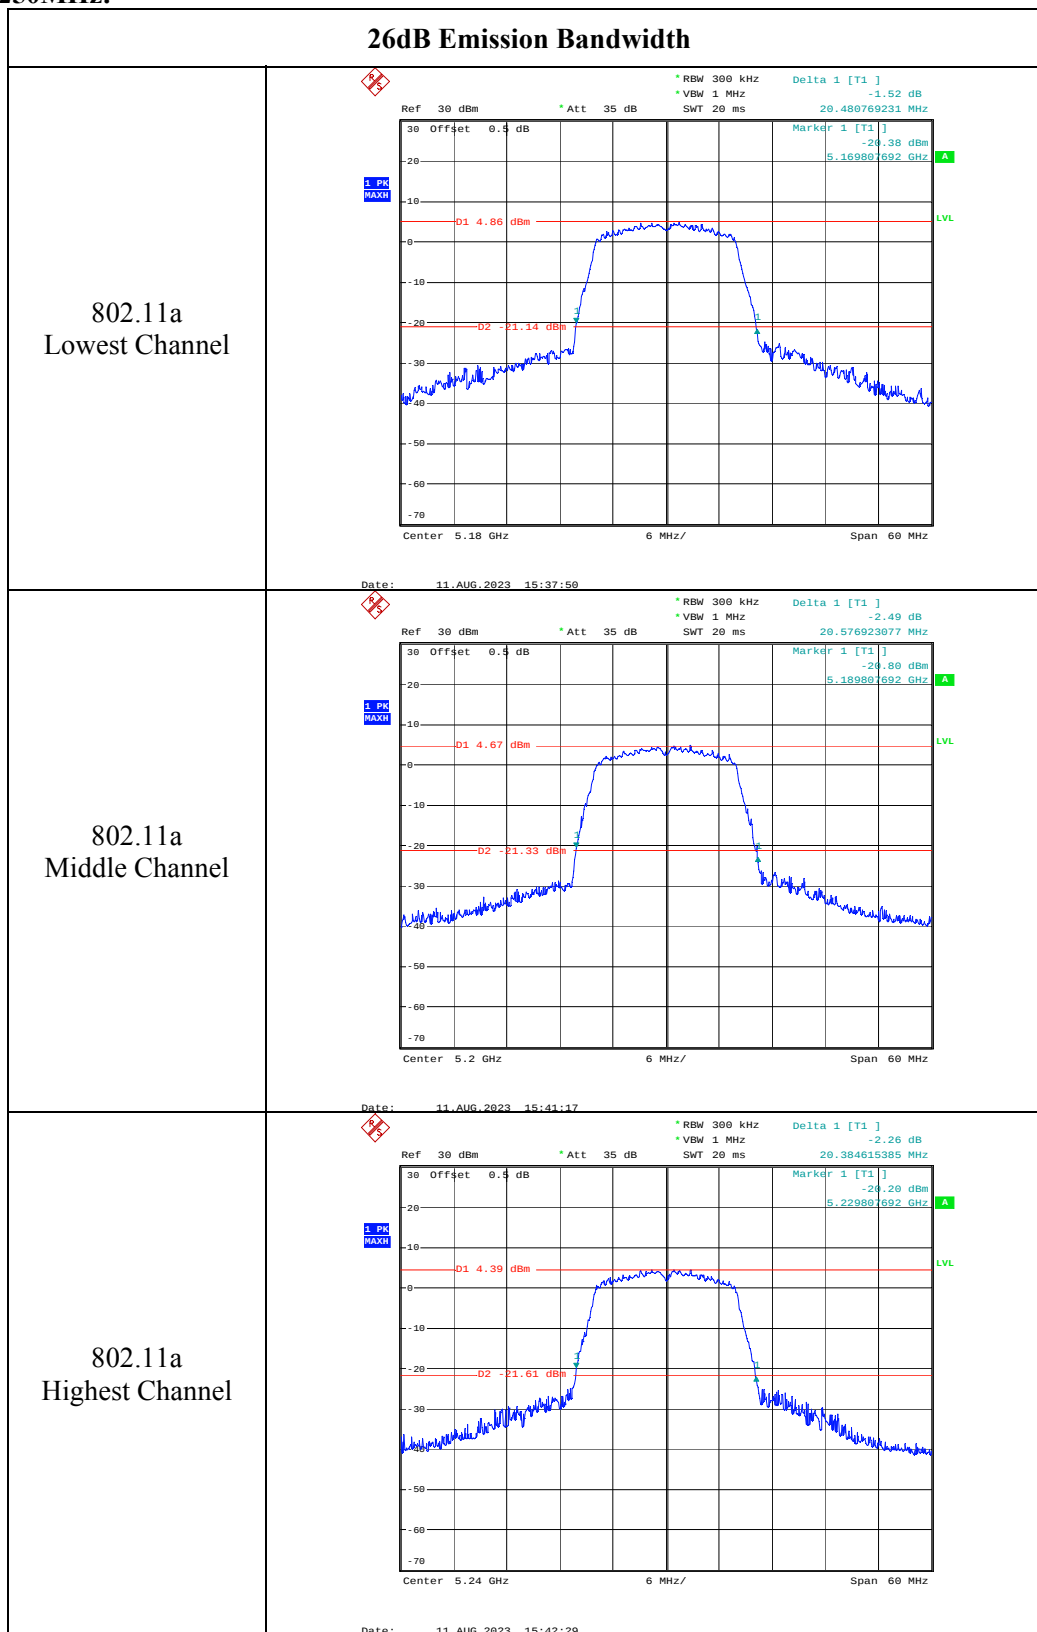
5470-5725 MHz:

Test Modes	Test Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5500	20.481	16.859
	5580	20.481	16.859
	5700	20.673	16.859
	5720	20.577	16.923
802.11ac vht20	5500	20.769	17.885
	5580	20.769	17.821
	5700	20.769	17.885
	5720	20.769	17.756
802.11ac vht40	5510	40.545	36.154
	5550	40.705	36.282
	5670	40.705	36.154
	5710	40.705	36.154
802.11ac vht80	5530	82.051	75.385
	5610	82.051	75.385
	5690	82.051	75.385

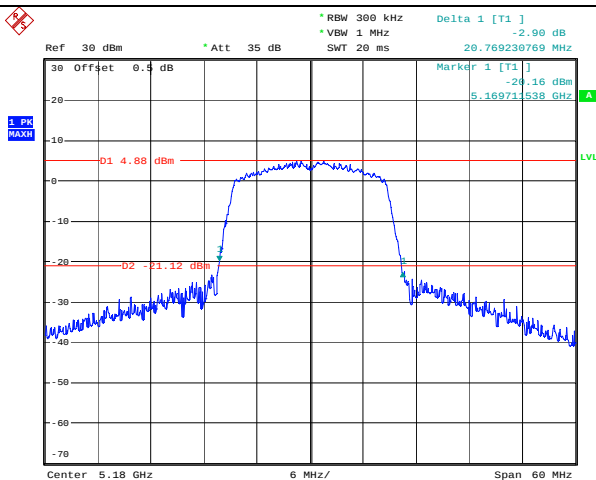
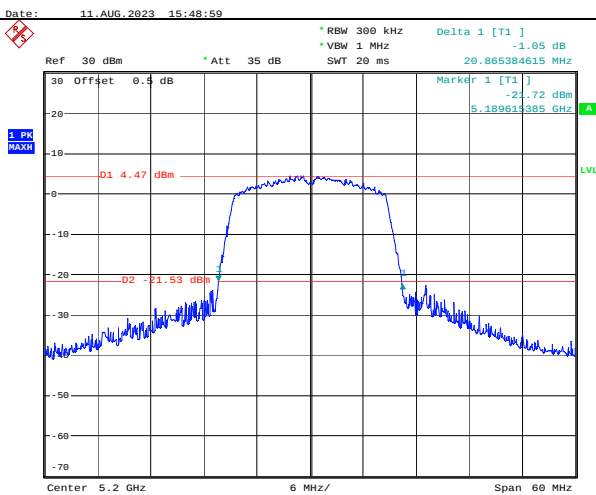
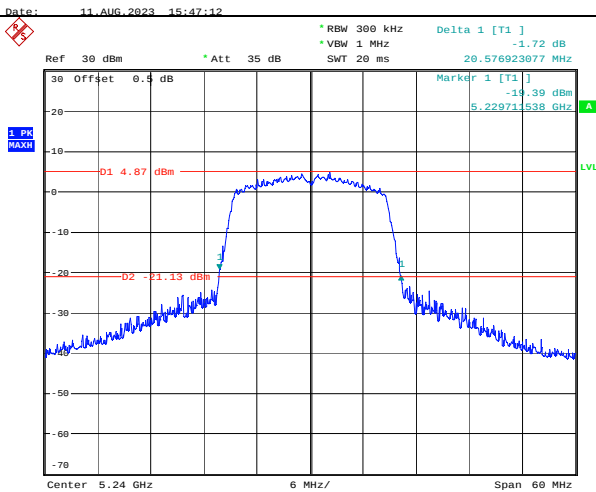
5725-5850 MHz:

Test Modes	Test Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5745	16.41	16.923
	5785	16.346	16.923
	5825	16.41	16.923
802.11ac vht20	5745	17.628	17.821
	5785	17.628	17.821
	5825	17.628	17.885
802.11ac vht40	5755	36.41	36.282
	5795	36.026	36.282
802.11ac vht80	5775	76.41	75.385
Note: 6dB Emission Bandwidth Limit: ≥ 0.5 MHz			

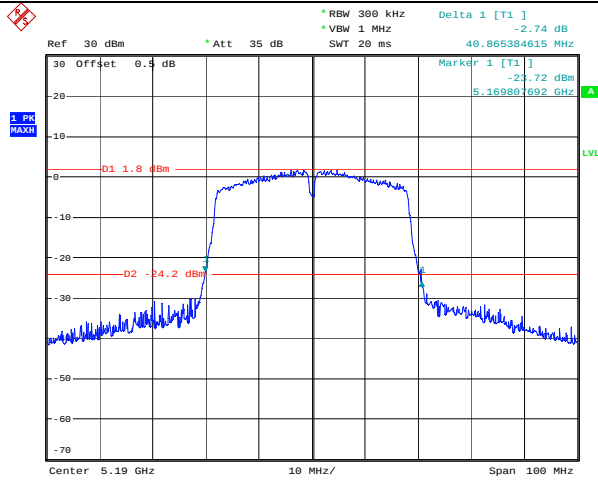
5150-5250MHz:



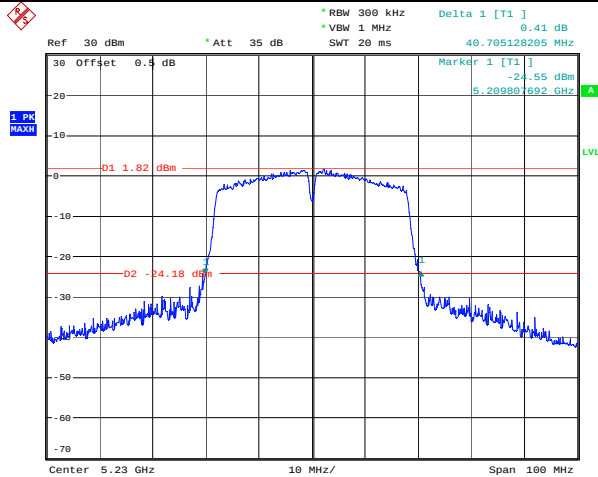
26dB Emission Bandwidth

802.11ac vht20
Lowest Channel802.11ac vht20
Middle Channel802.11ac vht20
Highest Channel

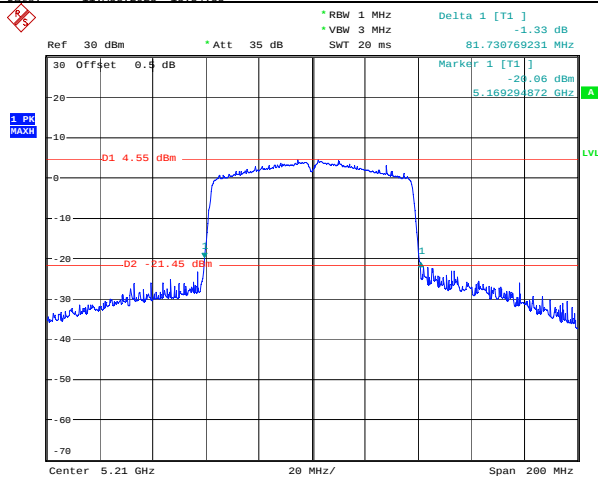
26dB Emission Bandwidth

802.11ac vht40
Lowest Channel

Date: 11.AUG.2023 15:52:32

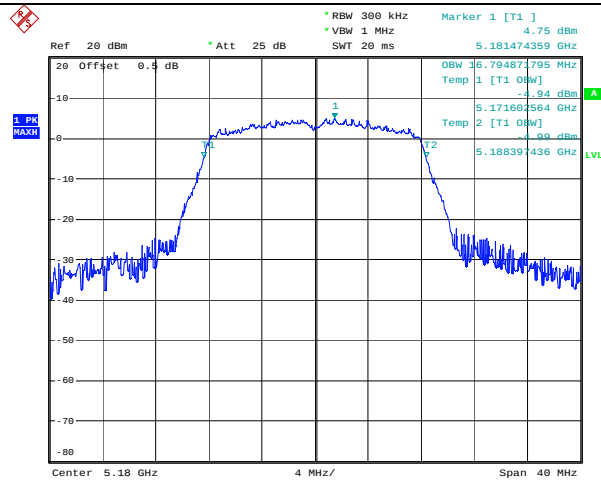
802.11ac vht40
Highest Channel

Date: 11.AUG.2023 15:54:55

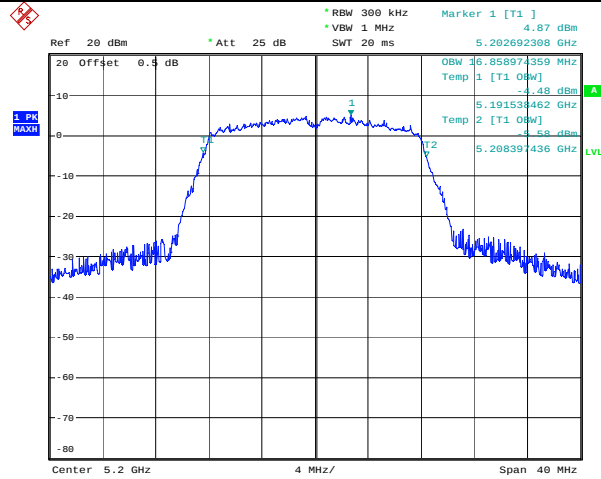
802.11ac vht80
Middle Channel

Date: 11.AUG.2023 16:07:46

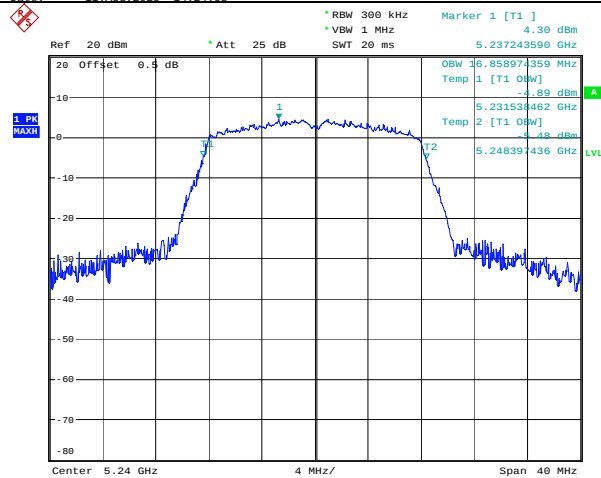
99% Emission Bandwidth

802.11a
Lowest Channel

Date: 11.AUG.2023 14:23:08

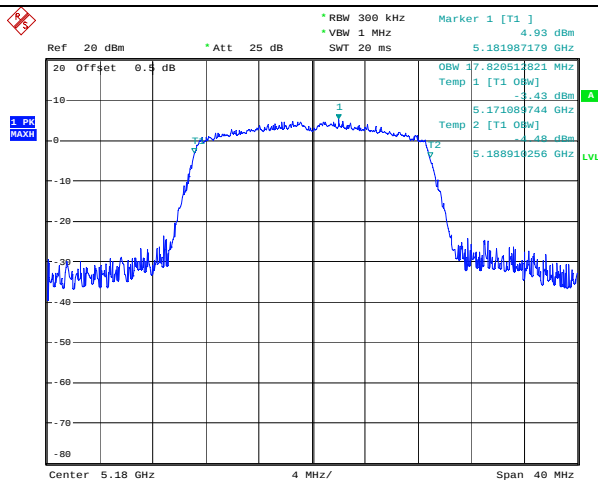
802.11a
Middle Channel

Date: 11.AUG.2023 14:24:03

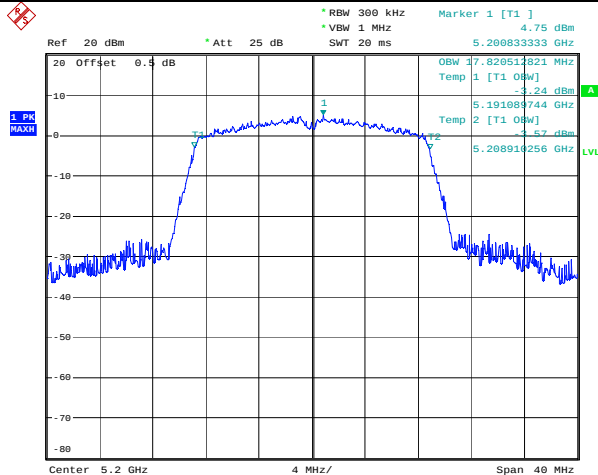
802.11a
Highest Channel

Date: 11.AUG.2023 14:24:34

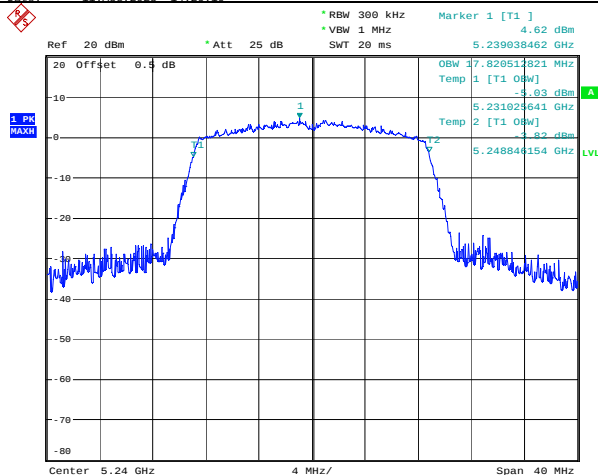
99% Emission Bandwidth

802.11ac vht20
Lowest Channel

Date: 11.AUG.2023 14:26:41

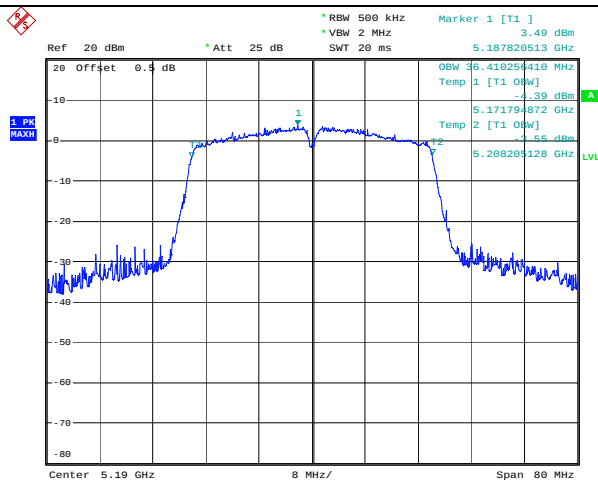
802.11ac vht20
Middle Channel

Date: 11.AUG.2023 14:26:10

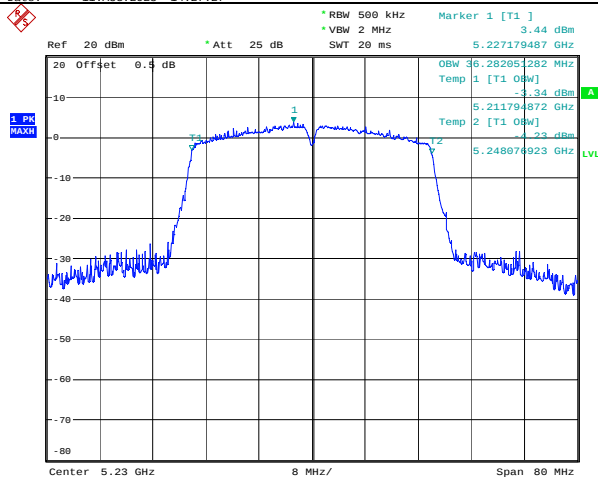
802.11ac vht20
Highest Channel

Date: 11.AUG.2023 14:25:33

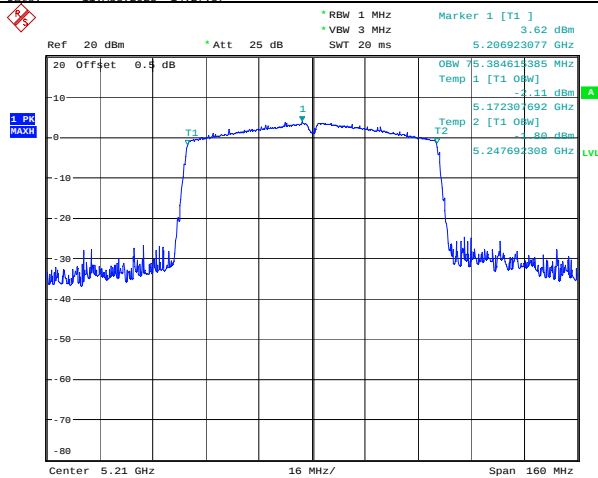
99% Emission Bandwidth

802.11ac vht40
Lowest Channel

Date: 11.AUG.2023 14:27:27

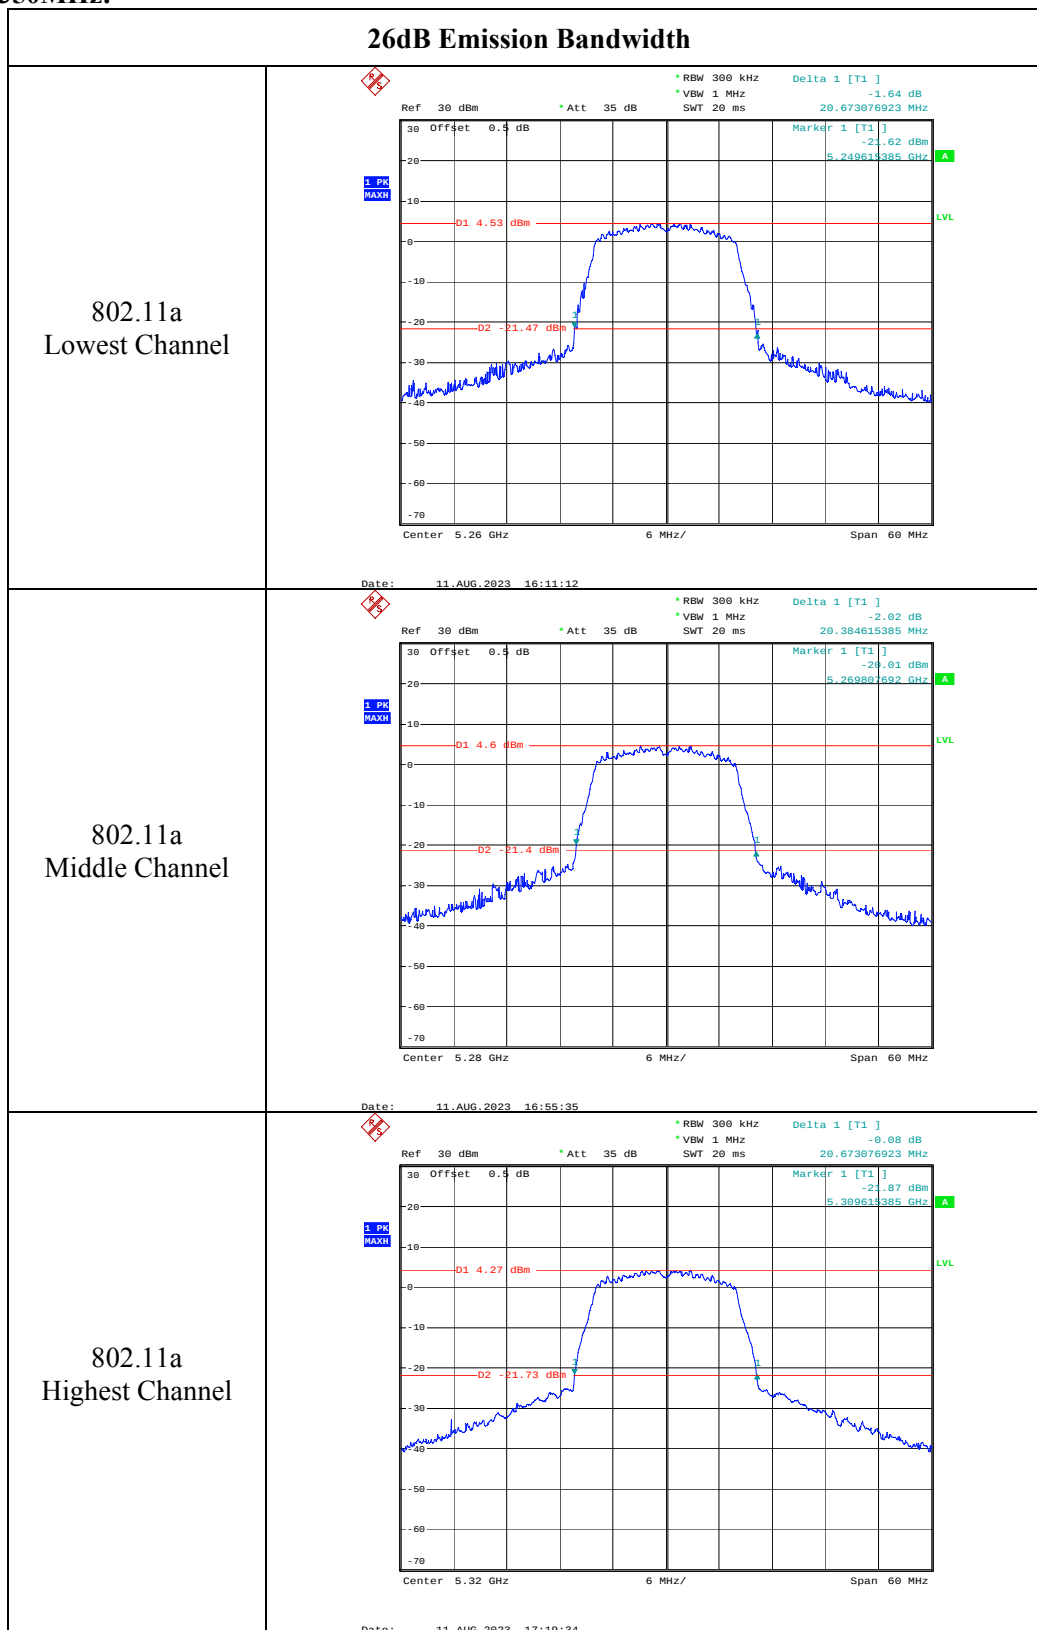
802.11ac vht40
Highest Channel

Date: 11.AUG.2023 14:27:57

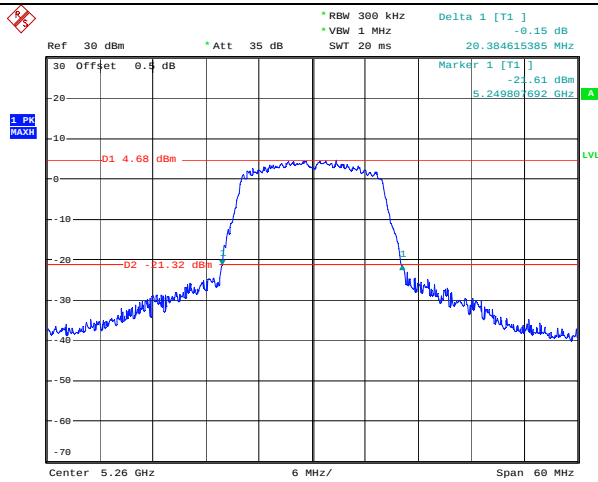
802.11ac vht80
Middle Channel

Date: 11.AUG.2023 14:28:42

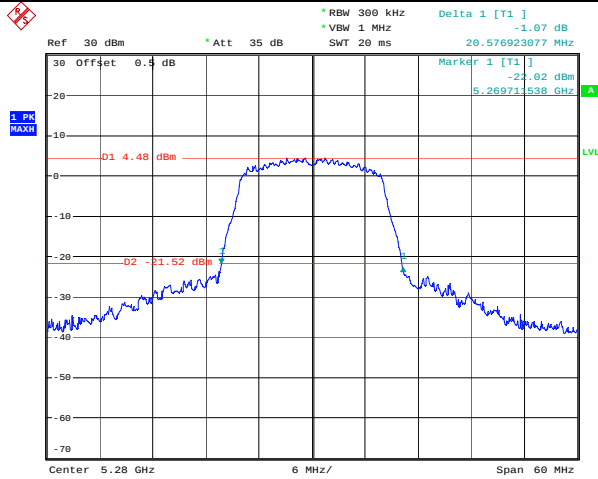
5250-5350MHz:



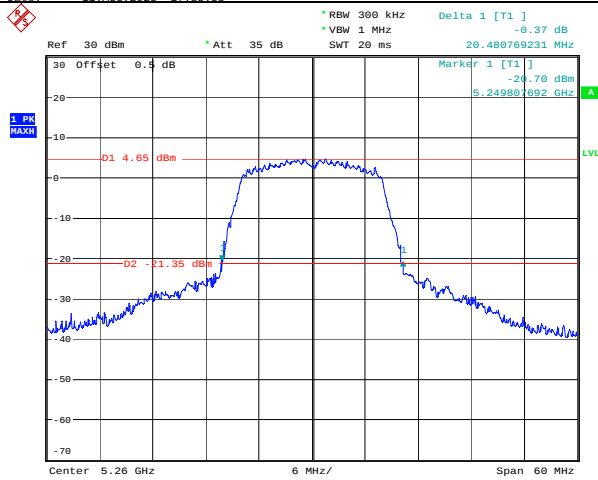
26dB Emission Bandwidth

802.11ac vht20
Lowest Channel

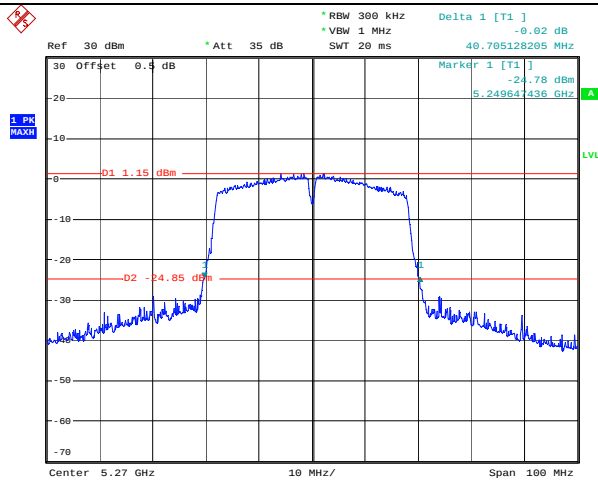
Date: 11.AUG.2023 17:39:11

802.11ac vht20
Middle Channel

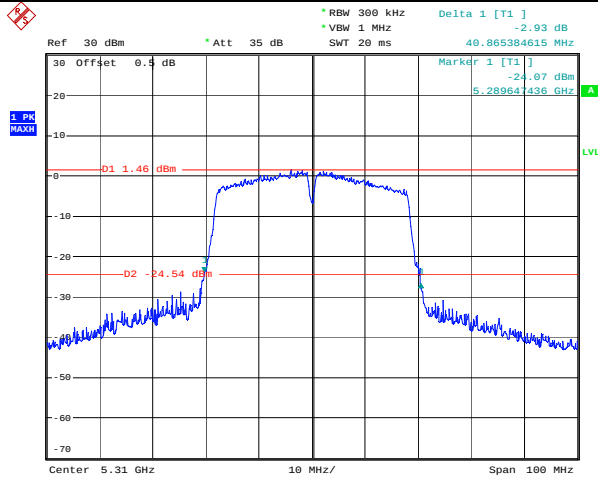
Date: 11.AUG.2023 17:35:53

802.11ac vht20
Highest Channel

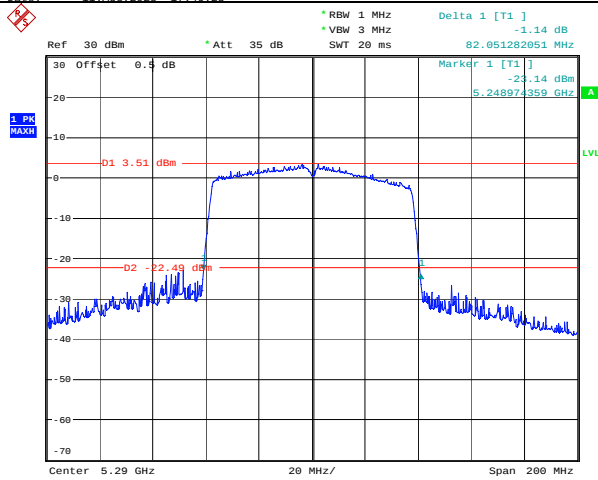
Date: 11.AUG.2023 17:28:10

26dB Emission Bandwidth802.11ac vht40
Lowest Channel

Date: 11.AUG.2023 17:43:32

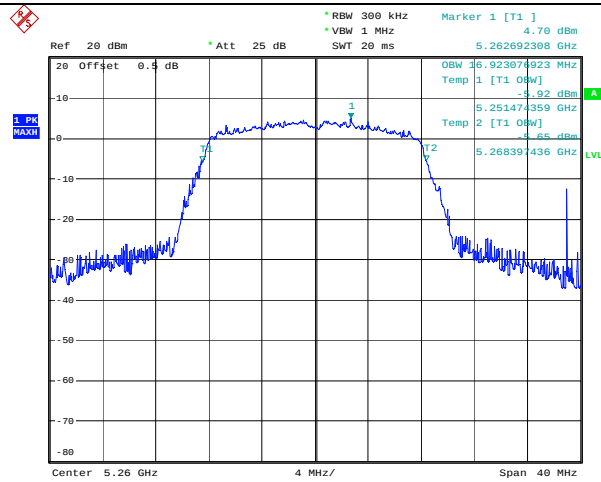
802.11ac vht40
Highest Channel

Date: 11.AUG.2023 17:46:23

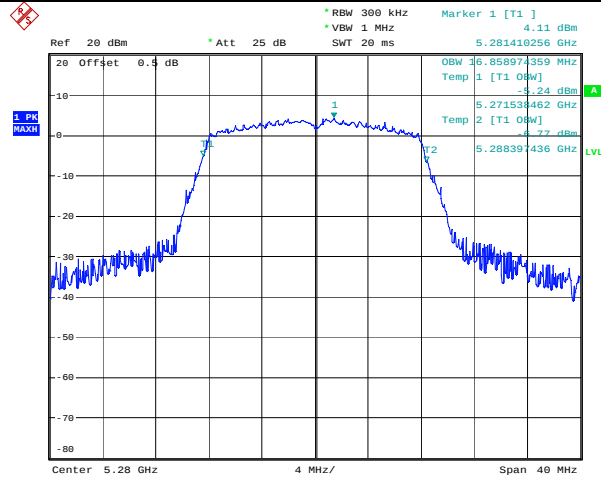
802.11ac vht80
Middle Channel

Date: 11.AUG.2023 17:49:31

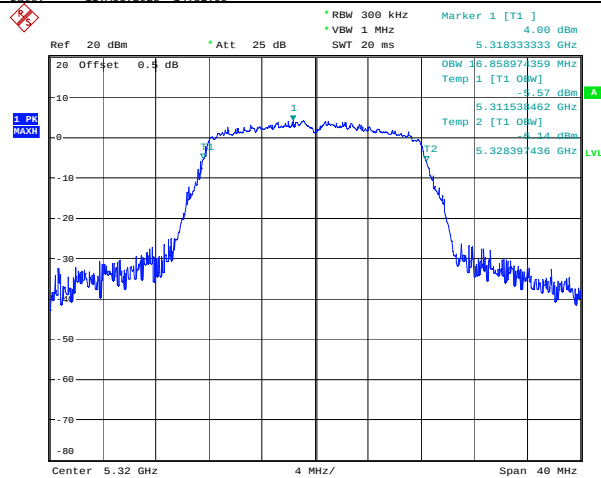
99% Emission Bandwidth

802.11a
Lowest Channel

Date: 11.AUG.2023 14:30:42

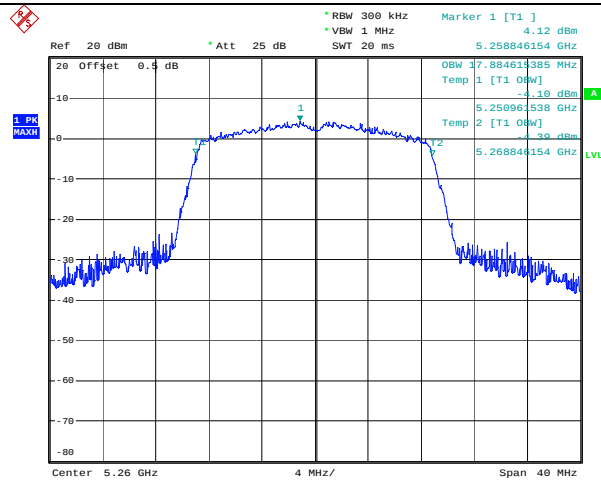
802.11a
Middle Channel

Date: 11.AUG.2023 14:31:09

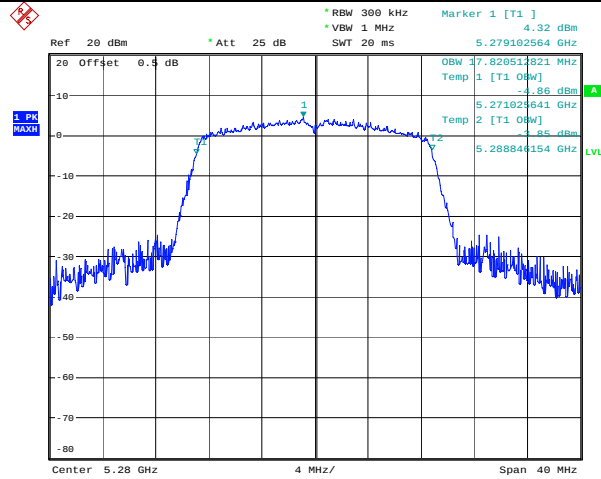
802.11a
Highest Channel

Date: 11.AUG.2023 14:31:38

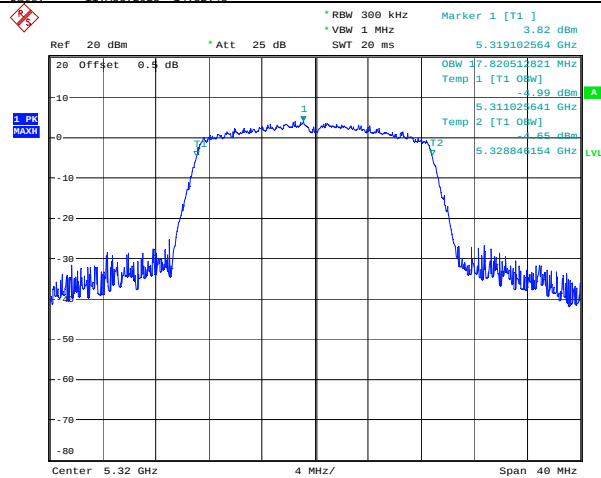
99% Emission Bandwidth

802.11ac vht20
Lowest Channel

Date: 11.AUG.2023 14:33:04

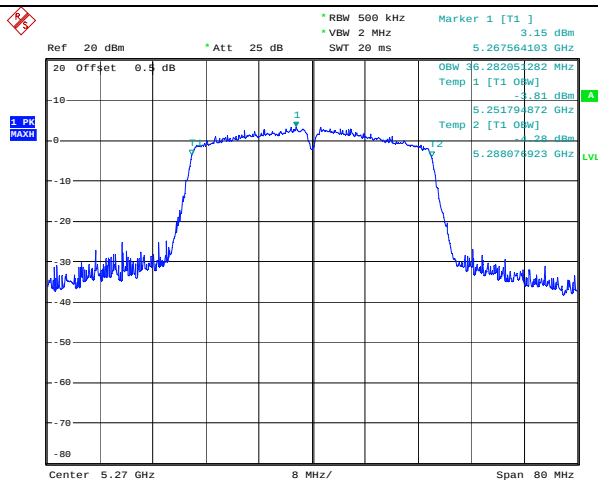
802.11ac vht20
Middle Channel

Date: 11.AUG.2023 14:32:43

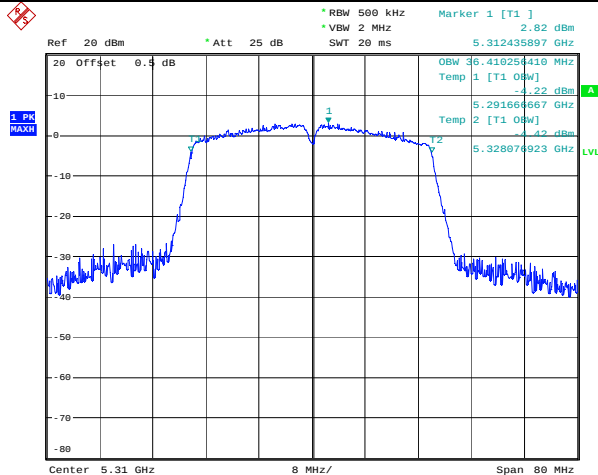
802.11ac vht20
Highest Channel

Date: 11.AUG.2023 14:32:16

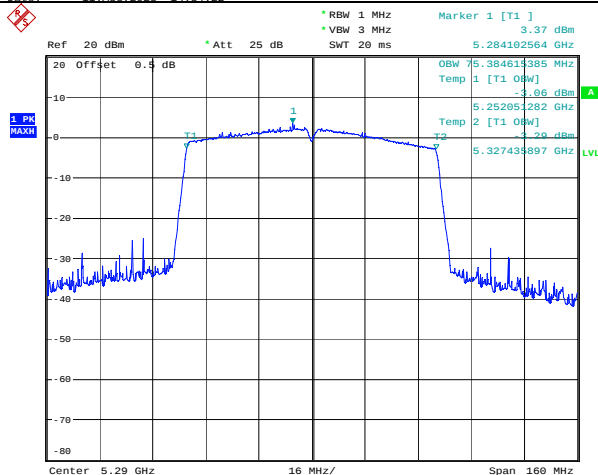
99% Emission Bandwidth

802.11ac vht40
Lowest Channel

Date: 11.AUG.2023 14:33:55

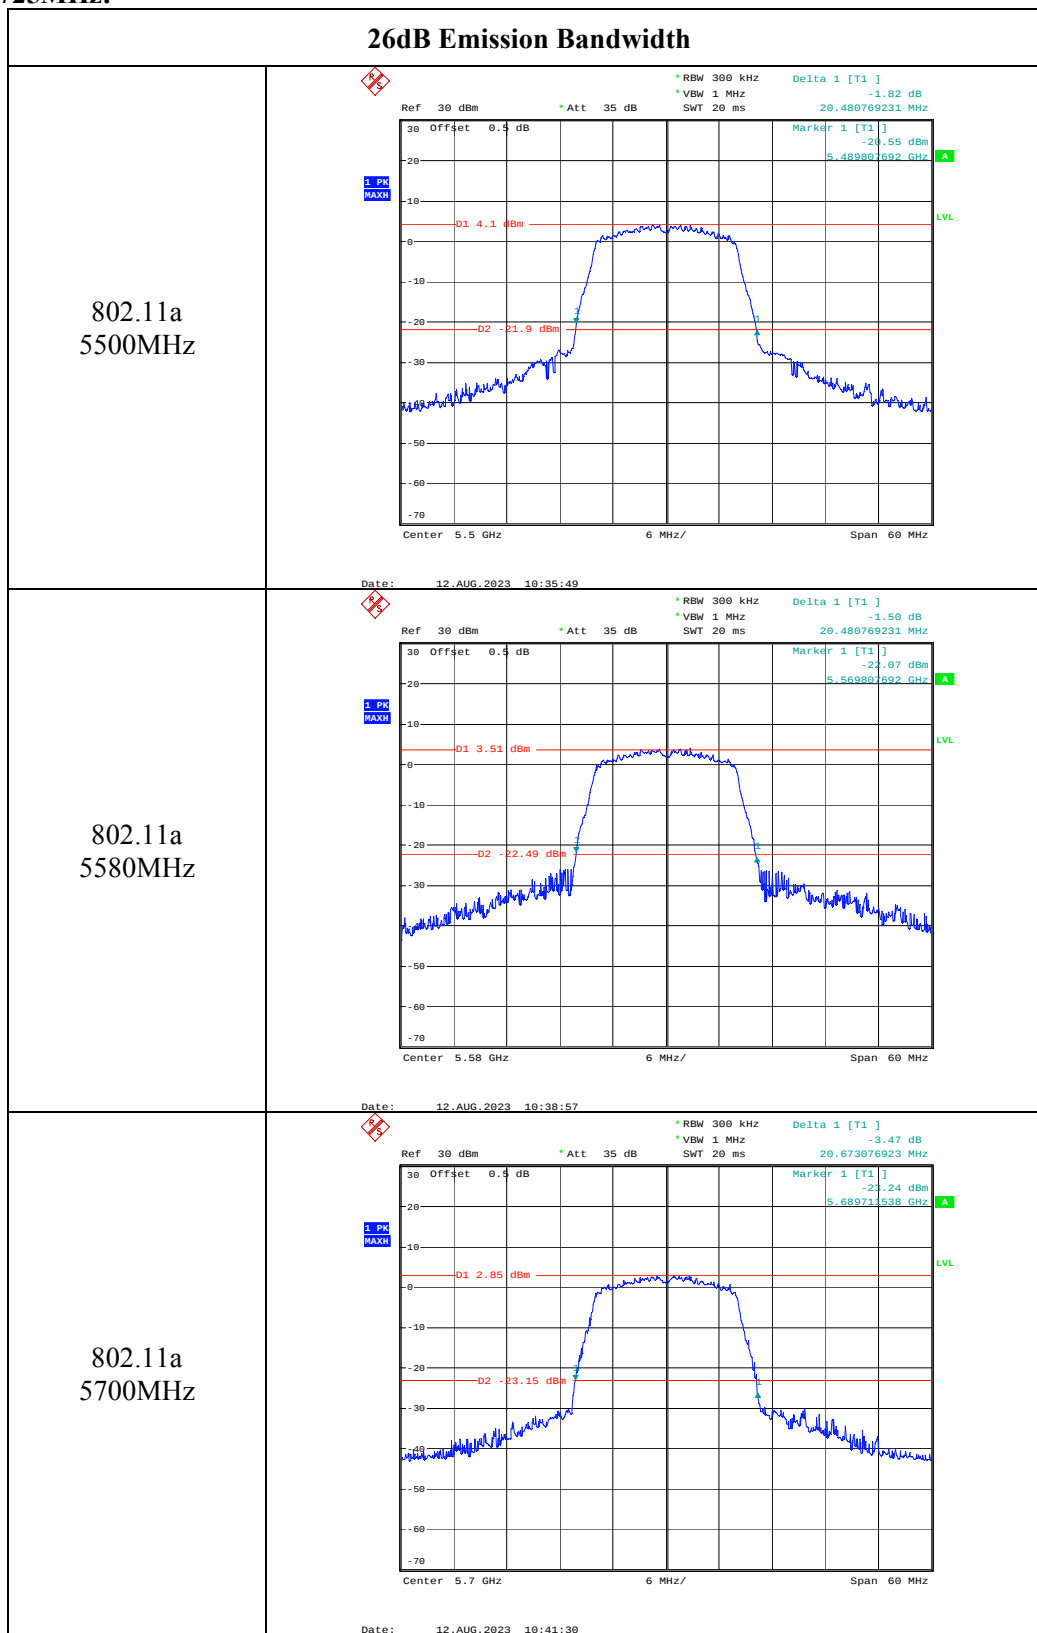
802.11ac vht40
Highest Channel

Date: 11.AUG.2023 14:34:22

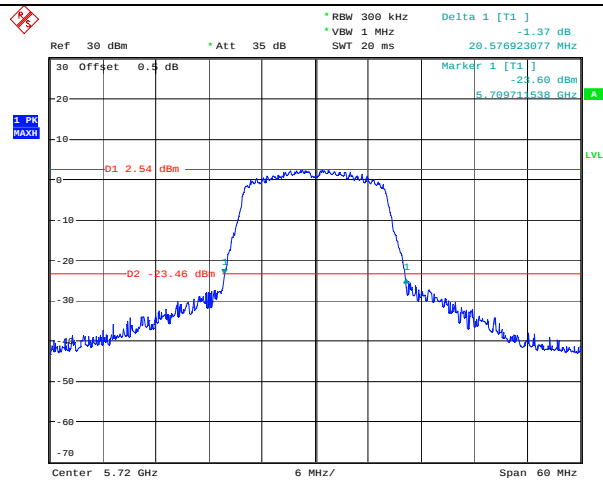
802.11ac vht80
Middle Channel

Date: 11.AUG.2023 14:28:29

5470-5725MHz:

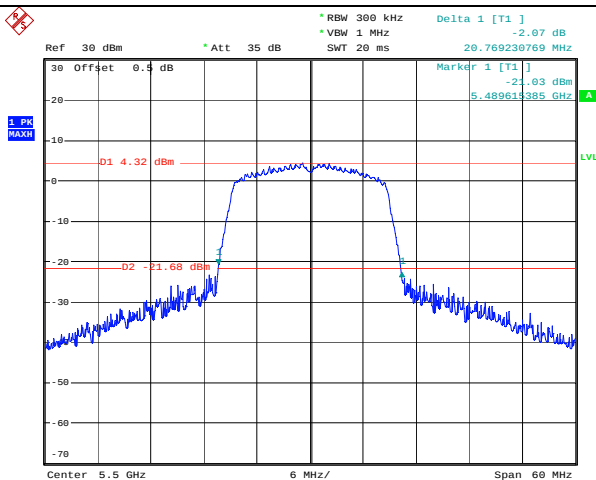


802.11a
5720MHz

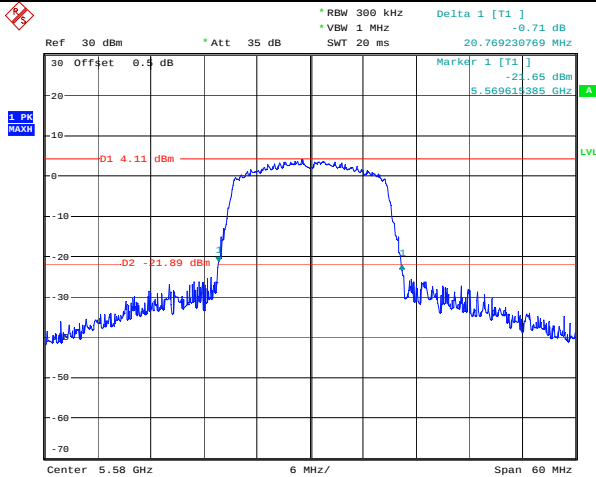


Date: 12.AUG.2023 10:43:07

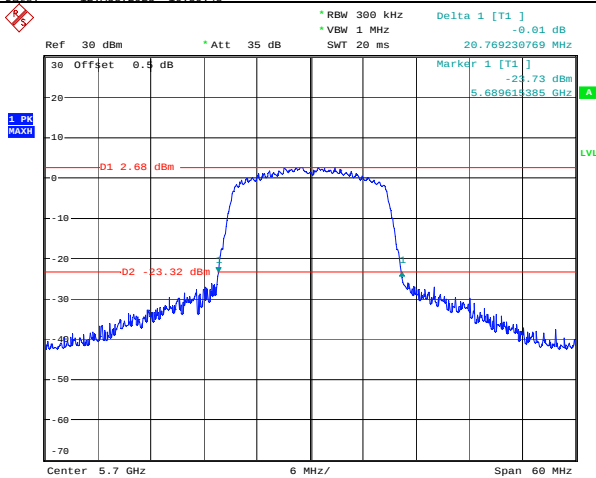
26dB Emission Bandwidth

802.11ac vht20
5500MHz

Date: 12.AUG.2023 10:53:47

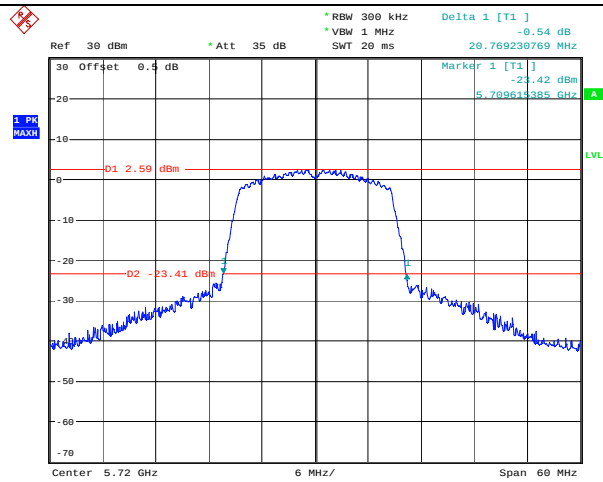
802.11ac vht20
5580MHz

Date: 12.AUG.2023 10:50:48

802.11ac vht20
5700MHz

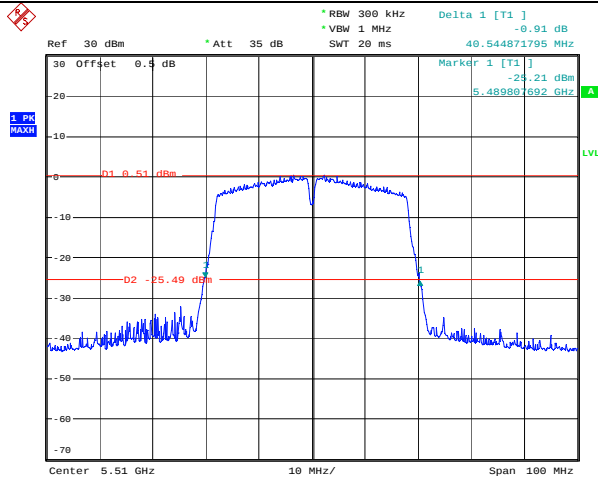
Date: 12.AUG.2023 10:49:59

802.11ac vht20
5720MHz

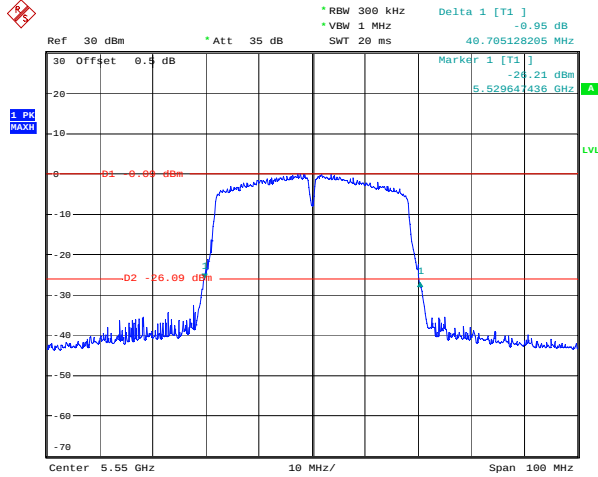


Date: 12.AUG.2023 10:46:40

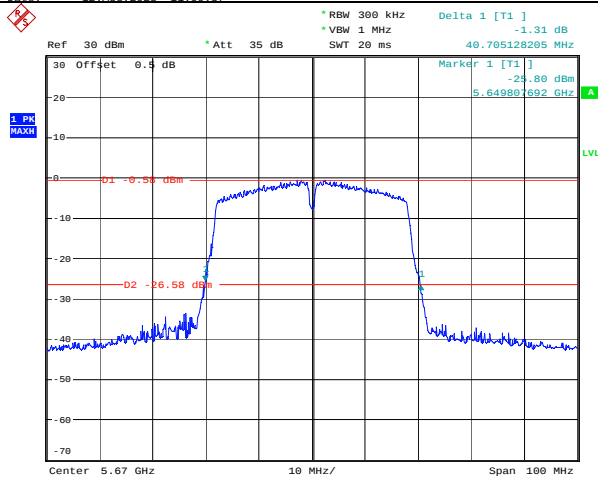
26dB Emission Bandwidth

802.11ac vht40
5510MHz

Date: 12.AUG.2023 10:56:58

802.11ac vht40
5550MHz

Date: 12.AUG.2023 11:00:37

802.11ac vht40
5670MHz

Date: 12.AUG.2023 11:04:23

1 PR MAX

Ref 30 dBm Att 35 dB SWT 20 ms Delta 1 [T1] -2.98 dB

30 Offset 0.5 dB Marker 1 [T1] -24.17 dBm 5.689807692 GHz

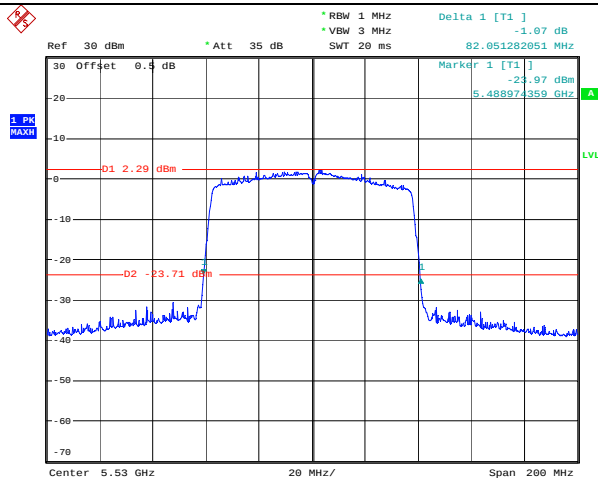
D1 -1.06 dBm

D2 -27.06 dBm

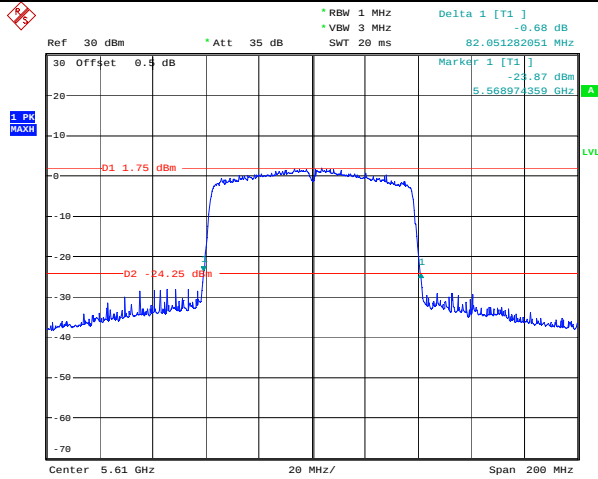
Center 5.71 GHz 10 MHz/ Span 100 MHz

Date: 12.AUG.2023 11:08:20

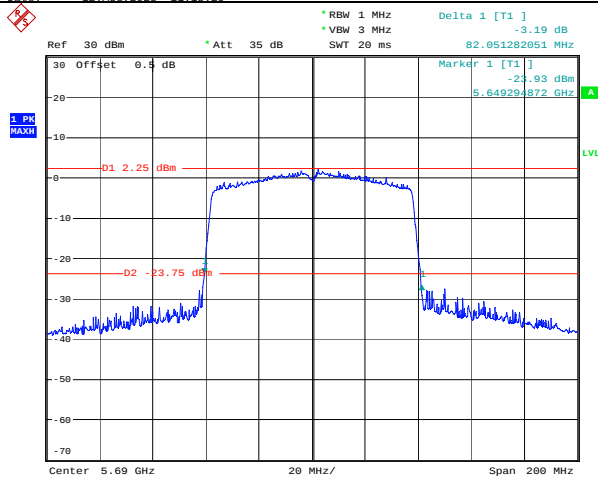
26dB Emission Bandwidth

802.11ac vht80
5530MHz

Date: 12.AUG.2023 11:10:42

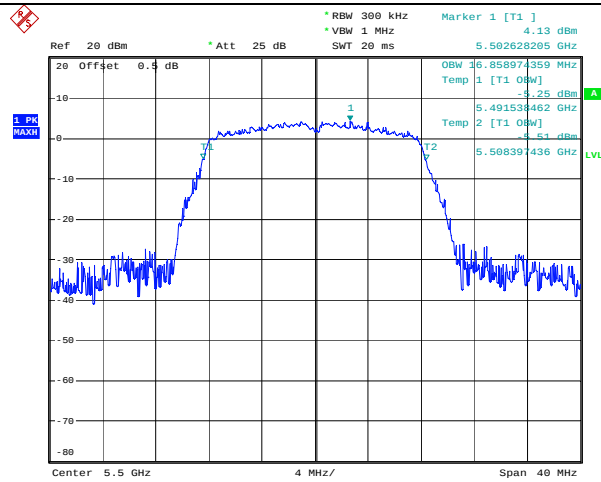
802.11ac vht80
5610MHz

Date: 12.AUG.2023 11:15:29

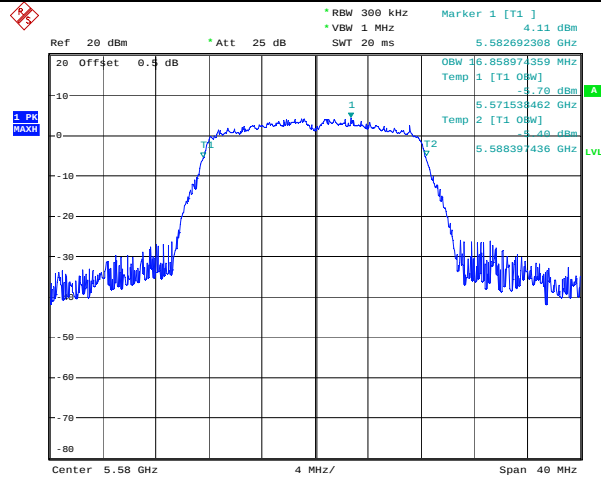
802.11ac vht80
5690MHz

Date: 12.AUG.2023 11:17:25

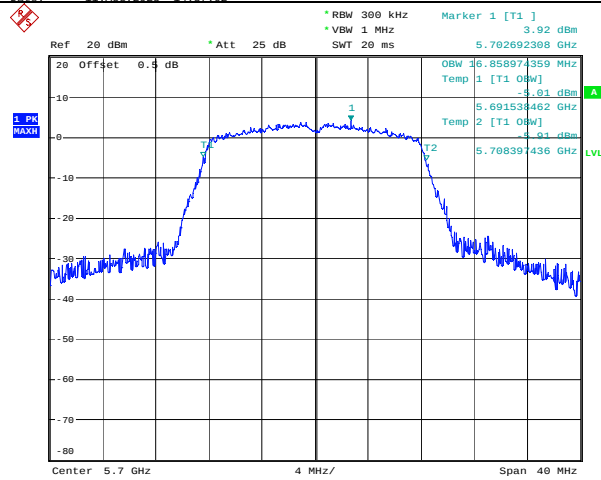
99% Emission Bandwidth

802.11a
5500MHz

Date: 11.AUG.2023 14:36:37

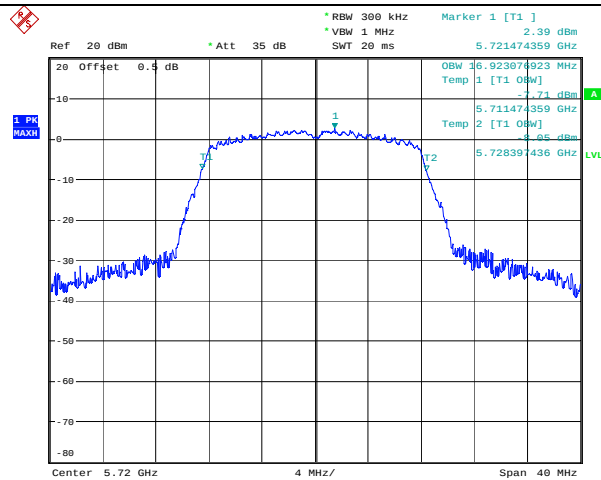
802.11a
5580MHz

Date: 11.AUG.2023 14:37:02

802.11a
5700MHz

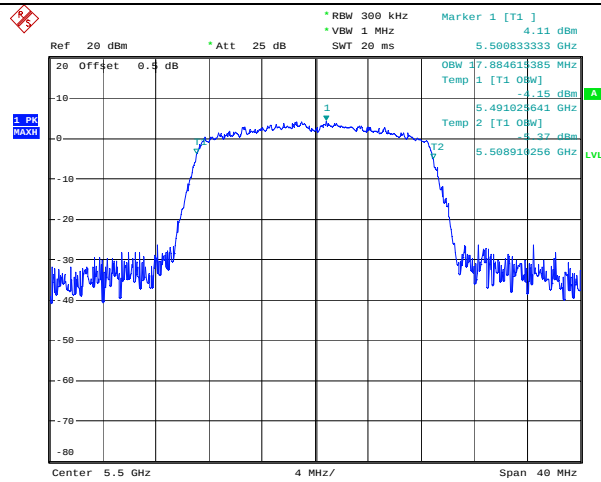
Date: 11.AUG.2023 14:37:24

802.11a
5720MHz

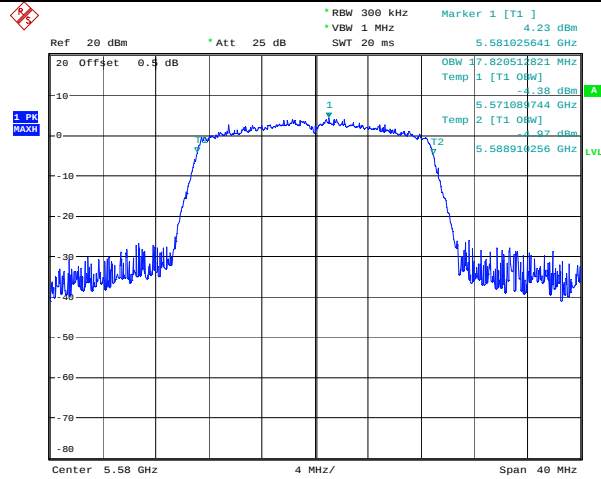


Date: 12.AUG.2023 11:34:35

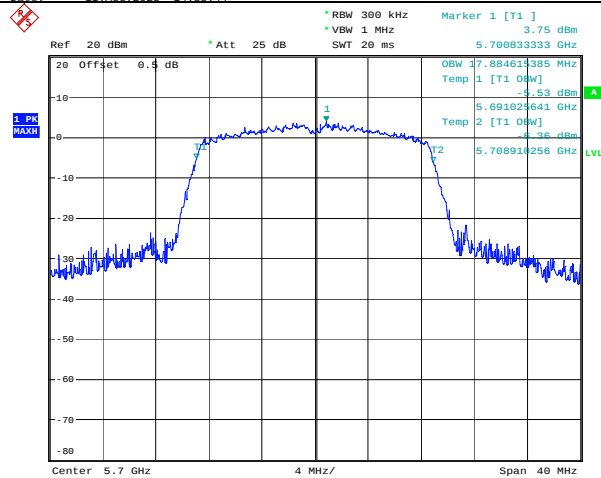
99% Emission Bandwidth

802.11ac vht20
5500MHz

Date: 11.AUG.2023 14:39:12

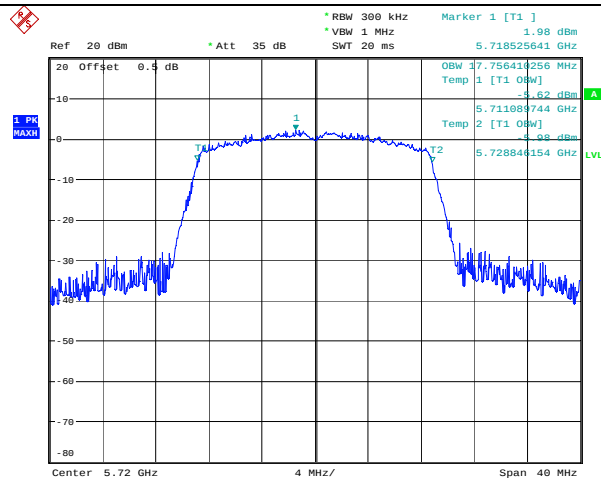
802.11ac vht20
5580MHz

Date: 11.AUG.2023 14:38:44

802.11ac vht20
5700MHz

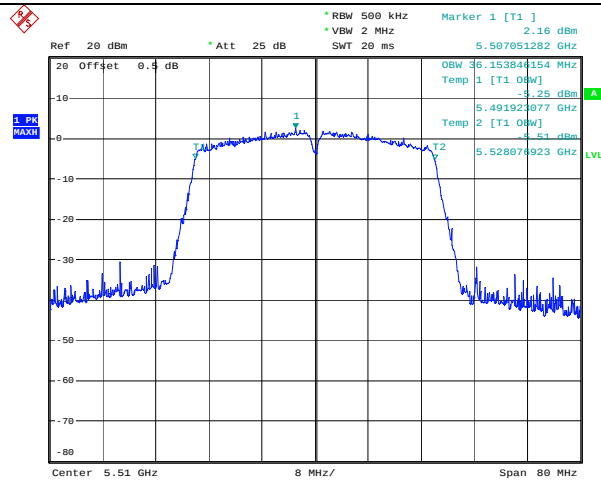
Date: 11.AUG.2023 14:38:09

802.11ac vht20
5720MHz

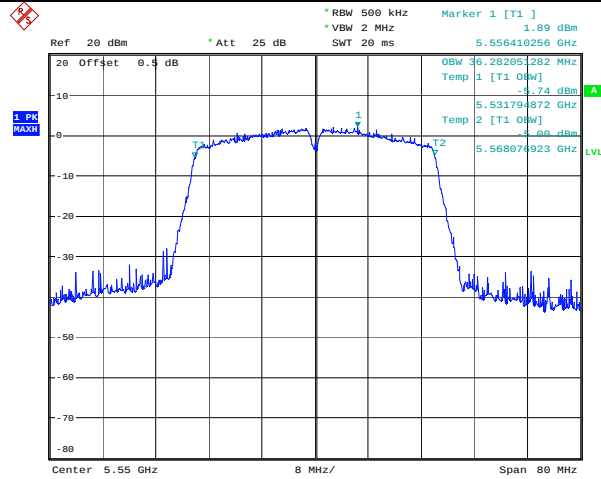


Date: 12.AUG.2023 11:36:14

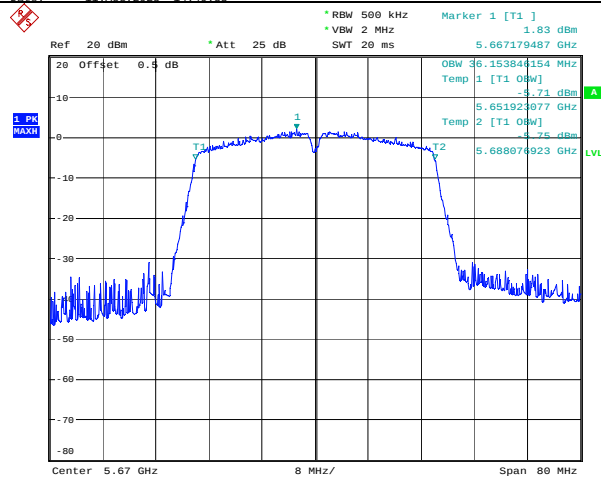
99% Emission Bandwidth

802.11ac vht40
5510MHz

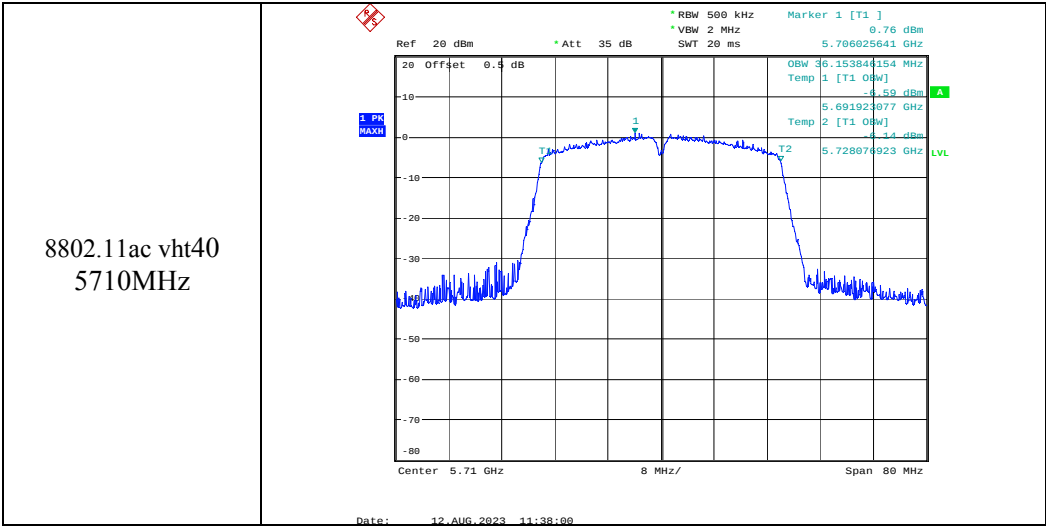
Date: 11.AUG.2023 14:40:10

802.11ac vht40
5550MHz

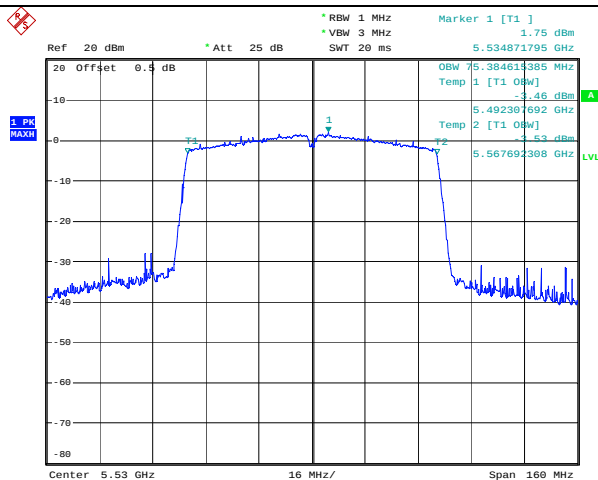
Date: 11.AUG.2023 14:40:33

802.11ac vht40
5670MHz

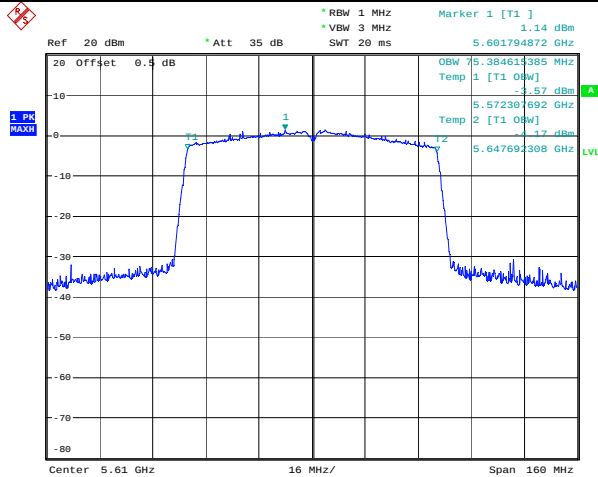
Date: 11.AUG.2023 14:41:00



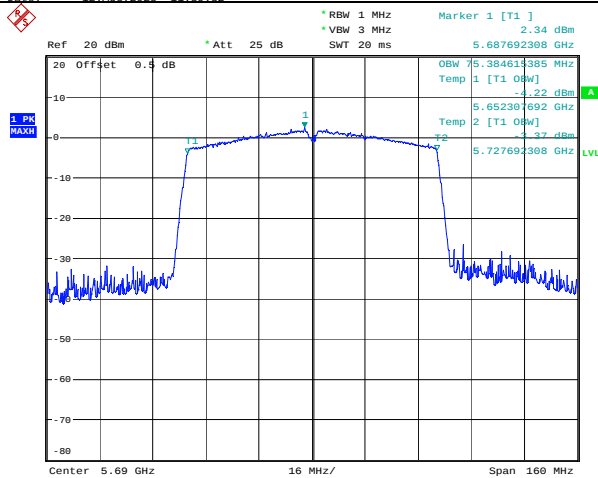
99% Emission Bandwidth

802.11ac vht80
5530MHz

Date: 11.AUG.2023 14:41:39

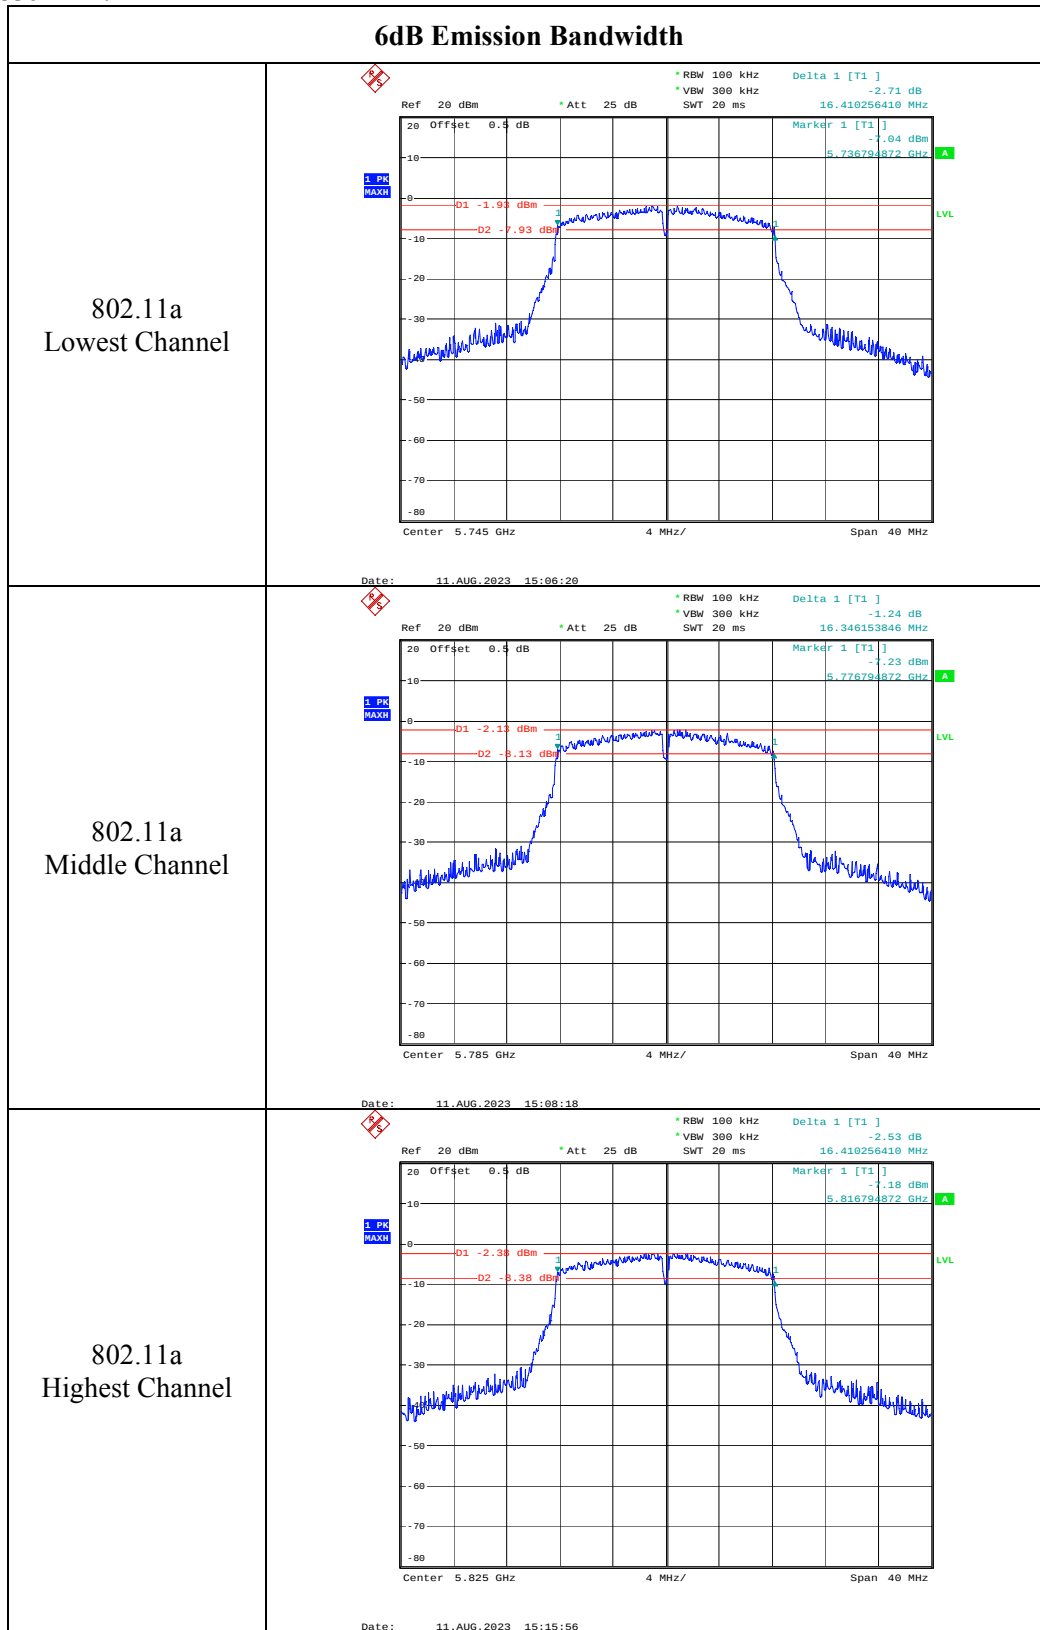
802.11ac vht80
5610MHz

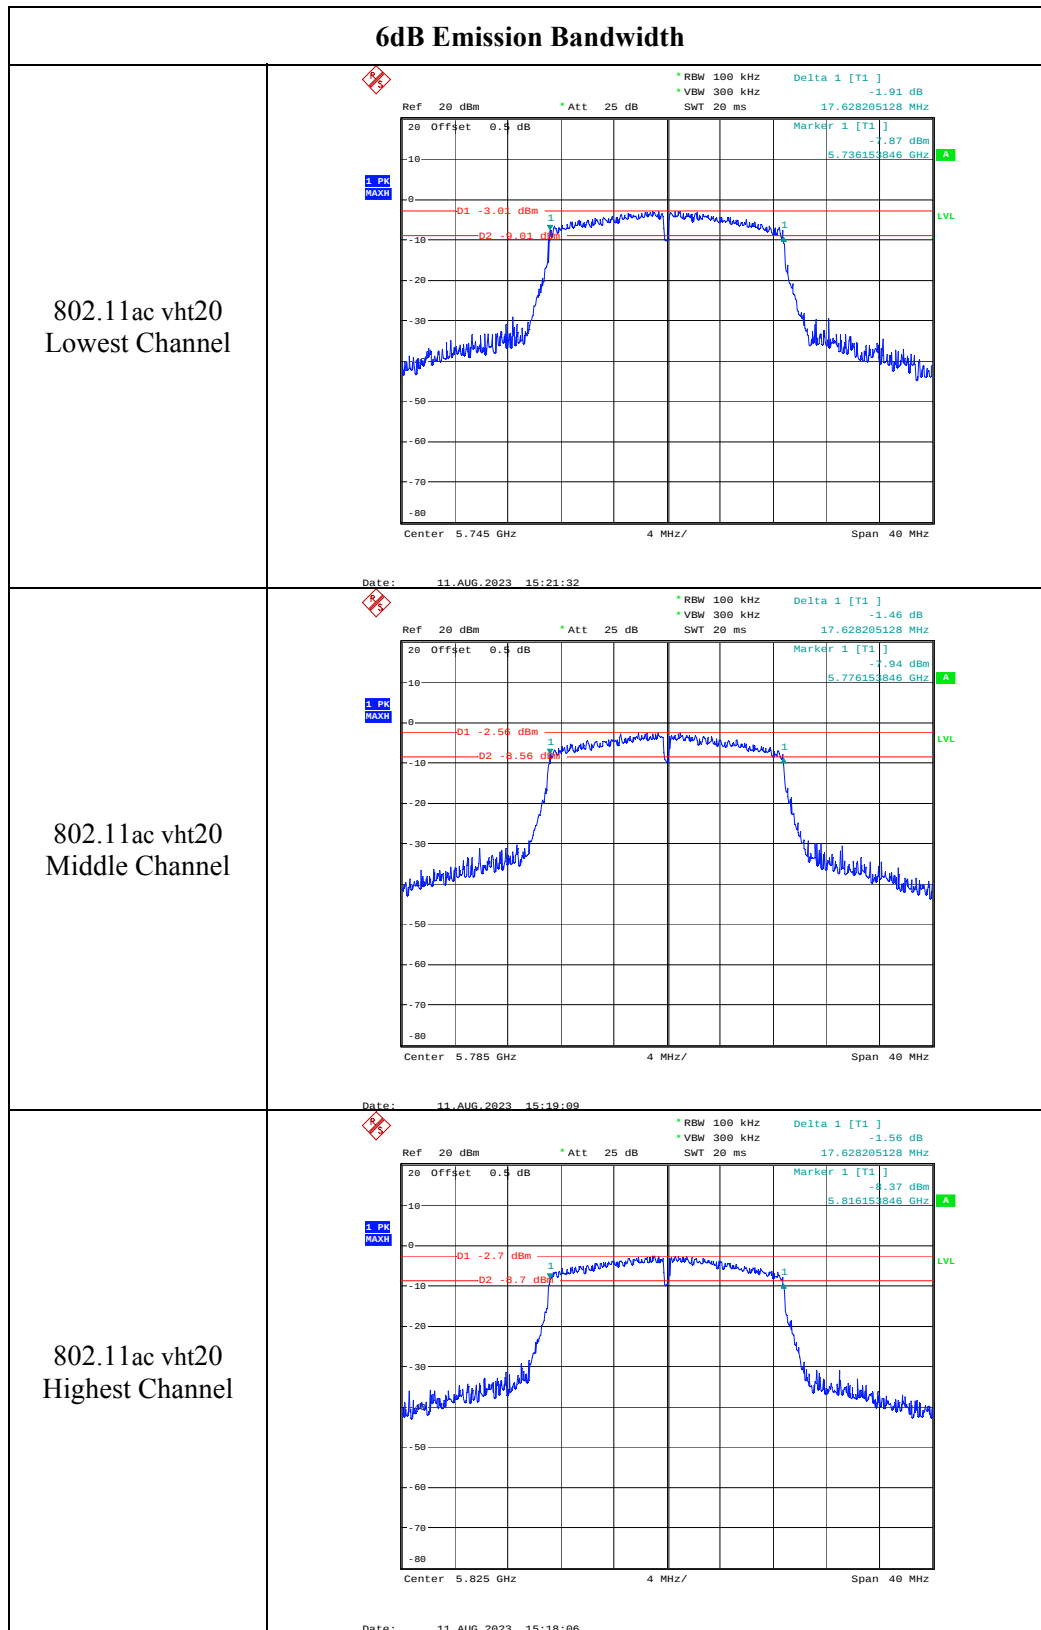
Date: 12.AUG.2023 11:39:32

802.11ac vht80
5690MHz

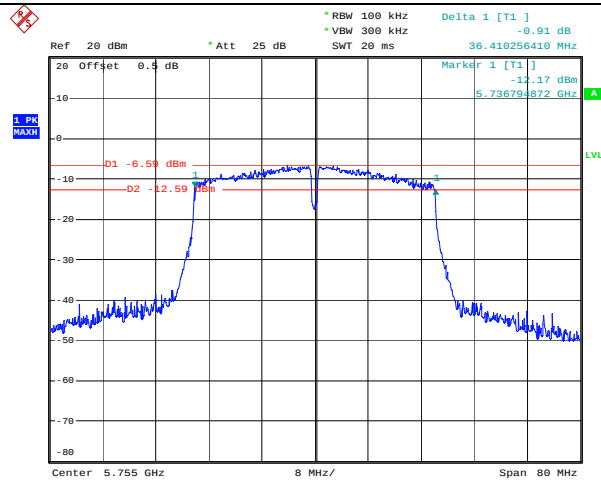
Date: 11.AUG.2023 14:42:09

5725-5850MHz:

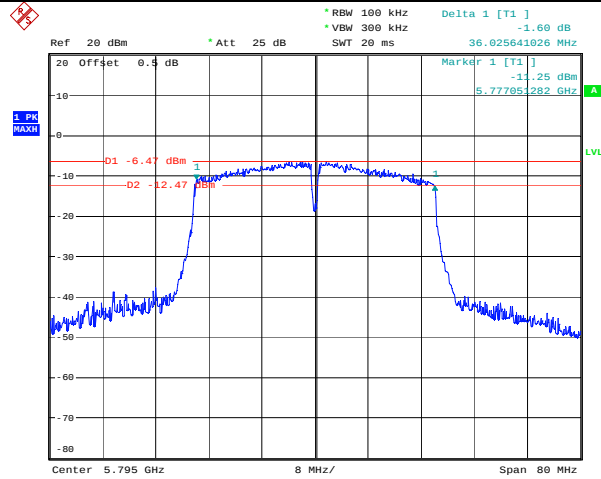




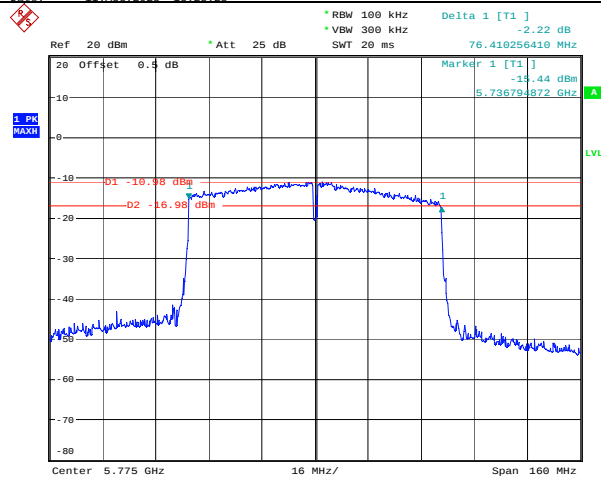
6dB Emission Bandwidth

802.11ac vht40
Lowest Channel

Date: 11.AUG.2023 15:24:09

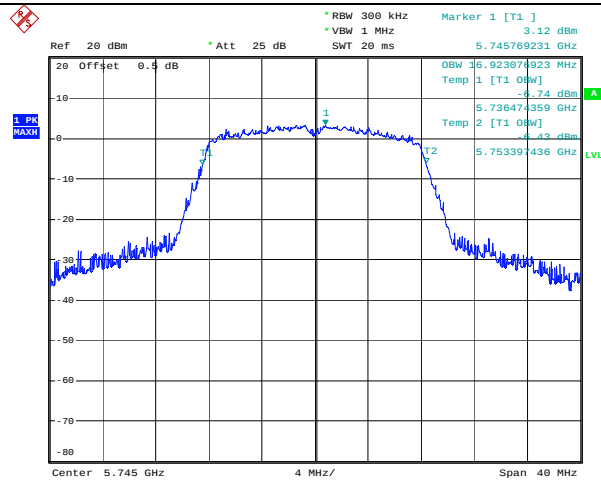
802.11ac vht40
Highest Channel

Date: 11.AUG.2023 15:28:25

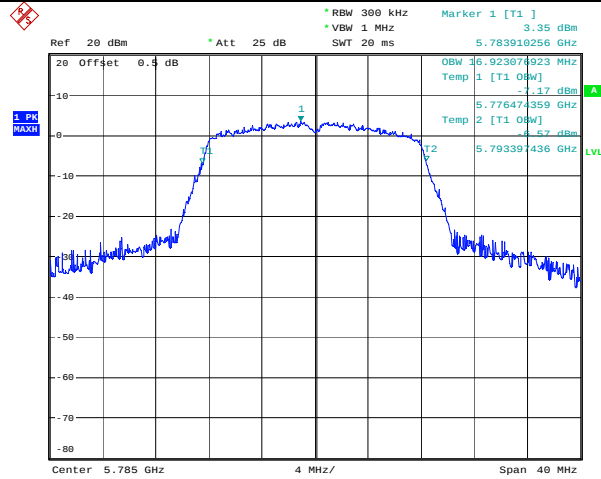
802.11ac vht80
Middle Channel

Date: 11.AUG.2023 15:30:01

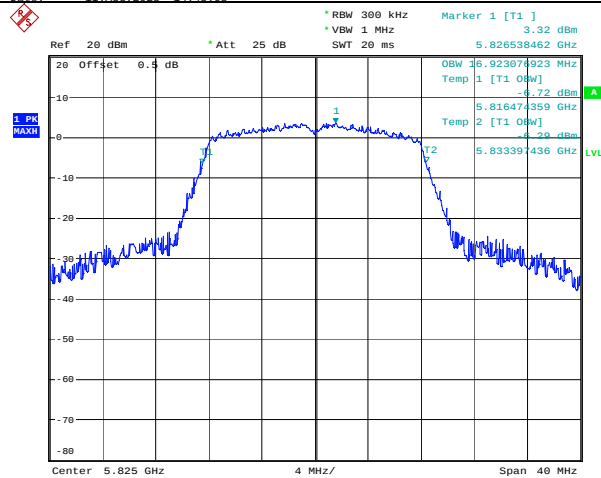
99% Emission Bandwidth

802.11a
Lowest Channel

Date: 11.AUG.2023 14:44:44

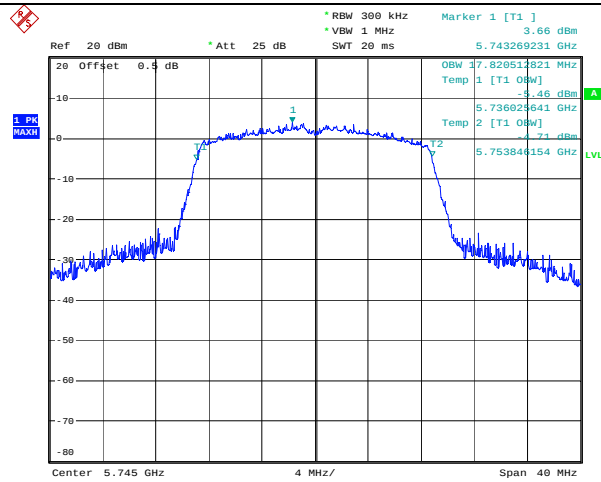
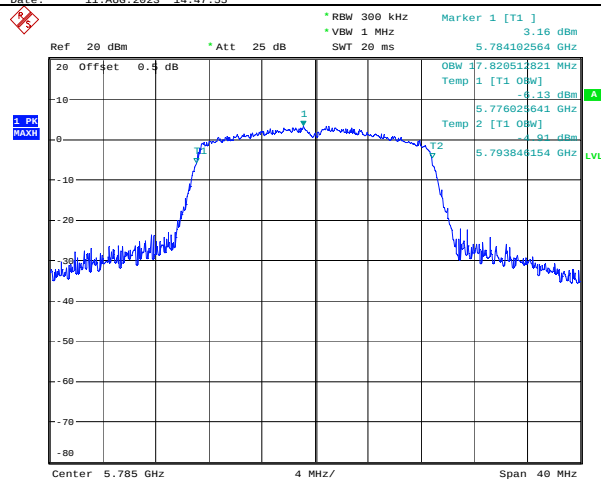
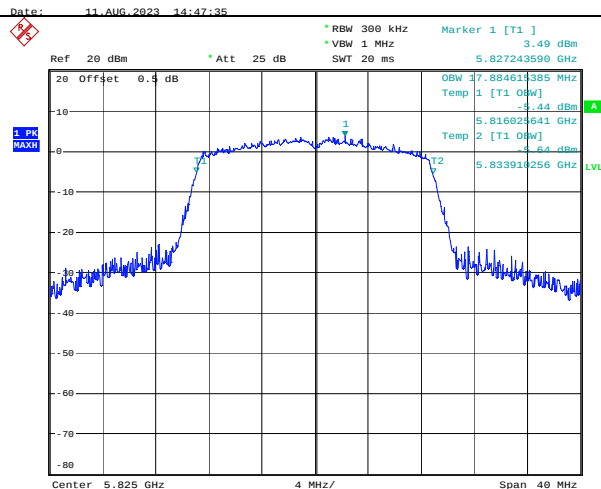
802.11a
Middle Channel

Date: 11.AUG.2023 14:45:05

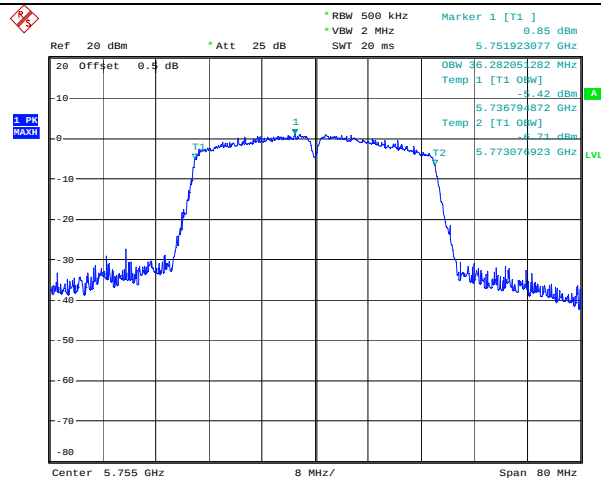
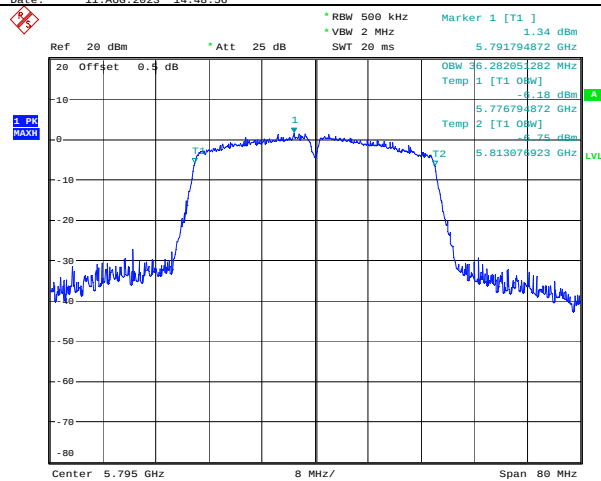
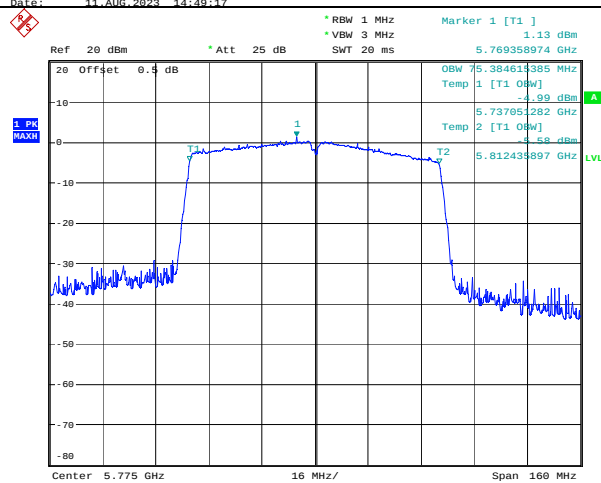
802.11a
Highest Channel

Date: 11.AUG.2023 14:45:26

99% Emission Bandwidth

802.11ac vht20
Lowest Channel802.1ac vht20
Middle Channel802.11ac vht20
Highest Channel

99% Emission Bandwidth

802.11ac vht40
Lowest Channel802.11ac vht40
Highest Channel802.11ac vht80
Middle Channel

4.4 Maximum Conducted Output Power:

Serial Number:	2941-1	Test Date:	2023/8/11~2023/8/12
Test Site:	RF	Test Mode:	Transmitting
Tester:	LingLing Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.5~26.2	Relative Humidity: (%)	60~61	ATM Pressure: (kPa)	100.2~100.3
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
zhuoxiang	Coaxial Cable	SMA-178	211003	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060302	Each time	N/A
Agilent	USB Wideband Power Sensor	U2021XA	MY54080015	2023/3/31	2024/3/30

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

5150-5250 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power(dBm)	
		Result	Limit
802.11a	5180	13.89	24
	5200	13.96	24
	5240	13.87	24
802.11ac vht20	5180	13.77	24
	5200	13.83	24
	5240	13.75	24
802.11ac vht40	5190	13.14	24
	5230	13.18	24
802.11ac vht80	5210	12.37	24

5250-5350 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power(dBm)	
		Result	Limit
802.11a	5260	13.17	24
	5280	13.43	24
	5320	13.19	24
802.11ac vht20	5260	13.26	24
	5280	13.3	24
	5320	13.31	24
802.11ac vht40	5270	13.1	24
	5310	13.09	24
802.11ac vht80	5290	12.46	24

5470-5725 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power(dBm)	
		Result	Limit
802.11a	5500	13.35	24
	5580	13.23	24
	5700	12.92	24
	5720	12.91	24
802.11ac vht20	5500	13.24	24
	5580	13.08	24
	5700	12.99	24
	5720	12.34	24
802.11ac vht40	5510	12.18	24
	5550	12.11	24
	5670	11.83	24
	5710	11.58	24
802.11ac vht80	5530	11.71	24
	5610	11.96	24
	5690	11.42	24

5725-5850 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power(dBm)	
		Result	Limit
802.11a	5745	12.97	30
	5785	12.63	30
	5825	12.38	30
802.11ac vht20	5745	12.85	30
	5785	12.74	30
	5825	12.49	30
802.11ac vht40	5755	11.78	30
	5795	11.56	30
802.11ac vht80	5775	10.78	30

4.5 Maximum power spectral density:

Serial Number:	2941-1	Test Date:	2023/8/11~2023/8/12
Test Site:	RF	Test Mode:	Transmitting
Tester:	LingLing Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.5~26.2	Relative Humidity: (%)	60~61	ATM Pressure: (kPa)	100.2~100.3
----------------------	-----------	---------------------------	-------	---------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	100147	2023-03-31	2024-03-30
zhuoxiang	Coaxial Cable	SMA-178	211003	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

5150-5250 MHz:

Test Modes	Test Frequency (MHz)	Reading (dBm/MHz)	Duty Cycle Factor (dB)	Maximum Power Spectral Density (dBm/MHz)	
				Result	Limit
802.11a	5180	1.2	/	1.20	11
	5200	1.23	/	1.23	11
	5240	0.99	/	0.99	11
802.11ac vht20	5180	1.14	/	1.14	11
	5200	0.9	/	0.90	11
	5240	0.7	/	0.70	11
802.11ac vht40	5190	-1.92	/	-1.92	11
	5230	-2.01	/	-2.01	11
802.11ac vht80	5210	-5.15	/	-5.15	11
Antenna Gain:	-0.6	dBi			

Note:

The device is a client device.

Duty cycle $\geq 98\%$, method ANSI C63.10-2013 Section 12.3.2.2 was used.Duty cycle $< 98\%$, and duty cycle variations are less than $\pm 2\%$, method ANSI C63.10-2013 Section 12.3.2.4 was used.Duty cycle $< 98\%$, and duty cycle variations exceed $\pm 2\%$, method ANSI C63.10-2013 Section 12.3.2.6.For Duty cycle $< 98\%$, and Duty cycle be considered to be constant (variations are less than $\pm 2\%$), the duty cycle factor was added into the result.

5250-5350 MHz:

Test Modes	Test Frequency(MHz)	Reading(dBm/MHz)	Duty Cycle Factor(dB)	Maximum Power Spectral Density(dBm/MHz)	
				Result	Limit
802.11a	5260	0.68	/	0.68	11
	5280	0.87	/	0.87	11
	5320	0.5	/	0.50	11
802.11ac vht20	5260	1.08	/	1.08	11
	5280	0.82	/	0.82	11
	5320	1.09	/	1.09	11
802.11ac vht40	5270	-2.25	/	-2.25	11
	5310	-2.52	/	-2.52	11
802.11ac vht80	5290	-6.44	/	-6.44	11
Antenna Gain:	0.24	dBi			

Note:

The device is a client device.

Duty cycle $\geq 98\%$, method ANSI C63.10-2013 Section 12.3.2.2 was used.Duty cycle $< 98\%$, and duty cycle variations are less than $\pm 2\%$, method ANSI C63.10-2013 Section 12.3.2.4 was used.Duty cycle $< 98\%$, and duty cycle variations exceed $\pm 2\%$, method ANSI C63.10-2013 Section 12.3.2.6.For Duty cycle $< 98\%$, and Duty cycle be considered to be constant (variations are less than $\pm 2\%$), the duty cycle factor was added into the result.

5470-5725 MHz:

Test Modes	Test Frequency (MHz)	Reading (dBm/MHz)	Duty Cycle Factor (dB)	Maximum Power Spectral Density (dBm/MHz)	
				Result	Limit
802.11a	5500	0.49	/	0.49	11
	5580	0.27	/	0.27	11
	5700	-0.67	/	-0.67	11
	5720	-1.01	/	-1.01	11
802.11ac vht20	5500	0.64	/	0.64	11
	5580	0.29	/	0.29	11
	5700	-1.07	/	-1.07	11
	5720	-1.42	/	-1.42	11
802.11ac vht40	5510	-3.38	/	-3.38	11
	5550	-3.5	/	-3.50	11
	5670	-4.61	/	-4.61	11
	5710	-5.05	/	-5.05	11
802.11ac vht80	5530	-7.55	/	-7.55	11
	5610	-7.82	/	-7.82	11
	5690	-7.99	/	-7.99	11
Antenna Gain:	2.87	dBi			

Note:

The device is a client device.

Duty cycle $\geq 98\%$, method ANSI C63.10-2013 Section 12.3.2.2 was used.

Duty cycle $< 98\%$, and duty cycle variations are less than $\pm 2\%$, method ANSI C63.10-2013 Section 12.3.2.4 was used.

Duty cycle $< 98\%$, and duty cycle variations exceed $\pm 2\%$, method ANSI C63.10-2013 Section 12.3.2.6.

For Duty cycle $< 98\%$, and Duty cycle be considered to be constant (variations are less than $\pm 2\%$), the duty cycle factor was added into the result.

5725-5850 MHz:

Test Modes	Test Frequency (MHz)	Reading (dBm/500kHz)	Duty Cycle Factor (dB)	Maximum Power Spectral Density (dBm/500kHz)	
				Result	Limit
802.11a	5745	-3.24	/	-3.24	11
	5785	-3.43	/	-3.43	11
	5825	-2.97	/	-2.97	11
802.11ac vht20	5745	-3.47	/	-3.47	11
	5785	-3.44	/	-3.44	11
	5825	-3.32	/	-3.32	11
802.11ac vht40	5755	-7.38	/	-7.38	11
	5795	-7.33	/	-7.33	11
802.11ac vht80	5775	-11.78	/	-11.78	11
Antenna Gain:	3.4	dBi			

Note:

Duty cycle $\geq 98\%$, method ANSI C63.10-2013 Section 12.3.2.2 was used.

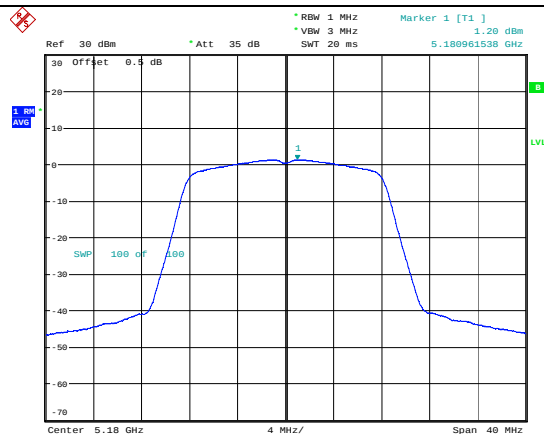
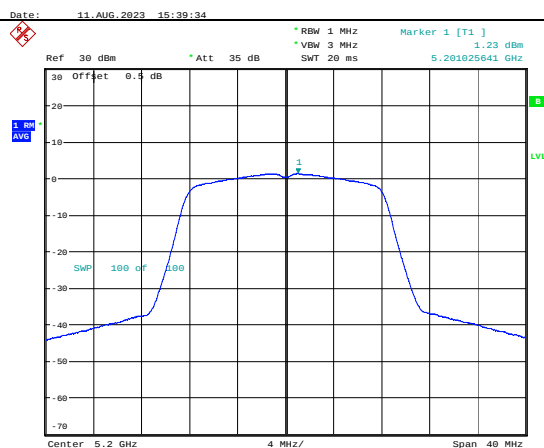
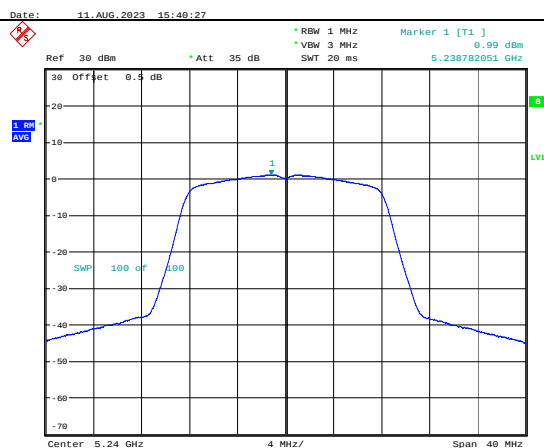
Duty cycle $< 98\%$, and duty cycle variations are less than $\pm 2\%$, method ANSI C63.10-2013 Section 12.3.2.4 was used.

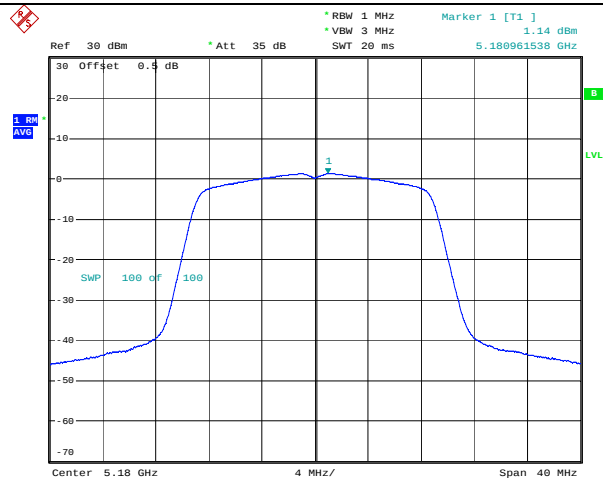
Duty cycle $< 98\%$, and duty cycle variations exceed $\pm 2\%$, method ANSI C63.10-2013 Section 12.3.2.6.

For Duty cycle $< 98\%$, and Duty cycle be considered to be constant (variations are less than $\pm 2\%$), the duty cycle factor was added into the result.

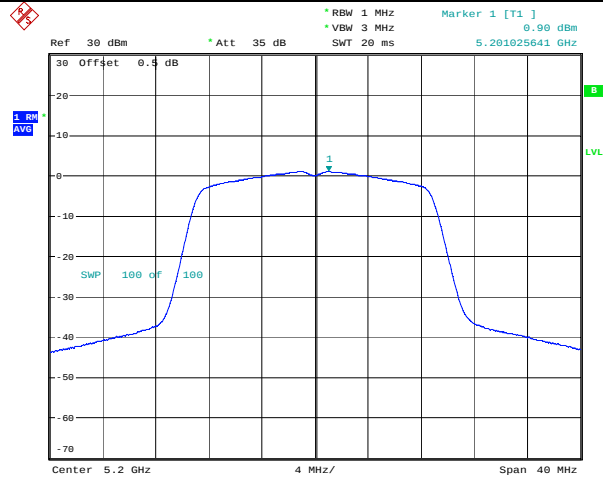
5150-5250MHz:

Maximum power spectral density

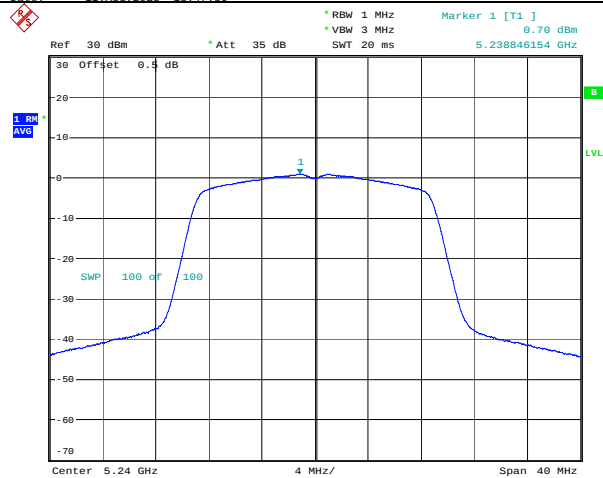
802.11a
Lowest Channel802.11a
Middle Channel802.11a
Highest Channel

Maximum power spectral density802.11ac vht20
Lowest Channel

Date: 11.AUG.2023 15:48:12

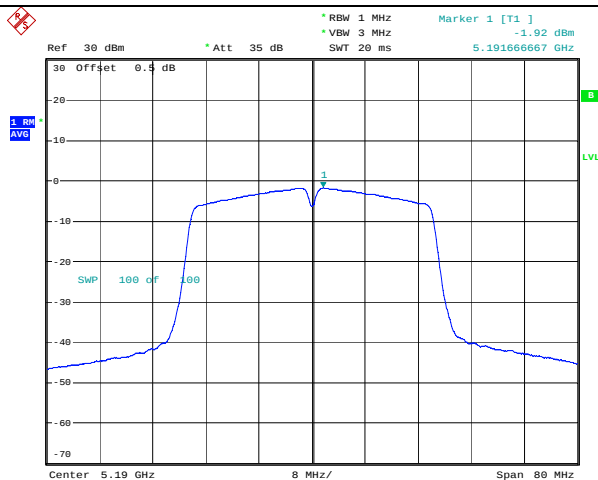
802.11ac vht20
Middle Channel

Date: 11.AUG.2023 15:47:36

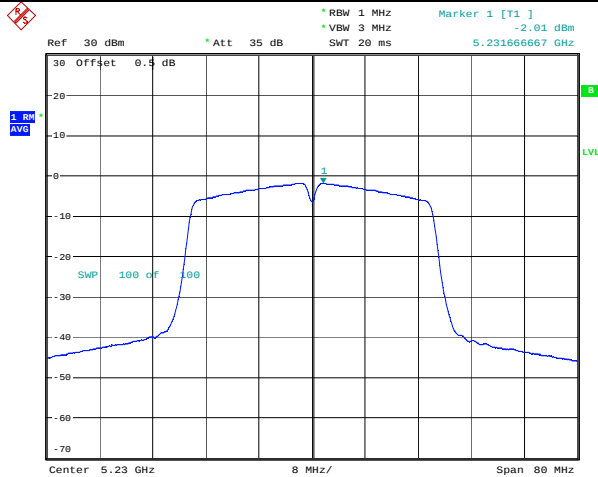
802.11ac vht20
Highest Channel

Date: 11.AUG.2023 15:43:33

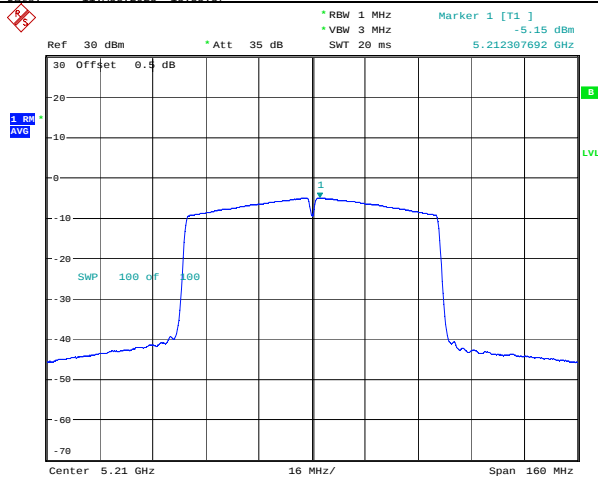
Maximum power spectral density

802.11ac vht40
Lowest Channel

Date: 11.AUG.2023 15:53:19

802.11ac vht40
Highest Channel

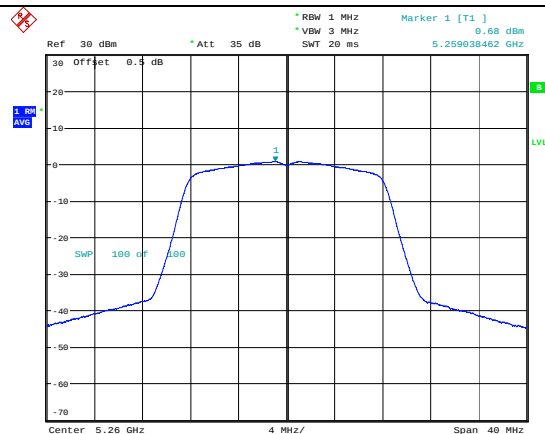
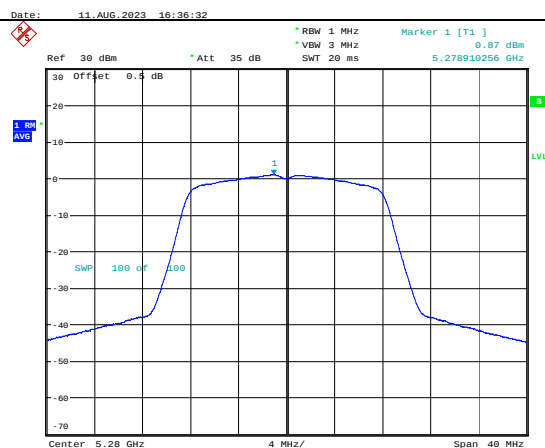
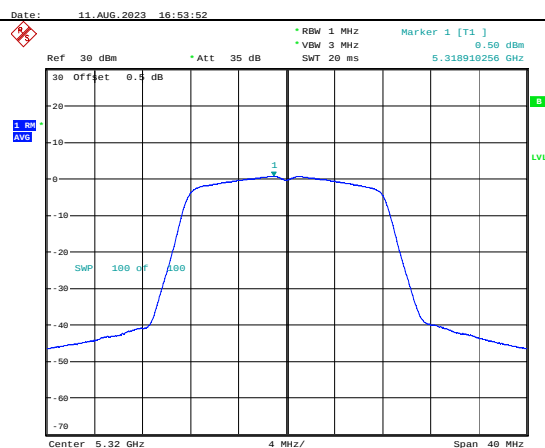
Date: 11.AUG.2023 15:55:37

802.11ac vht80
Middle Channel

Date: 11.AUG.2023 15:56:24

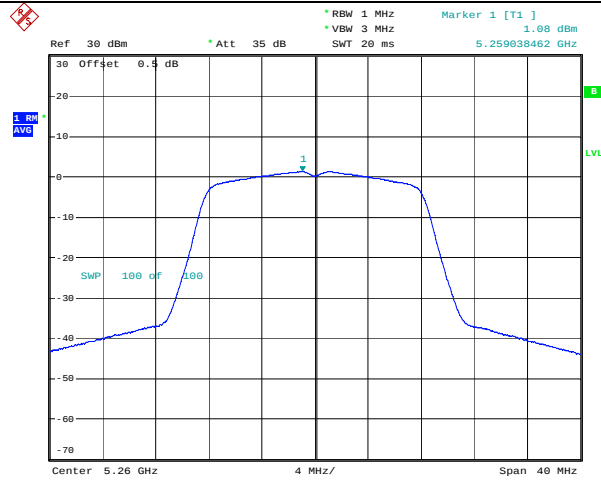
5250-5350MHz:

Maximum power spectral density

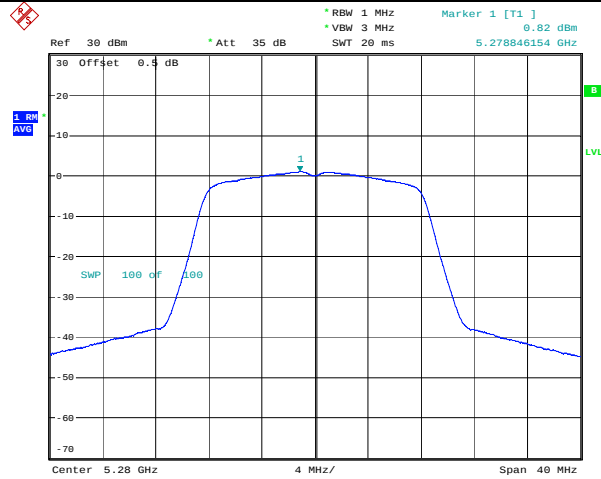
802.11a
Lowest Channel802.11a
Middle Channel802.11a
Highest Channel

Date: 11.AUG.2023 17:23:42

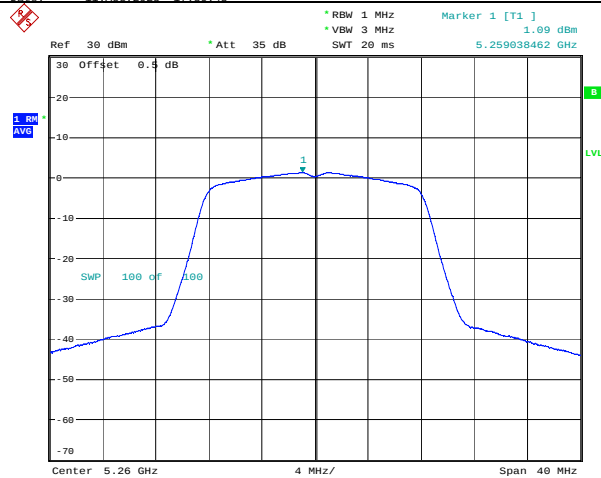
Maximum power spectral density

802.11ac vht20
Lowest Channel

Date: 11.AUG.2023 17:38:05

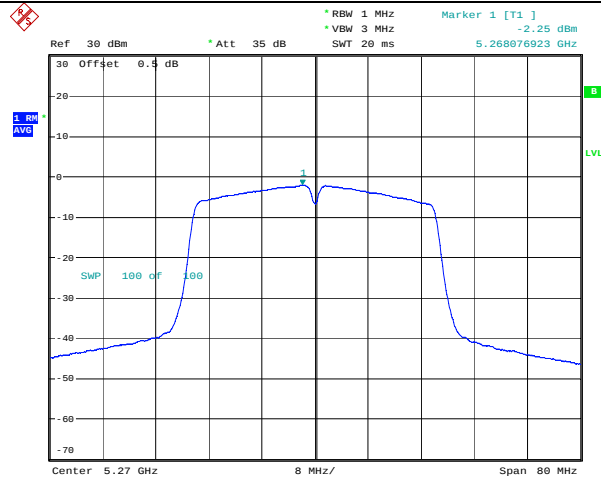
802.11ac vht20
Middle Channel

Date: 11.AUG.2023 17:36:48

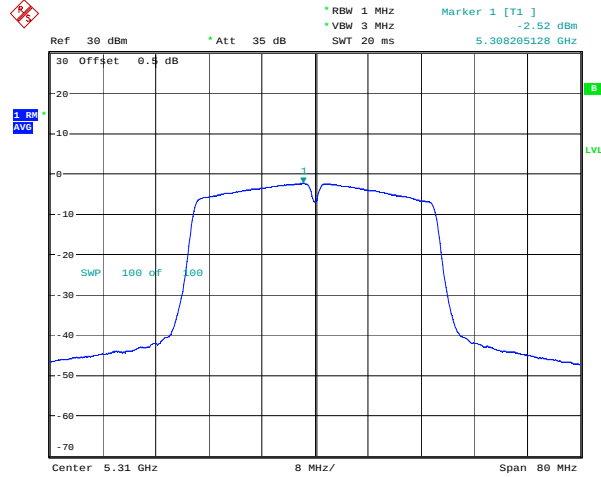
802.11ac vht20
Highest Channel

Date: 11.AUG.2023 17:27:28

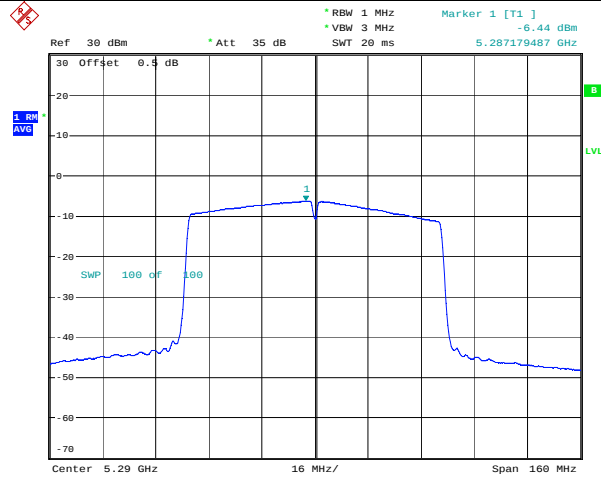
Maximum power spectral density

802.11ac vht40
Lowest Channel

Date: 11.AUG.2023 17:44:25

802.11ac vht40
Highest Channel

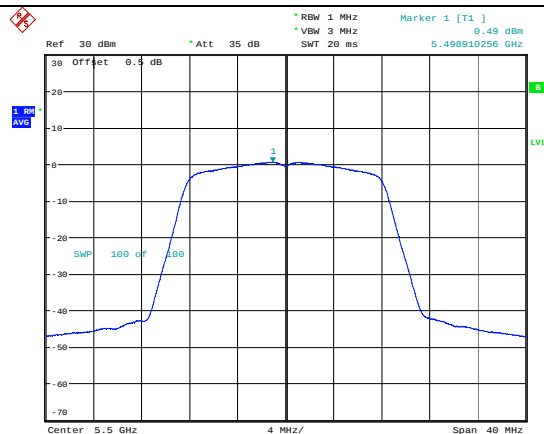
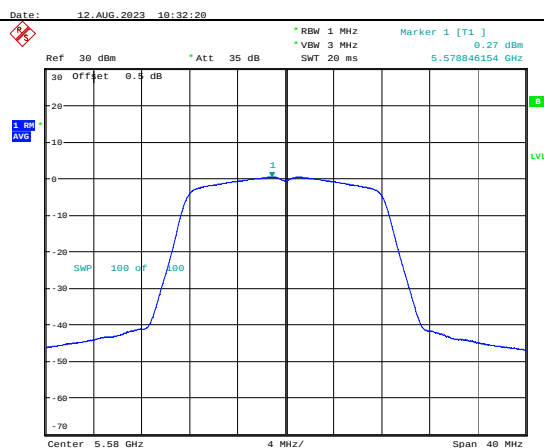
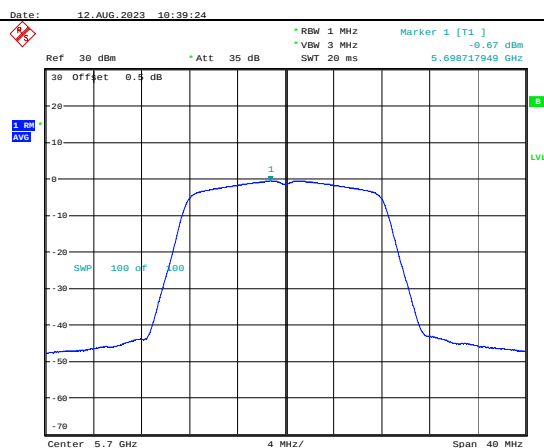
Date: 11.AUG.2023 17:45:15

802.11ac vht80
Middle Channel

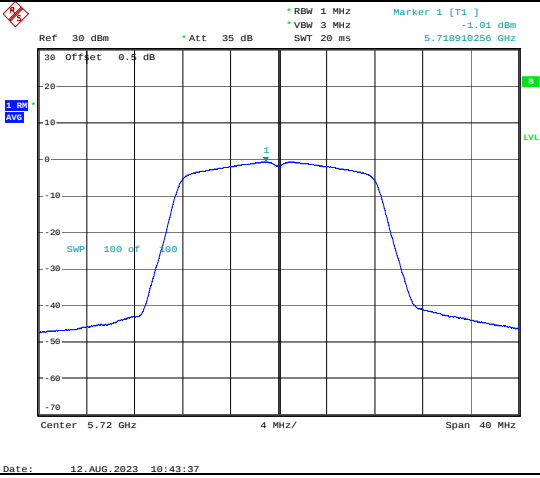
Date: 11.AUG.2023 17:50:36

5470-5725MHz:

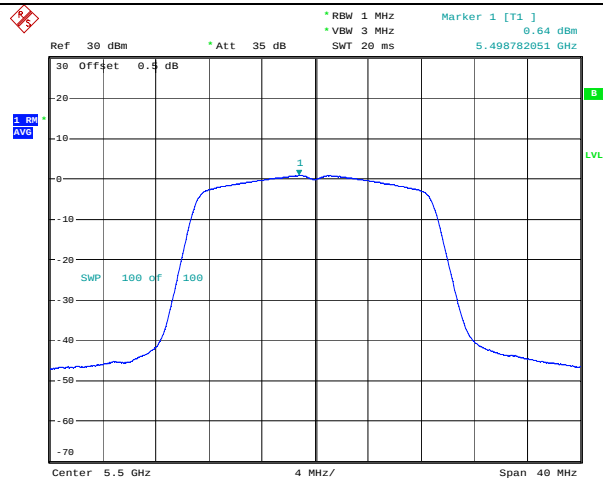
Maximum power spectral density

802.11a
5500MHz802.11a
5580MHz802.11a
5700MHz

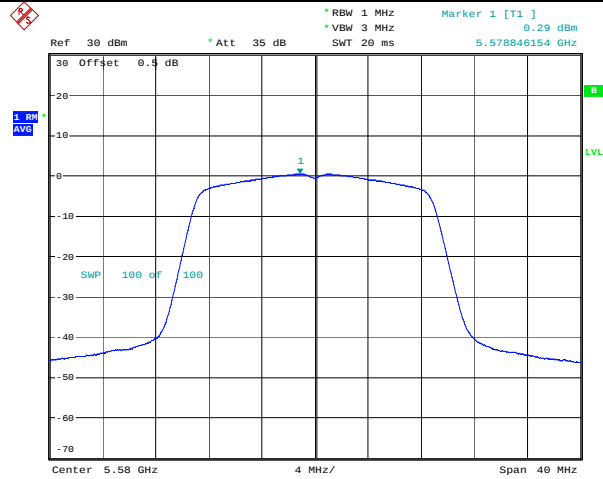
802.11a
5720MHz



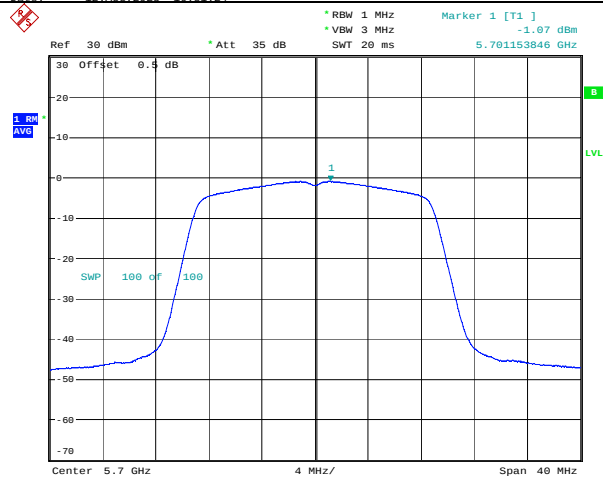
Maximum power spectral density

802.11ac vht20
5500MHz 1

Date: 12.AUG.2023 10:52:28

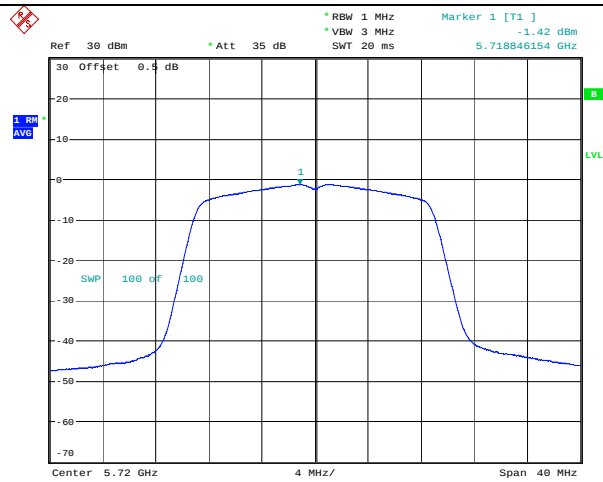
802.11ac vht20
5580MHz

Date: 12.AUG.2023 10:51:24

802.11ac vht20
5700MHz

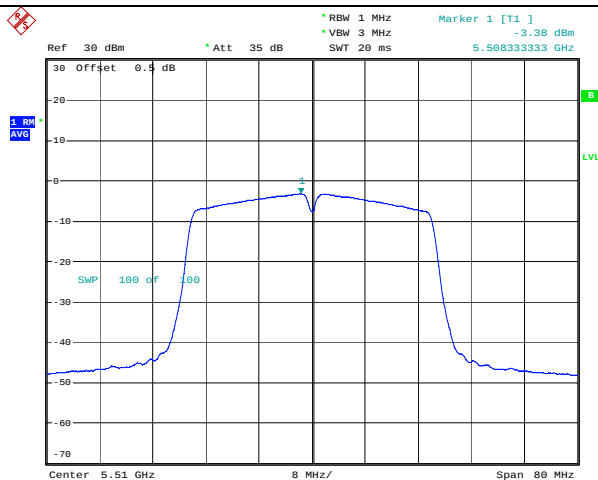
Date: 12.AUG.2023 10:48:00

802.11ac vht20
5720MHz

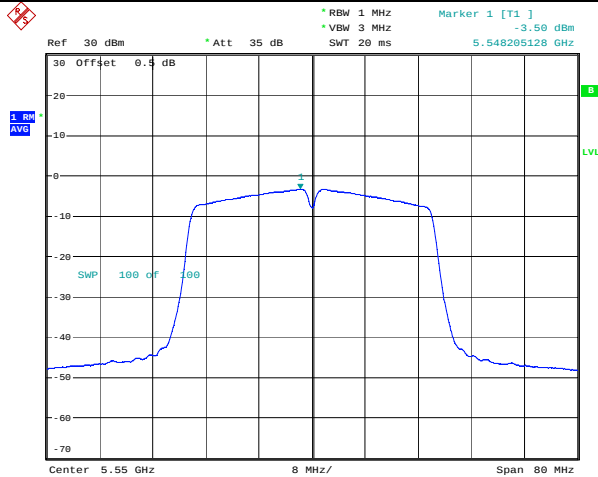


Date: 12.AUG.2023 10:47:20

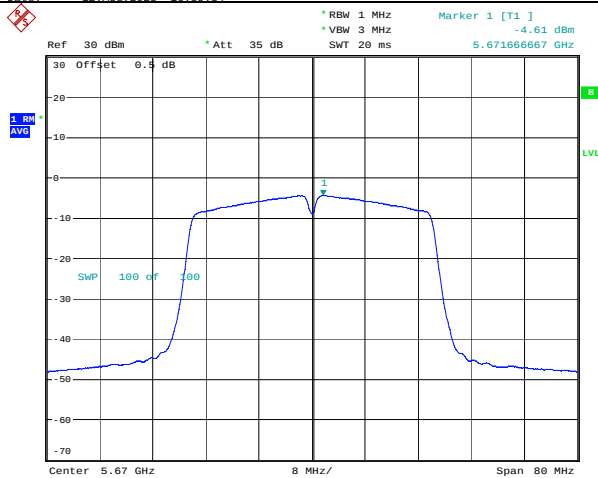
Maximum power spectral density

802.11ac vht40
5510MHz

Date: 12.AUG.2023 10:58:27

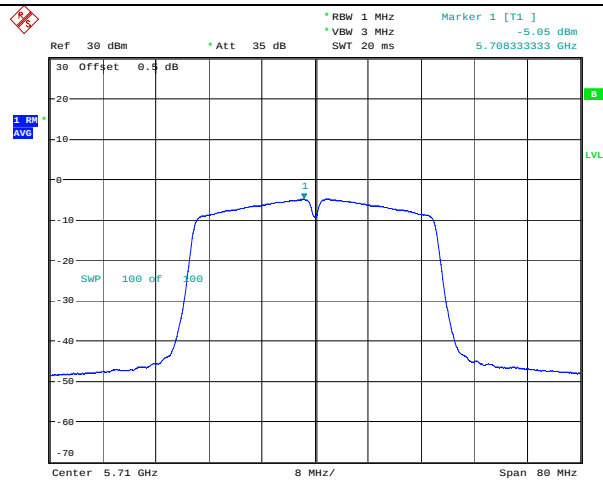
802.11ac vht40
5550MHz

Date: 12.AUG.2023 10:59:34

802.11ac vht40
5670MHz

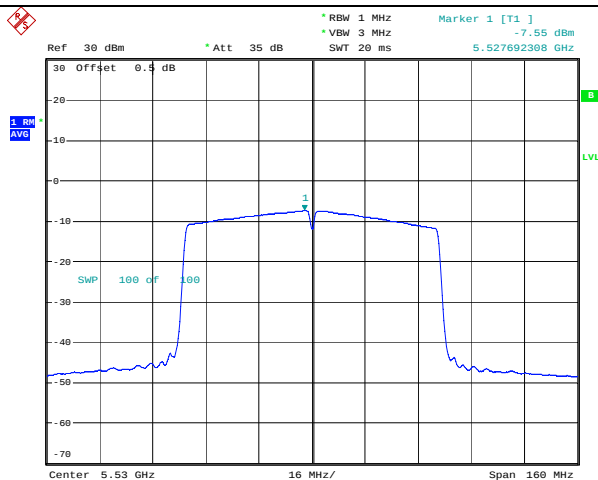
Date: 12.AUG.2023 11:05:54

802.11ac vht40
5710MHz

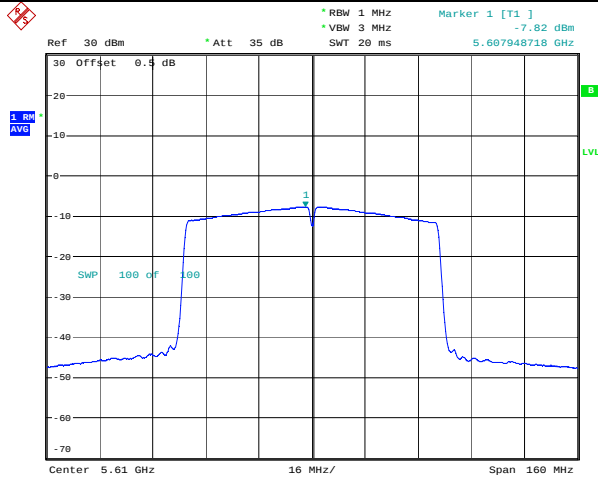


Date: 12.AUG.2023 11:06:42

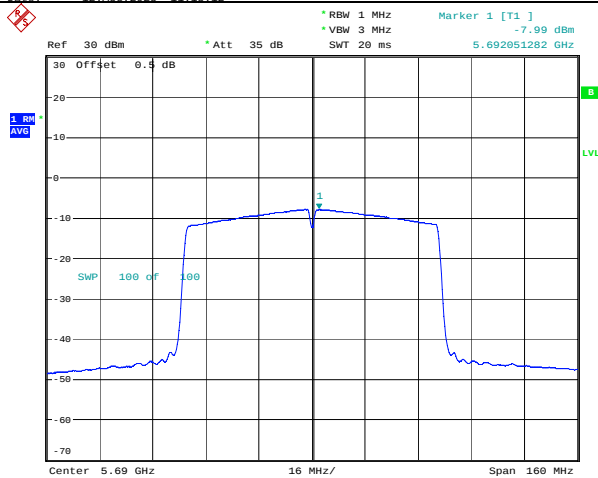
Maximum power spectral density

802.11ac vht80
5530MHz

Date: 12.AUG.2023 11:11:38

802.11ac vht80
5610MHz

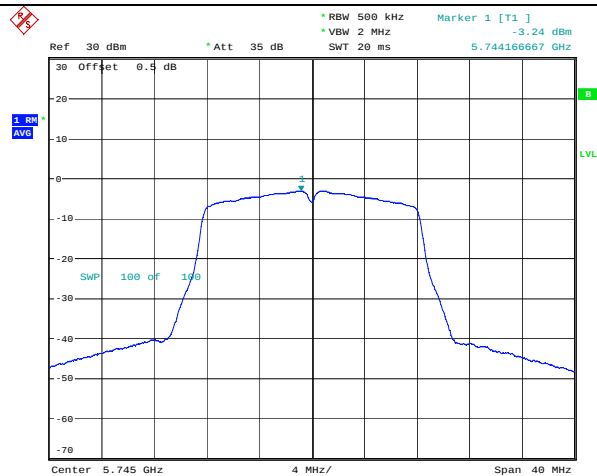
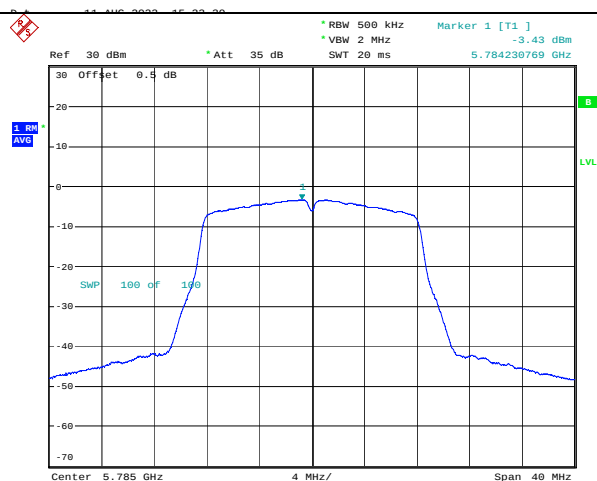
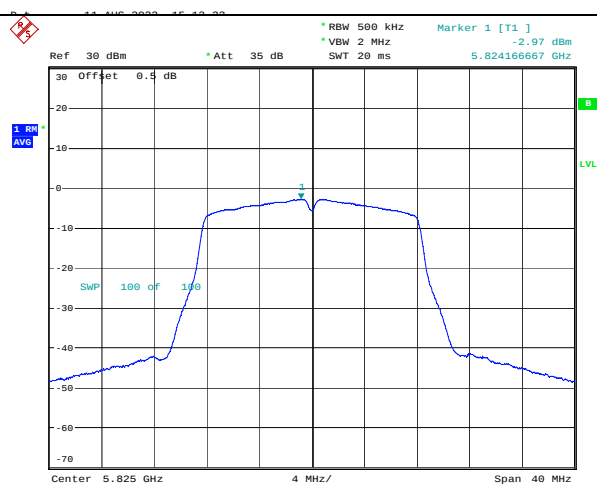
Date: 12.AUG.2023 11:13:12

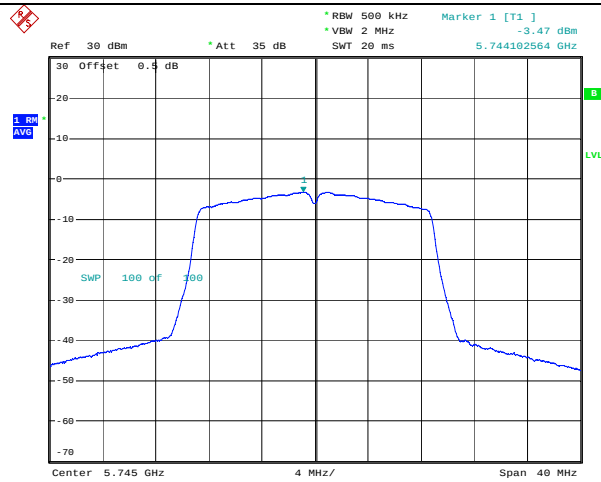
802.11ac vht80
5690MHz

Date: 12.AUG.2023 11:19:24

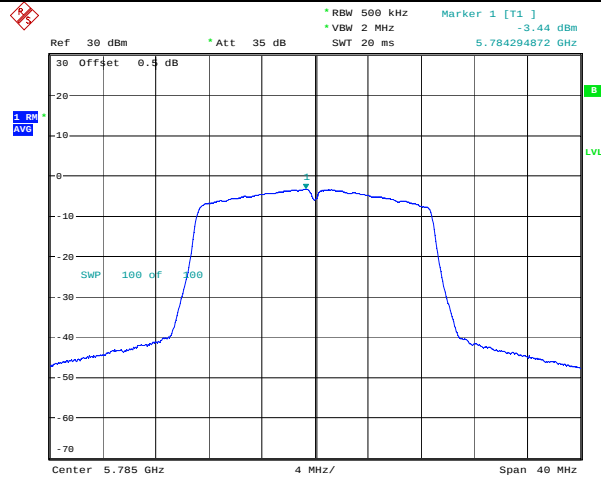
5725-5850MHz

Maximum power spectral density

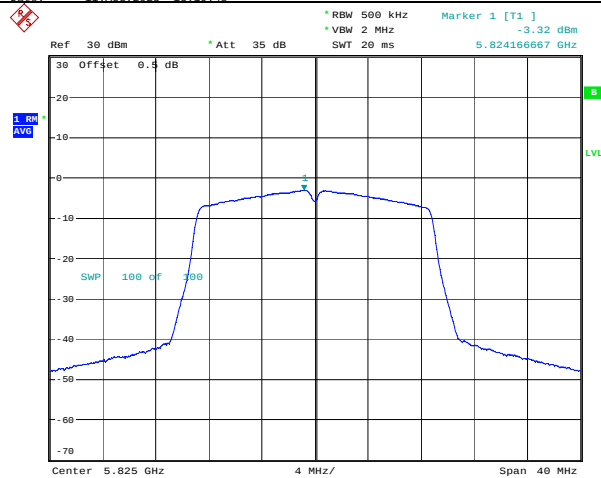
802.11a
Lowest Channel802.11a
Middle Channel802.11a
Highest Channel

Maximum power spectral density802.11ac vht20
Lowest Channel

Date: 11.AUG.2023 15:20:46

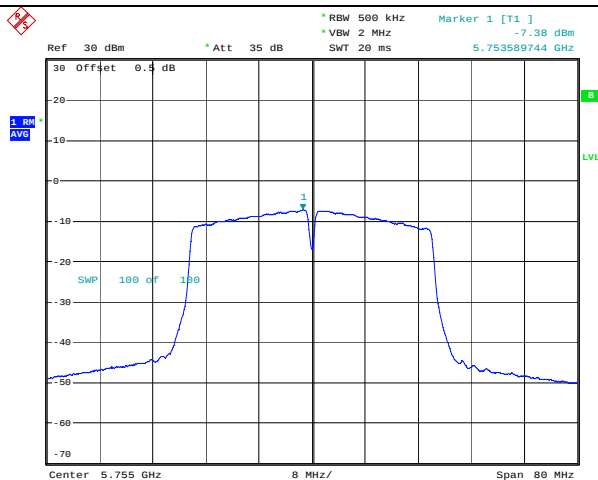
802.11ac vht20
Middle Channel

Date: 11.AUG.2023 15:19:45

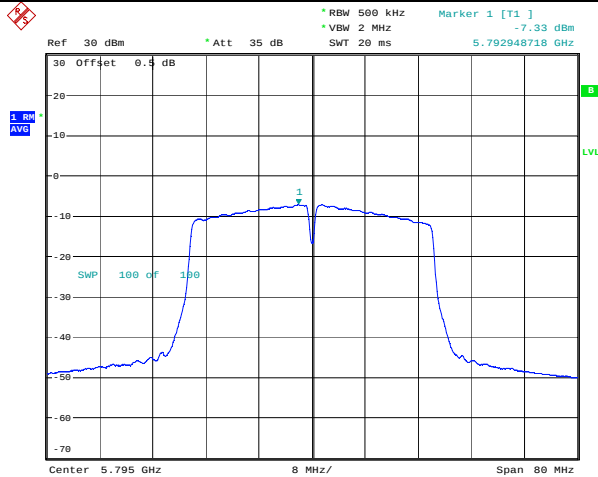
802.11ac vht20
Highest Channel

Date: 11.AUG.2023 15:17:15

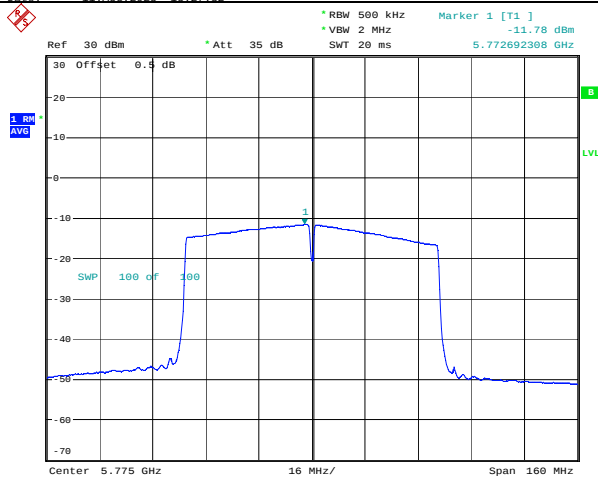
Maximum power spectral density

802.11ac vht40
Lowest Channel

Date: 11.AUG.2023 15:24:44

802.11ac vht40
Highest Channel

Date: 11.AUG.2023 15:27:32

802.11ac vht80
Middle Channel

Date: 11.AUG.2023 15:30:59

4.6 Duty Cycle:

Serial Number:	2941-1	Test Date:	2023/8/12
Test Site:	RF	Test Mode:	Transmitting
Tester:	LingLing Li	Test Result:	N/A

Environmental Conditions:

Temperature: (°C)	26.2	Relative Humidity: (%)	61	ATM Pressure: (kPa)	100.2
----------------------	------	------------------------------	----	------------------------	-------

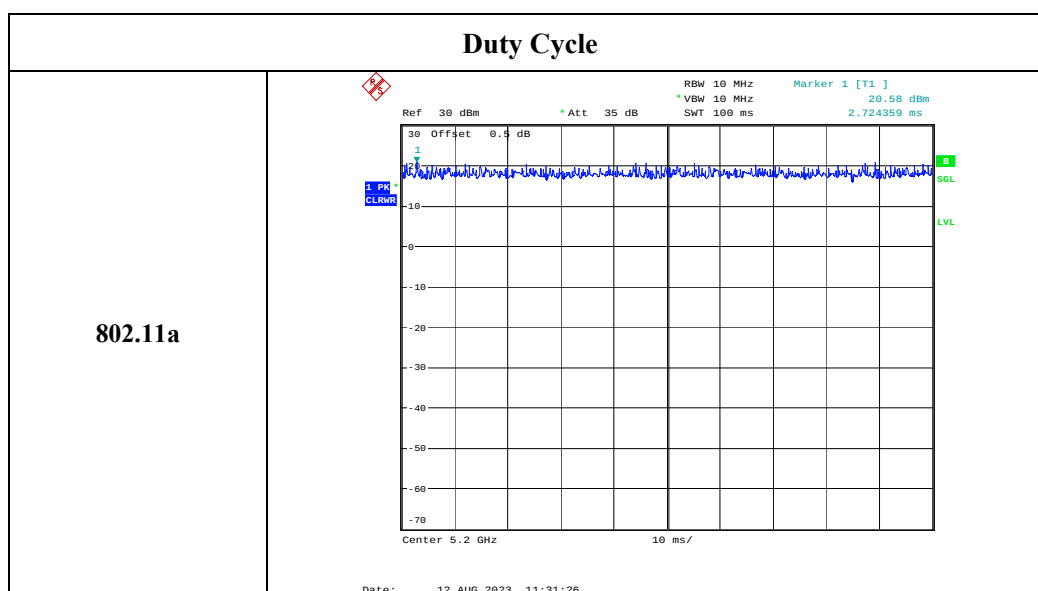
Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	100147	2023-03-31	2024-03-30
zhuoxiang	Coaxial Cable	SMA-178	211003	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

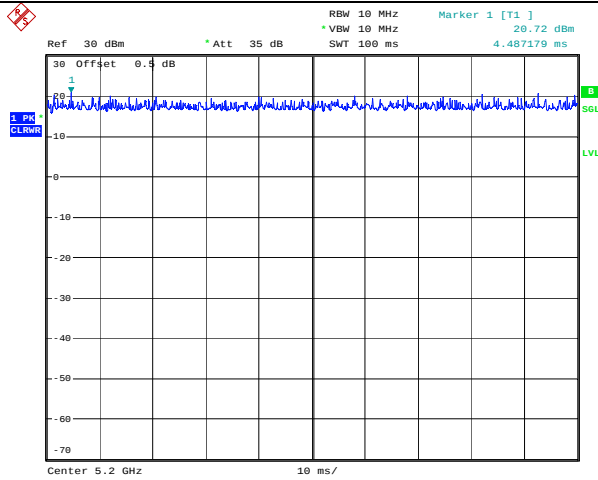
Test Data:

Test Modes	Ton (ms)	Ton+off (ms)	Duty cycle (%)	1/T (Hz)	Duty Factor (dB)
802.11a	100	100	100.00	10	/
802.11ac vht20	100	100	100.00	10	/
802.11ac vht40	100	100	100.00	10	/
802.11ac vht80	100	100	100.00	10	/



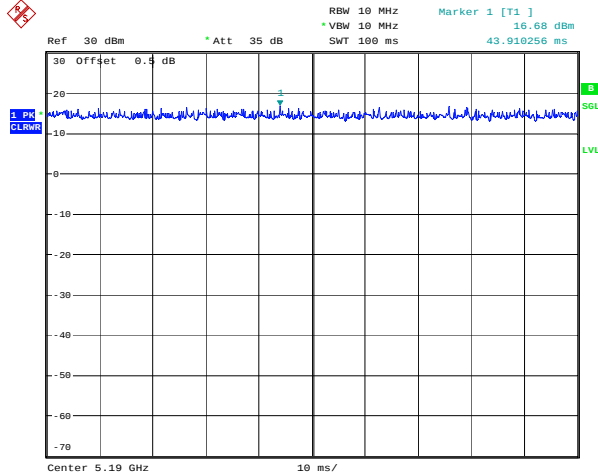
Duty Cycle

802.11ac vht20



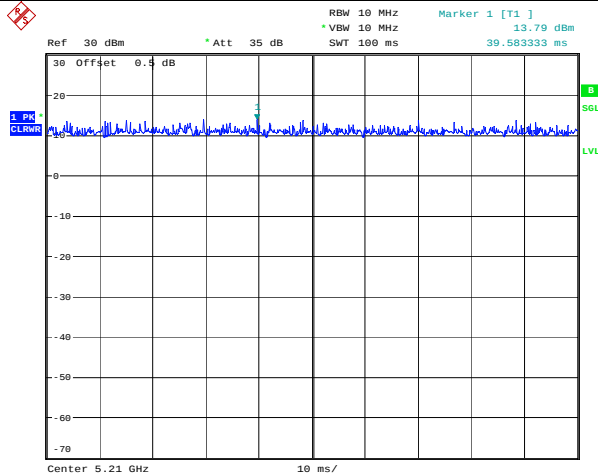
Date: 12.AUG.2023 11:30:58

802.11ac vht40



Date: 12.AUG.2023 11:29:31

802.11ac vht80



Date: 12.AUG.2023 11:30:08

5. EUT PHOTOGRAPHS

Please refer to the attachment CR230743940-EXP EUT EXTERNAL PHOTOGRAPHS and
CR230743940-INP EUT INTERNAL PHOTOGRAPHS

6. TEST SETUP PHOTOGRAPHS

Please refer to the attachment CR230743940-00E-TSP TEST SETUP PHOTOGRAPHS.

===== END OF REPORT =====