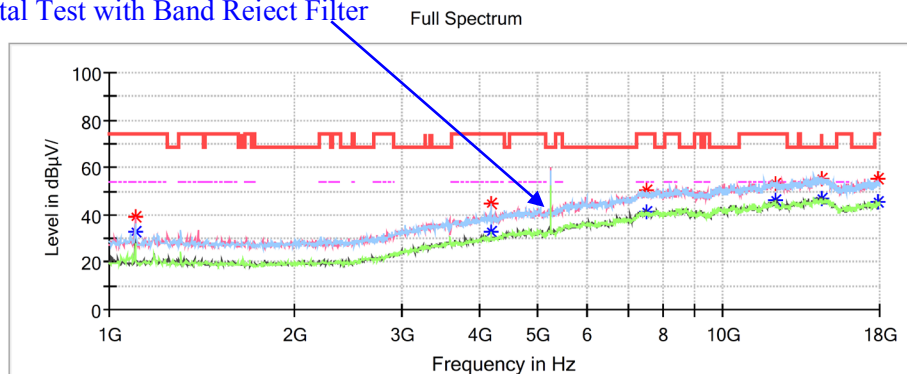


High Channel: 5240MHz**Common Information**

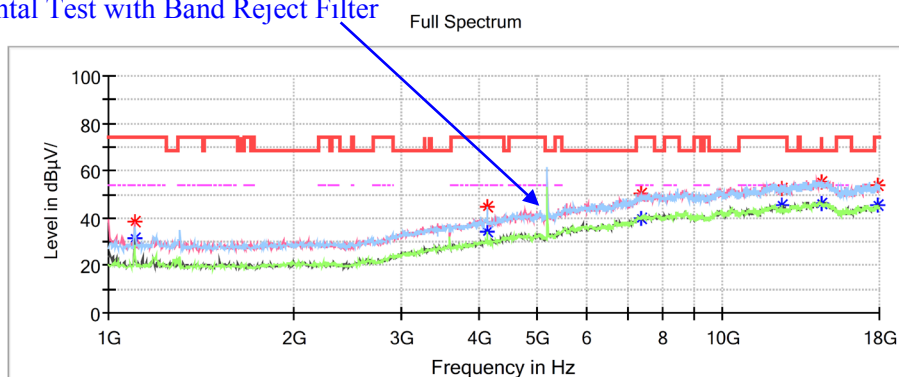
Project No.: RKSA251229001
 EUT Model: M60
 Test Mode: Transmitting in 802.11a mode High Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 18.1℃
 Humidity: 45%
 Atmospheric Pressure: 103.0kPa
 Test Engineer: Destine Hu
 Check by: Bard Liu
 Test Date: 2026/1/30

Fundamental Test with Band Reiect Filter**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1102.000000	---	32.56	54.00	21.44	V	-14.8
1102.000000	38.97	---	74.00	35.03	V	-14.8
4189.200000	---	32.93	54.00	21.07	H	-4.7
4189.200000	44.41	---	74.00	29.59	H	-4.7
7494.000000	---	41.22	54.00	12.78	H	3.0
7494.000000	50.47	---	74.00	23.53	H	3.0
12169.000000	53.17	---	74.00	20.83	H	9.0
12169.000000	---	46.35	54.00	7.65	H	9.0
14484.400000	---	46.83	54.00	7.17	H	11.9
14484.400000	55.14	---	74.00	18.86	H	11.9
17938.800000	55.01	---	74.00	18.99	V	11.6
17938.800000	---	45.64	54.00	8.36	V	11.6

802.11ac20 Mode:**Low Channel: 5180MHz****Common Information**

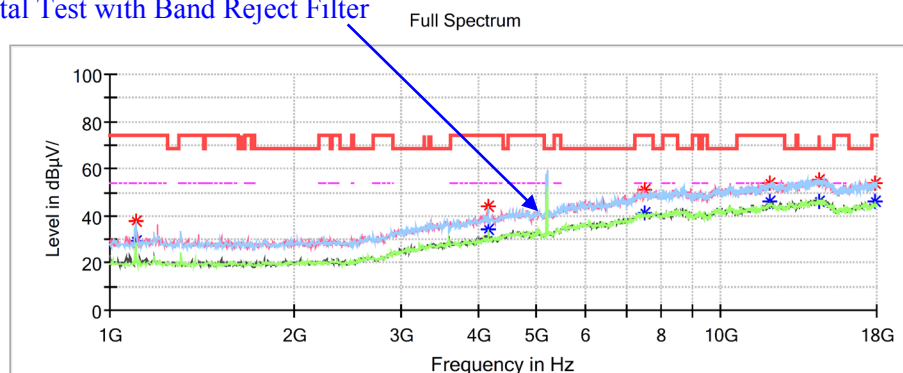
Project No.: RKSA251229001
EUT Model: M60
Test Mode: Transmitting in 802.11ac20 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 18.1°C
Humidity: 45%
Atmospheric Pressure: 103.0kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/1/30

Fundamental Test with Band Reject Filter**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1102.000000	38.49	---	74.00	35.51	V	-14.8
1102.000000	---	31.47	54.00	22.53	V	-14.8
4141.600000	44.50	---	74.00	29.50	H	-4.8
4141.600000	---	34.59	54.00	19.41	H	-4.8
7354.600000	---	39.83	54.00	14.17	H	2.5
7354.600000	50.46	---	74.00	23.54	H	2.5
12481.800000	52.31	---	74.00	21.69	H	8.8
12481.800000	---	45.71	54.00	8.29	H	8.8
14481.000000	---	45.81	54.00	8.19	H	11.9
14481.000000	55.09	---	74.00	18.91	H	11.9
17918.400000	53.61	---	74.00	20.39	H	11.5
17918.400000	---	45.64	54.00	8.36	H	11.5

Middle Channel: 5200MHz**Common Information**

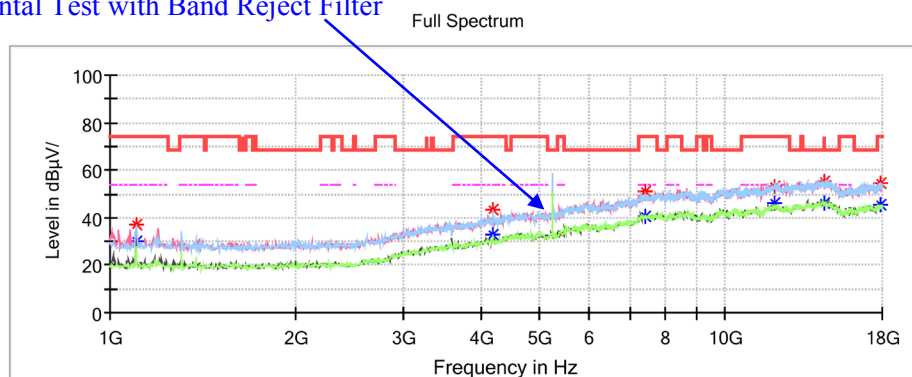
Project No.: RKSA251229001
EUT Model: M60
Test Mode: Transmitting in 802.11ac20 mode Middle Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 18.1°C
Humidity: 45%
Atmospheric Pressure: 103.0kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/1/30

Fundamental Test with Band Reject Filter**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1102.000000	37.42	---	74.00	36.58	V	-14.8
1102.000000	---	29.67	54.00	24.33	V	-14.8
4158.600000	44.10	---	74.00	29.90	H	-4.7
4158.600000	---	34.03	54.00	19.97	H	-4.7
7500.800000	---	41.06	54.00	12.94	H	3.0
7500.800000	50.86	---	74.00	23.14	H	3.0
11999.000000	53.63	---	74.00	20.37	V	9.1
11999.000000	---	45.86	54.00	8.14	V	9.1
14474.200000	---	46.09	54.00	7.91	V	11.9
14474.200000	55.34	---	74.00	18.66	V	11.9
17901.400000	53.66	---	74.00	20.34	H	11.5
17901.400000	---	46.32	54.00	7.68	H	11.5

High Channel: 5240MHz**Common Information**

Project No.: RKSA251229001
EUT Model: M60
Test Mode: Transmitting in 802.11ac20 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 18.1°C
Humidity: 45%
Atmospheric Pressure: 103.0kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/1/30

Fundamental Test with Band Reject Filter**Critical Freqs**

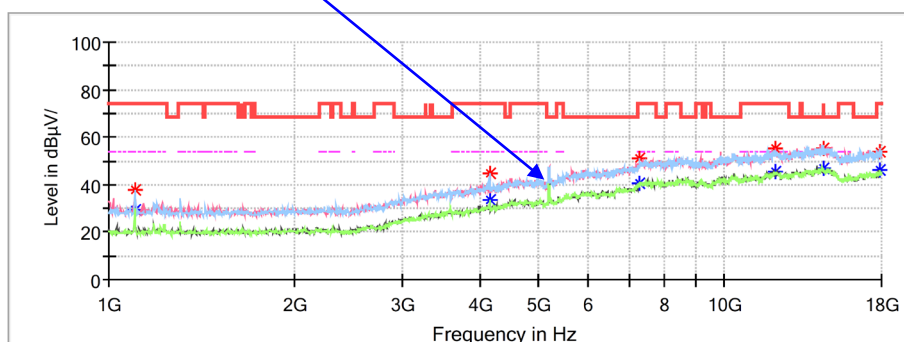
Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1102.000000	---	30.42	54.00	23.58	V	-14.8
1102.000000	36.96	---	74.00	37.04	V	-14.8
4189.200000	43.24	---	74.00	30.76	H	-4.7
4189.200000	---	33.13	54.00	20.87	H	-4.7
7409.000000	51.03	---	74.00	22.97	V	2.7
7409.000000	---	40.64	54.00	13.36	V	2.7
12033.000000	53.21	---	74.00	20.79	V	9.0
12033.000000	---	46.29	54.00	7.71	V	9.0
14470.800000	---	46.29	54.00	7.71	V	11.9
14470.800000	55.48	---	74.00	18.52	V	11.9
17887.800000	---	45.77	54.00	8.23	V	11.5
17887.800000	54.62	---	74.00	19.38	V	11.5

802.11ac40 Mode:**Low Channel: 5190MHz****Common Information**

Project No.: RKSA251229001
EUT Model: M60
Test Mode: Transmitting in 802.11ac40 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 18.1℃
Humidity: 45%
Atmospheric Pressure: 103.0kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/1/31

Fundamental Test with Band Reiect Filter

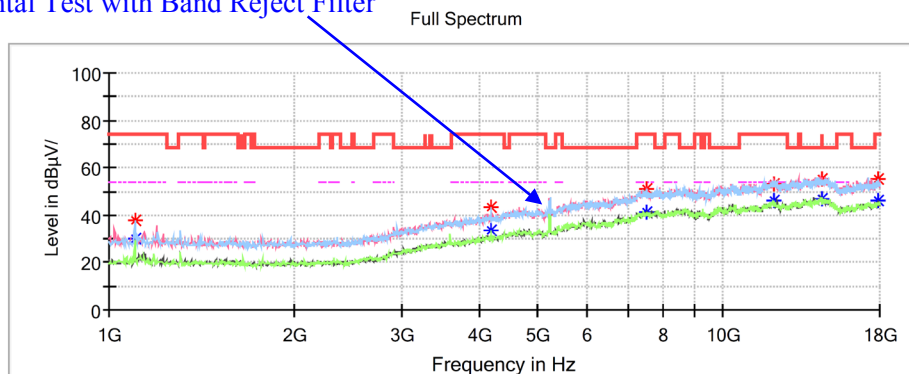
Full Spectrum

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1102.000000	---	29.56	54.00	24.44	V	-14.8
1102.000000	37.95	---	74.00	36.05	V	-14.8
4151.800000	---	33.43	54.00	20.57	H	-4.7
4151.800000	45.03	---	74.00	28.97	H	-4.7
7283.200000	---	40.25	54.00	13.75	H	2.3
7283.200000	51.10	---	74.00	22.90	H	2.3
12084.000000	---	45.45	54.00	8.55	H	9.0
12084.000000	55.25	---	74.00	18.75	H	9.0
14481.000000	---	46.59	54.00	7.41	V	11.9
14481.000000	55.22	---	74.00	18.78	V	11.9
17918.400000	53.74	---	74.00	20.26	H	11.5
17918.400000	---	46.29	54.00	7.71	H	11.5

High Channel: 5230MHz**Common Information**

Project No.: RKSA251229001
EUT Model: M60
Test Mode: Transmitting in 802.11ac40 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 18.1°C
Humidity: 45%
Atmospheric Pressure: 103.0kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/1/31

Fundamental Test with Band Reject Filter**Critical Freqs**

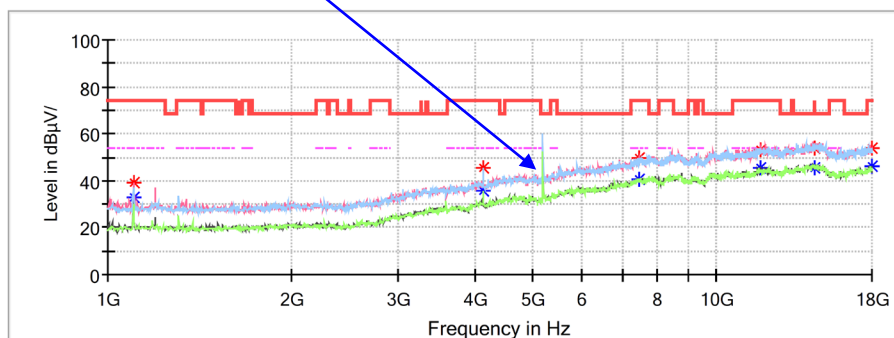
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1102.000000	38.07	---	74.00	35.93	V	-14.8
1102.000000	---	30.13	54.00	23.87	V	-14.8
4182.400000	43.54	---	74.00	30.46	H	-4.7
4182.400000	---	33.83	54.00	20.17	H	-4.7
7504.200000	---	41.54	54.00	12.46	V	3.0
7504.200000	50.89	---	74.00	23.11	V	3.0
12097.600000	53.38	---	74.00	20.62	V	9.0
12097.600000	---	46.12	54.00	7.88	V	9.0
14484.400000	---	46.51	54.00	7.49	V	11.9
14484.400000	55.44	---	74.00	18.56	V	11.9
17877.600000	55.04	---	74.00	18.96	V	11.4
17877.600000	---	45.98	54.00	8.02	V	11.4

802.11ax20 Mode:**Low Channel: 5180MHz****Common Information**

Project No.: RKSA251229001
EUT Model: M60
Test Mode: Transmitting in 802.11ax20 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 18.1℃
Humidity: 45%
Atmospheric Pressure: 103.0kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/1/31

Fundamental Test with Band Reject Filter

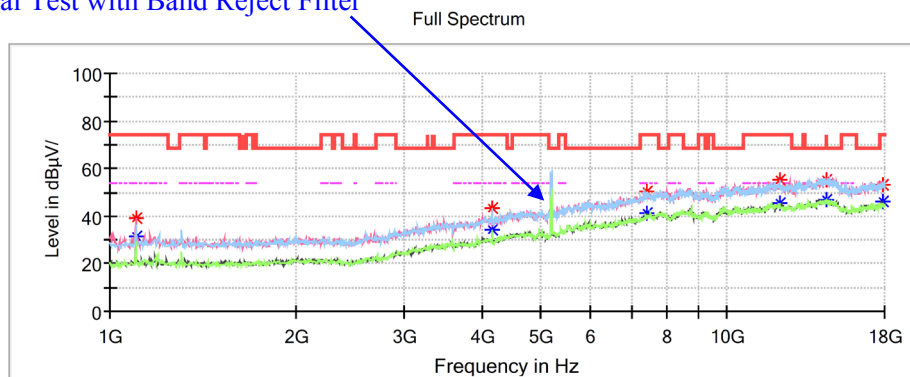
Full Spectrum

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1102.000000	39.04	---	74.00	34.96	V	-14.8
1102.000000	---	32.61	54.00	21.39	V	-14.8
4141.600000	---	35.32	54.00	18.68	H	-4.8
4141.600000	45.40	---	74.00	28.60	H	-4.8
7446.400000	---	40.22	54.00	13.78	H	2.8
7446.400000	49.93	---	74.00	24.07	H	2.8
11771.200000	52.86	---	74.00	21.14	V	8.6
11771.200000	---	45.74	54.00	8.26	V	8.6
14494.600000	53.60	---	74.00	20.40	V	12.0
14494.600000	---	45.74	54.00	8.26	V	12.0
17989.800000	53.76	---	74.00	20.24	V	11.7
17989.800000	---	46.04	54.00	7.96	V	11.7

Middle Channel: 5200MHz**Common Information**

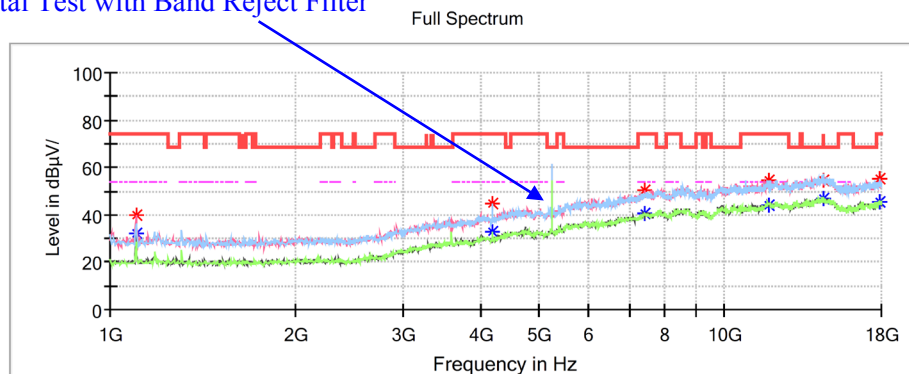
Project No.: RKSA251229001
EUT Model: M60
Test Mode: Transmitting in 802.11ax20 mode Middle Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 18.1℃
Humidity: 45%
Atmospheric Pressure: 103.0kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/1/31

Fundamental Test with Band Reject Filter**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1102.000000	38.82	---	74.00	35.18	V	-14.8
1102.000000	---	31.66	54.00	22.34	V	-14.8
4158.600000	43.65	---	74.00	30.35	H	-4.7
4158.600000	---	34.55	54.00	19.45	H	-4.7
7432.800000	---	40.97	54.00	13.03	V	2.8
7432.800000	50.02	---	74.00	23.98	V	2.8
12182.600000	---	45.25	54.00	8.75	V	9.0
12182.600000	55.36	---	74.00	18.64	V	9.0
14477.600000	54.98	---	74.00	19.02	V	11.9
14477.600000	---	46.92	54.00	7.08	V	11.9
17884.400000	53.18	---	74.00	20.82	V	11.5
17884.400000	---	45.81	54.00	8.19	V	11.5

High Channel: 5240MHz**Common Information**

Project No.: RKSA251229001
EUT Model: M60
Test Mode: Transmitting in 802.11ax20 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 18.1°C
Humidity: 45%
Atmospheric Pressure: 103.0kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/1/31

Fundamental Test with Band Reject Filter**Critical Freqs**

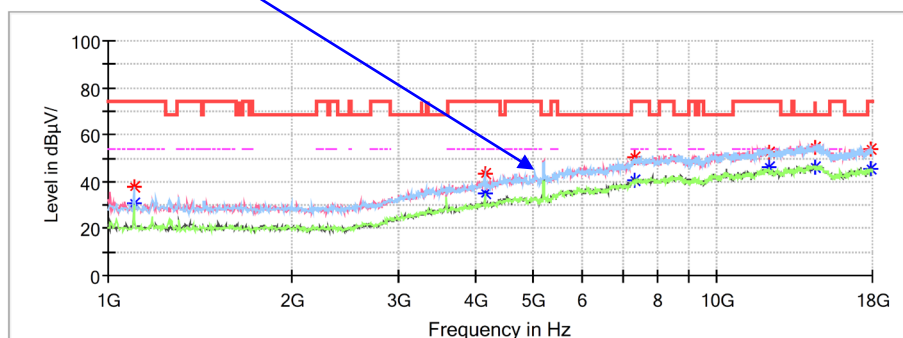
Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1102.000000	---	32.00	54.00	22.00	V	-14.8
1102.000000	39.64	---	74.00	34.36	V	-14.8
4189.200000	---	32.83	54.00	21.17	H	-4.7
4192.600000	44.69	---	74.00	29.31	H	-4.7
7412.400000	---	40.59	54.00	13.41	V	2.7
7412.400000	50.15	---	74.00	23.85	V	2.7
11788.200000	---	44.40	54.00	9.60	H	8.7
11788.200000	54.86	---	74.00	19.14	H	8.7
14477.600000	---	46.78	54.00	7.22	H	11.9
14477.600000	54.87	---	74.00	19.13	H	11.9
17901.400000	---	45.59	54.00	8.41	V	11.5
17901.400000	55.20	---	74.00	18.80	V	11.5

802.11ax40 Mode:**Middle Channel: 5190MHz****Common Information**

Project No.: RKSA251229001
EUT Model: M60
Test Mode: Transmitting in 802.11ax40 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 18.1℃
Humidity: 45%
Atmospheric Pressure: 103.0kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/1/31

Fundamental Test with Band Reject Filter

Full Spectrum

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1102.000000	38.11	---	74.00	35.89	V	-14.8
1102.000000	---	30.70	54.00	23.30	V	-14.8
4151.800000	43.68	---	74.00	30.32	H	-4.7
4151.800000	---	35.21	54.00	18.79	H	-4.7
7310.400000	---	40.34	54.00	13.66	H	2.4
7310.400000	50.21	---	74.00	23.79	H	2.4
12162.200000	52.61	---	74.00	21.39	H	9.0
12162.200000	---	45.97	54.00	8.03	H	9.0
14474.200000	---	46.12	54.00	7.88	V	11.9
14474.200000	54.62	---	74.00	19.38	V	11.9
17918.400000	53.97	---	74.00	20.03	H	11.5
17918.400000	---	45.65	54.00	8.35	H	11.5