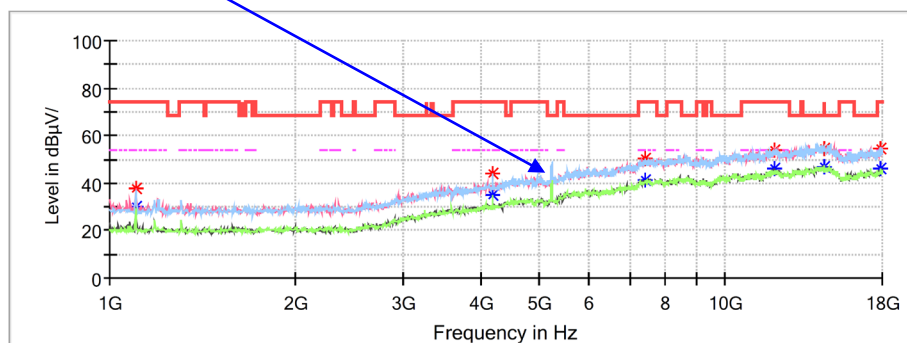


High Channel: 5230MHz**Common Information**

Project No.: RKSA251229001
EUT Model: M60
Test Mode: Transmitting in 802.11ax40 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 18.1℃
Humidity: 45%
Atmospheric Pressure: 103.0kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/1/31

Fundamental Test with Band Reject Filter

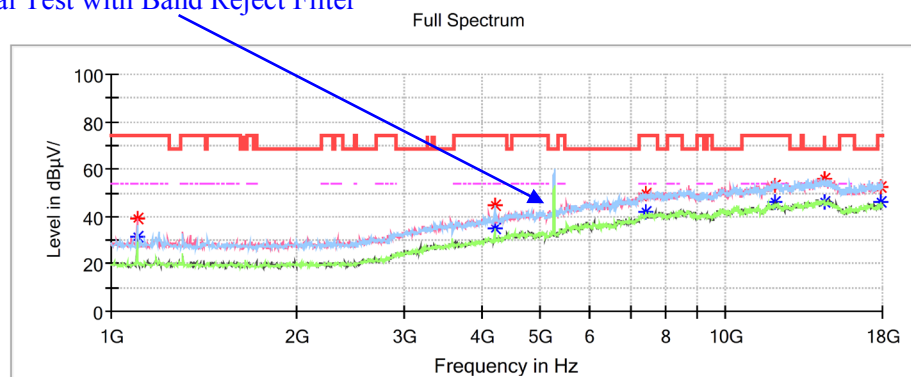
Full Spectrum

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1102.000000	37.66	---	74.00	36.34	V	-14.8
1102.000000	---	29.86	54.00	24.14	V	-14.8
4182.400000	43.89	---	74.00	30.11	H	-4.7
4182.400000	---	34.84	54.00	19.16	H	-4.7
7429.400000	---	41.46	54.00	12.54	H	2.8
7429.400000	50.53	---	74.00	23.47	H	2.8
12026.200000	53.56	---	74.00	20.44	V	9.1
12026.200000	---	46.03	54.00	7.97	V	9.1
14484.400000	54.37	---	74.00	19.63	V	11.9
14484.400000	---	46.59	54.00	7.41	V	11.9
17874.200000	54.76	---	74.00	19.24	H	11.4
17874.200000	---	45.98	54.00	8.02	H	11.4

1GHz-18GHz(5250-5350MHz Band):**802.11a Mode:****Low Channel: 5260MHz****Common Information**

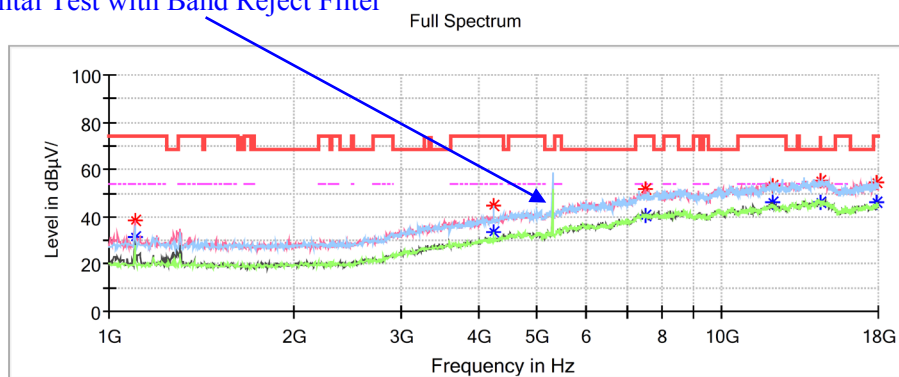
Project No.: RKSA251229001
EUT Model: M60
Test Mode: Transmitting in 802.11a mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 18.1℃
Humidity: 45%
Atmospheric Pressure: 103.0kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/1/30

Fundamental Test with Band Reject Filter**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1102.000000	---	31.17	54.00	22.83	V	-14.8
1102.000000	39.20	---	74.00	34.80	V	-14.8
4206.200000	---	34.98	54.00	19.02	H	-4.7
4206.200000	44.53	---	74.00	29.47	H	-4.7
7419.200000	---	41.62	54.00	12.38	H	2.7
7419.200000	49.74	---	74.00	24.26	H	2.7
12016.000000	---	46.41	54.00	7.59	V	9.1
12016.000000	52.91	---	74.00	21.09	V	9.1
14481.000000	56.24	---	74.00	17.76	H	11.9
14481.000000	---	46.24	54.00	7.76	H	11.9
17884.400000	---	45.93	54.00	8.07	V	11.5
17884.400000	52.74	---	74.00	21.26	V	11.5

Middle Channel: 5300MHz**Common Information**

Project No.: RKSA251229001
EUT Model: M60
Test Mode: Transmitting in 802.11a mode Middle Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 18.1℃
Humidity: 45%
Atmospheric Pressure: 103.0kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/1/30

Fundamental Test with Band Reject Filter**Critical Freqs**

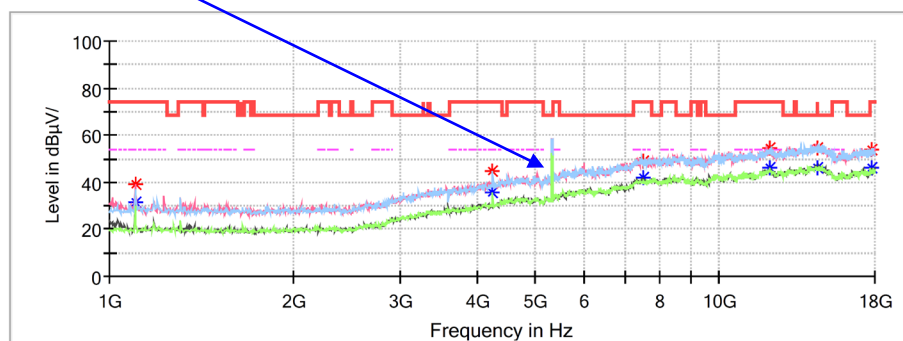
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1102.000000	---	31.13	54.00	22.87	V	-14.8
1102.000000	38.19	---	74.00	35.81	V	-14.8
4240.200000	---	33.60	54.00	20.40	H	-4.6
4240.200000	44.77	---	74.00	29.23	H	-4.6
7507.600000	---	40.24	54.00	13.76	H	3.0
7507.600000	51.72	---	74.00	22.28	H	3.0
12128.200000	53.27	---	74.00	20.73	V	9.0
12128.200000	---	46.38	54.00	7.62	V	9.0
14484.400000	---	46.29	54.00	7.71	V	11.9
14484.400000	55.22	---	74.00	18.78	V	11.9
17884.400000	54.89	---	74.00	19.11	H	11.5
17884.400000	---	46.23	54.00	7.77	H	11.5

High Channel: 5320MHz**Common Information**

Project No.: RKSA251229001
 EUT Model: M60
 Test Mode: Transmitting in 802.11a mode High Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 18.1℃
 Humidity: 45%
 Atmospheric Pressure: 103.0kPa
 Test Engineer: Destine Hu
 Check by: Bard Liu
 Test Date: 2026/1/30

Fundamental Test with Band Reject Filter

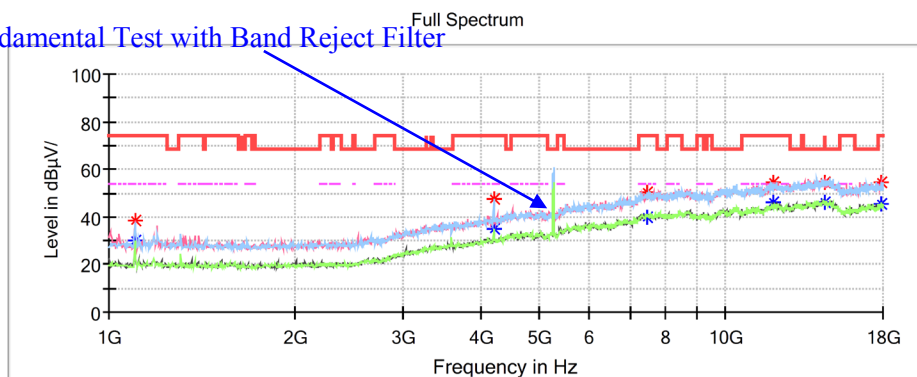
Full Spectrum

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1102.000000	39.23	---	74.00	34.77	V	-14.8
1102.000000	---	31.22	54.00	22.78	V	-14.8
4253.800000	44.97	---	74.00	29.03	H	-4.6
4253.800000	---	35.59	54.00	18.41	H	-4.6
7494.000000	---	41.67	54.00	12.33	V	3.0
7494.000000	49.30	---	74.00	24.70	V	3.0
12094.200000	54.20	---	74.00	19.80	H	9.0
12094.200000	---	45.84	54.00	8.16	H	9.0
14481.000000	---	46.42	54.00	7.58	V	11.9
14481.000000	54.63	---	74.00	19.37	V	11.9
17802.800000	53.67	---	74.00	20.33	V	11.2
17802.800000	---	46.14	54.00	7.86	V	11.2

802.11ac 20 Mode:**Low Channel: 5260MHz****Common Information**

Project No.: RKSA251229001
EUT Model: M60
Test Mode: Transmitting in 802.11ac20 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 18.1°C
Humidity: 45%
Atmospheric Pressure: 103.0kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/1/30

Fundamental Test with Band Reject Filter**Critical Freqs**

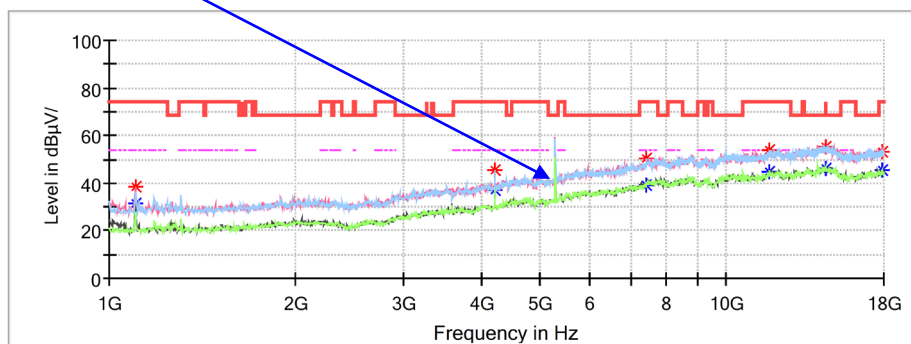
Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1102.000000	38.29	---	74.00	35.71	V	-14.8
1102.000000	---	30.32	54.00	23.68	V	-14.8
4206.200000	---	35.21	54.00	18.79	H	-4.7
4206.200000	47.21	---	74.00	26.79	H	-4.7
7463.400000	---	39.79	54.00	14.21	H	2.9
7463.400000	50.20	---	74.00	23.80	H	2.9
11968.400000	---	46.44	54.00	7.56	V	9.0
11968.400000	54.49	---	74.00	19.51	V	9.0
14487.800000	---	46.13	54.00	7.87	H	11.9
14487.800000	54.73	---	74.00	19.27	H	11.9
17887.800000	---	45.45	54.00	8.55	H	11.5
17887.800000	54.27	---	74.00	19.73	H	11.5

Middle Channel: 5300MHz**Common Information**

Project No.: RKSA251229001
EUT Model: M60
Test Mode: Transmitting in 802.11ac20 mode Middle Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 18.1°C
Humidity: 45%
Atmospheric Pressure: 103.0kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/1/30

Fundamental Test with Band Reject Filter

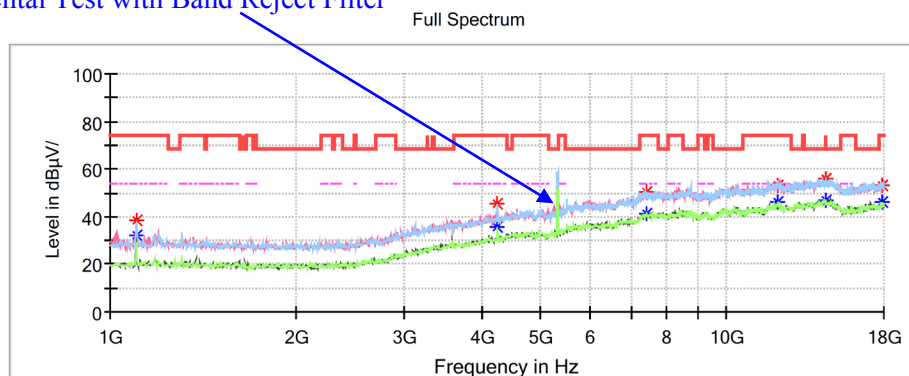
Full Spectrum

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1102.000000	---	31.51	54.00	22.49	V	-14.8
1102.000000	38.36	---	74.00	35.64	V	-14.8
4223.200000	45.51	---	74.00	28.49	H	-4.6
4223.200000	---	37.32	54.00	16.68	H	-4.6
7415.800000	---	39.44	54.00	14.56	V	2.7
7415.800000	50.45	---	74.00	23.55	V	2.7
11740.600000	---	45.04	54.00	8.96	H	8.6
11740.600000	54.04	---	74.00	19.96	H	8.6
14474.200000	55.41	---	74.00	18.59	V	11.9
14474.200000	---	46.45	54.00	7.55	V	11.9
17925.200000	---	45.34	54.00	8.66	H	11.6
17925.200000	52.99	---	74.00	21.01	H	11.6

High Channel: 5320MHz**Common Information**

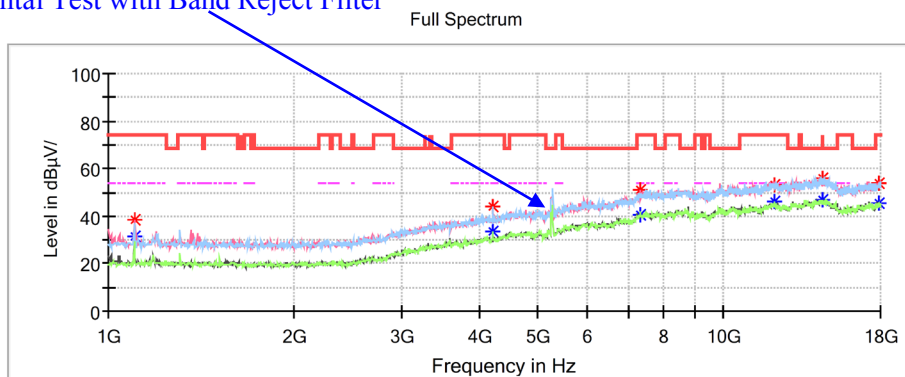
Project No.: RKSA251229001
EUT Model: M60
Test Mode: Transmitting in 802.11ac20 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 18.1℃
Humidity: 45%
Atmospheric Pressure: 103.0kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/1/30

Fundamental Test with Band Reject Filter**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1102.000000	38.56	---	74.00	35.44	V	-14.8
1102.000000	---	32.50	54.00	21.50	V	-14.8
4253.800000	45.25	---	74.00	28.75	H	-4.6
4253.800000	---	35.74	54.00	18.26	H	-4.6
7436.200000	50.66	---	74.00	23.34	H	2.8
7436.200000	---	41.44	54.00	12.56	H	2.8
12094.200000	52.86	---	74.00	21.14	V	9.0
12094.200000	---	46.10	54.00	7.90	V	9.0
14477.600000	---	46.88	54.00	7.12	H	11.9
14477.600000	55.60	---	74.00	18.40	H	11.9
17918.400000	52.89	---	74.00	21.11	H	11.5
17918.400000	---	45.93	54.00	8.07	H	11.5

802.11ac40 Mode:**Low Channel: 5270MHz****Common Information**

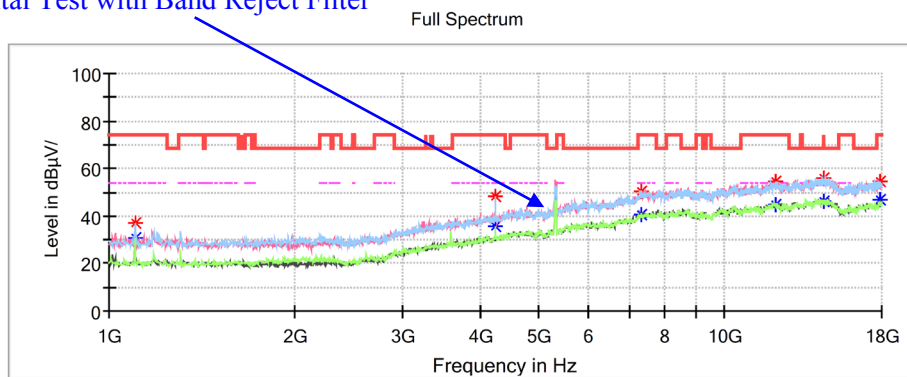
Project No.: RKSA251229001
EUT Model: M60
Test Mode: Transmitting in 802.11ac40 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 18.1℃
Humidity: 45%
Atmospheric Pressure: 103.0kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/1/30

Fundamental Test with Band Reject Filter**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1102.000000	---	31.27	54.00	22.73	V	-14.8
1102.000000	38.68	---	74.00	35.32	V	-14.8
4213.000000	---	33.79	54.00	20.21	H	-4.6
4216.400000	44.26	---	74.00	29.74	H	-4.6
7330.800000	---	40.62	54.00	13.38	V	2.5
7330.800000	50.82	---	74.00	23.18	V	2.5
12084.000000	---	45.88	54.00	8.12	H	9.0
12084.000000	52.98	---	74.00	21.02	H	9.0
14477.600000	---	47.00	54.00	7.00	V	11.9
14477.600000	56.01	---	74.00	17.99	V	11.9
17877.600000	54.00	---	74.00	20.00	H	11.4
17877.600000	---	45.77	54.00	8.23	H	11.4

High Channel: 5310MHz**Common Information**

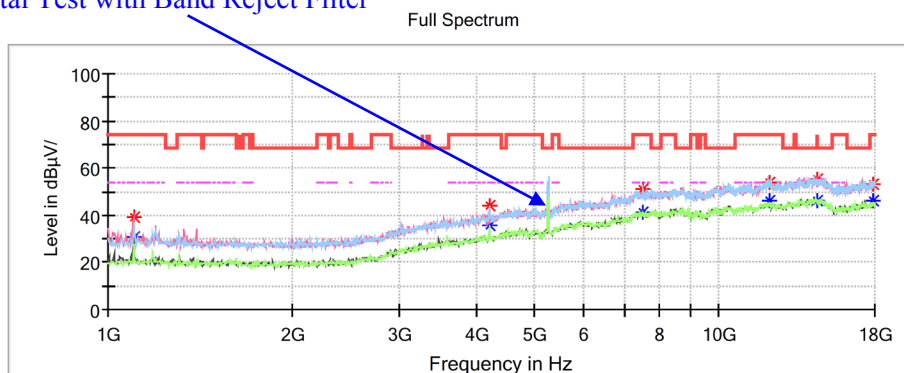
Project No.: RKSA251229001
EUT Model: M60
Test Mode: Transmitting in 802.11ac40 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 18.1℃
Humidity: 45%
Atmospheric Pressure: 103.0kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/1/30

Fundamental Test with Band Reject Filter**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1102.000000	---	30.98	54.00	23.02	V	-14.8
1102.000000	37.28	---	74.00	36.72	V	-14.8
4247.000000	---	35.48	54.00	18.52	H	-4.6
4247.000000	48.53	---	74.00	25.47	H	-4.6
7303.600000	---	40.31	54.00	13.69	H	2.4
7303.600000	50.58	---	74.00	23.42	H	2.4
12070.400000	---	44.98	54.00	9.02	H	9.0
12070.400000	54.38	---	74.00	19.62	H	9.0
14484.400000	---	45.98	54.00	8.02	V	11.9
14484.400000	55.67	---	74.00	18.33	V	11.9
17857.200000	54.21	---	74.00	19.79	V	11.4
17857.200000	---	46.57	54.00	7.43	V	11.4

802.11ax20 Mode:**Low Channel: 5260MHz****Common Information**

Project No.: RKSA251229001
EUT Model: M60
Test Mode: Transmitting in 802.11ax20 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 18.1°C
Humidity: 45%
Atmospheric Pressure: 103.0kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/1/30

Fundamental Test with Band Reject Filter**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1102.000000	38.95	---	74.00	35.05	V	-14.8
1102.000000	---	30.66	54.00	23.34	V	-14.8
4206.200000	44.10	---	74.00	29.90	H	-4.7
4206.200000	---	35.69	54.00	18.31	H	-4.7
7528.000000	---	41.35	54.00	12.65	H	3.0
7528.000000	50.71	---	74.00	23.29	H	3.0
12087.400000	53.69	---	74.00	20.31	V	9.0
12087.400000	---	46.00	54.00	8.00	V	9.0
14481.000000	---	46.07	54.00	7.93	H	11.9
14481.000000	54.99	---	74.00	19.01	H	11.9
17891.200000	53.42	---	74.00	20.58	V	11.5
17891.200000	---	46.41	54.00	7.59	V	11.5