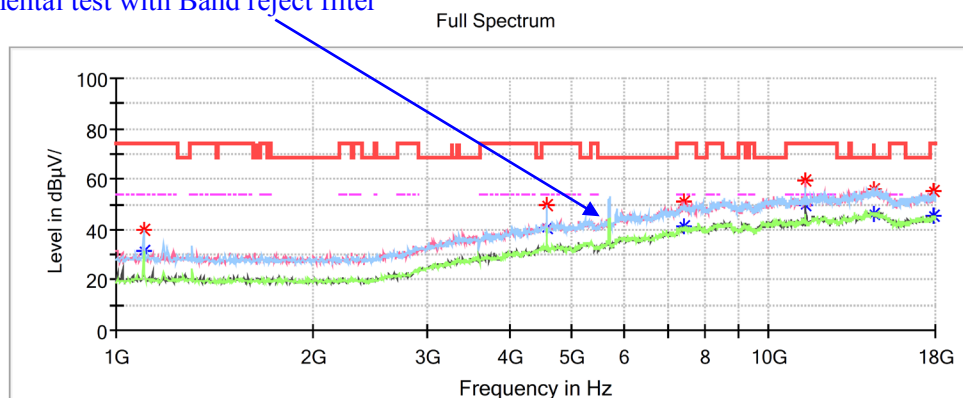


High Channel: 5700MHz**Common Information**

Project No.: RKSA251229001
EUT Model: M60
Test Mode: Transmitting in 802.11ac20 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 17.4℃
Humidity: 41%
Atmospheric Pressure: 103.3kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/2/2

Fundamental test with Band reject filter**Critical Freqs**

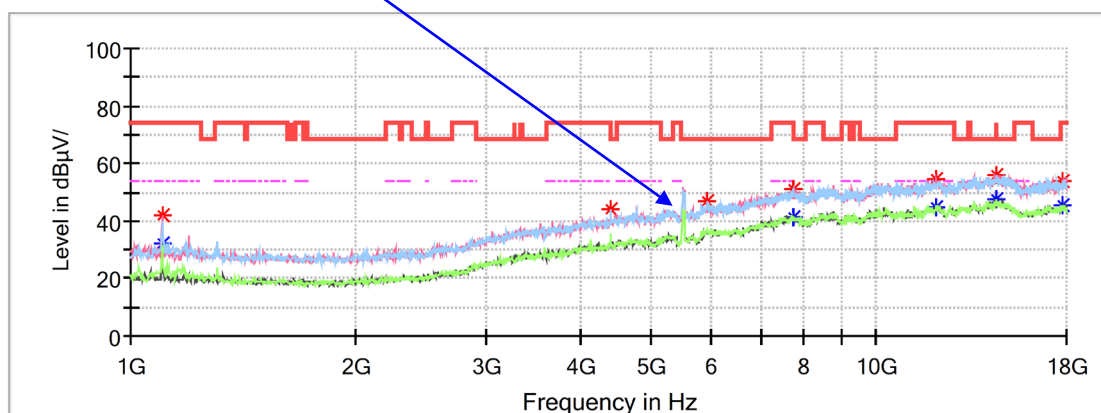
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1102.000000	39.80	---	74.00	34.20	H	-14.8
1102.000000	---	31.27	54.00	22.73	H	-14.8
4559.800000	49.45	---	74.00	24.55	H	-4.0
4559.800000	---	40.26	54.00	13.74	H	-4.0
7402.200000	---	41.39	54.00	12.61	V	2.7
7402.200000	51.02	---	74.00	22.98	V	2.7
11400.000000	59.48	---	74.00	14.52	V	7.8
11400.000000	---	49.95	54.00	4.05	V	7.8
14481.000000	---	46.22	54.00	7.78	H	11.9
14481.000000	56.03	---	74.00	17.97	H	11.9
17853.800000	54.90	---	74.00	19.10	V	11.4
17853.800000	---	45.75	54.00	8.25	V	11.4

802.11ac40 Mode:**Low Channel: 5510MHz****Common Information**

Project No.: RKSA251229001
 EUT Model: M60
 Test Mode: Transmitting in 802.11ac20 mode Low Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 17.4℃
 Humidity: 41%
 Atmospheric Pressure: 103.3kPa
 Test Engineer: Destine Hu
 Check by: Bard Liu
 Test Date: 2026/2/2

Fundamental test with Band reject filter

Full Spectrum

**Critical Freqs**

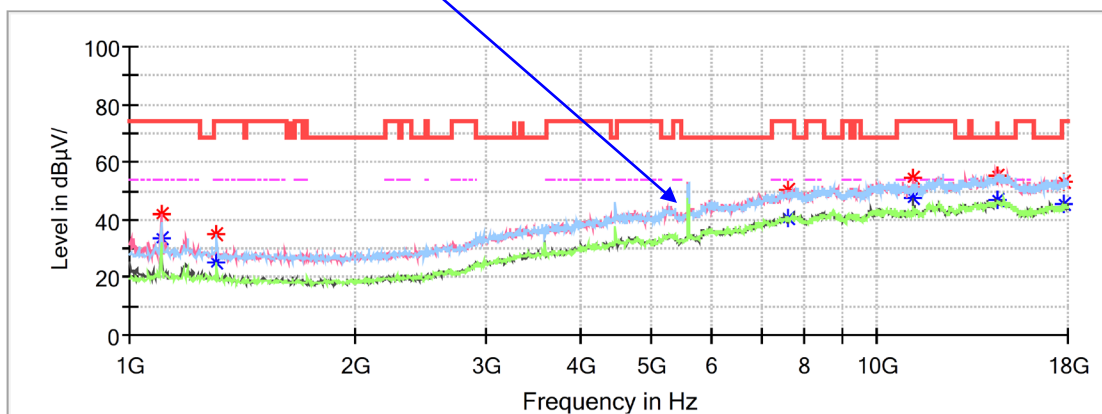
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1102.000000	---	32.28	54.00	21.72	V	-14.8
1102.000000	41.71	---	74.00	32.29	V	-14.8
4406.800000	43.92	---	68.20	24.28	H	-4.3
5919.800000	47.09	---	68.20	21.11	H	-0.8
7721.800000	---	41.26	54.00	12.74	H	3.1
7721.800000	51.09	---	74.00	22.91	H	3.1
12063.600000	---	44.90	54.00	9.10	V	9.0
12063.600000	54.47	---	74.00	19.53	V	9.0
14481.000000	---	47.61	54.00	6.39	H	11.9
14481.000000	55.66	---	74.00	18.34	H	11.9
17809.600000	53.61	---	74.00	20.39	H	11.3
17809.600000	---	45.79	54.00	8.21	H	11.3

Middle Channel: 5590MHz**Common Information**

Project No.: RKSA251229001
 EUT Model: M60
 Test Mode: Transmitting in 802.11ac40 mode Middle Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 17.4°C
 Humidity: 41%
 Atmospheric Pressure: 103.3kPa
 Test Engineer: Destine Hu
 Check by: Bard Liu
 Test Date: 2026/2/2

Fundamental test with Band reject filter

Full Spectrum

**Critical_Freqs**

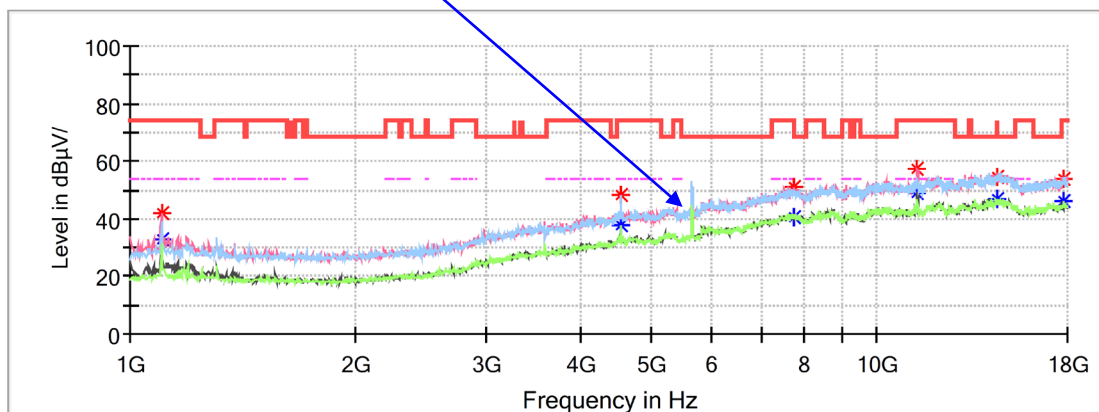
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1102.000000	41.71	---	74.00	32.29	V	-14.8
1102.000000	---	33.55	54.00	20.45	V	-14.8
1309.400000	---	25.23	54.00	28.77	H	-14.1
1309.400000	34.67	---	74.00	39.33	H	-14.1
7592.600000	---	40.89	54.00	13.11	V	3.0
7592.600000	50.65	---	74.00	23.35	V	3.0
11180.000000	54.36	---	74.00	19.64	V	7.1
11180.000000	---	47.34	54.00	6.66	V	7.1
14477.600000	---	47.16	54.00	6.84	H	11.9
14477.600000	55.45	---	74.00	18.55	H	11.9
17802.800000	53.23	---	74.00	20.77	V	11.2
17802.800000	---	45.74	54.00	8.26	V	11.2

High Channel: 5670MHz**Common Information**

Project No.: RKSA251229001
EUT Model: M60
Test Mode: Transmitting in 802.11ac40 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 17.4℃
Humidity: 41%
Atmospheric Pressure: 103.3kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/2/2

Fundamental test with Band reject filter

Full Spectrum

**Critical_Freqs**

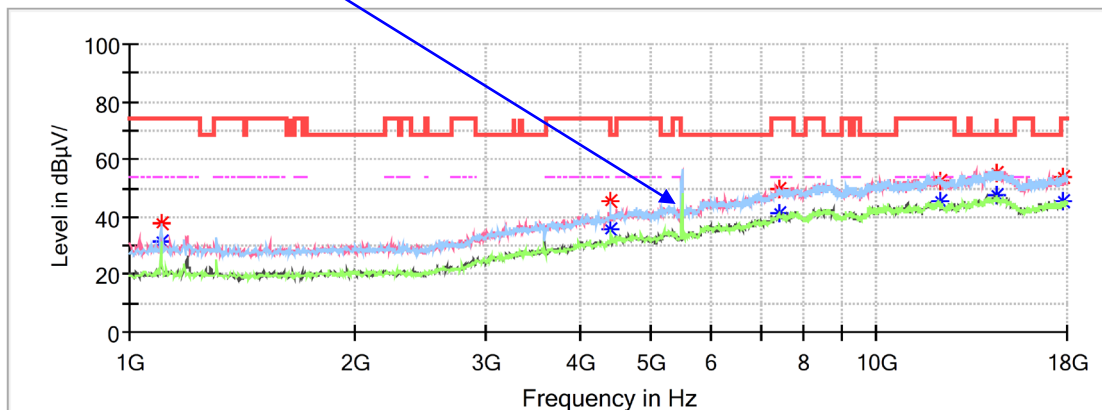
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1102.000000	---	33.17	54.00	20.83	V	-14.8
1102.000000	41.88	---	74.00	32.12	V	-14.8
4536.000000	---	38.05	54.00	15.95	H	-4.1
4536.000000	48.33	---	74.00	25.67	H	-4.1
7725.200000	---	40.83	54.00	13.17	V	3.1
7725.200000	50.72	---	74.00	23.28	V	3.1
11340.000000	---	49.21	54.00	4.79	V	7.6
11340.000000	57.13	---	74.00	16.87	V	7.6
14477.600000	54.88	---	74.00	19.12	H	11.9
14477.600000	---	47.07	54.00	6.93	H	11.9
17792.600000	---	45.91	54.00	8.09	H	11.2
17792.600000	53.93	---	74.00	20.07	H	11.2

802.11ax20 Mode:**Low Channel: 5500MHz****Common Information**

Project No.: RKSA251229001
 EUT Model: M60
 Test Mode: Transmitting in 802.11ax20 mode Low Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 17.4℃
 Humidity: 41%
 Atmospheric Pressure: 103.3kPa
 Test Engineer: Destine Hu
 Check by: Bard Liu
 Test Date: 2026/2/2

Fundamental test with Band reject filter

Full Spectrum

**Critical_Freqs**

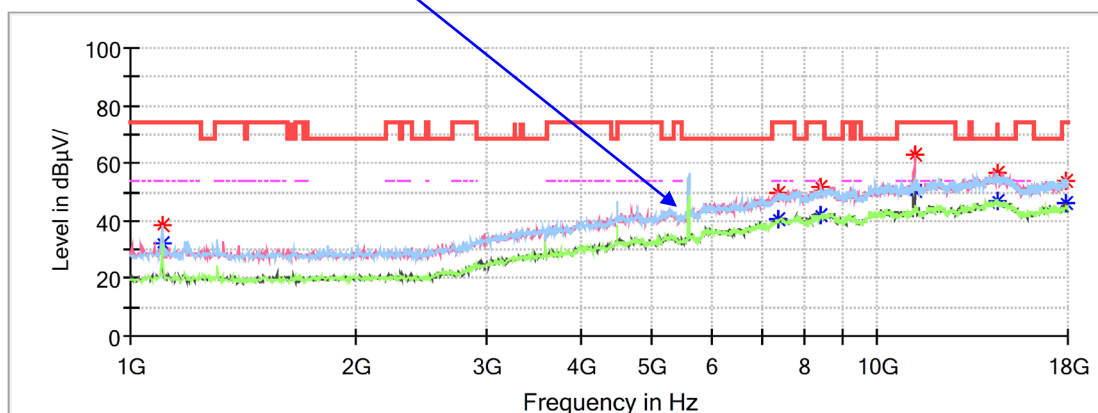
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1102.000000	37.84	---	74.00	36.16	H	-14.8
1102.000000	---	31.53	54.00	22.47	H	-14.8
4400.000000	45.66	---	74.00	28.34	H	-4.4
4400.000000	---	35.54	54.00	18.46	H	-4.4
7436.200000	49.78	---	74.00	24.22	V	2.8
7436.200000	---	41.54	54.00	12.46	V	2.8
12175.800000	52.73	---	74.00	21.27	V	9.0
12175.800000	---	45.66	54.00	8.34	V	9.0
14481.000000	---	47.84	54.00	6.16	H	11.9
14481.000000	55.38	---	74.00	18.62	H	11.9
17816.400000	54.13	---	74.00	19.87	V	11.3
17816.400000	---	45.73	54.00	8.27	V	11.3

Middle Channel: 5600MHz**Common Information**

Project No.: RKSA251229001
EUT Model: M60
Test Mode: Transmitting in 802.11ax20 mode Middle Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 17.4℃
Humidity: 41%
Atmospheric Pressure: 103.3kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/2/2

Fundamental test with Band reject filter

Full Spectrum

**Critical_Freqs**

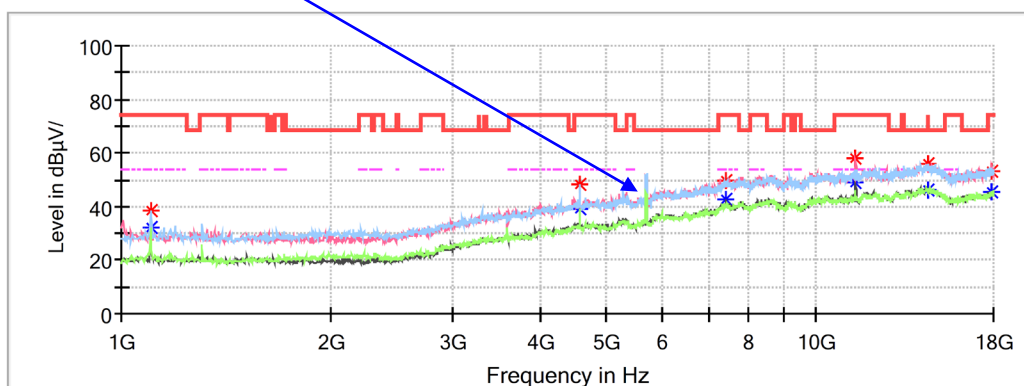
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1102.000000	---	31.87	54.00	22.13	H	-14.8
1102.000000	38.44	---	74.00	35.56	H	-14.8
7375.000000	---	40.28	54.00	13.72	V	2.6
7375.000000	49.99	---	74.00	24.01	V	2.6
8418.800000	---	41.62	54.00	12.38	V	4.5
8418.800000	51.59	---	74.00	22.41	V	4.5
11200.000000	---	50.00	54.00	4.00	V	7.2
11200.000000	63.02	---	74.00	10.98	V	7.2
14484.400000	---	46.56	54.00	7.44	H	11.9
14484.400000	56.34	---	74.00	17.66	H	11.9
17921.800000	54.18	---	74.00	19.82	H	11.6
17921.800000	---	46.36	54.00	7.64	H	11.6

High Channel: 5700MHz**Common Information**

Project No.: RKSA251229001
EUT Model: M60
Test Mode: Transmitting in 802.11ax20 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 17.4℃
Humidity: 41%
Atmospheric Pressure: 103.3kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/2/2

Fundamental test with Band reject filter

Full Spectrum

**Critical_Freqs**

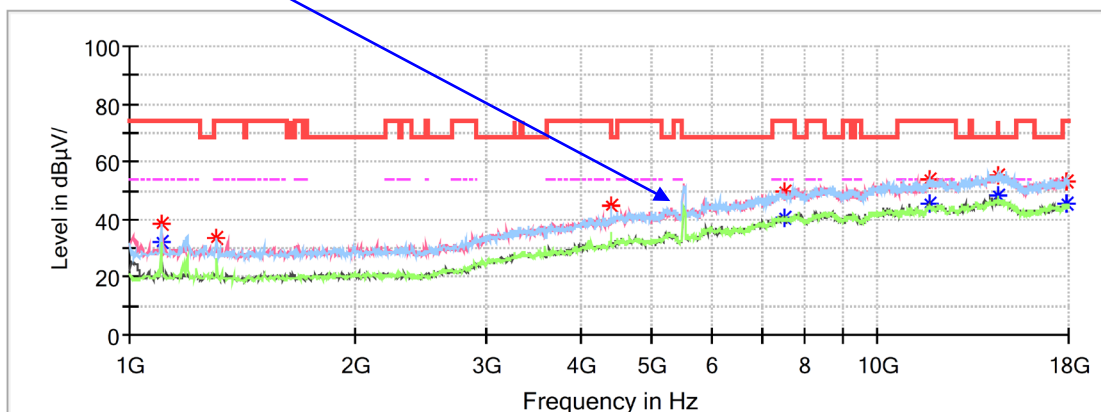
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1102.000000	38.49	---	74.00	35.51	H	-14.8
1102.000000	---	32.32	54.00	21.68	H	-14.8
4559.800000	48.52	---	74.00	25.48	H	-4.0
4559.800000	---	39.24	54.00	14.76	H	-4.0
7402.200000	49.46	---	74.00	24.54	V	2.7
7402.200000	---	42.45	54.00	11.55	V	2.7
11400.000000	57.83	---	74.00	16.17	V	7.8
11400.000000	---	48.69	54.00	5.31	V	7.8
14484.400000	---	46.20	54.00	7.80	V	11.9
14484.400000	55.89	---	74.00	18.11	V	11.9
17904.800000	52.82	---	74.00	21.18	H	11.5
17904.800000	---	45.67	54.00	8.33	H	11.5

802.11ax40 Mode:**Low Channel: 5510MHz****Common Information**

Project No.: RKSA251229001
EUT Model: M60
Test Mode: Transmitting in 802.11ax40 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 17.4℃
Humidity: 41%
Atmospheric Pressure: 103.3kPa
Test Engineer: Destine Hu
Check by: Bard Liu
Test Date: 2026/2/2

Fundamental test with Band reject filter

Full Spectrum

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1102.000000	38.13	---	74.00	35.87	H	-14.8
1102.000000	---	31.83	54.00	22.17	H	-14.8
1309.400000	33.78	---	74.00	40.22	H	-14.1
4406.800000	44.99	---	68.20	23.21	H	-4.3
7494.000000	---	40.64	54.00	13.36	V	3.0
7494.000000	49.98	---	74.00	24.02	V	3.0
11699.800000	53.74	---	74.00	20.26	V	8.5
11699.800000	---	45.11	54.00	8.89	V	8.5
14481.000000	---	47.92	54.00	6.08	H	11.9
14481.000000	55.05	---	74.00	18.95	H	11.9
17847.000000	53.34	---	74.00	20.66	H	11.4
17847.000000	---	45.72	54.00	8.28	H	11.4