


FCC PART 27
FCC PART 22H, PART 24E
TEST REPORT

For

Feitian Technologies Co., Ltd.

Floor 17th, Tower B, Huizhi Mansion, No.9 Xueqing Road, Haidian District, Beijing, China

FCC ID: ZD3FTM60

Report Type: Original Report	Product Name: Android Tablet
Report Number:	<u>RKSA251229001-00G</u>
Report Date:	<u>2026-03-06</u>
Reviewed By:	<u>Bard Liu</u> 
Approved By:	<u>Kyle Xu</u> 
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu Province, China Tel: +86-512-86175000 Fax: +86-512-88934268 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Kunshan). This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, or any agency of the U.S.Government.

TABLE OF CONTENTS

REPORT REVISION HISTORY.....	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	6
TEST METHODOLOGY	6
MEASUREMENT UNCERTAINTY	7
TEST FACILITY	7
SYSTEM TEST CONFIGURATION.....	8
JUSTIFICATION	8
CHANNEL LIST	8
EQUIPMENT MODIFICATIONS	9
SUPPORT EQUIPMENT LIST AND DETAILS	9
EXTERNAL I/O CABLE.....	9
BLOCK DIAGRAM OF TEST SETUP	9
TEST EQUIPMENT LIST	11
SUMMARY OF TEST RESULTS	13
FCC §1.1307(B) & §2.1093 - RF EXPOSURE	14
APPLICABLE STANDARD	14
FCC §2.1047 - MODULATION CHARACTERISTIC	15
FCC §2.1046; § 22.913 (A); §24.232 (C); §27.50 (D) (H); - RF OUTPUT POWER.....	16
APPLICABLE STANDARDS.....	16
TEST PROCEDURE	16
TEST DATA: SEE APPENDIX A.....	16
FCC §2.1049, §22.917, §22.905 & §24.238, §27.53 - OCCUPIED BANDWIDTH	17
APPLICABLE STANDARDS	17
TEST PROCEDURE	17
TEST DATA: SEE APPENDIX A & APPENDIX B	17
FCC § 2.1051; § 22.917 (A); § 24.238 (A); §27.53 (H) (M) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	18
APPLICABLE STANDARDS	18
TEST PROCEDURE	19
TEST DATA: SEE APPENDIX A & APPENDIX D	19
FCC § 2.1053; § 22.917 (A); § 24.238 (A) & §27.53 (H) (M); - SPURIOUS RADIATED EMISSIONS	20
APPLICABLE STANDARDS	20
TEST PROCEDURE	21
TEST DATA: SEE APPENDIX A.....	21
FCC § 22.917 (A); § 24.238 (A); §27.53 (H) (M); - BAND EDGES	22
APPLICABLE STANDARDS	22
TEST PROCEDURE	23
TEST DATA: SEE APPENDIX A&C	23
FCC §2.1055; §22.355; §24.235; §27.54; - FREQUENCY STABILITY	24
APPLICABLE STANDARDS	24
TEST PROCEDURE	25
TEST DATA: SEE APPENDIX A.....	25
EUT PHOTOGRAPHS	26

TEST SETUP PHOTOGRAPHS	27
APPENDIX A - TEST DATA.....	28
RF OUTPUT POWER.....	28
OCCUPIED BANDWIDTH	46
SPURIOUS EMISSIONS AT ANTENNA TERMINALS	57
SPURIOUS RADIATED EMISSIONS.....	71
BAND EDGES.....	81
FREQUENCY STABILITY	86

REPORT REVISION HISTORY

Number of Revisions	Report No.	Version	Issue Date	Description
0	RKSA251229001-00G	R1V1	2026-03-06	Initial Release

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	Feitian Technologies Co., Ltd.
Tested Model:	M60
Product Name:	Android Tablet
Power Supply:	DC 5V from adapter or DC 3.8V from battery
Maximum Conducted Output Power(Main Antenna) :	GPRS 850: 32.46 dBm; EGPRS 850: 27.21 dBm GPRS 1900: 29.92 dBm; EGPRS 1900: 25.86 dBm WCDMA: Band II: 22.04 dBm; Band IV: 22.05 dBm; Band V: 23.40 dBm LTE: Band 2: 21.56 dBm; Band 4: 22.85 dBm Band 5: 22.78 dBm; Band 7: 21.50 dBm Band 66: 22.48 dBm
RF Function:	GPRS/EGPRS, WCDMA, LTE
Operating Band/Frequency:	GPRS/EGPRS 850: 824-849 MHz(TX), 869-894 MHz(RX) GPRS/EGPRS 1900: 1850-1910 MHz(TX), 1930-1990 MHz(RX) WCDMA Band II: 1850-1910 MHz(TX), 1930-1990 MHz(RX) WCDMA Band IV: 1710-1755 MHz(TX), 2110-2155 MHz(RX) WCDMA Band V: 824-849 MHz(TX), 869-894 MHz(RX) LTE Band 2: 1850-1910 MHz(TX), 1930-1990 MHz(RX) LTE Band 4: 1710-1755 MHz(TX), 2110-2155 MHz(RX) LTE Band 5: 824-849 MHz(TX), 869-894 MHz(RX) LTE Band 7: 2500-2570 MHz(TX), 2620-2690 MHz(RX) LTE Band 66: 1710-1780 MHz(TX), 2110-2200 MHz(RX)
Modulation Type:	GPRS/EGPRS: GMSK, 8PSK WCDMA: BPSK, QPSK, 16QAM, 64QAM (Downlink Only) LTE: QPSK, 16QAM, 64QAM (Downlink Only)
Antenna Type:	FPC Antenna
★Maximum Antenna Gain (Main Antenna):	GPRS/EGPRS 850: 0.2 dBi GPRS/EGPRS 1900: 1.74 dBi WCDMA Band II : 1.74 dBi WCDMA Band IV: 2.68 dBi WCDMA Band V: 0.2 dBi LTE Band 2: 1.74 dBi LTE Band 4: 2.68 dBi LTE Band 5: 0.2 dBi LTE Band 7: 2.06 dBi LTE Band 66: 2.72 dBi

Adapter Information:

Model: TEKA-UCA20US

Input: 100-240V, 50/60Hz, 0.35A MAX

Output: 5.0V, 2.0A

Note: The maximum antenna gain is provided by the applicant.

All measurement and test data in this report was gathered from production sample serial number: RKSA251229001-1 (Assigned by the BACL (Kunshan). The EUT supplied by the applicant was received on 2025-12-29.)

Objective

This type approval report is prepared for *Feitian Technologies Co., Ltd.* in accordance with Part 2, Part 22-Subpart H and Part 24-Subpart E, Part 27 of the Federal Communication Commission's rules.

The objective is to determine the compliance of EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability, and band edge.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-Part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services
Part 24 Subpart E - Personal Communication Services
Part 27 – Miscellaneous wireless communications services

Applicable Standards: ANSI C63.26-2015.

Measurement Uncertainty

Item		Uncertainty
RF Frequency		0.082×10^{-7}
RF output power, conducted		0.73dB
RF conducted test with spectrum		0.9dB
Radiated emission	9 kHz~150 kHz	3.8dB
	150 kHz~30 MHz	3.4dB
	30MHz~1GHz	5.91dB
	1GHz~6GHz	4.68dB
	6GHz~18GHz	4.92dB
	18GHz~40GHz	5.21dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%
Supply voltages		$\pm 0.4\%$

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) is accredited in accordance with ISO/IEC 17025:2017 by NVLAP (Lab code: 600338-0), and the lab has been recognized as the FCC accredited lab under the KDB 974614 D01, the FCC Designation No.: CN5055.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to ANSI C63.26-2015.

The final qualification test was performed with the EUT operating at normal mode.

Channel List

Mode	Test Frequency (MHz)		
	Low	Middle	High
GPRS/EGPRS 850	824.2	836.6	848.8
GPRS/EGPRS 1900	1850.2	1880	1909.8
WCDMA Band II	1852.4	1880	1907.6
WCDMA Band IV	1712.4	1732.6	1752.6
WCDMA Band V	826.4	836.6	846.6

Frequency Band	Bandwidth (MHz)	Test Frequency (MHz)		
		Low	Middle	High
LTE Band 2	1.4	1850.7	1880.0	1909.3
	3	1851.5	1880.0	1908.5
	5	1852.5	1880.0	1907.5
	10	1855.0	1880.0	1905.0
	15	1857.5	1880.0	1902.5
	20	1860.0	1880.0	1900.0
LTE Band 4	1.4	1710.7	1732.5	1754.3
	3	1711.5	1732.5	1753.5
	5	1712.5	1732.5	1752.5
	10	1715.0	1732.5	1750.0
	15	1717.5	1732.5	1747.5
	20	1720.0	1732.5	1745.0
LTE Band 5	1.4	824.7	836.5	848.3
	3	825.5	836.5	847.5
	5	826.5	836.5	846.5
	10	829.0	836.5	844.0
LTE Band 7	5	2502.5	2535.0	2567.5
	10	2505.0	2535.0	2565.0
	15	2507.5	2535.0	2562.5
	20	2510.0	2535.0	2560.0
LTE Band 66	1.4	1710.7	1745.0	1779.3
	3	1711.5	1745.0	1778.5
	5	1712.5	1745.0	1777.5
	10	1715.0	1745.0	1775.0
	15	1717.5	1745.0	1772.5
	20	1720.0	1745.0	1770.0

Equipment Modifications

No modifications were made to the EUT.

Support Equipment List and Details

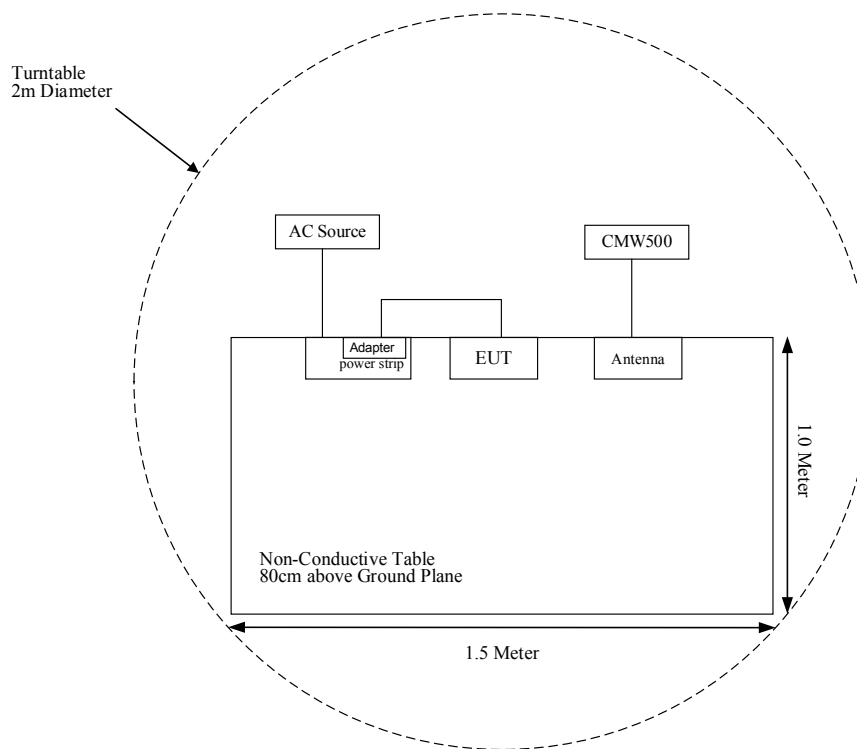
Manufacturer	Description	Model	Serial Number
Aihuaxin technology	Antenna	N/A	N/A

External I/O Cable

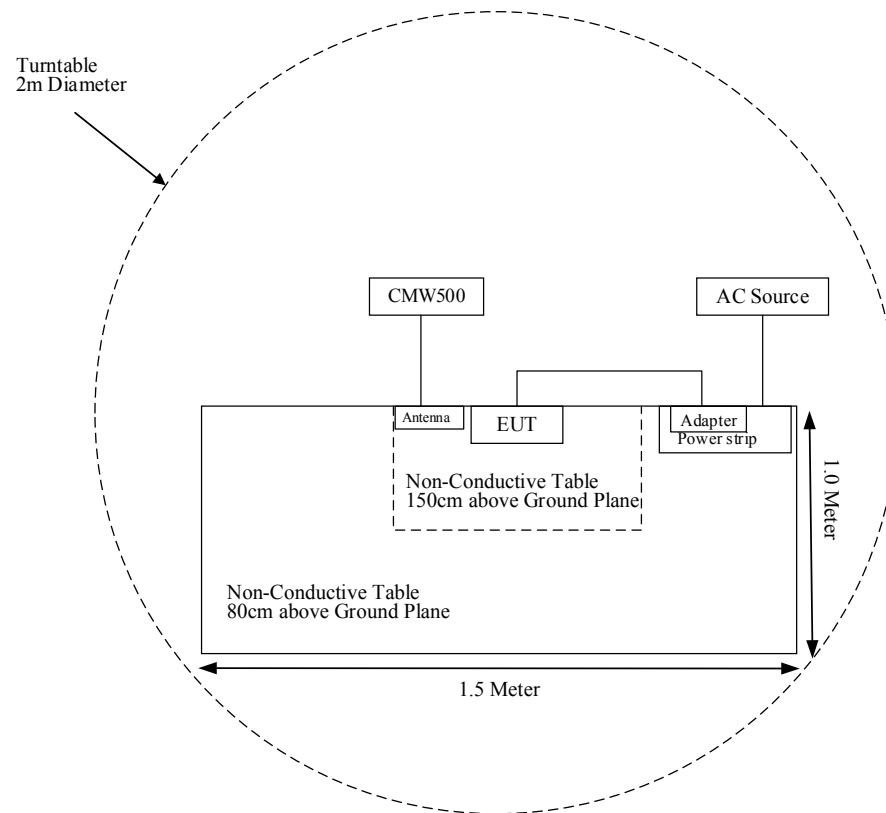
Cable Description	Length (m)	From Port	To Port
Power Cable	1.0	AC Source	Adapter
USB Cable	1.0	Adapter	EUT

Block Diagram of Test Setup

For Radiated Emissions(Below 1GHz):



For Radiated Emissions (Above 1 GHz):



TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber #1)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2025-04-09	2026-04-08
Keysight	Signal Generator	N5183A	MY47420304	2025-04-08	2026-04-07
Sunol Sciences	Broadband Antenna	JB3	A090314-1	2024-11-08	2027-11-07
Sunol Sciences	Hybrid Antenna	JB3	A090314-2	2024-10-29	2027-10-28
Sonoma Instrument	Amplifier	310N	171205	2025-04-09	2026-04-08
Rohde & Schwarz	Auto Test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-7	007	2025-04-08	2026-04-07
MICRO-COAX	Coaxial Cable	Cable-8	008	2025-04-09	2026-04-08
MICRO-COAX	Coaxial Cable	Cable-9	009	2025-04-09	2026-04-08
MICRO-COAX	Coaxial Cable	Cable-10	010	2025-04-09	2026-04-08
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	104478	2025-04-09	2026-04-08
Radiated Emission Test (Chamber #2)					
Keysight	Signal Generator	N5183A	MY47420304	2025-04-08	2026-04-07
Rohde & Schwarz	EMI Test Receiver	ESU40	100207/040	2025-04-09	2026-04-08
ETS-LINDGREN	Horn Antenna	3115	9207-3900	2024-11-03	2027-11-02
ETS-LINDGREN	Horn Antenna	3115	6229	2023-12-06	2026-12-05
ETS-LINDGREN	Horn Antenna	3116	2516	2024-12-12	2027-12-11
ETS-LINDGREN	Horn Antenna	3116	84159	2024-12-08	2027-12-07
A.H.Systems,inc	Amplifier	PAM-0118P	512	2025-04-09	2026-04-08
EM Electronics Corporation	Amplifier	EM18G40G	060726	2025-04-09	2026-04-08
Wi	Band reject filter	SN1	WRCGV5-804-824-849-869-30SS	2025-04-08	2026-04-07
Wi	Band reject filter	SN1	WRCGV6-1830-1850-1910-1930-30SS	2025-04-08	2026-04-07
Wi	Band reject filter	SN1	WRCGV8-1695-1710-1755-1770-30SS	2025-04-08	2026-04-07
Wi	Band reject filter	SN3	WRCJV8-2450-2500-2570-2620-40SS	2025-04-08	2026-04-07

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-6	006	2025-04-09	2026-04-08
MICRO-COAX	Coaxial Cable	Cable-11	011	2025-04-09	2026-04-08
MICRO-COAX	Coaxial Cable	Cable-12	012	2025-04-09	2026-04-08
MICRO-COAX	Coaxial Cable	Cable-13	013	2025-04-09	2026-04-08
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	104478	2025-04-09	2026-04-08
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSV40	101116	2025-04-09	2026-04-08
BACL	Temperature & Humidity Chamber	BTH-150	30023	2025-04-09	2026-04-08
EAST	Regulated DC Power Supply	MCH-303D-II	14070562	2025-04-09	2026-04-08
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	104478	2025-04-09	2026-04-08
Narda	Attenuator	10dB	010	2025-04-08	2026-04-07
Eastsheep	Attenuator	2W-N-JK-18G	20dB-01	2025-04-08	2026-04-07
MACOM	Power Splitter	2090-6214-00	96341	2025-04-09	2026-04-08
XHFDZ	RG316 Coaxial Cable	SMA-316	XHF-1175	Each time	N/A
Unknown	RF Cable	RF Cable C01	C01	Each Time	N/A

Statement of Traceability: Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§2.1046; § 22.913 (a); §24.232 (c); §27.50 (d) (h)	RF Output Power	Compliant
§ 2.1047	Modulation Characteristics	Not Applicable
§2.1049; §22.905; §22.917; §24.238; §27.53	Occupied Bandwidth	Compliant
§2.1051; §22.917 (a); §24.238 (a); §27.53 (g) (h) (m);	Spurious Emissions at Antenna Terminal	Compliant
§2.1053; §22.917 (a) §24.238 (a); §27.53 (g) (h) (m);	Spurious Radiated Emissions	Compliant
§22.917 (a); §24.238 (a); §27.53 (g) (h) (m);	Band Edge	Compliant
§2.1055; §22.355; §24.235; §27.54;	Frequency stability	Compliant
§1.1307(b)(1)& §2.1093	RF EXPOSURE	Compliant

FCC §1.1307(b) & §2.1093 - RF EXPOSURE

Applicable Standard

FCC§1.1307, §2.1093.

Measurement Result

Result: Please refer to the SAR report: RKSA251229001-20B.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H & 24E, Part 27, there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC §2.1046; § 22.913 (a); §24.232 (c); §27.50 (d) (h); - RF OUTPUT POWER**Applicable Standards**

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts (38.45dBm).

According to FCC §2.1046 and §24.232 (c), mobile and portable stations are limited to 2 watts (33dBm) EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §27.50(d), the maximum EIRP must not exceed 1Watts (30dBm) for 1710-1780MHz.


According to §27.50(h) (2), Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

According to FCC §2.1046, The maximum output power of the transmitter for mobile stations is 100 watts (20 dBw)

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.

Test Procedure***Conducted method:***

The RF output of the transmitter was connected to the CMW500 through sufficient attenuation.



Note: the offset=Attenuator (10dB) + Cable loss (0.5dB)

Test Data: See Appendix A

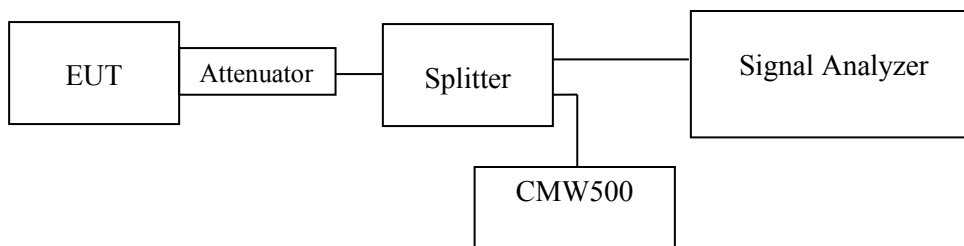
FCC §2.1049, §22.917, §22.905 & §24.238, §27.53 - OCCUPIED BANDWIDTH**Applicable Standards**

FCC 47 §2.1049, §22.917, §22.905 & §24.238, §27.53.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation. The 26 dB & 99% bandwidth was recorded.

Note : The 15dB is the Insertion loss of the RF cable, Power Splitter, Attenuator, which was offset into the Spectrum Analyzer.



Note: the offset=Attenuator (10dB) + Cable loss (0.5dB) +Power Splitter (4.5dB)

Test Data: See Appendix A & Appendix B

FCC § 2.1051; § 22.917 (a); § 24.238 (a); §27.53 (h) (m) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standards

FCC §2.1051, §22.917(a), §24.238(a), §27.53 (g) (h) (m).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

According to §22.917(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

24.238 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

27.53 (h) AWS emission limits —

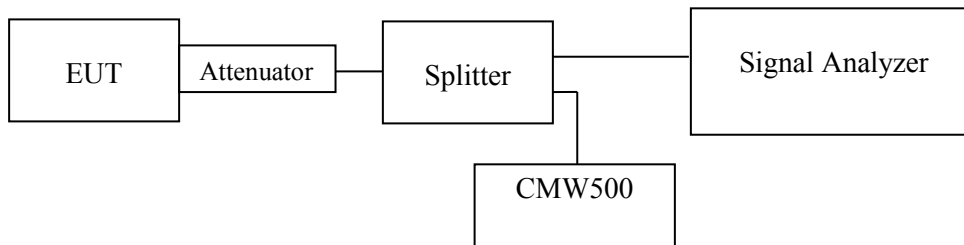
(1) General protection levels. Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

27.53m(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz for below 1GHz & 1MHz for above 1GHz. sufficient scans were taken to show any out of band emissions up to 10th harmonic.

Note : The 15.3dB/15.8dB is the Insertion loss of the RF cable, Power Splitter, Attenuator, which was offset into the Spectrum Analyzer.



Note: the offset=Attenuator (10dB) + Cable loss (0.8dB) +Power Splitter (4.5dB)

Or

Note: the offset=Attenuator (10dB) + Cable loss (1.3dB) +Power Splitter (4.5dB)

Test Data: See Appendix A & Appendix D

FCC § 2.1053; § 22.917 (a); § 24.238 (a) & §27.53 (h) (m); - SPURIOUS RADIATED EMISSIONS

Applicable Standards

FCC § 2.1053, §22.917(a) and § 24.238(a) and § 27.53 (g) (h) (m)

22.917 (a)

Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

24.238 (a)

Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

27.53 (h) AWS emission limits —

(1) General protection levels. Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

27.53m(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Test Procedure

According to ANSI C63.26-2015 Section 5.5.3:

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Test Data: See Appendix A

FCC § 22.917 (a); § 24.238 (a); § 27.53 (h) (m); - BAND EDGES

Applicable Standards**22.917 (a)**

Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

24.238 (a)

Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

27.53 (h) AWS emission limits —

(1) General protection levels. Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

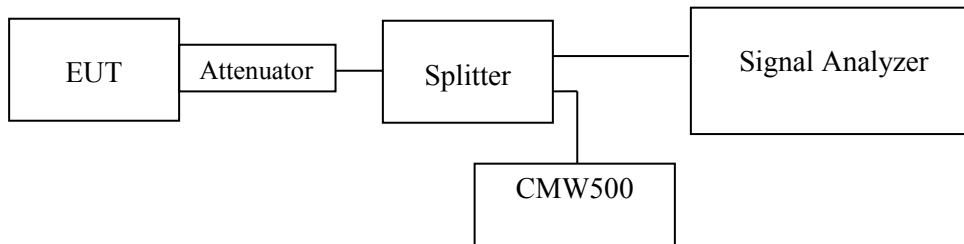
27.53m(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

Note : The 15dB is the Insertion loss of the RF cable, Power Splitter, Attenuator, which was offset into the Spectrum Analyzer.



Note: the offset=Attenuator (10dB) + Cable loss (0.5dB) +Power Splitter (4.5dB)

Test Data: See Appendix A&C

FCC §2.1055; §22.355; §24.235; §27.54; - FREQUENCY STABILITY**Applicable Standards**

FCC § 2.1055, §22.355, §24.235, §27.54.

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile > 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A

According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

According to §27.54 Frequency stability, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

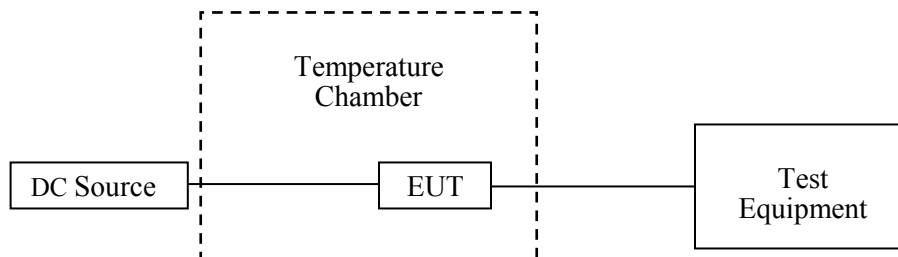
Test Procedure

According to ANSI C63.26-2015 Section 5.6:

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.



Test Data: See Appendix A

EUT PHOTOGRAPHS

Please refer to the attachment EXHIBIT A - EUT EXTERNAL PHOTOGRAPHS and EXHIBIT B - EUT INTERNAL PHOTOGRAPHS.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment EXHIBIT F - TEST SETUP PHOTOGRAPHS.

APPENDIX A - TEST DATA

RF OUTPUT POWER

Environmental Conditions & Test Information

Test Date:	2026-01-04 to 2026-01-13
Temperature:	20-21°C
Relative Humidity:	50-52 %
ATM Pressure:	101.0-102.0 kPa
Test Result:	Pass
Test Engineer:	Hugh Wu

GPRS/EGPRS 850 Band

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				ERP (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	1 slot	2 slots	3 slots	4 slots	
GPRS	128	824.2	32.35	32.18	30.41	28.55	30.40	30.23	28.46	26.60	38.45
	190	836.6	32.46	32.31	30.55	28.67	30.51	30.36	28.60	26.72	38.45
	251	848.8	32.34	32.18	30.49	28.58	30.39	30.23	28.54	26.63	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				ERP (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	1 slot	2 slots	3 slots	4 slots	
EGPRS	128	824.2	27.21	27.04	25.10	23.48	25.26	25.09	23.15	21.53	38.45
	190	836.6	27.16	27.08	25.07	23.50	25.21	25.13	23.12	21.55	38.45
	251	848.8	26.84	26.74	24.75	23.16	24.89	24.79	22.80	21.21	38.45

Note: ERP(dBm) = Conducted Power(dBm) + Antenna Gain(dBd)

Antenna Gain(dBd) = Antenna Gain(dBi)-2.15

GPRS/EGPRS 1900 Band

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				EIRP (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	1 slot	2 slots	3 slots	4 slots	
GPRS	512	1850.2	29.63	29.52	27.55	25.20	31.37	31.26	29.29	26.94	33
	661	1880	29.92	29.82	28.26	26.06	31.66	31.56	30.00	27.80	33
	810	1909.8	29.64	29.56	28.18	26.05	31.38	31.30	29.92	27.79	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				EIRP (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	1 slot	2 slots	3 slots	4 slots	
EGPRS	512	1850.2	25.56	25.55	23.89	21.99	27.30	27.29	25.63	23.73	33
	661	1880	25.80	25.77	24.41	22.56	27.54	27.51	26.15	24.30	33
	810	1909.8	25.86	25.85	24.21	22.38	27.60	27.59	25.95	24.12	33

Note: EIRP (dBm) = Conducted Power(dBm) + Antenna Gain(dBi)

WCDMA Band II

Mode	Test Mode	3GPP Sub Test	Average Output Power (dBm)			EIRP (dBm)		
			Low	Mid	High	Low	Mid	High
WCDMA (Band 2)	RMC12.2k		21.33	21.96	22.04	23.07	23.70	23.78
	HSDPA	1	21.28	21.99	21.97	23.02	23.73	23.71
		2	21.36	21.83	21.85	23.10	23.57	23.59
		3	21.55	22.00	21.90	23.29	23.74	23.64
		4	21.37	21.95	21.82	23.11	23.69	23.56
	HSUPA	1	21.35	21.98	22.04	23.09	23.72	23.78
		2	21.45	21.95	21.98	23.19	23.69	23.72
		3	21.33	21.88	21.95	23.07	23.62	23.69
		4	21.46	21.93	21.96	23.20	23.67	23.70
		5	21.57	21.45	22.00	23.31	23.19	23.74

Note: EIRP (dBm) = Conducted Power(dBm) + Antenna Gain(dBi)

Limit: EIRP≤33dBm

WCDMA Band V

Mode	Test Mode	3GPP Sub Test	Average Output Power (dBm)			ERP (dBm)		
			Low	Mid	High	Low	Mid	High
WCDMA (Band 5)	RMC12.2k		22.82	23.05	23.40	20.87	21.10	21.45
	HSDPA	1	22.85	23.00	23.38	20.90	21.05	21.43
		2	22.78	23.02	23.38	20.83	21.07	21.43
		3	22.75	22.99	23.29	20.80	21.04	21.34
		4	22.80	23.00	23.35	20.85	21.05	21.40
	HSUPA	1	22.84	23.01	23.36	20.89	21.06	21.41
		2	22.82	23.03	23.26	20.87	21.08	21.31
		3	22.84	23.06	23.29	20.89	21.11	21.34
		4	22.80	23.02	23.37	20.85	21.07	21.42
		5	22.90	23.00	23.35	20.95	21.05	21.40

Note: ERP(dBm) = Conducted Power(dBm) + Antenna Gain(dBd)

Antenna Gain(dBd) = Antenna Gain(dBi)-2.15

Limit: ERP≤38.45dBm

WCDMA Band IV

Mode	Test Mode	3GPP Sub Test	Average Output Power (dBm)			EIRP (dBm)		
			Low	Mid	High	Low	Mid	High
WCDMA (Band 4)	RMC12.2k		21.37	21.87	22.05	24.05	24.55	24.73
	HSDPA	1	21.42	21.86	22.03	24.10	24.54	24.71
		2	21.42	21.93	22.01	24.10	24.61	24.69
		3	21.47	21.87	22.02	24.15	24.55	24.70
		4	21.39	21.95	22.00	24.07	24.63	24.68
	HSUPA	1	21.39	21.90	21.99	24.07	24.58	24.67
		2	21.40	21.92	22.02	24.08	24.60	24.70
		3	21.44	21.92	22.01	24.12	24.60	24.69
		4	21.46	21.93	22.03	24.14	24.61	24.71
		5	21.39	21.89	22.02	24.07	24.57	24.70

Note: EIRP (dBm) = Conducted Power(dBm) + Antenna Gain(dBi)

Limit: EIRP≤30dBm

LTE Band 2

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP (dBm)		
			Low	Mid	High	Low	Mid	High
1.4	QPSK	1#0	21.52	21.22	21.54	23.26	22.96	23.28
		1#3	21.5	21.23	21.53	23.24	22.97	23.27
		1#5	21.44	21.18	21.52	23.18	22.92	23.26
		3#0	21.46	21.42	21.52	23.20	23.16	23.26
		3#1	21.44	21.4	21.52	23.18	23.14	23.26
		3#3	21.43	21.43	21.47	23.17	23.17	23.21
		6#0	20.42	20.45	20.51	22.16	22.19	22.25
	16QAM	1#0	20.87	20.22	20.91	22.61	21.96	22.65
		1#3	20.83	20.26	20.87	22.57	22.00	22.61
		1#5	20.81	20.25	20.88	22.55	21.99	22.62
		3#0	20.6	20.43	20.66	22.34	22.17	22.40
		3#1	20.62	20.44	20.64	22.36	22.18	22.38
		3#3	20.62	20.46	20.64	22.36	22.20	22.38
		6#0	19.51	20.03	19.5	21.25	21.77	21.24
3	QPSK	1#0	21.24	21.29	21.52	22.98	23.03	23.26
		1#8	21.24	21.31	21.56	22.98	23.05	23.30
		1#14	21.25	21.28	21.53	22.99	23.02	23.27
		8#0	20.4	20.39	20.46	22.14	22.13	22.20
		8#7	20.37	20.38	20.44	22.11	22.12	22.18
		8#4	20.38	20.39	20.45	22.12	22.13	22.19
		15#0	20.4	20.41	20.46	22.14	22.15	22.20
	16QAM	1#0	20.4	20.56	20.82	22.14	22.30	22.56
		1#8	20.38	20.56	20.83	22.12	22.30	22.57
		1#14	20.44	20.58	20.79	22.18	22.32	22.53
		8#0	19.65	20	19.86	21.39	21.74	21.60
		8#7	19.7	20	19.82	21.44	21.74	21.56
		8#4	19.71	19.86	19.84	21.45	21.60	21.58
		15#0	19.61	19.94	19.61	21.35	21.68	21.35

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP (dBm)		
			Low	Mid	High	Low	Mid	High
5	QPSK	1#0	21.18	21.24	21.32	22.92	22.98	23.06
		1#12	21.15	21.21	21.28	22.89	22.95	23.02
		1#24	21.13	21.14	21.29	22.87	22.88	23.03
		12#0	20.45	20.38	20.47	22.19	22.12	22.21
		12#7	20.42	20.36	20.47	22.16	22.10	22.21
		12#13	20.42	20.39	20.52	22.16	22.13	22.26
		25#0	20.4	20.39	20.47	22.14	22.13	22.21
	16QAM	1#0	20.3	20.13	20.83	22.04	21.87	22.57
		1#12	20.28	20.12	20.84	22.02	21.86	22.58
		1#24	20.31	20.12	20.87	22.05	21.86	22.61
		12#0	19.76	19.98	19.82	21.50	21.72	21.56
		12#7	19.89	20.01	19.89	21.63	21.75	21.63
		12#13	19.82	19.91	19.75	21.56	21.65	21.49
		25#0	19.75	19.88	19.85	21.49	21.62	21.59
10	QPSK	1#0	21.3	21.34	21.54	23.04	23.08	23.28
		1#25	21.22	21.31	21.51	22.96	23.05	23.25
		1#49	21.18	21.32	21.55	22.92	23.06	23.29
		25#0	20.43	20.37	20.39	22.17	22.11	22.13
		25#12	20.38	20.38	20.36	22.12	22.12	22.10
		25#25	20.38	20.38	20.43	22.12	22.12	22.17
		50#0	20.39	20.39	20.39	22.13	22.13	22.13
	16QAM	1#0	20.53	20.51	20.89	22.27	22.25	22.63
		1#25	20.47	20.48	20.81	22.21	22.22	22.55
		1#49	20.47	20.46	20.92	22.21	22.20	22.66
		25#0	19.73	19.94	19.84	21.47	21.68	21.58
		25#12	19.81	19.95	19.89	21.55	21.69	21.63
		25#25	19.79	19.7	19.72	21.53	21.44	21.46
		50#0	19.66	19.7	19.66	21.40	21.44	21.40

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP (dBm)		
			Low	Mid	High	Low	Mid	High
15	QPSK	1#0	21.42	21.37	21.48	23.16	23.11	23.22
		1#37	21.32	21.31	21.47	23.06	23.05	23.21
		1#74	21.31	21.28	21.49	23.05	23.02	23.23
		36#0	20.43	20.38	20.41	22.17	22.12	22.15
		36#20	20.4	20.39	20.43	22.14	22.13	22.17
		36#39	20.36	20.4	20.42	22.10	22.14	22.16
		75#0	20.39	20.41	20.4	22.13	22.15	22.14
	16QAM	1#0	20.94	20.51	20.89	22.68	22.25	22.63
		1#37	20.83	20.46	20.85	22.57	22.20	22.59
		1#74	20.82	20.43	20.87	22.56	22.17	22.61
		36#0	19.65	20.05	20.06	21.39	21.79	21.80
		36#20	19.8	19.99	20.06	21.54	21.73	21.80
		36#39	19.86	19.8	19.85	21.60	21.54	21.59
		75#0	19.71	19.9	19.86	21.45	21.64	21.60
20	QPSK	1#0	21.23	21.25	21.35	22.97	22.99	23.09
		1#49	21.2	21.25	21.34	22.94	22.99	23.08
		1#99	21.14	21.21	21.38	22.88	22.95	23.12
		50#0	20.4	20.38	20.43	22.14	22.12	22.17
		50#24	20.4	20.39	20.42	22.14	22.13	22.16
		50#50	20.36	20.38	20.39	22.10	22.12	22.13
		100#0	20.37	20.4	20.39	22.11	22.14	22.13
	16QAM	1#0	20.71	20.74	20.48	22.45	22.48	22.22
		1#49	20.69	20.68	20.47	22.43	22.42	22.21
		1#99	20.65	20.68	20.48	22.39	22.42	22.22
		50#0	19.6	20.17	19.95	21.34	21.91	21.69
		50#24	19.81	19.94	20.14	21.55	21.68	21.88
		50#50	19.98	19.67	19.77	21.72	21.41	21.51
		100#0	19.78	19.82	19.77	21.52	21.56	21.51

Note: EIRP (dBm) = Conducted Power(dBm) + Antenna Gain(dBi)

Limit: EIRP≤33dBm

LTE Band 4

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP (dBm)		
			Low	Mid	High	Low	Mid	High
1.4	QPSK	1#0	21.45	21.37	21.4	24.13	24.05	24.08
		1#3	21.46	21.37	21.4	24.14	24.05	24.08
		1#5	21.42	21.36	21.39	24.10	24.04	24.07
		3#0	21.43	21.59	21.55	24.11	24.27	24.23
		3#1	21.44	21.55	21.53	24.12	24.23	24.21
		3#3	21.43	21.59	21.54	24.11	24.27	24.22
		6#0	20.43	20.61	20.49	23.11	23.29	23.17
	16QAM	1#0	20.87	20.44	20.47	23.55	23.12	23.15
		1#3	20.84	20.4	20.46	23.52	23.08	23.14
		1#5	20.83	20.45	20.44	23.51	23.13	23.12
		3#0	20.65	20.61	20.68	23.33	23.29	23.36
		3#1	20.6	20.6	20.67	23.28	23.28	23.35
		3#3	20.61	20.59	20.68	23.29	23.27	23.36
		6#0	19.91	20.53	20.59	22.59	23.21	23.27
3	QPSK	1#0	21.29	21.51	21.57	23.97	24.19	24.25
		1#8	21.25	21.51	21.56	23.93	24.19	24.24
		1#14	21.28	21.5	21.54	23.96	24.18	24.22
		8#0	20.45	20.61	20.55	23.13	23.29	23.23
		8#4	20.44	20.6	20.54	23.12	23.28	23.22
		8#7	20.46	20.6	20.54	23.14	23.28	23.22
		15#0	20.46	20.63	20.56	23.14	23.31	23.24
	16QAM	1#0	20.48	20.82	20.93	23.16	23.50	23.61
		1#8	20.47	20.8	20.89	23.15	23.48	23.57
		1#14	20.5	20.82	20.88	23.18	23.50	23.56
		8#0	19.88	20.44	20.58	22.56	23.12	23.26
		8#4	20.01	20.32	20.5	22.69	23.00	23.18
		8#7	20.03	20.28	20.46	22.71	22.96	23.14
		15#0	20	20.35	20.38	22.68	23.03	23.06

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP (dBm)		
			Low	Mid	High	Low	Mid	High
5	QPSK	1#0	21.29	21.49	21.43	23.97	24.17	24.11
		1#12	21.24	21.47	21.36	23.92	24.15	24.04
		1#24	21.25	21.47	21.36	23.93	24.15	24.04
		12#0	20.52	20.69	20.61	23.20	23.37	23.29
		12#7	20.55	20.67	20.57	23.23	23.35	23.25
		12#13	20.55	20.68	20.59	23.23	23.36	23.27
		25#0	20.55	20.66	20.61	23.23	23.34	23.29
	16QAM	1#0	20.41	20.47	21.05	23.09	23.15	23.73
		1#12	20.42	20.44	20.99	23.10	23.12	23.67
		1#24	20.43	20.42	20.96	23.11	23.10	23.64
		12#0	20.02	20.37	20.56	22.70	23.05	23.24
		12#7	20.16	20.39	20.6	22.84	23.07	23.28
		12#13	20.18	20.31	20.42	22.86	22.99	23.10
		25#0	19.99	20.2	20.55	22.67	22.88	23.23
10	QPSK	1#0	21.45	22.85	22.51	24.13	25.53	25.19
		1#25	21.41	22.85	22.48	24.09	25.53	25.16
		1#49	21.43	22.81	22.42	24.11	25.49	25.10
		25#0	21.64	21.77	21.7	24.32	24.45	24.38
		25#12	21.67	21.77	21.69	24.35	24.45	24.37
		25#25	21.72	21.76	21.67	24.40	24.44	24.35
		50#0	21.68	21.79	21.7	24.36	24.47	24.38
	16QAM	1#0	21.8	22.22	21.8	24.48	24.90	24.48
		1#25	21.8	22.21	21.77	24.48	24.89	24.45
		1#49	21.83	22.21	21.7	24.51	24.89	24.38
		25#0	21.01	21.33	21.44	23.69	24.01	24.12
		25#12	21.21	21.42	21.62	23.89	24.10	24.30
		25#25	21.36	21.18	21.46	24.04	23.86	24.14
		50#0	21.02	21.18	21.38	23.70	23.86	24.06

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP (dBm)		
			Low	Mid	High	Low	Mid	High
15	QPSK	1#0	22.6	22.66	22.84	25.28	25.34	25.52
		1#37	22.56	22.68	22.69	25.24	25.36	25.37
		1#74	22.59	22.59	22.62	25.27	25.27	25.30
		36#0	21.65	21.76	21.71	24.33	24.44	24.39
		36#20	21.64	21.73	21.67	24.32	24.41	24.35
		36#39	21.67	21.73	21.64	24.35	24.41	24.32
		75#0	21.66	21.71	21.69	24.34	24.39	24.37
	16QAM	1#0	22.08	21.85	22.25	24.76	24.53	24.93
		1#37	22.05	21.79	22.12	24.73	24.47	24.80
		1#74	22.1	21.8	22.07	24.78	24.48	24.75
		36#0	21.16	21.5	21.31	23.84	24.18	23.99
		36#20	21.5	21.4	21.55	24.18	24.08	24.23
		36#39	21.55	21.2	21.56	24.23	23.88	24.24
		75#0	21.33	21.29	21.39	24.01	23.97	24.07
20	QPSK	1#0	22.44	22.55	22.7	25.12	25.23	25.38
		1#49	22.41	22.56	22.6	25.09	25.24	25.28
		1#99	22.42	22.57	22.54	25.10	25.25	25.22
		50#0	21.66	21.74	21.73	24.34	24.42	24.41
		50#24	21.68	21.71	21.68	24.36	24.39	24.36
		50#50	21.66	21.71	21.62	24.34	24.39	24.30
		100#0	21.65	21.74	21.66	24.33	24.42	24.34
	16QAM	1#0	21.93	22.02	21.84	24.61	24.70	24.52
		1#49	21.95	22.05	21.69	24.63	24.73	24.37
		1#99	21.96	22.02	21.63	24.64	24.70	24.31
		50#0	21.25	21.47	21.23	23.93	24.15	23.91
		50#24	21.56	21.47	21.31	24.24	24.15	23.99
		50#50	21.43	21.12	21.42	24.11	23.80	24.10
		100#0	21.3	21.26	21.15	23.98	23.94	23.83

Note: EIRP (dBm) = Conducted Power(dBm) + Antenna Gain(dBi)

Limit: EIRP≤30dBm

LTE Band 5

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			ERP (dBm)		
			Low	Mid	High	Low	Mid	High
1.4	QPSK	1#0	22.67	22.67	22.22	20.72	20.72	20.27
		1#3	22.67	22.69	22.28	20.72	20.74	20.33
		1#5	22.66	22.63	22.26	20.71	20.68	20.31
		3#0	22.76	22.62	22.47	20.81	20.67	20.52
		3#1	22.73	22.65	22.44	20.78	20.70	20.49
		3#3	22.78	22.6	22.47	20.83	20.65	20.52
		6#0	21.75	21.61	21.56	19.80	19.66	19.61
	16QAM	1#0	21.76	22.08	21.36	19.81	20.13	19.41
		1#3	21.74	22.1	21.31	19.79	20.15	19.36
		1#5	21.71	22.11	21.37	19.76	20.16	19.42
		3#0	21.93	21.9	21.54	19.98	19.95	19.59
		3#1	21.88	21.85	21.54	19.93	19.90	19.59
		3#3	21.85	21.85	21.48	19.90	19.90	19.53
		6#0	21.66	21.64	21.97	19.71	19.69	20.02
3	QPSK	1#0	22.47	22.48	22.48	20.52	20.53	20.53
		1#8	22.47	22.52	22.52	20.52	20.57	20.57
		1#14	22.46	22.49	22.52	20.51	20.54	20.57
		8#0	21.75	21.67	21.46	19.80	19.72	19.51
		8#4	21.69	21.67	21.39	19.74	19.72	19.44
		8#7	21.62	21.65	21.49	19.67	19.70	19.54
		15#0	21.62	21.66	21.46	19.67	19.71	19.51
	16QAM	1#0	21.71	21.89	21.89	19.76	19.94	19.94
		1#8	21.76	21.83	21.87	19.81	19.88	19.92
		1#14	21.75	21.88	21.77	19.80	19.93	19.82
		8#0	21.39	21.7	22.04	19.44	19.75	20.09
		8#4	21.48	21.73	21.99	19.53	19.78	20.04
		8#7	21.49	21.69	21.92	19.54	19.74	19.97
		15#0	21.4	21.69	21.94	19.45	19.74	19.99

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			ERP (dBm)		
			Low	Mid	High	Low	Mid	High
5	QPSK	1#0	22.44	22.48	22.39	20.49	20.53	20.44
		1#12	22.45	22.49	22.28	20.50	20.54	20.33
		1#24	22.39	22.45	22.29	20.44	20.50	20.34
		12#0	21.78	21.7	21.47	19.83	19.75	19.52
		12#7	21.77	21.68	21.54	19.82	19.73	19.59
		12#13	21.71	21.67	21.42	19.76	19.72	19.47
		25#0	21.72	21.69	21.43	19.77	19.74	19.48
	16QAM	1#0	21.7	21.51	21.97	19.75	19.56	20.02
		1#12	21.71	21.51	21.89	19.76	19.56	19.94
		1#24	21.63	21.43	21.91	19.68	19.48	19.96
		12#0	21.55	21.72	21.91	19.60	19.77	19.96
		12#7	21.67	21.69	22.09	19.72	19.74	20.14
		12#13	21.68	21.61	21.92	19.73	19.66	19.97
		25#0	21.55	21.57	22	19.60	19.62	20.05
10	QPSK	1#0	22.33	22.39	22.45	20.38	20.44	20.50
		1#25	22.24	22.5	22.44	20.29	20.55	20.49
		1#49	22.23	22.38	22.43	20.28	20.43	20.48
		25#0	21.44	21.43	21.38	19.49	19.48	19.43
		25#12	21.46	21.44	21.32	19.51	19.49	19.37
		25#25	21.44	21.43	21.26	19.49	19.48	19.31
		50#0	21.38	21.43	21.34	19.43	19.48	19.39
	16QAM	1#0	21.66	21.65	21.86	19.71	19.70	19.91
		1#25	21.56	21.59	21.76	19.61	19.64	19.81
		1#49	21.54	21.52	21.75	19.59	19.57	19.80
		25#0	21.27	21.63	21.26	19.32	19.68	19.31
		25#12	21.63	21.55	21.58	19.68	19.60	19.63
		25#25	21.57	21.3	21.56	19.62	19.35	19.61
		50#0	21.42	21.28	21.37	19.47	19.33	19.42

Note: ERP(dBm) = Conducted Power(dBm) + Antenna Gain(dBd)

Antenna Gain(dBd) = Antenna Gain(dBi)-2.15

Limit: ERP≤38.45dBm

LTE Band 7

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP (dBm)		
			Low	Mid	High	Low	Mid	High
5	QPSK	1#0	20.42	20.15	20.4	22.48	22.21	22.46
		1#12	20.36	20.09	20.4	22.42	22.15	22.46
		1#24	20.41	20.14	20.4	22.47	22.20	22.46
		12#0	19.64	19.45	19.57	21.70	21.51	21.63
		12#7	19.61	19.46	19.57	21.67	21.52	21.63
		12#13	19.61	19.43	19.6	21.67	21.49	21.66
		25#0	19.62	19.44	19.59	21.68	21.50	21.65
	16QAM	1#0	20.03	19.39	19.36	22.09	21.45	21.42
		1#12	20	19.36	19.38	22.06	21.42	21.44
		1#24	19.99	19.38	19.38	22.05	21.44	21.44
		12#0	19.71	19.67	19.63	21.77	21.73	21.69
		12#7	19.78	19.7	19.57	21.84	21.76	21.63
		12#13	19.72	19.67	19.41	21.78	21.73	21.47
		25#0	19.72	19.58	19.47	21.78	21.64	21.53
10	QPSK	1#0	20.44	20.41	20.7	22.50	22.47	22.76
		1#25	20.41	20.33	20.67	22.47	22.39	22.73
		1#49	20.42	20.39	20.69	22.48	22.45	22.75
		25#0	19.61	19.47	19.6	21.67	21.53	21.66
		25#12	19.59	19.43	19.57	21.65	21.49	21.63
		25#25	19.63	19.47	19.61	21.69	21.53	21.67
		50#0	19.61	19.45	19.6	21.67	21.51	21.66
	16QAM	1#0	19.69	19.63	20.08	21.75	21.69	22.14
		1#25	19.69	19.55	20.01	21.75	21.61	22.07
		1#49	19.71	19.59	20.07	21.77	21.65	22.13
		25#0	19.59	19.61	19.72	21.65	21.67	21.78
		25#12	19.7	19.72	19.7	21.76	21.78	21.76
		25#25	19.56	19.61	19.46	21.62	21.67	21.52
		50#0	19.48	19.57	19.52	21.54	21.63	21.58

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP (dBm)		
			Low	Mid	High	Low	Mid	High
15	QPSK	1#0	21.09	21.42	21.45	23.15	23.48	23.51
		1#37	21.11	21.41	21.33	23.17	23.47	23.39
		1#74	21.13	21.5	21.23	23.19	23.56	23.29
		36#0	20.12	20.37	20.49	22.18	22.43	22.55
		36#20	20.17	20.37	20.39	22.23	22.43	22.45
		36#39	20.21	20.41	20.3	22.27	22.47	22.36
		75#0	20.17	20.36	20.41	22.23	22.42	22.47
	16QAM	1#0	20.24	20.82	20.95	22.30	22.88	23.01
		1#37	20.3	20.79	20.82	22.36	22.85	22.88
		1#74	20.33	20.9	20.63	22.39	22.96	22.69
		36#0	19.86	20.42	20.32	21.92	22.48	22.38
		36#20	20.03	20.2	20.03	22.09	22.26	22.09
		36#39	20.15	19.97	19.72	22.21	22.03	21.78
		75#0	19.93	20.15	20.05	21.99	22.21	22.11
20	QPSK	1#0	20.84	21.16	21.25	22.90	23.22	23.31
		1#49	20.91	21.2	21.14	22.97	23.26	23.20
		1#99	20.95	21.31	20.98	23.01	23.37	23.04
		50#0	20.07	20.28	20.4	22.13	22.34	22.46
		50#24	20.11	20.24	20.35	22.17	22.30	22.41
		50#50	20.11	20.33	20.22	22.17	22.39	22.28
		100#0	20.09	20.25	20.37	22.15	22.31	22.43
	16QAM	1#0	20.32	20.28	20.73	22.38	22.34	22.79
		1#49	20.39	20.31	20.6	22.45	22.37	22.66
		1#99	20.43	20.4	20.43	22.49	22.46	22.49
		50#0	19.63	20.26	20.47	21.69	22.32	22.53
		50#24	19.91	20.05	20.19	21.97	22.11	22.25
		50#50	20.42	19.9	19.64	22.48	21.96	21.70
		100#0	19.99	20.04	20.21	22.05	22.10	22.27

Note: EIRP (dBm) = Conducted Power(dBm) + Antenna Gain(dBi)

Limit: EIRP≤33dBm

LTE Band 66

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP (dBm)		
			Low	Mid	High	Low	Mid	High
1.4	QPSK	1#0	22.23	21.83	22.09	24.95	24.55	24.81
		1#3	22.22	21.79	22.12	24.94	24.51	24.84
		1#5	22.21	21.80	22.08	24.93	24.52	24.80
		3#0	22.25	21.75	22.08	24.97	24.47	24.80
		3#1	22.21	21.78	22.09	24.93	24.50	24.81
		3#3	22.20	21.77	22.12	24.92	24.49	24.84
		6#0	22.20	21.81	22.11	24.92	24.53	24.83
	16QAM	1#0	22.20	21.81	22.12	24.92	24.53	24.84
		1#3	22.21	21.81	22.11	24.93	24.53	24.83
		1#5	22.21	21.80	22.13	24.93	24.52	24.85
		3#0	22.21	21.75	22.09	24.93	24.47	24.81
		3#1	22.19	21.79	22.12	24.91	24.51	24.84
		3#3	22.24	21.79	22.08	24.96	24.51	24.80
		6#0	22.23	21.79	22.14	24.95	24.51	24.86
3	QPSK	1#0	22.48	21.50	21.32	25.2	0.264	24.04
		1#8	22.46	21.52	21.32	25.18	0.265	24.04
		1#14	22.47	21.51	21.31	25.19	0.265	24.03
		8#0	22.48	21.51	21.31	25.20	0.265	24.03
		8#4	22.48	21.49	21.30	25.20	0.264	24.02
		8#7	22.46	21.51	21.31	25.18	0.265	24.03
		15#0	22.47	21.49	21.32	25.19	0.264	24.04
	16QAM	1#0	22.47	21.50	21.33	25.19	0.264	24.05
		1#8	22.46	21.51	21.32	25.18	0.265	24.04
		1#14	22.47	21.49	21.33	25.19	0.264	24.05
		8#0	22.47	21.51	21.29	25.19	0.265	24.01
		8#4	22.47	21.47	21.33	25.19	0.262	24.05
		8#7	22.44	21.49	21.30	25.16	0.264	24.02
		15#0	22.45	21.51	21.32	25.17	0.265	24.04

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP (dBm)		
			Low	Mid	High	Low	Mid	High
5	QPSK	1#0	22.45	21.46	21.71	25.17	24.18	24.43
		1#12	22.47	21.52	21.67	25.19	24.24	24.39
		1#24	22.44	21.52	21.61	25.16	24.24	24.33
		12#0	22.46	21.45	21.70	25.18	24.17	24.42
		12#7	22.45	21.49	21.65	25.17	24.21	24.37
		12#13	22.45	21.51	21.71	25.17	24.23	24.43
		25#0	22.43	21.51	21.62	25.15	24.23	24.34
	16QAM	1#0	22.47	21.42	21.66	25.19	24.14	24.38
		1#12	22.41	21.51	21.64	25.13	24.23	24.36
		1#24	22.45	21.48	21.63	25.17	24.20	24.35
		12#0	22.47	21.44	21.64	25.19	24.16	24.36
		12#7	22.43	21.45	21.62	25.15	24.17	24.34
		12#13	22.42	21.48	21.70	25.14	24.20	24.42
		25#0	22.42	21.46	21.66	25.14	24.18	24.38
10	QPSK	1#0	21.86	20.98	21.12	24.58	23.70	23.84
		1#25	21.83	20.99	21.14	24.55	23.71	23.86
		1#49	21.85	20.98	21.13	24.57	23.70	23.85
		25#0	21.85	20.98	21.13	24.57	23.70	23.85
		25#12	21.85	21.00	21.15	24.57	23.72	23.87
		25#25	21.84	20.97	21.14	24.56	23.69	23.86
		50#0	21.85	20.99	21.13	24.57	23.71	23.85
	16QAM	1#0	21.83	20.99	21.14	24.55	23.71	23.86
		1#25	21.82	20.97	21.14	24.54	23.69	23.86
		1#49	21.83	20.98	21.14	24.55	23.70	23.86
		25#0	21.83	21.00	21.17	24.55	23.72	23.89
		25#12	21.84	20.99	21.12	24.56	23.71	23.84
		25#25	21.82	20.98	21.13	24.54	23.70	23.85
		50#0	21.84	20.98	21.14	24.56	23.70	23.86

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP (dBm)		
			Low	Mid	High	Low	Mid	High
15	QPSK	1#0	22.34	21.27	22.07	25.06	23.99	24.79
		1#37	22.32	21.26	22.10	25.04	23.98	24.82
		1#74	22.31	21.28	22.10	25.03	24.00	24.82
		36#0	22.30	21.26	22.10	25.02	23.98	24.82
		36#20	22.29	21.27	22.08	25.01	23.99	24.80
		36#39	22.31	21.27	22.09	25.03	23.99	24.81
		75#0	22.30	21.28	22.09	25.02	24.00	24.81
	16QAM	1#0	22.29	21.26	22.08	25.01	23.98	24.80
		1#37	22.30	21.26	22.10	25.02	23.98	24.82
		1#74	22.31	21.27	22.09	25.03	23.99	24.81
		36#0	22.30	21.26	22.09	25.02	23.98	24.81
		36#20	22.27	21.26	22.11	24.99	23.98	24.83
		36#39	22.30	21.23	22.12	25.02	23.95	24.84
		75#0	22.27	21.27	22.14	24.99	23.99	24.86
20	QPSK	1#0	21.68	21.44	22.03	24.40	24.16	24.75
		1#49	21.67	21.43	22.03	24.39	24.15	24.75
		1#99	21.67	21.43	22.04	24.39	24.15	24.76
		50#0	21.66	21.42	22.04	24.38	24.14	24.76
		50#24	21.66	21.42	22.06	24.38	24.14	24.78
		50#50	21.67	21.44	22.05	24.39	24.16	24.77
		100#0	21.66	21.43	22.05	24.38	24.15	24.77
	16QAM	1#0	21.66	21.42	22.04	24.38	24.14	24.76
		1#49	21.66	21.41	22.05	24.38	24.13	24.77
		1#99	21.65	21.42	22.04	24.37	24.14	24.76
		50#0	21.66	21.43	22.06	24.38	24.15	24.78
		50#24	21.68	21.44	22.04	24.40	24.16	24.76
		50#50	21.68	21.43	22.05	24.40	24.15	24.77
		100#0	21.68	21.45	22.03	24.40	24.17	24.75

Note: EIRP(dBm) = Conducted Power(dBm) + Antenna Gain(dBi)
Limit: EIRP≤33dBm

Peak-to-average ratio (PAR): (worst case)

LTE: Please check the APPENDIX E_ Peak-to-average ratio (PAR) for detail.

GPRS/EGPRS 850 Band

Mode	Channel	PAR (dB)	Limit (dB)
GPRS 1slot	Low	4.41	≤ 13
	Middle	4.37	≤ 13
	High	4.25	≤ 13

Mode	Channel	PAR (dB)	Limit (dB)
EGPRS 1slot	Low	4.42	≤ 13
	Middle	5.06	≤ 13
	High	4.55	≤ 13

WCDMA Band V

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (RMC)	Low	5.95	≤ 13
	Middle	6.23	≤ 13
	High	6.09	≤ 13
WCDMA (HSDPA)	Low	6.23	≤ 13
	Middle	6.59	≤ 13
	High	6.82	≤ 13
WCDMA (HSUPA)	Low	6.40	≤ 13
	Middle	6.77	≤ 13
	High	5.98	≤ 13

WCDMA Band IV

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (RMC)	Low	5.73	≤ 13
	Middle	6.22	≤ 13
	High	6.59	≤ 13
WCDMA (HSDPA)	Low	6.03	≤ 13
	Middle	6.74	≤ 13
	High	6.23	≤ 13
WCDMA (HSUPA)	Low	6.11	≤ 13
	Middle	6.59	≤ 13
	High	6.72	≤ 13

PCS 1900

Mode	Channel	PAR (dB)	Limit (dB)
GPRS 1slot	Low	4.87	≤ 13
	Middle	4.61	≤ 13
	High	4.43	≤ 13

Mode	Channel	PAR (dB)	Limit (dB)
EGPRS 1slot	Low	4.32	≤ 13
	Middle	4.55	≤ 13
	High	4.19	≤ 13

WCDMA Band II

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (RMC)	Low	6.33	≤ 13
	Middle	6.25	≤ 13
	High	5.58	≤ 13
WCDMA (HSDPA)	Low	6.55	≤ 13
	Middle	6.78	≤ 13
	High	5.92	≤ 13
WCDMA (HSUPA)	Low	6.42	≤ 13
	Middle	7.03	≤ 13
	High	5.85	≤ 13

OCCUPIED BANDWIDTH**Environmental Conditions & Test Information**

Test Date:	2026-01-04 to 2026-01-13
Temperature:	20-21℃
Relative Humidity:	50-52 %
ATM Pressure:	101.0-102.0 kPa
Test Result:	Pass
Test Engineer:	Hugh Wu

EUT operation mode: Transmitting

LTE: Please check the APPENDIX B_Occupied bandwidth for detail.

GSM 850 Band

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
GPRS (GMSK)	824.2	0.240	0.312
	836.6	0.246	0.319
	848.8	0.247	0.313
EGPRS (8PSK)	824.2	0.254	0.322
	836.6	0.248	0.313
	848.8	0.247	0.317

WCDMA Band V

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA (RMC)	826.4	4.160	4.705
	836.6	4.150	4.745
	846.6	4.150	4.715
WCDMA (HSDPA)	826.4	4.150	4.735
	836.6	4.150	4.735
	846.6	4.160	4.735
WCDMA (HSUPA)	826.4	4.180	4.715
	836.6	4.160	4.705
	846.6	4.140	4.735

PCS 1900

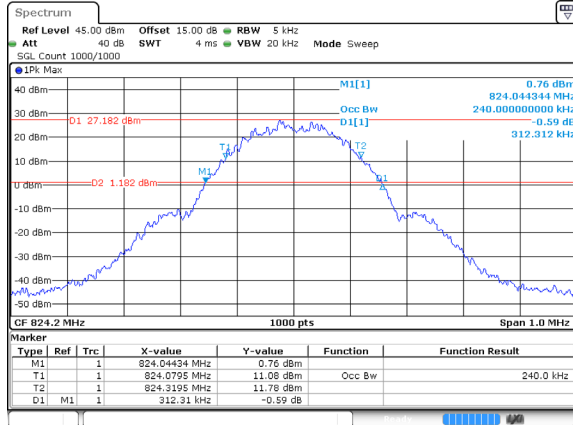
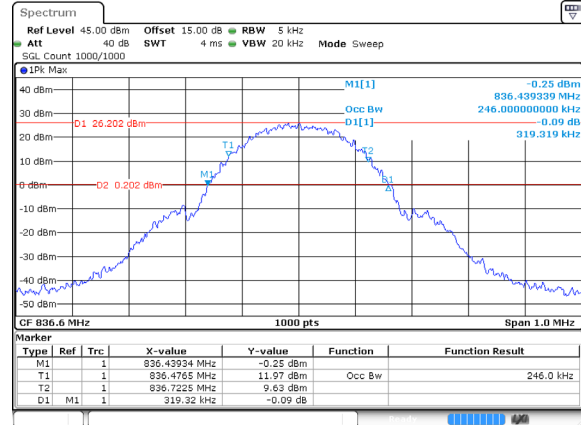
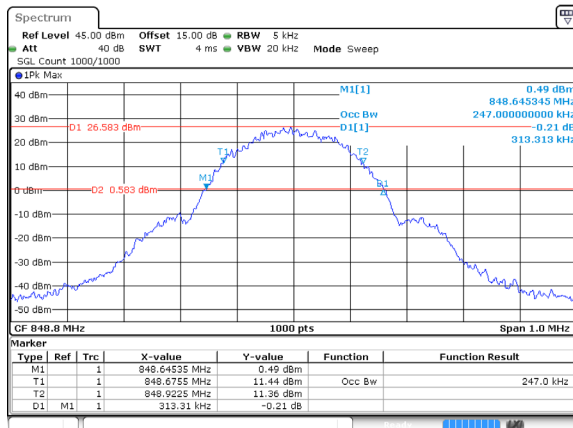
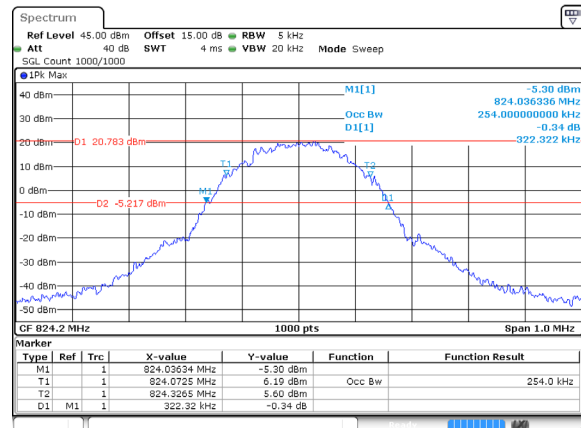
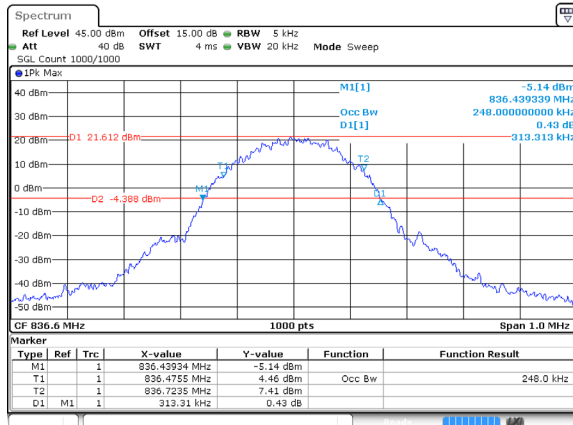
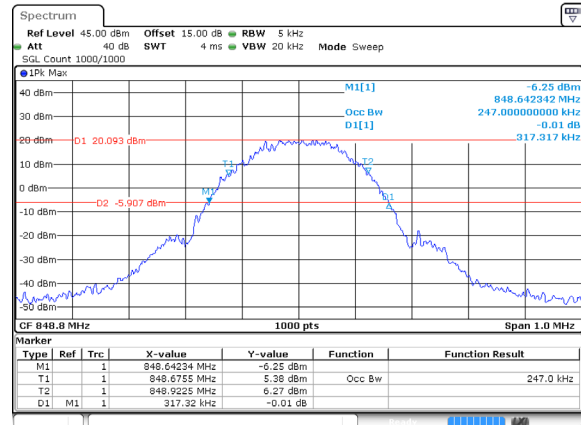
Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
GPRS (GMSK)	1850.2	0.246	0.318
	1880	0.245	0.321
	1909.8	0.244	0.317
EGPRS (8PSK)	1850.2	0.248	0.317
	1880	0.246	0.321
	1909.8	0.246	0.316

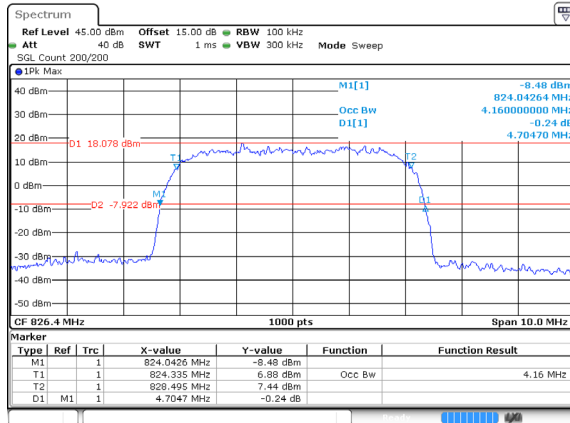
WCDMA Band II

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA (Rel 99)	1852.4	4.180	4.685
	1880	4.180	4.735
	1907.6	4.170	4.715
WCDMA (HSDPA)	1852.4	4.170	4.725
	1880	4.150	4.745
	1907.6	4.140	4.665
WCDMA (HSUPA)	1852.4	4.170	4.705
	1880	4.150	4.745
	1907.6	4.170	4.735

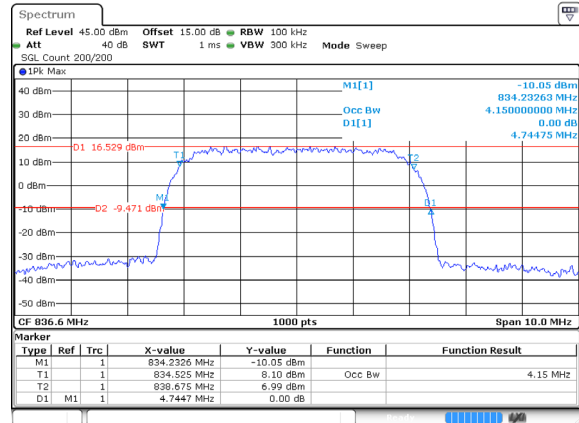
WCDMA Band IV

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA (Rel 99)	1712.4	4.150	4.705
	1732.6	4.170	4.725
	1752.6	4.160	4.735
WCDMA (HSDPA)	1712.4	4.160	4.725
	1732.6	4.180	4.725
	1752.6	4.150	4.735
WCDMA (HSUPA)	1712.4	4.160	4.715
	1732.6	4.190	4.665
	1752.6	4.160	4.715

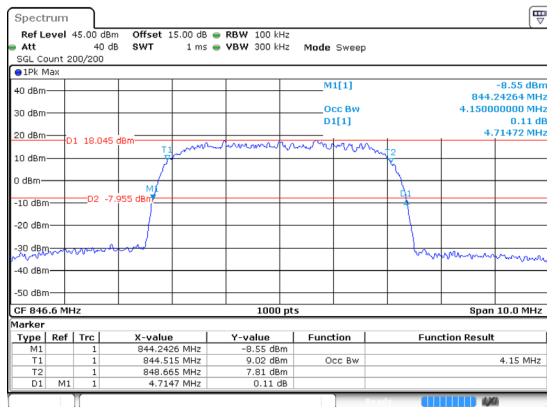
GSM 850 Band99% Occupied & 26 dB Emissions Bandwidth for
GPRS (GMSK) Low channelProjectNo.:RKSA251229001 Tester:Neil Zhou
Date: 5.JAN.2026 11:15:4599% Occupied & 26 dB Emissions Bandwidth for
GPRS (GMSK) Middle channelProjectNo.:RKSA251229001 Tester:Neil Zhou
Date: 5.JAN.2026 11:16:1499% Occupied & 26 dB Emissions Bandwidth for
GPRS (GMSK) High channelProjectNo.:RKSA251229001 Tester:Neil Zhou
Date: 5.JAN.2026 11:16:4499% Occupied & 26 dB Emissions Bandwidth for
EGPRS (8PSK) Low channelProjectNo.:RKSA251229001 Tester:Neil Zhou
Date: 5.JAN.2026 11:17:1499% Occupied & 26 dB Emissions Bandwidth for
EGPRS (8PSK) Middle channelProjectNo.:RKSA251229001 Tester:Neil Zhou
Date: 5.JAN.2026 11:17:4399% Occupied & 26 dB Emissions Bandwidth for
EGPRS (8PSK) High channelProjectNo.:RKSA251229001 Tester:Neil Zhou
Date: 5.JAN.2026 11:18:12

WCDMA Band V**99% Occupied & 26 dB Emissions Bandwidth for WCDMA (Rel 99) Low channel**

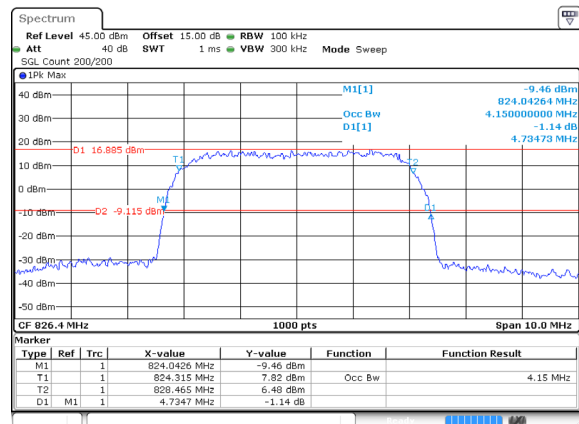
ProjectNo.: RKSA251229001 Tester: Neil Zhou
Date: 5 JAN 2026 11:36:21

99% Occupied & 26 dB Emissions Bandwidth for WCDMA (Rel 99) Middle channel

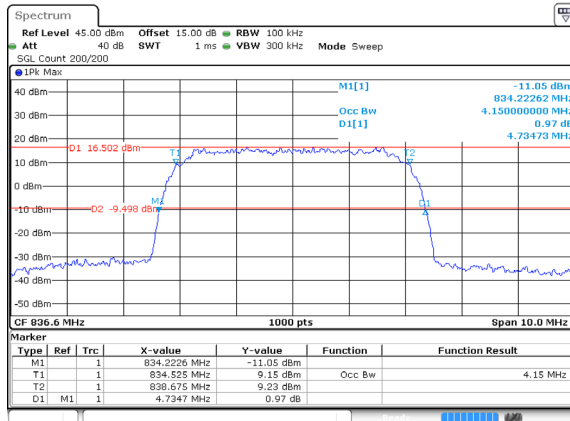
ProjectNo.: RKSA251229001 Tester: Neil Zhou
Date: 5 JAN 2026 11:36:43

99% Occupied & 26 dB Emissions Bandwidth for WCDMA (Rel 99) High channel

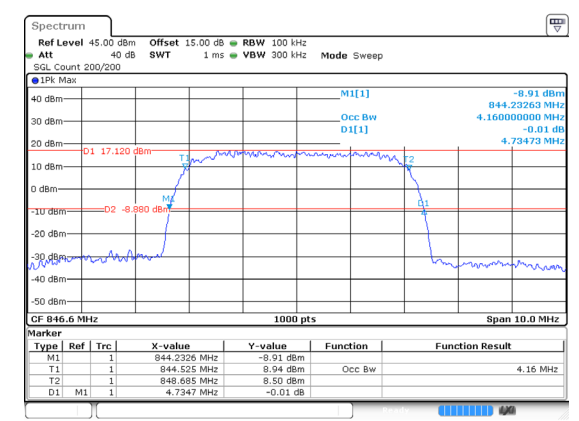
ProjectNo.: RKSA251229001 Tester: Neil Zhou
Date: 5 JAN 2026 11:37:07

99% Occupied & 26 dB Emissions Bandwidth for WCDMA (HSDPA) Low channel

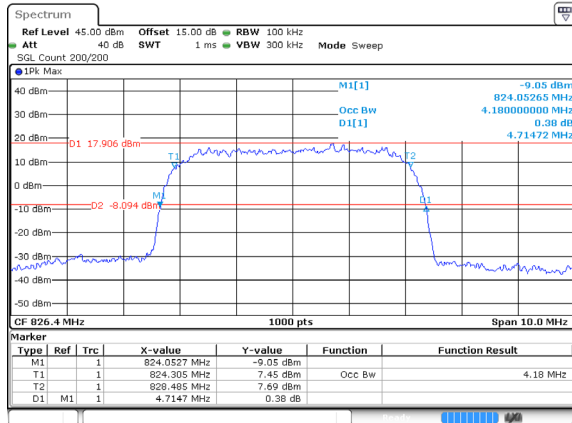
ProjectNo.: RKSA251229001 Tester: Neil Zhou
Date: 5 JAN 2026 11:41:02

99% Occupied & 26 dB Emissions Bandwidth for WCDMA (HSDPA) Middle channel

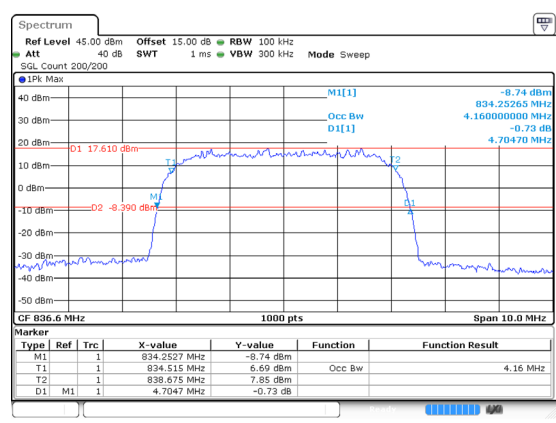
ProjectNo.: RKSA251229001 Tester: Neil Zhou
Date: 5 JAN 2026 11:41:25

99% Occupied & 26 dB Emissions Bandwidth for WCDMA (HSDPA) High channel

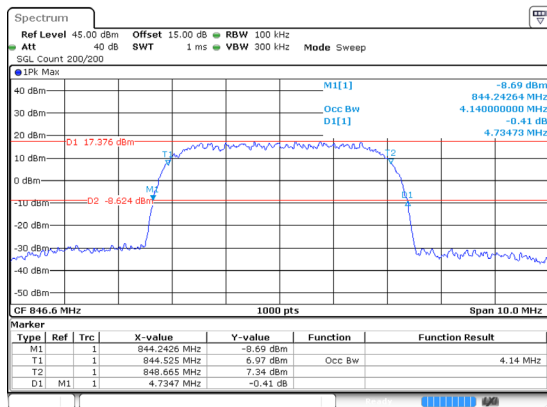
ProjectNo.: RKSA251229001 Tester: Neil Zhou
Date: 5 JAN 2026 11:41:48

99% Occupied & 26 dB Emissions Bandwidth for
WCDMA (HSUPA) Low channel

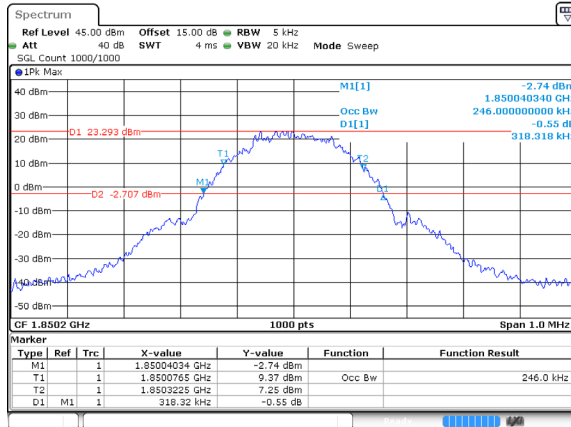
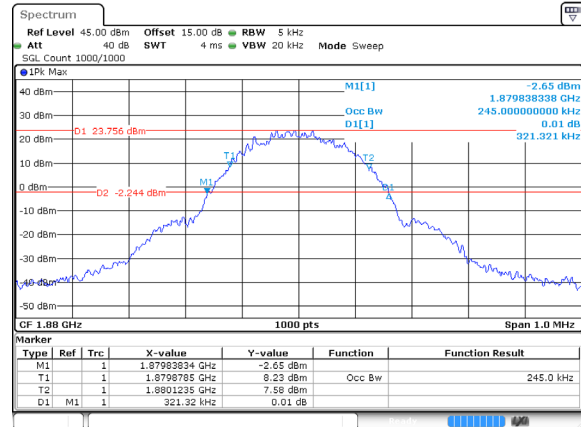
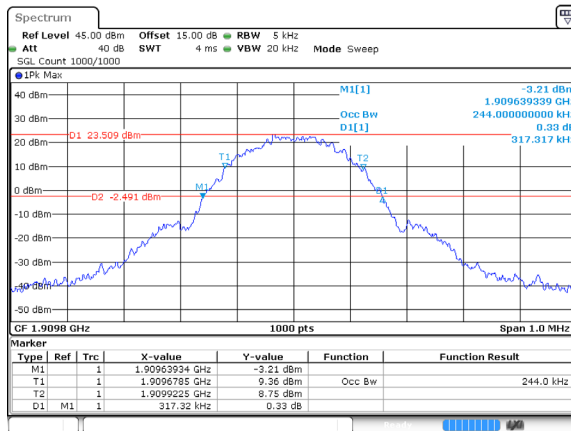
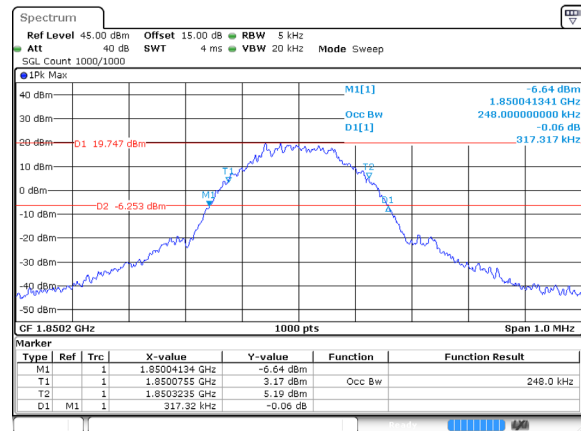
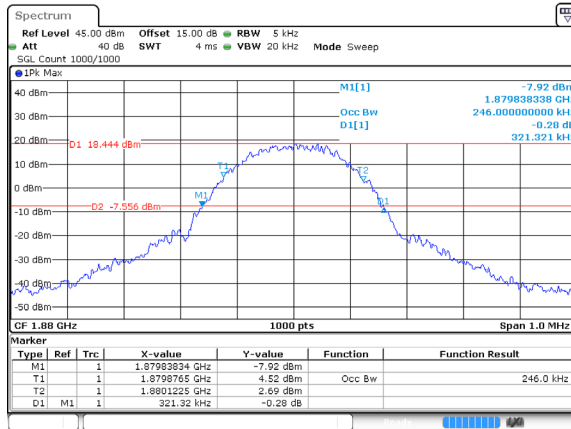
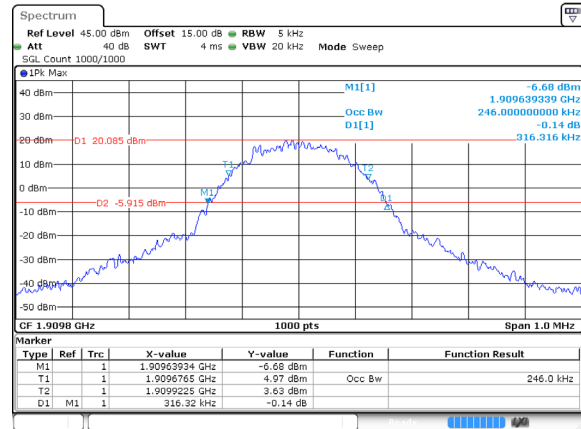
ProjectNo.: RKSA251229001 Tester: Neil Zhou
Date: 5 JAN 2026 11:45:21

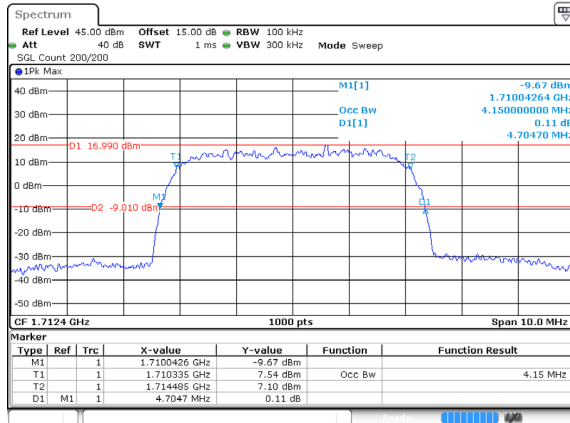
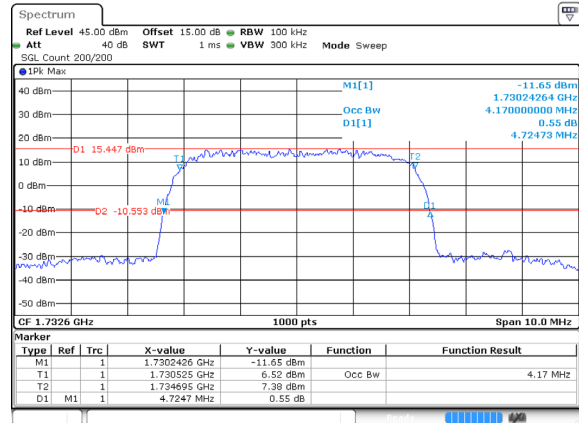
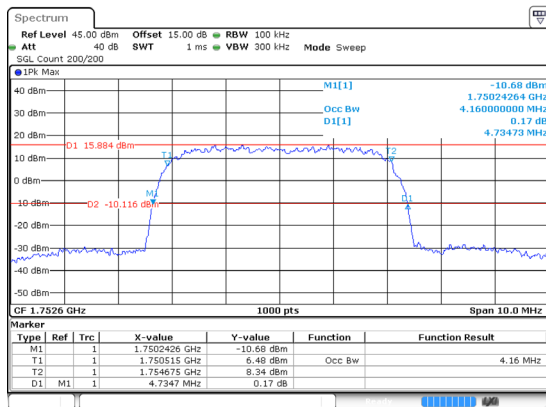
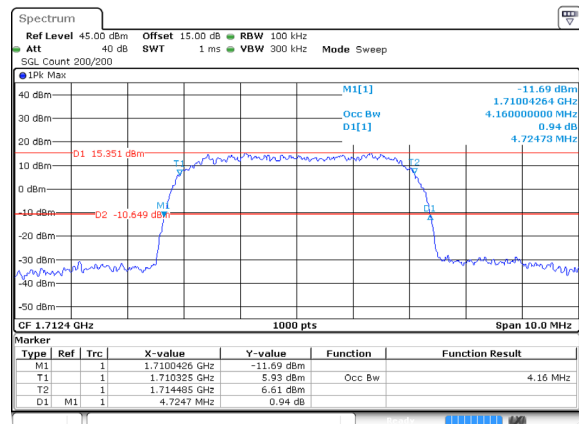
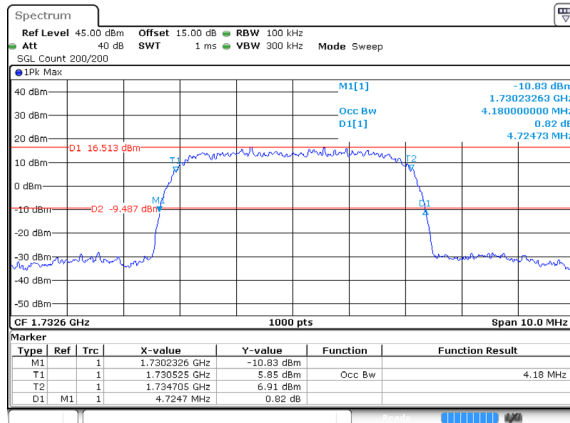
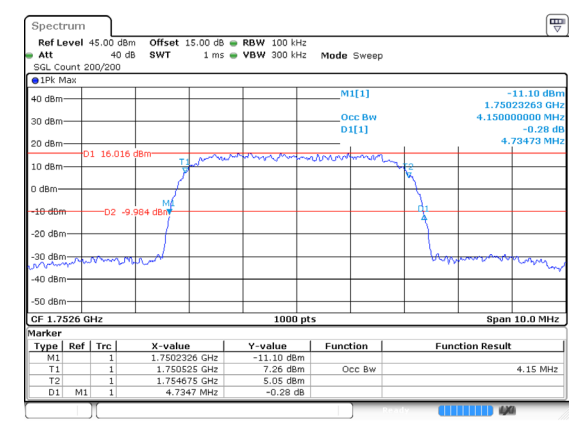
99% Occupied & 26 dB Emissions Bandwidth for
WCDMA (HSUPA) Middle channel

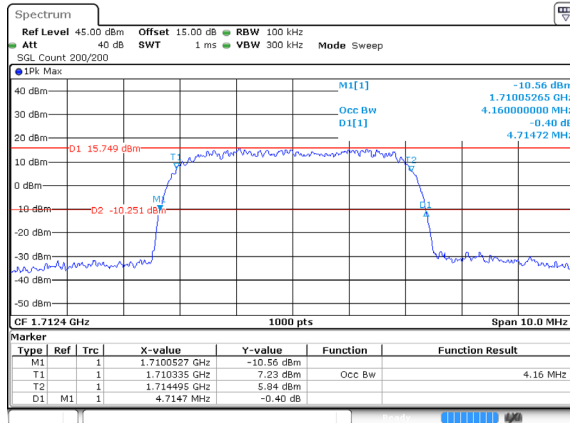
ProjectNo.: RKSA251229001 Tester: Neil Zhou
Date: 5 JAN 2026 11:45:43

99% Occupied & 26 dB Emissions Bandwidth for
WCDMA (HSUPA) High channel

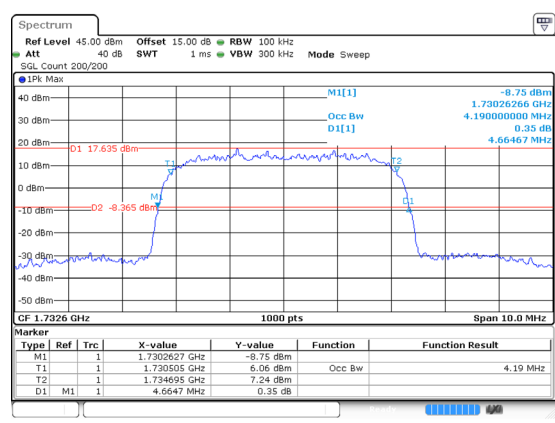
ProjectNo.: RKSA251229001 Tester: Neil Zhou
Date: 5 JAN 2026 11:46:07

PCS 1900 Band**99% Occupied & 26 dB Emissions Bandwidth for
GPRS (GMSK) Low channel**ProjectNo: RKSA251229001 Tester:Neil Zhou
Date: 5 JAN 2026 10:57:58**99% Occupied & 26 dB Emissions Bandwidth for
GPRS (GMSK) Middle channel**ProjectNo: RKSA251229001 Tester:Neil Zhou
Date: 5 JAN 2026 10:58:28**99% Occupied & 26 dB Emissions Bandwidth for
GPRS (GMSK) High channel**ProjectNo: RKSA251229001 Tester:Neil Zhou
Date: 5 JAN 2026 10:58:58**99% Occupied & 26 dB Emissions Bandwidth for
EGPRS (8PSK) Low channel**ProjectNo: RKSA251229001 Tester:Neil Zhou
Date: 5 JAN 2026 10:59:28**99% Occupied & 26 dB Emissions Bandwidth for
EGPRS (8PSK) Middle channel**ProjectNo: RKSA251229001 Tester:Neil Zhou
Date: 5 JAN 2026 10:59:57**99% Occupied & 26 dB Emissions Bandwidth for
EGPRS (8PSK) High channel**ProjectNo: RKSA251229001 Tester:Neil Zhou
Date: 5 JAN 2026 11:00:27

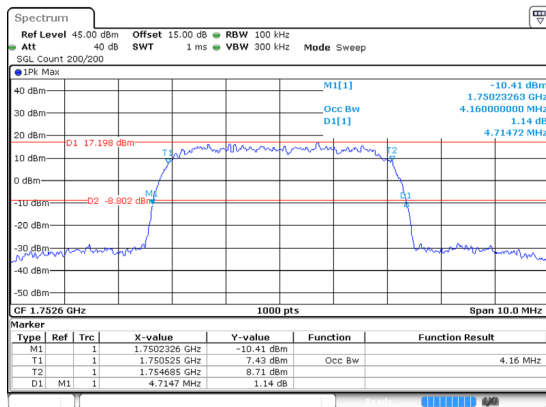
WCDMA Band IV**99% Occupied & 26 dB Emissions Bandwidth for WCDMA (Rel 99) Low channel**ProjectNo: RKSA251229001 Tester:Neil Zhou
Date: 5 JAN 2026 11:35:11**99% Occupied & 26 dB Emissions Bandwidth for WCDMA (Rel 99) Middle channel**ProjectNo: RKSA251229001 Tester:Neil Zhou
Date: 5 JAN 2026 11:35:35**99% Occupied & 26 dB Emissions Bandwidth for WCDMA (Rel 99) High channel**ProjectNo: RKSA251229001 Tester:Neil Zhou
Date: 5 JAN 2026 11:35:57**99% Occupied & 26 dB Emissions Bandwidth for WCDMA (HSDPA) Low channel**ProjectNo: RKSA251229001 Tester:Neil Zhou
Date: 5 JAN 2026 11:39:50**99% Occupied & 26 dB Emissions Bandwidth for WCDMA (HSDPA) Middle channel**ProjectNo: RKSA251229001 Tester:Neil Zhou
Date: 5 JAN 2026 11:40:14**99% Occupied & 26 dB Emissions Bandwidth for WCDMA (HSDPA) High channel**ProjectNo: RKSA251229001 Tester:Neil Zhou
Date: 5 JAN 2026 11:40:36

99% Occupied & 26 dB Emissions Bandwidth for
WCDMA (HSUPA) Low channel

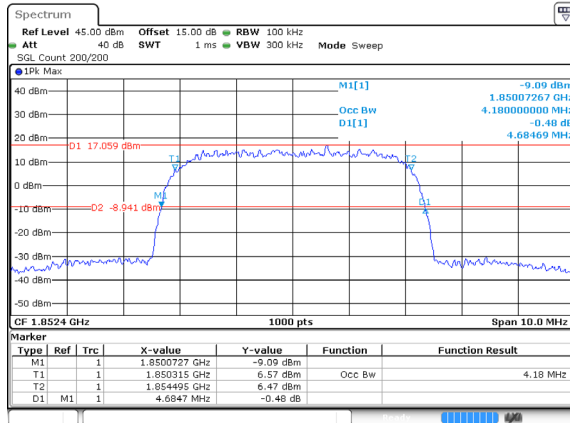
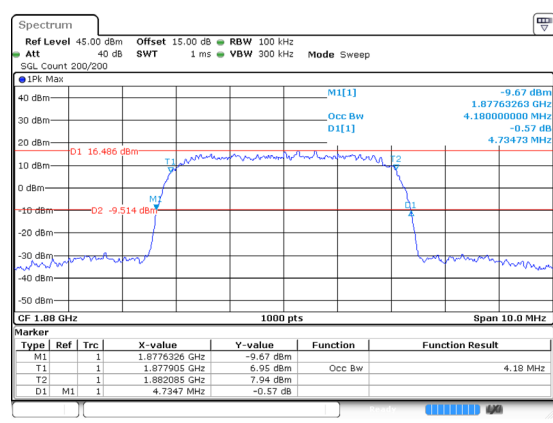
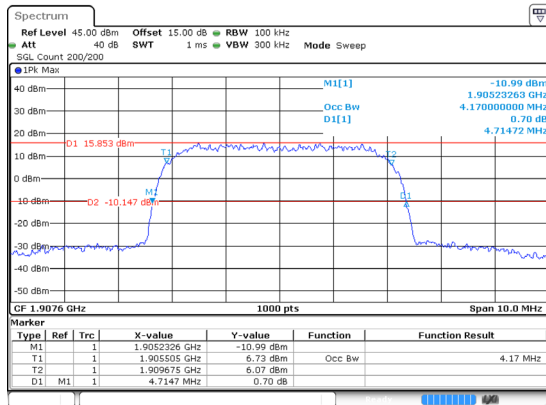
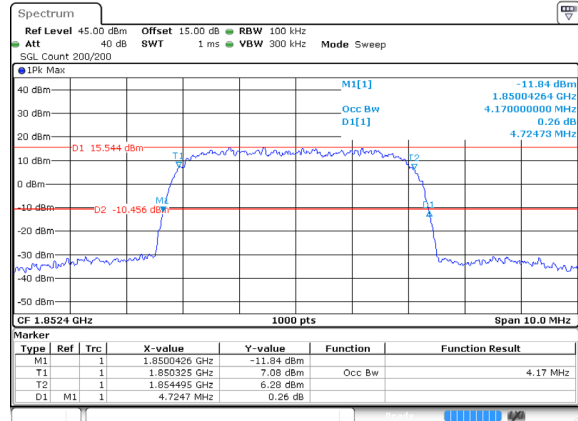
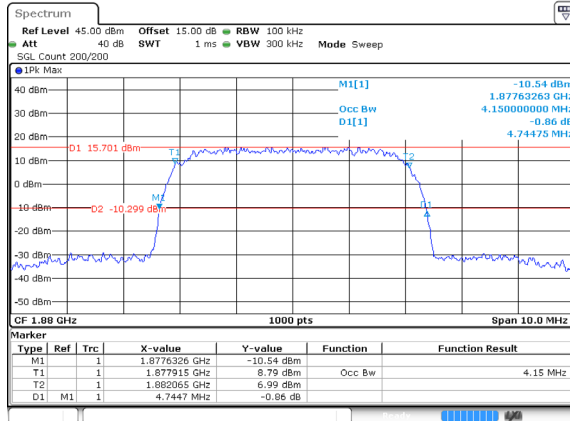
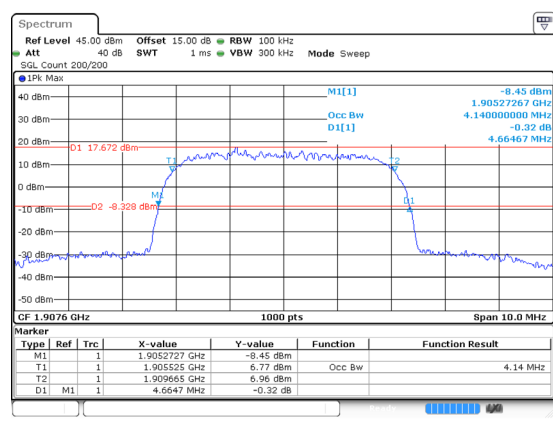
ProjectNo.: RKSA251229001 Tester: Neil Zhou
Date: 5 JAN 2026 11:44:09

99% Occupied & 26 dB Emissions Bandwidth for
WCDMA (HSUPA) Middle channel

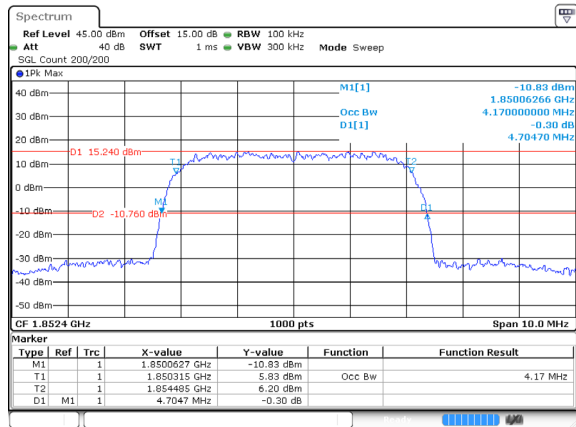
ProjectNo.: RKSA251229001 Tester: Neil Zhou
Date: 5 JAN 2026 11:44:32

99% Occupied & 26 dB Emissions Bandwidth for
WCDMA (HSUPA) High channel

ProjectNo.: RKSA251229001 Tester: Neil Zhou
Date: 5 JAN 2026 11:44:55

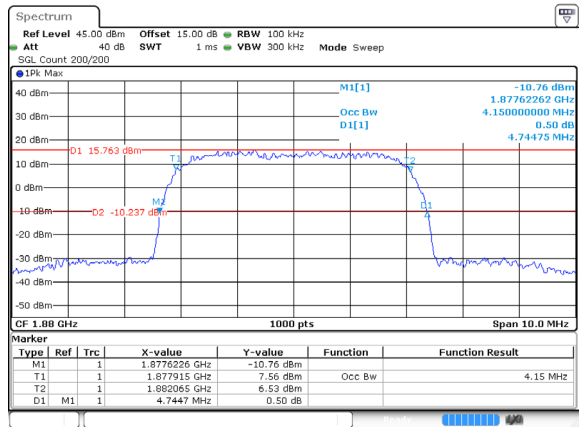
WCDMA Band II**99% Occupied & 26 dB Emissions Bandwidth for WCDMA (Rel 99) Low channel**ProjectNo: RKSA251229001 Tester:Neil Zhou
Date: 5 JAN 2026 11:52:16**99% Occupied & 26 dB Emissions Bandwidth for WCDMA (Rel 99) Middle channel**ProjectNo: RKSA251229001 Tester:Neil Zhou
Date: 5 JAN 2026 11:52:38**99% Occupied & 26 dB Emissions Bandwidth for WCDMA (Rel 99) High channel**ProjectNo: RKSA251229001 Tester:Neil Zhou
Date: 5 JAN 2026 11:43:43**99% Occupied & 26 dB Emissions Bandwidth for WCDMA (HSDPA) Low channel**ProjectNo: RKSA251229001 Tester:Neil Zhou
Date: 5 JAN 2026 11:38:39**99% Occupied & 26 dB Emissions Bandwidth for WCDMA (HSDPA) Middle channel**ProjectNo: RKSA251229001 Tester:Neil Zhou
Date: 5 JAN 2026 11:39:01**99% Occupied & 26 dB Emissions Bandwidth for WCDMA (HSDPA) High channel**ProjectNo: RKSA251229001 Tester:Neil Zhou
Date: 5 JAN 2026 11:34:49

99% Occupied & 26 dB Emissions Bandwidth for WCDMA (HSUPA) Low channel



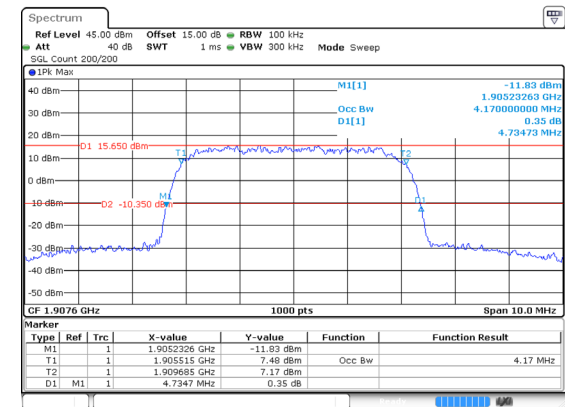
ProjectNo.:RKSA251229001 Tester:Neil Zhou
Date: 5 JAN 2026 11:42:58

99% Occupied & 26 dB Emissions Bandwidth for WCDMA (HSUPA) Middle channel



ProjectNo.:RKSA251229001 Tester:Neil Zhou
Date: 5 JAN 2026 11:34:25

99% Occupied & 26 dB Emissions Bandwidth for WCDMA (HSUPA) High channel



ProjectNo.:RKSA251229001 Tester:Neil Zhou
Date: 5 JAN 2026 11:39:25

SPURIOUS EMISSIONS AT ANTENNA TERMINALS**Environmental Conditions & Test Information**

Test Date:	2026-01-04 to 2026-03-02
Temperature:	20-21°C
Relative Humidity:	50-52 %
ATM Pressure:	101.0-102.0 kPa
Test Result:	Pass
Test Engineer:	Hugh Wu

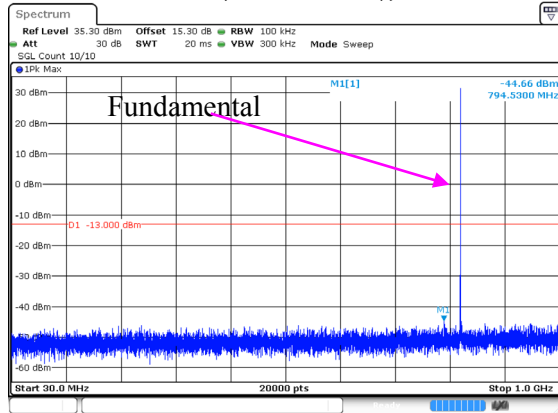
EUT operation mode: Transmitting

Test Result: Compliance

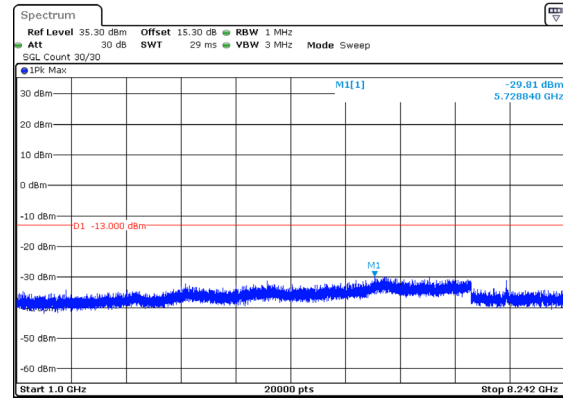
LTE: Please check the APPENDIX D_TX spurious for detail.

GSM 850 Band:

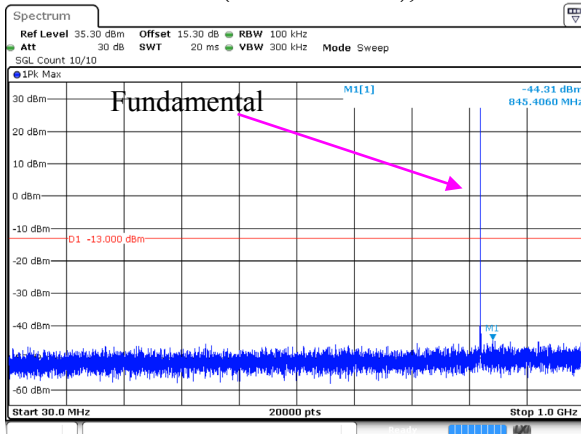
30 MHz – 1GHz (GPRS Mode), Low channel

ProjectNo.: RKSA251229001 Tester: Neil Zhou
Date: 5 JAN 2026 11:18:55

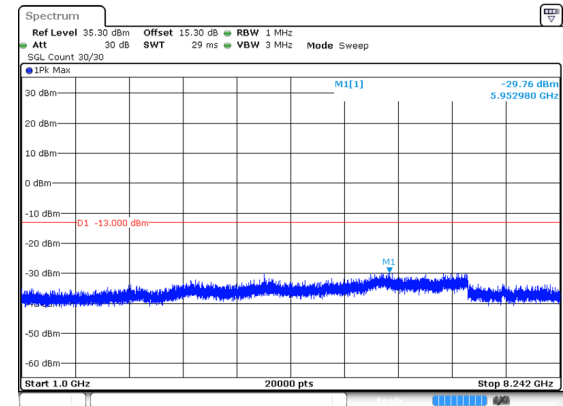
1 GHz – 8.242 GHz (GPRS Mode), Low channel

ProjectNo.: RKSA251229001 Tester: Neil Zhou
Date: 5 JAN 2026 11:19:02

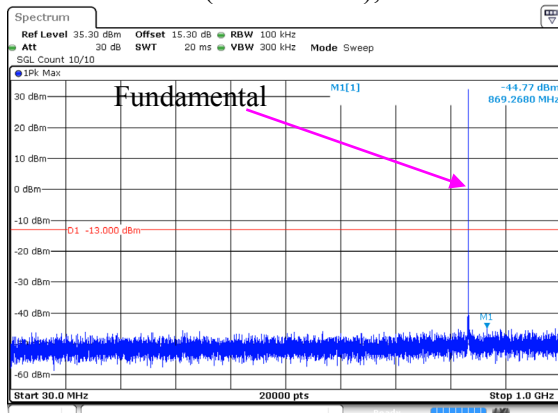
30 MHz – 1GHz (EGPRS Mode), Low channel

ProjectNo.: RKSA251229001 Tester: Neil Zhou
Date: 2 MAR 2026 16:36:34

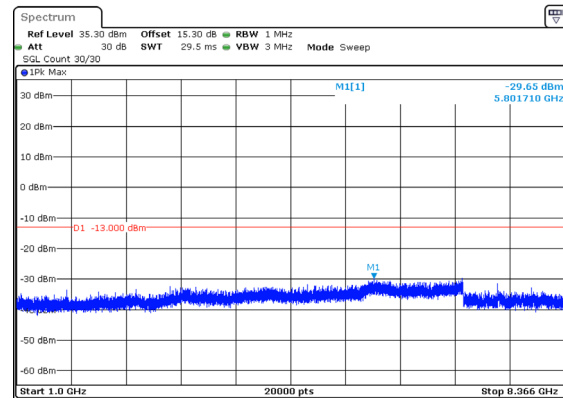
1 GHz – 8.242 GHz (EGPRS Mode), Low channel

ProjectNo.: RKSA251229001 Tester: Neil Zhou
Date: 5 JAN 2026 11:20:27

30 MHz – 1GHz (GPRS Mode), Middle channel

ProjectNo.: RKSA251229001 Tester: Neil Zhou
Date: 2 MAR 2026 16:32:04

1 GHz – 8.366 GHz (GPRS Mode), Middle channel

ProjectNo.: RKSA251229001 Tester: Neil Zhou
Date: 5 JAN 2026 11:19:30