

SPECIFICATION

Shenzhen Guandetong Electronic Limited



Shenzhen Guandetong Electronic Co., Ltd.

2.4G/5.8G 5DB white antenna with SMA female

Product Specification

connection		frequency range	2400-2500MHz 5200-5800MHZ
Frequency band wire name		edition	A1
Customer part number		<i>Guandetong</i> part number	
Guandeton g No			
R F design		RF Manager	
Structural design		Structure Manager	
Technical Director		Date	2024-3-4

Customer confirmation:

Does the assembly meet your company's requirements: ☐OK ☐NG

catalogue

Cover	1
catalogue.....	2
1、Product pictures	3
2、Product parameters	3
3、S11(VSWR、Return、Smith)	4
4、Structural drawings.....	4
5、Antenna gain and Apple plot	5
6、Environmental performance test.....	6

Confidentiality requirements of Shenzhen Guanditong Electronic Co. , Ltd. . The company has proprietary technology to provide the information, which should be strictly confidential, it shall not be disclosed to any person or company without the prior written consent of Shenzhen Guanditong Electronic Co. , Ltd. .

1、 Product pictures



2、 Product parameters

Product testing parameters			
Product name	2.4/5.8G 5DB antenna	(Model Type)	GDT-P2.4-5.8
(Electrical Specifications)			
(Frenquency Range)	2400-2500MHz 5200-5800MHZ	(Polarization)	perpendicular
(Impedance)	50 ohm	Radiation	Omnidirectional
(VSWR)	≦2.0	(Power)	50W
(Gain)	0.04-5.4dBi	(Bandwidth	100M
(Mechanical Specifications)			
(Dimensions)	195mm±0.3mm	(Chassis Color)	white
(Connector)	SMA plug	(Chassis Material)	ABS+TPE
(Working Temperature)	-40℃-+85℃	(Limit Temperature)	-40℃-+85℃

Address: 3/F, Tower D, Huanguan Nanmaoyuan Industrial Park, Guanhu Street,
Longhua District, Shenzhen. Tel: 0755-88298396 fax: 0755-89733896


<http://www.szgdtrf.com>

Confidentiality requirements of Shenzhen Guanditong Electronic Co., Ltd.. The company has proprietary technology to provide the information, which should be strictly confidential, it shall not be disclosed to any person or company without the prior written consent of Shenzhen Guanditong Electronic Co., Ltd..

3、S11(VSWR、Return、Smith)



4、Structural drawings

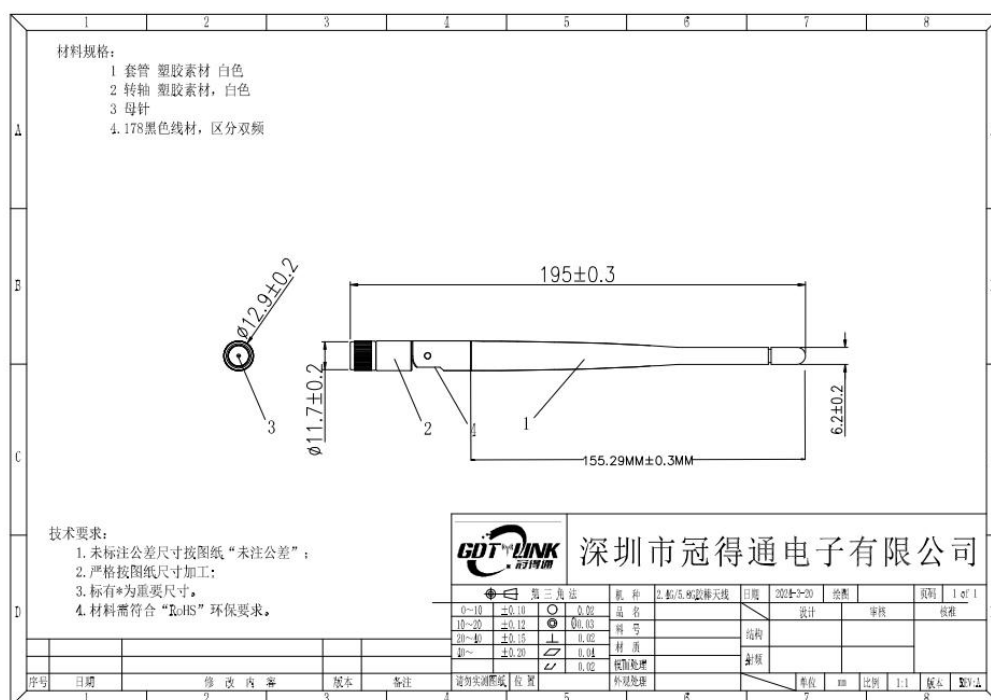


Address: 3/F, Tower D, Huanguan Nanmaoyuan Industrial Park, Guanhu Street, Longhua District, Shenzhen. Tel: 0755-88298396 fax: 0755-89733896

<http://www.szgdtrf.com>

Confidentiality requirements of Shenzhen Guanditong Electronic Co. , Ltd. . The company has proprietary technology to provide the information, which should be strictly confidential, it shall not be disclosed to any person or company without the prior written consent of Shenzhen Guanditong Electronic Co. , Ltd. .

5. Antenna gain and Apple plot


Test Point ID	Freq. (MHz)	TRP (dBm)	Gain (dBi)	Directivity (dBi)	Efficiency (%)	Efficiency (dB)	Max (dBm)	Theta of Max	Phi of Max	Min (dBm)	Theta of Min	Phi of Min	AVG (dBm)	Max/Min (dB)	Max/AVG (dB)	Min/AVG (dB)
1	2400.0	2400.00	1.67	5.87	38.0%	-4.20	1.67	9000	16680	-95.99	0	0	-5.04	97.66	6.70	-90.95
2	2410.0	2410.00	1.97	6.17	38.0%	-4.20	1.97	9000	16680	-95.99	0	0	-4.84	97.96	6.81	-91.15
3	2420.0	2420.00	2.35	6.47	38.8%	-4.11	2.35	9000	16680	-95.99	0	0	-4.52	98.34	6.87	-91.47
4	2430.0	2430.00	2.95	6.73	41.8%	-3.78	2.95	9000	16680	-95.99	0	0	-4.05	98.93	7.00	-91.94
5	2440.0	2440.00	2.81	6.71	40.8%	-3.90	2.81	9000	16680	-95.99	0	0	-4.25	98.80	7.06	-91.74
6	2450.0	2450.00	2.73	6.72	39.9%	-3.99	2.73	9000	16680	-95.99	0	0	-4.37	98.72	7.09	-91.62
7	2460.0	2460.00	2.91	6.80	40.8%	-3.89	2.91	9000	6000	-95.99	0	0	-4.30	98.89	7.20	-91.69
8	2470.0	2470.00	3.01	6.78	42.0%	-3.77	3.01	9000	6000	-95.99	0	0	-4.40	99.00	7.41	-91.59
9	2480.0	2480.00	2.94	6.63	42.8%	-3.69	2.94	9000	6000	-95.99	0	0	-4.71	98.93	7.65	-91.28
10	2490.0	2490.00	3.05	6.76	42.5%	-3.71	3.05	9000	6000	-95.99	0	0	-4.81	99.04	7.85	-91.18
11	2500.0	2500.00	3.09	6.78	42.7%	-3.69	3.09	9000	6000	-95.99	0	0	-4.84	99.07	7.92	-91.15
12	5100.0	5100.00	0.23	7.41	19.1%	-7.19	0.23	7500	1500	-95.99	0	0	-7.35	96.22	7.57	-88.64
13	5120.0	5120.00	0.11	7.49	18.3%	-7.38	0.11	7500	1500	-95.99	0	0	-7.73	96.10	7.84	-88.26
14	5140.0	5140.00	1.10	7.36	23.7%	-6.26	1.10	7500	1500	-95.99	0	0	-6.56	97.09	7.66	-89.43
15	5160.0	5160.00	0.92	7.06	24.3%	-6.15	0.92	7500	1500	-95.99	0	0	-6.68	96.91	7.60	-89.31
16	5180.0	5180.00	0.96	6.88	25.6%	-5.92	0.96	7500	1500	-95.99	0	0	-6.55	96.95	7.51	-89.44
17	5200.0	5200.00	1.11	6.74	27.4%	-5.63	1.11	7500	1500	-95.99	0	0	-6.64	97.10	7.75	-89.35
18	5220.0	5220.00	0.04	6.24	24.0%	-6.20	0.04	7500	1500	-95.99	0	0	-7.38	96.03	7.41	-88.61
19	5240.0	5240.00	0.99	6.75	26.6%	-5.76	0.99	7500	1500	-95.99	0	0	-6.86	96.98	7.85	-89.13
20	5260.0	5260.00	1.10	7.11	25.1%	-6.01	1.10	7500	1500	-95.99	0	0	-6.78	97.08	7.87	-89.21
21	5280.0	5280.00	1.41	6.28	32.6%	-4.87	1.41	7500	1500	-95.99	0	0	-5.57	97.40	6.98	-90.42
22	5300.0	5300.00	2.17	6.36	38.1%	-4.20	2.17	10500	1500	-95.99	0	0	-4.85	98.16	7.02	-91.14
23	5320.0	5320.00	2.68	6.02	46.4%	-3.33	2.68	9000	10500	-95.99	0	0	-4.33	98.67	7.01	-91.66
24	5340.0	5340.00	2.55	5.69	48.5%	-3.15	2.55	9000	10500	-95.99	0	0	-4.04	98.54	6.58	-91.95
25	5360.0	5360.00	2.73	5.74	50.1%	-3.01	2.73	9000	10500	-95.99	0	0	-3.85	98.72	6.58	-92.14
26	5380.0	5380.00	2.44	5.68	47.4%	-3.24	2.44	7500	1500	-95.99	0	0	-3.88	98.43	6.32	-92.11
27	5400.0	5400.00	2.55	6.33	41.9%	-3.78	2.55	9000	10500	-95.99	0	0	-4.33	98.54	6.88	-91.65
28	5420.0	5420.00	2.66	6.59	40.4%	-3.93	2.66	4500	3000	-95.99	0	0	-4.16	98.65	6.82	-91.83
29	5440.0	5440.00	3.27	7.01	42.2%	-3.75	3.27	4500	3000	-95.99	0	0	-3.88	99.26	7.15	-92.11
30	5460.0	5460.00	3.67	7.51	41.3%	-3.84	3.67	4500	3000	-95.99	0	0	-3.90	99.66	7.57	-92.09
31	5480.0	5480.00	3.67	7.35	42.9%	-3.68	3.67	4500	3000	-95.99	0	0	-3.98	99.66	7.65	-92.01
32	5500.0	5500.00	4.80	7.55	53.0%	-2.76	4.80	4500	3000	-95.99	0	0	-3.13	100.78	7.93	-92.86
33	5520.0	5520.00	4.39	6.91	56.0%	-2.52	4.39	4500	3000	-95.99	0	0	-3.11	100.38	7.50	-92.88
34	5540.0	5540.00	3.87	7.10	47.6%	-3.22	3.87	4500	3000	-95.99	0	0	-3.96	99.86	7.83	-92.03
35	5560.0	5560.00	3.71	6.96	47.4%	-3.24	3.71	4500	3000	-95.99	0	0	-4.06	99.70	7.78	-91.93
36	5580.0	5580.00	3.58	6.71	48.6%	-3.13	3.58	4500	3000	-95.99	0	0	-3.85	99.57	7.43	-92.14
37	5600.0	5600.00	3.88	6.93	49.6%	-3.05	3.88	4500	3000	-95.99	0	0	-3.98	99.87	7.86	-92.01
38	5620.0	5620.00	2.64	5.92	46.9%	-3.29	2.64	7500	1500	-95.99	0	0	-4.02	98.63	6.66	-91.97
39	5640.0	5640.00	3.87	6.73	51.7%	-2.87	3.87	7500	1500	-95.99	0	0	-3.59	99.86	7.46	-92.40
40	5660.0	5660.00	3.83	6.36	55.8%	-2.54	3.83	6000	1500	-95.99	0	0	-3.39	99.82	7.22	-92.60
41	5680.0	5680.00	4.67	6.57	64.5%	-1.90	4.67	12000	7500	-95.99	0	0	-3.00	100.66	7.67	-92.99
42	5700.0	5700.00	5.40	7.57	60.6%	-2.17	5.40	12000	6000	-95.99	0	0	-3.06	101.39	8.45	-92.93
43	5720.0	5720.00	4.89	7.02	61.2%	-2.13	4.89	12000	6000	-95.99	0	0	-2.86	100.88	7.75	-93.13
44	5740.0	5740.00	4.26	6.63	57.9%	-2.37	4.26	12000	1500	-95.99	0	0	-3.24	100.25	7.49	-92.75
45	5760.0	5760.00	3.86	6.41	55.6%	-2.55	3.86	12000	6000	-95.99	0	0	-3.38	99.85	7.24	-92.61
46	5780.0	5780.00	3.30	5.96	54.1%	-2.67	3.30	9000	7500	-95.99	0	0	-3.55	99.29	6.85	-92.44
47	5800.0	5800.00	2.80	6.09	46.9%	-3.29	2.80	12000	1500	-95.99	0	0	-4.49	98.79	7.29	-91.50

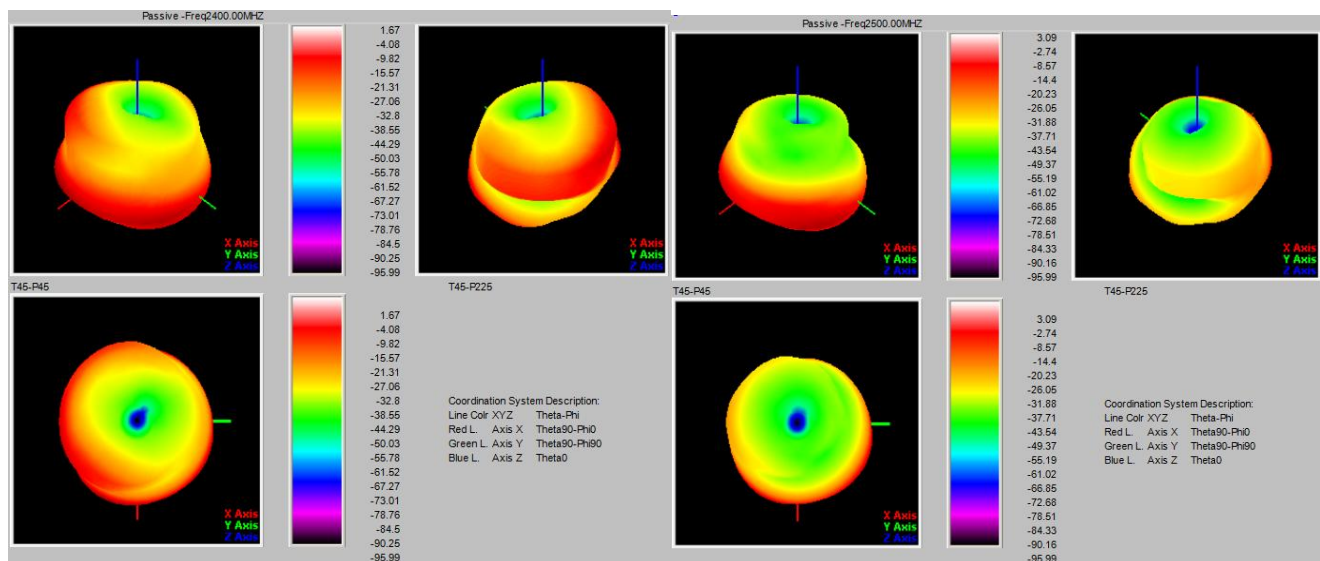

Address: 3/F, Tower D, Huanguan Nanmaoyuan Industrial Park, Guanhu Street,
Longhua District, Shenzhen. Tel: 0755-88298396 fax: 0755-89733896

<http://www.szgdtrf.com>

Confidentiality requirements of Shenzhen Guanditong Electronic Co. , Ltd. . The company has proprietary technology to provide the information, which should be strictly confidential, it shall not be disclosed to any person or company without the prior written consent of Shenzhen Guanditong Electronic Co. , Ltd. .

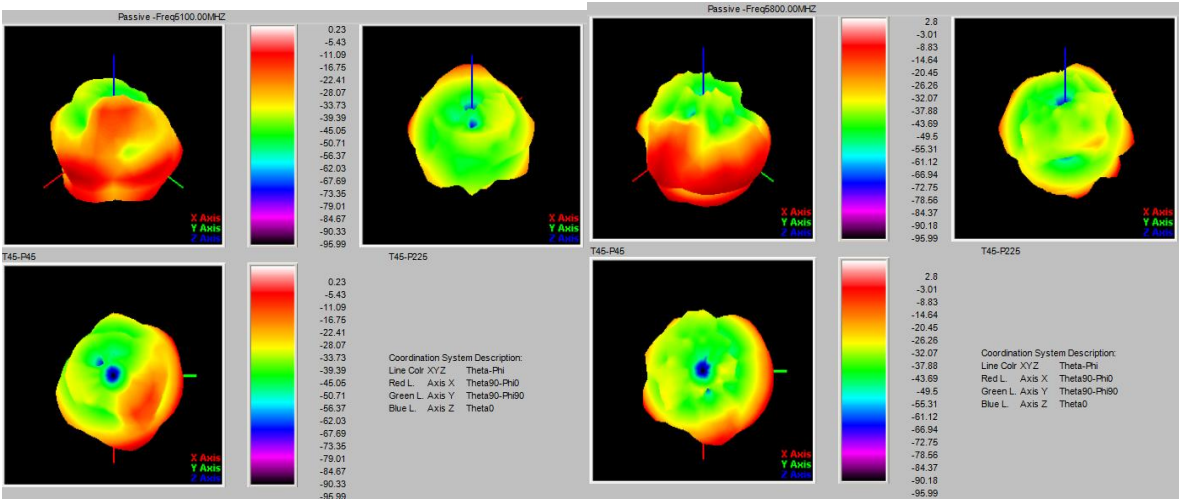

6、 Environmental performance test

project	Project test conditions	Specifications
Storage environment	The test temperature, humidity and air pressure are as follows when there is no specific condition: 1. The temperature is - 30 °C~+80 °C 2. Relative humidity: 45% - 85% 3. The air pressure is 86kpa-106kpa	Normal electrical and mechanical performance
High and low temperature test	5 cycles between 70 ° C and 40 ° C, then under normal conditions1-2H, check the appearance quality.	The size shall meet the requirements and Mechanical and electrical performance
Constant damp heat resistance test	Relative humidity: 95 ± 3%, test temperature: 40 °C. After lasting for 2h, The electrical performance shall be measured within 5 minutes after the test object is taken out, and the test object shall be within the normal range Part 1-2H, check the appearance quality	The size shall meet the requirements and Mechanical and electrical performance
vibration test	Vibration frequency range: 10-55HZ, displacement amplitude: 0.35MM, acceleration amplitude: 50.0M/s, frequency sweep cycles: 30 times	Normal electrical and mechanical performance
Drop test	Free fall for 3 times in the direction of mutually perpendicular axes at a height of 1M	Normal electrical and mechanical performance

Address: 3/F, Tower D, Huanguan Nanmaoyuan Industrial Park, Guanhu Street, Longhua District, Shenzhen. Tel: 0755-88298396 fax: 0755-89733896

<http://www.szgdtrf.com>