

FCC Part 15E Measurement and Test Report

For

ShenZhen Foscam Intelligent Technology Co., Limited

9/F, Block F5, TCL International E City, No.1001 ZhongShanyuan Rd.,

NanShan District, Shenzhen, China,

FCC ID: ZDEFI9926P

FCC Rule(s): FCC Part 15.407

Product Description: Optical Zoom PTZ IP Camera

Tested Model: FI9926P

Report No.: STRD1809012I-1

Sample Receipt Date: 2018-09-12

Tested Date: 2018-09-13 to 2018-10-16

Issued Date: 2018-10-17

Tested By: Mike Shi/ Engineer

Mike Shi

Reviewed By: Silin Chen / EMC Manager

Silin Chen

Approved & Authorized By: Jandy So / PSQ Manager

Jandy So

Prepared By:

Shenzhen SEM Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,

Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	4
1.4 TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING	4
1.5 EUT OPERATING DURING TEST	5
1.6 TEST FACILITY	5
1.7 EUT SETUP AND TEST MODE.....	6
1.8 MEASUREMENT UNCERTAINTY	7
1.9 TEST EQUIPMENT LIST AND DETAILS	8
2. SUMMARY OF TEST RESULTS	9
3. RF EXPOSURE	10
3.1 STANDARD APPLICABLE.....	10
3.2 TEST RESULT.....	10
4. ANTENNA REQUIREMENT	11
4.1 STANDARD APPLICABLE.....	11
4.2 EVALUATION INFORMATION	11
5. CONDUCTED EMISSIONS	12
5.1 TEST PROCEDURE.....	12
5.2 BASIC TEST SETUP BLOCK DIAGRAM.....	12
5.3 TEST RECEIVER SETUP	12
5.4 SUMMARY OF TEST RESULTS/PLOTS	12
6. POWER SPECTRAL DENSITY	15
6.1 STANDARD APPLICABLE.....	15
6.2 TEST PROCEDURE.....	15
6.3 SUMMARY OF TEST RESULTS/PLOTS	16
7. EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH.....	25
7.1 STANDARD APPLICABLE.....	25
7.2 TEST PROCEDURE.....	25
7.3 SUMMARY OF TEST RESULTS/PLOTS	27
8. MAXIMUM CONDUCTED OUTPUT POWER.....	36
8.1 STANDARD APPLICABLE.....	36
8.2 TEST PROCEDURE.....	36
8.3 SUMMARY OF TEST RESULTS/PLOTS	37
9. RADIATED SPURIOUS EMISSIONS.....	46
9.1 STANDARD APPLICABLE.....	46
9.2 TEST PROCEDURE.....	46
9.3 TEST RECEIVER SETUP	47
9.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	47
9.5 SUMMARY OF TEST RESULTS/PLOTS	47
10. FREQUENCY STABILITY	64
10.1 STANDARD APPLICABLE.....	64
10.2 TEST PROCEDURE.....	64
10.3 SUMMARY OF TEST RESULTS/PLOTS	64

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: ShenZhen Foscam Intelligent Technology Co., Limited
Address of applicant: 9/F, Block F5, TCL International E City, No.1001
ZhongShanyuan Rd., NanShan District, Shenzhen, China,

Manufacturer: ShenZhen Foscam Intelligent Technology Co., Limited
Address of manufacturer: 9/F, Block F5, TCL International E City, No.1001
ZhongShanyuan Rd., NanShan District, Shenzhen, China,

General Description of EUT	
Product Name:	Optical Zoom PTZ IP Camera
Brand Name:	FOSCAM
Model No.:	FI9926P
Adding Model(s):	R2 Plus、R2 Plus VX、Z2、Z2 VX、FI9926P、FI9926P VX、R2P、R2P VX、R4 Plus、R4 Plus VX、R4P、R4P VX (Note “VX” represent the software version ,which “X” can be from 0 to 9)
Rated Voltage:	DC5V
Battery Capacity:	/
Power Adapter:	Model:SAW12F-050-2000U INPUT:AC110~240V AC 50/60Hz 0.5A OUTPUT:DC5V,2A
Software Version:	1.11.1.13-2.71.1.64
Hardware Version:	FI9926P_MAIN_1V2
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model FI9926P, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11a, 802.11n(HT20) , 802.11n-HT40, 802.11ac-VH80
Frequency Range:	5150-5250MHz, 5725-5850MHz
RF Output Power:	9.80dBm (Conducted)
Type of Modulation:	QPSK, 16QAM, 64QAM
Data Rate:	6-54Mbps, up to 200Mbps
Quantity of Channels:	15
Type of Antenna:	External Antenna
Antenna Gain:	2dBi

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.407: General technical requirements.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

KDB789033 D02 v02r01: GUIDELINES FOR COMPLIANCE TESTING OF UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII) DEVICES PART 15, SUBPART E

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB789033 D02 v02r01. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Table for parameters of Test Software setting

Enter “3646631+=” into the calculator to enter the engineer mode, you can start to test. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Mode	Test Frequency (MHz)												
	NCB: 20MHz												
	5180	5200	5240	5260	5300	5320	5500	5580	5700	5720	5745	5785	5825
802.11a 6Mbps	10	10	10								10	10	10
802.11n-HT20 MCS0	10	10	10								10	10	10
Mode	NCB: 40MHz												
	5190	5230	5270	5310	5510	5550	5670	5710	5755	5795			
802.11n-HT40 MCS0	10	10							10	10			
Mode	NCB: 80MHz												
	5210		5290		5530		5610		5690		5775		
802.11ac-VH80 MCS0/Nss2	10										10		

1.5 EUT Operating during test

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under Android were executed.

1.6 Test Facility

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM. Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11a	5180MHz,5200MHz, 5240MHz, 5745MHz, 5785MHz,5825MHz
TM2	802.11n-HT20	5180MHz,5200MHz, 5240MHz, 5745MHz, 5785MHz,5825MHz
TM3	802.11n-HT40	5190MHz,5230MHz, 5755MHz,5795MHz
TM4	802.11ac-VH80	5210MHz, 5775 MHz
Note: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.		

Test Conditions	
Temperature:	22~25 °C
Relative humidity	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
Network Cable	1.2	Unshielded	Without Core
DC Cable	1.5	Unshielded	Without Core

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
Network Cable	4.5	Unshielded	Without Core

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	ThinkPad Edge E445	/

1.8 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.9 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2018-05-22	2019-05-21
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2018-05-22	2019-05-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2018-05-22	2019-05-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2018-05-22	2019-05-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2018-05-22	2019-05-21
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2020-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2020-06-07
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2017-06-08	2020-06-07
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2020-06-07
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2018-05-22	2019-05-21
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2018-05-22	2019-05-21
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2018-05-22	2019-05-21
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2018-05-22	2019-05-21
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2018-05-22	2019-05-21
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2018-05-22	2019-05-21
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2018-05-22	2019-05-21
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2018-05-22	2019-05-21
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2018-05-22	2019-05-21
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2018-05-22	2019-05-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2018-03-19	2019-03-18
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2018-03-19	2019-03-18
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2018-03-19	2019-03-18
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2018-03-19	2019-03-18
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.203; § 15.405	Antenna Requirement	Compliant
§ 15.207; § 15.407(b)(6)	Conducted Emission	Compliant
§ 15.407(a)(1),(2)	Power Spectral Density	Compliant
§ 15.407(e)	Emission Bandwidth and Occupied Bandwidth	Compliant
§ 15.407(a)(1),(2)	Maximum Conducted Output Power	Compliant
§ 15.407(b)(1),(2),(3)	Conducted Spurious Emission	Compliant
§ 15.205; § 15.407(b)(1),(2),(3)	Radiated Emission	Compliant
§ 15.407(g)	Frequency Stability	Compliant
§ 15.407(h)	Dynamic Frequency Selection (DFS)	N/A

N/A: not applicable

3. RF Exposure

3.1 Standard Applicable

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the MPE Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has a reverse rotation detachable antenna, fulfill the requirement of this section.

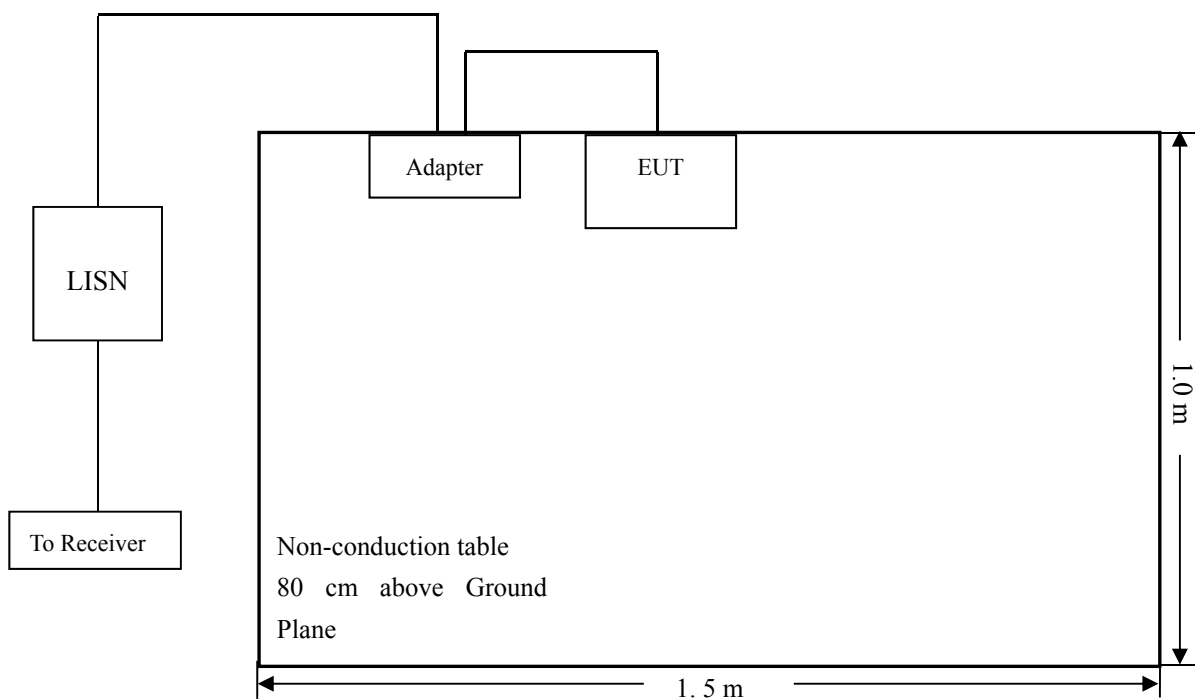
5. Conducted Emissions

5.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

5.2 Basic Test Setup Block Diagram




5.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150 kHz
Stop Frequency	30 MHz
Sweep Speed	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth	9 kHz
Quasi-Peak Adapter Mode	Normal


5.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

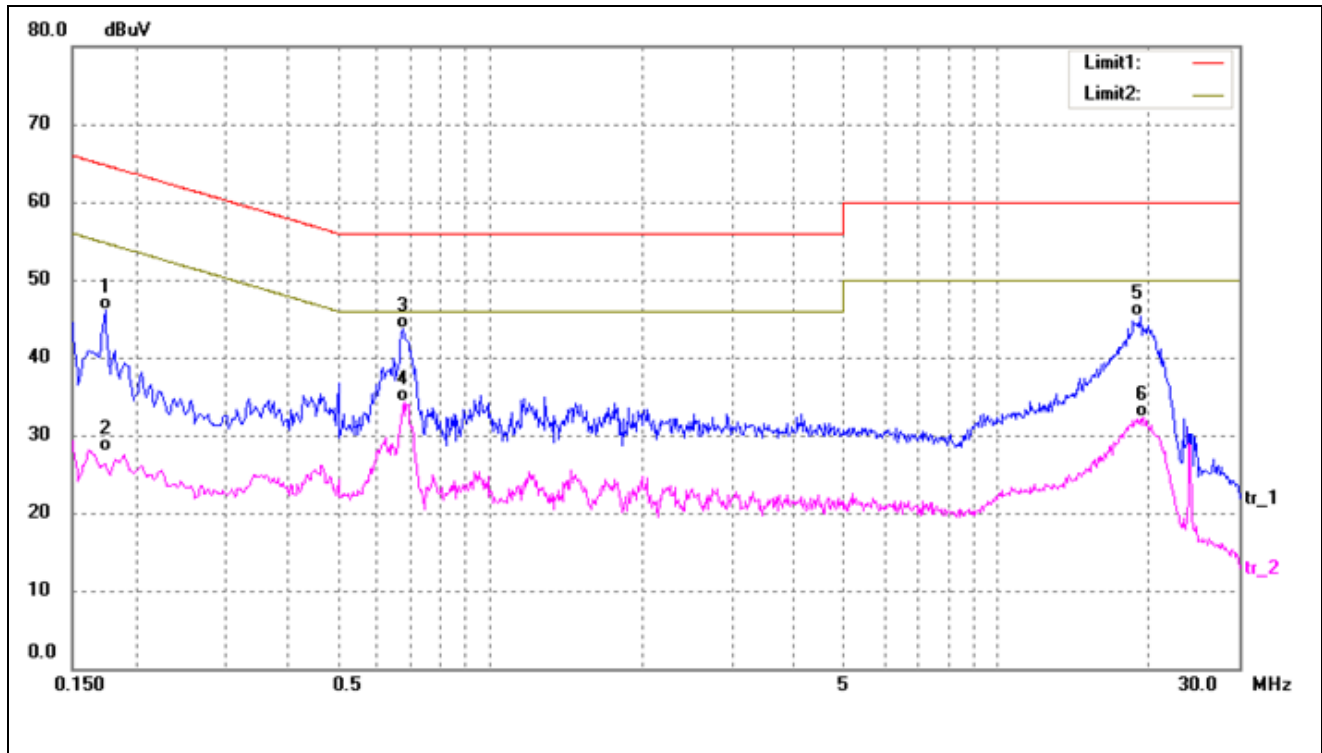

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1740	35.98	10.11	46.09	64.76	-18.67	QP
2	0.1740	17.84	10.11	27.95	54.76	-26.81	AVG
3	0.6740	33.32	10.38	43.70	56.00	-12.30	QP
4*	0.6780	24.02	10.38	34.40	46.00	-11.60	AVG
5	19.1419	34.14	11.15	45.29	60.00	-14.71	QP
6	19.5059	21.06	11.16	32.22	50.00	-17.78	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

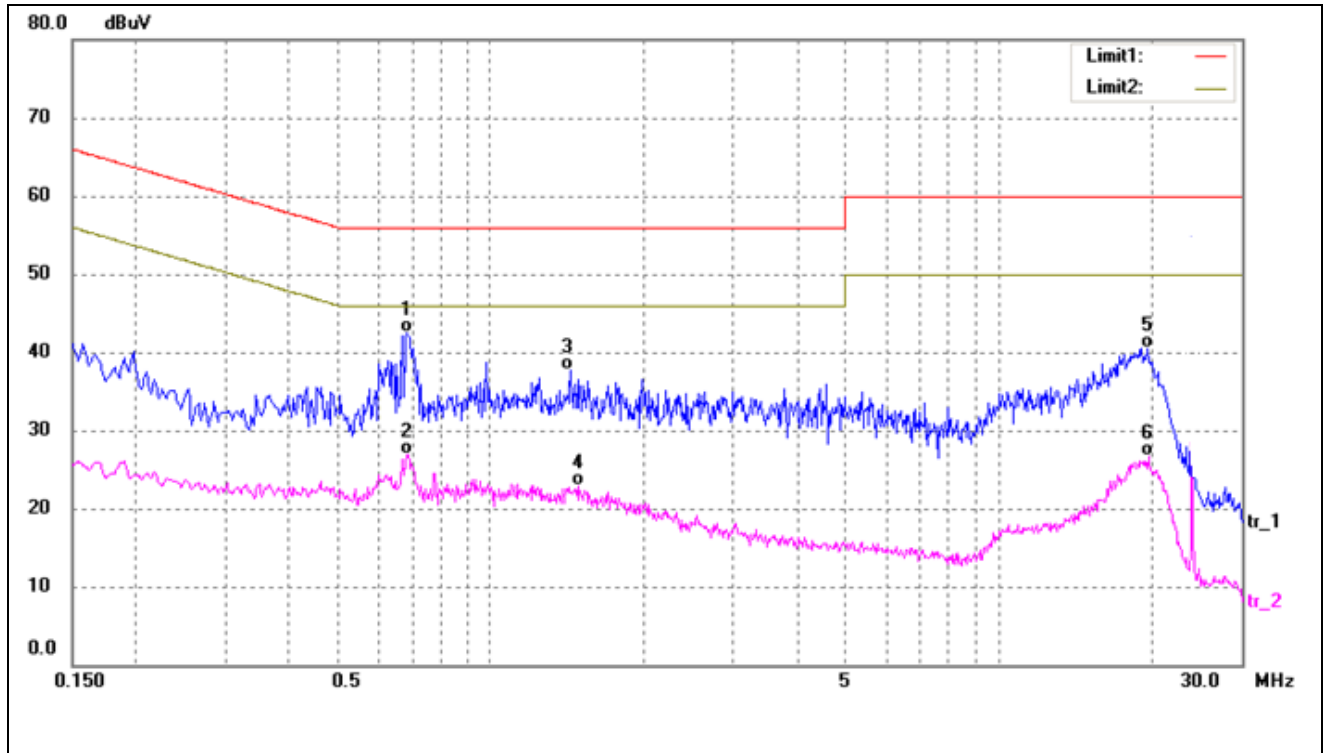

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.6860	32.08	10.39	42.47	56.00	-13.53	QP
2	0.6860	16.61	10.39	27.00	46.00	-19.00	AVG
3	1.4380	27.13	10.55	37.68	56.00	-18.32	QP
4	1.4860	12.40	10.56	22.96	46.00	-23.04	AVG
5	19.5940	29.36	11.16	40.52	60.00	-19.48	QP
6	19.7220	15.51	11.16	26.67	50.00	-23.33	AVG

6. Power Spectral Density

6.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

6.2 Test Procedure

According to 789033 D02 v02r01 General UNII Test Procedures New Rules v02, the following is the measurement procedure.

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth ($< 1 \text{ MHz}$, or $< 500 \text{ kHz}$) and integrated over 1 MHz, or 500kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.1.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.




Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ kHz}$ is available on nearly all spectrum analyzers.




6.3 Summary of Test Results/Plots



U-NII-1:5150-5250MHz			
Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5180	6.566	11
	5200	6.232	11
	5240	5.844	11
802.11n-HT20	5180	5.726	11
	5200	7.010	11
	5240	5.811	11
802.11n-HT40	5190	4.274	11
	5230	3.214	11
802.11ac-HT80	5210	-0.907	11


U-NII-3: 5725-5850MHz					
Operating mode	Test Channel	Power Spectral Density dBm/300kHz	Factor	Power Spectral Density* dBm/500kHz	Limit dBm/500kHz
802.11a	5745	2.118	2.22	4.338	30
	5785	1.390	2.22	3.610	30
	5825	1.919	2.22	4.139	30
802.11n-HT20	5745	1.842	2.22	4.062	30
	5785	1.507	2.22	3.727	30
	5825	2.18	2.22	4.400	30
802.11n HT40	5755	-0.541	2.22	1.679	30
	5795	-1.060	2.22	1.160	30
802.11ac VH80	5775	-4.827	2.22	-2.607	30
*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22					

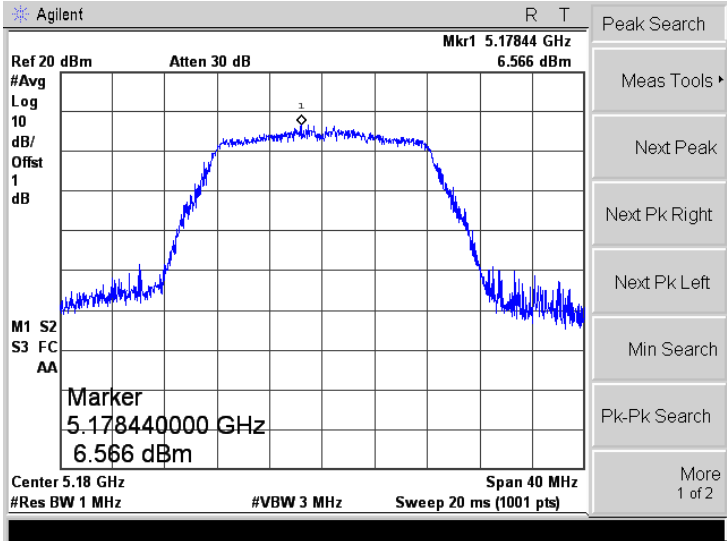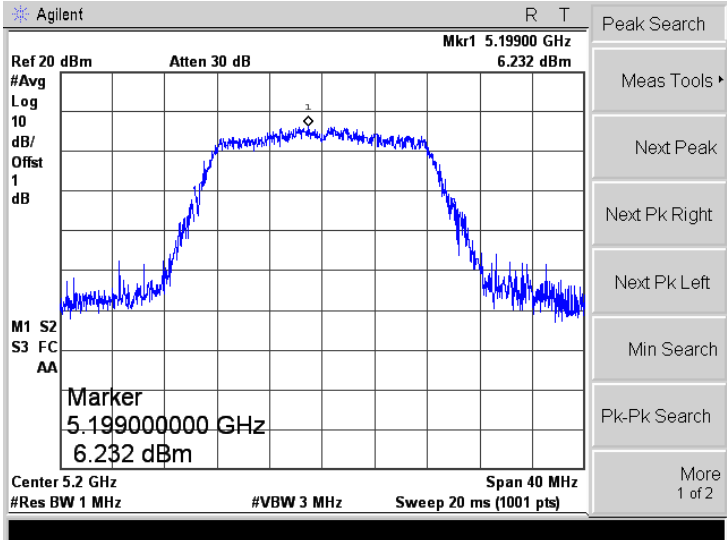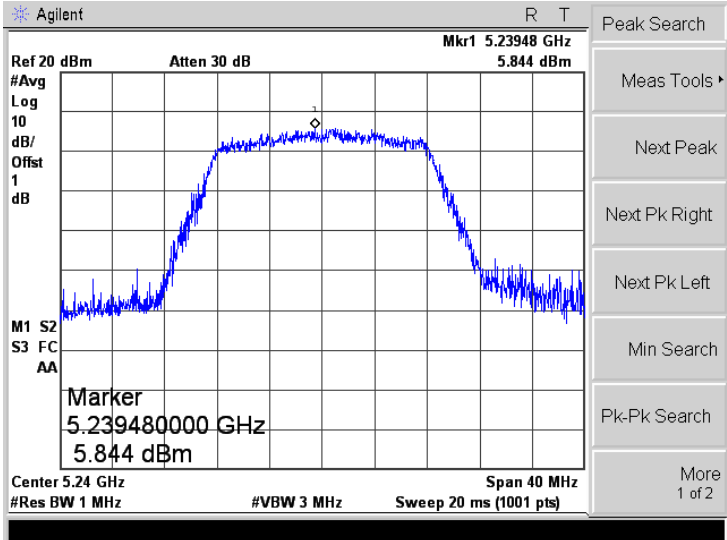➤ 5150-5250MHz




Mode:	802.11a
5180MHz	
5200MHz	
5240MHz	

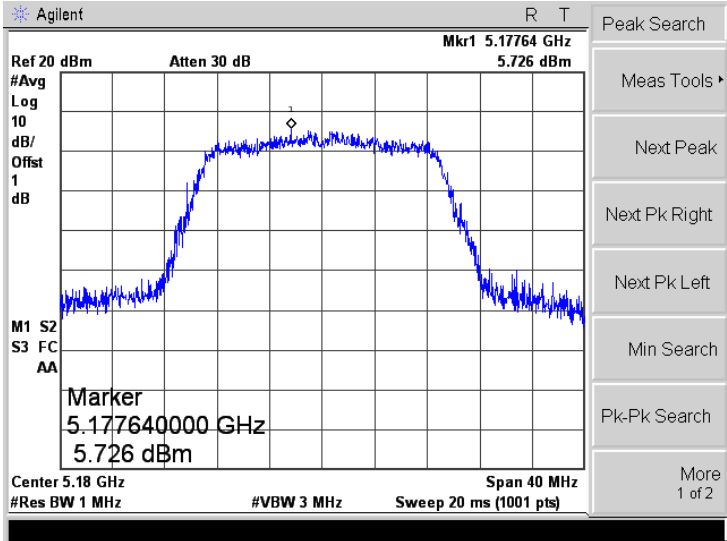
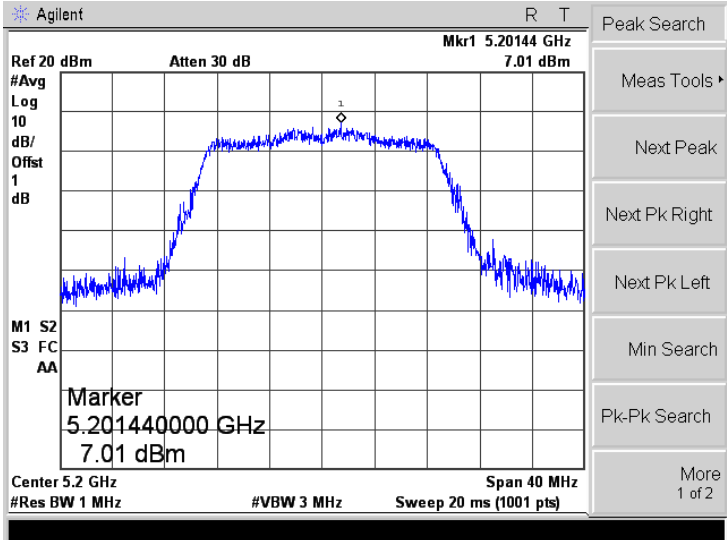
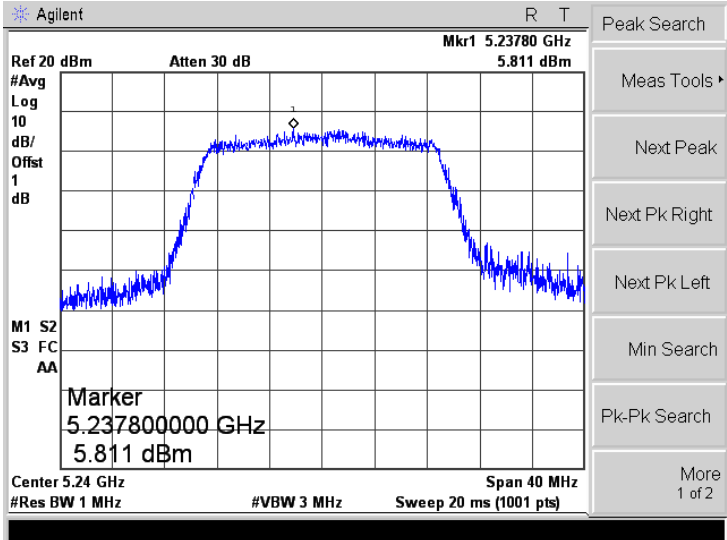
Mode:	802.11n-HT20
5180MHz	
5200MHz	
5240MHz	

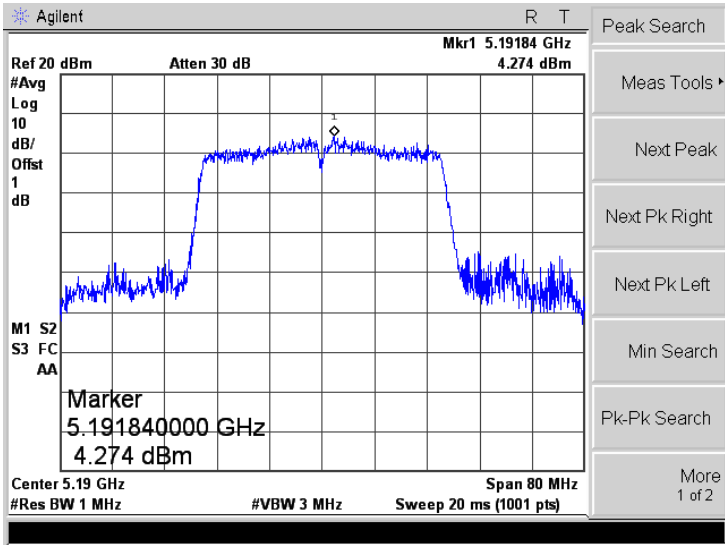
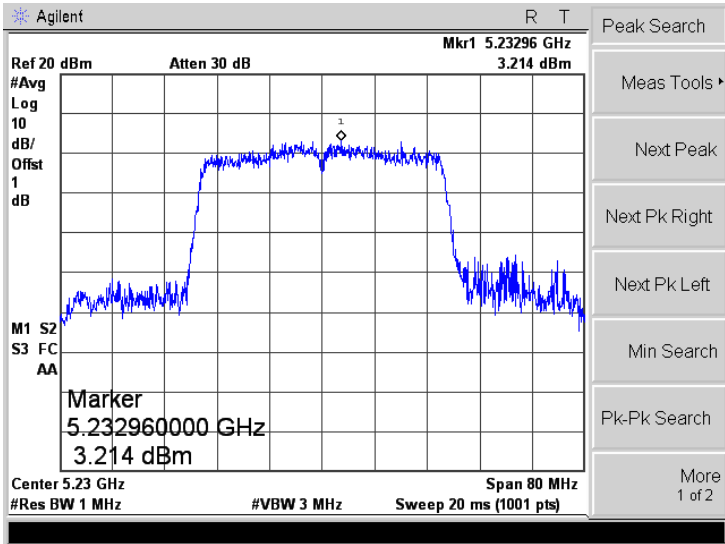
Mode:	802.11n-HT40
5190 MHz	
5230 MHz	

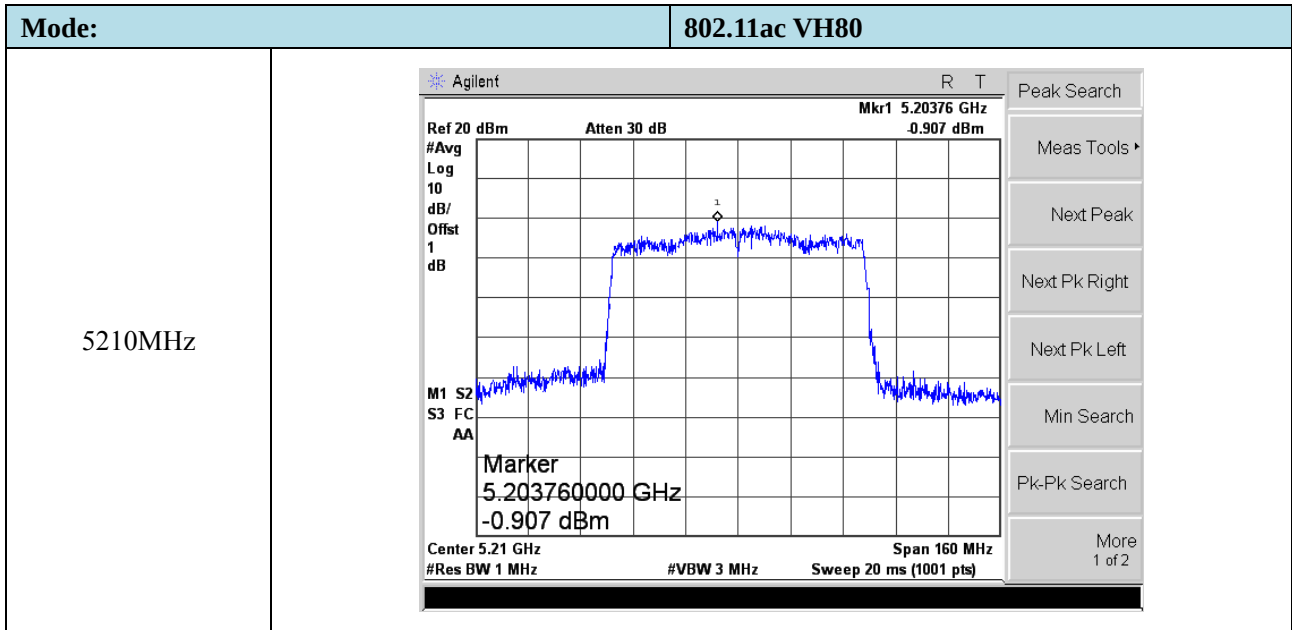


➤ 5725-5850MHz

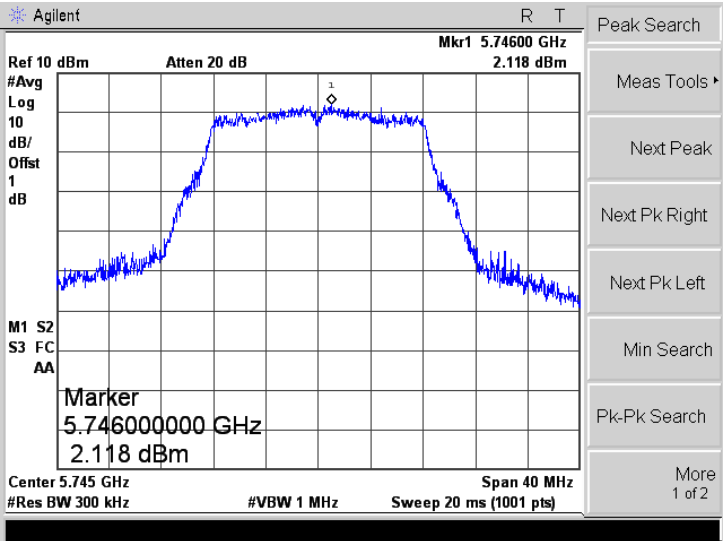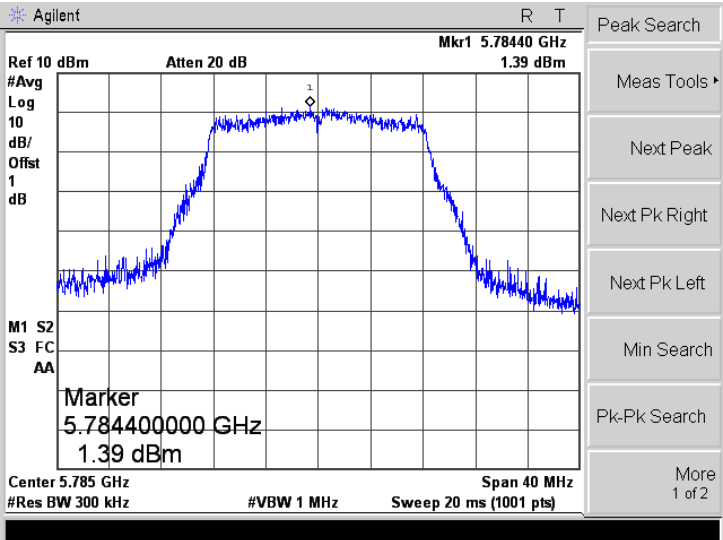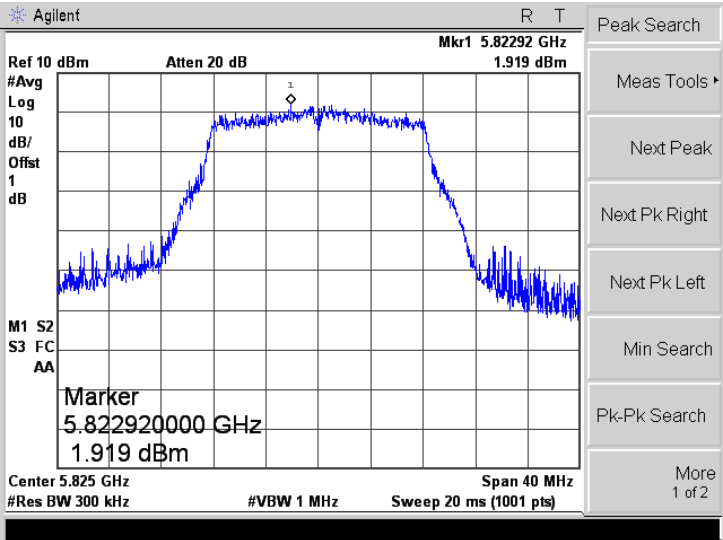Mode:	802.11a
5745MHz	
5785MHz	
5825MHz	

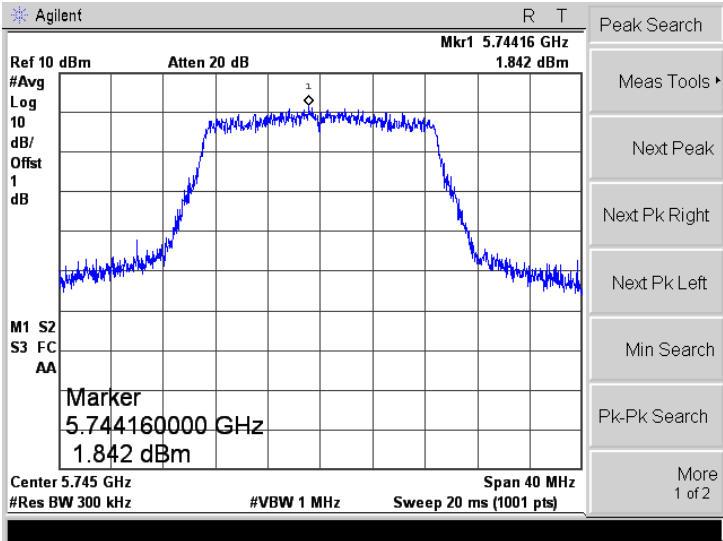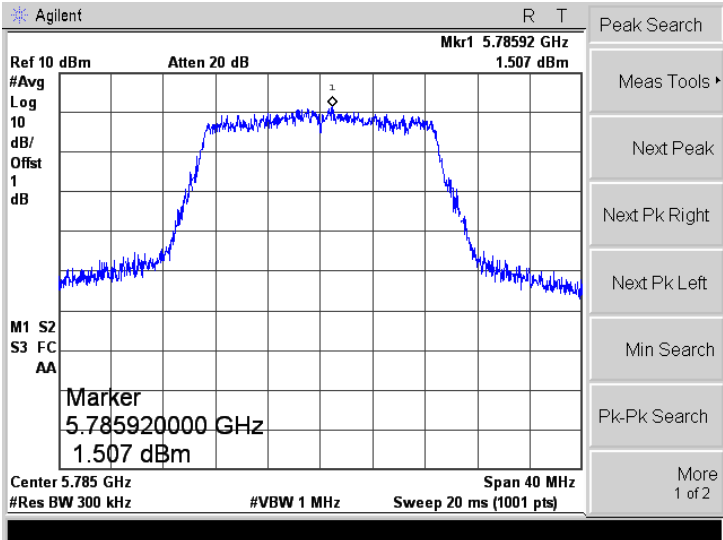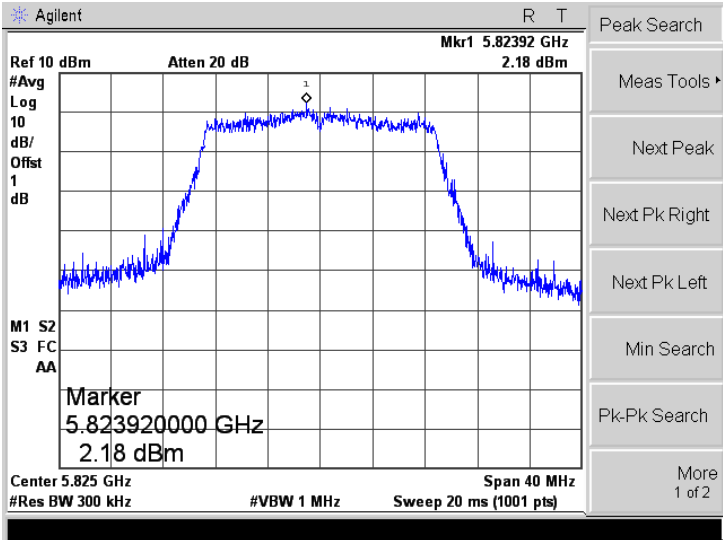Mode:	802.11n-HT20
5745MHz	
5785MHz	
5825MHz	

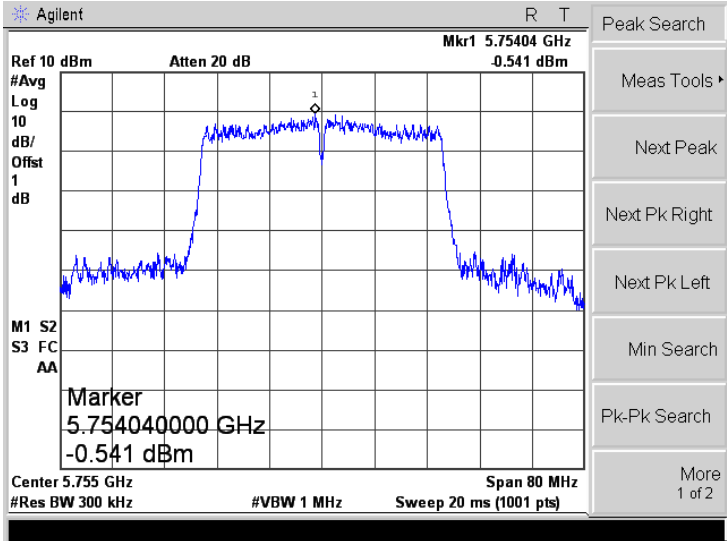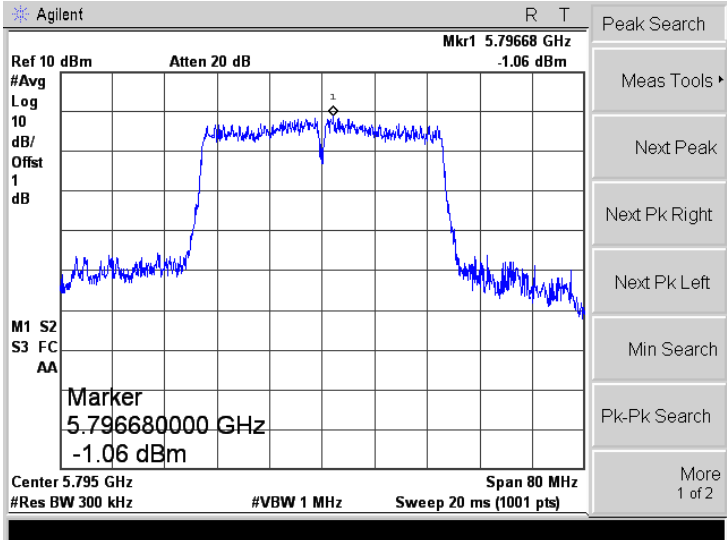Mode:	802.11n-HT40
5755 MHz	 Agilent R T Ref 10 dBm Atten 20 dB Mkr1 5.75404 GHz -0.541 dBm #Avg Log 10 dB/Offset 1 dB M1 S2 S3 FC AA Marker 5.754040000 GHz -0.541 dBm Center 5.755 GHz Span 80 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts) Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
5795 MHz	 Agilent R T Ref 10 dBm Atten 20 dB Mkr1 5.79668 GHz -1.06 dBm #Avg Log 10 dB/Offset 1 dB M1 S2 S3 FC AA Marker 5.796680000 GHz -1.06 dBm Center 5.795 GHz Span 80 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts) Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

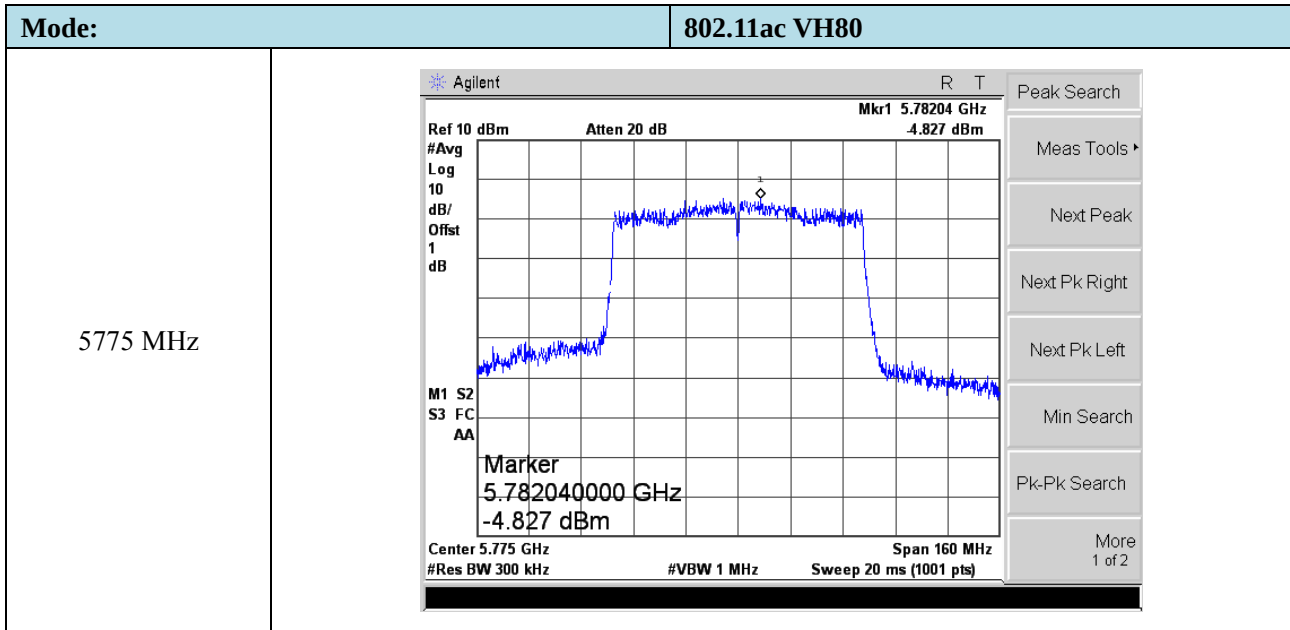

7. Emission Bandwidth and Occupied Bandwidth

7.1 Standard Applicable

According to 15.407 (a) and (e)

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

7.2 Test Procedure

According to 789033 D02 v02r0r section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

a) Set RBW = approximately 1% of the emission bandwidth.

b) Set the VBW > RBW.

c) Detector = Peak.

d) Trace mode = max hold.

e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare

this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v02r01 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:




1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 * RBW$
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.




7.3 Summary of Test Results/Plots



U-NII-1:5150-5250MHz				
Test Mode	Test Channel MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5180	21.541	16.9537	Pass
	5200	21.318	16.9329	Pass
	5240	21.314	16.9474	Pass
802.11n-HT20	5180	21.617	18.0328	Pass
	5200	21.614	18.0683	Pass
	5240	21.630	18.0404	Pass
802.11n-HT40	5190	38.958	36.1683	Pass
	5230	38.906	36.1869	Pass
802.11ac-HT80	5210	79.652	75.4377	Pass


U-NII-3: 5725-5850MHz				
Test Mode	Test Channel MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5745	16.273	16.9729	≥ 500
	5785	16.164	16.9801	≥ 500
	5825	16.222	16.9882	≥ 500
802.11n-HT20	5745	17.424	18.0311	≥ 500
	5785	17.536	18.0533	≥ 500
	5825	17.389	18.0852	≥ 500
802.11n-HT40	5755	36.498	36.5914	≥ 500
	5795	36.301	36.5512	≥ 500
802.11ac VH80	5775	74.573	75.4933	≥ 500

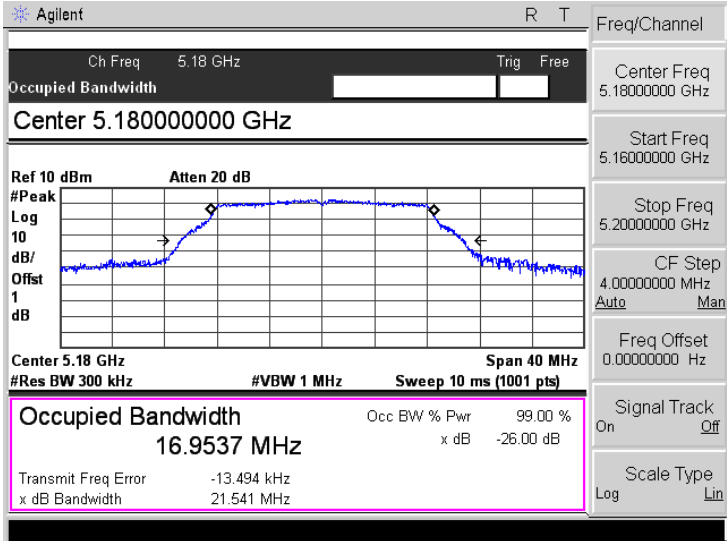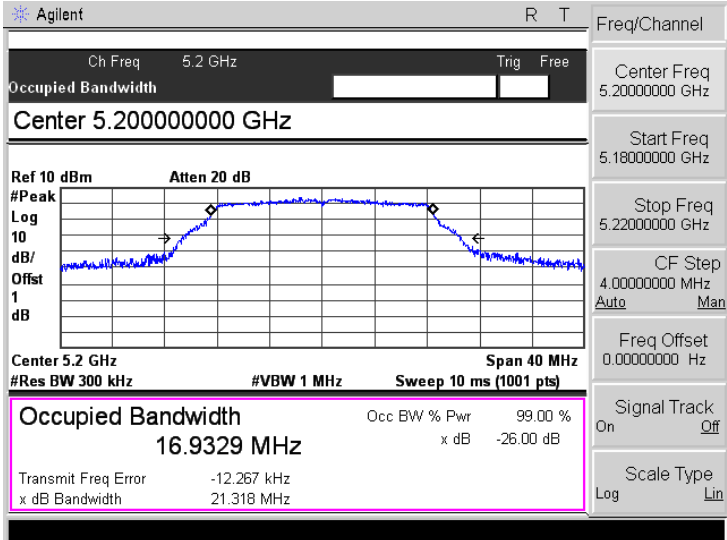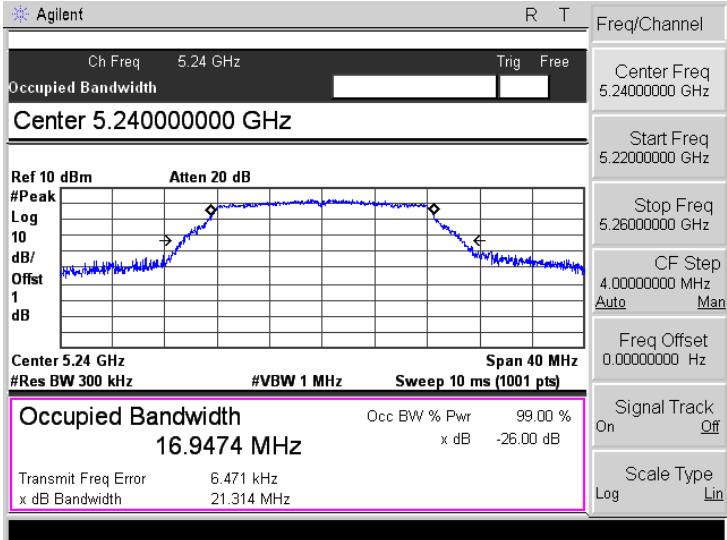➤ 5150-5250MHz




Mode:	802.11a
5180MHz	
5200MHz	
5240MHz	

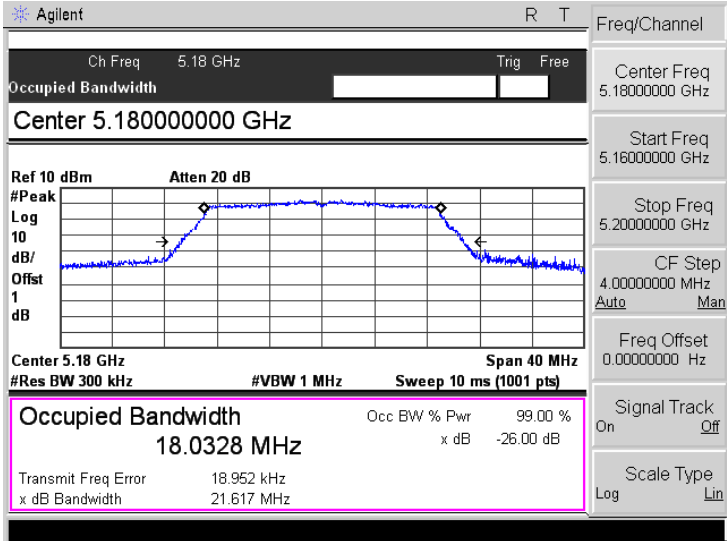
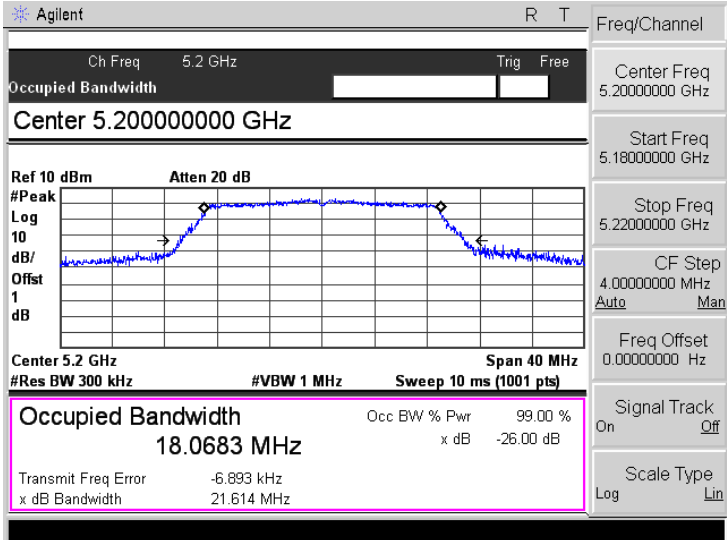
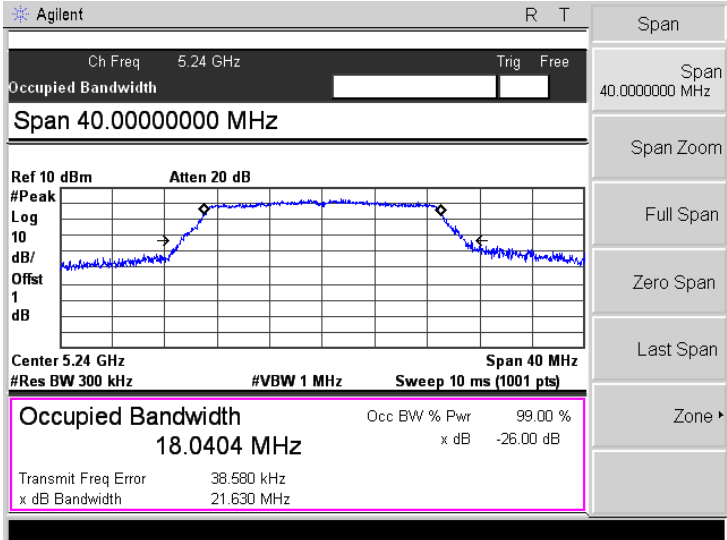
Mode:	802.11n-HT20
5180MHz	 Agilent R T Ch Freq 5.18 GHz Trig Free Occupied Bandwidth Center 5.18000000 GHz Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Offst 1 dB Center 5.18 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 18.0328 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 18.952 kHz x dB Bandwidth 21.617 MHz Freq/Channel Center Freq 5.18000000 GHz Start Freq 5.16000000 GHz Stop Freq 5.20000000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
5200MHz	 Agilent R T Ch Freq 5.2 GHz Trig Free Occupied Bandwidth Center 5.20000000 GHz Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Offst 1 dB Center 5.2 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 18.0683 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -6.893 kHz x dB Bandwidth 21.614 MHz Freq/Channel Center Freq 5.20000000 GHz Start Freq 5.18000000 GHz Stop Freq 5.22000000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
5240MHz	 Agilent R T Ch Freq 5.24 GHz Trig Free Occupied Bandwidth Span 40.00000000 MHz Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Offst 1 dB Center 5.24 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 18.0404 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 38.580 kHz x dB Bandwidth 21.630 MHz Span Span 40.00000000 MHz Span Zoom Full Span Zero Span Last Span Zone

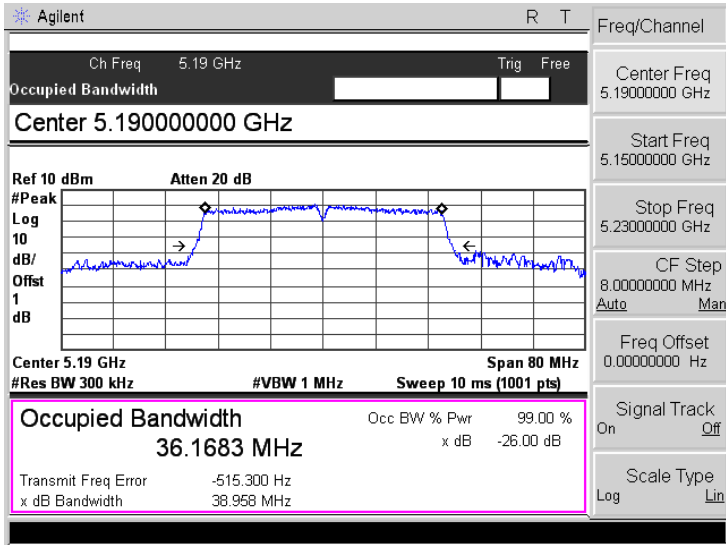
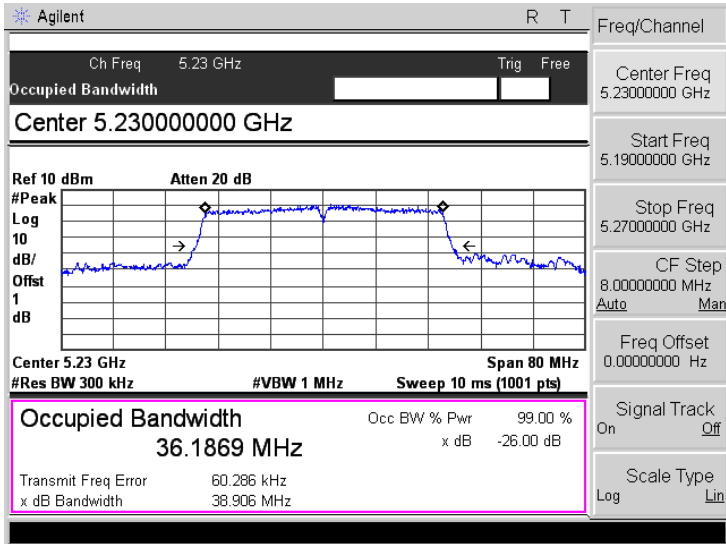
Mode:	802.11n-HT40
5190 MHz	
5230 MHz	

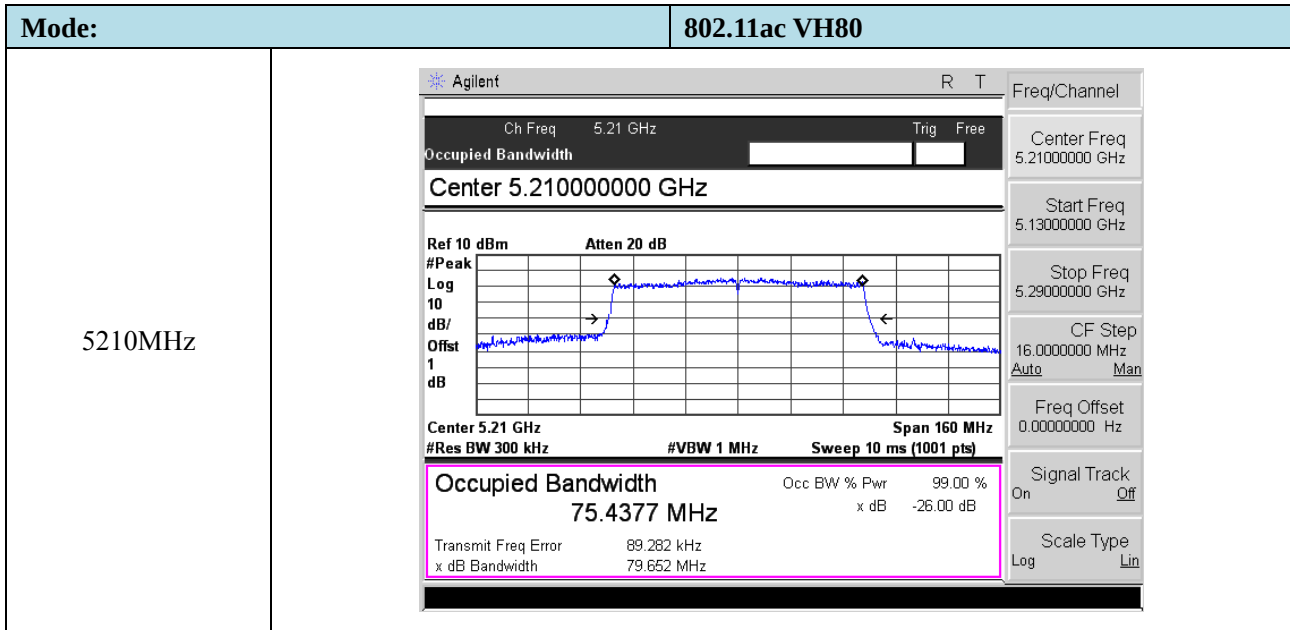


➤ 5725-5850MHz

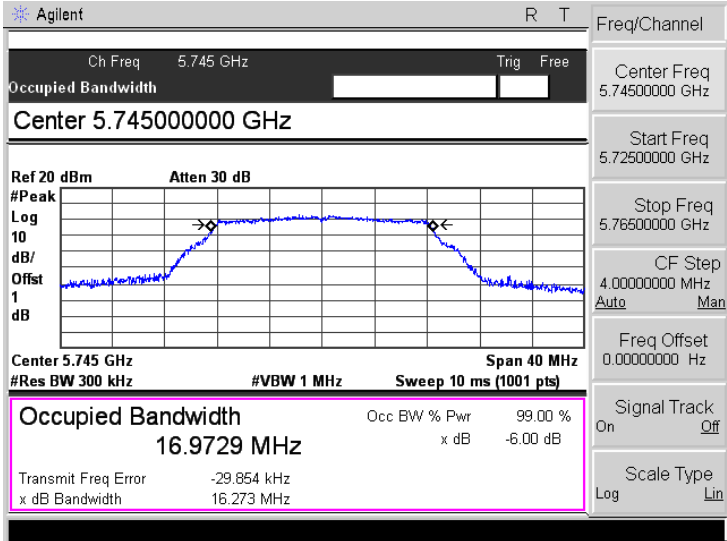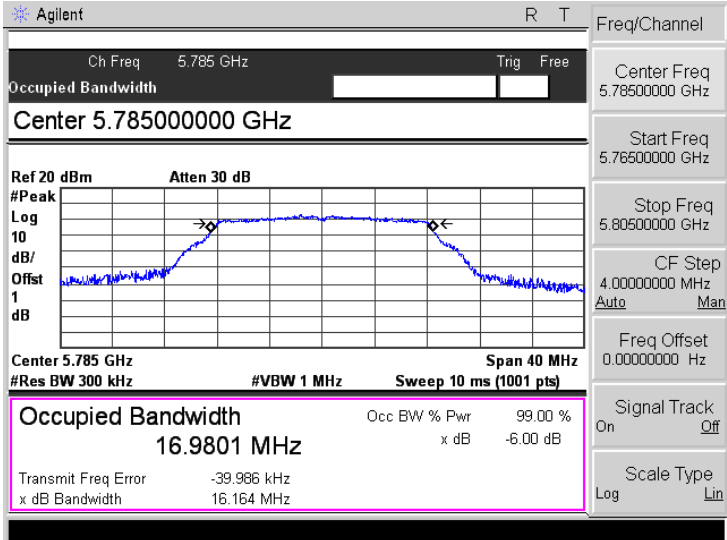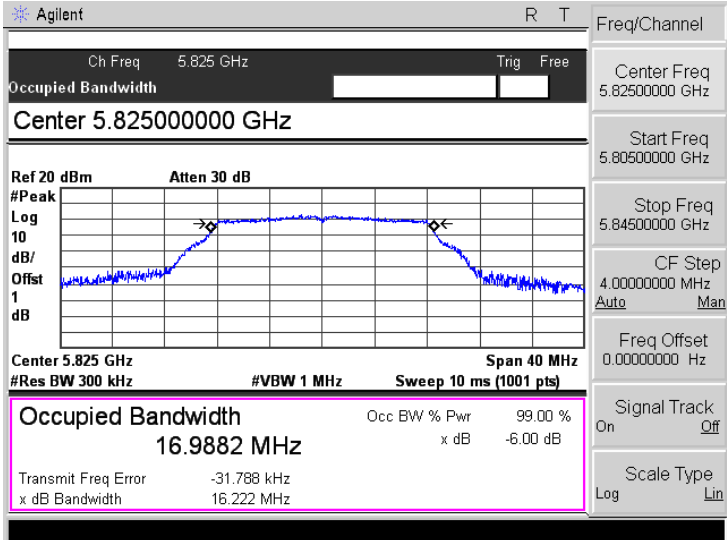Mode:	802.11a
5745MHz	 Agilent R T Ch Freq 5.745 GHz Trig Free Occupied Bandwidth Center 5.74500000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.745 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 16.9729 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -29.854 kHz x dB Bandwidth 16.273 MHz Freq/Channel Center Freq 5.74500000 GHz Start Freq 5.72500000 GHz Stop Freq 5.76500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
5785MHz	 Agilent R T Ch Freq 5.785 GHz Trig Free Occupied Bandwidth Center 5.78500000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.785 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 16.9801 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -39.986 kHz x dB Bandwidth 16.164 MHz Freq/Channel Center Freq 5.78500000 GHz Start Freq 5.76500000 GHz Stop Freq 5.80500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
5825MHz	 Agilent R T Ch Freq 5.825 GHz Trig Free Occupied Bandwidth Center 5.82500000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.825 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 16.9882 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -31.788 kHz x dB Bandwidth 16.222 MHz Freq/Channel Center Freq 5.82500000 GHz Start Freq 5.80500000 GHz Stop Freq 5.84500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin

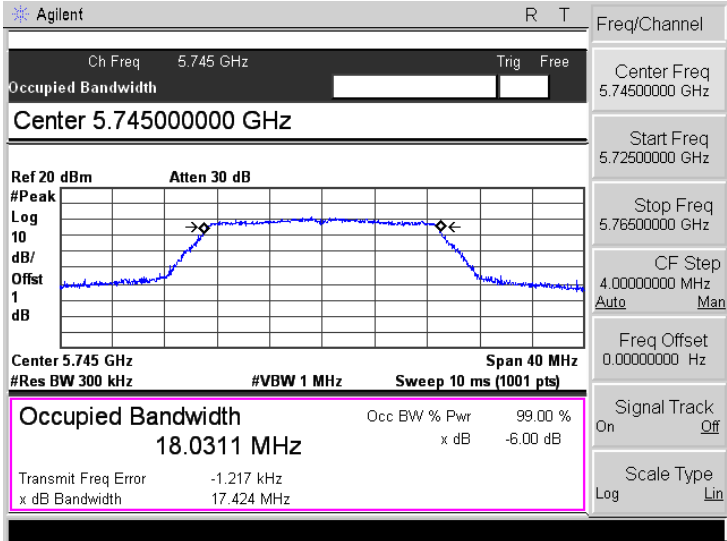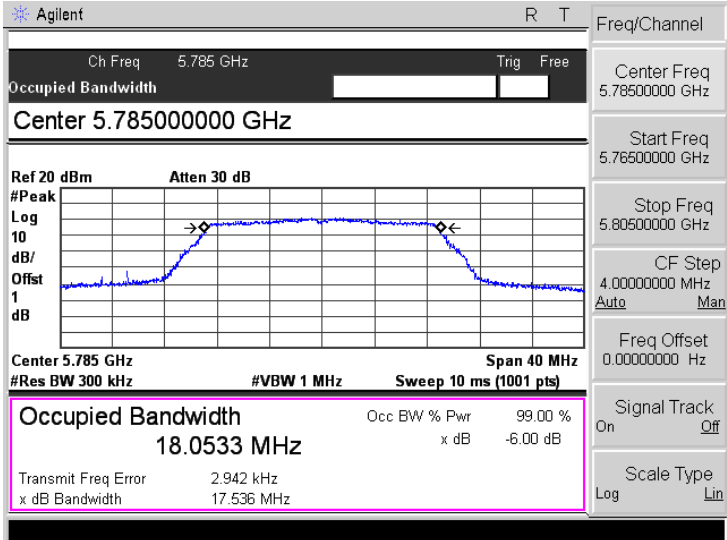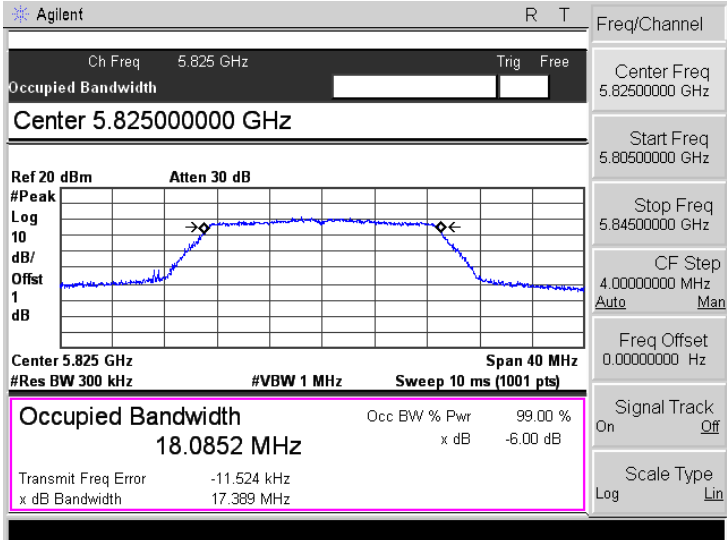Mode:	802.11n-HT20
5745MHz	 Agilent R T Ch Freq 5.745 GHz Trig Free Occupied Bandwidth Center 5.74500000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.745 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 18.0311 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -1.217 kHz x dB Bandwidth 17.424 MHz Freq/Channel Center Freq 5.74500000 GHz Start Freq 5.72500000 GHz Stop Freq 5.76500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
5785MHz	 Agilent R T Ch Freq 5.785 GHz Trig Free Occupied Bandwidth Center 5.78500000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.785 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 18.0533 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 2.942 kHz x dB Bandwidth 17.536 MHz Freq/Channel Center Freq 5.78500000 GHz Start Freq 5.76500000 GHz Stop Freq 5.80500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
5825MHz	 Agilent R T Ch Freq 5.825 GHz Trig Free Occupied Bandwidth Center 5.82500000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.825 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts) Occupied Bandwidth 18.0852 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -11.524 kHz x dB Bandwidth 17.369 MHz Freq/Channel Center Freq 5.82500000 GHz Start Freq 5.80500000 GHz Stop Freq 5.84500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin

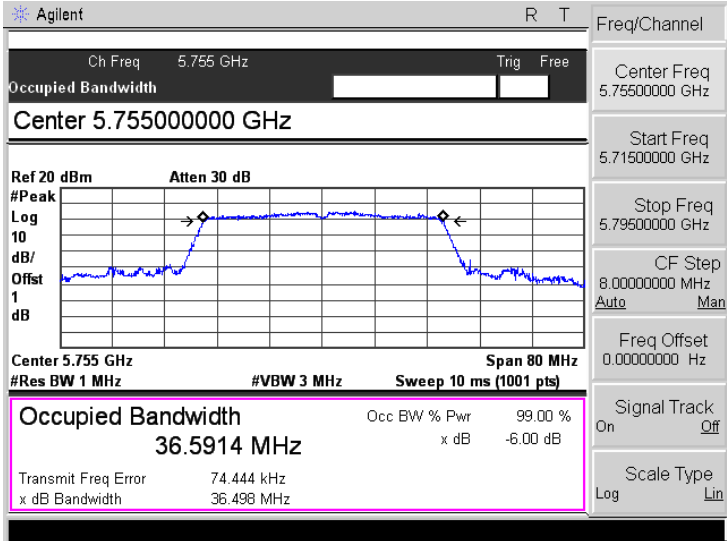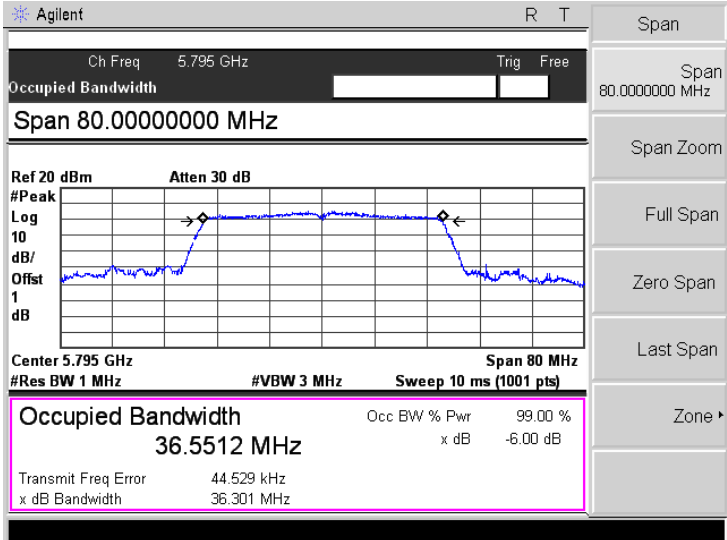Mode:	802.11n-HT40
5755 MHz	
5795 MHz	

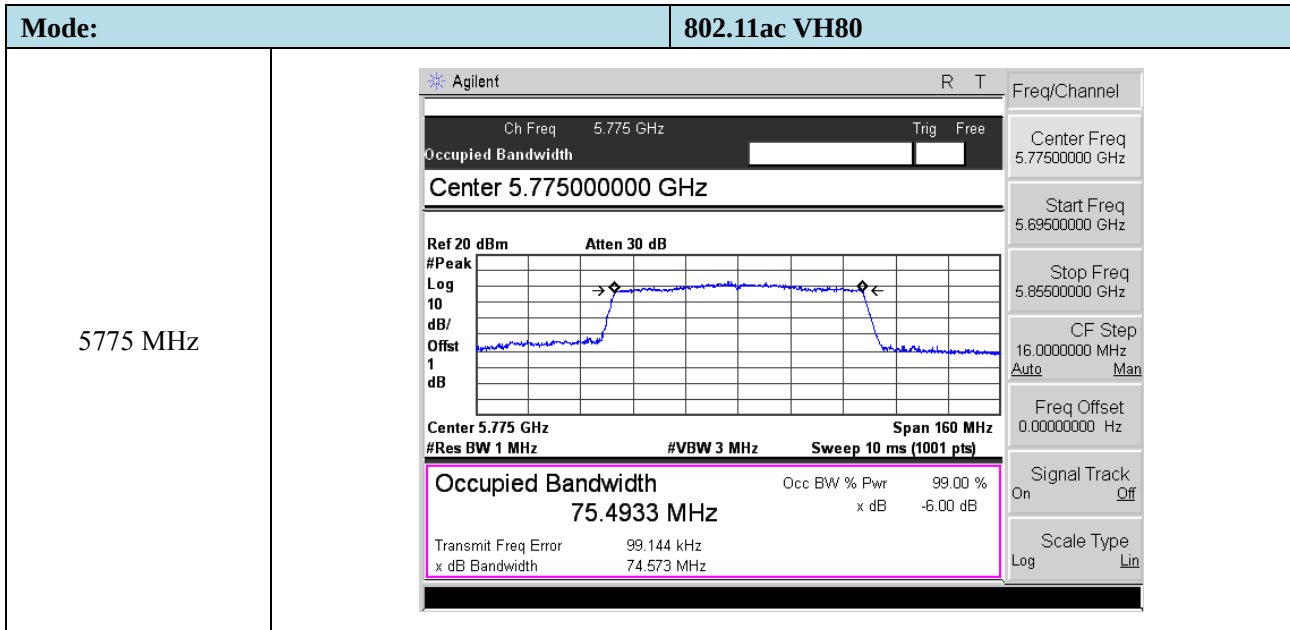

8. Maximum Conducted Output Power

8.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

8.2 Test Procedure

According to KDB789033 D02 v02r01 section E, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1 MHz.
- (iii) Set VBW $\geq$ 3 MHz.
- (iv) Number of points in sweep $\geq$ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)
- (v) Sweep time = auto.




- (vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq$ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- (viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.




8.3 Summary of Test Results/Plots



U-NII-1:5150-5250MHz				
Test mode	Frequency MHz	Output Power dBm	Output Power mW	Limit mW
802.11a	5180	9.34	8.59	250
	5200	9.80	9.55	250
	5240	9.59	9.10	250
802.11n-HT20	5180	9.02	7.98	250
	5200	9.59	9.10	250
	5240	8.98	7.91	250
802.11n-HT40	5190	8.45	7.00	250
	5230	8.14	6.52	250
802.11ac VH80	5210	5.50	3.55	250


U-NII-3: 5725-5850MHz				
Test mode	Frequency MHz	Output Power dBm	Output Power mW	Limit mW
802.11a	5745	9.14	8.20	1000
	5785	9.40	8.71	1000
	5825	9.28	8.47	1000
802.11n-HT20	5745	8.71	7.43	1000
	5785	8.92	7.80	1000
	5825	8.39	6.90	1000
802.11n-HT40	5755	8.15	6.53	1000
	5795	7.96	6.25	1000
802.11ac VH80	5775	6.66	4.63	1000

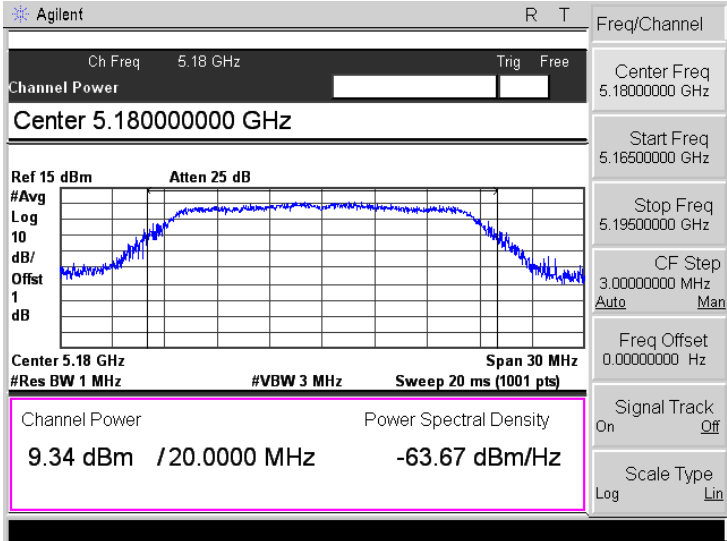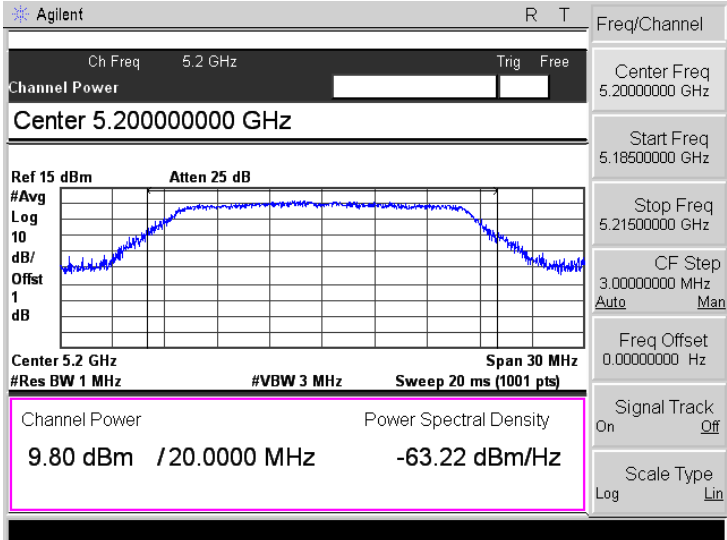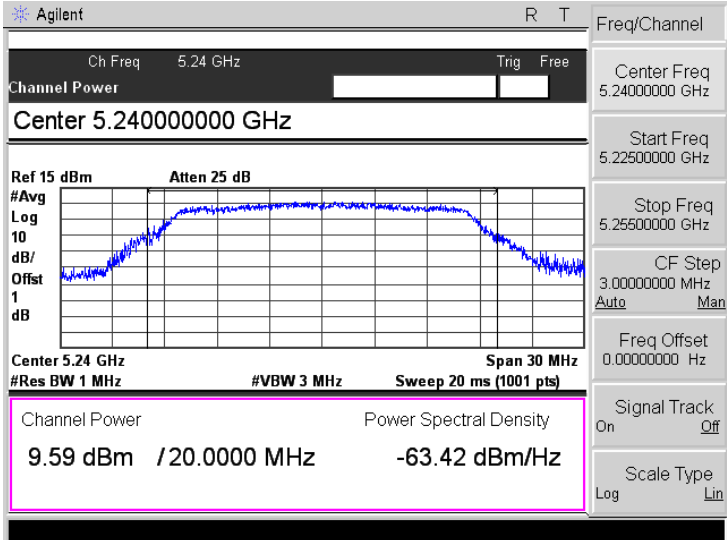➤ 5150-5250MHz




Mode:	802.11a
5180MHz	
5200MHz	
5240MHz	

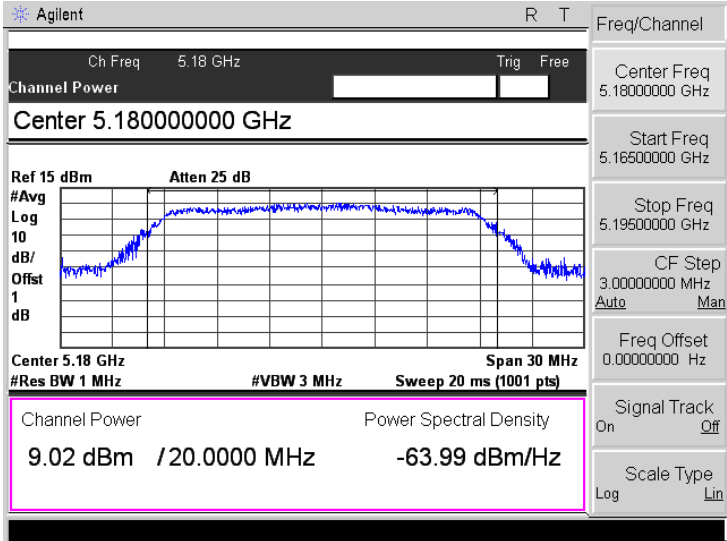
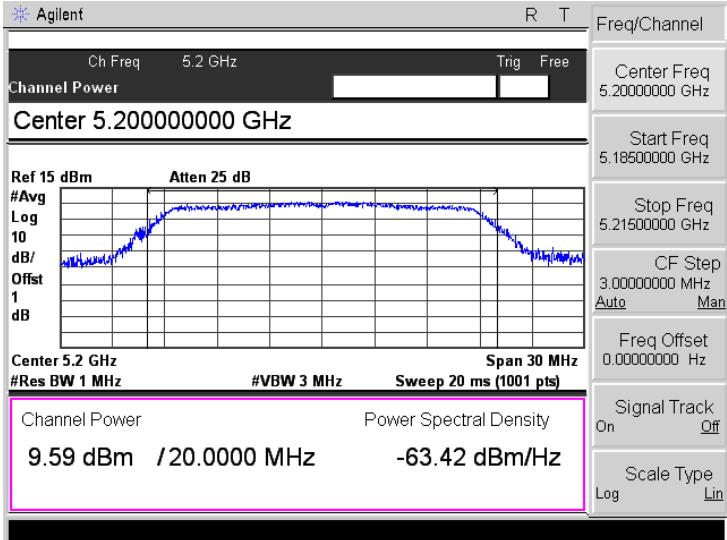
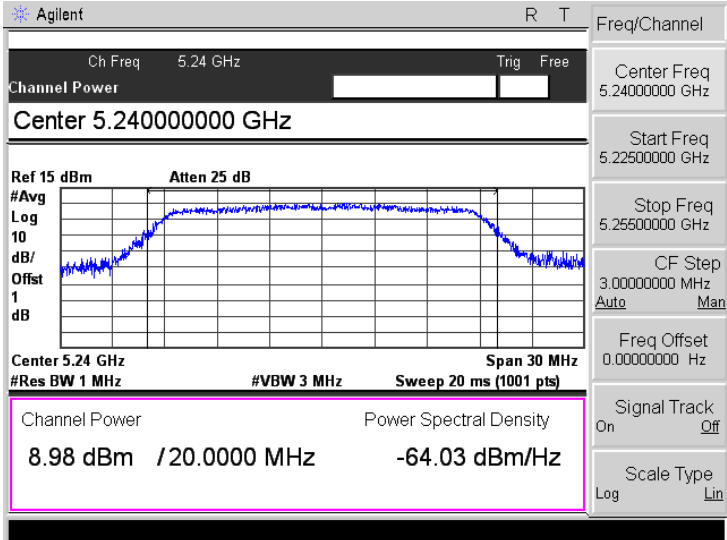
Mode:	802.11n-HT20
5180MHz	
5200MHz	
5240MHz	

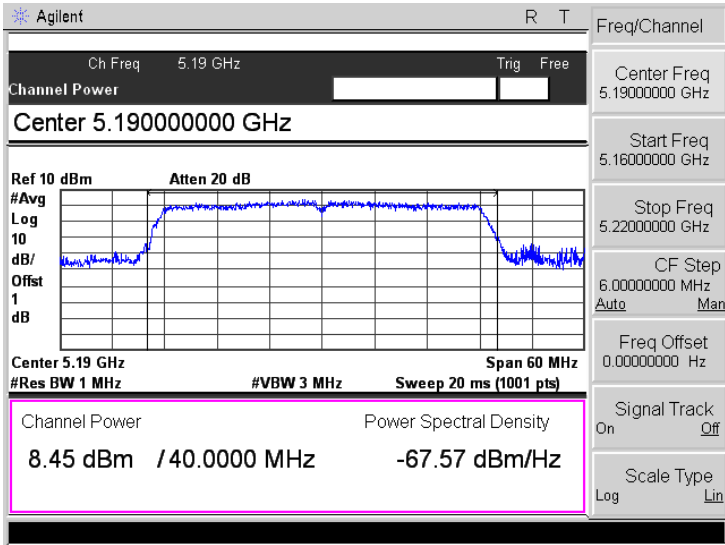
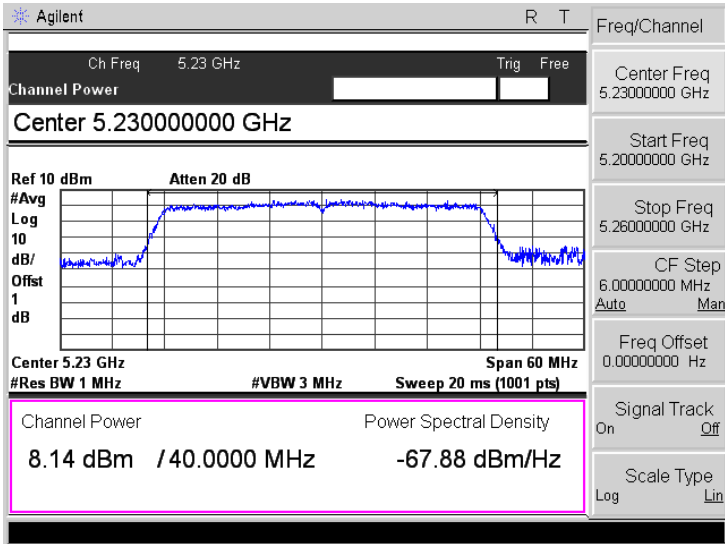
Mode:	802.11n-HT40
5190 MHz	
5230 MHz	

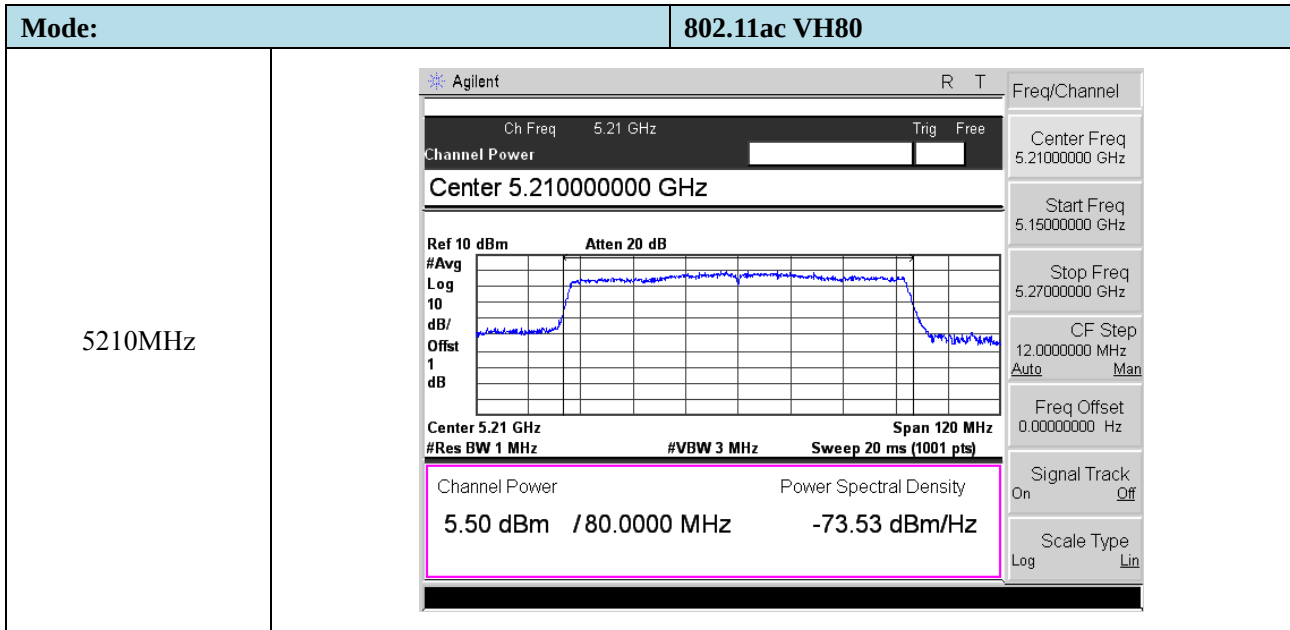


➤ 5725-5850MHz

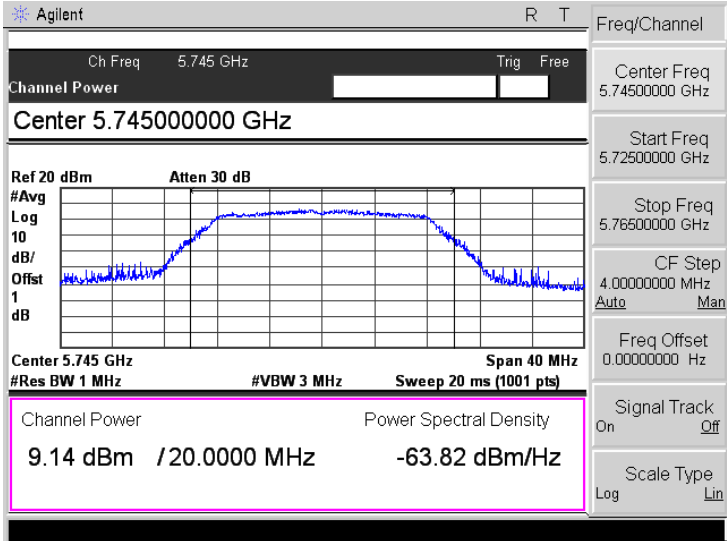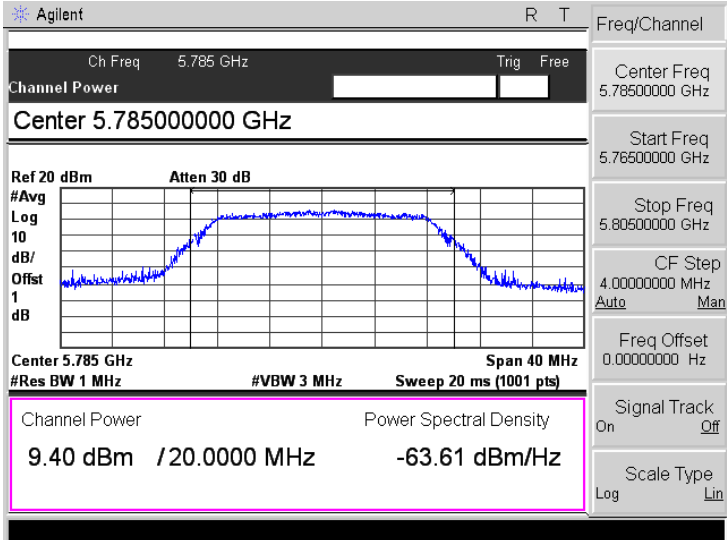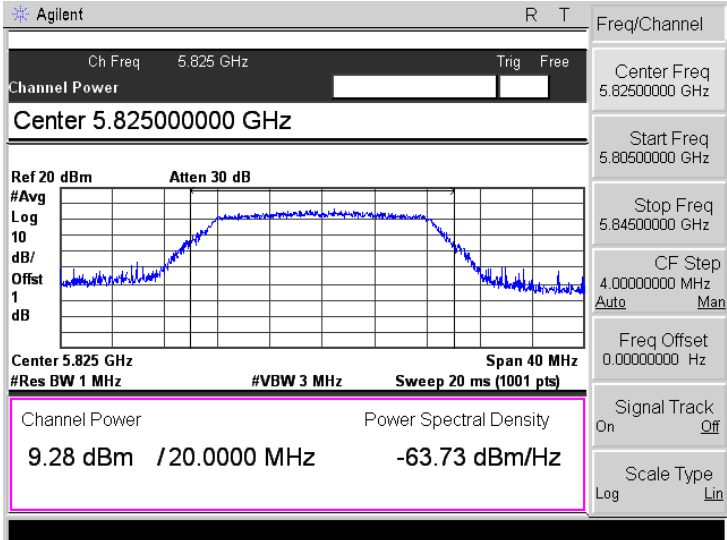Mode:	802.11a
5745MHz	
5785MHz	
5825MHz	

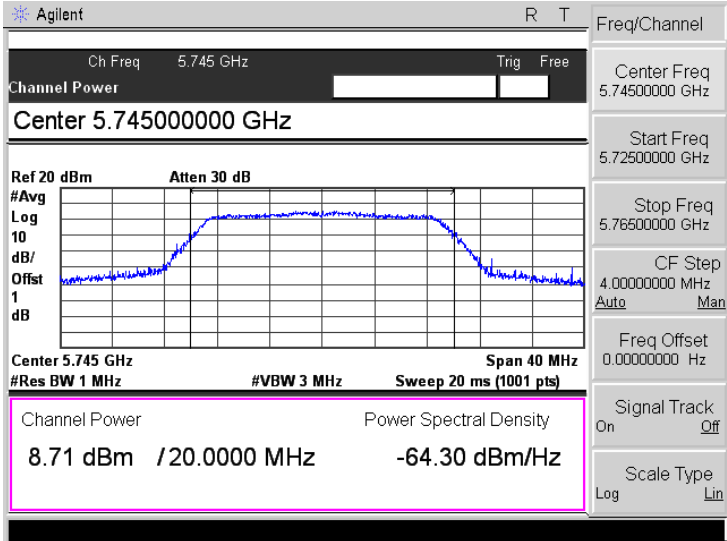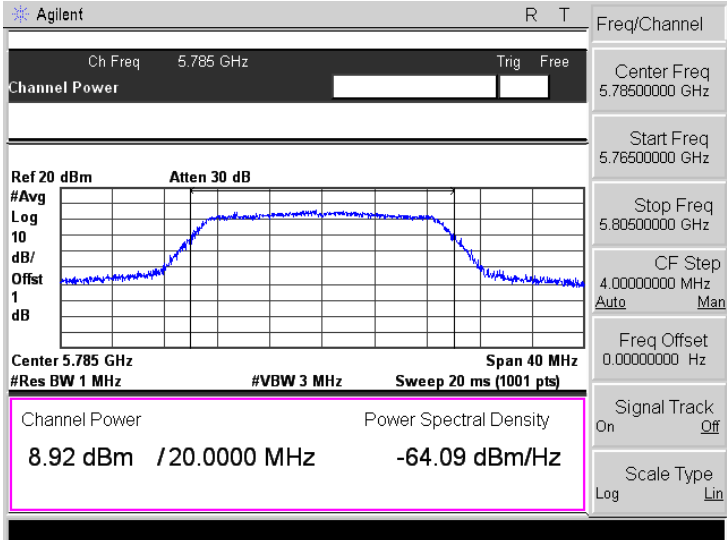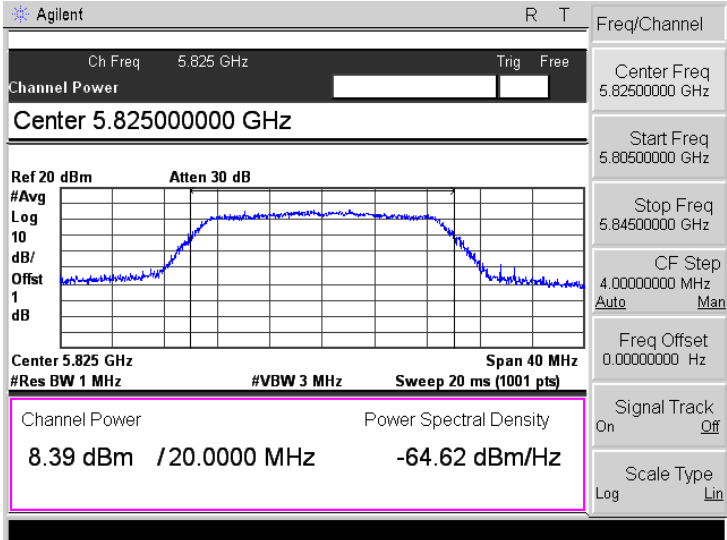Mode:	802.11n-HT20
5745MHz	
5785MHz	
5825MHz	

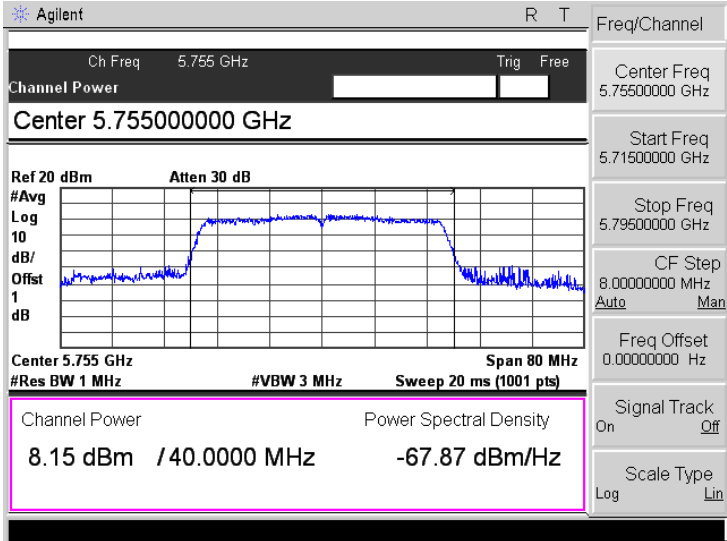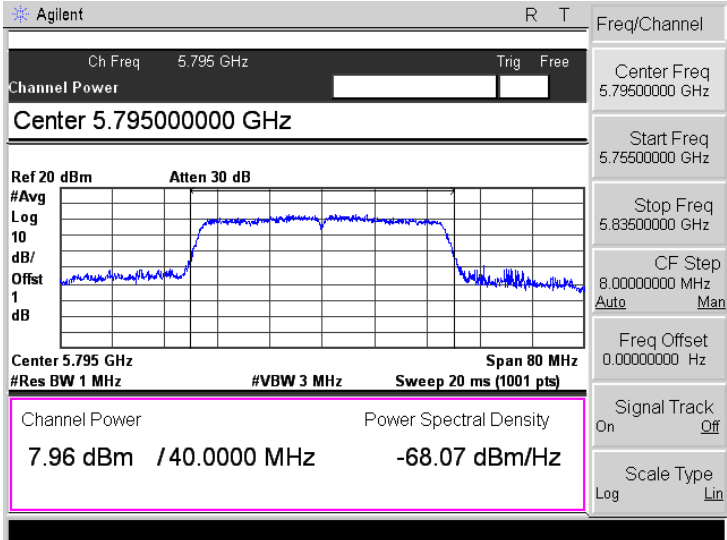Mode:	802.11n-HT40
5755 MHz	
5795 MHz	

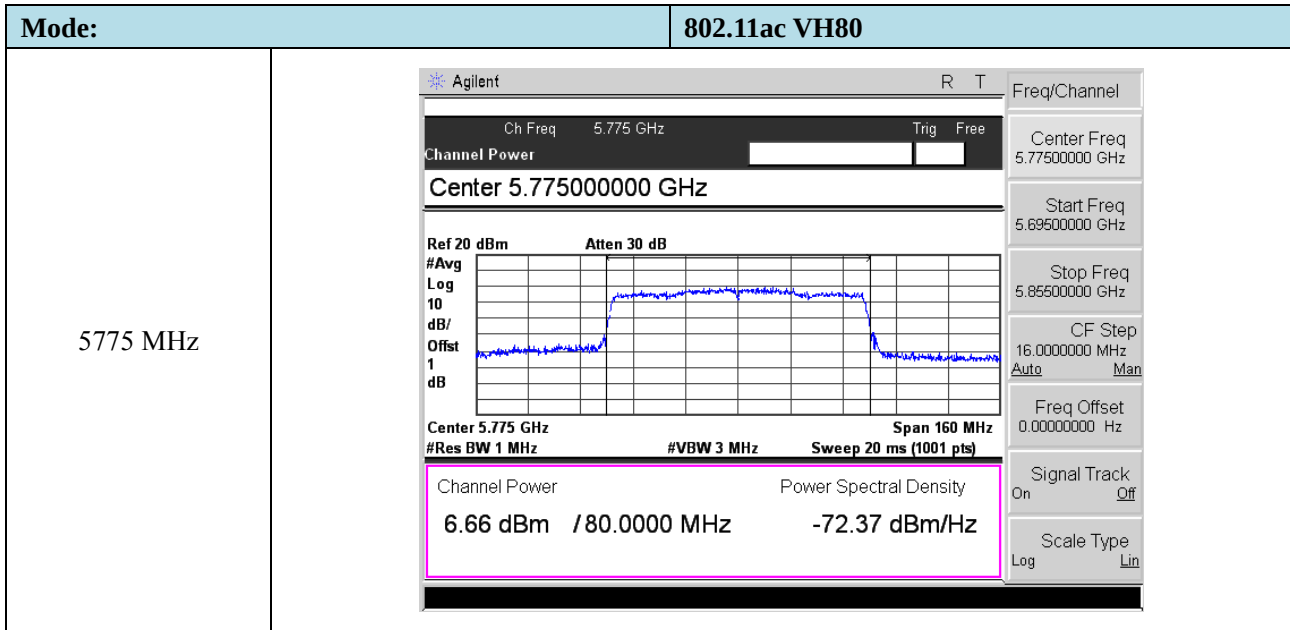

9. Radiated Spurious Emissions

9.1 Standard Applicable

According to §15.407(b)(6), Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.

According to §15.407(b)(7), The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

789033 D02 v02r01 General UNII Test Procedures New Rules v02

If radiated measurements are performed, field strength is then converted to EIRP as follows:

$$\text{EIRP} = ((E \cdot d)^2) / 30$$

where:

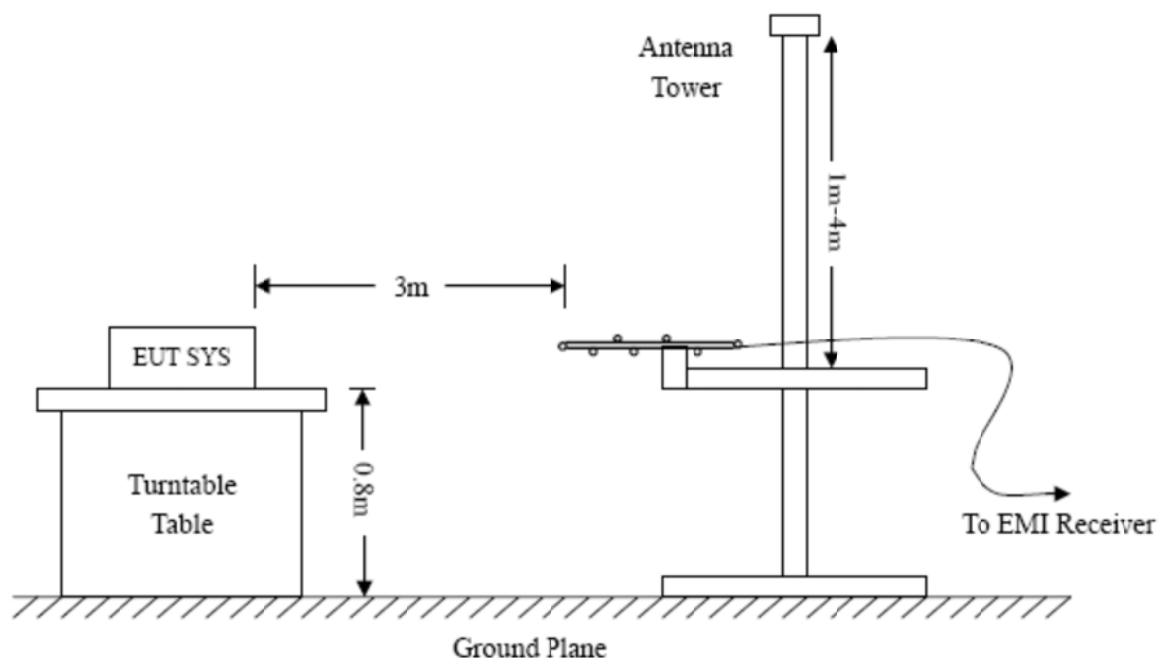
- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.

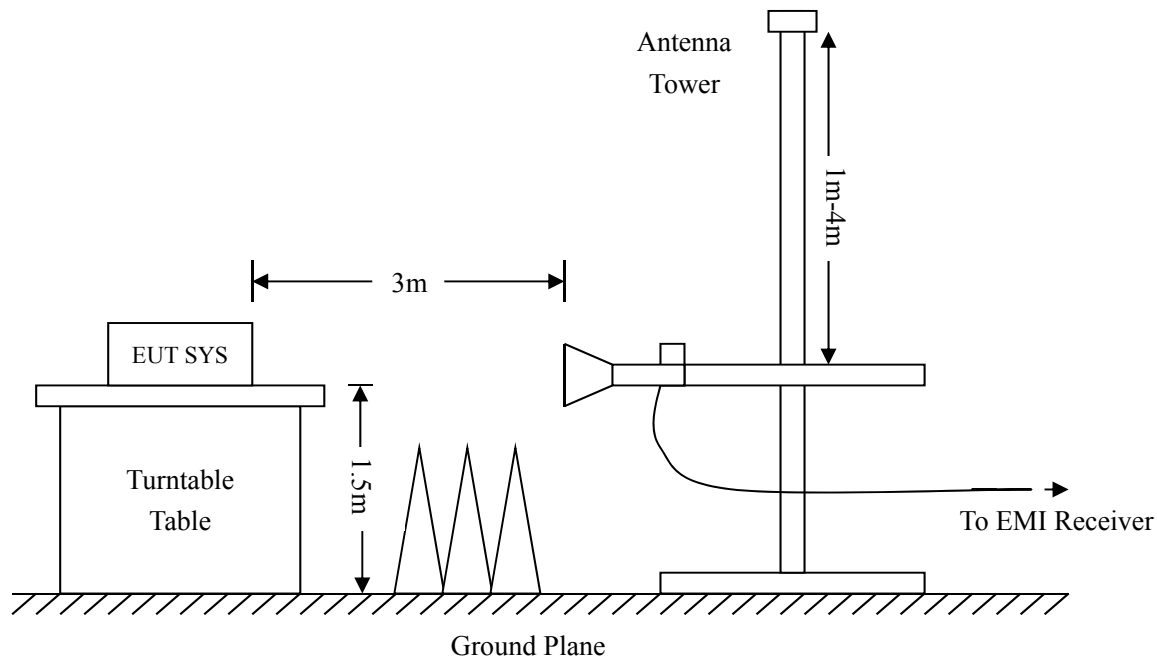
9.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.





9.3 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

9.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$


9.5 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

- Spurious Emission From 30 MHz to 1 GHz
- 5150-5250MHz


802.11a(Worst case)

Test Channel	5180MHz	Polarity:	Horizontal
--------------	---------	-----------	------------

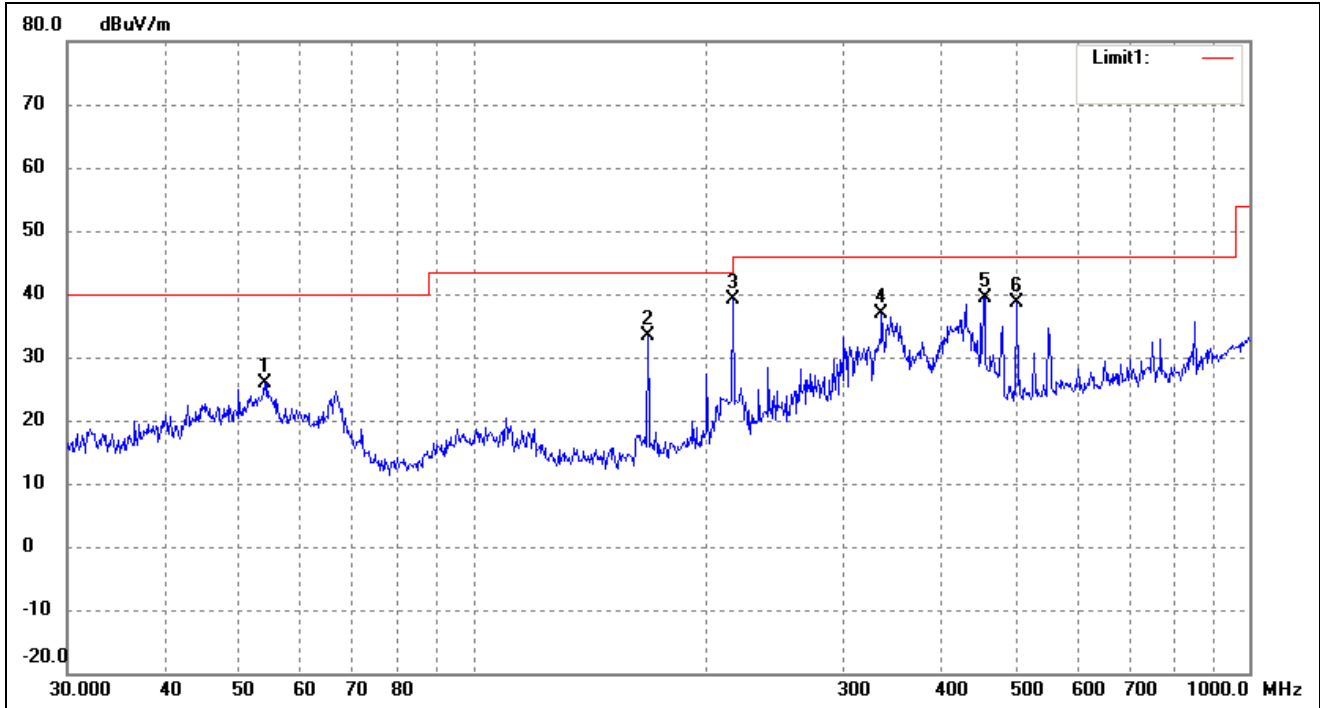


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	53.8818	38.92	-12.97	25.95	40.00	-14.05	220	100	peak
2	167.8243	48.84	-15.48	33.36	43.50	-10.14	90	100	peak
3	216.0240	50.95	-11.73	39.22	46.00	-6.78	149	100	peak
4	336.0352	43.40	-6.62	36.78	46.00	-9.22	118	100	peak
5	455.9058	45.84	-6.37	39.47	46.00	-6.53	84	100	peak
6	501.1790	44.49	-5.98	38.51	46.00	-7.49	303	100	peak

802.11a			
Test Channel	5180MHz	Polarity:	Vertical

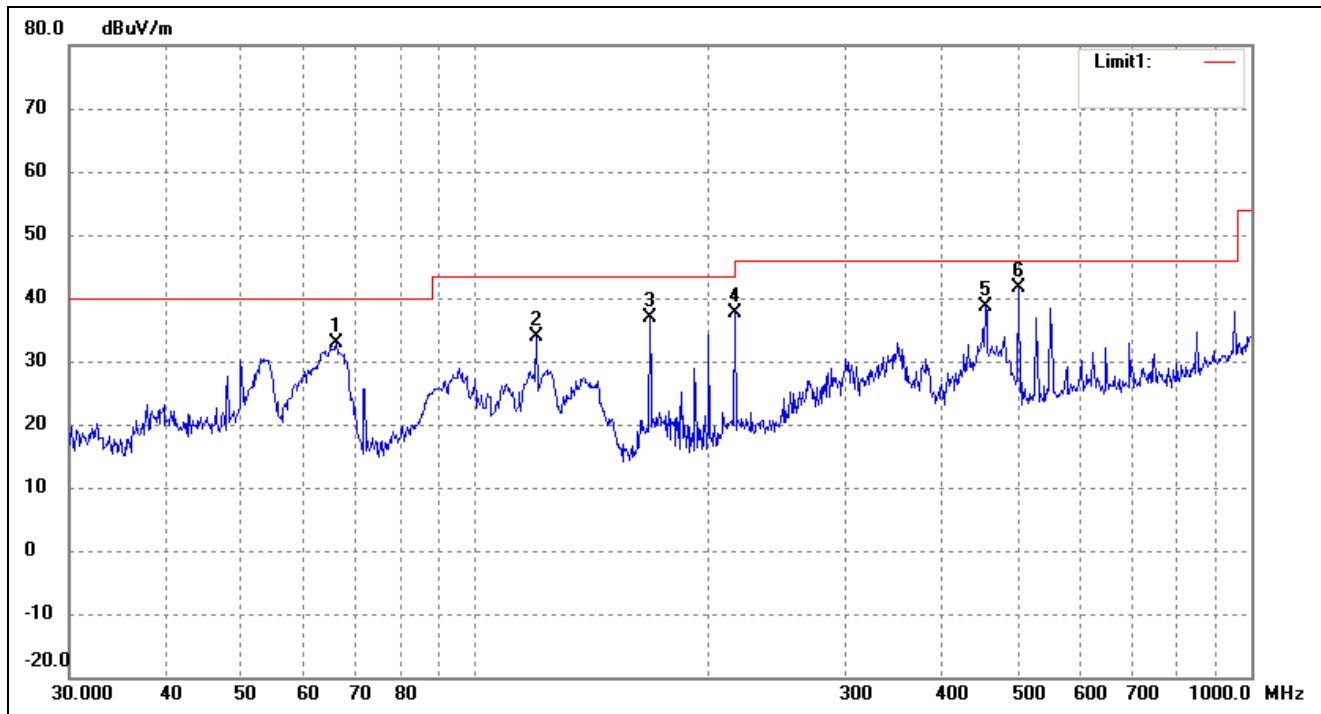

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	66.2662	48.58	-15.73	32.85	40.00	-7.15	64	100	peak
2	119.8556	49.40	-15.44	33.96	43.50	-9.54	314	100	peak
3	167.8243	52.44	-15.48	36.96	43.50	-6.54	69	100	peak
4	216.0240	49.43	-11.73	37.70	46.00	-8.30	287	100	peak
5	454.3100	45.07	-6.40	38.67	46.00	-7.33	183	100	peak
6	501.1790	47.67	-5.98	41.69	46.00	-4.31	198	100	peak

802.11a(Worst case)			
Test Channel	5200MHz	Polarity:	Horizontal

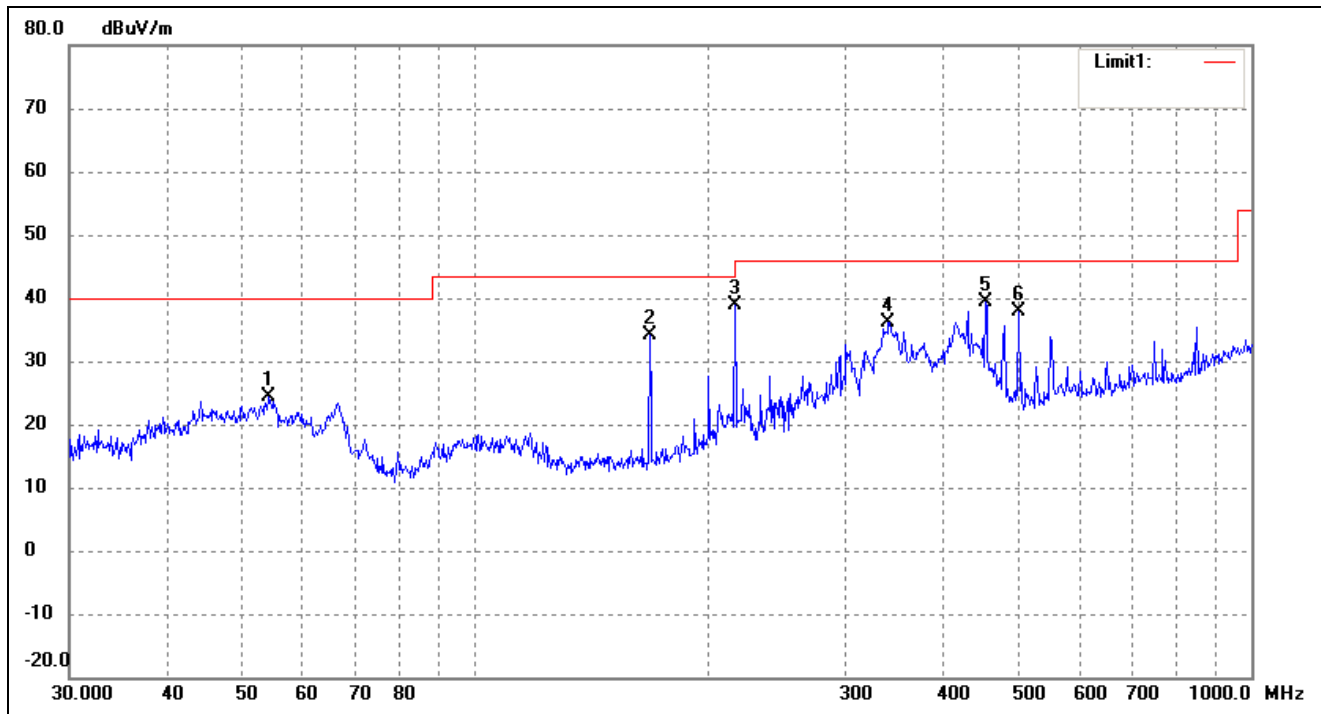

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	54.2610	37.35	-13.05	24.30	40.00	-15.70	60	100	peak
2	167.8243	49.58	-15.48	34.10	43.50	-9.40	153	100	peak
3	216.0240	50.49	-11.73	38.76	46.00	-7.24	76	100	peak
4	340.7817	42.74	-6.51	36.23	46.00	-9.77	106	100	peak
5	454.3100	45.78	-6.40	39.38	46.00	-6.62	76	100	peak
6	501.1790	43.80	-5.98	37.82	46.00	-8.18	287	100	peak

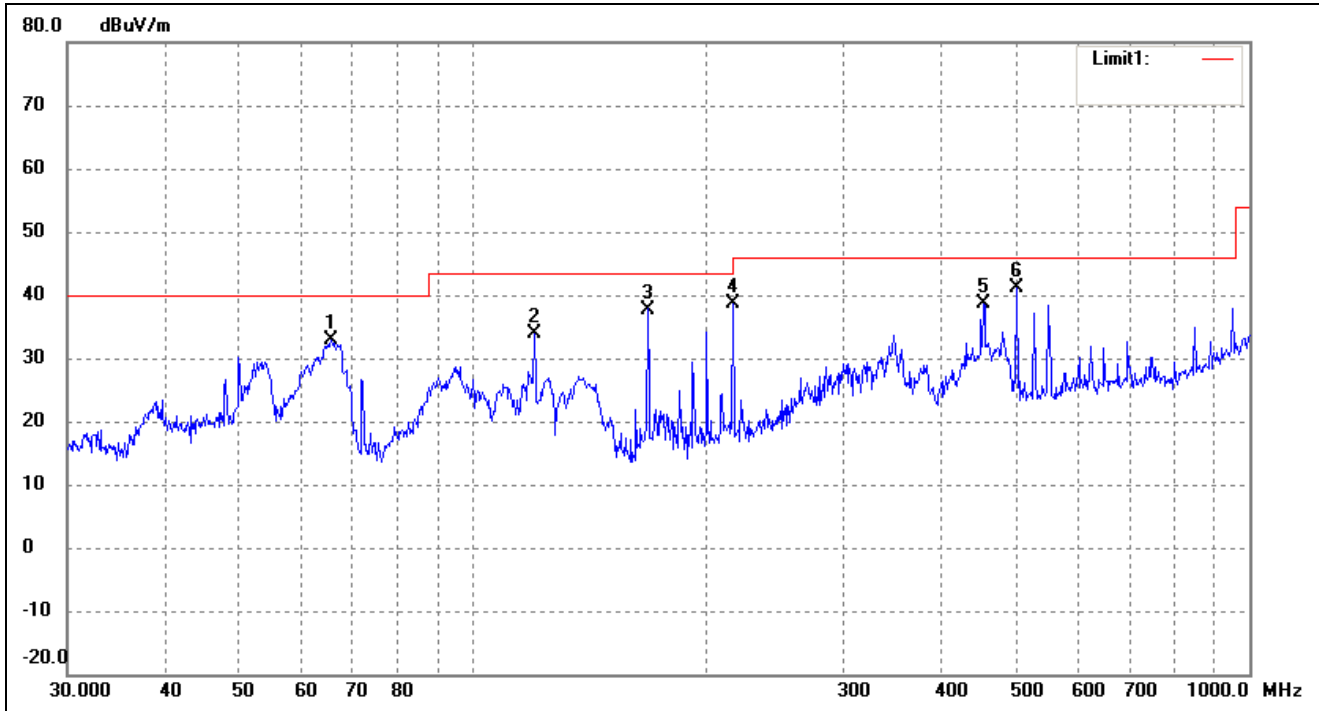
802.11a(Worst case)

Test Channel

5200MHz


Polarity:

Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	65.5727	48.36	-15.45	32.91	40.00	-7.09	356	100	peak
2	119.8556	49.41	-15.44	33.97	43.50	-9.53	96	100	peak
3	167.8243	53.23	-15.48	37.75	43.50	-5.75	67	100	peak
4	216.0240	50.34	-11.73	38.61	46.00	-7.39	95	100	peak
5	454.3100	45.06	-6.40	38.66	46.00	-7.34	281	100	peak
6	501.1790	47.14	-5.98	41.16	46.00	-4.84	245	100	peak

802.11a(Worst case)			
Test Channel	5240MHz	Polarity:	Horizontal

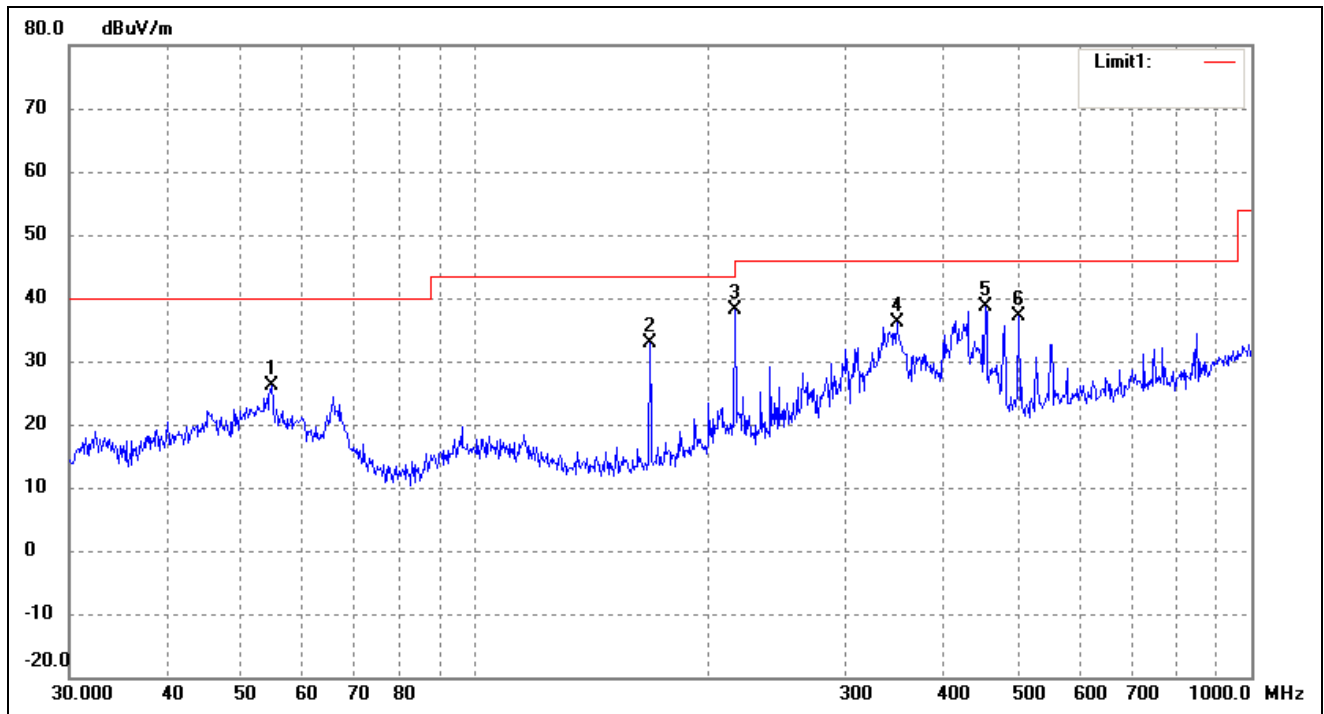

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	54.6429	39.36	-13.12	26.24	40.00	-13.76	159	100	peak
2	167.8243	48.30	-15.48	32.82	43.50	-10.68	139	100	peak
3	216.0240	49.95	-11.73	38.22	46.00	-7.78	92	100	peak
4	349.2500	42.49	-6.48	36.01	46.00	-9.99	140	100	peak
5	454.3100	45.11	-6.40	38.71	46.00	-7.29	312	100	peak
6	501.1790	43.20	-5.98	37.22	46.00	-8.78	114	100	peak

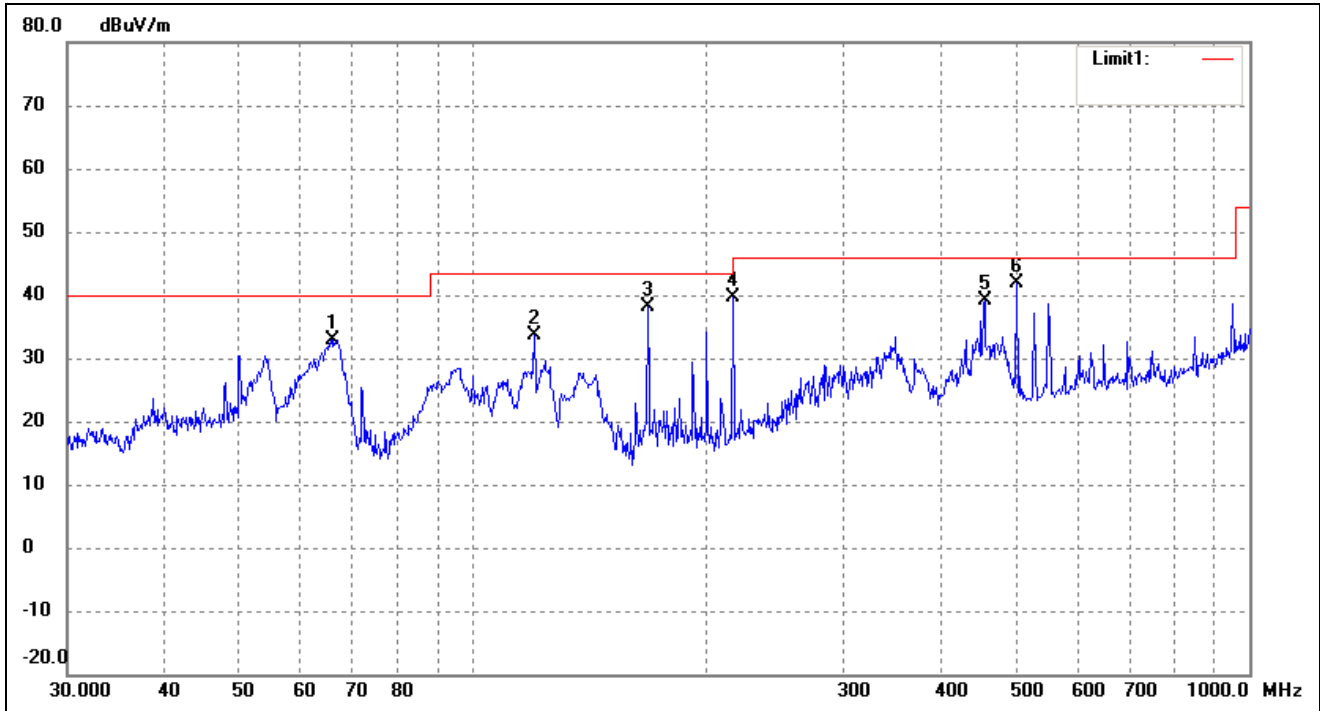
802.11a(Worst case)

Test Channel

5240MHz

Polarity:

Vertical




No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	66.0342	48.61	-15.63	32.98	40.00	-7.02	86	100	peak
2	119.8556	49.12	-15.44	33.68	43.50	-9.82	111	100	peak
3	167.8243	53.71	-15.48	38.23	43.50	-5.27	99	100	peak
4	216.0240	51.31	-11.73	39.58	46.00	-6.42	119	100	peak
5	455.9058	45.47	-6.37	39.10	46.00	-6.90	94	100	peak
6	501.1790	47.93	-5.98	41.95	46.00	-4.05	203	100	peak

➤ 5725-5850MHz

802.11a(worst case)

Test Channel	5745MHz	Polarity:	Horizontal
--------------	---------	-----------	------------

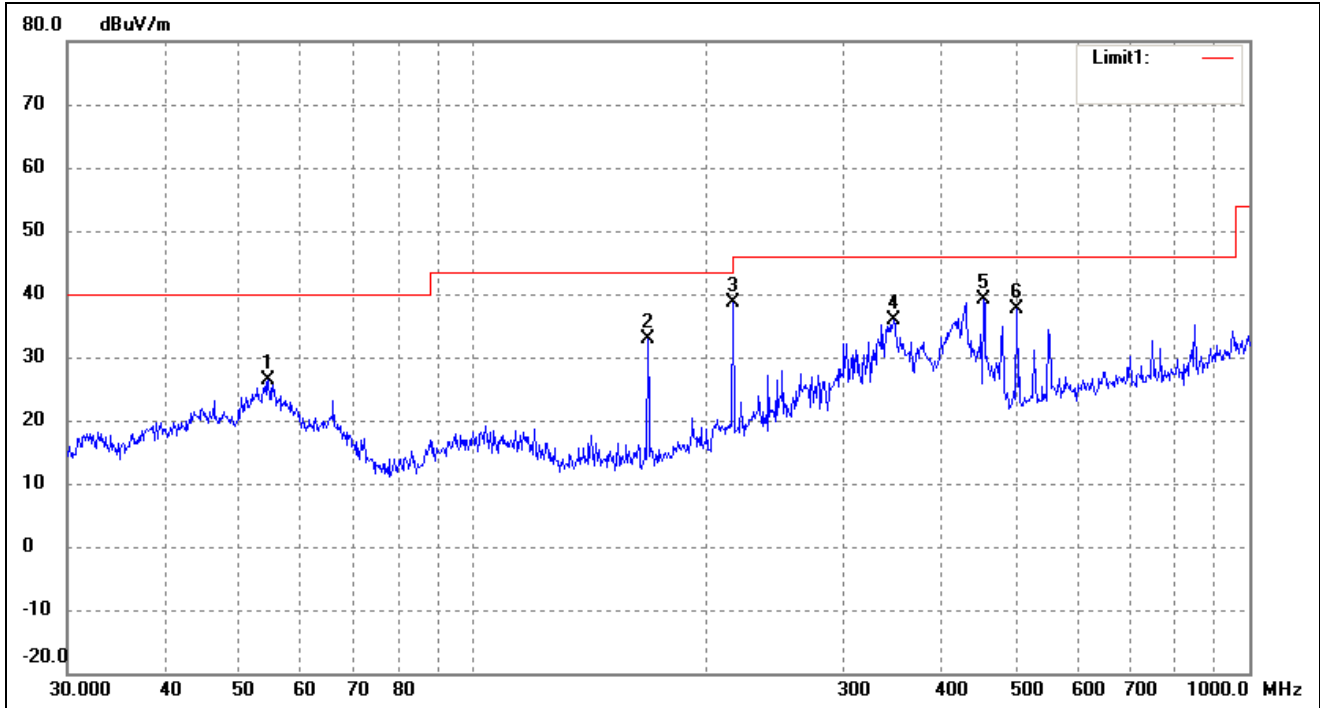

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	54.4516	39.37	-13.09	26.28	40.00	-13.72	238	100	peak
2	167.8243	48.42	-15.48	32.94	43.50	-10.56	99	100	peak
3	216.0240	50.42	-11.73	38.69	46.00	-7.31	113	100	peak
4	348.0274	42.44	-6.48	35.96	46.00	-10.04	119	100	peak
5	454.3100	45.60	-6.40	39.20	46.00	-6.80	255	100	peak
6	501.1790	43.73	-5.98	37.75	46.00	-8.25	225	100	peak

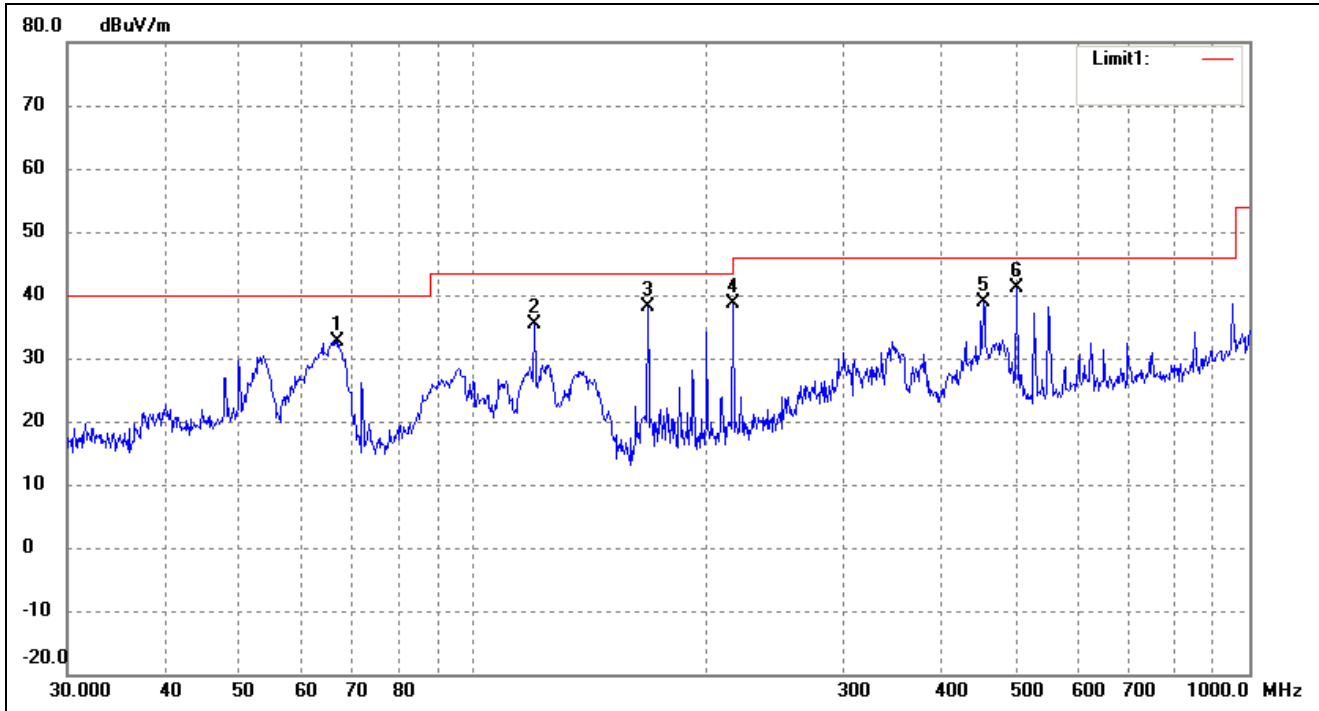
802.11a(worst case)

Test Channel

5745MHz

Polarity:

Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	66.9669	48.71	-15.99	32.72	40.00	-7.28	274	100	peak
2	119.8556	50.90	-15.44	35.46	43.50	-8.04	90	100	peak
3	167.8243	53.65	-15.48	38.17	43.50	-5.33	326	100	peak
4	216.0240	50.39	-11.73	38.66	46.00	-7.34	101	100	peak
5	454.3100	45.40	-6.40	39.00	46.00	-7.00	173	100	peak
6	501.1790	47.09	-5.98	41.11	46.00	-4.89	276	100	peak

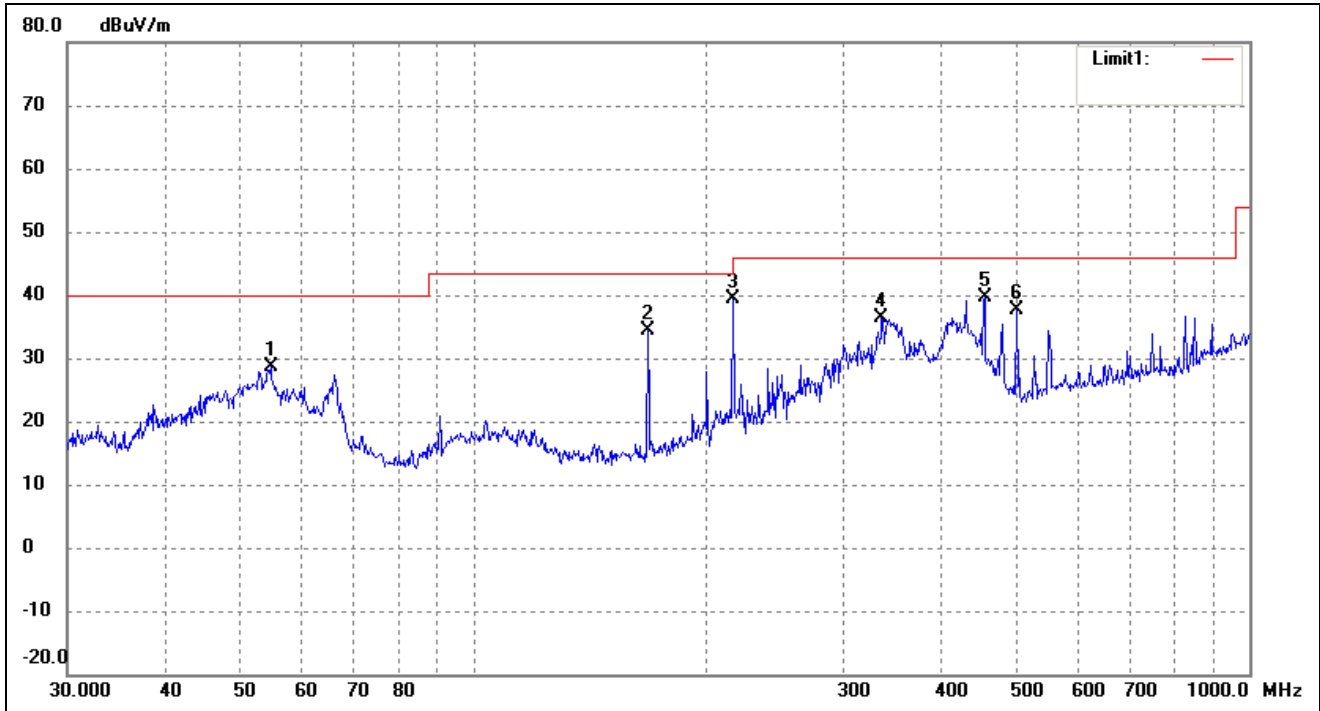
802.11a(worst case)

Test Channel

5785MHz

Polarity:

Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	54.8348	41.69	-13.17	28.52	40.00	-11.48	337	100	peak
2	167.8243	49.97	-15.48	34.49	43.50	-9.01	199	100	peak
3	216.0240	51.07	-11.73	39.34	46.00	-6.66	68	100	peak
4	336.0352	42.99	-6.62	36.37	46.00	-9.63	92	100	peak
5	455.9058	45.95	-6.37	39.58	46.00	-6.42	131	100	peak
6	501.1790	43.71	-5.98	37.73	46.00	-8.27	302	100	peak

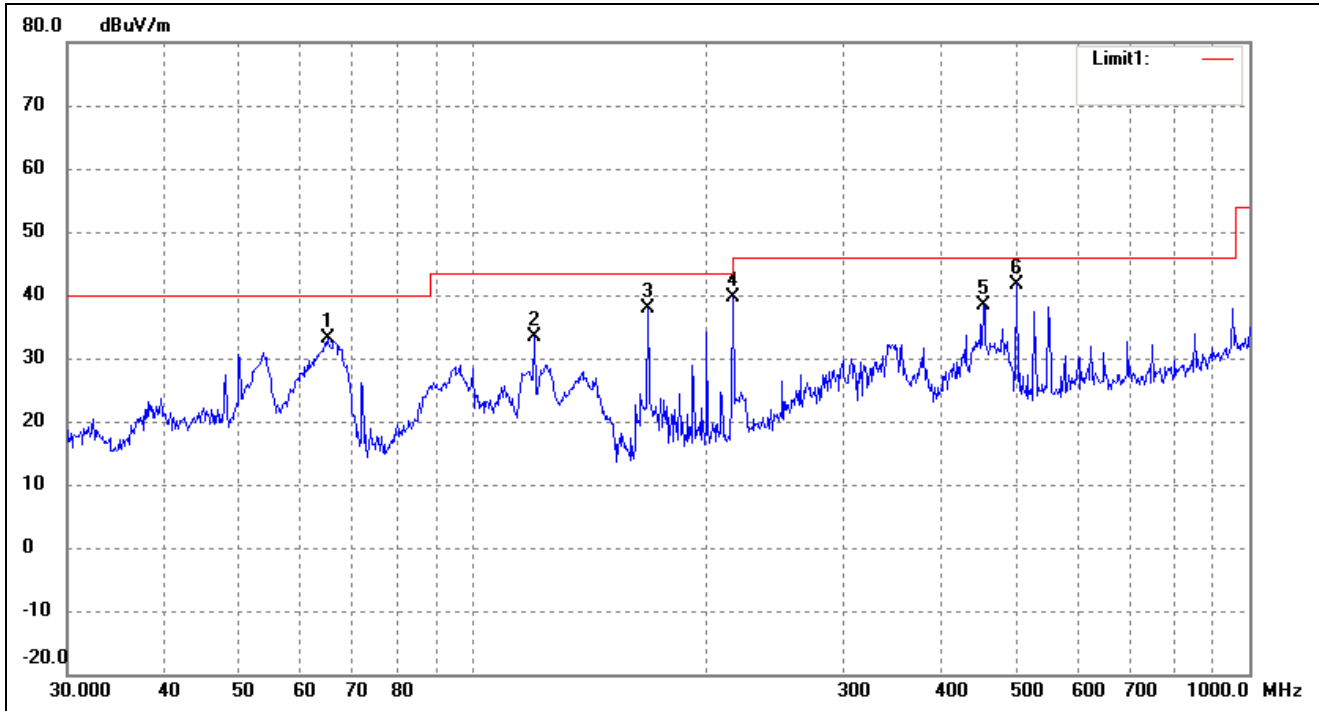
802.11a(worst case)

Test Channel

5785MHz


Polarity:

Vertical




No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	64.8865	48.35	-15.21	33.14	40.00	-6.86	98	100	peak
2	119.8556	48.93	-15.44	33.49	43.50	-10.01	105	100	peak
3	167.8243	53.26	-15.48	37.78	43.50	-5.72	114	100	peak
4	216.0240	51.33	-11.73	39.60	46.00	-6.40	128	100	peak
5	454.3100	44.83	-6.40	38.43	46.00	-7.57	261	100	peak
6	501.1790	47.73	-5.98	41.75	46.00	-4.25	282	100	peak

802.11a(worst case)			
Test Channel	5825MHz	Polarity:	Horizontal

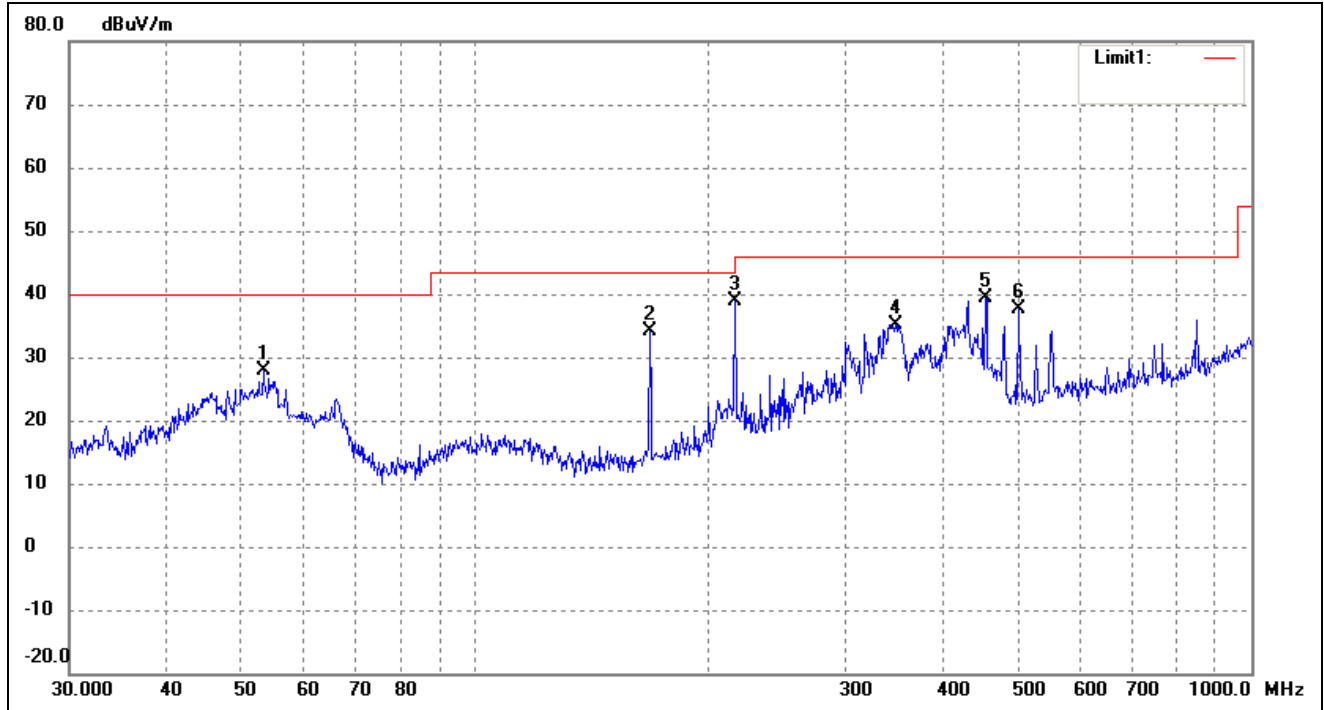

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	53.3179	40.68	-12.92	27.76	40.00	-12.24	272	100	peak
2	167.8243	49.60	-15.48	34.12	43.50	-9.38	123	100	peak
3	216.0240	50.72	-11.73	38.99	46.00	-7.01	52	100	peak
4	348.0274	41.71	-6.48	35.23	46.00	-10.77	147	100	peak
5	454.3100	45.87	-6.40	39.47	46.00	-6.53	192	100	peak
6	501.1790	43.49	-5.98	37.51	46.00	-8.49	124	100	peak

802.11a(worst case)			
Test Channel	5825MHz	Polarity:	Vertical

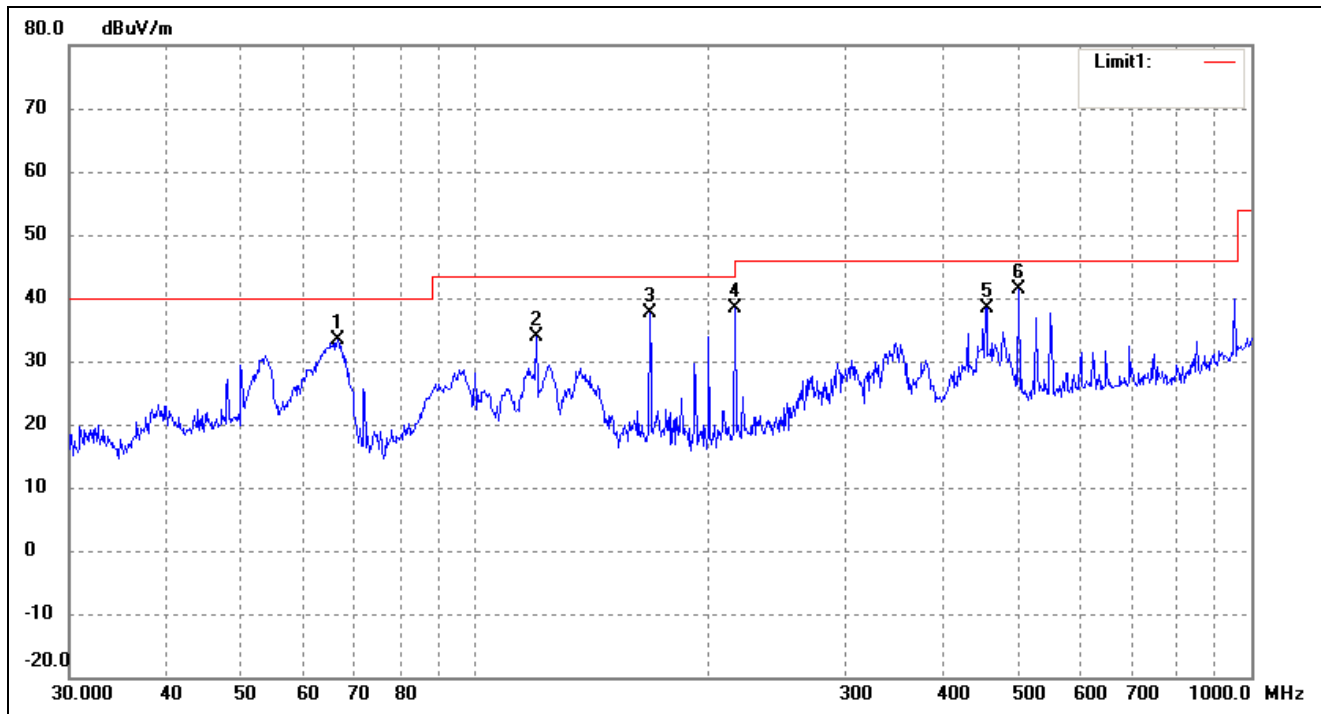


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	66.4989	49.18	-15.82	33.36	40.00	-6.64	55	100	peak
2	119.8556	49.43	-15.44	33.99	43.50	-9.51	189	100	peak
3	167.8243	53.07	-15.48	37.59	43.50	-5.91	110	100	peak
4	216.0240	50.13	-11.73	38.40	46.00	-7.60	114	100	peak
5	455.9058	44.78	-6.37	38.41	46.00	-7.59	162	100	peak
6	501.1790	47.28	-5.98	41.30	46.00	-4.70	125	100	peak

➤ Spurious Emission above 1GHz


802.11a- Restricted Bandedge (worst case)

Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)
--------------	-------------------	-----------	----------------------

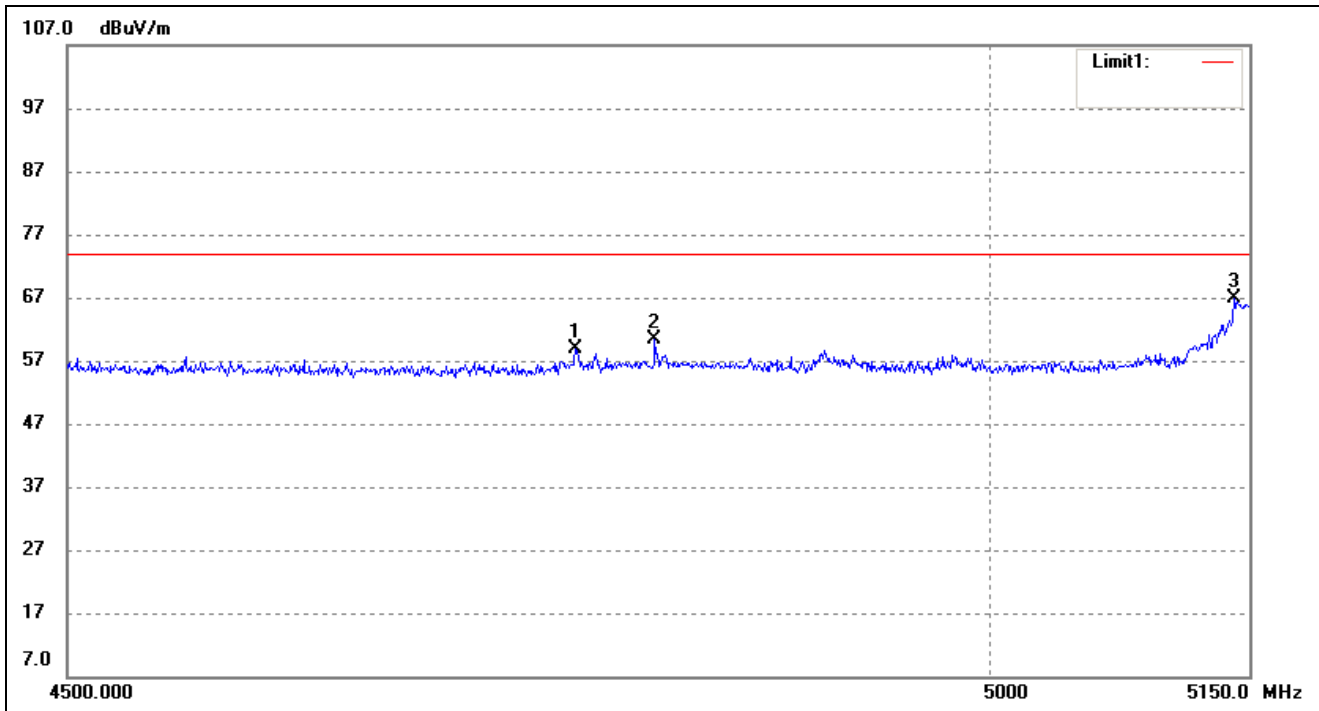

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	4768.791	65.13	-6.24	58.89	74.00	-15.11	123	100	peak
2	4812.094	66.59	-6.11	60.48	74.00	-13.52	52	100	peak
3	5140.975	72.18	-5.24	66.94	74.00	-7.06	147	100	peak

802.11a- Restricted Bandedge (worst case)			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)

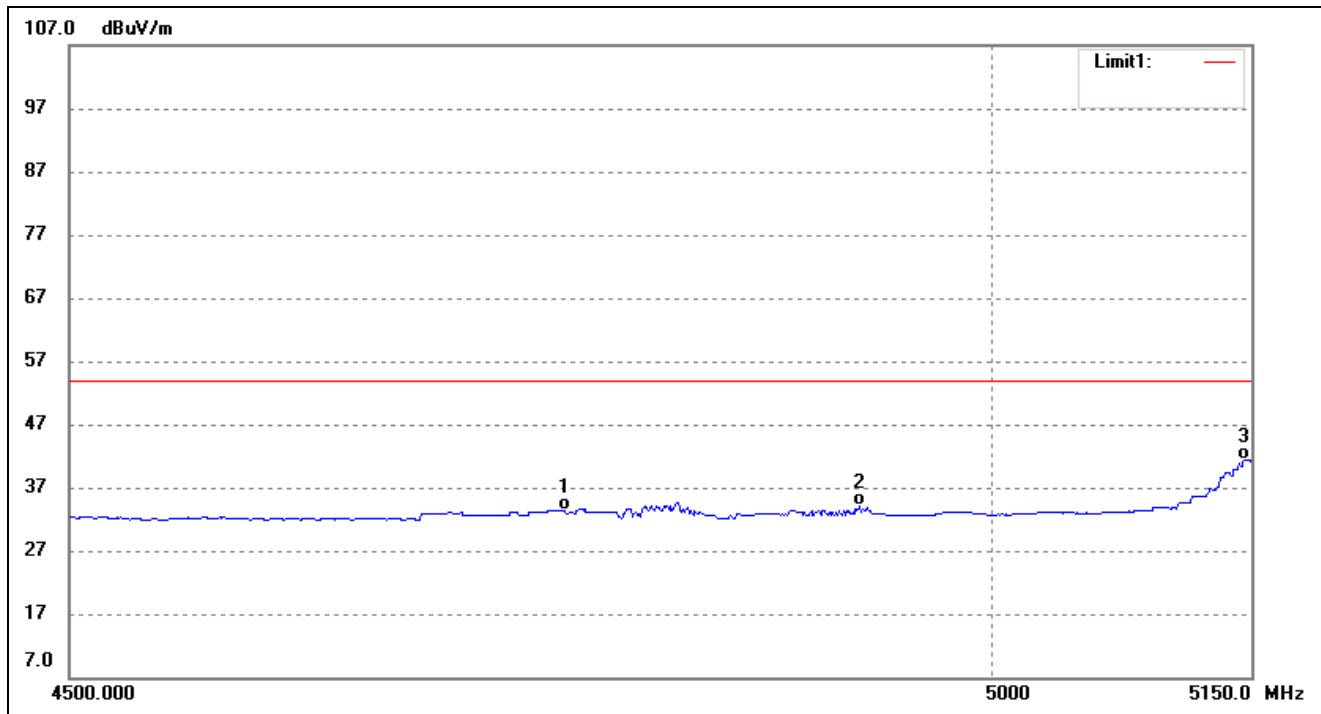

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	4761.718	39.66	-6.25	33.41	54.00	-20.59	55	100	AVG
2	4925.070	40.05	-5.80	34.25	54.00	-19.75	189	100	AVG
3	5145.833	46.63	-5.22	41.41	54.00	-12.59	110	100	AVG

Note: The Restricted Bandedge was tested in Horizontal /Vertical and the worst case position data was reported.

➤ For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11a) (worst case)

➤ Harmonics And Spurious Emissions

Frequency MHz	Detector	Meter Reading dBuV	Direction Degree	Polar H / V	Antenna Loss dB	Cable loss dB	Amplifier dB	Correction Amplitude dBuV/m	Limit dBuV/m	Margin dB
Low Channel (5180MHz)										
10360	PK	51.15	360	V	40.7	10.9	39.6	63.15	74	-10.85
10360	PK	49.61	360	H	40.7	10.9	39.6	61.61	74	-10.85
10360	AV	36.10	360	V	40.7	10.9	39.6	48.10	54	9.15
10360	AV	35.01	360	H	40.7	10.9	39.6	47.01	54	9.15
High Channel (5240MHz)										
10480	PK	51.86	360	V	40.7	10.9	39.6	63.86	74	-10.14
10480	PK	50.90	360	H	40.7	10.9	39.6	62.90	74	-11.10
10480	AV	35.71	360	V	40.7	10.9	39.6	47.71	54	-6.29
10480	AV	34.92	360	H	40.7	10.9	39.6	46.92	54	-7.08
Low Channel (5745MHz)										
11490	PK	55.8	360	V	38.9	9.8	40.1	63.2	74	-10.8
11490	PK	58.0	360	H	38.9	9.8	40.1	65.5	74	-8.5
11490	AV	35.4	360	V	38.9	9.8	40.1	42.6	54	-11.4
11490	AV	38.2	360	H	38.9	9.8	40.1	47.7	54	-6.3
High Channel (5825MHz)										
11610	PK	56.2	360	V	38.9	9.8	40.1	65.6	74	-8.4
11610	PK	56.0	360	H	38.9	9.8	40.1	64.8	74	-9.2
11610	AV	38.2	360	V	38.9	9.8	40.1	46.0	54	-8.0
11610	AV	37.6	360	H	38.9	9.8	40.1	47.6	54	-6.4

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-43.87	-27
Highest	Above 5350	-44.72	-27

Note: the data just list the worst cases

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-38.24	-27
	5715 to 5725	-28.60	-17
Highest	5850 to 5860	-30.87	-17
	Above 5860	-35.88	-27

Note: the data just list the worst cases

Note: this EUT was tested in the low, high channel and the worst case position data was reported.

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

10. Frequency Stability

10.1 Standard Applicable

According to §15.407(g), Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

10.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

10.3 Summary of Test Results/Plots

U-NII-1:5150-5250MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	5.0	-30	30	0.0057
100%		-20	54	0.0103
100%		-10	74	0.0141
100%		0	32	0.0060
100%		+10	51	0.0096
100%		+20	53	0.0102
100%		+30	45	0.0086
100%		+40	76	0.0145
100%		+50	61	0.0117
Low Battery power	5.50	+20	60	0.0115
High Battery power	4.50	+20	67	0.0129

U-NII-1:5725-5850MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	5.0	-30	62	0.0108
100%		-20	80	0.0138
100%		-10	32	0.0055
100%		0	54	0.0093
100%		+10	59	0.0101
100%		+20	57	0.0098
100%		+30	38	0.0065
100%		+40	50	0.0087
100%		+50	60	0.0104
Low Battery power	5.50	+20	49	0.0085
High Battery power	4.50	+20	69	0.0119

***** END OF REPORT *****