



Buddi Technical and User Publications

SureTag Release Tool V2
Device Installation Guide

Date of Publication: 09/2025

Revision No. 1.0 : 1.0

COMMERCIAL IN CONFIDENCE

+1 844-283-3487

sales@buddi.com

+44 800-978-8800

www.buddi.com

SureTag Release Tool V2 Device Installation Guide



Introduction

Use this Guide to assist with device usage and setup of the SureTag Release Tool V2.

SureTag Release Tool V2 is equipped with RF logging capability to link fitted device removal with the Wearer device report in the monitoring software

Device assignment and Wearer profile are set up remotely, refer to the Eagle User Guides.

SureTag Release Tool V2 Equipment



SureTag Release Tool V2 †



USB C Lead



USB to Mains Adapter*

† SureTag Release Tool V2 is supplied as part of the Field Officer Kit
* The USB to mains adapter has attachments suitable for regional applications

Charge SureTag Release Tool V2



The SureTag Release Tool V2 has a (USB C port) LED, on the device handle, to display the charging status of the device. Connect the USB C lead to the SureTag Release Tool V2 charging port and plug into a mains socket using the USB to mains power adapter.

LED Status	SureTag Release Tool V2 Battery Status
RED BLINK	SureTag Release Tool V2 battery low alert
GREEN BLINK	SureTag Release Tool V2 battery charging
GREEN SOLID	SureTag Release Tool V2 battery fully charged

Setup SureTag Release Tool V2


! NOTE Device and Wearer alerts are setup in the Wearer profile and are not active by default – refer to the Eagle User Guides

Make sure SureTag Release Tool V2 is ready for operation; charged and tested for communication response before instalment.

Release SureTag

! NOTE The fitted device will issue a strap alert if it is assigned to a Wearer profile when released

Discard all used locking plates after the device is released from the Wearer

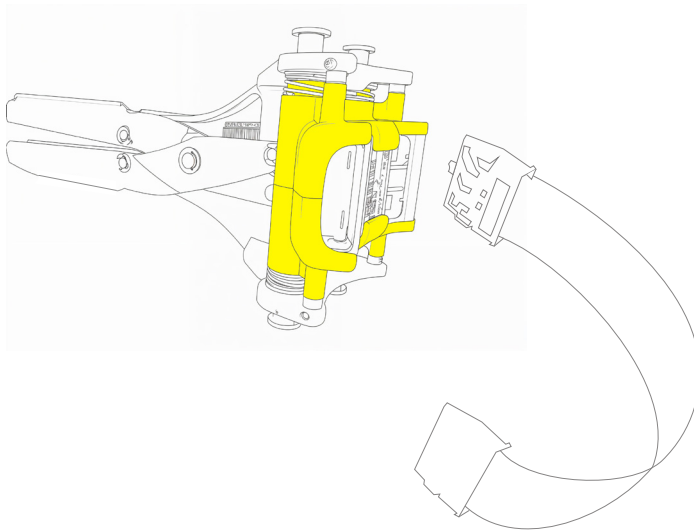

- Open the SureTag release tool by pulling the handles out and position the open jaws centrally over the SureTag
- Close the tool fully by squeezing both handles
- Pull the strap end out of the SureTag on the side of the tool where the pins are – indicated by an arrow on the yellow tool casing and a red dot on the top of the tool grip above the casing – to release it
- Re-fit the tool on the SureTag in the opposite direction to remove the strap completely

Regulatory Information

FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.