

TEST REPORT

 CTK Co., Ltd. (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 17142, Korea Tel: +82-1511-9871 Fax: +82-31-624-9501	REPORT No.: CTK-2026-02121 Page (1) / (25) Pages	
---	--	--

1. Applicant

- Name : KYUNGWOO SYSTEC INC.
- Address : #401, Daeryung Post Tower 5, 68, Digital-ro 9, Geumcheon-gu, Seoul,
South Korea
- Date of Receipt : 2026-05-18

2. Manufacturer

- Name : KYUNGWOO SYSTEC INC.

3. Use of Report : For FCC Certification

4. Test sample / Model : Intelligent Proximity Alert System / PAS-K01-12

5. Date(s) of test : 2026-07-15 to 2026-07-31

6. Test Standard (Method) used : FCC 47 CFR part 15 subpart C 15.250

7. Testing Environment : refer to 6 page

8. Test Results : refer to 6 page

9. Location of Test : ☒ Permanent Testing Lab ☐ On Site Testing (Address : 5, Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Republic of Korea)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
This report cannot be reproduced or copied without the written consent of CTK.

Approval	Tested by:  (Signature) GWANYONG KIM	Technical Manager:  (Signature) Young-taek Lee
----------	--	---

CTK Co., Ltd.



2026-07-31



 CTK Co., Ltd. (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 17142, Korea Tel: +82-1511-9871 Fax: +82-31-624-9501	REPORT No.: CTK-2026-02121 Page (2) / (25) Pages	
---	--	--

REPORT REVISION HISTORY

Date	Revision	Page No
2026-07-31	Issued (CTK-2026-02121)	All

***This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd.
 This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.***

TABLE OF CONTENTS

1. General Information	4
1.1 Applicant Information	4
1.2 Product Information	4
1.3 Peripheral Devices	4
2. Accreditations	5
2.1 Laboratory Accreditations and Listings	5
2.2 Calibration Details of Equipment Used for Measurement	5
3. Test Specifications	6
3.1 Standards	6
3.2 Testing Environment	6
3.3 Mode of operation during the test	7
3.4 Measurement Uncertainty	7
3.5 Test Software	7
4. Conformance requirements	8
4.1 -10 dB bandwidth	8
4.2 Radiated emission	10
4.3 AC Conducted Emissions	23
APPENDIX A - Test Equipment Used For Tests	25

 CTK Co., Ltd. (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 17142, Korea Tel: +82-1511-9871 Fax: +82-31-624-9501	REPORT No.: CTK-2026-02121 Page (4) / (25) Pages	
---	--	--

1. General Information

1.1 Applicant Information

Company	KYUNGWOO SYSTECH INC.
Contact Point	#401, Daeryung Post Tower 5, 68, Digital-ro 9, Geumcheon-gu, Seoul, South Korea
Contact Person	Name : Yong-jun Chang E-mail : cgsong@kyungwoo.com Tel : +82-70-5102-0199 Fax : +82-02-985-8087

1.2 Product Information

Product Description	Intelligent Proximity Alert System
FCC ID	ZE8-PAS-K01-12-B
Basic Model name	PAS-K01-12
Variant Model name	-
Operating Frequency	6 489.6 MHz
Number of channels	1 (Ch : 5)
Type of Modulation	BPM-BPSK
Antenna type	PCB Antenna
Antenna gain	2.09 dBi
Power Source	DC (12, 24) V (External Power Supply)
Test Software (firmware)	6.2.0.0
Hardware Rev	D

1.3 Peripheral Devices

Device	Manufacturer	Model No.	Serial No.
Note Computer	HP	15-bs563TU	CND7253R6N
AC/DC Adapter	HP	HSTNN-CA40	7628011101
IPAS EXTENSION	-	1-7020-30002	3725
AC ADAPTER	-	YHY-12002500	DS120030T-W

 CTK Co., Ltd. (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 17142, Korea Tel: +82-1511-9871 Fax: +82-31-624-9501	REPORT No.: CTK-2026-02121 Page (5) / (25) Pages	
---	--	--

2. Accreditations

2.1 Laboratory Accreditations and Listings

Country	Agency	Registration Number
USA	FCC	805871
CANADA	ISED	8737A CAB ID : KR0025
KOREA	NRRA	KR0025

2.2 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

 CTK Co., Ltd. (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 17142, Korea Tel: +82-1511-9871 Fax: +82-31-624-9501	REPORT No.: CTK-2026-02121 Page (6) / (25) Pages	
---	--	--

3. Test Specifications

3.1 Standards

FCC Part Section(s)	Requirement(s)	Status (Note 1)
15.203	Antenna Requirement	C
15.250(a)(b)	-10 dB bandwidth	C
15.250(d)(e) 15.209	Radiated measurement	C
15.207	AC Power line Conducted Emissions	C
Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable		
Note 2: The data in this test report are traceable to the national or international standards.		
Note 3: The sample was tested according to the following specification: ANSI C63.10-2020.		

3.2 Testing Environment

Test Item		Test Date	Temperature (±1 °C)	Relative Humidity (±3 % R.H.)
-10 dB bandwidth		2026-07-21	24	67
Radiated Emissions	1) 9 kHz to 30 MHz	2026-07-16	24	57
	2) 30 MHz to 1 GHz	2026-07-16		
	3) 1 GHz to 18 GHz	2026-07-15, 2026-07-17	24, 25	32, 34
	4) 1 GHz to 40 GHz	2026-07-17	25	34
AC Power line Conducted Emissions		2026-07-31	25	56

 CTK Co., Ltd. (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 17142, Korea Tel: +82-1511-9871 Fax: +82-31-624-9501	REPORT No.: CTK-2026-02121 Page (7) / (25) Pages	
---	---	--

3.3 Mode of operation during the test

The EUT is operated in a manner representative of the typical of the equipments.
 During at testing, system components were manipulated within the confines of typical usage to maximize each emission. All modulation modes were tests.
 The results are attached only for the DC 12 V power source, considering it the worst case.

Test Frequency

Ch : 5	6 489.6 MHz
---------------	-------------

Test mode

Transmit & Receive Status (DC 12 V)
Transmit & Receive Status (DC 24 V)

3.4 Measurement Uncertainty

The value of the measurement uncertainty for the measurement of each parameter.
 Coverage factor $k = 2$, Confidence levels of 95 %

Description	Uncertainty
Occupied Bandwidth	0.1 MHz (C.L. : Approx. 95%, $k = 2$)
Radiated Emissions (below 1 000 MHz)	4.11 dBuV (C.L.: Approx. 95 %, $k = 2$)
Radiated Emissions (above 1 000 MHz)	4.34 dBuV (C.L.: Approx. 95 %, $k = 2$)
AC Power line Conducted Emissions	2.06 dBuV (C.L.: Approx. 95 %, $k = 2$)

3.5 Test Software

Radiated Test	ES10 Ver. 2022.04.000, EP5RE Ver. 6.0.10
AC Power line Conducted Emissions	EMC32 Ver. 10.50.00

4. Conformance requirements

4.1 -10 dB bandwidth

Requirement (Part 15.250(a)(b))

The -10 dB bandwidth of a device operating under the provisions of this section must be contained within the 5925-7250 MHz band under all conditions of operation including the effects from stepped frequency, frequency hopping or other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage.


The -10 dB bandwidth of the fundamental emission shall be at least 50 MHz.

Test Procedures (Part 15.250(e)(4), ANSI C63.10-2020 : 10.1)

The frequency at which the maximum power level is measured with the peak detector is designated f_M . The peak power measurements shall be made using a spectrum analyzer or EMI receiver with a 1 MHz resolution bandwidth and a video bandwidth of 1 MHz or greater. The instrument shall be set to peak detection using the maximum-hold trace mode. The outermost 1 MHz segments above and below f_M , where the peak power falls by 10 dB relative to the level at f_M , are designated as f_H and f_L , respectively:

- For the lowest frequency bound f_L , the emission is searched from a frequency lower than f_M that has, by inspection, a peak power much lower than 10 dB less than the power at f_M and increased toward f_M until the peak power indicates 10 dB less than the power at f_M . The frequency of that segment is recorded.
- This process is repeated for the highest frequency bound f_H , beginning at a frequency higher than f_M that has, by inspection, a peak power much lower than 10 dB below the power at f_M . The frequency of that segment is recorded.
- The two recorded frequencies represent the highest f_H and lowest f_L bounds of the UWB transmission, and the -10 dB bandwidth (B_{-10}) is defined as $(f_H - f_L)$. The center frequency (f_c) is calculated from $(f_H + f_L) / 2$.
- The fractional bandwidth is defined as $2(f_H - f_L) / (f_H + f_L)$.
- Determine whether the -10 dB bandwidth $(f_H - f_L)$ is ≥ 500 MHz, or whether the fractional bandwidth $2(f_H - f_L) / (f_H + f_L)$ is ≥ 0.2 .


Test Setup



Test results

Frequency (MHz)				-10 dB Bandwidth (MHz)	
F _C	F _M	F _L	F _H	Result	Limit
6 507	6 646	6 180	6 834	654	Great than 50

See next pages for actual measured spectrum plots.

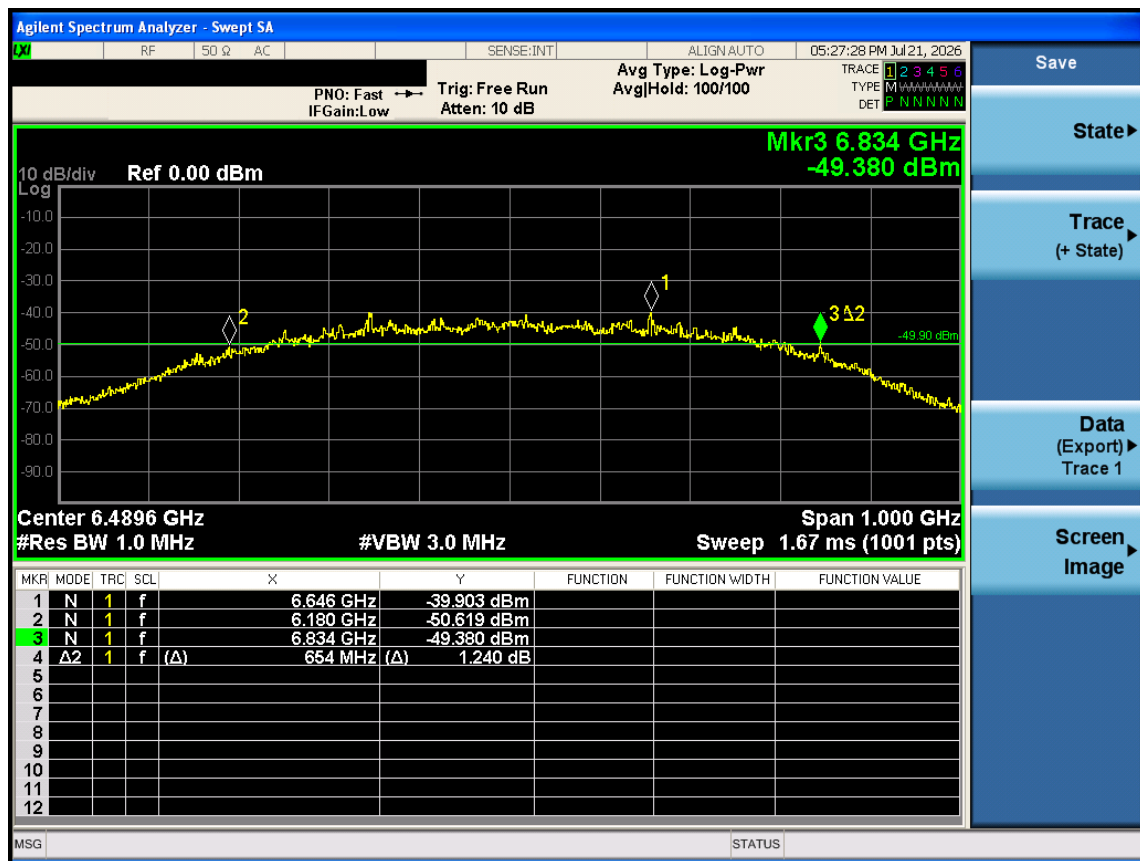

 CTK Co., Ltd. (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 17142, Korea Tel: +82-1511-9871 Fax: +82-31-624-9501	REPORT No.: CTK-2026-02121 Page (10) / (25) Pages	
---	---	--

4.2 Radiated emission

Requirement (Part 15.250(d))

§15.250(d)(4) Radiated emissions at or below 960 MHz shall not exceed the emission levels in § 15.209.

Frequency [MHz]	Field Strength [uV/m]	Field Strength [dBuV/m]	Measurement Distance [meters]
0.009 - 0.490	2400/F(kHz)	48.5 - 13.8	300
0.490 - 1.705	24000/F(kHz)	33.8 - 23	30
1.705 - 30	30	29.5	30
30 - 88	100**	40	3
88 - 216	150**	43.5	3
216 - 960	200**	46	3
Above 960	500	54	3

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz, 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241

§15.250(d)(1) The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following RMS average limits based on measurements using a 1 MHz resolution bandwidth:

Frequency in MHz	EIRP in dBm	Field Strength at 3 m [dBuV/m]
960 - 1 610	-75.3	20
1 610 - 1 990	-63.3	32
1 990 - 3 100	-61.3	34
3 100 - 5 925	-51.3	44
5 925 - 7 250	-41.3	54
7 250 - 10 600	-51.3	44
Above 10 600	-61.3	34

§15.250(d)(2) In addition to the radiated emission limits specified in the table in paragraph (d)(1) of this section, transmitters operating under the provisions of this section shall not exceed the following RMS average limits when measured using a resolution bandwidth of no less than 1 kHz:

Frequency in MHz	EIRP in dBm	Field Strength at 3 m [dBuV/m]
1 164 - 1 240	-85.3	10
1 559 - 1 610	-85.3	10

§15.250(d)(3) There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs and this 50 MHz bandwidth must be contained within the 5925-7250 MHz band. The peak EIRP limit is $20 \log (RBW/50)$ dBm where RBW is the resolution bandwidth in megahertz that is employed by the measurement instrument. RBW shall not be lower than 1 MHz or greater than 50 MHz. The video bandwidth of the measurement instrument shall not be less than RBW. If RBW is greater than 3 MHz, the application for certification filed with the Commission shall contain a detailed description of the test procedure, calibration of the test setup, and the instrumentation employed in the testing.

 CTK Co., Ltd. (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 17142, Korea Tel: +82-1511-9871 Fax: +82-31-624-9501	REPORT No.: CTK-2026-02121 Page (11) / (25) Pages	
---	---	--

Test Procedures

1) Radiated measurement procedure below 960 MHz (ANSI C63.10-2020 : 6)

Test Method	
☒	Refer as ANSI C63.10-2020, clause 6.4(Radiated emissions from unlicensed wireless devices below 30 MHz).
☒	Radiated emission tests shall be performed in the frequency range of 9 kHz to 30 MHz, using a calibrated loop antenna. When perpendicular to the ground plane, the lowest height of the magnetic antenna shall be 1 m above the ground and shall be positioned at the specified distance from the EUT. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
☒	The results shall be by using the square of an inverse linear distance extrapolation factor(40 dB/decade).
☒	Refer as ANSI C63.10-2020, clause 6.5(Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz).
☒	In the frequency range above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) is used. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.
☒	Emissions more than 20 dB below the limit do not need to be reported.

Measuring instrument Settings	
Frequency Range	9 kHz - 1 000 MHz
RBW	200 Hz (9 kHz - 150 kHz) 9 kHz (150 kHz - 30 MHz) 120 kHz (30 MHz - 960 MHz)
VBW	≥ RBW
Sweep time	auto couple
Detector function	CISPR quasi-peak(below 960 MHz)

2) Radiated measurement procedure above 960 MHz (Part 15.250(d), ANSI C63.10-2020 : 10.2 &10.3)

Measuring instrument Settings	
Frequency Range	960 MHz - 40 GHz
RBW	1 MHz (960 MHz - 40 GHz)
VBW	≥ RBW (3 MHz is recommended)
Sweep time	peak : auto couple, rms : no more than a 1 ms integration period over each measurement bin
Detector function	Peak-maximum hold, Power averaging (rms)

 CTK Co., Ltd. (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 17142, Korea Tel: +82-1511-9871 Fax: +82-31-624-9501	REPORT No.: CTK-2026-02121 Page (12) / (25) Pages	
---	---	--

[Peak power measurement]

The spectral characterization of a UWB device shall begin with a peak detected radiated measurement because the results obtained from this measurement could preclude the need for subsequent average measurements. For example, if the data collected from the peak power measurement show that the radiated emissions levels are equal to, or less than, the applicable emissions limit, then these data are adequate to determine compliance. This is predicated on the fact that the average levels are typically less than, or equal to, the peak signal level.

The peak detector of the instrument is selected and the maximum hold feature activated. The RBW is set to 1 MHz and the VBW is set to at least 1 MHz (3 MHz is recommended).

[Peak power within 50 MHz bandwidth]

The peak detector of the instrument is selected and the maximum hold feature activated.

It is acceptable to employ an RBW of less than 50 MHz (but no less than 1 MHz) when performing the required peak power measurements. When this approach is employed, the peak emissions EIRP limit (0 dBm / 50 MHz) is converted to a limit commensurate with the RBW by employing a [20 log (RBW/50 MHz)] relationship. For example, the peak power limit could be expressed in a 1 MHz bandwidth as follows in Equation

$$\text{EIRP}_{1\text{MHz}} = \text{EIRP}_{50\text{MHz}} + 20 \cdot \log(1 \text{ MHz} / 50 \text{ MHz}) = 0 \text{ dBm} + (-34 \text{ dB}) = -34 \text{ dBm}$$

[Evaluating rms-average power spectral density]

- Set the RBW to 1 MHz.
- Set the VBW to be at least 1 MHz (a VBW of 3 MHz is desirable).
- Set the frequency span to examine the spectrum across a convenient frequency segment (e.g., 600 MHz).
- Select the power averaging (rms) detector.
- Set the sweep time so that there is no more than a 1 ms integration period over each measurement bin.

[Determination of EIRP]

When an isotropic transmitting antenna is assumed, the following relationships in equation may be employed to relate EIRP to field strength(E) at a specified measurement distance of 3 m:

$$\text{EIRP (dBm)} = E(\text{dBuV/m}) - 95.3$$

[Spectral line measurement]


Another test required for these types of devices involves the measurement of the maximum of the average power contained in any spectral lines present within the 1164 MHz to 1240 MHz and 1559 MHz to 1610 MHz frequency ranges. The measurement setup is similar to that described in [Average power spectral density]. The rms detector is selected, and the sweep time and number of measurement bins are set to provide the requisite 1 ms integration time. In this test, the RBW may be reduced to a minimum of 1 kHz (30 kHz is recommended) to enhance the resolution of the individual spectral lines. A ratio of VBW / RBW > 3 shall be maintained when possible.

Test Location


- ☒ 10 m SAC (test distance : ☐ 10 m, ☒ 3 m)
☒ 3 m FAC (test distance : 3 m)

Test Setup


- 1) For field strength of emissions from 9 kHz to 30 MHz

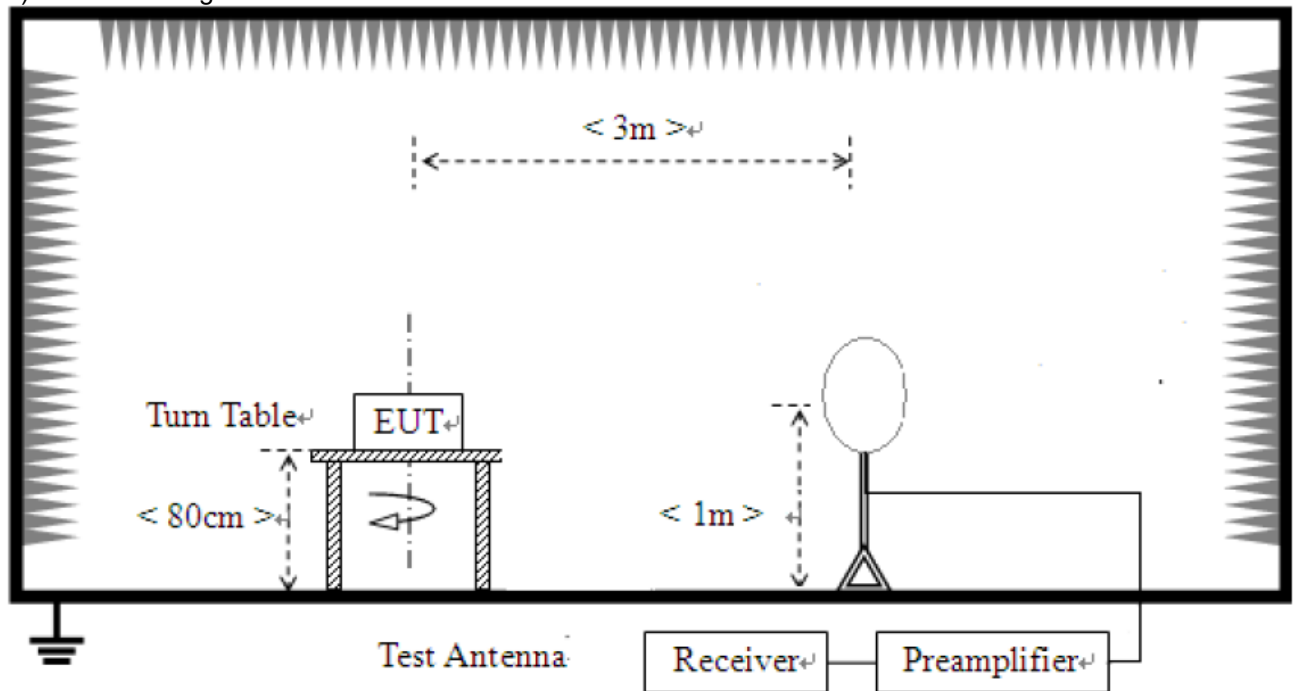

- 2) For field strength of emissions from 30 MHz to 1 GHz

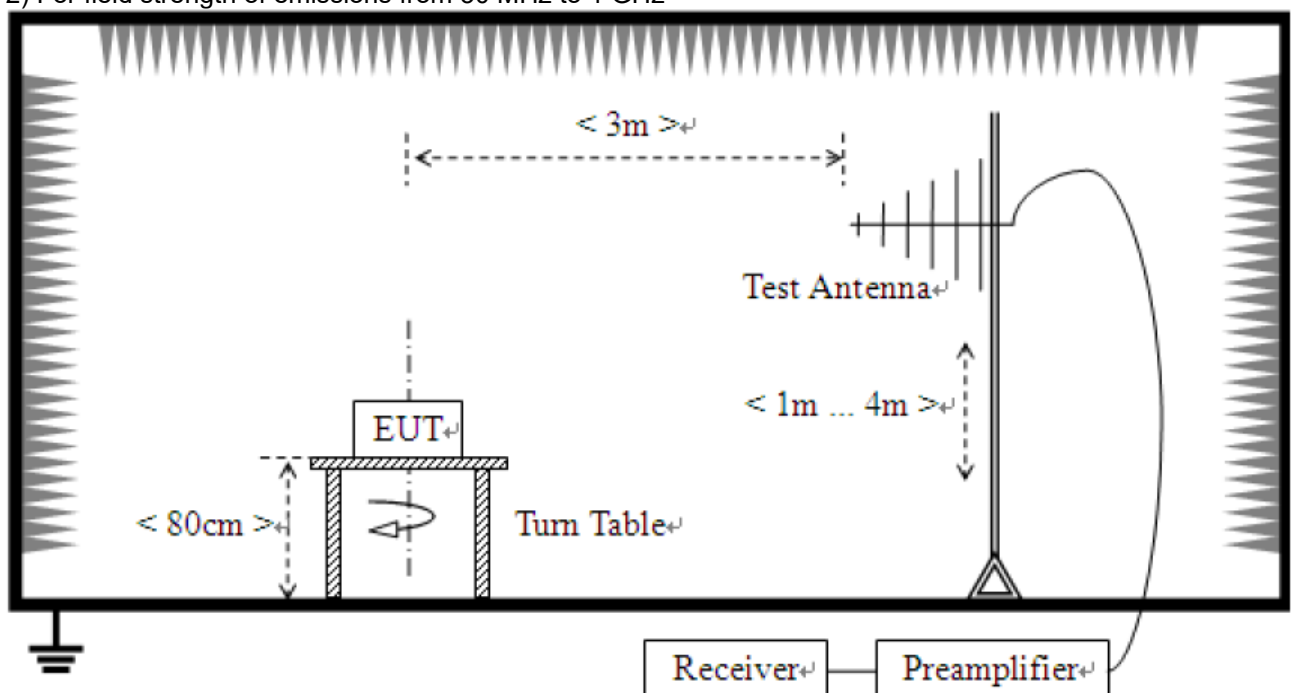

3) For field strength of emissions above 1 GHz

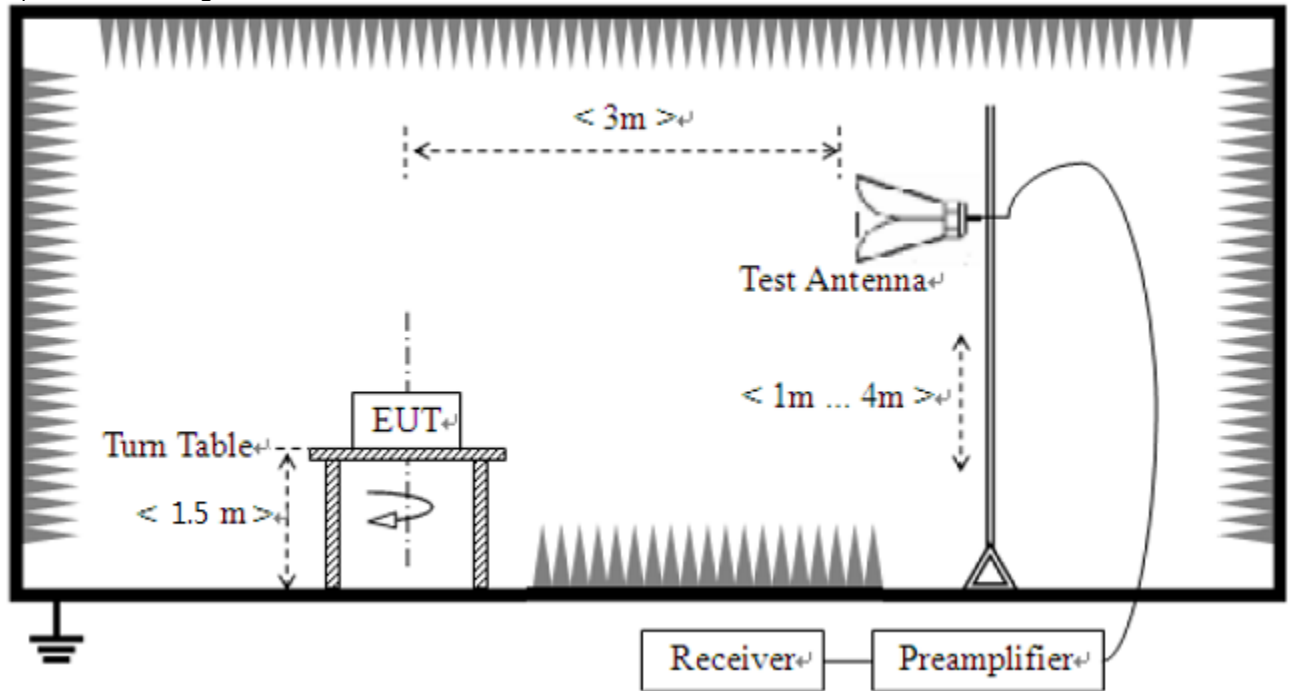


Test results

The requirements are:

☒ Complies

1) Radiated emissions in the frequency range of 9 kHz to 30 MHz

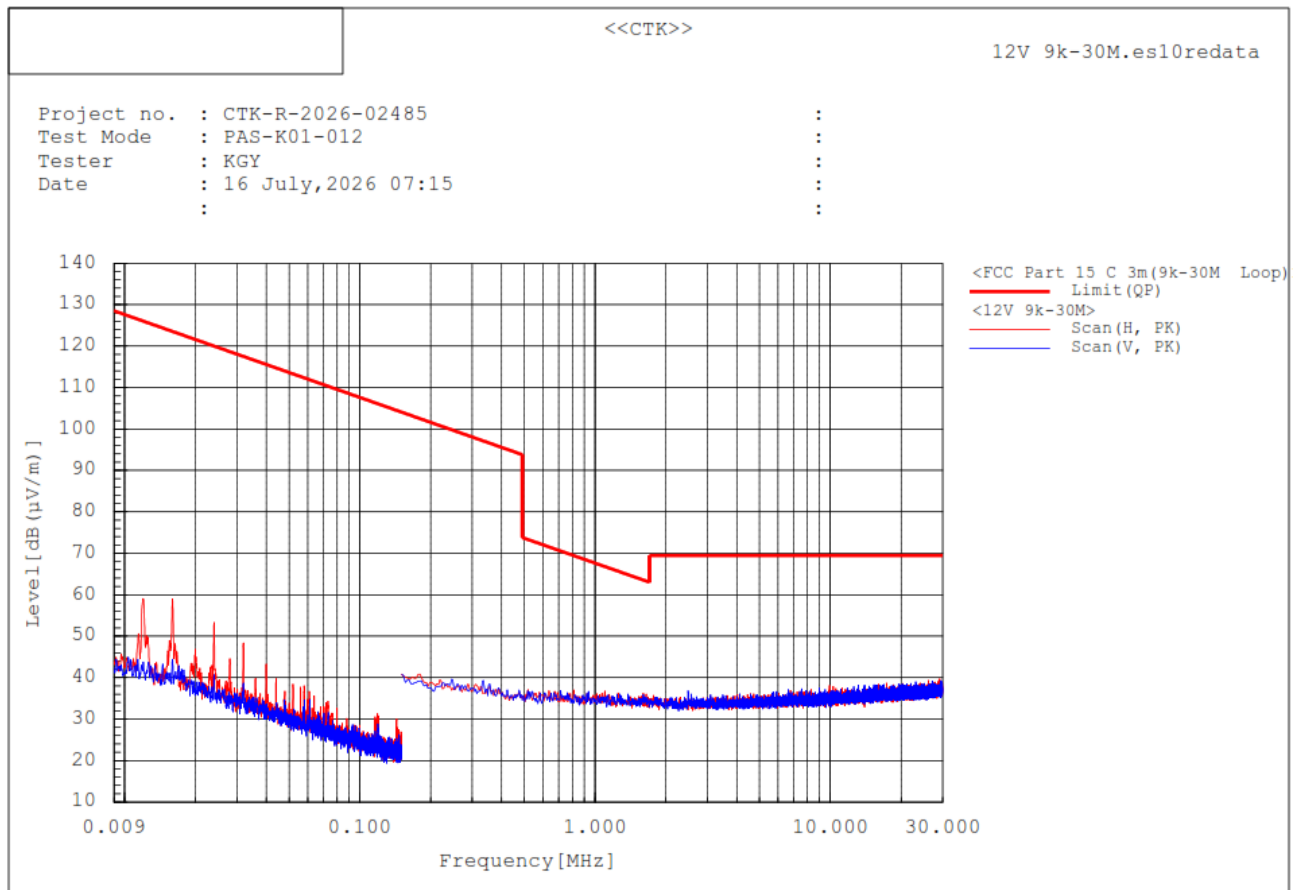


No.	Frequency [MHz]	Reading [dBuV]	c.f [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin[dB]	Remark
Emissions more than 20 dB below the limit do not need to be reported.							

Remark :

1. Result = Reading + c.f(correction factor)
2. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
3. The test result in peak detector is less than quasi-peak limit.

2) Radiated emissions in the frequency range of 30 MHz to 960 MHz

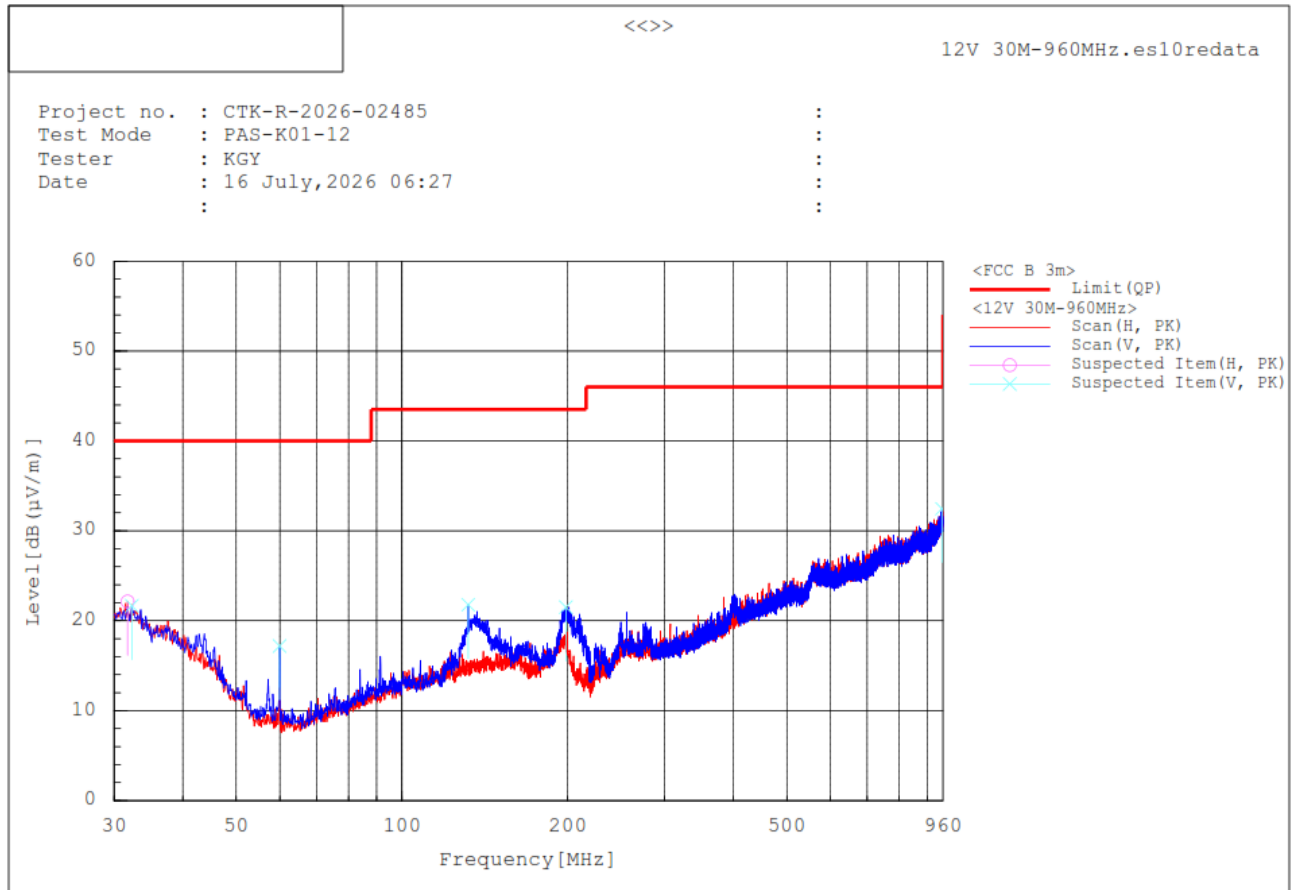


No.	Frequency [MHz]	Reading [dBuV]	c.f [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin[dB]	Remark
Emissions more than 20 dB below the limit do not need to be reported.							

Remark :

1. Result = Reading + c.f(correction factor)
2. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
3. The test result in peak detector is less than quasi-peak limit.

3) Radiated emissions in the frequency range of 960 MHz to 1 000 MHz

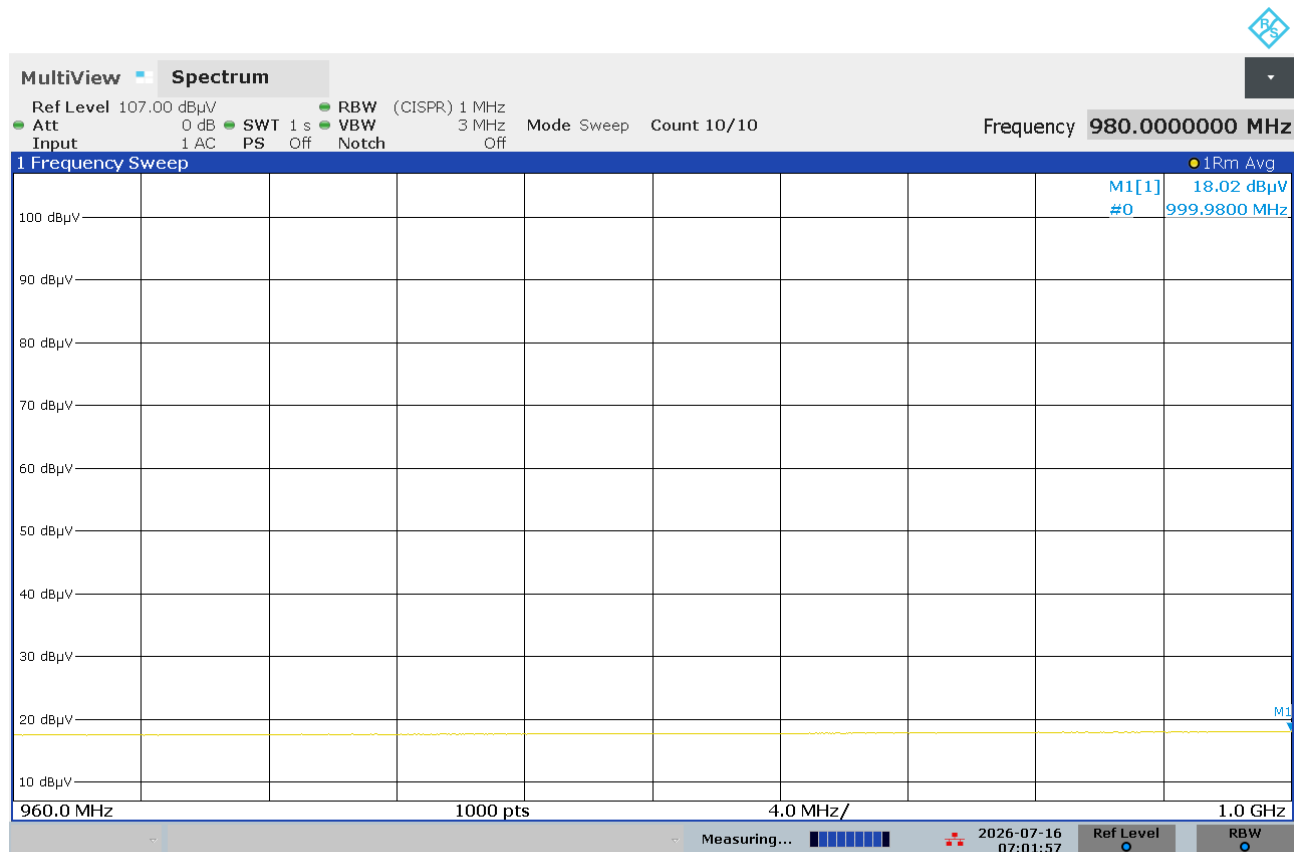


07:01:58 AM 07/16/2026

No.	Frequency [MHz]	Pol.	Reading [dBuV]	c.f [dB/m]	Result [dBuV/m]	Result [dBm]	Limit [dBm]	Margin[dB]	Remark
Not detected									

Remark :

1. Result = Reading + c.f(correction factor)
2. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
3. Limit : -75.3 dBm => 20 dBuV/m at 3m

4) Radiated emissions in the frequency range of 1 GHz to 40 GHz

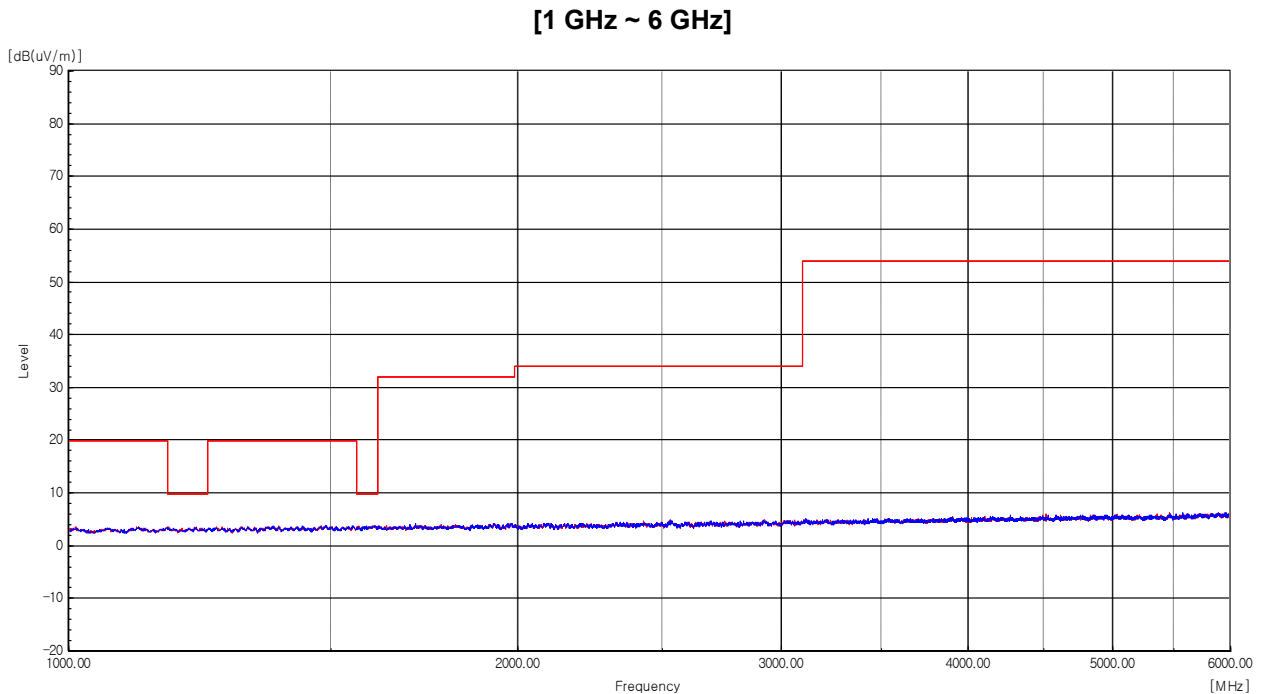

No.	Frequency [MHz]	Pol.	Reading [dBuV]	c.f [dB/m]	Result [dBuV/m]	Result [dBm]	Limit [dBm]	Margin[dB]	Remark
Not detected									

Remark :

1. Result = Reading + c.f(correction factor)
2. Correction factor = Antenna factor + Cable loss - Amp Gain
3. Although the limit line on the plot was graph based on FCC Part 15.519(c), no emissions were detected, confirming compliance. ex) 3 100 - 5 925 MHz




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 17142, Korea
Tel: +82-1511-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-02121
Page (19) / (25) Pages

[6 GHz ~ 7 GHz]

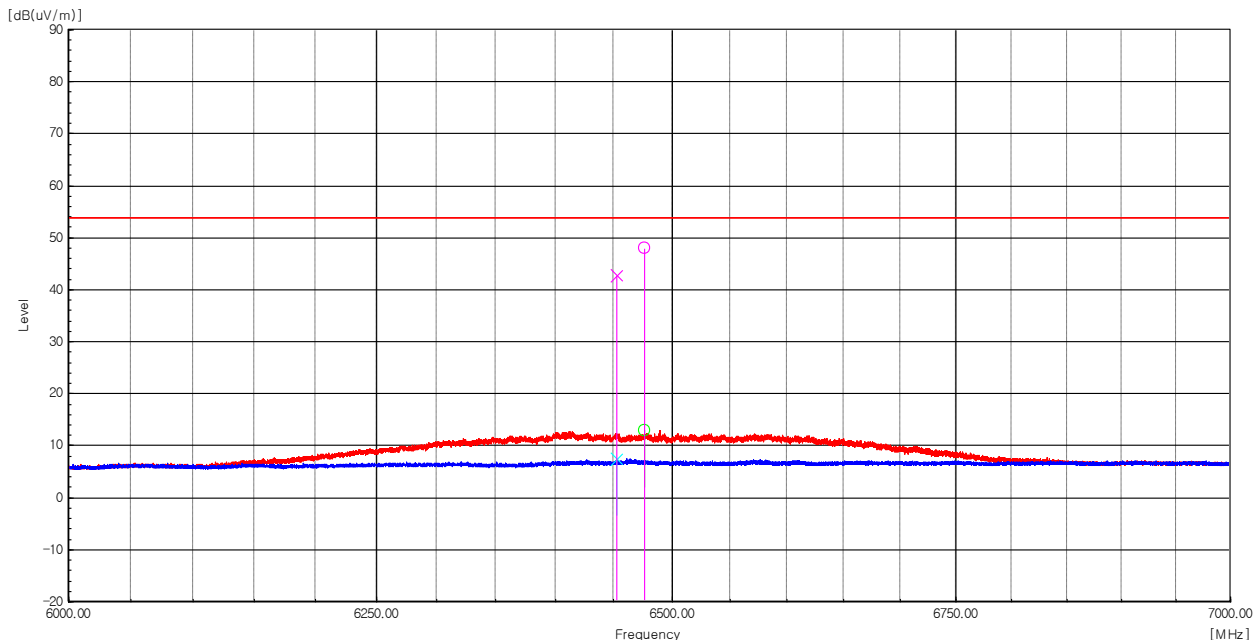

No.	Frequency [MHz]	Pol.	Reading [dBuV]	c.f [dB/m]	Result [dBuV/m]	Result [dBm]	Limit [dBm]	Margin[dB]	Remark
1	6 476.531	H	40.6	7.4	48.0	-47.3	-41.3	6.9	
2	6 452.361	V	35.4	7.3	42.7	-52.6	-41.3	6.5	

Remark :

1. Result = Reading + c.f(correction factor)
2. Correction factor = Antenna factor + Cable loss - Amp Gain
3. Result [dBm] = Result [dBuV/m] - 95.3




CTK Co., Ltd.


(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 17142, Korea
Tel: +82-1511-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-02121
Page (20) / (25) Pages

[7 GHz ~ 18 GHz]

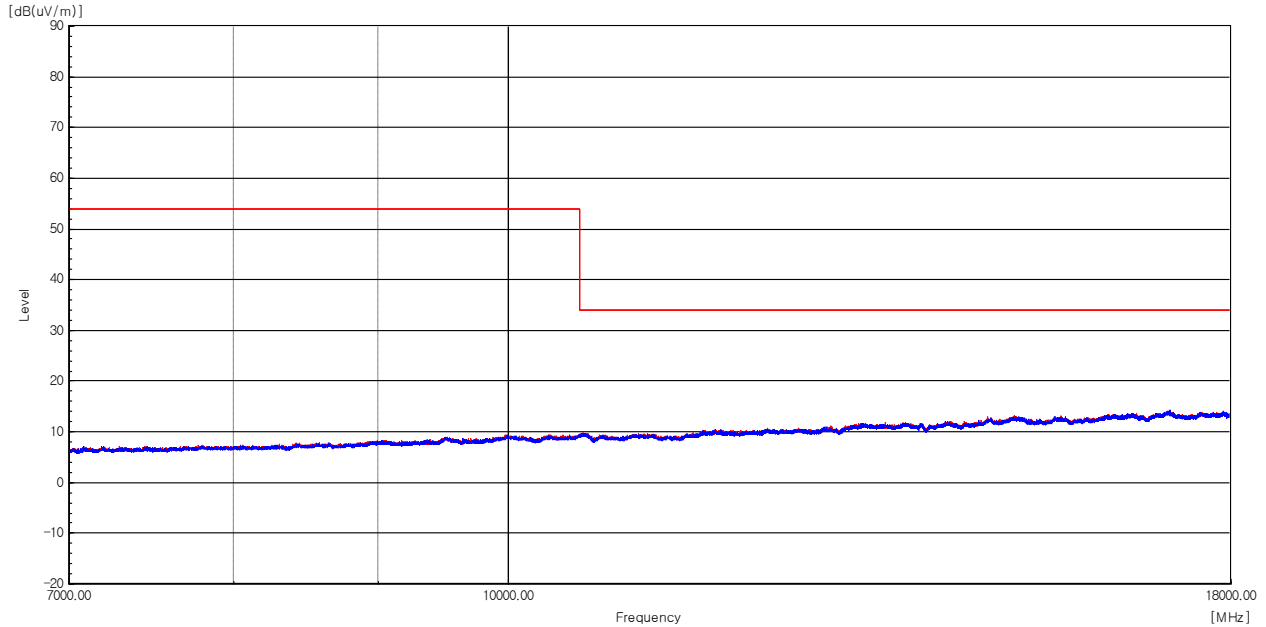

[18 GHz ~ 40 GHz]

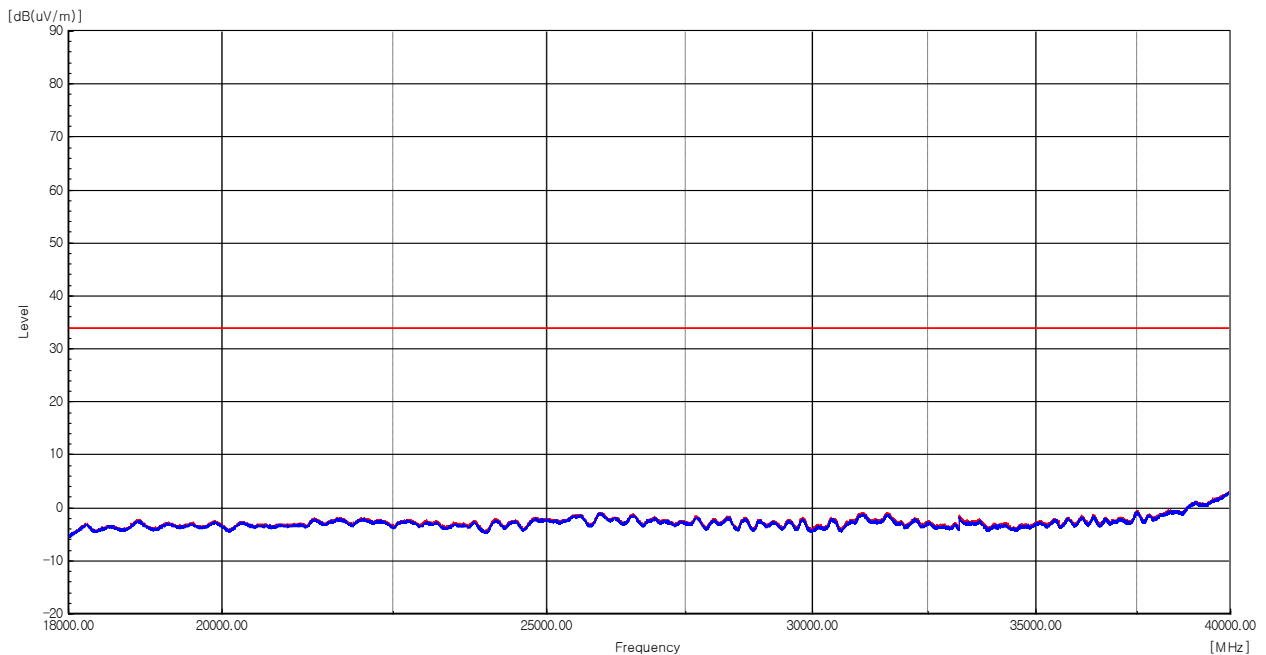


No.	Frequency [MHz]	Pol.	Reading [dBUV]	c.f [dB/m]	Result [dBUV/m]	Result [dBm]	Limit [dBm]	Margin[dB]	Remark
Not detected									

Remark :


1. Result = Reading + c.f(correction factor)
2. Correction factor = Antenna factor + Cable loss - Amp Gain
3. Although the limit line on the plot was graph based on FCC Part 15.519(c), no emissions were detected, confirming compliance. ex) 7 250 - 10 600 MHz

5) Radiated emissions within the 1 164 MHz to 1 240 MHz and 1 559 MHz to 1 610 MHz frequency ranges.

[1 164 MHz ~ 1 240 MHz]

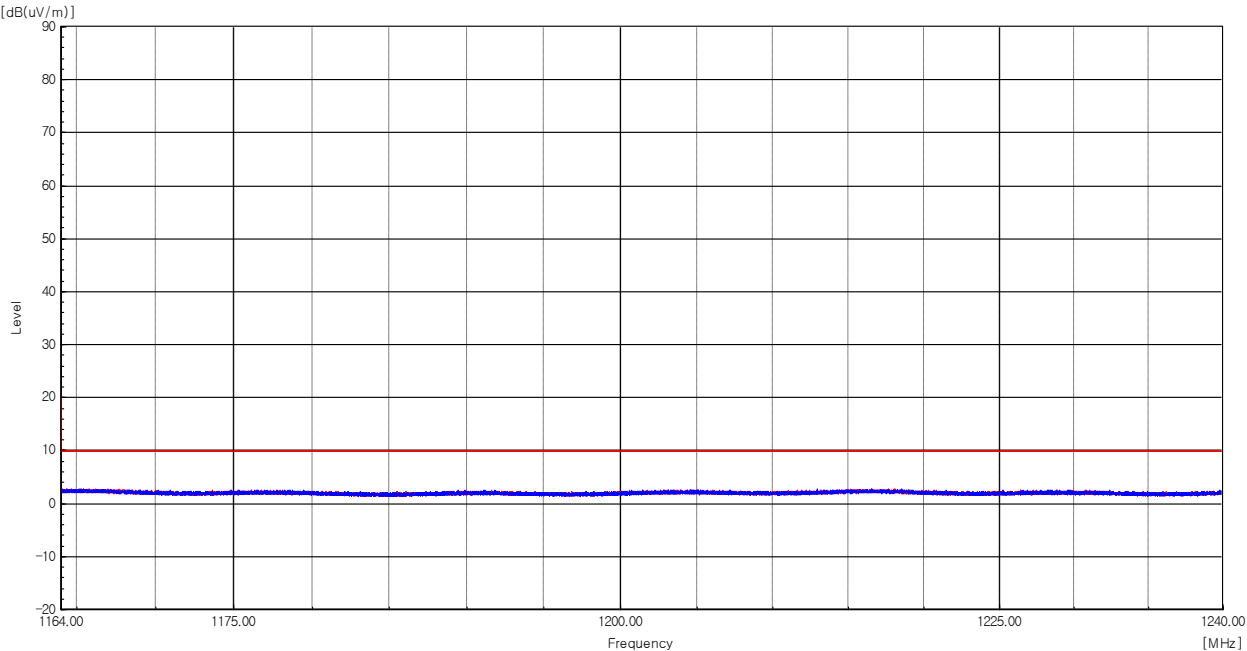

[1 559 MHz ~ 1 610 MHz]

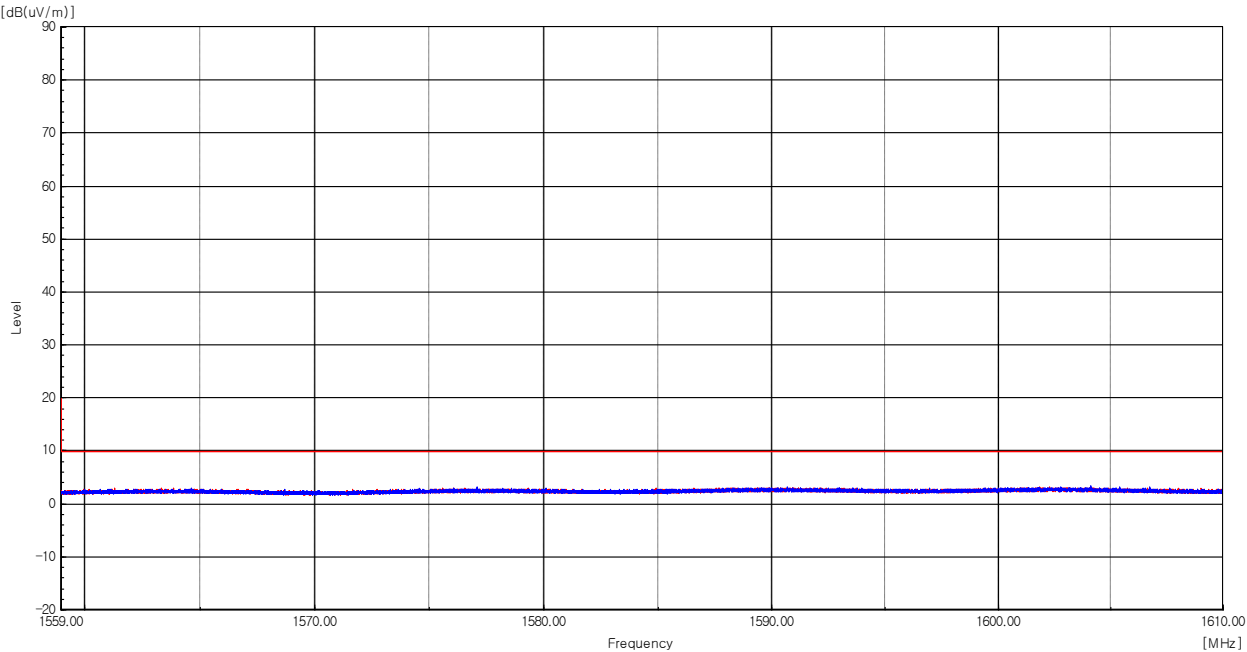


No.	Frequency [MHz]	Pol.	Reading [dBuV]	c.f [dB/m]	Result [dBuV/m]	Result [dBm]	Limit [dBm]	Margin[dB]	Remark
Not detected									

Remark :

1. Result = Reading + c.f(correction factor)
2. Correction factor = Antenna factor + Cable loss - Amp Gain

6) Peak power of fundamental frequency

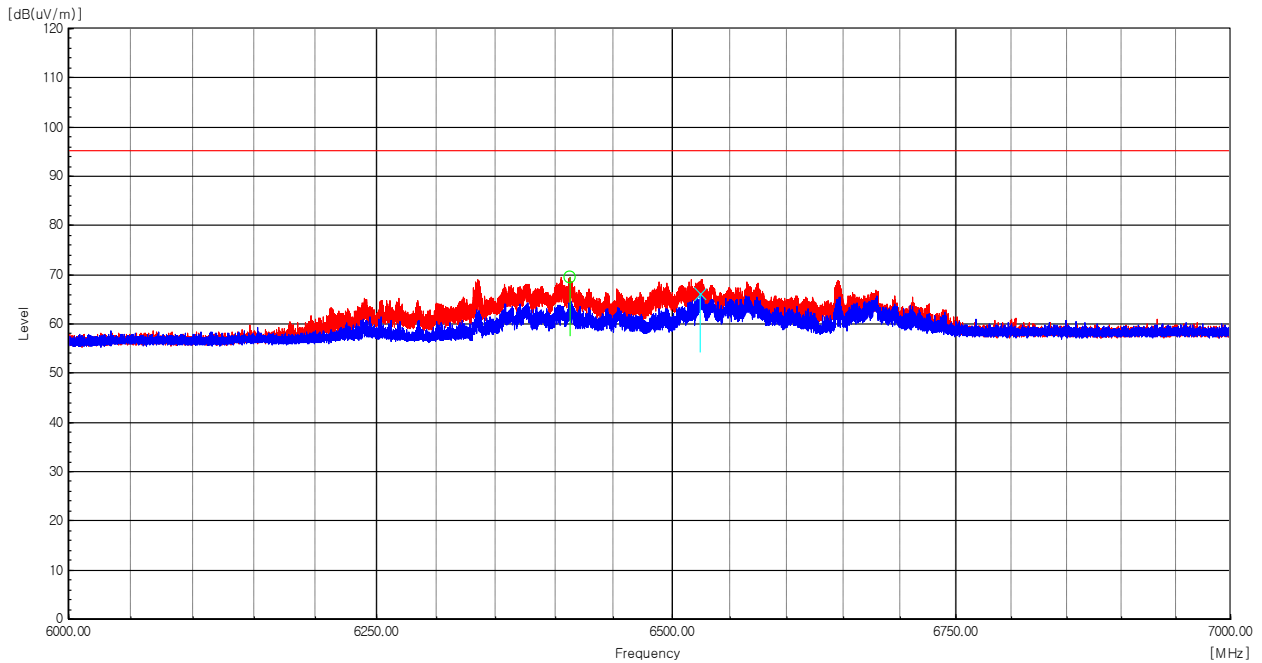

No.	Frequency [MHz]	Pol.	Reading [dBuV]	c.f [dB/m]	Result [dBuV/m]	Result [dBm]	Limit [dBm]	Margin[dB]	Remark
1	6 413.176	H	62.3	7.1	69.4	-25.9	-24.4	1.4	
2	6 524.821	V	58.8	7.4	66.2	-29.1	-24.4	4.7	

Remark :

1. Result = Reading + c.f(correction factor)
2. Correction factor = Antenna factor + Cable loss - Amp Gain
3. Result [dBm] = Result [dBuV/m] - 95.3
4. Measured using RBW = 3 MHz.
5. Although the limit line on the plot was graph based on FCC Part 15.519(e), compliance was confirmed after calculating the applicable limit.
 Limit : $20\log(\text{RBW}_{\text{used}(3)}/50) = -24.4 \text{ dBm}$

4.3 AC Conducted Emissions

A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz-30 MHz, shall not exceed the limits.

Test Procedures

ANSI C63.10-2020 - Section 6.2.2

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

Limit


- 15.207(a)

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average**
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

* The level decreases linearly with the logarithm of the frequency.

** A linear average detector is required.

Test Setup

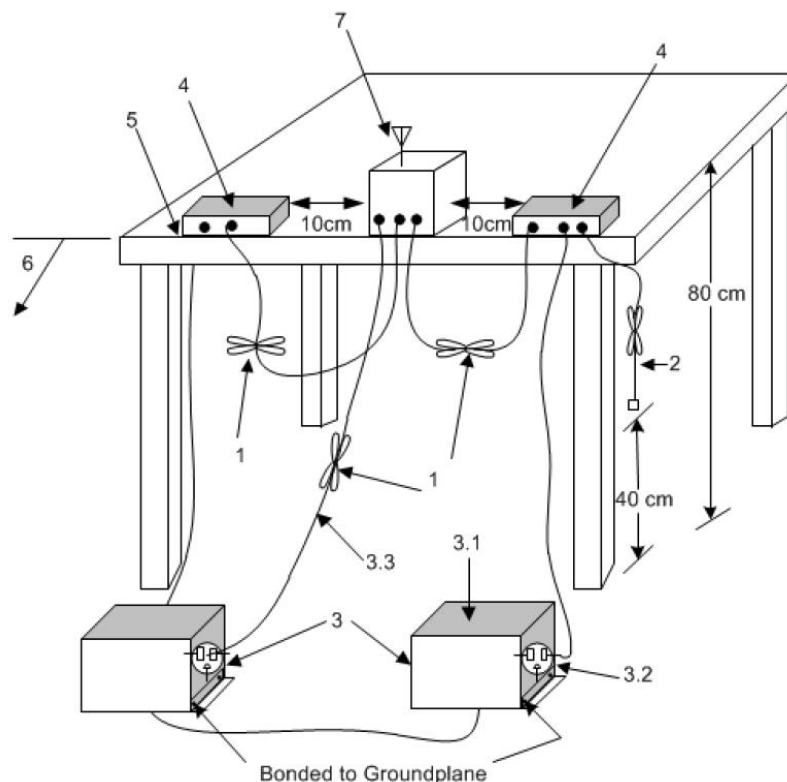

Test Results

The requirements are:

☒ Complies




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 17142, Korea
Tel: +82-1511-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-02121
Page (24) / (25) Pages

Test Data

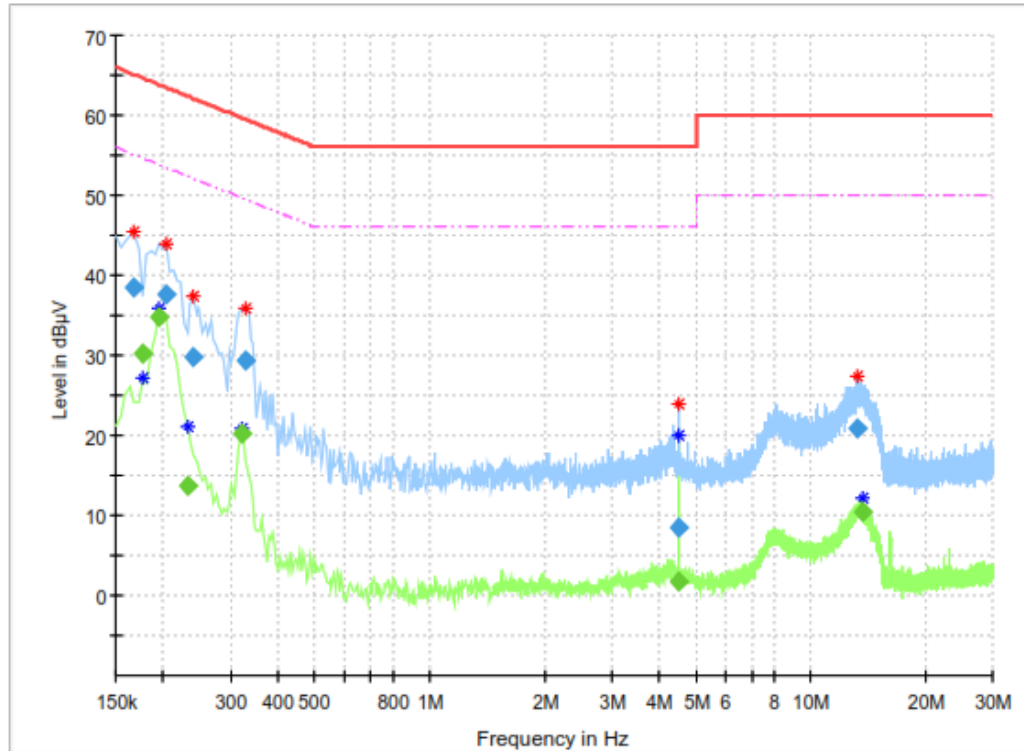

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.168000	38.48	---	65.06	26.58	15000.0	9.000	L1	ON	10.0
0.177000	---	30.27	54.63	24.35	15000.0	9.000	N	ON	10.0
0.195000	---	34.79	53.82	19.03	15000.0	9.000	N	ON	10.0
0.204000	37.53	---	63.45	25.91	15000.0	9.000	N	ON	10.0
0.231000	---	13.74	52.41	38.67	15000.0	9.000	N	ON	10.0
0.240000	29.85	---	62.10	32.24	15000.0	9.000	L1	ON	10.0
0.321000	---	20.30	49.68	29.38	15000.0	9.000	L1	ON	10.1
0.330000	29.43	---	59.45	30.02	15000.0	9.000	N	ON	10.1
4.488000	---	1.79	46.00	44.21	15000.0	9.000	N	ON	10.1
4.488000	8.39	---	56.00	47.61	15000.0	9.000	N	ON	10.1
13.231500	20.83	---	60.00	39.17	15000.0	9.000	L1	ON	10.5
13.623000	---	10.41	50.00	39.59	15000.0	9.000	L1	ON	10.5

 CTK Co., Ltd. (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 17142, Korea Tel: +82-1511-9871 Fax: +82-31-624-9501	REPORT No.: CTK-2026-02121 Page (25) / (25) Pages	
---	---	--

APPENDIX A - Test Equipment Used For Tests

No.	Name of Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Signal Analyzer	Agilent	N9020A	US46470483	2026-01-15	2027-01-15
2	Signal Generator	Rohde & Schwarz	SMB100A	175528	2026-03-12	2027-03-12
3	EMI TEST RECEIVER	Rohde & Schwarz	ESW44	102039	2026-04-27	2027-04-27
4	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-125	2026-03-25	2028-03-25
5	ATTENUATOR	PASTERNAK	PE7AP006-06	L20210504000023	2025-07-28	2026-07-28
6	Bilog Antenna	TESEQ	CBL6111D	60654	2025-08-21	2027-08-21
7	AMPLIFIER	SONOMA INSTRUMENT	310N	411011	2025-07-28	2026-07-28
8	Attenuator	NONE	6dB	190557	2025-09-18	2026-09-18
9	Dual-Tracking DC Power Supply	Topward Electric Instruments Co.,Ltd.	6303D	802204	2026-03-12	2027-03-12
10	DC Power Supply	HP	E3632A	KR94907541	2025-09-18	2026-09-18
11	Signal Analyzer	Rohde & Schwarz	FSW	101250	2026-03-14	2027-03-14
12	PRE AMPLIFIER	HP	8449B	3008A00620	2026-03-11	2027-03-11
13	Double Ridged Guide Antenna	ETS-Lindgren	3115	00078895	2026-03-13	2027-03-13
14	HORN ANTENNA	SCHWARZBECK	BBHA9170	1153	2025-09-30	2026-09-30
15	LOW NOISE AMPLIFIER	TESTEK	TK-PA1840H	210124-L	2025-09-30	2026-09-30
16	LISN	Rohde & Schwarz	ENV216	102698	2026-04-27	2027-04-27
17	EMI Test Receiver	Rohde & Schwarz	ESCI7	100816	2025-09-25	2026-09-25

-END-