FCC Part 15C
Measurement and Test Report

For

Sariana LLC

7365 Mission Gorge Road, Suite G, San Diego, CA 92120, USA

FCC ID: ZE9-ST-HK2OA

FCC Rule(s):	FCC Part 15.247
Product Description:	Satechi Dual Smart Outlet
Tested Model:	ST-HK2OA
Report No.:	STR18108277I
Sample Receipt Date:	2018-10-29
Tested Date:	2018-10-29 to 2018-11-14
Issued Date:	2018-11-14
Tested By:	Ray Yang / Engineer
Reviewed By:	Silin Chen / EMC Manager
Approved & Authorized By:	Jandy So / PSQ Manager

Prepared By:

Shenzhen SEM Test Technology Co., Ltd.
1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C.（518101）
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION 3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) 3
1.2 TEST STANDARDS 4
1.3 TEST METHODOLOGY 4
1.4 TEST FACILITY 4
1.5 EUT SETUP AND TEST MODE 5
1.6 MEASUREMENT UNCERTAINTY 6
1.7 TEST EQUIPMENT LIST AND DETAILS 7
2. SUMMARY OF TEST RESULTS 8
3. RF EXPOSURE 9
3.1 STANDARD APPLICABLE 9
3.2 TEST RESULT 9
4. ANTENNA REQUIREMENT 10
4.1 STANDARD APPLICABLE 10
4.2 EVALUATION INFORMATION 10
5. POWER SPECTRAL DENSITY 11
5.1 STANDARD APPLICABLE 11
5.2 TEST PROCEDURE 11
5.3 SUMMARY OF TEST RESULTS/PLOTS 11
6. DTS BANDWIDTH 15
6.1 STANDARD APPLICABLE 15
6.2 TEST PROCEDURE 15
6.3 SUMMARY OF TEST RESULTS/PLOTS 15
7. RF OUTPUT POWER 19
7.1 STANDARD APPLICABLE 19
7.2 TEST PROCEDURE 19
7.3 SUMMARY OF TEST RESULTS/PLOTS 19
8. FIELD STRENGTH OF SPURIOUS EMISSIONS 24
8.1 STANDARD APPLICABLE 24
8.2 TEST PROCEDURE 24
8.3 CORRECTED AMPLITUDE & MARGIN CALCULATION 25
8.4 SUMMARY OF TEST RESULTS/PLOTS 25
9. OUT OF BAND EMISSIONS 33
9.1 STANDARD APPLICABLE 33
9.2 TEST PROCEDURE 33
9.3 SUMMARY OF TEST RESULTS/PLOTS 34
10. CONDUCTED EMISSIONS 50
10.1 TEST PROCEDURE 50
10.2 BASIC TEST SETUP BLOCK DIAGRAM 50
10.3 TEST RECEIVER SETUP 50
10.4 SUMMARY OF TEST RESULTS/PLOTS 50

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant:	Sariana LLC
Address of applicant:	7365 Mission Gorge Road, Suite G, San Diego, CA 92120, USA
Manufacturer:	Shenzhen Champon Technology Co., Ltd.
Address of manufacturer:	Room 628, Yiben Bldg., No. 1063 Chaguang Road, Nanshan District, Shenzhen

General Description of EUT	
Product Name:	Satechi Dual Smart Outlet
Trade Name:	Satechi
Model No.:	ST-HK2OA
Adding Model(s):	/
Rated Voltage:	AC 120V/60Hz
Note: The test data is gathered from a production sample provided by the manufacturer.	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n-HT20
Frequency Range:	2412-2462MHz for 802.11b/g/n-HT20
RF Output Power:	14.11dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 150Mbps
Quantity of Channels:	11 for 802.11b/g/n-HT20
Channel Separation:	5MHz
Type of Antenna:	PCB Antenna
Antenna Gain:	2dBi
Lowest Internal Frequency of EUT:	38.4MHz

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.
558074 D01 15.247 Meas Guidance v05: Guidance For Compliance Measurements On Digital Transmission System, Frequency Hopping Spread Spectrum System, And Hybrid System Devices Operating Under Section 15.247 Of The Fcc Rules
ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05
The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

FCC – Registration No.: 125990
Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A
The 3m Semi-anechoic chamber of Shenzhen SEM Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM2	802.11g	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM3	802.11n-HT20	Low:2412MHz, Middle:2437MHz,High:2462MHz
Note: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.		

Test Conditions	
Temperature:	22~25 °C
Relative humidity	50~56 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Accessories Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	±0.42dB
Occupied Bandwidth	Conducted	±1.5%
Power Spectral Density	Conducted	±1.8dB
Conducted Spurious Emission	Conducted	±2.17dB
Conducted Emissions	Conducted	9-150kHz ±3.74dB
		0.15-30MHz ±3.34dB
Transmitter Spurious Emissions	Radiated	30-200MHz ±4.52dB
		0.2-1GHz ±5.56dB
		1-6GHz ±3.84dB
		6-18GHz ±3.92dB

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2018-05-22	2019-05-21
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2018-05-22	2019-05-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2018-05-22	2019-05-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2018-05-22	2019-05-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2018-05-22	2019-05-21
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2020-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2020-06-07
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2017-06-08	2020-06-07
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2020-06-07
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2018-05-22	2019-05-21
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2018-05-22	2019-05-21
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2018-05-22	2019-05-21
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2018-05-22	2019-05-21
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2018-05-22	2019-05-21
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2018-05-22	2019-05-21
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2018-03-19	2021-03-18
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2018-05-22	2019-05-21
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2018-05-22	2019-05-21
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2018-05-22	2019-05-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2018-03-19	2019-03-18
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2018-03-19	2019-03-18
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2018-03-19	2019-03-18
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2018-03-19	2019-03-18
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 2.1093	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	DTS Bandwidth	Compliant
§ 15.247(b)(3)	RF Output Power	Compliant
§ 15.209(a)	Radiated Emission	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

3. RF Exposure

3.1 Standard Applicable

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has a PCB antenna, fulfill the requirement of this section.

5. Power Spectral Density

5.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 Test Procedure

According to the KDB 558074 D01 v05 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.3, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

a) Set instrument center frequency to DTS channel center frequency.
b) Set span to at least 1.5 times the OBW.
c) Set RBW to: 3 kHz ≤ RBW ≤ 100 kHz. .
d) Set VBW ≥3 x RBW.
e) Detector = power averaging (RMS) or sample detector (when RMS not available).
f) Ensure that the number of measurement points in the sweep ≥ 2 x span/RBW.
g) Sweep time = auto couple.
h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
i) Use the peak marker function to determine the maximum amplitude level.
j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

5.3 Summary of Test Results/Plots

Test Mode	Test Channel MHz	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
802.11b_11Mbps	2412	-23.93	8
	2437	-23.79	8
	2462	-24.82	8
802.11g_54Mbps	2412	-31.45	8
	2437	-30.65	8
	2462	-31.25	8
802.11n-HT20_MCS7	2412	-31.64	8
	2437	-32.41	8
	2462	-33.15	8

Please refer to the following test plots:

802.11b-Low	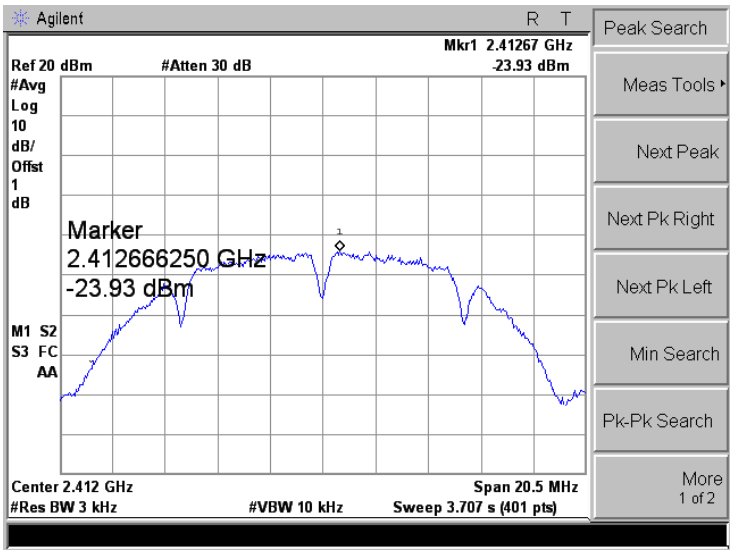
802.11b-Middle	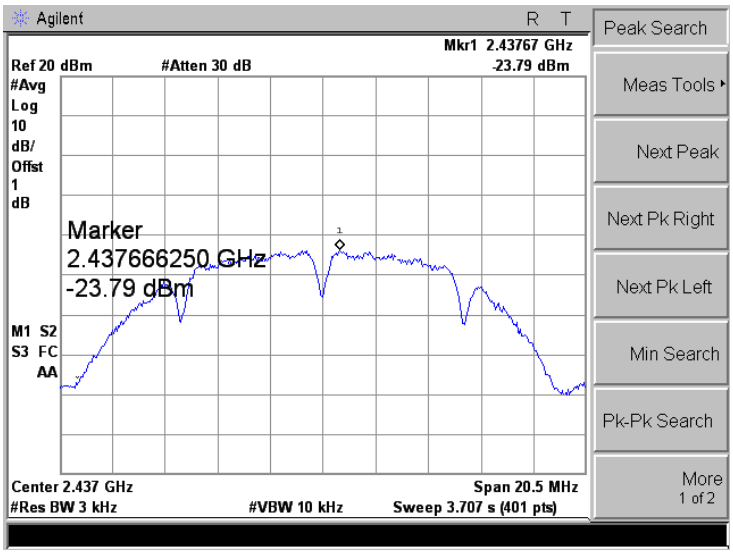
802.11b-High	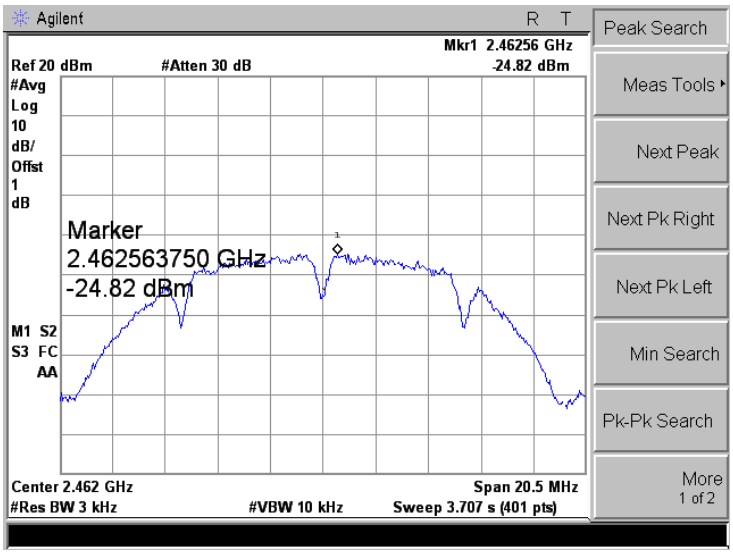

802.11g-Low	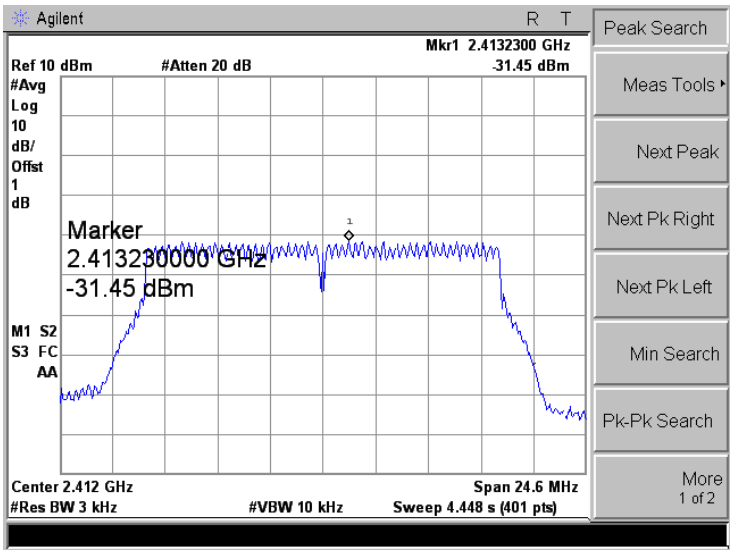
802.11g-Middle	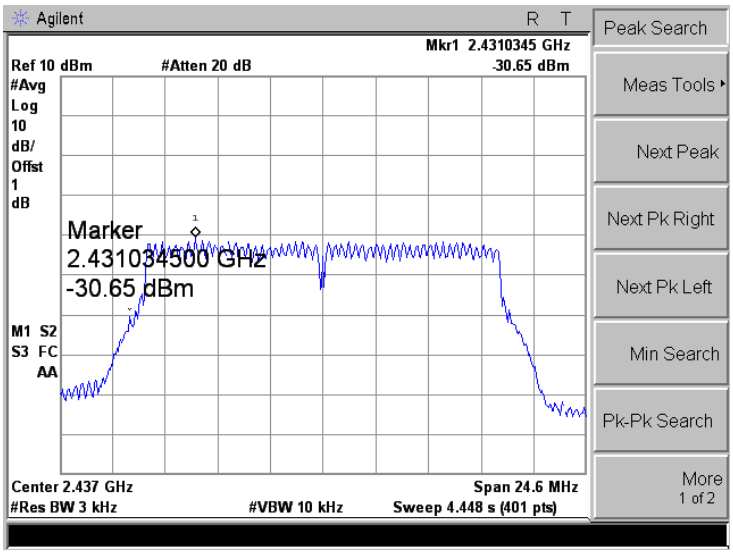
802.11g-High	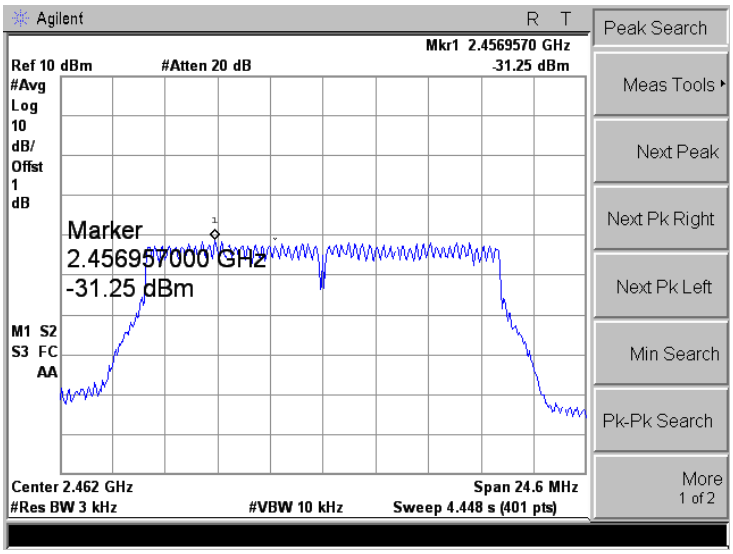

802.11n-HT20-Low	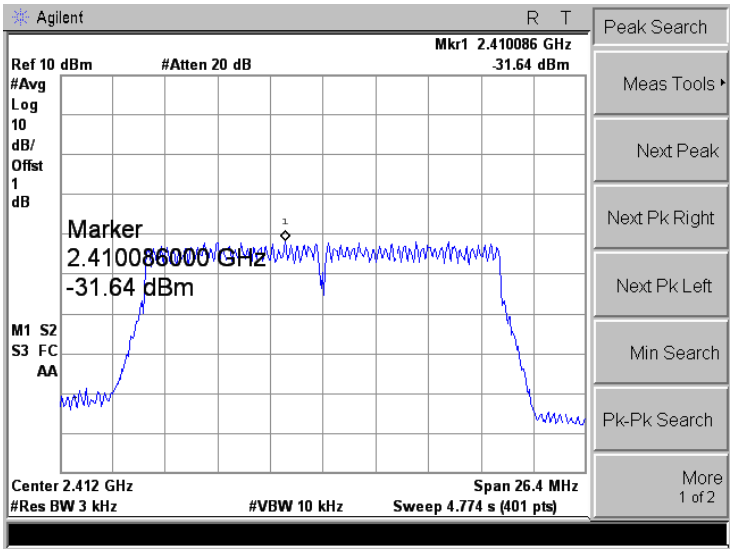
802.11n-HT20-Middle	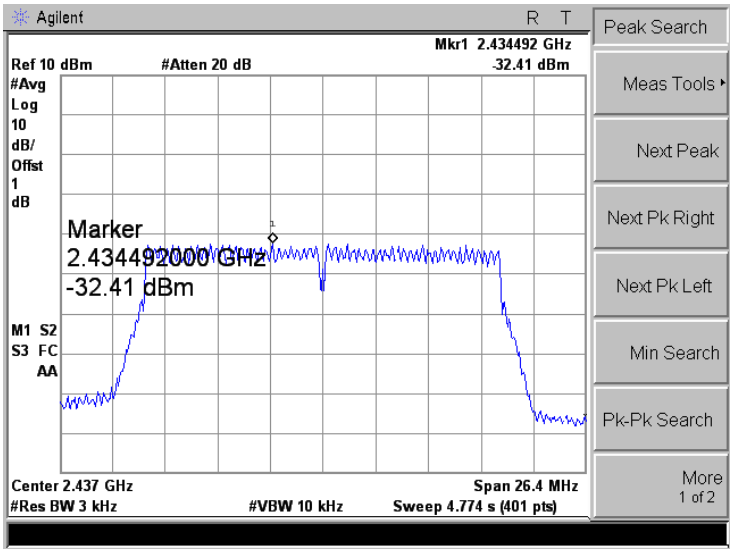
802.11n-HT20-High	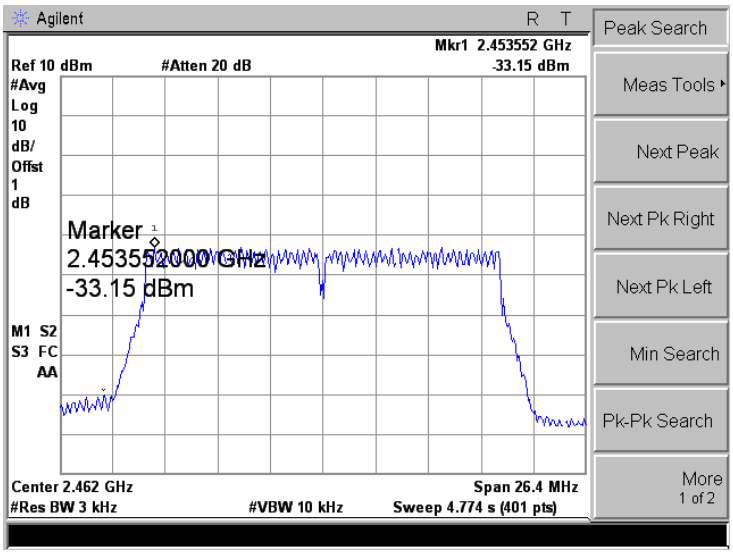

6. DTS Bandwidth

6.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.2 Test Procedure

According to the KDB 558074 D01 v05 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

a) Set RBW = 100 kHz.
b) Set the video bandwidth (VBW) ≥ 3 × RBW.
c) Detector = Peak.
d) Trace mode = max hold.
e) Sweep = auto couple.
f) Allow the trace to stabilize.
g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3 Summary of Test Results/Plots

Test Mode	Test Channel MHz	6 dB Bandwidth MHz	Limit kHz
802.11b_11Mbps	2412	10.136	≥500
	2437	10.144	≥500
	2462	10.149	≥500
802.11g_54Mbps	2412	16.508	≥500
	2437	16.503	≥500
	2462	16.181	≥500
802.11n-HT20_MCS7	2412	17.666	≥500
	2437	17.769	≥500
	2462	17.679	≥500

Please refer to the following test plots:

802.11b-Low	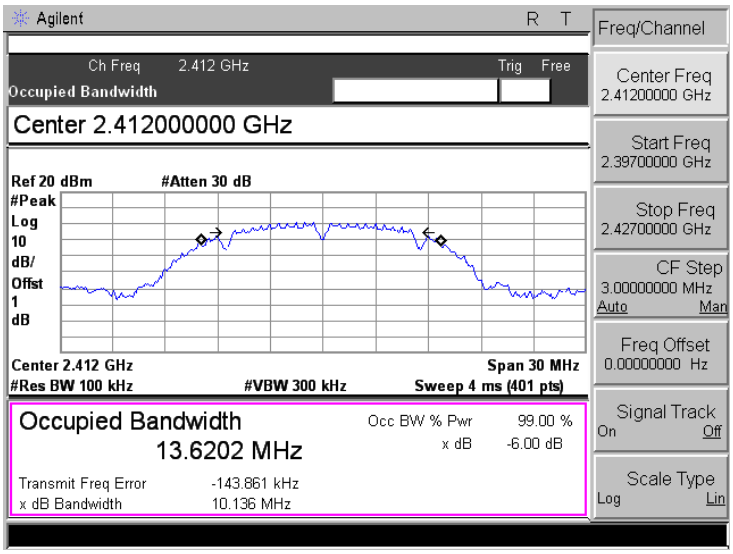
802.11b-Middle	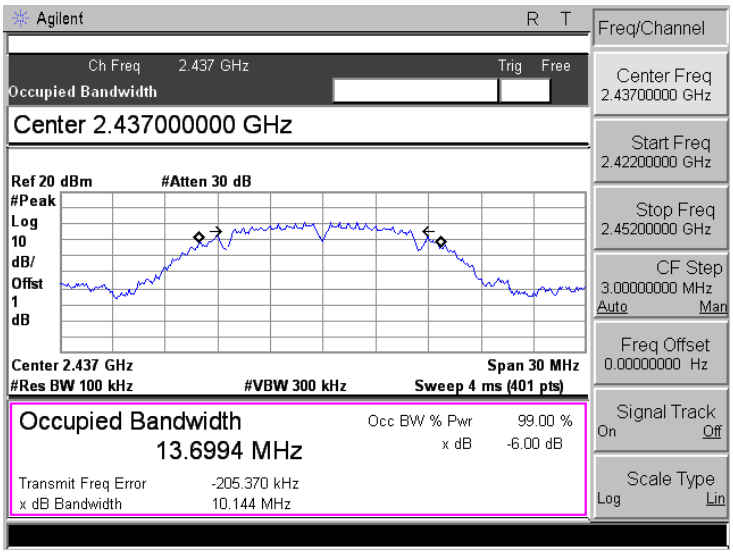
802.11b-High	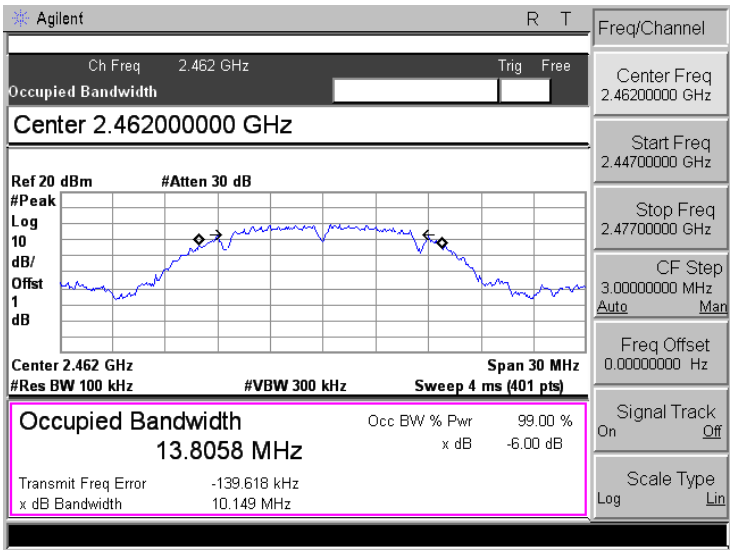

802.11g-Low	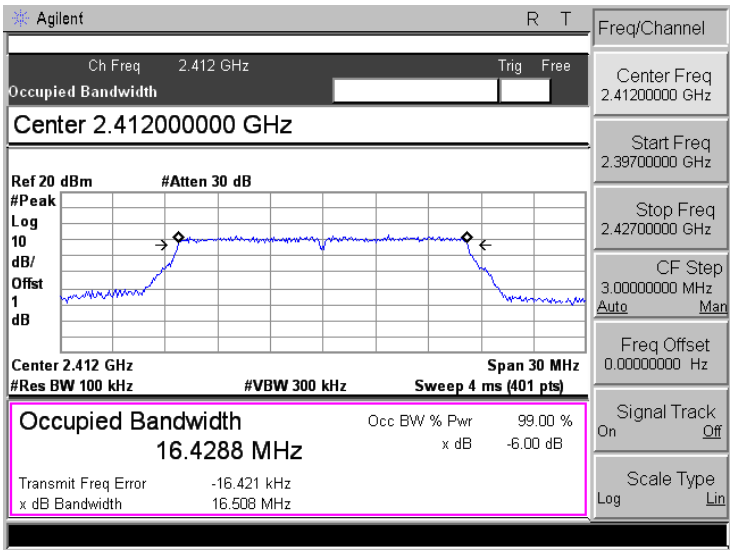
802.11g-Middle	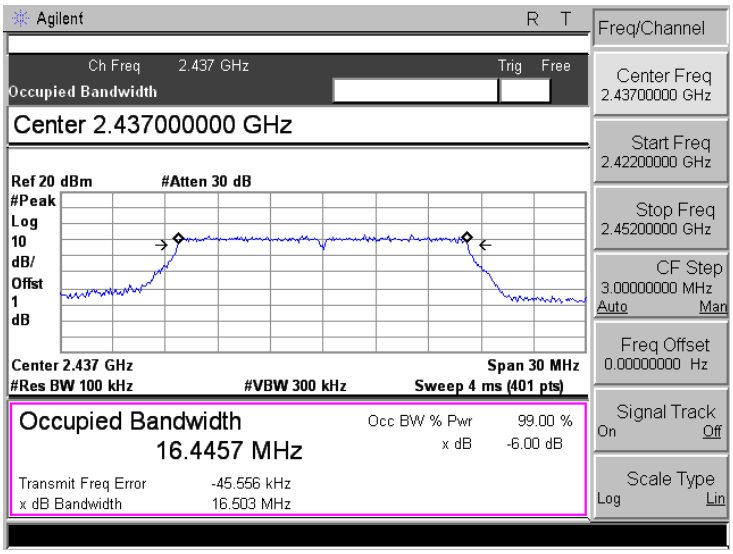
802.11g-High	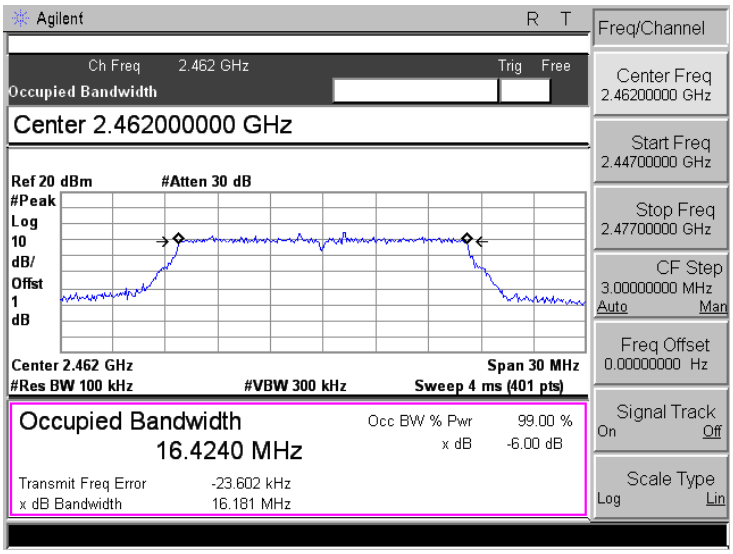

802.11n-HT20-Low	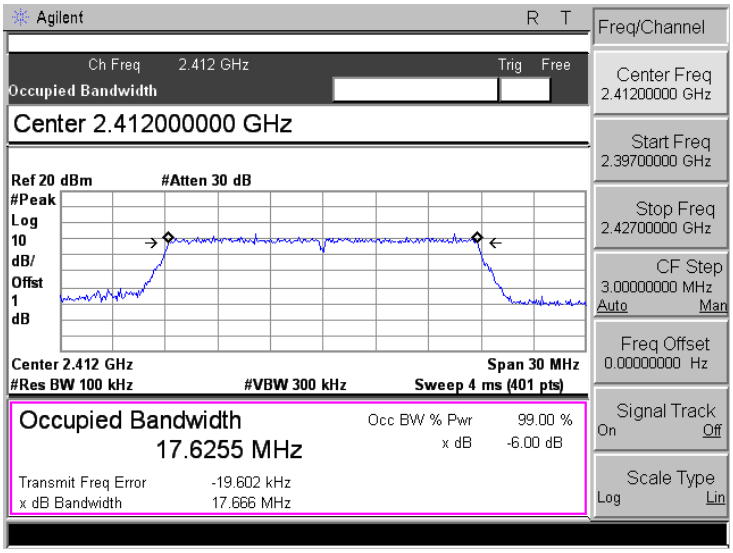
802.11n-HT20-Middle	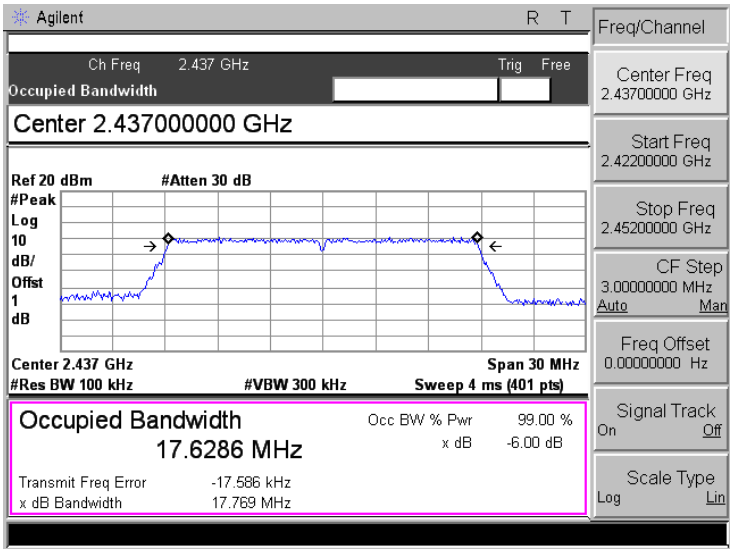
802.11n-HT20-High	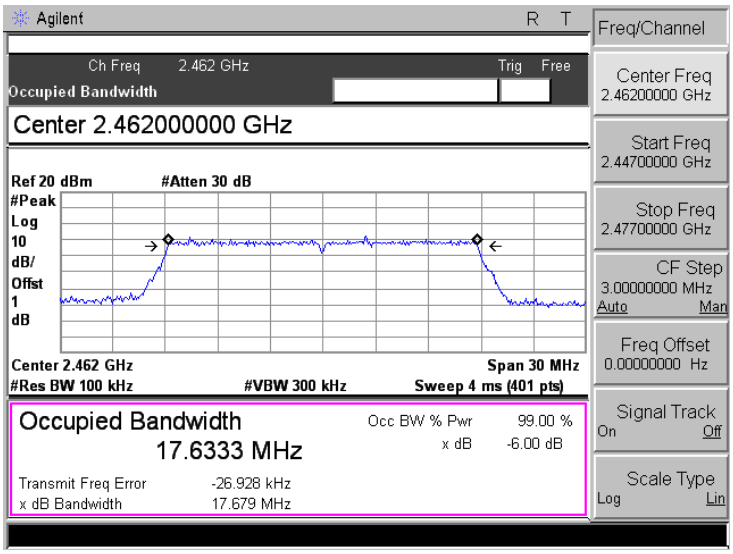

7. RF Output Power

7.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

7.2 Test Procedure

According to the KDB-558074 D01 v05 Subclause 8.3.2.2 and ANSI C63.10-2013 Subclause 11.9.2.2, when this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth

a) Set span to at least 1.5 times the OBW.
b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
c) Set VBW ⩾ 3 x RBW.
d) Number of points in sweep ⩾ 2 × span / RBW. (This gives bin-to-bin spacing ⩽ RBW/2, so that narrowband signals are not lost between frequency bins.)
e) Sweep time = auto.
f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
g) If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ⩾ 98 %, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".
h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

7.3 Summary of Test Results/Plots

Test Mode	Frequency MHz	Reading dBm	Output Power mW	Limit mW
802.11b _ 11Mbps	2412	14.10	25.704	1000
	2437	14.11	25.763	1000
	2462	13.67	23.281	1000
802.11g_54Mbps	2412	11.90	15.488	1000
	2437	11.67	14.689	1000
	2462	12.05	16.032	1000
802.11n HT20_MCS7	2412	11.87	15.382	1000
	2437	12.13	16.331	1000
	2462	11.56	14.322	1000

Please refer to the following test plots:

802.11b-Low 11Mbps	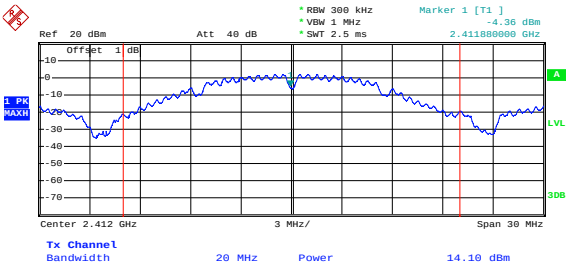 Date: 14.NOV.2018 11:56:24
802.11b-Middle 11Mbps	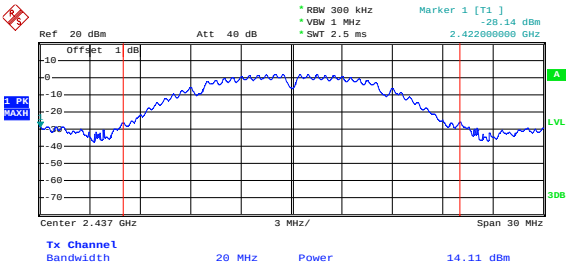 Date: 14.NOV.2018 11:57:57
802.11b-High 11Mbps	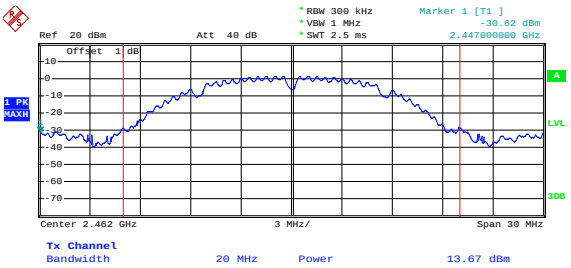 Date: 14.NOV.2018 11:58:44

802.11g-Low 54Mbps	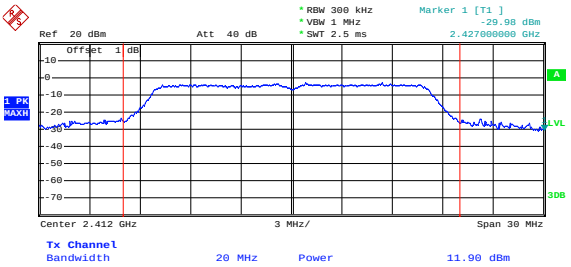 Date: 14.NOV.2018 13:49:26
802.11g-Middle 54Mbps	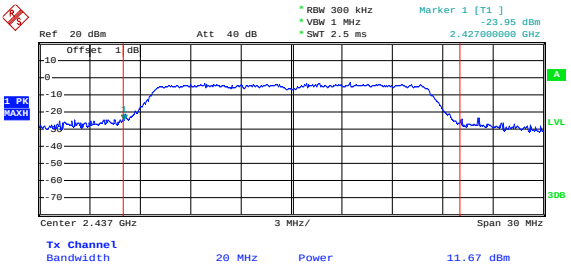 Date: 14.NOV.2018 13:50:08
802.11g-High 54Mbps	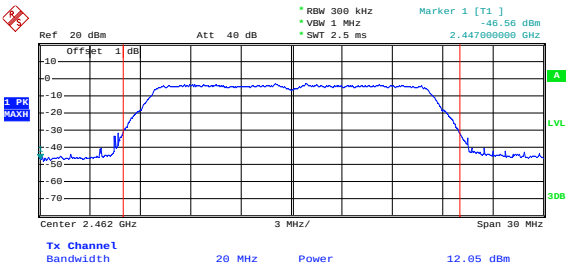 Date: 14.NOV.2018 14:31:11

802.11n-HT20-Low MCS7	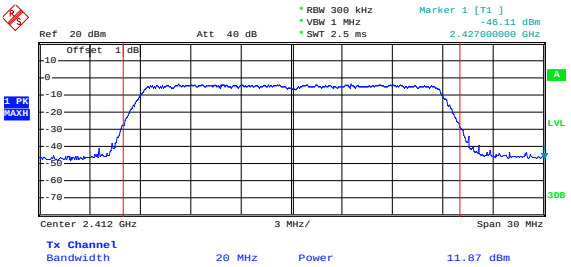 Date: 14.NOV.2018 14:33:51
802.11n-HT20-Middle MCS7	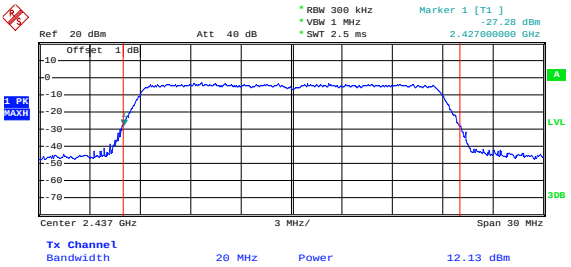 Date: 14.NOV.2018 14:34:17
802.11n-HT20-High MCS7	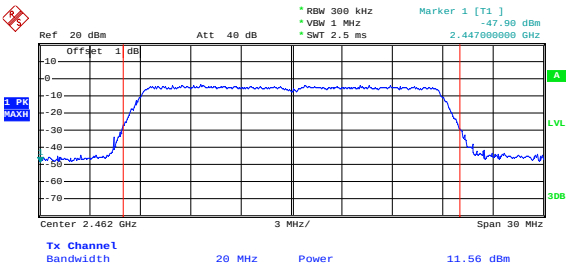 Date: 14.NOV.2018 14:34:46

8. Field Strength of Spurious Emissions

8.1 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.
The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.
The spacing between the peripherals was 10 cm.

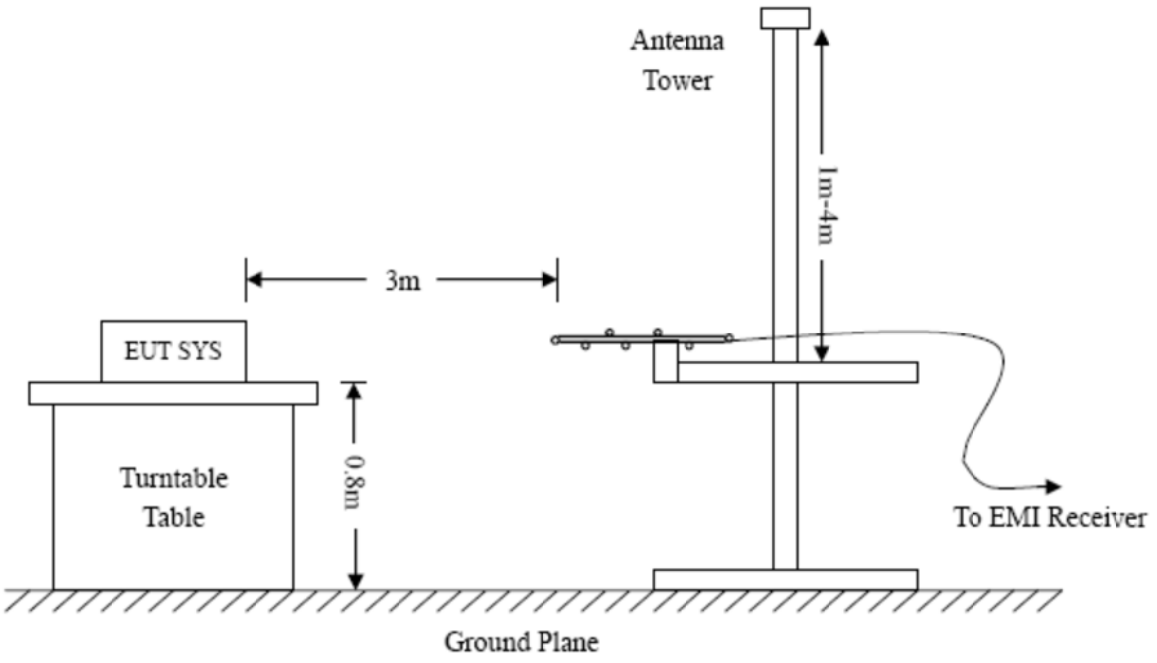

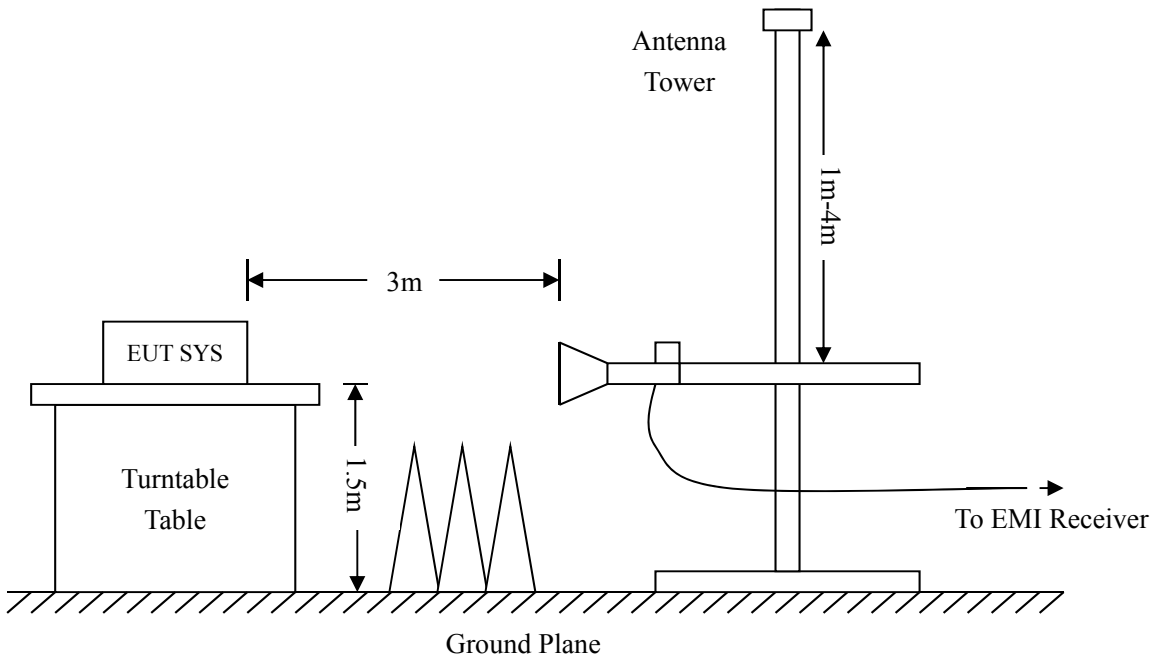

Frequency :9kHz-30MHz	Frequency :30MHz-1GHz	Frequency :Above 1GHz
RBW=10KHz,	RBW=120KHz,	RBW=1MHz,
VBW =30KHz	VBW=360KHz	VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto	Sweep time= Auto	Sweep time= Auto
Trace = max hold	Trace = max hold	Trace = max hold
Detector function = peak	Detector function = peak, QP	Detector function = peak, AV

8.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

Corr. Ampl. = Indicated Reading + Ant. Factor + Cable Loss – Ampl. Gain

The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit. The equation for margin calculation is as follows:

Margin = Corr. Ampl. – FCC Part 15 Limit

8.4 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.
All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.

➢ Spurious Emissions Below 1GHz

802.11b_11Mbps			
Test Channel	Low	Polarity:	Horizontal

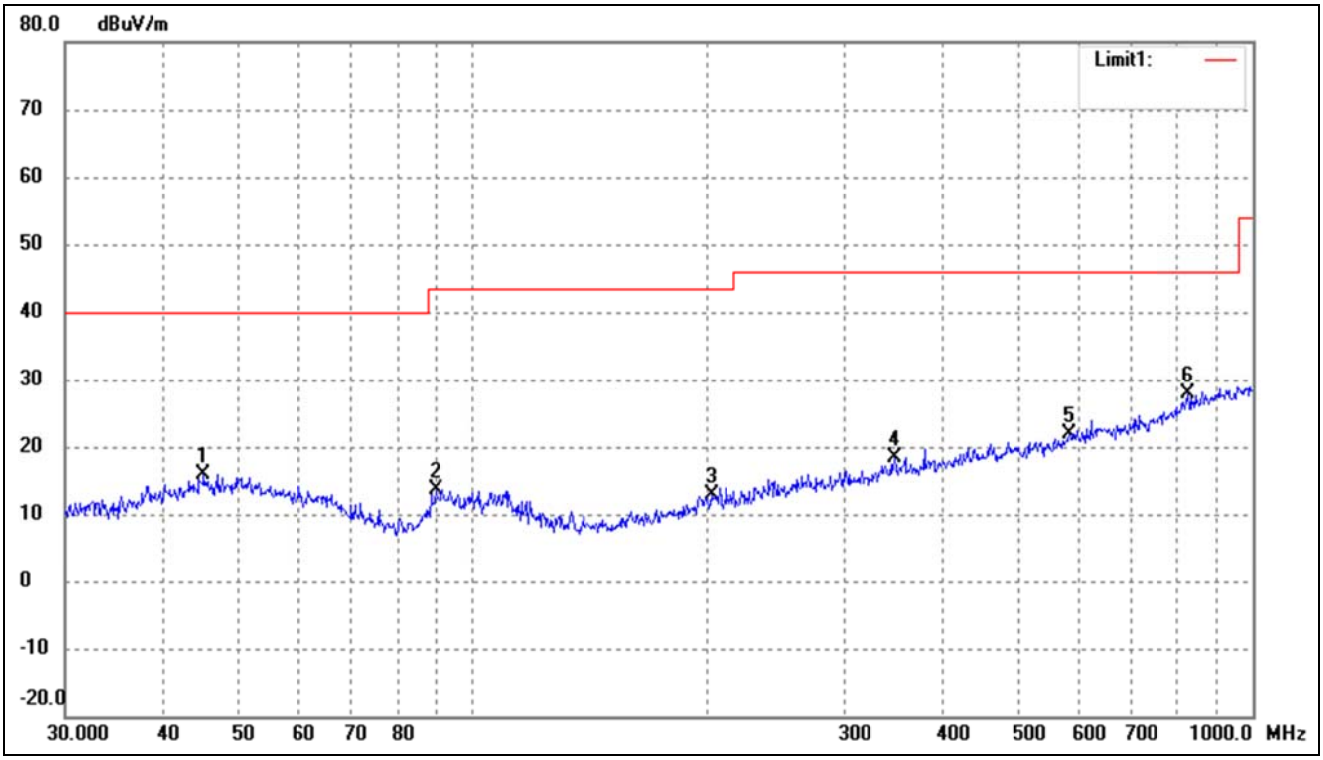

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	45.2166	27.72	-11.92	15.80	40.00	-24.20	306	100	peak
2	89.5900	27.36	-13.72	13.64	43.50	-29.86	98	100	peak
3	202.1005	26.18	-13.22	12.96	43.50	-30.54	282	100	peak
4	348.0274	27.45	-8.96	18.49	46.00	-27.51	107	100	peak
5	582.7425	27.40	-5.61	21.79	46.00	-24.21	266	100	peak
6	827.4934	28.14	-0.29	27.85	46.00	-18.15	287	100	peak

802.11b_11Mbps			
Test Channel	Low	Polarity:	Vertical

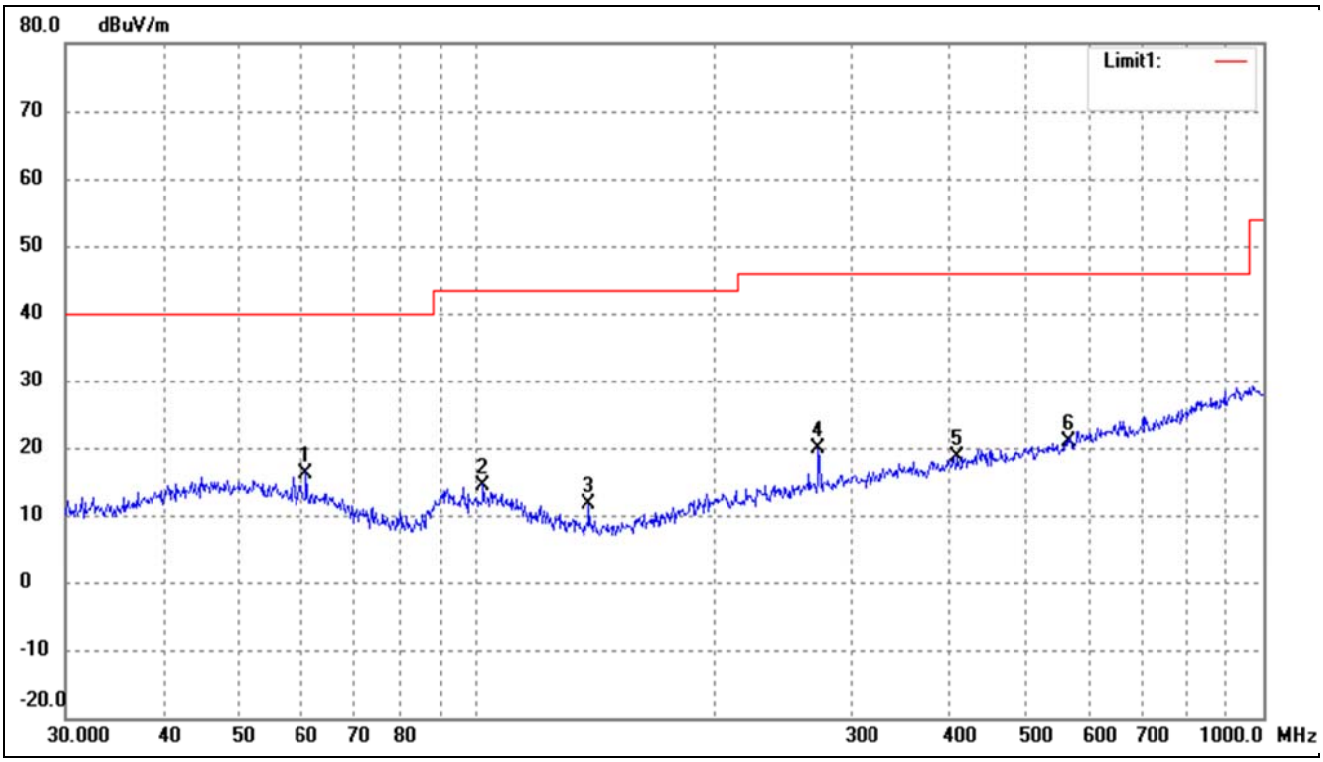

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	60.7044	29.68	-13.43	16.25	40.00	-23.75	353	100	peak
2	102.0014	28.13	-13.63	14.50	43.50	-29.00	97	100	peak
3	138.8735	28.79	-17.24	11.55	43.50	-31.95	289	100	peak
4	272.2776	30.85	-11.04	19.81	46.00	-26.19	110	100	peak
5	408.9460	27.23	-8.51	18.72	46.00	-27.28	333	100	peak
6	566.6223	27.21	-6.33	20.88	46.00	-25.12	303	100	peak

802.11b_11Mbps			
Test Channel	Middle	Polarity:	Horizontal

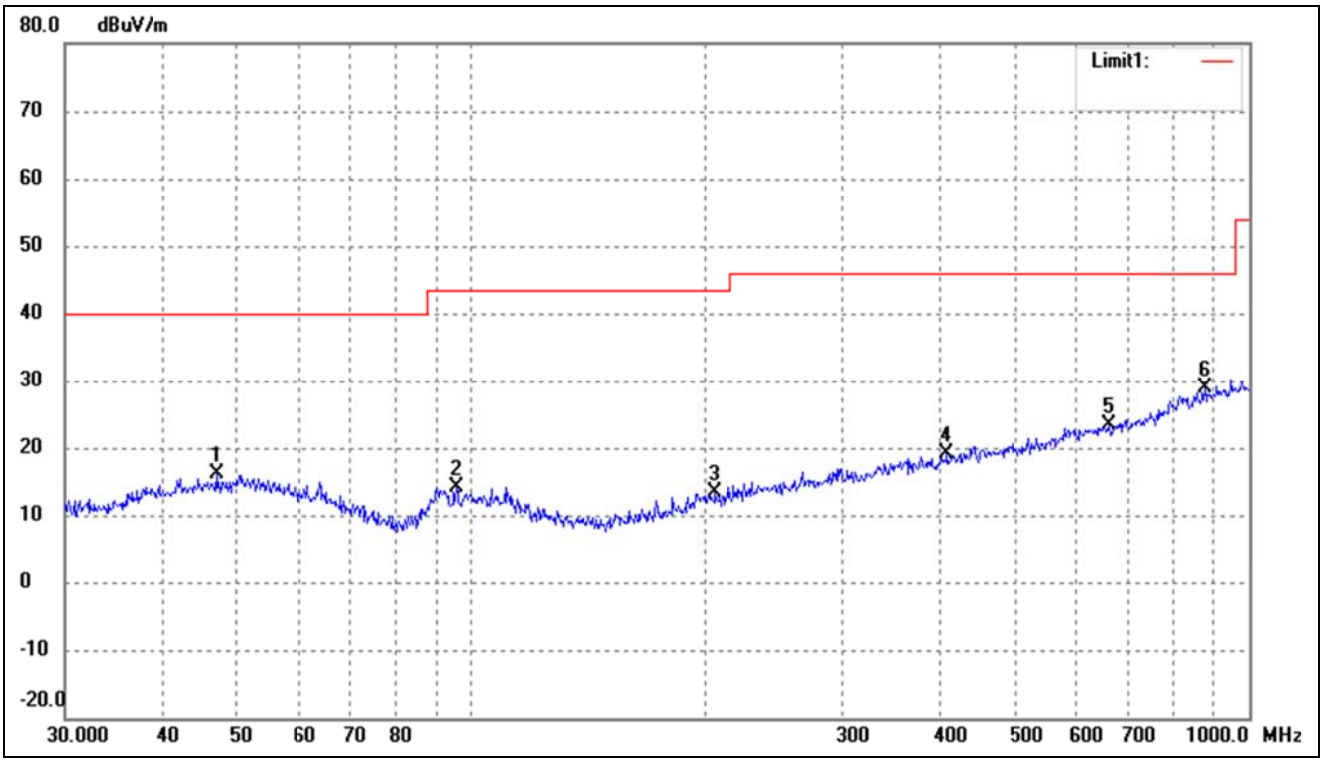

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	46.9948	27.78	-11.73	16.05	40.00	-23.95	181	100	peak
2	95.7622	28.52	-14.31	14.21	43.50	-29.29	230	100	peak
3	205.6751	26.62	-13.30	13.32	43.50	-30.18	61	100	peak
4	408.9460	27.57	-8.51	19.06	46.00	-26.94	127	100	peak
5	661.1505	27.95	-4.61	23.34	46.00	-22.66	265	100	peak
6	878.3214	28.25	0.59	28.84	46.00	-17.16	121	100	peak

802.11b_11Mbps			
Test Channel	Middle	Polarity:	Vertical

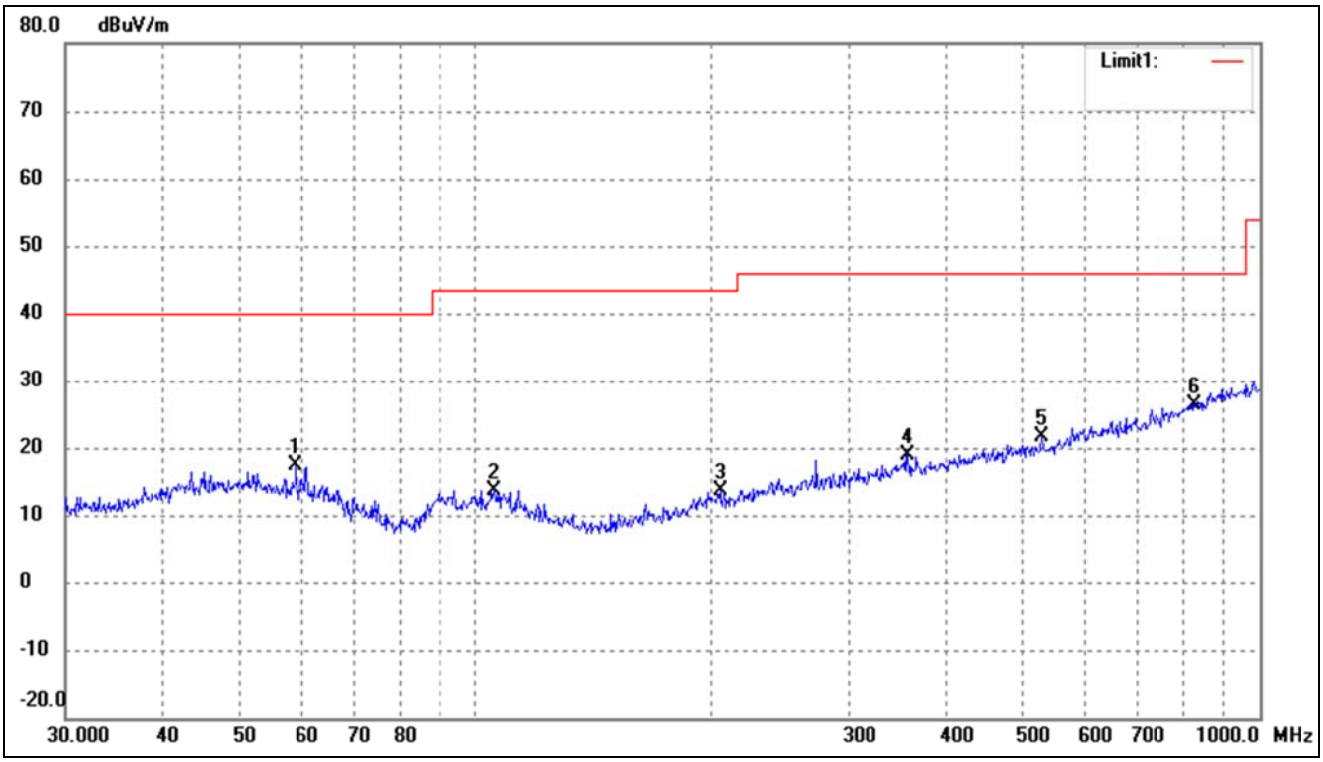

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	59.0251	30.63	-13.24	17.39	40.00	-22.61	54	100	peak
2	105.6415	27.19	-13.44	13.75	43.50	-29.75	181	100	peak
3	204.9551	26.99	-13.26	13.73	43.50	-29.77	84	100	peak
4	356.6758	27.96	-9.06	18.90	46.00	-27.10	251	100	peak
5	528.2458	28.55	-6.96	21.59	46.00	-24.41	71	100	peak
6	827.4934	26.78	-0.29	26.49	46.00	-19.51	192	100	peak

802.11b_11Mbps			
Test Channel	High	Polarity:	Horizontal

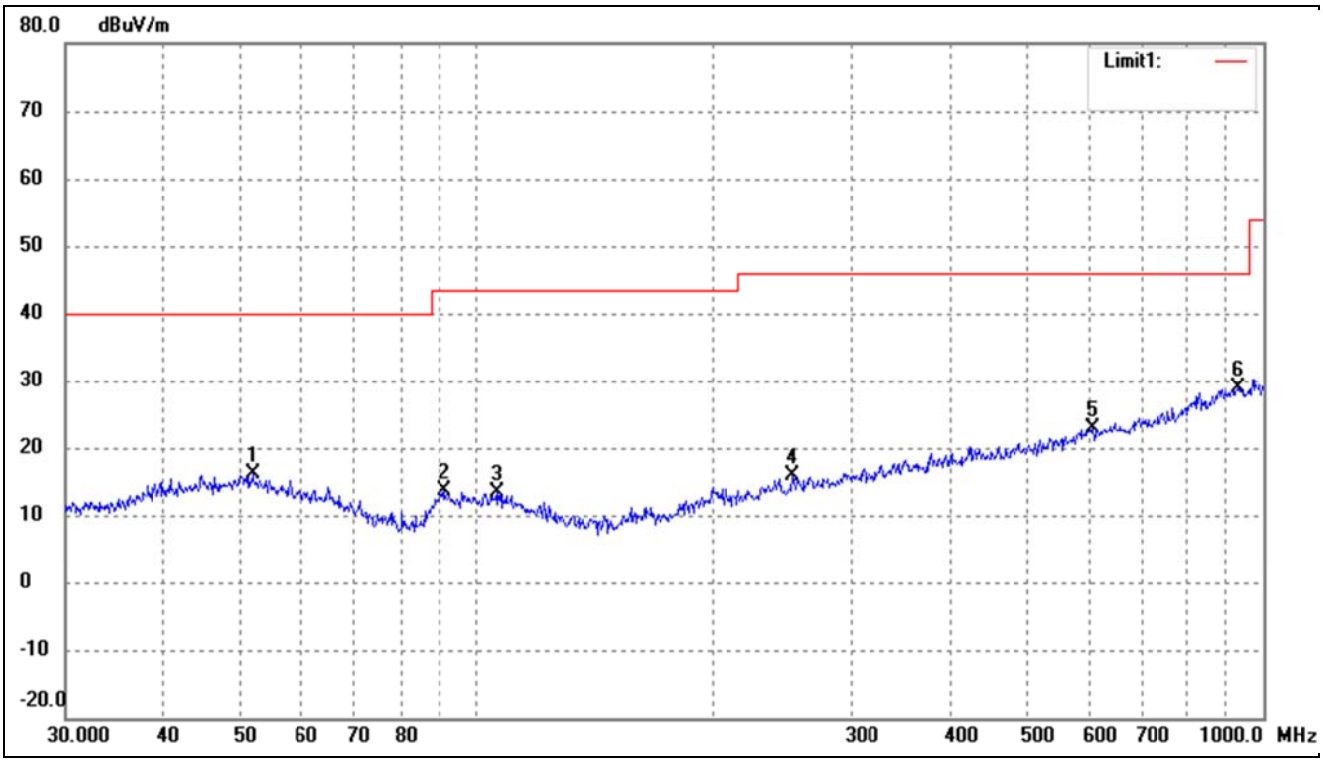

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	51.8430	27.61	-11.59	16.02	40.00	-23.98	162	100	peak
2	91.1746	27.28	-13.63	13.65	43.50	-29.85	162	100	peak
3	106.0126	26.94	-13.48	13.46	43.50	-30.04	83	100	peak
4	252.0627	27.61	-11.71	15.90	46.00	-30.10	105	100	peak
5	607.7867	28.18	-5.22	22.96	46.00	-23.04	332	100	peak
6	929.0082	27.55	1.31	28.86	46.00	-17.14	127	100	peak

802.11b_11Mbps			
Test Channel	High	Polarity:	Vertical

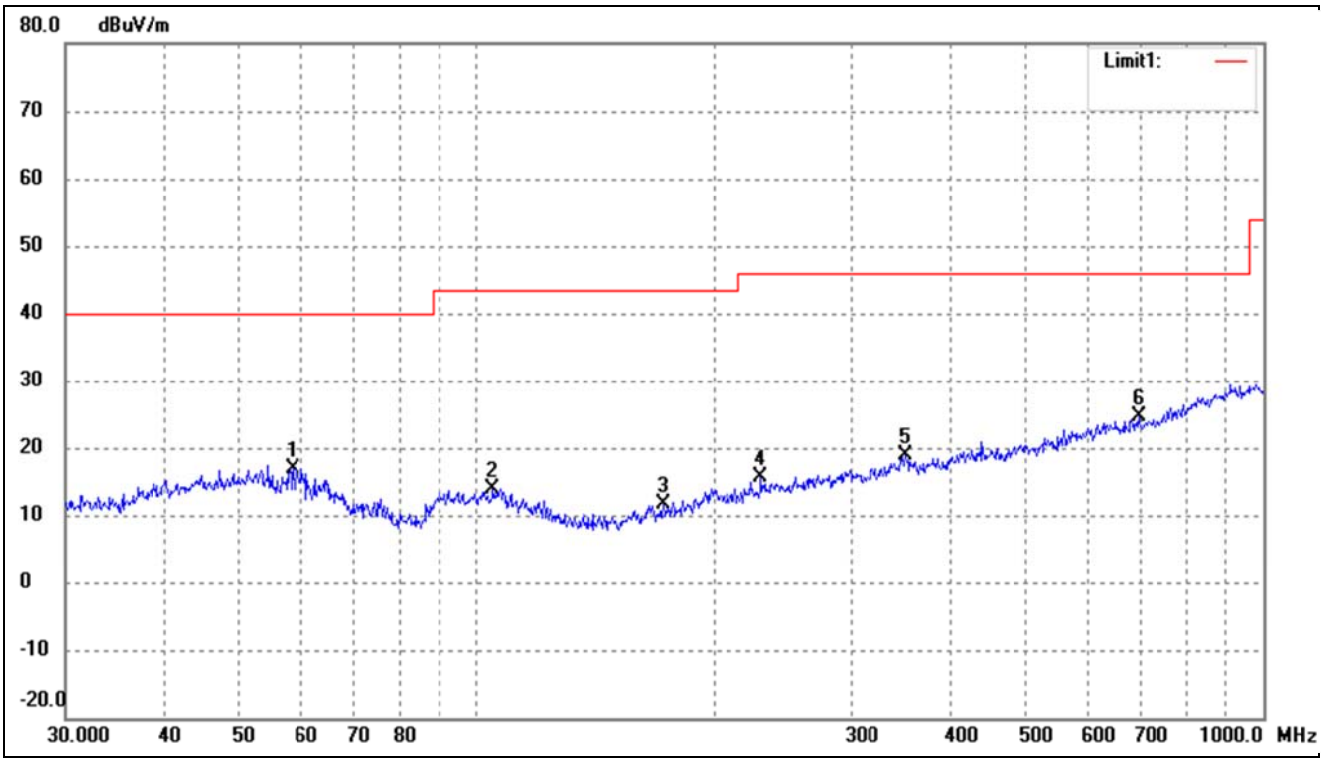

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	58.4074	30.06	-13.18	16.88	40.00	-23.12	52	100	peak
2	104.9033	27.39	-13.39	14.00	43.50	-29.50	199	100	peak
3	172.5988	27.66	-16.07	11.59	43.50	-31.91	100	100	peak
4	230.0985	27.81	-12.26	15.55	46.00	-30.45	123	100	peak
5	351.7079	27.72	-8.92	18.80	46.00	-27.20	346	100	peak
6	694.4174	28.41	-3.90	24.51	46.00	-21.49	283	100	peak

- Spurious Emissions Below 1GHz
- *Test Mode: 802.11b_11Mbps (worst case)*

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4824.00	61.70	-3.87	57.83	74.00	-16.17	H	PK
4824.00	45.52	-3.87	41.65	54.00	-12.35	H	AV
7236.00	57.07	1.14	58.21	74.00	-15.79	H	PK
7236.00	42.13	1.19	43.32	54.00	-10.68	H	AV
4824.00	63.34	-3.86	59.48	74.00	-14.52	V	PK
4824.00	46.85	-3.86	42.99	54.00	-11.01	V	AV
7236.00	56.48	1.10	57.58	74.00	-16.42	V	PK
7236.00	41.51	1.10	42.61	54.00	-11.39	V	AV
Middle Channel-2437MHz							
4874.00	62.53	-3.74	58.79	74.00	-15.21	H	PK
4874.00	47.11	-3.74	43.37	54.00	-10.63	H	AV
7311.00	57.15	1.47	58.62	74.00	-15.38	H	PK
7311.00	41.89	1.47	43.36	54.00	-10.64	H	AV
4874.00	61.90	-3.74	58.16	74.00	-15.84	V	PK
4874.00	46.39	-3.74	42.65	54.00	-11.35	V	AV
7311.00	57.21	1.47	58.68	74.00	-15.32	V	PK
7311.00	42.23	1.47	43.70	54.00	-10.30	V	AV
High Channel-2462MHz							
4924.00	61.18	-3.59	57.59	74.00	-16.41	H	PK
4924.00	46.27	-3.59	42.68	54.00	-11.32	H	AV
7386.00	54.16	1.79	55.95	74.00	-18.05	H	PK
7386.00	39.90	1.79	41.69	54.00	-12.31	H	AV
4924.00	61.80	-3.59	58.21	74.00	-15.79	V	PK
4924.00	46.94	-3.59	43.35	54.00	-10.65	V	AV
7386.00	56.87	1.79	58.66	74.00	-15.34	V	PK
7440.00	41.83	1.79	43.62	54.00	-10.38	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Out of Band Emissions

9.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Test Procedure

According to the KDB 558074D01 v05 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

a) Set the center frequency and span to encompass frequency range to be measured.
b) Set the RBW = 100 kHz.
c) Set the VBW ≥ [3 × RBW].
d) Detector = peak.
e) Sweep time = auto couple.
f) Trace mode = max hold.
g) Allow trace to fully stabilize.
h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

A. Radiated emission measurements:
Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)
RBW = 1MHz, VBW = 1MHz for peak value measured
RBW = 1MHz, VBW = 10Hz for average value measured
Sweep = auto; Detector function = peak/average; Trace = max hold
All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

a) RBW = as specified in Table 9/

b) VBW ⩾ [3 × RBW].

c) Detector = peak.

d) Sweep time = auto.

e) Trace mode = max hold.

f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

Table 9—RBW as a function of frequency

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1000 MHz	100 kHz to 120 kHz
>1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

9.3 Summary of Test Results/Plots

➢ Radiated test

802.11b_11Mbps			
Test Channel	Low	Polarity:	Vertical(worst case)

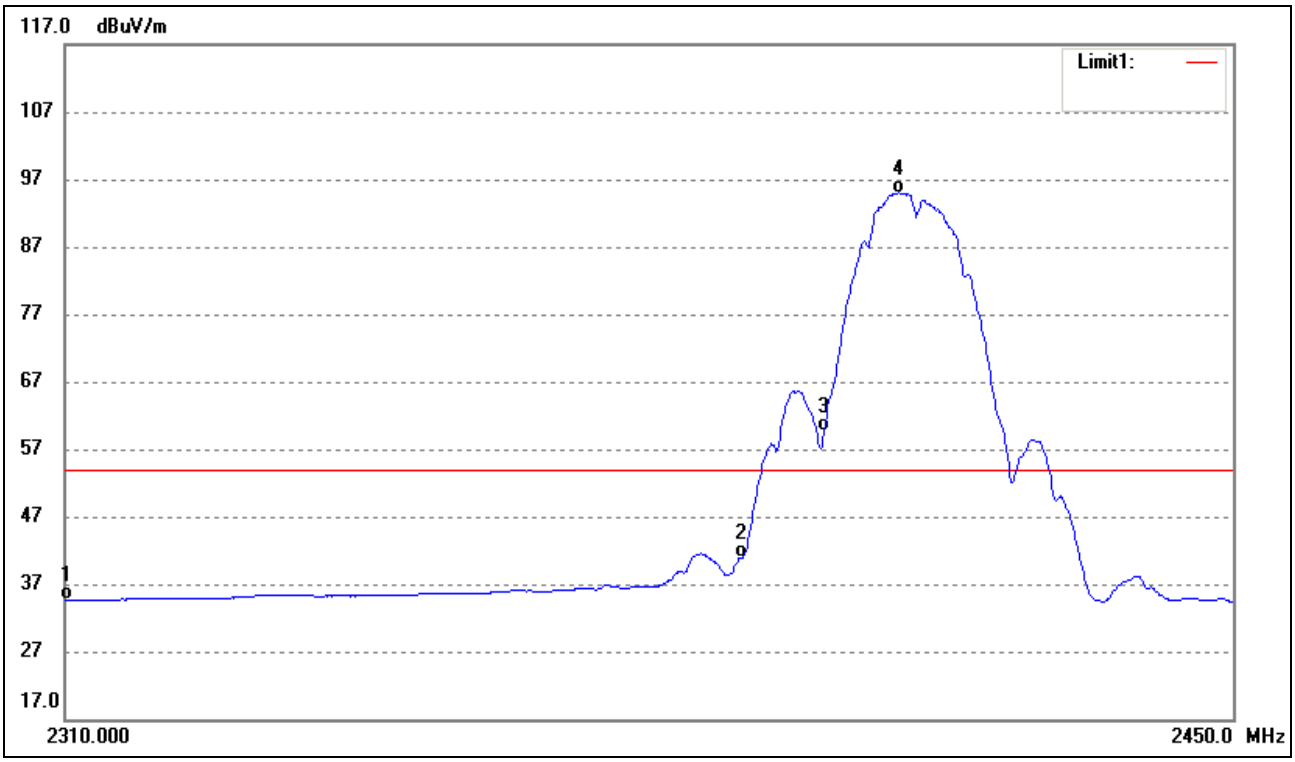

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	2310.000	42.36	-7.78	34.58	54.00	-19.42	Average Detector
	2310.000	54.09	-7.78	46.31	74.00	-27.69	Peak Detector
2	2390.000	48.29	-7.32	40.97	54.00	-13.03	Average Detector
	2390.000	74.89	-7.32	67.57	74.00	-6.43	Peak Detector
3	2400.000	66.92	-7.26	59.66	Delta =35.34dBc		Average Detector
4	2409.115	102.21	-7.21	95.00			Average Detector

802.11b_11Mbps			
Test Channel	High	Polarity:	Vertical(worst case)

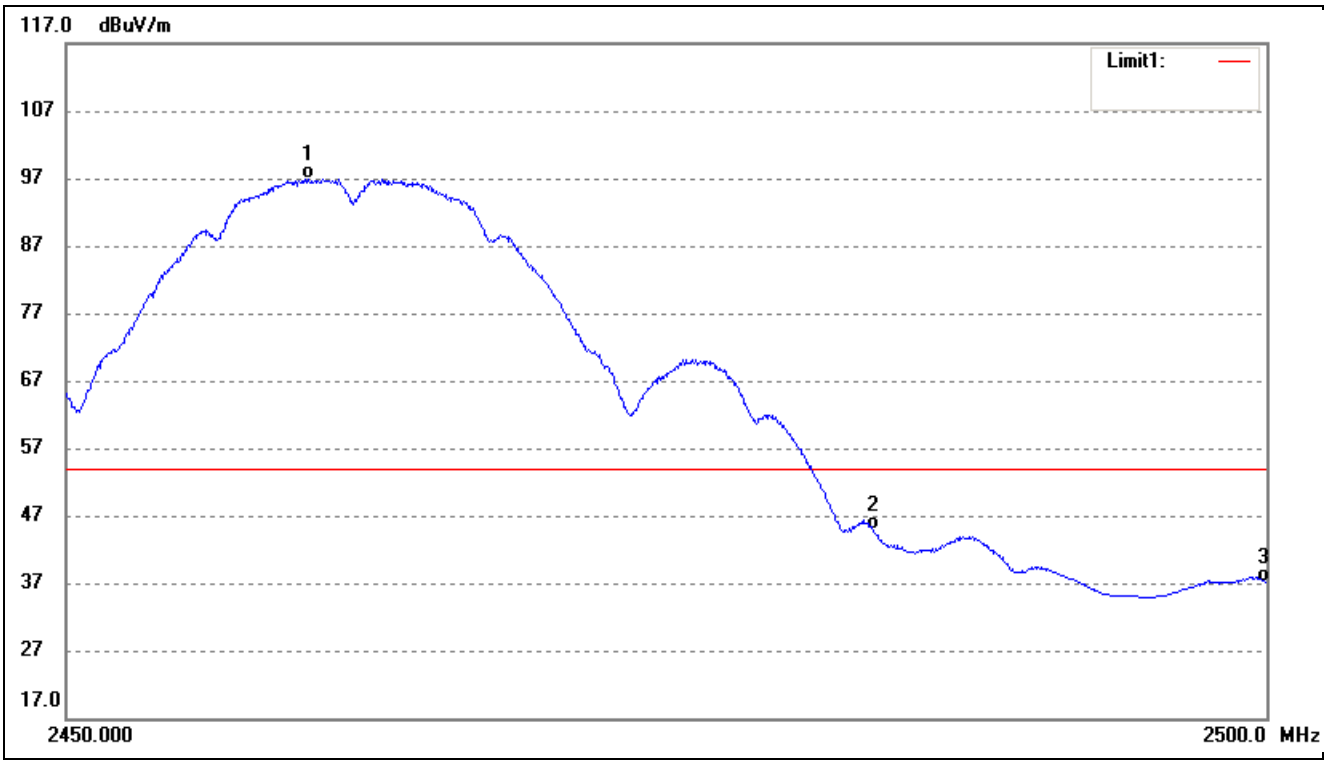

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2460.019	103.79	-6.90	96.89	/	/	Average Detector
	2460.416	114.26	-6.90	107.36	/	/	Peak Detector
2	2483.500	51.60	-6.77	44.83	54.00	-9.17	Average Detector
	2483.500	73.03	-6.77	66.26	74.00	-7.74	Peak Detector
3	2500.000	43.84	-6.67	37.17	54.00	-16.83	Average Detector
	2500.000	65.02	-6.67	58.35	74.00	-15.65	Peak Detector

802.11g_54Mbps			
Test Channel	Low	Polarity:	Vertical(worst case)

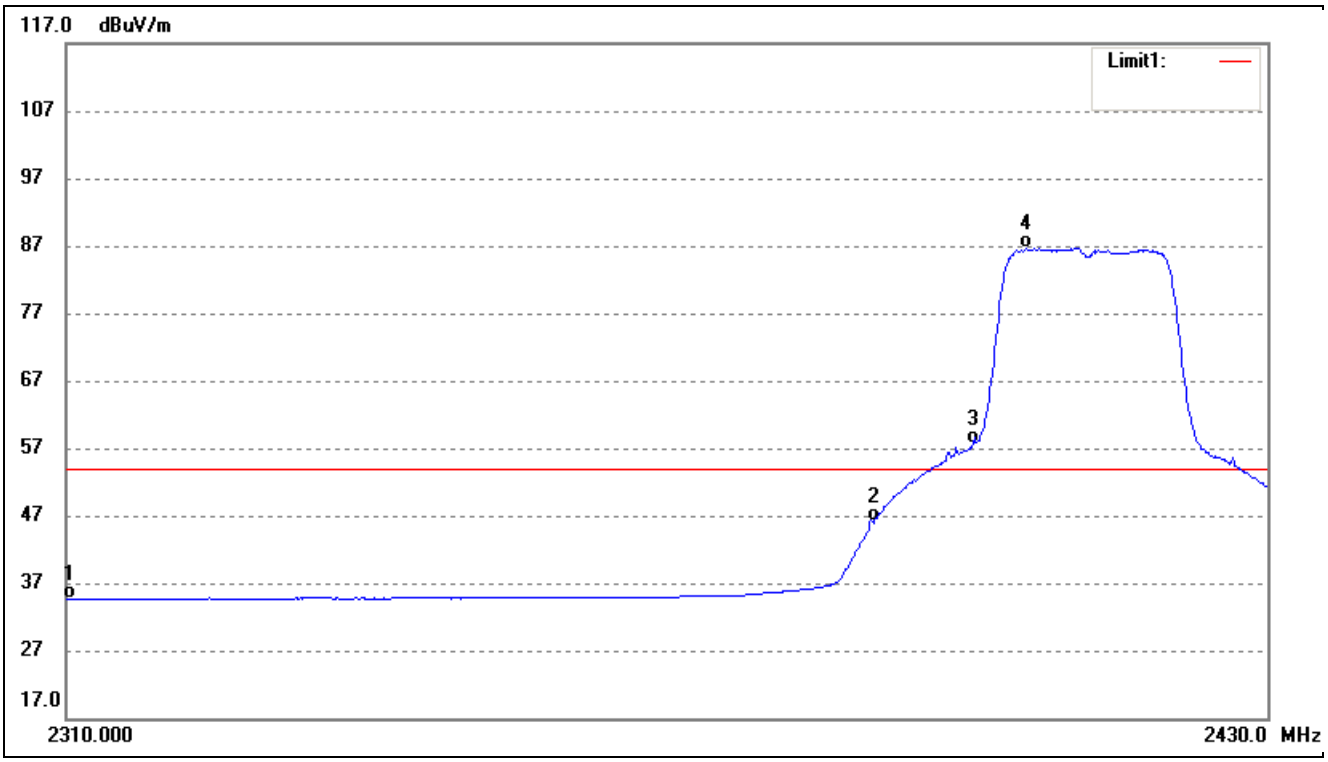

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	2310.000	42.35	-7.78	34.57	54.00	-19.43	Average Detector
	2310.000	53.93	-7.78	46.15	74.00	-27.85	Peak Detector
2	2390.000	53.54	-7.32	46.22	54.00	-7.78	Average Detector
	2390.000	78.57	-7.32	71.25	74.00	-2.75	Peak Detector
3	2400.000	64.83	-7.26	56.57	Delta =30.36dBc		Average Detector
4	2405.390	93.94	-7.22	86.93			Average Detector

802.11g_54Mbps			
Test Channel	High	Polarity:	Vertical(worst case)

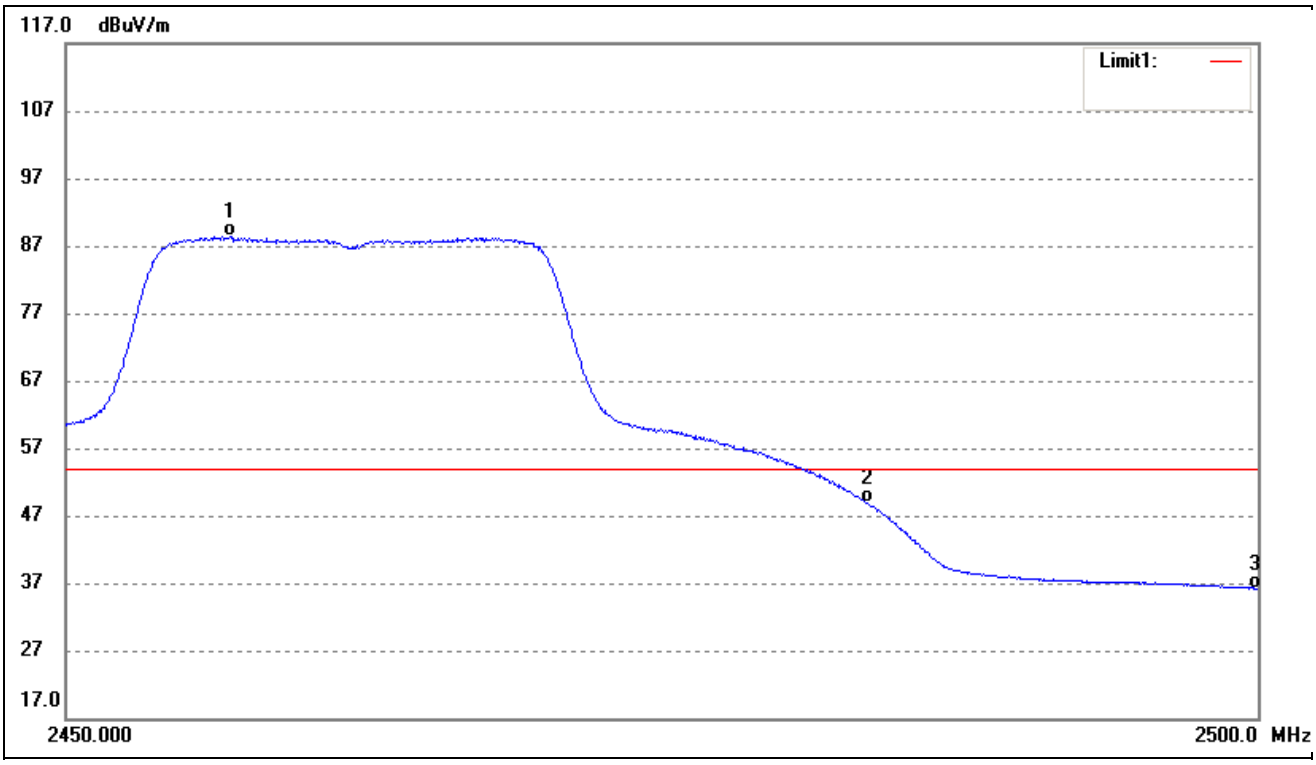

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	2456.840	95.25	-6.92	88.33	/	/	Average Detector
	2456.939	112.07	-6.92	105.15	/	/	Peak Detector
2	2483.500	55.58	-6.77	48.81	54.00	-5.19	Average Detector
	2483.500	72.96	-6.77	66.19	74.00	-7.81	Peak Detector
3	2500.000	42.92	-6.67	36.25	54.00	-17.75	Average Detector
	2500.000	56.10	-6.67	49.43	74.00	-24.57	Peak Detector

802.11n-HT20_MCS7			
Test Channel	Low	Polarity:	Vertical(worst case)

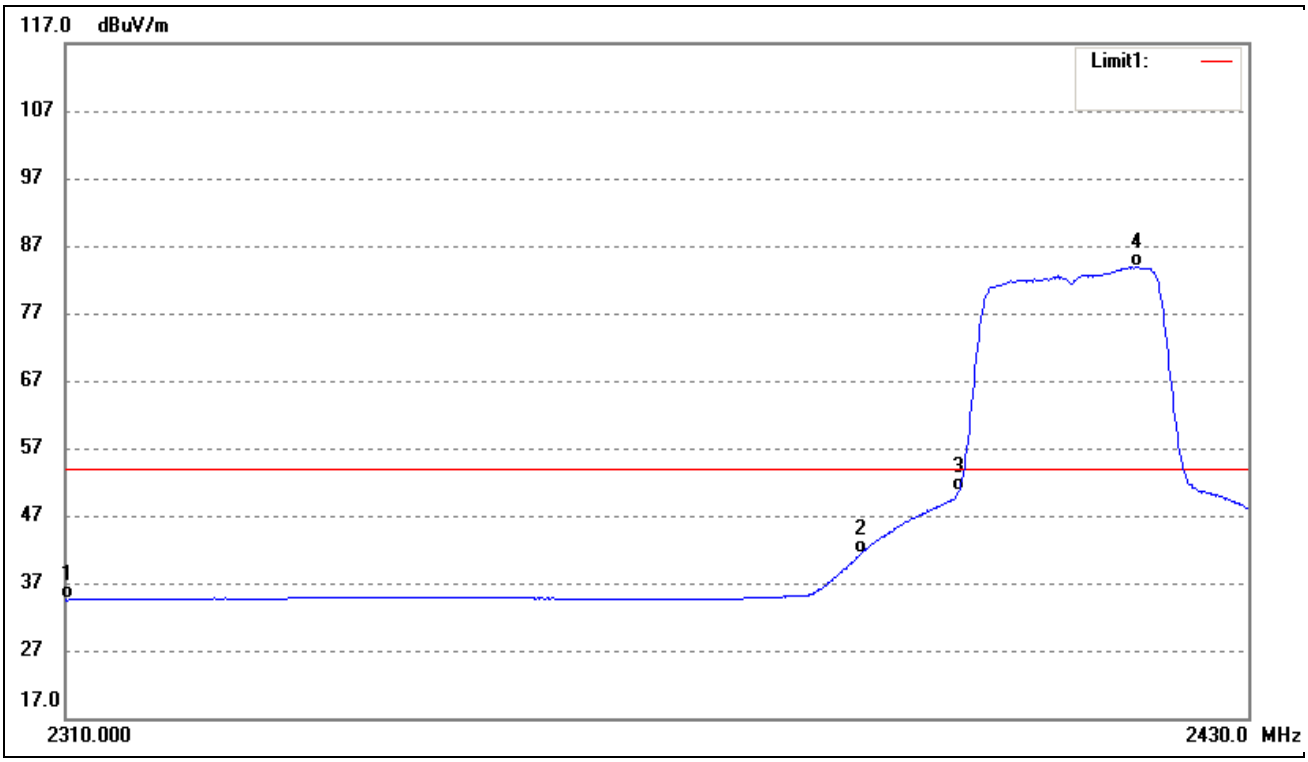

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	2310.000	42.29	-7.78	34.51	54.00	-19.49	Average Detector
	2310.000	55.11	-7.78	47.33	74.00	-26.67	Peak Detector
2	2390.000	48.75	-7.32	41.43	54.00	-12.57	Average Detector
	2390.000	73.74	-7.32	66.42	74.00	-7.58	Peak Detector
3	2400.000	57.83	-7.26	50.57	54.00	-3.43	Average Detector
	2400.000	81.84	-7.26	74.58	/	/	Peak Detector
4	2418.459	91.01	-7.15	83.86	/	/	Average Detector
	2417.725	109.39	-7.15	102.24	/	/	Peak Detector

802.11n-HT20_MCS7			
Test Channel	High	Polarity:	Vertical(worst case)

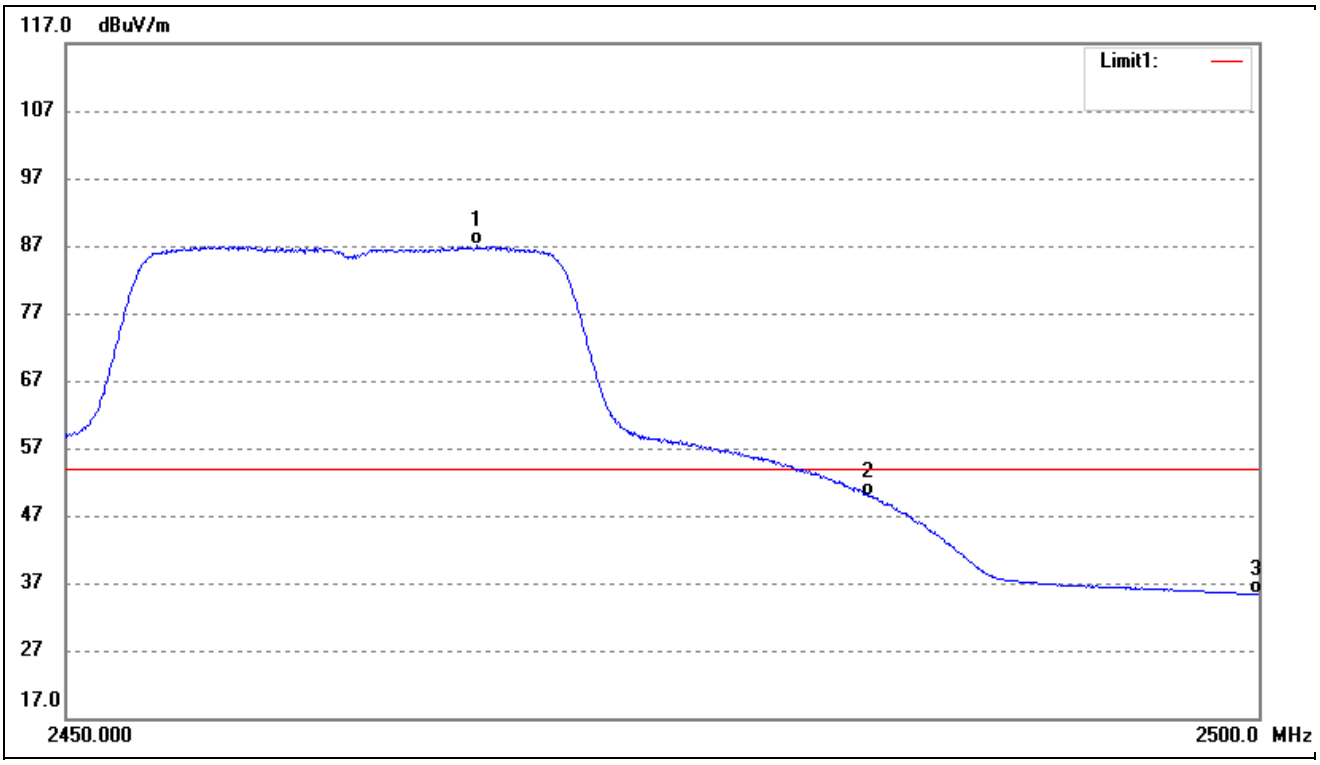

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	2467.136	93.87	-6.86	87.01	/	/	Average Detector
	2467.435	111.45	-6.86	104.59	/	/	Peak Detector
2	2483.500	56.70	-6.77	49.93	54.00	-4.07	Average Detector
	2483.500	79.29	-6.77	72.52	74.00	-1.48	Peak Detector
3	2500.000	42.05	-6.67	35.38	54.00	-18.62	Average Detector
	2500.000	54.68	-6.67	48.01	74.00	-25.99	Peak Detector

➢ Conducted test

802.11b_11Mbps	
Low	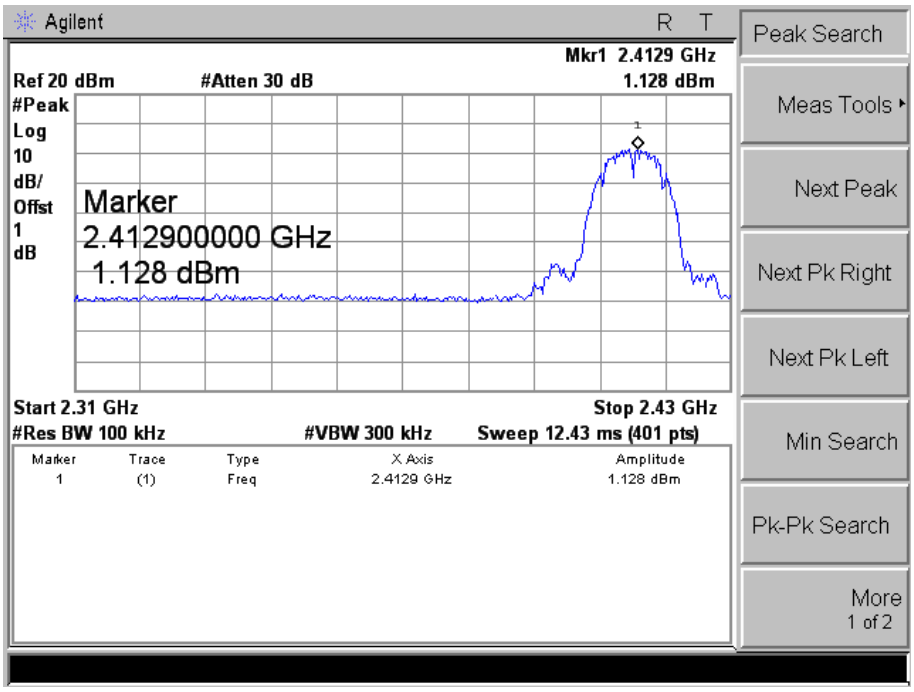
	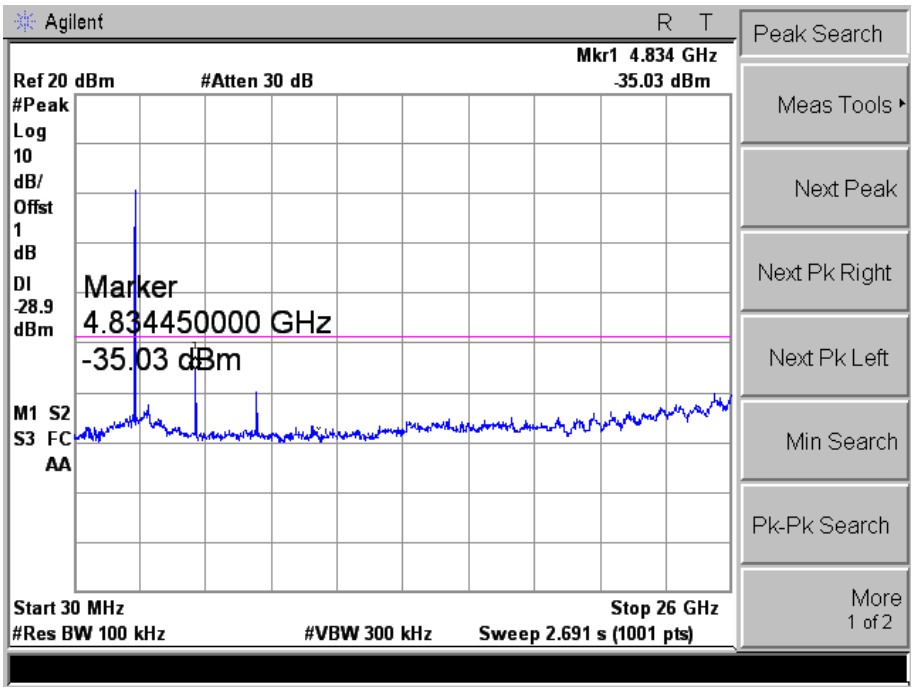

802.11b_11Mbps	
Middle	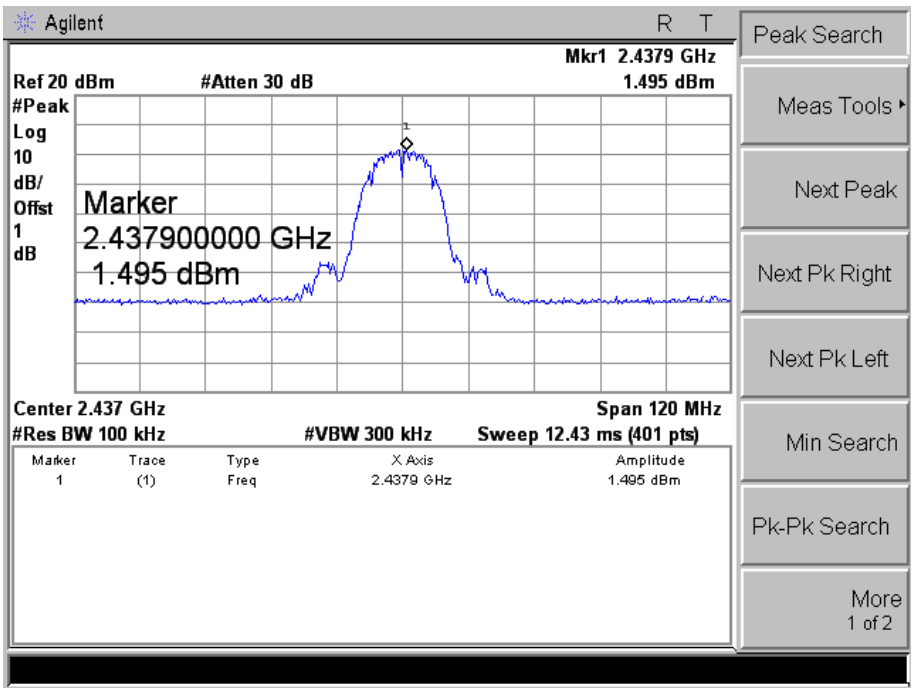 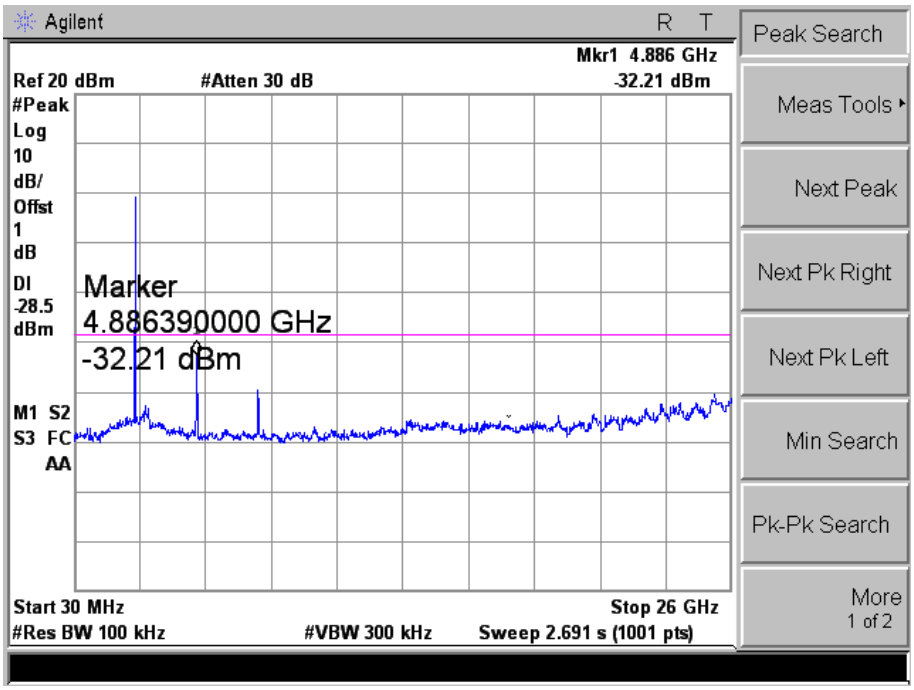

802.11b_11Mbps	
High	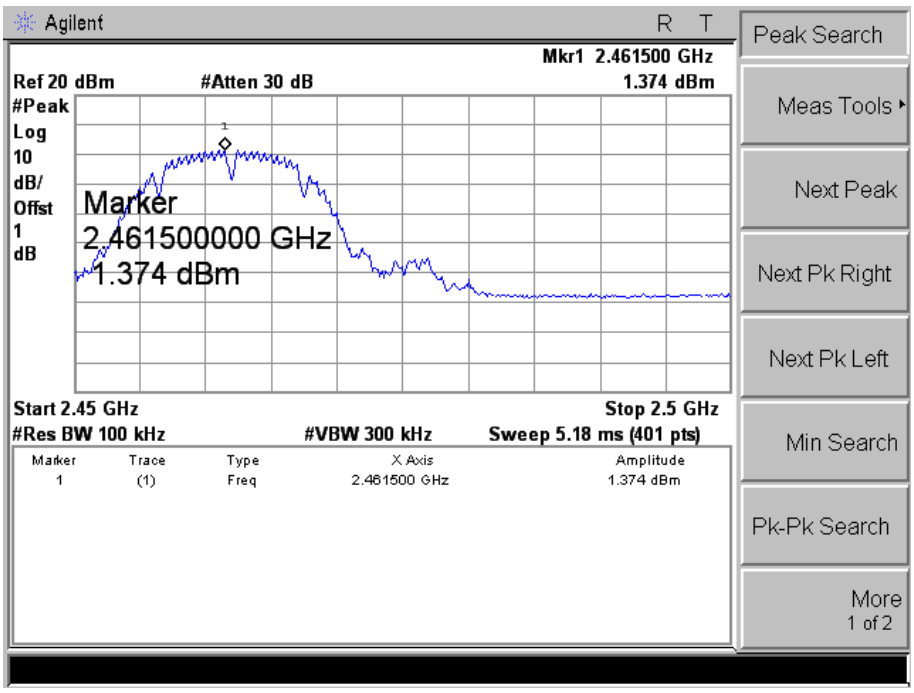
	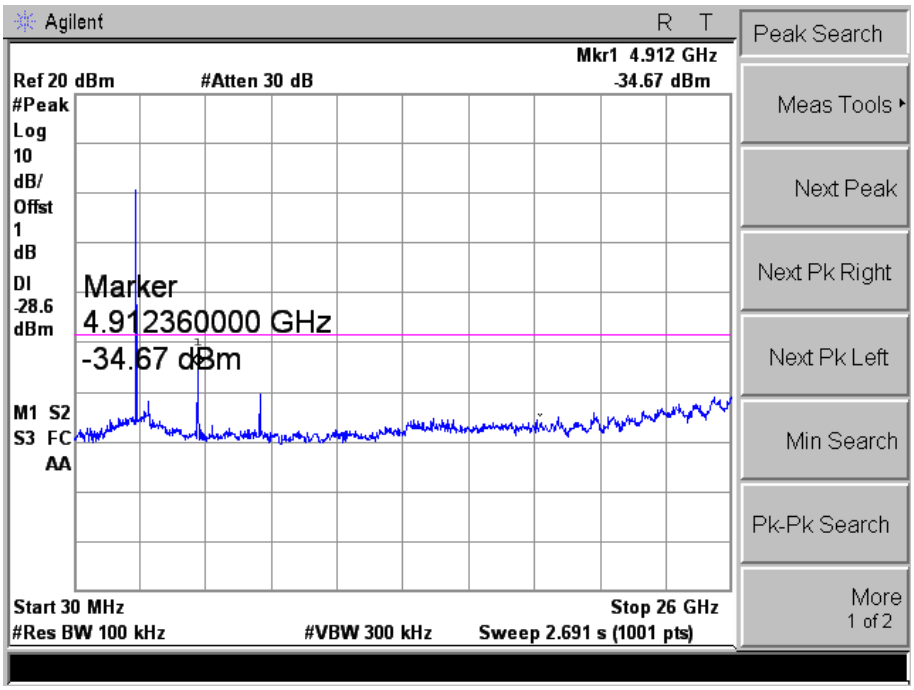

802.11g_54Mbps	
Low	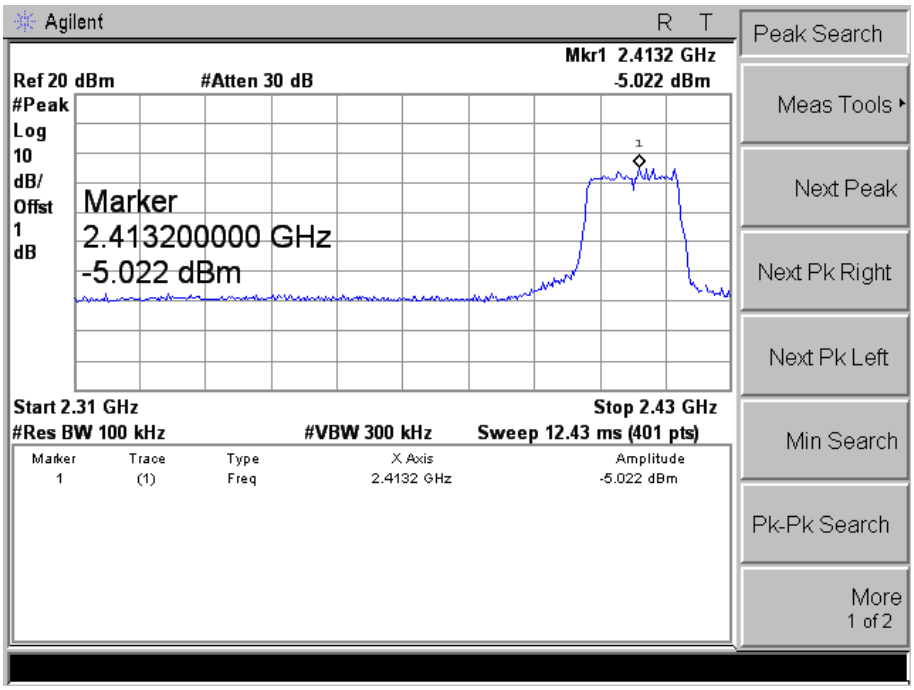
	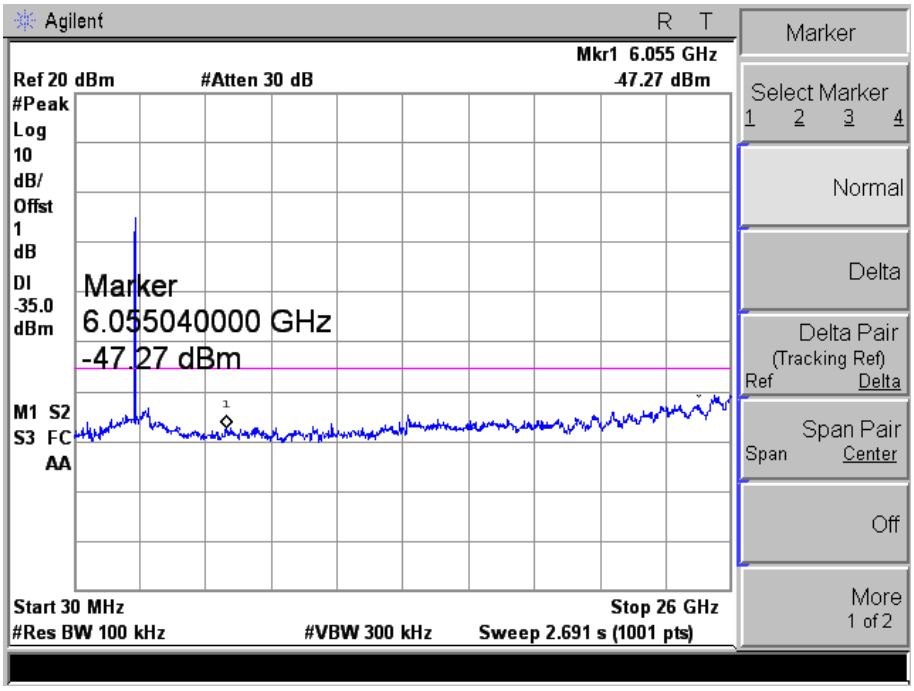

802.11g_54Mbps	
Middle	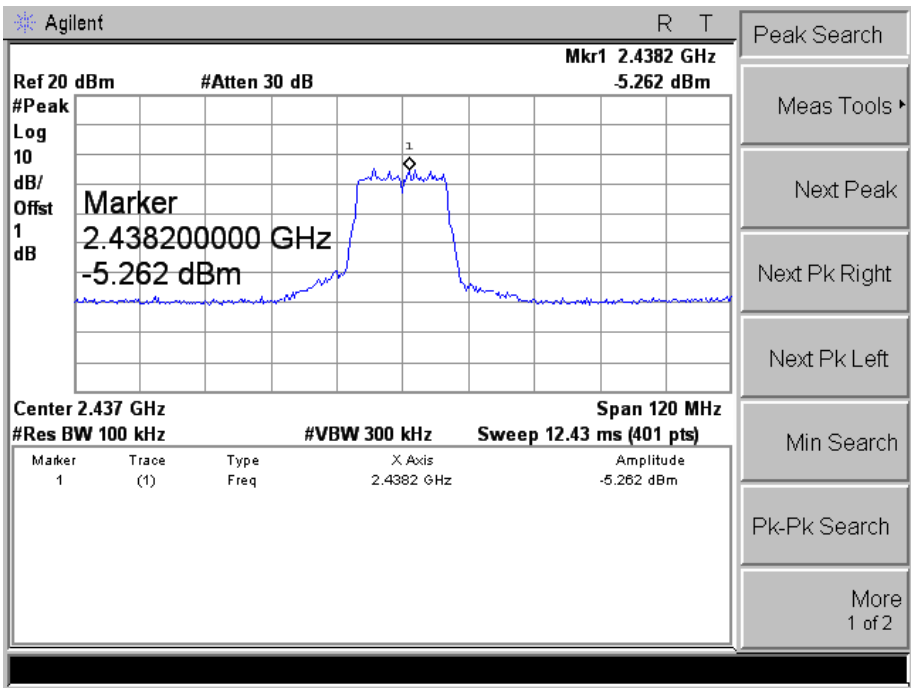 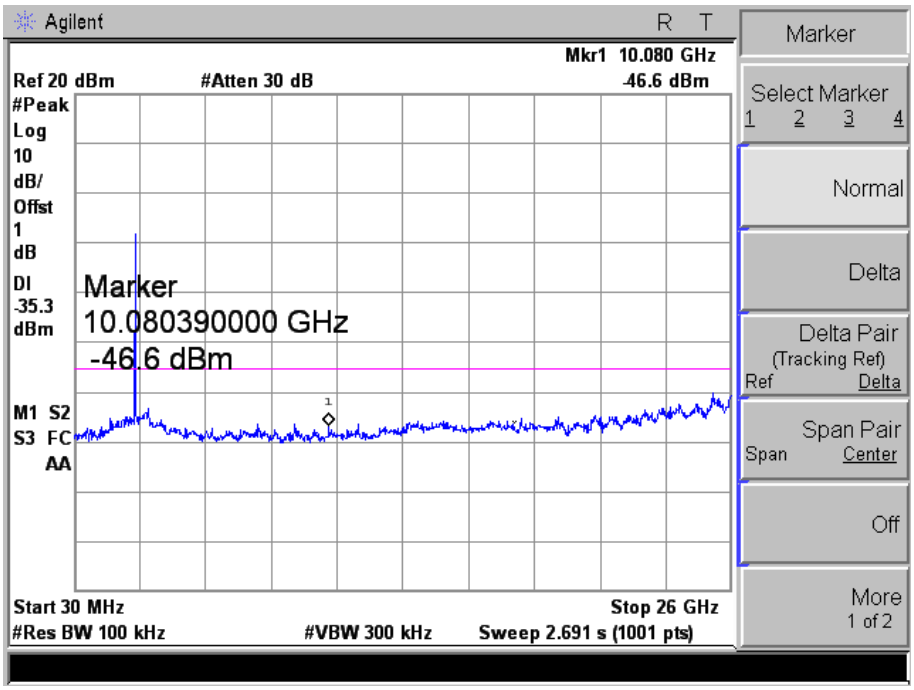

802.11g_54Mbps	
High	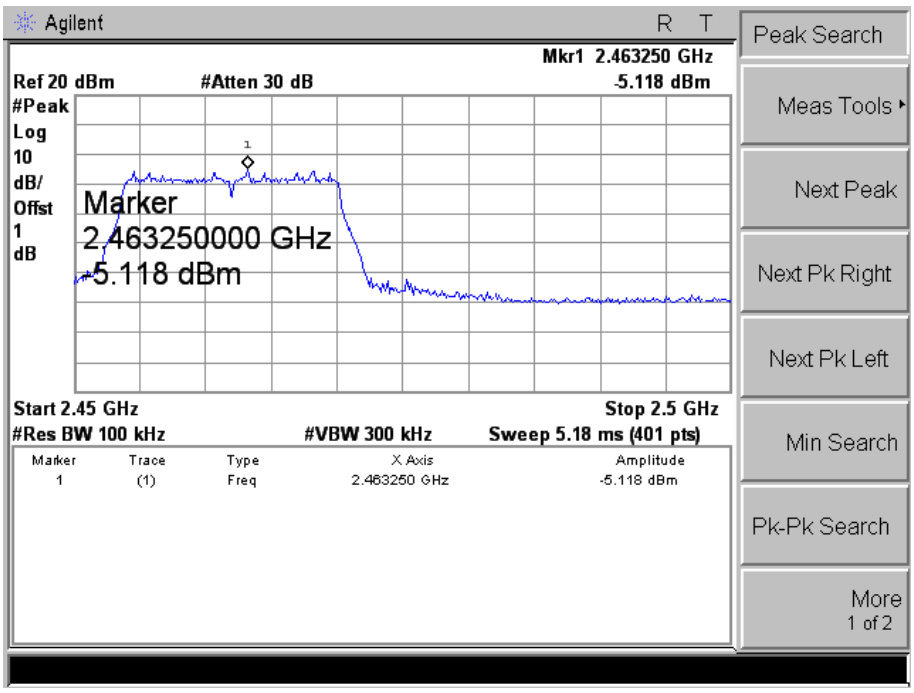
	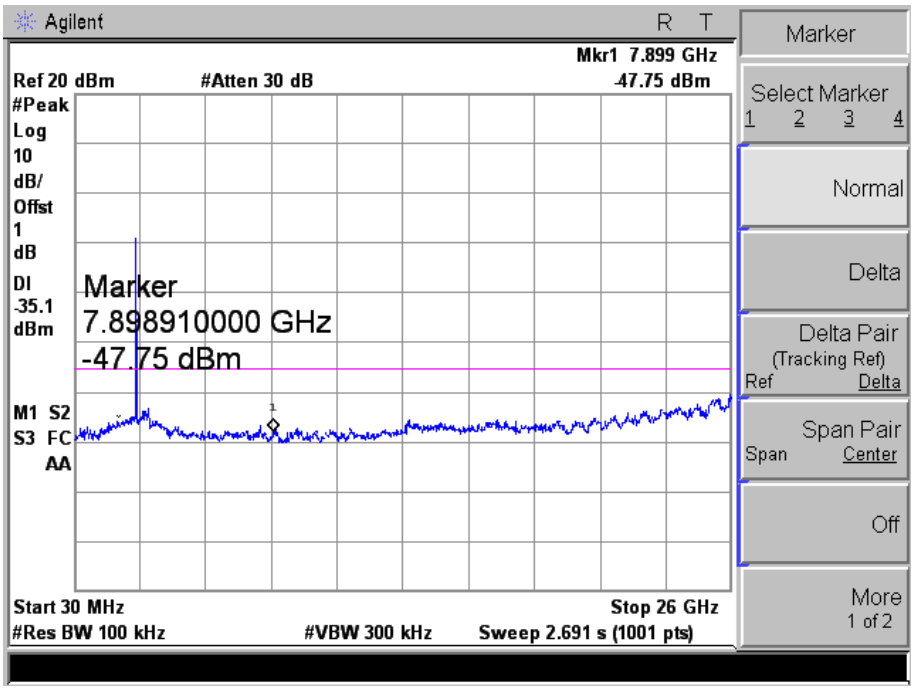

802.11n-HT20_MCS7	
Low	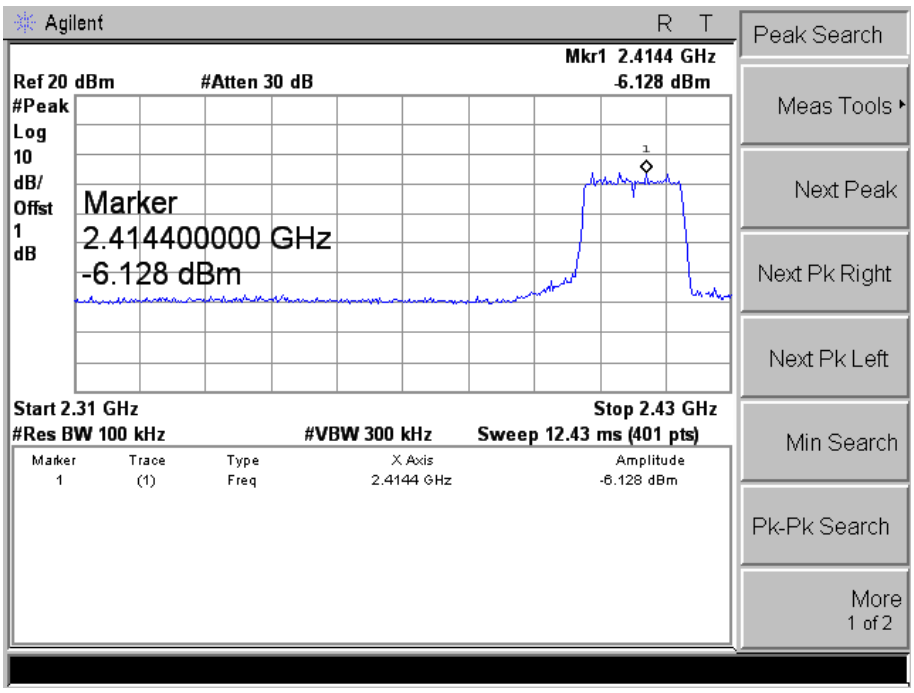 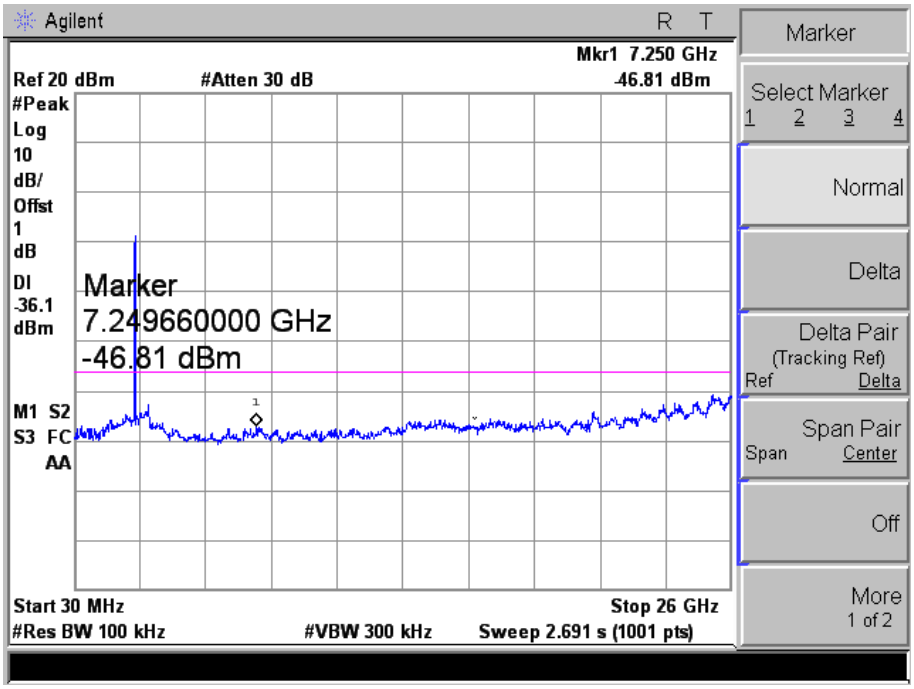

802.11n-HT20_MCS7	
Middle	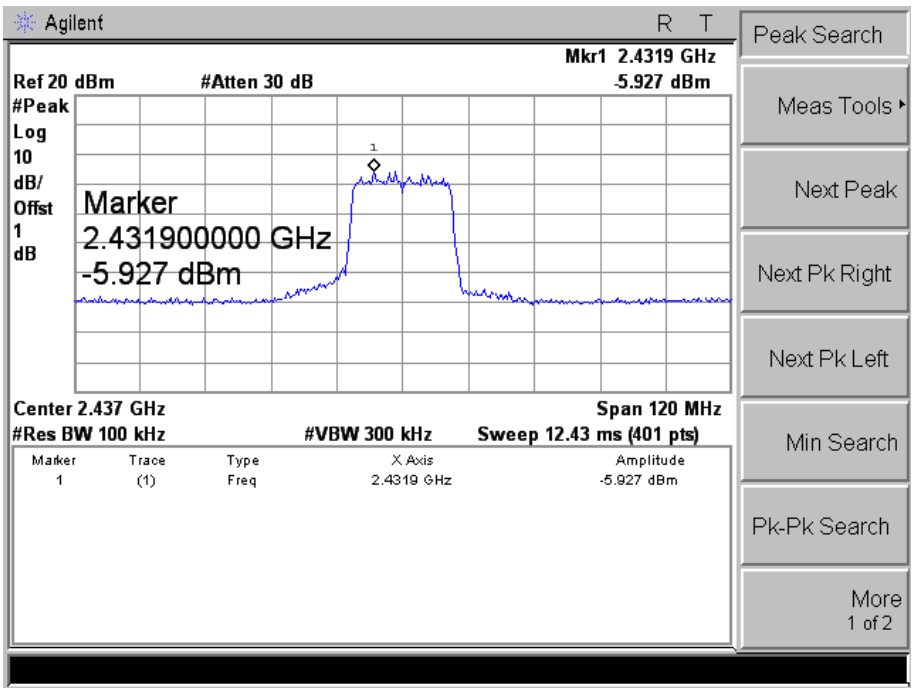 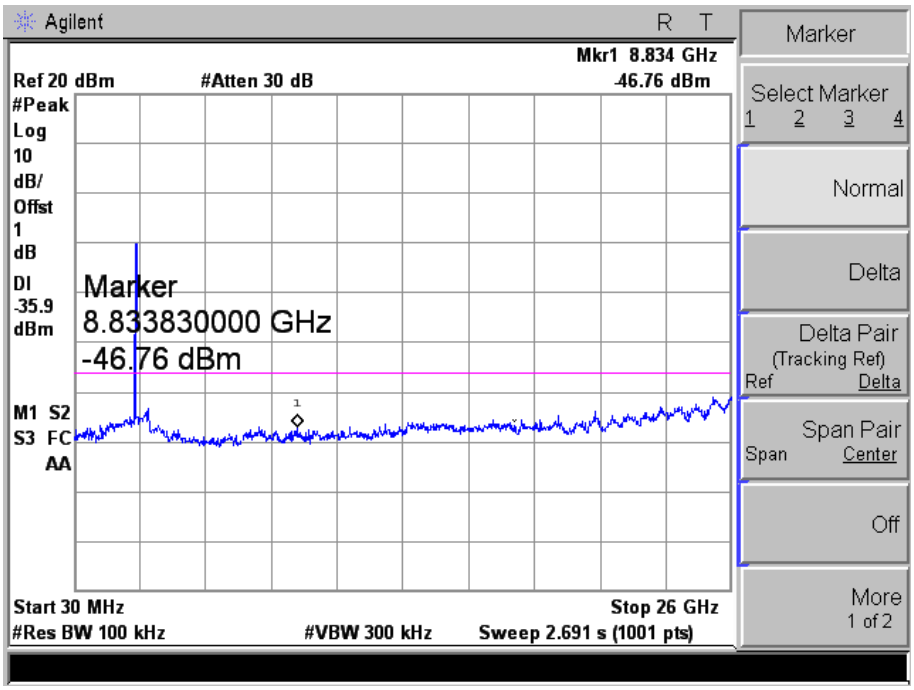

802.11n-HT20_MCS7	
High	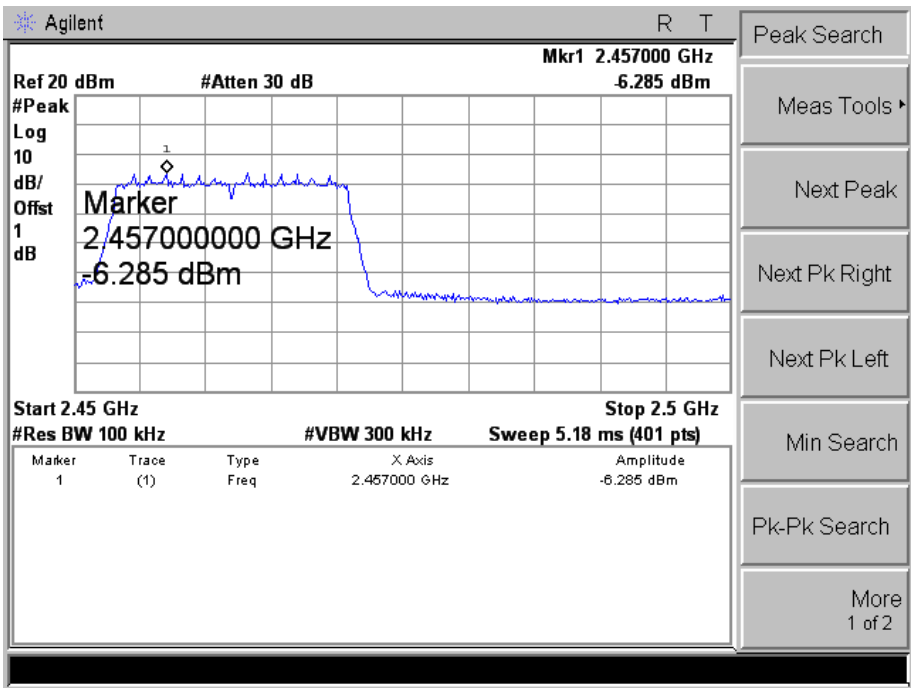 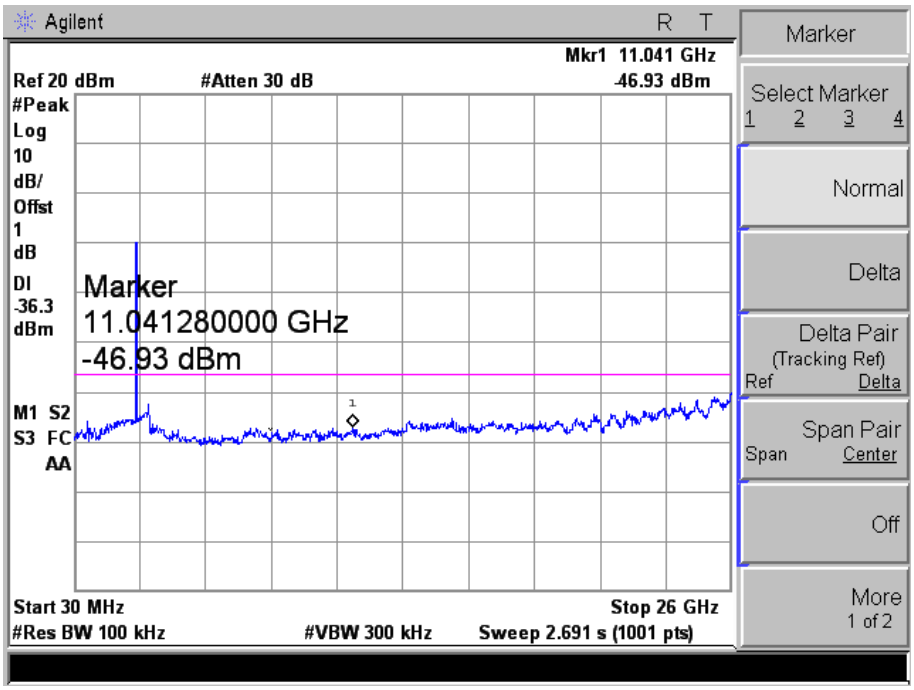

10. Conducted Emissions

10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.
The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.
The spacing between the peripherals was 10 cm.

10.2 Basic Test Setup Block Diagram

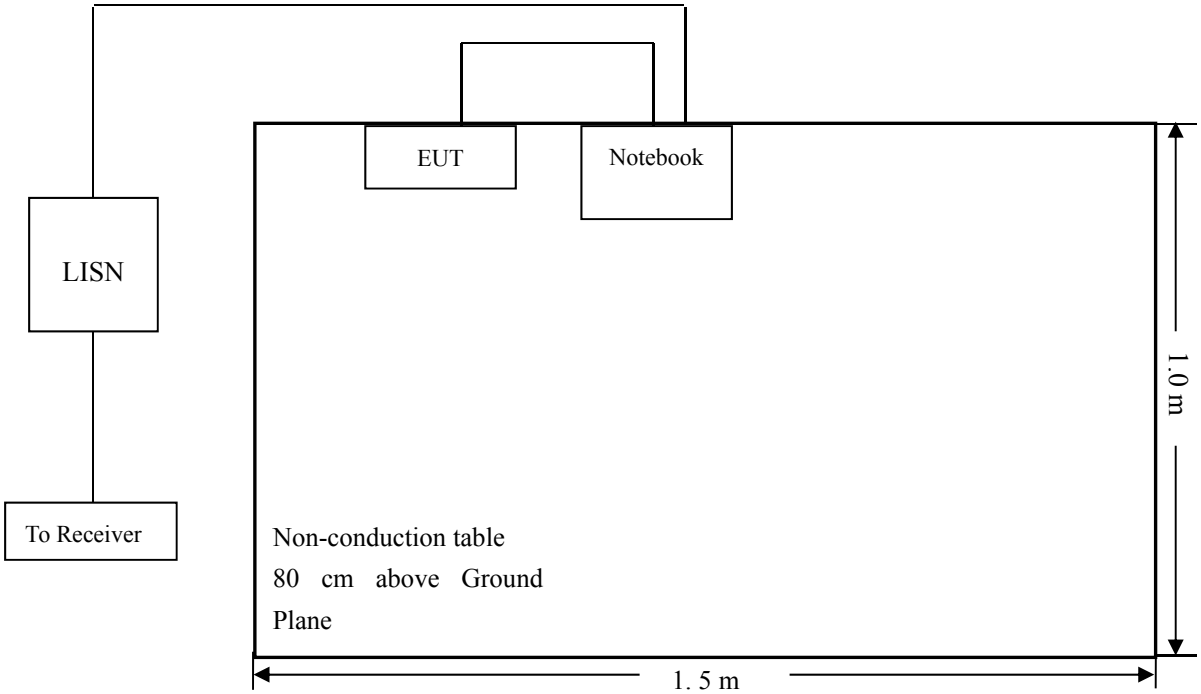

10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency ..... 150 kHz
Stop Frequency ..... 30 MHz
Sweep Speed ..... Auto
IF Bandwidth..... 10 kHz
Quasi-Peak Adapter Bandwidth ..... 9 kHz
Quasi-Peak Adapter Mode ..... Normal

10.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral

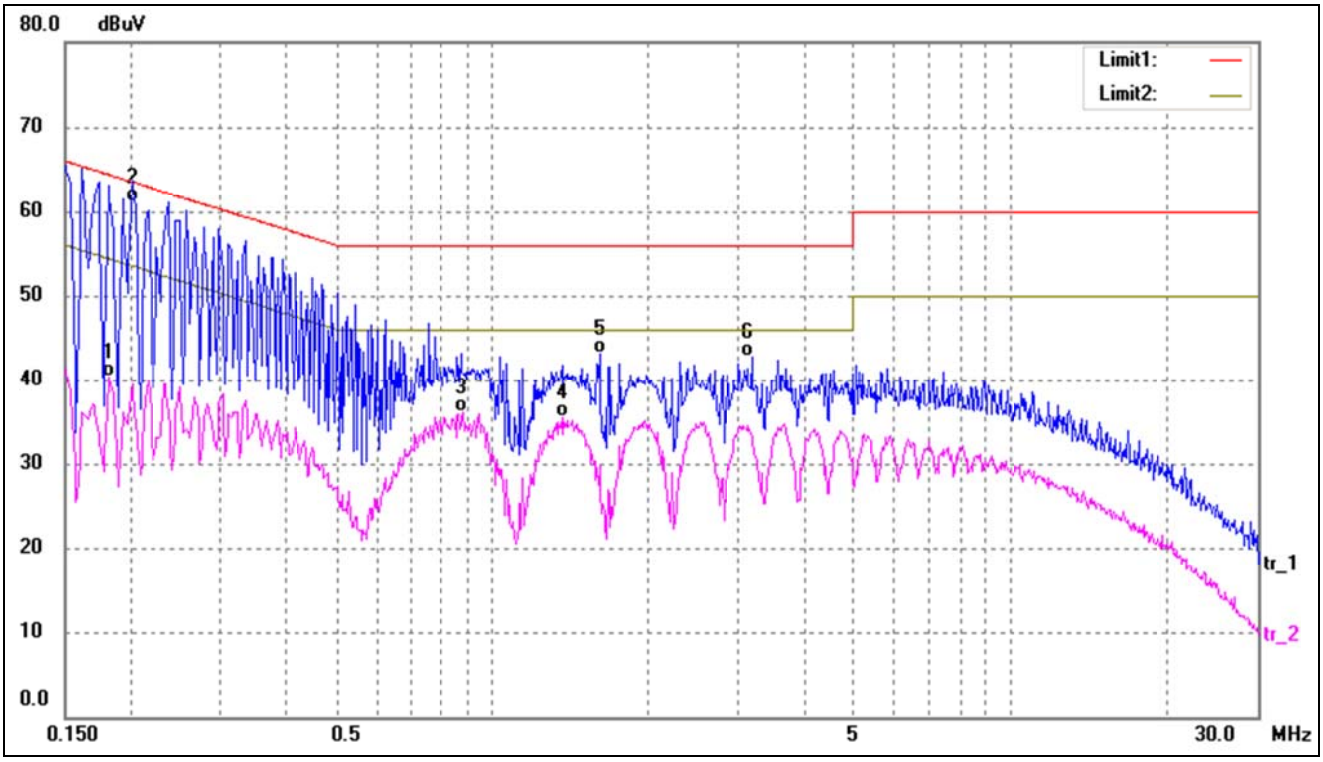

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB/m)	(dBuV)	(dBuV)	(dB)	
1	0.1820	30.15	10.11	40.26	54.39	-14.13	AVG
2*	0.2020	50.97	10.12	61.09	63.53	-2.44	QP
3	0.8820	25.72	10.46	36.18	46.00	-9.82	AVG
4	1.3620	25.04	10.54	35.58	46.00	-10.42	AVG
5	1.6180	32.53	10.56	43.09	56.00	-12.91	QP
6	3.1820	32.00	10.69	42.69	56.00	-13.31	QP

Test Mode	Communication	AC120V 60Hz	Polarity:	Line

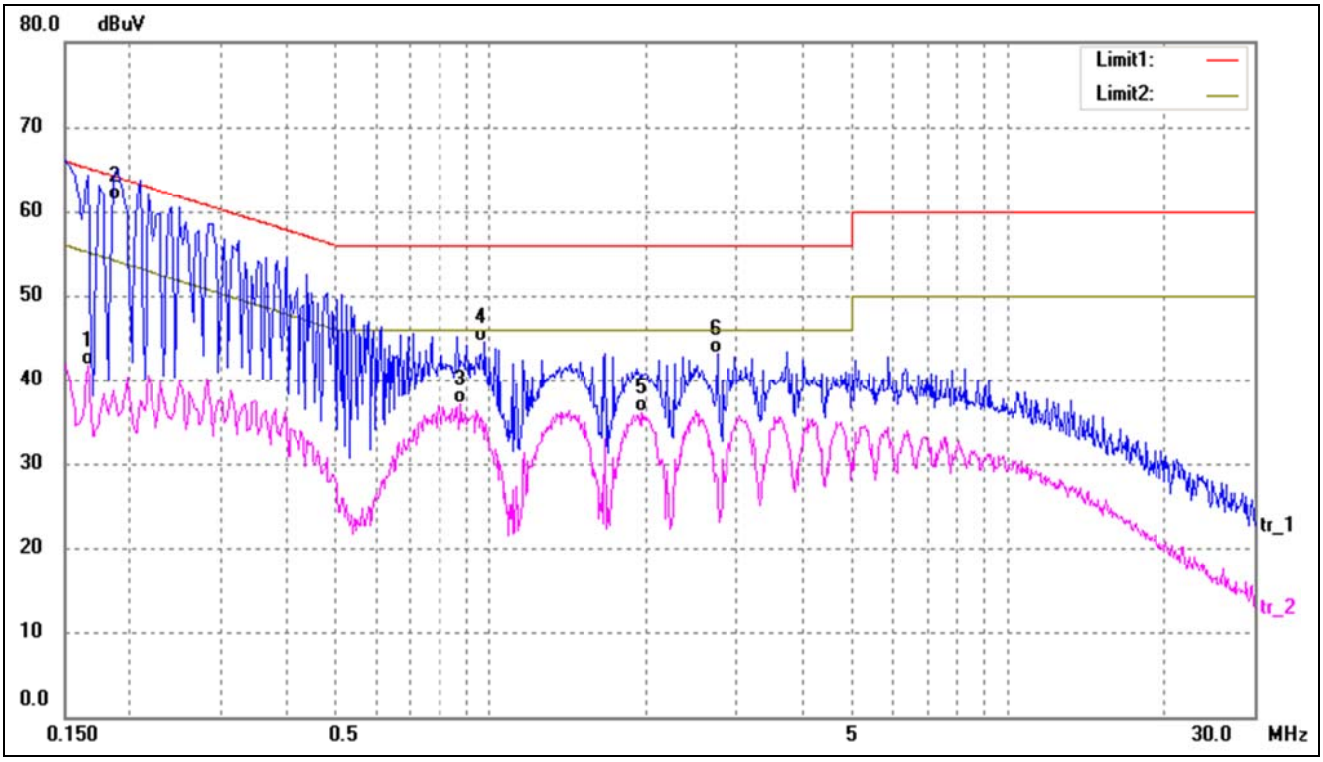

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB/m)	(dBuV)	(dBuV)	(dB)	
1	0.1660	31.50	10.11	41.61	55.15	-13.54	AVG
2*	0.1900	51.20	10.12	61.32	64.03	-2.71	QP
3	0.8780	26.70	10.46	37.16	46.00	-8.84	AVG
4	0.9780	33.95	10.50	44.45	56.00	-11.55	QP
5	1.9500	25.44	10.60	36.04	46.00	-9.96	AVG
6	2.7380	32.38	10.65	43.03	56.00	-12.97	QP

******* END OF REPORT *******