

TEST REPORT

ACCORDING TO: FCC 47 CFR PART 15 subpart B class B

FOR:

Aplica Technologies Ltd.

RF Sensor Module

Model number: 500-09898A

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details	3
5	Tests summary	4
6	EUT description	5
6.1	General information	5
6.2	Ports and lines	5
6.3	Support and test equipment	5
6.4	Changes made in EUT	5
6.5	Test configuration	6
7	Emissions tests according to FCC 47CFR part 15 subpart B requirements	7
7.1	Conducted emissions	7
7.2	Radiated emission measurements	11
8	APPENDIX A Test equipment and ancillaries used for tests.....	21
9	APPENDIX B Measurement uncertainties	22
10	APPENDIX C Test laboratory description.....	23
11	APPENDIX D Specification references	23
12	APPENDIX E Test equipment correction factors.....	24
13	APPENDIX F Abbreviations and acronyms	29

1 Applicant information

Client name: Aplica Technologies Ltd.
Address: P.O.Box 7291, Petach-Tikva 49170, Israel
Telephone: +972 3924 9393
Fax: +972 3924 9394
E-mail: shayb@aplicatech.com
Contact name: Mr. Shay Ben Harush

2 Equipment under test attributes

Product name: RF sensor module
Product type: Transceiver
Model number: 500-09898A
Serial number: 2
Hardware version: V0
Receipt date: 10/13/2010

3 Manufacturer information

Manufacturer name: Aplica Technologies Ltd.
Address: P.O.Box 7291, Petach-Tikva 49170, Israel
Telephone: +972 3924 9393
Fax: +972 3924 9394
E-Mail: shayb@aplicatech.com
Contact name: Mr. Shay Ben Harush

4 Test details



Project ID: 20520
Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Test started: 10/13/2010
Test completed: 1/02/2011
Test specification(s): FCC 47CFR Part 15, subpart B, class B

5 Tests summary

Test	Status
FCC 47CFR part 15, subpart B	
Section 15.107 Class B, AC power lines conducted emissions	Pass
Section 15.109 Class B, Radiated emissions	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mr. S. Samokha, test engineer	January 2, 2011	
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	January 10, 2011	
Approved by:	Mr. M. Nikishin, EMC and radio group manager	January 11, 2011	

6 EUT description

6.1 General information

The EUT is an RF Sensor Module constructed of a SoC (System of Chip), including a microcontroller and an RF transceiver operating in 2.4 – 2.48 GHz ISM band. The EUT has an integral antenna printed on the PCB and is powered from 3.3 – 12 VDC.

6.2 Ports and lines

Port type	Port description	Connected from	Connected to	Qty.	Cable type	Cable length	Indoor / outdoor
Power	DC power	EUT	Power supply	1	Unshielded	1.2 m	Indoor
Signal	RS-232	EUT	Laptop	1	Unshielded	2.0 m	Indoor
Signal	I/O	EUT	open circuit	1	Unshielded	0.1 m	Indoor


6.3 Support and test equipment

Description	Manufacturer	Model number	Serial number
Laptop	DELL	Latitude D-630	5ZYVB3J
AC/DC adaptor	DELL	HA65NS1-00	7AR-C155
Power supply	Any CUS Listed	MS-10US09-A-2	NA

6.4 Changes made in EUT

No changes were performed in the EUT.

6.5 Test configuration

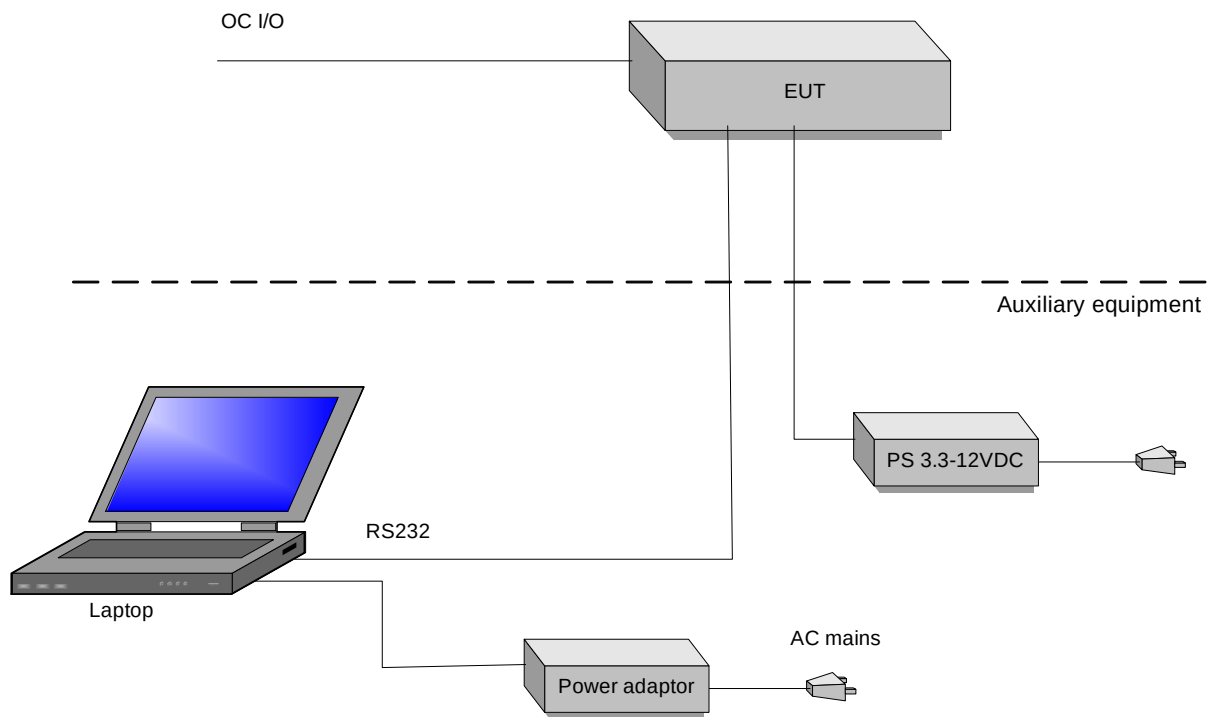

Test specification:		Section 15.107 Class B, AC power lines conducted emissions	
Test procedure:		ANSI C63.4, Section 11.5	
Test mode:		Compliance	Verdict: PASS
Date & Time:		10/13/2010 - 10/13/2010	
Temperature: 24.3 °C	Air Pressure: 1015 hPa	Relative Humidity: 42 %	Power Supply: 120 VAC
Remarks:			

7 Emissions tests according to FCC 47CFR part 15 subpart B requirements

7.1 Conducted emissions

7.1.1 General

This test was performed to measure the common mode conducted emissions at the EUT power port. The specification test limits are given in Table 7.1.1.

Table 7.1.1 Limits for conducted emissions

Frequency, MHz	Class B limit, dB(μV)		Class A limit, dB(μV)	
	QP	AVRG	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*	79	66
0.5 - 5.0	56	46	73	60
5.0 - 30	60	50	73	60

* - The limit decreases linearly with the logarithm of frequency.

7.1.2 Test procedure

7.1.2.1 The EUT was set up as shown in Figure 7.1.1 and the associated photographs, energized and the EUT performance was checked.


7.1.2.2 The measurements were performed at the EUT power terminals with the LISN connected to the EMI receiver in the frequency range referred to in Table 7.1.2. The unused coaxial connector of the LISN was terminated with 50 Ohm.

7.1.2.3 The position of the EUT cables was varied to find the highest emission.

7.1.2.4 The worst test results with respect to the limits were recorded in Table 7.1.2 and shown in the associated plots.

Test specification:		Section 15.107 Class B, AC power lines conducted emissions	
Test procedure:		ANSI C63.4, Section 11.5	
Test mode:		Compliance	Verdict: PASS
Date & Time:		10/13/2010 - 10/13/2010	
Temperature: 24.3 °C	Air Pressure: 1015 hPa	Relative Humidity: 42 %	Power Supply: 120 VAC
Remarks:			

Figure 7.1.1 Setup for conducted emission measurements, table-top EUT

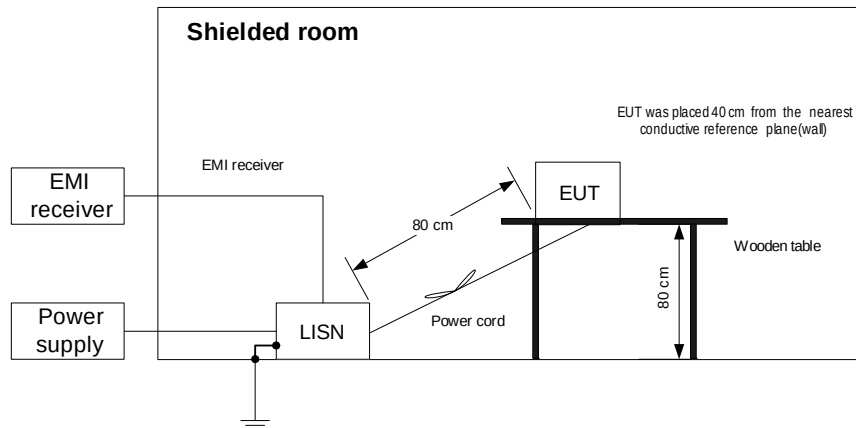

Photograph 7.1.1 Setup for conducted emission measurements



Test specification:		Section 15.107 Class B, AC power lines conducted emissions	
Test procedure:		ANSI C63.4, Section 11.5	
Test mode:		Compliance	Verdict: PASS
Date & Time:		10/13/2010 - 10/13/2010	
Temperature: 24.3 °C	Air Pressure: 1015 hPa	Relative Humidity: 42 %	Power Supply: 120 VAC
Remarks:			

Table 7.1.2 Conducted emission test results

LINE: AC mains
 EUT SET UP: TABLE-TOP
 TEST SITE: SHIELDED ROOM
 DETECTORS USED: PEAK / QUASI-PEAK / AVERAGE
 FREQUENCY RANGE: 150 kHz - 30 MHz
 RESOLUTION BANDWIDTH: 9 kHz
 NOTE: Card

Frequency, MHz	Peak emission, dB(μV)	Quasi-peak			Average			Line ID	Verdict
		Measured emission, dB(μV)	Limit, dB(μV)	Margin, dB*	Measured emission, dB(μV)	Limit, dB(μV)	Margin, dB*		
0.159100	55.96	47.54	65.56	-18.02	20.38	55.56	-35.18	L1	Pass
0.182500	54.35	50.16	64.41	-14.25	29.57	54.41	-24.84		
0.230250	50.61	44.82	62.49	-17.67	21.15	52.49	-31.34		
0.251825	48.53	44.81	61.73	-16.92	24.80	51.73	-26.93		
0.370000	44.45	39.02	58.55	-19.53	16.87	48.55	-31.68		
0.460000	46.89	39.66	56.75	-17.09	22.52	46.75	-24.23		
0.162830	56.72	52.06	65.37	-13.31	33.95	55.37	-21.42	L2	Pass
0.190250	53.99	50.36	64.04	-13.68	34.58	54.04	-19.46		
0.210000	50.69	46.69	63.27	-16.58	28.29	53.27	-24.98		
0.250000	48.56	44.78	61.79	-17.01	27.30	51.79	-24.49		
0.324000	45.20	40.33	59.64	-19.31	19.77	49.64	-29.87		
0.460000	45.43	41.35	56.75	-15.40	28.75	46.75	-18.00		

*- Margin = Measured emission - specification limit.

Reference numbers of test equipment used


HL0447	HL0787	HL1513	HL 2888	HL 3612			
--------	--------	--------	---------	---------	--	--	--

Full description is given in Appendix A.

Test specification:		Section 15.107 Class B, AC power lines conducted emissions	
Test procedure:		ANSI C63.4, Section 11.5	
Test mode:		Compliance	Verdict: PASS
Date & Time:		10/13/2010 - 10/13/2010	
Temperature: 24.3 °C	Air Pressure: 1015 hPa	Relative Humidity: 42 %	Power Supply: 120 VAC
Remarks:			


Plot 7.1.1 Conducted emission measurements

LINE: L1
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK
NOTE: Card

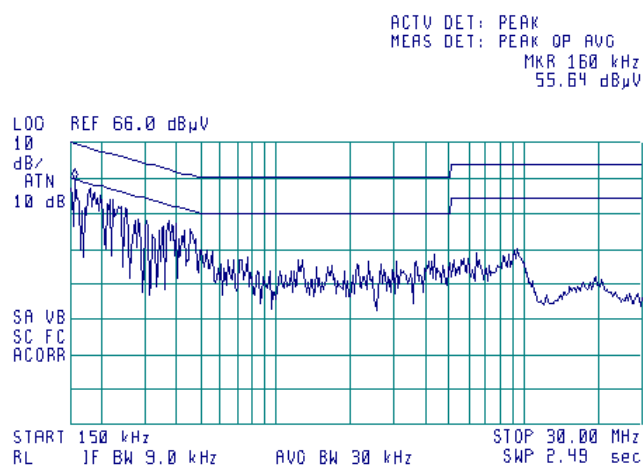

Plot 7.1.2 Conducted emission measurements

LINE: L2
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK
NOTE: Card

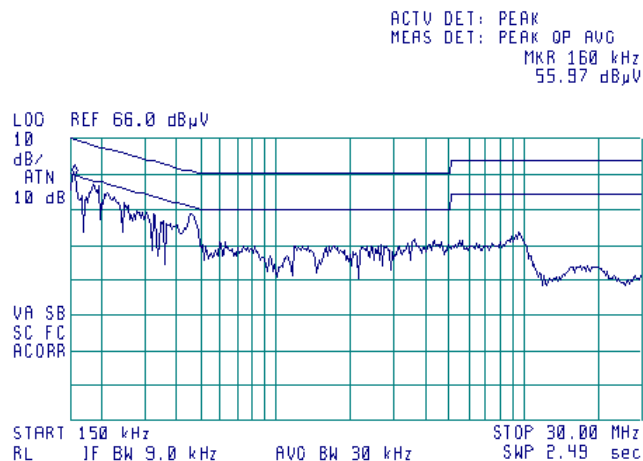

Test specification:		Section 15.109 Class B, Radiated emissions	
Test procedure:		ANSI C63.4, Section 11.6	
Test mode:		Verdict: PASS	
Date & Time:			
11/9/2010 - 11/9/2010			
Temperature: 23.3 °C	Air Pressure: 1014 hPa	Relative Humidity: 42 %	Power Supply: 120 VAC
Remarks:			

7.2 Radiated emission measurements

7.2.1 General

This test was performed to measure radiated emissions from the EUT enclosure. The specification test limits are given in Table 7.2.1.

Table 7.2.1 Radiated emission test limits

Frequency, MHz	Class B limit, dB(μV/m)		Class A limit, dB(μV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
Above 960	43.5*	54.0	49.5	60.0*


* - The limit for a test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows: $\text{Lim}_{S_2} = \text{Lim}_{S_1} + 20 \log(S_1/S_2)$, where S_1 and S_2 – the standard defined and the test distance respectively in meters.

7.2.2 Test procedure

- 7.2.2.1 The EUT was set up as shown in Figure 7.2.1 and the associated photograph, energized and the EUT performance was checked.
- 7.2.2.2 The preliminary measurements were performed in the anechoic chamber at 3 m test distance. The specified frequency range was investigated with the antenna connected to the EMI receiver. To find the highest emission the turntable was rotated 360° and the measuring antenna height was swept from 1 to 4 m in both, vertical and horizontal polarizations. The EUT cables position was varied to maximize emission.
- 7.2.2.3 The EUT was set up as shown in Figure 7.2.2 and the associated photographs, energized and the EUT performance was checked.
- 7.2.2.4 The final measurements were performed at the open area test site at 3 m test distance with the antenna connected to the EMI receiver. The EUT wires and cables were arranged to produce the highest emission as it was found during the preliminary measurements. The frequencies, produced the highest emissions with respect to the limits during the preliminary test were investigated. To find the highest emission the turntable was rotated 360° and the measuring antenna height was swept from 1 to 4 m in both, vertical and horizontal polarizations. At frequencies, where the high ambient noise was encountered, the final measurements were taken at 3 m distance.
- 7.2.2.5 The worst test results with respect to the limits were recorded in Table 7.2.2 and shown in the associated plots.

Test specification:		Section 15.109 Class B, Radiated emissions	
Test procedure:		ANSI C63.4, Section 11.6	
Test mode:		Compliance	Verdict: PASS
Date & Time:		11/9/2010 - 11/9/2010	
Temperature: 23.3 °C	Air Pressure: 1014 hPa	Relative Humidity: 42 %	Power Supply: 120 VAC
Remarks:			

Figure 7.2.1 Setup for radiated emission measurements in anechoic chamber, table-top EUT

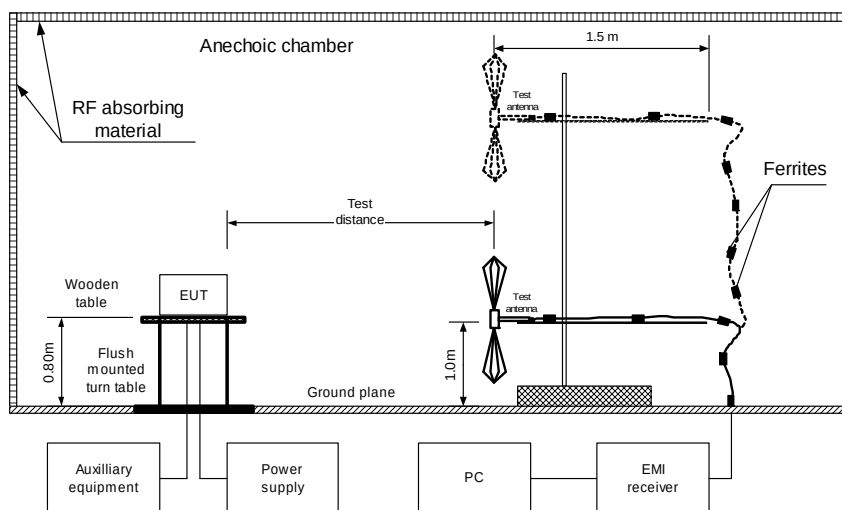


Photograph 7.2.1 Setup for radiated emission measurements in the anechoic chamber



Test specification:		Section 15.109 Class B, Radiated emissions	
Test procedure:		ANSI C63.4, Section 11.6	
Test mode:		Compliance	Verdict: PASS
Date & Time:		11/9/2010 - 11/9/2010	
Temperature: 23.3 °C	Air Pressure: 1014 hPa	Relative Humidity: 42 %	Power Supply: 120 VAC
Remarks:			

Figure 7.2.2 Setup for radiated emission measurements at OATS, table-top EUT

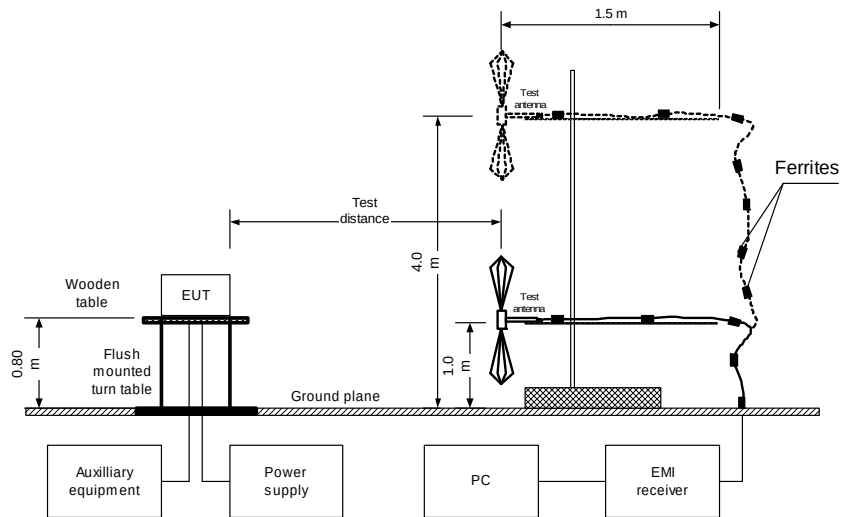


Test specification:		Section 15.109 Class B, Radiated emissions	
Test procedure:		ANSI C63.4, Section 11.6	
Test mode:		Compliance	Verdict: PASS
Date & Time:		11/9/2010 - 11/9/2010	
Temperature: 23.3 °C	Air Pressure: 1014 hPa	Relative Humidity: 42 %	Power Supply: 120 VAC
Remarks:			

Photograph 7.2.2 Setup for radiated emission measurements at the OATS, general view



Photograph 7.2.3 Setup for final radiated emission measurements, EUT cabling

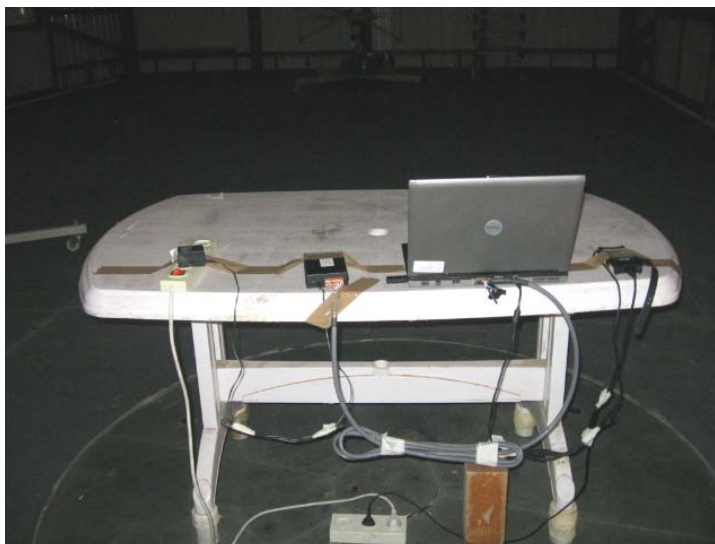

Test specification:	Section 15.109 Class B, Radiated emissions		
Test procedure:	ANSI C63.4, Section 11.6		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	11/9/2010 - 11/9/2010		
Temperature: 23.3 °C	Air Pressure: 1014 hPa	Relative Humidity: 42 %	Power Supply: 120 VAC
Remarks:			

Table 7.2.2 Radiated emission test results

EUT SET UP: TABLE-TOP
TEST SITE: OATS
TEST DISTANCE: 10 m
DETECTORS USED: PEAK / QUASI-PEAK
FREQUENCY RANGE: 30 MHz – 1000 MHz
RESOLUTION BANDWIDTH: 120 kHz

Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
71.049500	33.52	23.20	29.5	-6.30	Vert	1.0	179	Pass
82.870000	33.14	23.43	29.5	-6.07	Vert	1.0	183	
112.401900	25.37	20.38	33.00	-12.62	Hor	3.1	180	
115.287170	31.13	20.56	33.00	-12.44	Vert	1.0	273	

EUT SET UP: TABLE-TOP
TEST SITE: SEMI ANECHOIC CHAMBER
TEST DISTANCE: 3 m
DETECTORS USED: PEAK / QUASI-PEAK
FREQUENCY RANGE: 30 MHz – 1000 MHz
RESOLUTION BANDWIDTH: 120 kHz

Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
88.721500	38.57	29.67	43.50	-13.83	Vert	1.0	135	Pass

TEST SITE: SEMI ANECHOIC CHAMBER
TEST DISTANCE: 3 m
DETECTORS USED: PEAK / AVERAGE
FREQUENCY RANGE: 1000 MHz – 12500 MHz
RESOLUTION BANDWIDTH: 1000 kHz

Frequency, MHz	Peak			Average			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
No emissions were found										Pass

*- Margin = Measured emission - specification limit.

**-. EUT front panel refers to 0 degrees position of turntable.

Reference numbers of test equipment used


HL 0521	HL 0604	HL 0784	HL 0813	HL 1425	HL 1552	HL 1984	HL 2870
HL 2871	HL 2909	HL 3622					

Full description is given in Appendix A.

Test specification:		Section 15.109 Class B, Radiated emissions	
Test procedure:		ANSI C63.4, Section 11.6	
Test mode:		Compliance	Verdict: PASS
Date & Time:		11/9/2010 - 11/9/2010	
Temperature: 23.3 °C	Air Pressure: 1014 hPa	Relative Humidity: 42 %	Power Supply: 120 VAC
Remarks:			


Plot 7.2.1 Radiated emission measurements in 30 - 1000 MHz range, vertical antenna polarization

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m

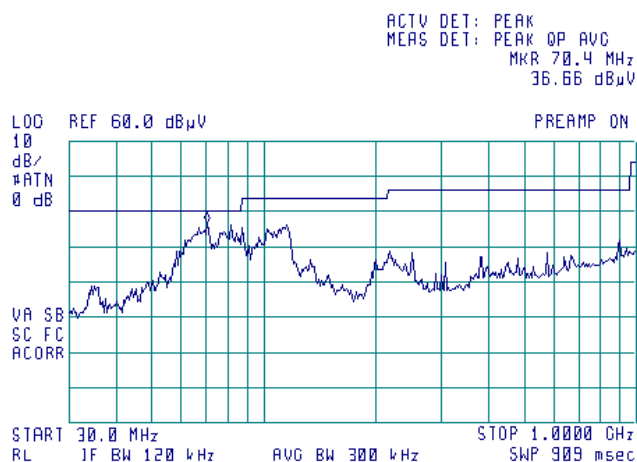

Plot 7.2.2 Radiated emission measurements in 30 - 1000 MHz range, horizontal antenna polarization


TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m

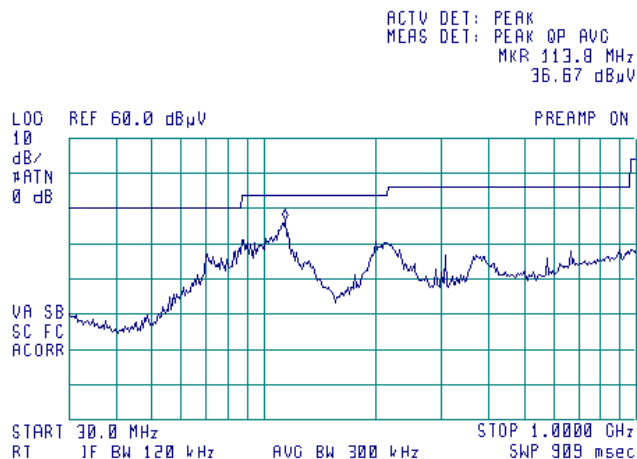

Test specification:		Section 15.109 Class B, Radiated emissions	
Test procedure:		ANSI C63.4, Section 11.6	
Test mode:		Compliance	Verdict: PASS
Date & Time:		11/9/2010 - 11/9/2010	
Temperature: 23.3 °C	Air Pressure: 1014 hPa	Relative Humidity: 42 %	Power Supply: 120 VAC
Remarks:			


Plot 7.2.3 Radiated emission measurements in 1000 – 6000 MHz range, vertical antenna polarization

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
DETECTOR: Peak

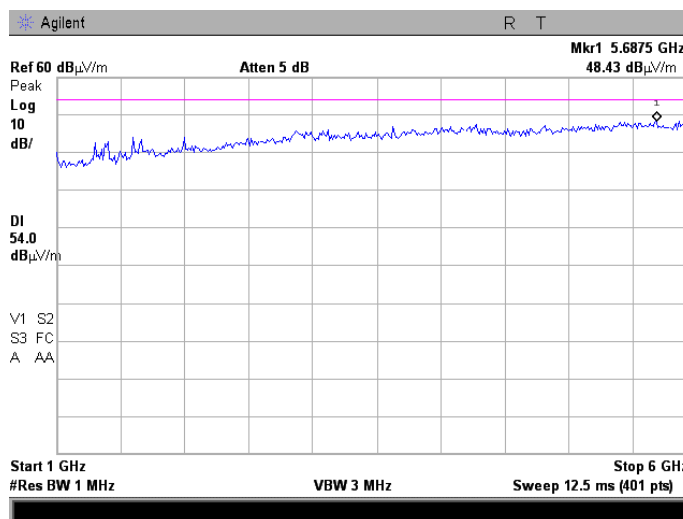

Plot 7.2.4 Radiated emission measurements in 1000 – 6000 MHz range, vertical antenna polarization


TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
DETECTOR: Average

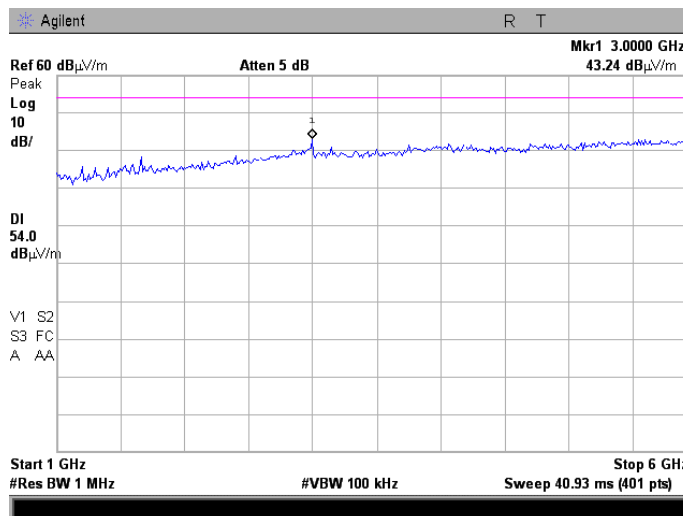

Test specification:		Section 15.109 Class B, Radiated emissions	
Test procedure:		ANSI C63.4, Section 11.6	
Test mode:		Compliance	Verdict: PASS
Date & Time:		11/9/2010 - 11/9/2010	
Temperature: 23.3 °C	Air Pressure: 1014 hPa	Relative Humidity: 42 %	Power Supply: 120 VAC
Remarks:			


Plot 7.2.5 Radiated emission measurements in 1000 – 6000 MHz range, horizontal antenna polarization

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
DETECTOR: Peak

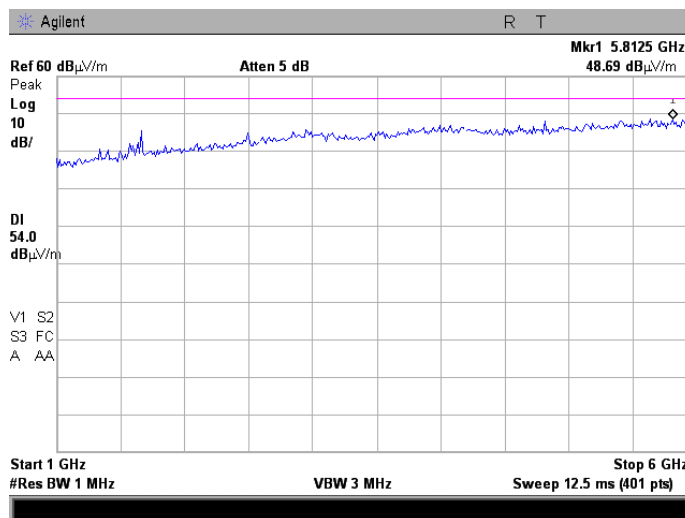

Plot 7.2.6 Radiated emission measurements in 1000 – 6000 MHz range, horizontal antenna polarization


TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
DETECTOR: Average

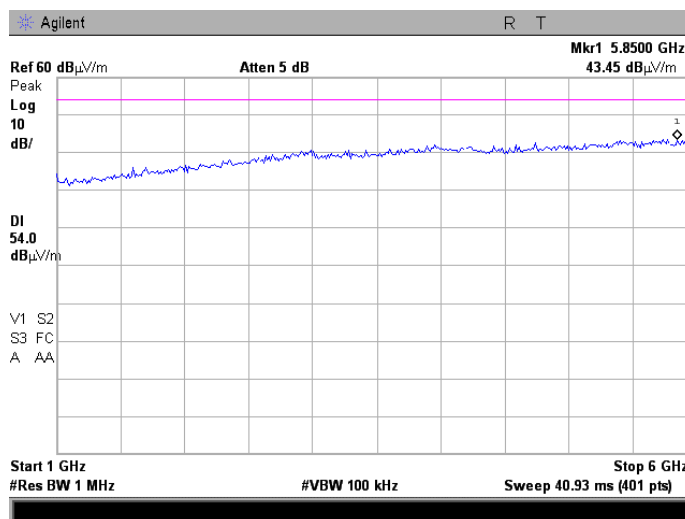

Test specification:		Section 15.109 Class B, Radiated emissions	
Test procedure:		ANSI C63.4, Section 11.6	
Test mode:		Compliance	Verdict: PASS
Date & Time:		11/9/2010 - 11/9/2010	
Temperature: 23.3 °C	Air Pressure: 1014 hPa	Relative Humidity: 42 %	Power Supply: 120 VAC
Remarks:			


Plot 7.2.7 Radiated emission measurements in 6000 – 12500 MHz range, vertical antenna polarization

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
DETECTOR: Peak

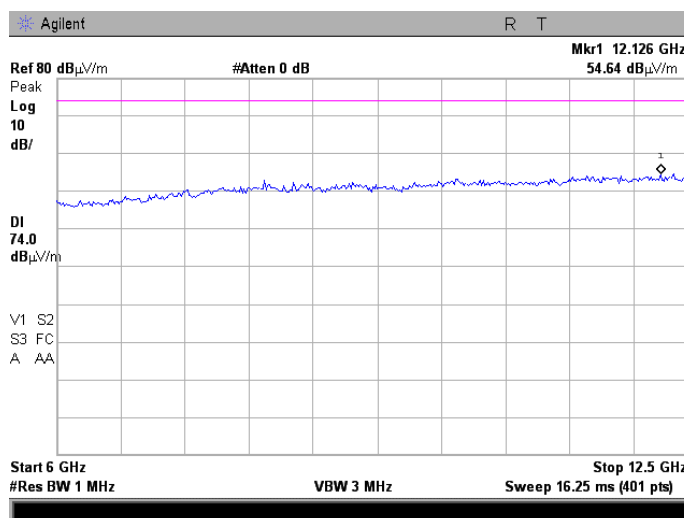

Plot 7.2.8 Radiated emission measurements in 6000 – 12500 MHz range, vertical antenna polarization


TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
DETECTOR: Average

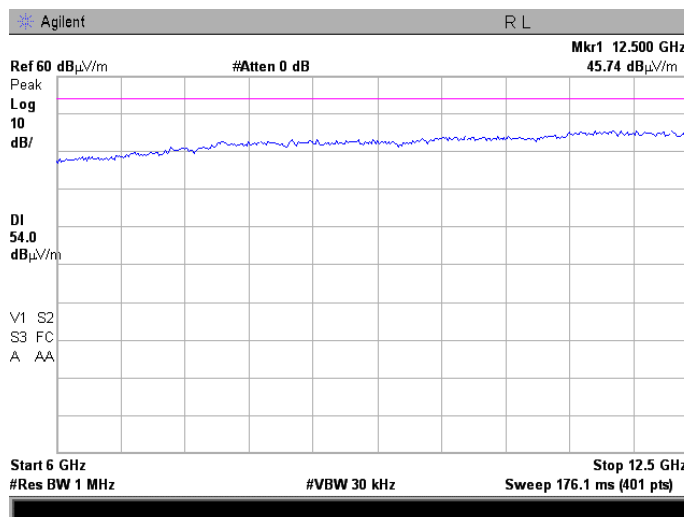

Test specification:		Section 15.109 Class B, Radiated emissions	
Test procedure:		ANSI C63.4, Section 11.6	
Test mode:		Compliance	Verdict: PASS
Date & Time:		11/9/2010 - 11/9/2010	
Temperature: 23.3 °C	Air Pressure: 1014 hPa	Relative Humidity: 42 %	Power Supply: 120 VAC
Remarks:			


Plot 7.2.9 Radiated emission measurements in 6000 – 12500 MHz range, horizontal antenna polarization

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
DETECTOR: Peak

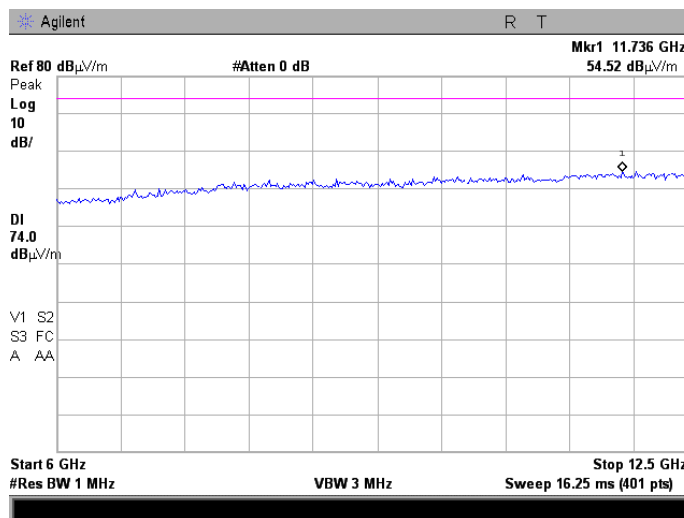

Plot 7.2.10 Radiated emission measurements in 6000 – 12500 MHz range, horizontal antenna polarization

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
DETECTOR: Average

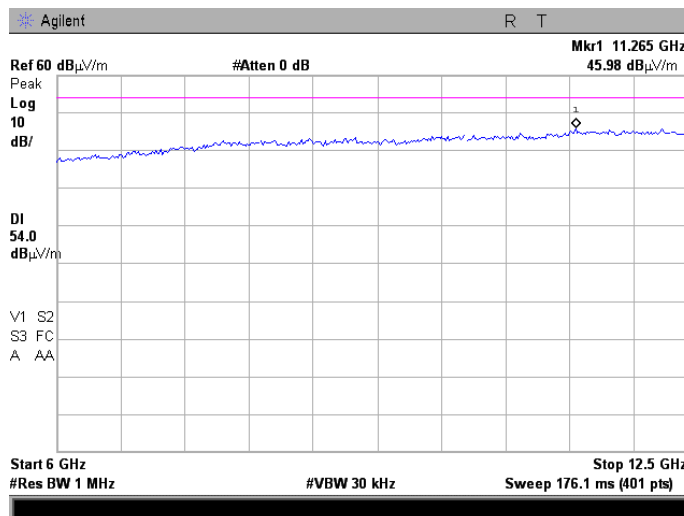

8 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal.	Due Cal.
0447	LISN, 16/2, 300V RMS, 50 Ohm/50 uH + 5 Ohm, STD CISPR 16-1	Hermon Laboratories	LISN 16 - 1	066	26-Oct-10	26-Oct-11
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	25-Aug-10	25-Aug-11
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	11-Jan-10	11-Jan-11
0784	Antenna X-WING BILOG, 20 MHz - 2 GHz	Schaffner-Chase EMC	CBL6140 A	1120	11-Jan-10	11-Jan-11
0813	Cable Coax, RG-214, 12 m, N-type connectors	Hermon Laboratories	C214-12	149	01-Dec-10	01-Dec-11
1425	EMI Receiver, 9 kHz - 2.9 GHz, System: HL1426, HL1427	Agilent Technologies	8542E	3710A002 22, 3705A002 04	24-Aug-10	24-Aug-11
1513	Cable RF, 8 m, BNC/BNC	Belden	M17/167 MIL-C-17	1513	01-Sep-10	01-Sep-11
1552	Cable RF, 8 m	Alpha Wire	RG-214	1552	01-Dec-10	01-Dec-11
1984	Antenna, Double-Ridged Waveguide Horn, 1-18 GHz, 300 W	EMC Test Systems	3115	9911-5964	11-Jun-10	11-Jun-11
2870	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA	Huber-Suhner	198-9155-00	2870	30-Dec-10	30-Dec-11
2871	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA	Huber-Suhner	198-8155-00	2871	14-Sep-10	14-Sep-11
2888	LISN Two-line V-Network 50 Ohm / 50 uH + 5 Ohm, 16A, MIL STD 461E, CISPR 16-1	Rolf Heine	NNB-2/16Z	02/10018	07-Jul-10	07-Jul-11
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY414447 62	07-May-10	07-May-11
3612	Cable RF, 17.5 m, N type-N type	Teldor	RG-214/U	NA	01-Dec-10	01-Dec-11
3622	Cable RF, 6.0 m, N type-N type, DC-6.5 GHz	Alpha Wire	RG 214/U	NA	27-May-10	27-May-11

9 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

10 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS, IC 2186A-2 for anechoic chamber, IC 2186A-3 for full-anechoic chamber for RE measurements above 1 GHz), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-27 for full-anechoic chamber for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is US1003.

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

11 APPENDIX D Specification references

47CFR part 15: 2009	Radio Frequency Devices.
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications.
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

12 APPENDIX E Test equipment correction factors


Correction factor
Line impedance stabilization network
Model LISN 16 - 1
Hermon Laboratories, HL 0447

Frequency, kHz	Correction factor, dB
10	4.9
15	2.86
20	1.83
25	1.25
30	0.91
35	0.69
40	0.53
50	0.35
60	0.25
70	0.18
80	0.14
90	0.11
100	0.09
125	0.06
150	0.04

The correction factor in dB is to be added to meter readings of an interference analyzer or a spectrum analyzer.

Correction factor
Line impedance stabilization network
Model NNB-2/16Z, Rolf Heine, HL 2888

Frequency, kHz	Insertion loss, dB		Measurement Uncertainty, dB
	L1	N	
10	0.48	0.79	±0.6
20	0.52	0.63	
30	0.31	0.35	
40	0.20	0.22	
50	0.16	0.17	
100	0.10	0.08	
300	0.08	0.06	
500	0.10	0.06	
600	0.09	0.07	
800	0.10	0.07	
1000	0.10	0.08	
2000	0.12	0.11	
3000	0.16	0.14	
4000	0.17	0.18	
6000	0.26	0.23	
10000	0.49	0.41	
14000	0.66	0.54	
16000	0.79	0.69	
18000	0.86	0.76	
20000	0.96	0.85	
25000	1.22	1.08	
28000	1.35	1.21	
30000	1.43	1.29	

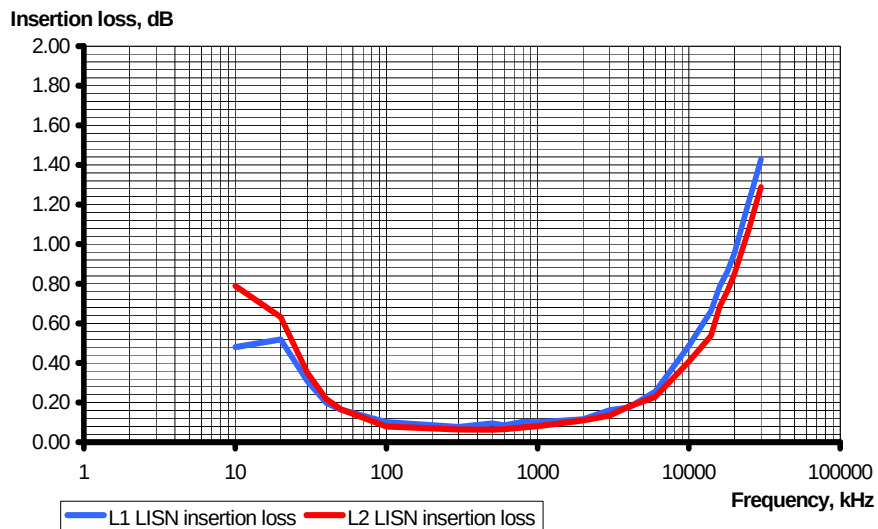

Antenna factor
Biconilog antenna EMCO Model 3141
Ser.No.1011, HL 0604

Frequency, MHz	Antenna Factor, dB(1/m)	Frequency, MHz	Antenna Factor, dB(1/m)
26	7.8	940	24.0
28	7.8	960	24.1
30	7.8	980	24.5
40	7.2	1000	24.9
60	7.1	1020	25.0
70	8.5	1040	25.2
80	9.4	1060	25.4
90	9.8	1080	25.6
100	9.7	1100	25.7
110	9.3	1120	26.0
120	8.8	1140	26.4
130	8.7	1160	27.0
140	9.2	1180	27.0
150	9.8	1200	26.7
160	10.2	1220	26.5
170	10.4	1240	26.5
180	10.4	1260	26.5
190	10.3	1280	26.6
200	10.6	1300	27.0
220	11.6	1320	27.8
240	12.4	1340	28.3
260	12.8	1360	28.2
280	13.7	1380	27.9
300	14.7	1400	27.9
320	15.2	1420	27.9
340	15.4	1440	27.8
360	16.1	1460	27.8
380	16.4	1480	28.0
400	16.6	1500	28.5
420	16.7	1520	28.9
440	17.0	1540	29.6
460	17.7	1560	29.8
480	18.1	1580	29.6
500	18.5	1600	29.5
520	19.1	1620	29.3
540	19.5	1640	29.2
560	19.8	1660	29.4
580	20.6	1680	29.6
600	21.3	1700	29.8
620	21.5	1720	30.3
640	21.2	1740	30.8
660	21.4	1760	31.1
680	21.9	1780	31.0
700	22.2	1800	30.9
720	22.2	1820	30.7
740	22.1	1840	30.6
760	22.3	1860	30.6
780	22.6	1880	30.6
800	22.7	1900	30.6
820	22.9	1920	30.7
840	23.1	1940	30.9
860	23.4	1960	31.2
880	23.8	1980	31.6
900	24.1	2000	32.0
920	24.1		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Biconilog antenna
CHASE Model CBL6140A
Serial no: 1120, HL 0784

Frequency, MHz	Antenna factor, dB
30.0	4.3
35.0	7.3
40.0	8.8
45.0	9.3
50.0	9.6
60.0	9.9
70.0	9.2
80.0	7.6
90.0	7.6
100.0	8.8
120.0	7.2
125.0	7.5
140.0	7.7
150.0	7.9
160.0	11.4
175.0	8.6
180.0	8.8
200.0	9.8
250.0	12.5
300.0	12.2
350.0	14.8
400.0	16.1
450.0	16.5
500.0	17.6
550.0	18.3
600.0	18.5
650.0	19.8
700.0	20.1
750.0	20.8
800.0	21.2
850.0	22.0
900.0	22.2
950.0	23.2
1000.0	23.8

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Double-ridged wave guide horn antenna
Model 3115, S/N 9911-5964, HL1984

Frequency, MHz	Antenna factor, dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

13 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μV)	decibel referred to one microvolt
dB(μV/m)	decibel referred to one microvolt per meter
dB(μA)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μs	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million (10 ⁻⁶)
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF DOCUMENT