

www.gakkiku.com



Gakkiku Technology

Gakkiku Technology Company  
 3/F., Johnson Industrial Mansion,  
 340 Kwun Tong Road,  
 Kwun Tong, Kowloon,  
 Hong Kong  
 Tel: (852) 8113 2281  
 Fax: (852) 2797 0192  
 Email: info@gakkiku.com

## Test Report

|                                            |                                                                                                                                  |
|--------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| <b>Applicant</b>                           | Bear River International LLC                                                                                                     |
| <b>Address</b>                             | 1011 West 400 North, Suite 110,<br>Logan, Utah 84321,<br>United States                                                           |
| <b>FCC ID Number</b>                       | FCC ID: ZEZB1426R49                                                                                                              |
| <b>Brand Name(s)</b>                       | None                                                                                                                             |
| <b>Model Number(s)/<br/>Item Number(s)</b> | B1426                                                                                                                            |
| <b>Product Description</b>                 | Wireless Remote Control Toy - RX                                                                                                 |
| <b>Operating Frequency</b>                 | 49.860 MHz                                                                                                                       |
| <b>Rules/Standards</b>                     | Part 15.109 of the FCC Rules,<br>RSS-310 Issue 3 and RSS-Gen Issue 4 of the<br>Industry Canada                                   |
| <b>Received Date</b>                       | 6th June, 2015                                                                                                                   |
| <b>Tested Date</b>                         | 6th June, 2015                                                                                                                   |
| <b>Approved by</b>                         | Dick Chan (Director of Gakkiku)                                                                                                  |
| <b>Tested by</b>                           | <br>Lahm Peng (Engineer of Shenzhen SEM.Test) |
| <b>Signed by</b>                           | <br>Jandy So (Manager of Shenzhen SEM.Test)   |
| <b>Report Number</b>                       | GKK201506060B                                                                                                                    |
| <b>Test Results</b>                        | <input checked="" type="checkbox"/> PASSED <input type="checkbox"/> FAILED                                                       |

**GENERAL**

The report is written by Gakkiku Technology Company. The tested device complies with the general approval requirements of the FCC Rules and the Industry Canada as identified in this test report.

**TEST LOCATION**

The tested device was tested at the test site of the Shenzhen SEM.Test Technology Co., Ltd., 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, 518101, Guangdong, China. The FCC Recognized 2.948 Listed Test Firm Registration Number is 934118. The Industry Canada IC OATS Filing Number/Assigned Code is 11464A.

**TABLE OF CONTENTS**

**1. GENERAL INFORMATION ..... 4**

    1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)..... 4

    1.2 TEST STANDARDS ..... 4

    1.3 TEST METHODOLOGY ..... 4

    1.4 EUT EXERCISE SOFTWARE .....5

    1.5 ACCESSORIES EQUIPMENT LIST AND DETAILS.....5

    1.6 EUT CABLE LIST AND DETAILS .....5

**2. SUMMARY OF TEST RESULTS..... 6**

**3. PART 15.109(A) & RSS-310 ISSUE 3 §3.1 - RADIATED EMISSION..... 7**

    3.1 MEASUREMENT UNCERTAINTY .....7

    3.2 TEST EQUIPMENT LIST AND DETAILS.....7

    3.3 TEST PROCEDURE .....7

    3.4 TEST RECEIVER SETUP ..... 8

    3.5 CORRECTED AMPLITUDE & MARGIN CALCULATION..... 8

    3.6 ENVIRONMENTAL CONDITIONS..... 8

    3.7 SUMMARY OF TEST RESULTS/PLOTS ..... 8

## 1. GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Bear River International LLC  
Address of applicant: 1011 West 400 North, Suite 110,  
Logan, Utah 84321, United States

Manufacturer: Bear River International LLC  
Address of manufacturer: 1011 West 400 North, Suite 110,  
Logan, Utah 84321, United States

#### General Description of EUT

| Item                                                                          | Description                                                                                |
|-------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|
| Product Description:                                                          | Wireless Remote Control Toy - RX                                                           |
| Brand Name(s):                                                                | None                                                                                       |
| Model Number(s)/<br>Item Number(s):                                           | B1426<br>[All Brand Name(s) and Model Number(s)/Item Number(s) are electrically identical] |
| Power Source:                                                                 | 1 unit of DC 6V 500mAh Rechargeable Ni-MH Battery                                          |
| Rated Current:                                                                | /                                                                                          |
| For more information refer to the circuit diagram form and the user's manual. |                                                                                            |

*The test data is gathered from a production sample, provided by the manufacturer.*

### 1.2 Test Standards

The following report is prepared on behalf of the Bear River International LLC in accordance with Part 2 Subpart J and Part 15 Subparts B of the FCC Rules.

The objective is to determine compliance with Part 15.109 of the FCC Rules and RSS-310 Issue 3 & RSS-Gen Issue 4 of the Industry Canada.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission/immunity, should be checked to ensure compliance has been maintained.

### 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI Standard C63.4-2009, American National Standard Institute for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The equipment under test (EUT) was configured to measure its highest possible susceptibility against the tested phenomena. The test modes were adapted accordingly in reference to the Operating Instructions.

### 1.4 EUT Exercise Software

The EUT exercise program used during the testing was designed to exercise the system components. The test software is started while the whole system is on.

### 1.5 Accessories Equipment List and Details

| Description | Manufacturer | Model | Serial Number |
|-------------|--------------|-------|---------------|
| /           | /            | /     | /             |

### 1.6 EUT Cable List and Details

| Cable Description | Length (M) | Shielded/<br>Unshielded | With Core/<br>Without Core |
|-------------------|------------|-------------------------|----------------------------|
| /                 | /          | /                       | /                          |

## 2. SUMMARY OF TEST RESULTS

---

| Description of Test                                       | Result    |
|-----------------------------------------------------------|-----------|
| Part 15.107(a)/15.207(a) Conducted Emission               | N/A       |
| Part 15.109(a) Radiated Emission,<br>RSS-310 Issue 3 §3.1 | Compliant |

### 3. Part 15.109(a) & RSS-310 Issue 3 §3.1 - RADIATED EMISSION

#### 3.1 Measurement Uncertainty

Base on NIS 81, the Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any radiation emissions measurement is  $\pm 5.10$  dB.

#### 3.2 Test Equipment List and Details


| Description              | Manufacturer         | Model    | Serial Number | Cal. Date  | Due. Date  |
|--------------------------|----------------------|----------|---------------|------------|------------|
| Spectrum Analyzer        | R&S                  | FSP      | 836079/035    | 2015-05-28 | 2016-05-27 |
| EMI Test Receiver        | R&S                  | ESVB     | 825471/005    | 2015-05-28 | 2016-05-27 |
| Positioning Controller   | C&C                  | CC-C-1F  | N/A           | 2015-05-28 | 2016-05-27 |
| RF Switch                | EM                   | EMSW18   | SW060023      | 2015-05-28 | 2016-05-27 |
| Pre-amplifier            | Agilent              | 8447F    | 3113A06717    | 2015-05-28 | 2016-05-27 |
| Pre-amplifier            | Compliance Direction | PAP-0118 | 24002         | 2015-05-28 | 2016-05-27 |
| Trilog Broadband Antenna | SCHWARZBECK          | VULB9163 | 9163-333      | 2015-05-24 | 2016-05-23 |
| Horn Antenna             | ETS                  | 3117     | 00086197      | 2015-05-24 | 2016-05-23 |
| Signal Generator         | HP                   | 8648A    | 3642U01277    | 2015-05-24 | 2016-05-23 |

#### 3.3 Test Procedure

The setup of EUT is according with ANSI Standard C63.4-2009 measurement procedure. The specification used was with the limits of Part 15.109 & 15.205 of the FCC Rules.

According to ANSI Standard C63.4-2009 § 12.1.1.1 (SUPERREGENERATIVE RECEIVER): A Signal Generator was set to the unit under test operating frequency. An unmodulated continuous wave (CW) signal was radiated at the superregenerative receiver operating frequency to cohere the characteristic broadband emissions from the receiver.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

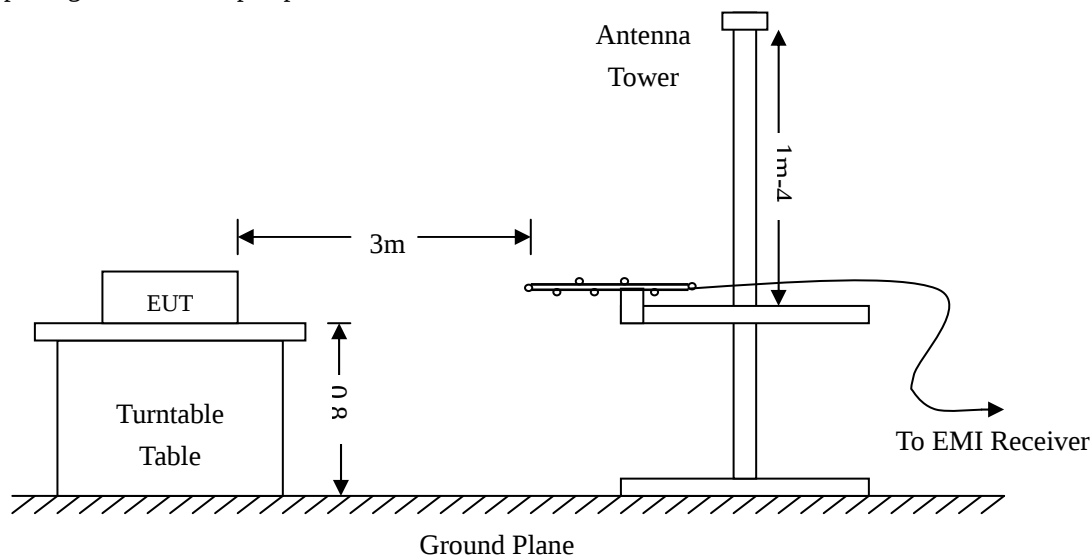

### 3.4 Test Receiver Setup

During the radiated emission test, the test receiver was set with the following configurations:

Start Frequency ..... 30 MHz  
Stop Frequency..... 1000 MHz  
Sweep Speed ..... Auto  
IF Bandwidth..... 100 kHz  
Quasi-Peak Adapter Bandwidth ..... 120 kHz  
Quasi-Peak Adapter Mode ..... Normal

### 3.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit for Part 15. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit of Part 15 (RSS-310 Issue 3)}$$

### 3.6 Environmental Conditions


|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 54%       |
| ATM Pressure:      | 1011 mbar |

### 3.7 Summary of Test Results/Plots

According to the data, the EUT is complied with the standards under Part 15.109 of the FCC Rules and RSS-310 Issue 3 of the Industry Canada, and had the worst margin of:

**-11.57 dB at 890.7278 MHz in the Vertical polarization, Receiving mode,**  
**30 MHz to 1 GHz, 3 Meters**


***Note:** This EUT was tested in 3 orthogonal positions and the worst case position data was reported.*

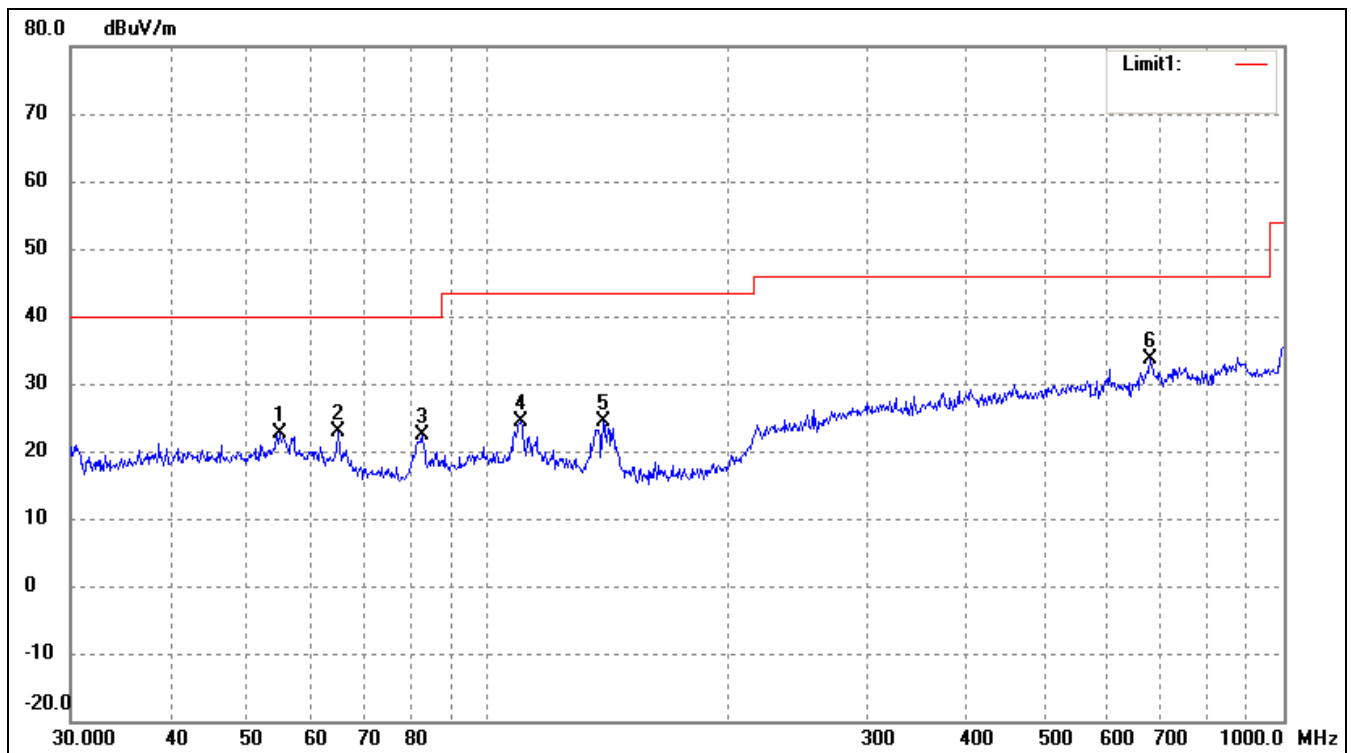**Plot of Radiated Emissions Test Data***Radiated Disturbance**Product Description: Wireless Remote Control Toy - RX**Model Number(s)/Item Number(s): B1426**Operating Condition: Receiving**Test Specification: Horizontal & Vertical**Power Source: 1 unit of DC 6V 500mAh Rechargeable Ni-MH Battery**Horizontal:*

| No. | Frequency | Reading | Correction Factor | Result | Limit  | Margin | Degree | Height | Remark |
|-----|-----------|---------|-------------------|--------|--------|--------|--------|--------|--------|
|     | MHz       | dBuV/m  | dB                | dBuV/m | dBuV/m | dB     | °      | cm     |        |
| 1   | 54.8348   | 17.23   | 5.32              | 22.55  | 40.00  | -17.45 | 253    | 100    | Peak   |
| 2   | 65.1145   | 18.59   | 4.25              | 22.84  | 40.00  | -17.16 | 69     | 100    | Peak   |
| 3   | 82.9385   | 19.81   | 2.48              | 22.29  | 40.00  | -17.71 | 47     | 100    | Peak   |
| 4   | 110.1816  | 19.27   | 5.07              | 24.34  | 43.50  | -19.16 | 158    | 100    | Peak   |
| 5   | 139.8508  | 20.97   | 3.42              | 24.39  | 43.50  | -19.11 | 169    | 100    | Peak   |
| 6   | 679.9600  | 14.28   | 19.26             | 33.54  | 46.00  | -12.46 | 251    | 100    | Peak   |

*Note: Emissions attenuated more than 20 dB below the permissible value are not reported.*

Vertical:

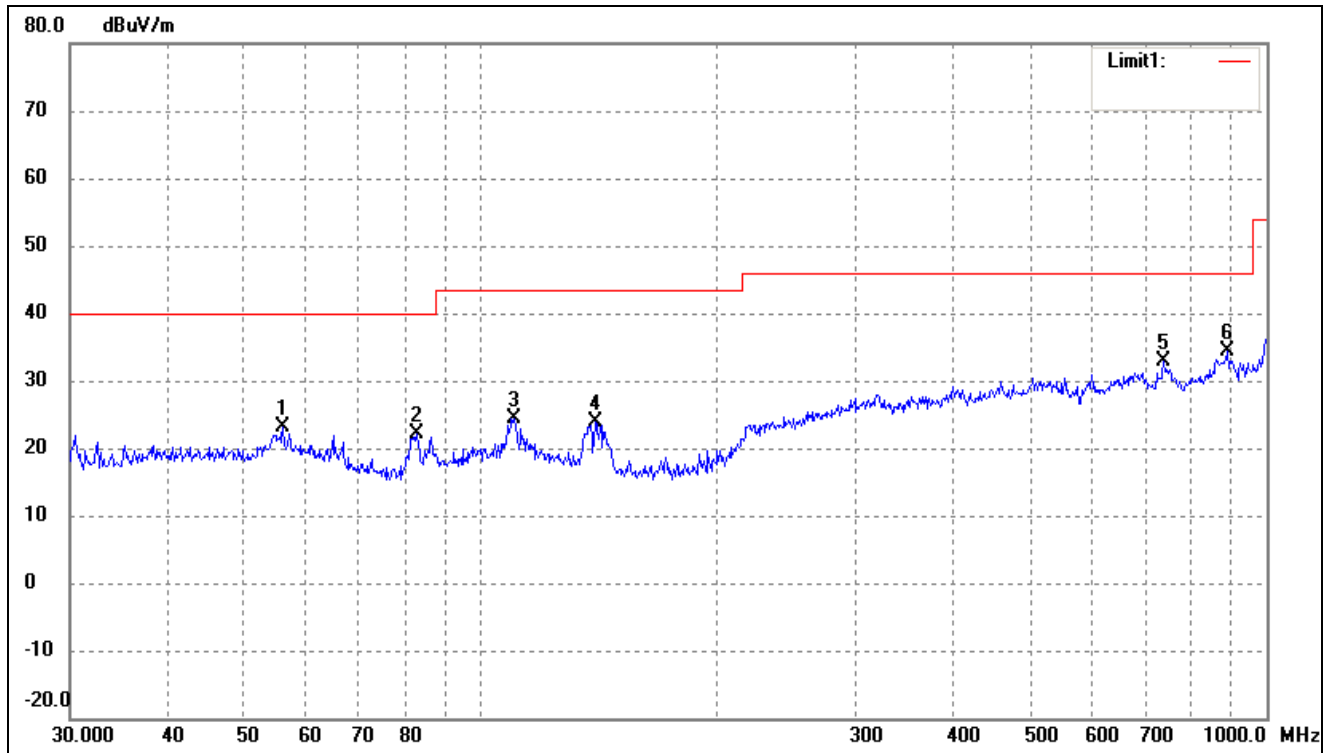

| No. | Frequency | Reading | Correction Factor | Result | Limit  | Margin | Degree | Height | Remark |
|-----|-----------|---------|-------------------|--------|--------|--------|--------|--------|--------|
|     | MHz       | dBuV/m  | dB                | dBuV/m | dBuV/m | dB     | °      | cm     |        |
| 1   | 56.0007   | 17.73   | 5.33              | 23.06  | 40.00  | -16.94 | 152    | 100    | Peak   |
| 2   | 82.9385   | 19.60   | 2.48              | 22.08  | 40.00  | -17.92 | 36     | 100    | Peak   |
| 3   | 110.1816  | 19.25   | 5.07              | 24.32  | 43.50  | -19.18 | 247    | 100    | Peak   |
| 4   | 139.8508  | 20.50   | 3.42              | 23.92  | 43.50  | -19.58 | 168    | 100    | Peak   |
| 5   | 739.6605  | 13.26   | 19.53             | 32.79  | 46.00  | -13.21 | 194    | 100    | Peak   |
| 6   | 890.7278  | 17.13   | 17.30             | 34.43  | 46.00  | -11.57 | 175    | 100    | Peak   |

Note: Emissions attenuated more than 20 dB below the permissible value are not reported.

\*\*\*\*\* END OF REPORT \*\*\*\*\*