



FCC RADIO TEST REPORT

Applicant : GN Audio USA Inc.

Address : 900 Chelmsford Street, Tower II, 8th Floor, Lowell,
MA 01851, USA

Equipment : Gaming Controller

Model No. : GC10


Trade Name : 

FCC ID. : ZHK-GC10

I HEREBY CERTIFY THAT:

The sample was received on Apr. 09, 2025 and the testing was completed on Jun. 15, 2026 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

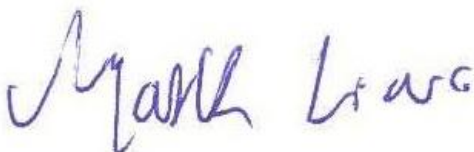

Mark Liao / Supervisor

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory





CONTENTS

1. Summary of Test Procedure and Test Results	5
1.1 Applicable Standards	5
2. Test Configuration of Equipment under Test	6
2.1 Feature of Equipment under Test.....	6
2.2 Carrier Frequency of Channels	7
2.3 Test Mode & Test Software	8
2.4 Description of Test System.....	8
2.5 General Information of Test.....	9
2.6 Measurement Uncertainty	10
3. Test Equipment and Ancillaries Used for Tests	11
4. Antenna Requirements.....	14
4.1 Standard Applicable	14
4.2 Antenna Construction and Directional Gain.....	14
5. Frequency Hopping System Requirements	15
5.1 Frequency Hopping Requirement	15
5.2 EUT Hopping System.....	15
5.3 Pseudorandom Frequency Hopping Sequence	16
6. Test of AC Power Line Conducted Emission	17
6.1 Test Limit	17
6.2 Test Procedures	17
6.3 Typical Test Setup	18
6.4 Test Result and Data	19
6.5 Test Photographs	21
7. Test of Radiated Spurious Emission.....	22
7.1 Test Limit	22
7.2 Test Procedures.....	23
7.3 Typical Test Setup	24
7.4 Test Result and Data (9kHz ~ 30MHz)	25
7.5 Test Result and Data (30MHz ~ 1GHz)	25
7.6 Test Result and Data (Bandedge).....	27
7.7 Test Result and Data (1GHz ~ 3GHz).....	63
7.8 Test Result and Data (3GHz ~ 18GHz).....	99
7.9 Test Result and Data (18GHz ~ 25GHz).....	135
7.10 Restricted Bands of Operation	139
7.11 Test Photographs (30MHz ~ 1GHz).....	140
7.12 Test Photographs (1GHz ~ 25GHz)	141
8. Test of Conducted Spurious Emission	143
8.1 Test Limit	143
8.2 Test Procedure	143
8.3 Test Setup Layout	143
8.4 Test Result and Data	143
9. 20dB Bandwidth Measurement Data.....	151



9.1	Test Limit	151
9.2	Test Procedures	151
9.3	Test Setup Layout	151
9.4	Test Result and Data	151
10.	Carrier Frequency Separation	154
10.1	Test Limit	154
10.2	Test Procedures	154
10.3	Test Setup Layout	154
10.4	Test Result and Data	154
11.	Dwell Time on each channel	157
11.1	Test Limit	157
11.2	Test Procedures	157
11.3	Test Setup Layout	157
11.4	Test Result and Data	157
12.	Number of Hopping Channels	160
12.1	Test Limit	160
12.2	Test Procedures	160
12.3	Test Setup Layout	160
12.4	Test Result and Data	160
13.	Maximum Average Output Power	162
13.1	Test Limit	162
13.2	Test Procedures	162
13.3	Test Setup Layout	162
13.4	Test Result and Data	162

**History of this test report**

Report No.	Issued Date	Description
25030112-TRFCC01	May 22, 2026	Original
25030112-TRFCC01-A	Jun. 16, 2026	Model No. GC10 has black and white color sample. To ensure consistency, the black sample was used to retest the AC Power line conducted emission and Radiation Emission (30MHz-1GHz).



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024

FCC Rules and Regulations Part 15 Subpart C §15.247

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	PASS
15.247(a)(1)	. Pseudorandom Frequency Hopping Sequence	PASS
15.207	. AC Power Line Conducted Emission	PASS
15.209 15.205	. Radiated Spurious Emission	PASS
15.247(d)	. Conducted Spurious Emission	PASS
15.247(a)(1)	. Channel Carrier Frequencies Separation	PASS
15.247(a)(1)	. 20dB Bandwidth	PASS
15.247(a)(1)	. Dwell Time	PASS
15.247(b)	. Number of Hopping Channels	PASS
15.247(b)	. Output Power	PASS

*The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement, measurement uncertainty evaluation is not considered.



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Operation Frequency Range	2400MHz-2483.5MHz
Center Frequency Range	BT: 2402MHz-2480MHz BLE: 2402MHz-2480MHz For GFSK 1Mbps 2404MHz-2478MHz For GFSK 2Mbps SRD(FHSS): 2402MHz-2480MHz SRD(DTS): 2402MHz-2480MHz For GFSK 1Mbps SRD(DTS): 2404MHz-2478MHz For GFSK 2Mbps
Modulation Type	BT: GFSK, $\pi/4$ -DQPSK, 8DPSK BLE: GFSK SRD(FHSS): GFSK, $\pi/4$ -DQPSK, 8DPSK SRD(DTS): GFSK
Modulation Technology	FHSS, DTS
Data Rate	BT: GFSK: 1Mbps, $\pi/4$ -DQPSK: 2Mbps, 8DPSK: 3Mbps BLE: GFSK: 1Mbps GFSK: 2Mbps SRD(FHSS): GFSK: 1Mbps, $\pi/4$ -DQPSK: 2Mbps, 8DPSK: 3Mbps SRD(DTS): GFSK: 1Mbps GFSK: 2Mbps
Antenna Type	FPC Antenna
Antenna Gain	2.7 dBi

Note:

1. This is BT Report.
2. For more details, please refer to the User's manual of the EUT.



2.2 Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
*00	2402	20	2422	40	2442	60	2462
01	2403	21	2423	41	2443	61	2463
02	2404	22	2424	42	2444	62	2464
03	2405	23	2425	43	2445	63	2465
04	2406	24	2426	44	2446	64	2466
05	2407	25	2427	45	2447	65	2467
06	2408	26	2428	46	2448	66	2468
07	2409	27	2429	47	2449	67	2469
08	2410	28	2430	48	2450	68	2470
09	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	*78	2480
19	2421	*39	2441	59	2461	---	---

Note: Channels remarked * are selected to perform test.

(For Above 1GHz)

Below test Channel generated the worst case, they were reported as the final data.

Channel	Frequency (MHz)	Bandedge		1GHz ~ 3GHz		3GHz ~ 18GHz		18GHz ~ 25GHz	
		Ver PK/AV	Hor PK/AV	Ver PK/AV	Hor PK/AV	Ver PK/AV	Hor PK/AV	Ver PK/AV	Hor PK/AV
0	2402	V	V	V	V	V	V	--	--
39	2441	V	V	V	V	V	V	V	V
78	2480	V	V	V	V	V	V	--	--



2.3 Test Mode & Test Software

- During testing, the interface cables and equipment positions were varied according to ANSI C63.10
- An executive program, "Bluetooth RF Test Tool ver: 5.4.0.5" under Windows 10 system was executed to transmit and receive data via Bluetooth.
- The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode 1	TX Mode, Power from Adapter (AC 120V/60Hz)
Test Mode 2	TX Mode, Power from Adapter (AC 240V/60Hz)
caused "Test Mode 1" generated the worst case, it was reported as the final data.	
Radiated Emissions (30MHz ~ 1GHz)	
Test Mode 1	TX Mode, Power from Adapter (AC 120V/60Hz)
Radiated Emissions (1GHz ~ 25GHz)	
Test Mode 1	TX Mode, Power from Adapter (AC 120V/60Hz)

Modulation Type	TX CONFIGURATION
GFSK	1TX
$\pi/4$ -DQPSK	1TX
8DPSK	1TX

2.4 Description of Test System

RF Conducted				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	lenovo	S1GL2W	N/A	N/A
Test Fixture	YD-TECH	MCS-73-LV	N/A	N/A

Radiated Emissions				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	DELL	Latitude E5470	N/A	Adapter / 1.8m / NS
Adapter	Noratec	NT-K240	N/A	N/A
Test Fixture	YD-TECH	MCS-73 LV	N/A	N/A
USB Cable (A to B)	BENEVO	BUSB3100AMF	1.5m / NS	N/A

AC Power Line Conducted Emission				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
Adapter	Noratec	NT-K240	N/A	N/A
Test Fixture	YD-TECH	MCS-73 LV	N/A	N/A



2.5 General Information of Test

Organization	CerpPASS Technology Corp.	
☒ Test Site	CerpPASS Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel: +886-3-3226-888 Fax: +886-3-3226-881	
	FCC	TW1439, TW1079
	ISED Company Number	4934E
	ISED CAB identifier	TW1439
Frequency Range Investigated	Conducted: from 150kHz to 30 MHz Radiation: from 9 kHz to 25,000MHz	
Test Distance	The test distance of radiated emission from antenna to EUT is 3 M.	

Test Item	Test Site	Test Period	Environmental Conditions	Tested By
RF Conducted	RFCON01-NK	2025/04/28	25.6°C / 56%	Leon Huang
RF Conducted	RFCON01-NK	2025/05/21	25.5°C / 53%	Leon Huang
RF Conducted	RFCON01-NK	2026/01/29	24.9°C / 48%	Leon Huang
RF Conducted	RFCON01-NK	2026/02/04	23.6°C / 47%	Leon Huang
Radiated Emissions (Above 1G)	3M02-NK	2026/01/17	19.8°C / 53%	Leon Huang
Radiated Emissions (Above 1G)	3M02-NK	2026/01/19	20.2°C / 51%	Leon Huang
Radiated Emissions (Below 1G)	3M02-NK	2026/06/15	23.5°C / 55%	Leon Huang
AC Power Line Conducted Emission	CON02-NK	2026/06/15	23.1°C / 64%	Leon Huang



2.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Before 2025/09/15

Measurement Item	Uncertainty
Conducted Spurious Emission	$\pm 2.1\text{dB}$
6dB Bandwidth	$\pm 5.4\%$
20dB Bandwidth	$\pm 4.4\%$
Occupied Bandwidth	$\pm 4.5\%$
Peak Output Power(Conducted Power Meter)	$\pm 1.1\text{dB}$
Dwell Time / Deactivation Time	$\pm 7.6\%$
Power Spectral Density	$\pm 2.0\text{dB}$
Duty Cycle	$\pm 3.5\%$

After 2025/09/15

Measurement Item	Uncertainty
AC Power Line Conduction(150kHz~30MHz)	$\pm 3.2\text{dB}$
Radiated Spurious Emission(9kHz~30MHz)	$\pm 3.4\text{dB}$
Radiated Spurious Emission(30MHz~1GHz)	$\pm 5.2\text{dB}$
Radiated Spurious Emission(1GHz~40GHz)	$\pm 5.2\text{dB}$



3. Test Equipment and Ancillaries Used for Tests

Test Item	Radiated Emissions (Below 1G)				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	VULB 9168-1947	2026/02/10	2027/02/09
Active Loop Antenna	Schwarzbeck	FMZB 1513	00414	2026/02/04	2027/02/03
Double Ridged Guide Horn Antenna	RF SPAN	DRH18-E	210309A18-ES	2025/08/22	2026/08/21
Horn Antenna	RF SPIN	DRH0844	KV2E20A0844	2026/03/26	2027/03/25
EMI Receiver	R&S	ESCI	101423	2025/07/10	2026/07/09
Spectrum Analyzer	R&S	FSV 40-N	102151	2025/08/18	2026/08/17
Preamplifier	EMC INSTRUMENTS	EMC118A45V1S S	981069	2025/12/18	2026/12/17
Preamplifier	EMC INSTRUMENTS	EMC184045SEE	981159	2026/04/02	2027/04/01
Preamplifier	EM Electronics corp.	EM330	60659	2025/12/18	2026/12/17
Cable-4m (9k-3G)	EMEC	RG-223	18274M	2025/07/02	2026/07/01
Cable-1m (30M-1G)	EMC INSTRUMENTS	EMCCFD400-NM-NM-1000	260301	2026/04/10	2027/04/09
Cable-3m (30M-1G)	EMC INSTRUMENTS	EMCCFD400-NM-NM-3000	260302	2026/04/10	2027/04/09
Cable-7m (30M-1G)	EMC INSTRUMENTS	EMCCFD400-NM-NM-7000	260303	2026/04/10	2027/04/09
Cable-8m (10M-26.5G)	HUBER SUHNER	SF126E	587396/126E	2025/10/15	2026/10/14
Cable-3m (10M-26.5G)	HUBER SUHNER	SF126E	587399/126E	2025/10/15	2026/10/14
Cable-1m (1G-26.5G)	HUBER SUHNER	SF126E	589848/126E	2025/10/15	2026/10/14
Cable-1m (1G-40G)	EMC INSTRUMENTS	EMC104HS-KM-KM-1000	260304	2026/04/10	2027/04/09
Cable-3m (1G-40G)	EMC INSTRUMENTS	EMC104HS-KM-KM-3000	260305	2026/04/10	2027/04/09
Cable-7m (1G-40G)	EMC INSTRUMENTS	EMC104HS-KM-KM-7000	260306	2026/04/10	2027/04/09
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA
High Pass Filter	WOKEN	WFIL-H3000-18000F-03	WR377WC2B1	2025/10/13	2026/10/12
Highpass Filter	WOKEN	WFIL-H7000-18000F-01	WR468FWC2B1	2025/10/03	2026/10/02



Test Item	Radiated Emissions (Above 1G)				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	369	2025/02/17	2026/02/16
Active Loop Antenna	Schwarzbeck	FMZB 1513	00414	2025/02/18	2026/02/17
Horn Antenna	EMCO	3115	31589	2025/02/20	2026/02/19
Horn Antenna	EMCO	3116	31974	2025/02/20	2026/02/19
EMI Receiver	R&S	ESR 7	101906	2025/05/19	2026/05/18
Spectrum Analyzer	R&S	FSV3044	101744	2025/04/23	2026/04/22
Preamplifier	EMC INSTRUMENTS	EMC0518A45SE	981069	2025/12/18	2026/12/17
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2025/10/13	2026/10/12
Preamplifier	EM Electronics corp.	EM330	60659	2025/12/18	2026/12/17
Cable-4m (9k-3G)	EMEC	RG-223	18274M	2025/07/02	2026/07/01
Cable-3in1 (30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1315	2025/02/21	2026/02/20
Cable-0.5m (1G-40G)	HUBER SUHNER	SUCOFLEX 104	805443/4	2025/02/26	2026/02/25
Cable-3m (1G-40G)	HUBER SUHNER	SUCOFLEX 104	805796/4	2025/02/26	2026/02/25
Cable-8m (1G-26.5G)	WOKEN	WCBA-WCA203SM	CCE1374	2025/02/26	2026/02/25
Cable-1m (1G-40G)	HUBER SUHNER	SF102E	602125	2025/07/19	2026/07/18
Cable-3m (1G-40G)	HUBER SUHNER	SF102E	552450	2025/07/09	2026/07/08
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA
High Pass Filter	WOKEN	WFIL-H3000-18000F-03	WR377WC2B1	2025/10/13	2026/10/12
Notch Filter	Warison	WFIL-N5925-7125F-04	WRQ4BFWC4M1	2025/02/21	2026/02/20
Hipass Filter	Warison	WFIL-H7500-18000F	WRQ4BFWC2J1	2025/02/21	2026/02/20



Test Item	RF Conducted				
Test Site	RFCON02-NK (2025/04/28)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Spectrum Analyzer	R&S	FSP 40	100047	2025/03/03	2026/03/02
Attenuator	KEYSIGHT	8491B	MY39250703	2025/02/12	2026/02/11
Cable-0.5m (1G-26.5G)	HUBER SUHNER	SUCOFLEX 102	28422/2	2024/05/13	2025/05/12
Power Meter	Anritsu	ML2495A	1224005	2025/02/12	2026/02/11
Power Sensor	Anritsu	MA2411B	1207295	2025/02/12	2026/02/11
Switch Box	Theda	1-4	TW5451159	NA	NA

Test Item	RF Conducted				
Test Site	RFCON02-NK (2025/05/21)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Spectrum Analyzer	R&S	FSP 40	100047	2025/03/03	2026/03/02
Attenuator	KEYSIGHT	8491B	MY39250703	2025/02/12	2026/02/11
Cable-0.5m (30M-40G)	HUBER SUHNER	SUCOFLEX 102	28420/2	2024/10/24	2025/10/23
Power Meter	Anritsu	ML2495A	1224005	2025/02/12	2026/02/11
Power Sensor	Anritsu	MA2411B	1207295	2025/02/12	2026/02/11
Switch Box	Theda	1-4	TW5451159	NA	NA

Test Item	RF Conducted				
Test Site	RFCON02-NK (2026/01/29 & 2026/02/04)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Spectrum Analyzer	R&S	FSP 40	100047	2025/03/03	2026/03/02
Attenuator	KEYSIGHT	8491B	MY39250703	2025/02/12	2026/02/11
Cable-0.5m (1G-26.5G)	HUBER SUHNER	SUCOFLEX 102	28422/2	2025/06/06	2026/06/05
Power Meter	Anritsu	ML2495A	1224005	2025/02/12	2026/02/11
Power Sensor	Anritsu	MA2411B	1207295	2025/02/12	2026/02/11
Switch Box	Theda	1-4	TW5451159	NA	NA

Test Item	AC Power Line Conducted Emission				
Test Site	CON02-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	R&S	ESCI	101423	2025/07/10	2026/07/09
LISN	Schwarzbeck	NSLK 8127	1197	2025/09/22	2026/09/21
Two-Line V-Network	R&S	ENV216	102185	2025/08/28	2026/08/27
Cable-3m (9k-3G)	EMEC	RG-223	18271M	2025/06/25	2026/06/24
E3	AUDIX	v8.2014-8-6	RK-000536	NA	NA



4. Antenna Requirements

4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2 Antenna Construction and Directional Gain

Antenna Type	FPC Antenna
Antenna Gain	2.7dBi



5. Frequency Hopping System Requirements

5.1 Frequency Hopping Requirement

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

5.2 EUT Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule. This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.



5.3 Pseudorandom Frequency Hopping Sequence

Pseudorandom Frequency Hopping Sequence Table as below:

Channel number:

16	1	62	50	44	67	23	10	73	53
17	17	58	45	8	27	67	46	6	48
60	63	18	17	73	50	58	49	34	67
17	27	46	5	73	31	79	59	68	46

etc.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



6. Test of AC Power Line Conducted Emission

6.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9kHz, according to the methods defined in ANSI C63.10-2020+Cor.1-2023 and ANSI C63.10a-2024. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

6.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.





6.3 Typical Test Setup

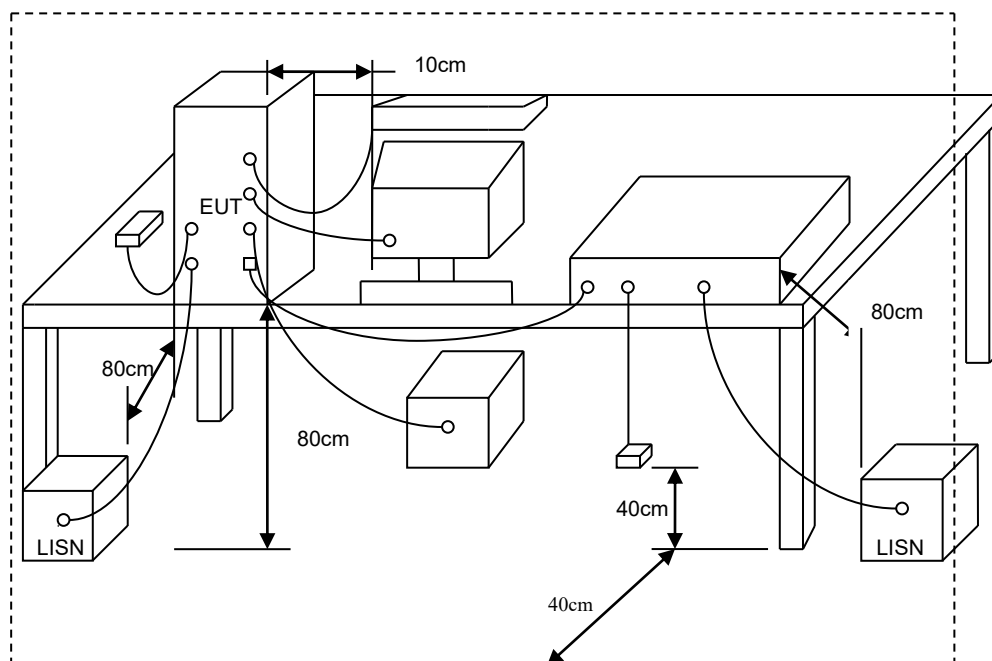



6.4 Test Result and Data

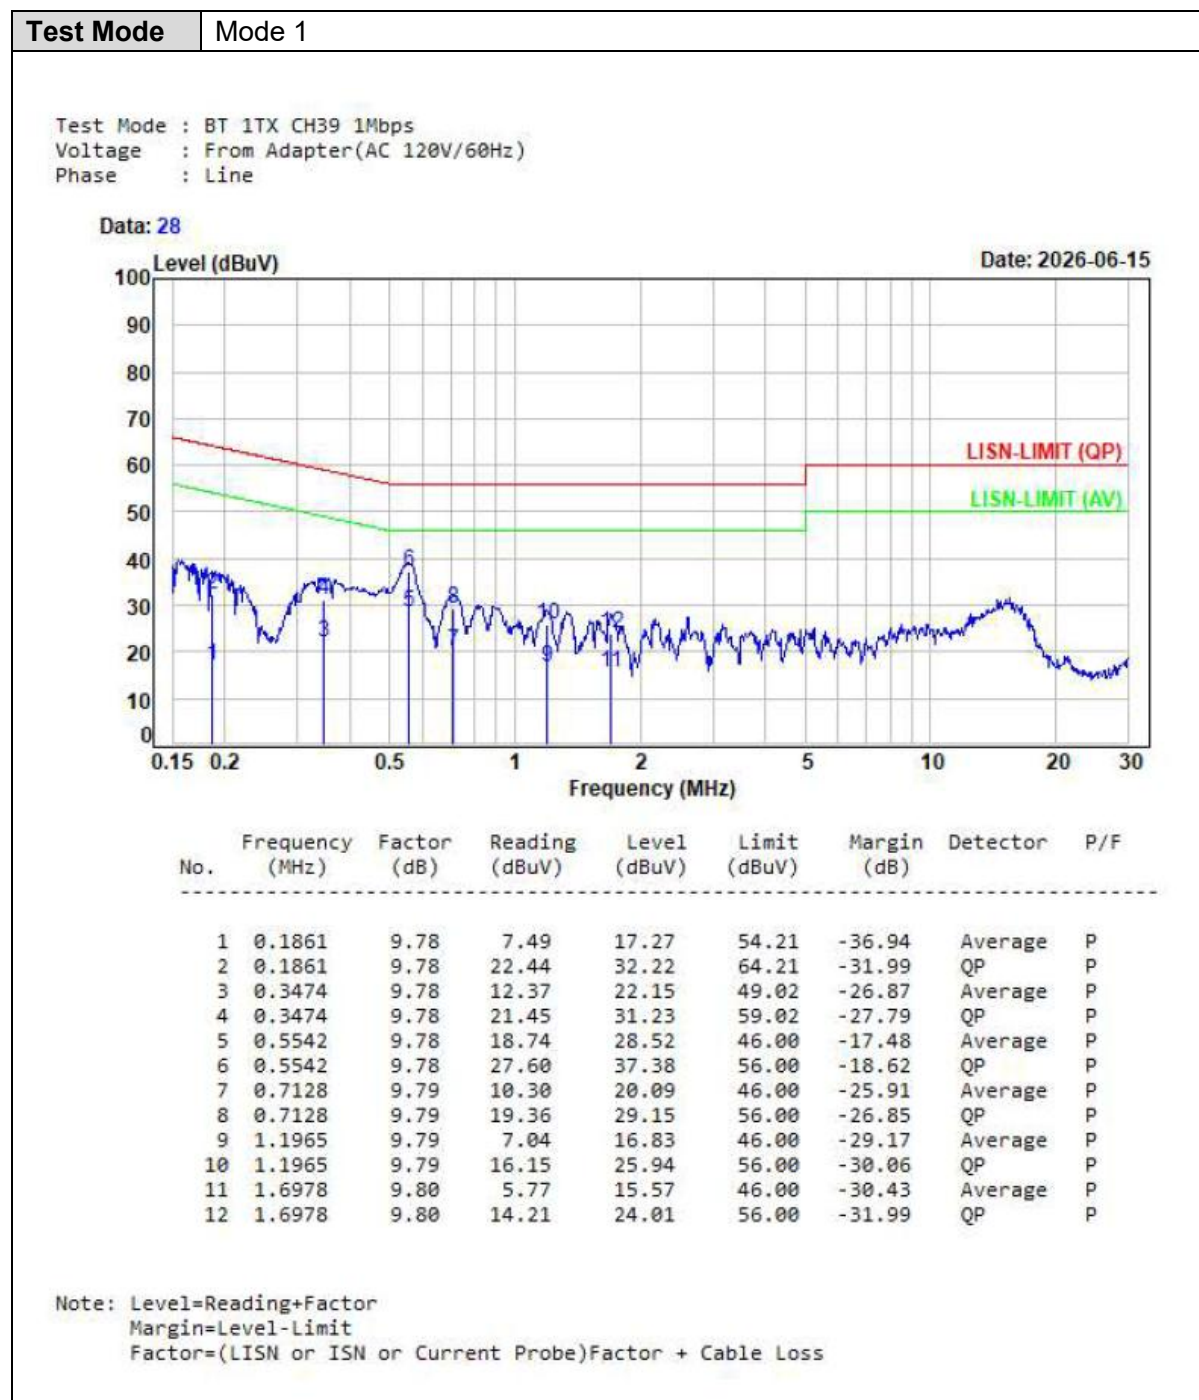

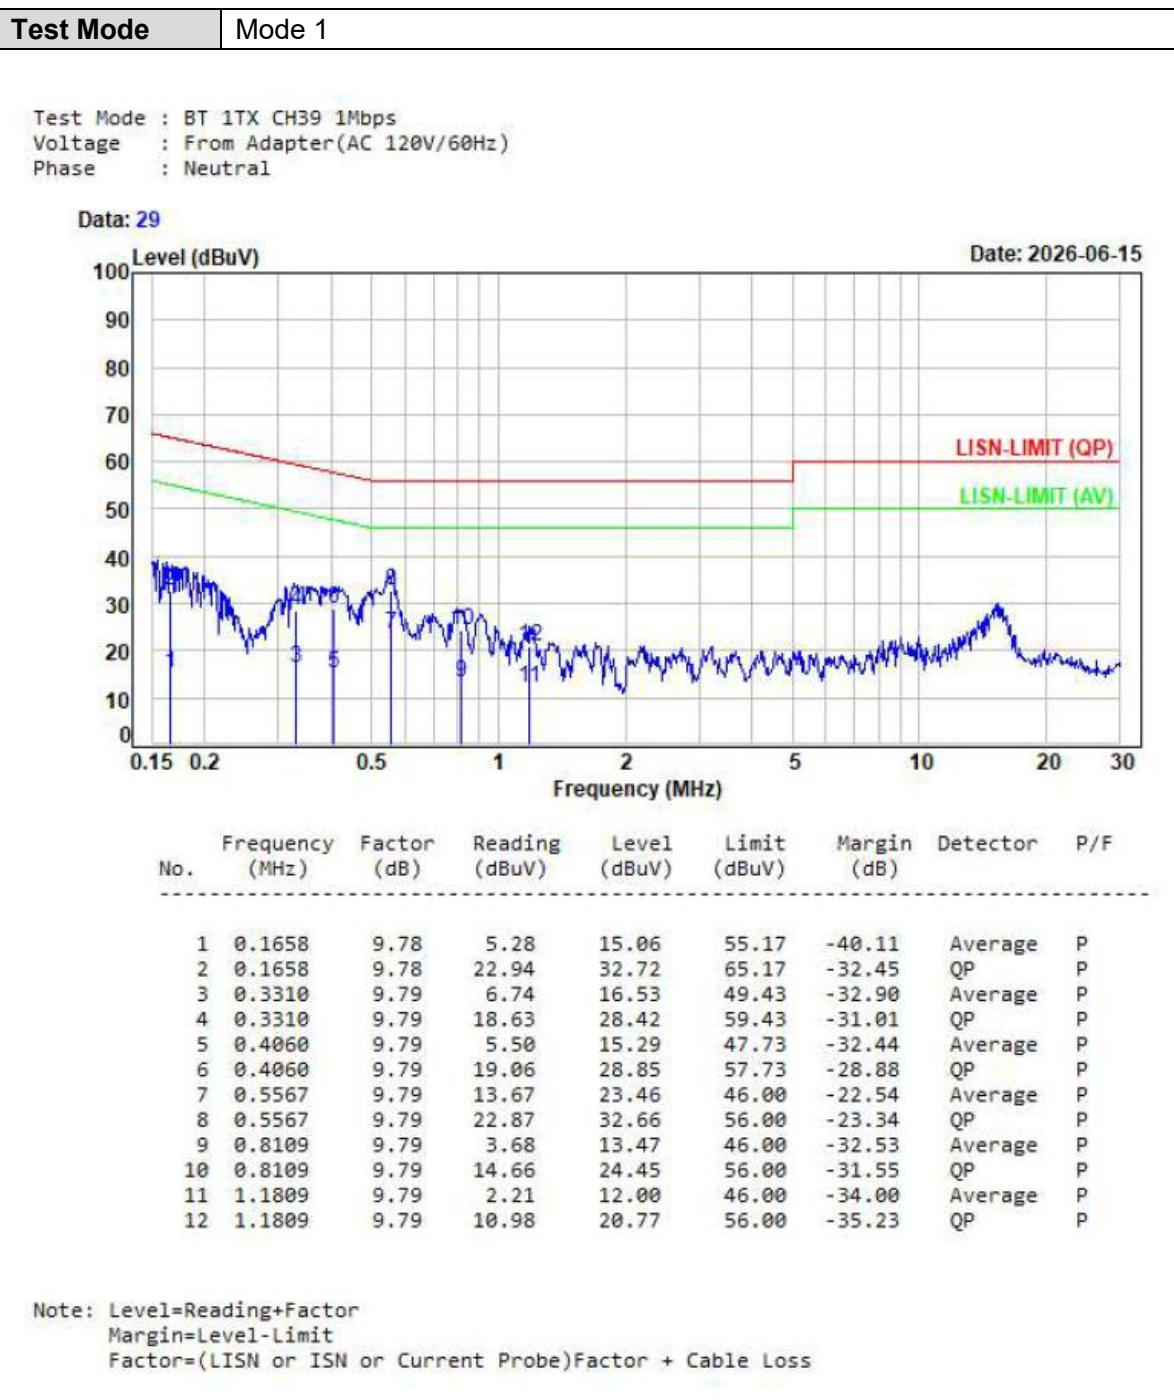



7. Test of Radiated Spurious Emission

7.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3



7.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.


Note:

- 1.The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized. (Y-AXIS is the worst.)
- 2.Due to the test software function limit the operation band setting(200dBuV/m).
There's no corresponding limitation in the actual test item.




7.3 Typical Test Setup


Below 30MHz test setup

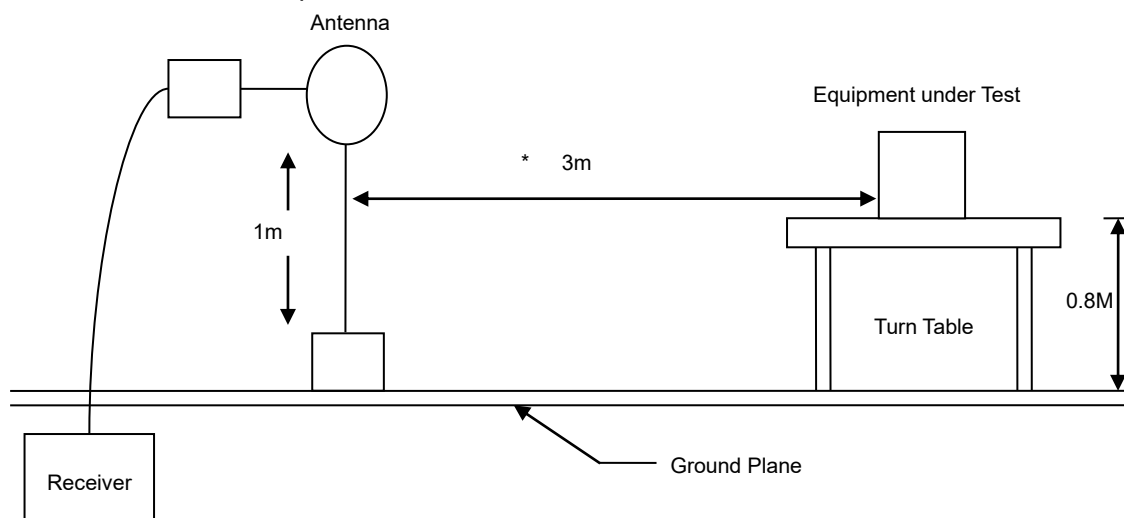

30MHz- 1GHz Test Setup

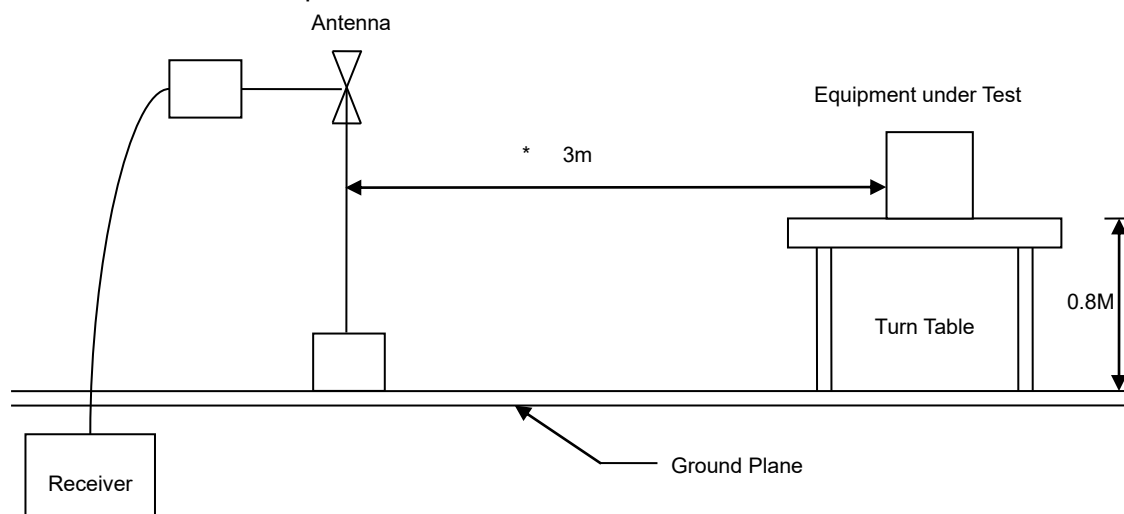

Above 1GHz Test Setup

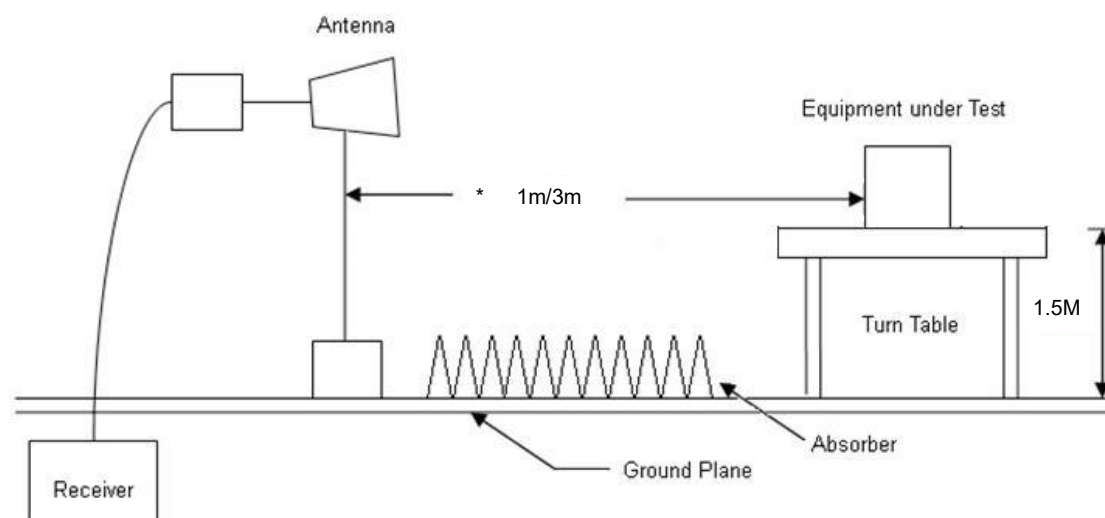





7.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz-30MHz spurious emission is under limit 20dB more.


7.5 Test Result and Data (30MHz ~ 1GHz)

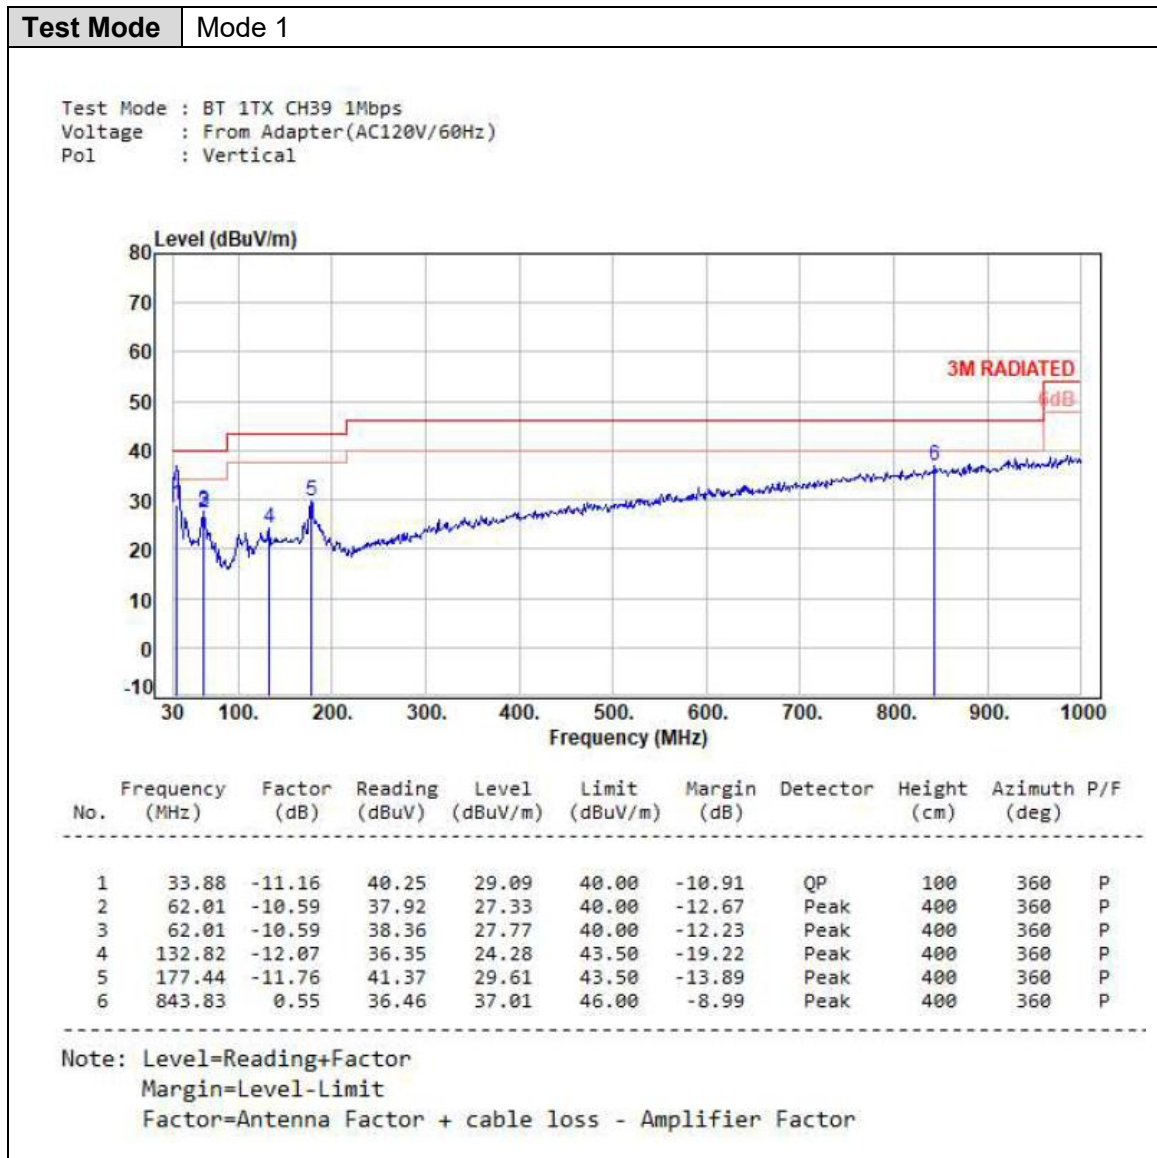


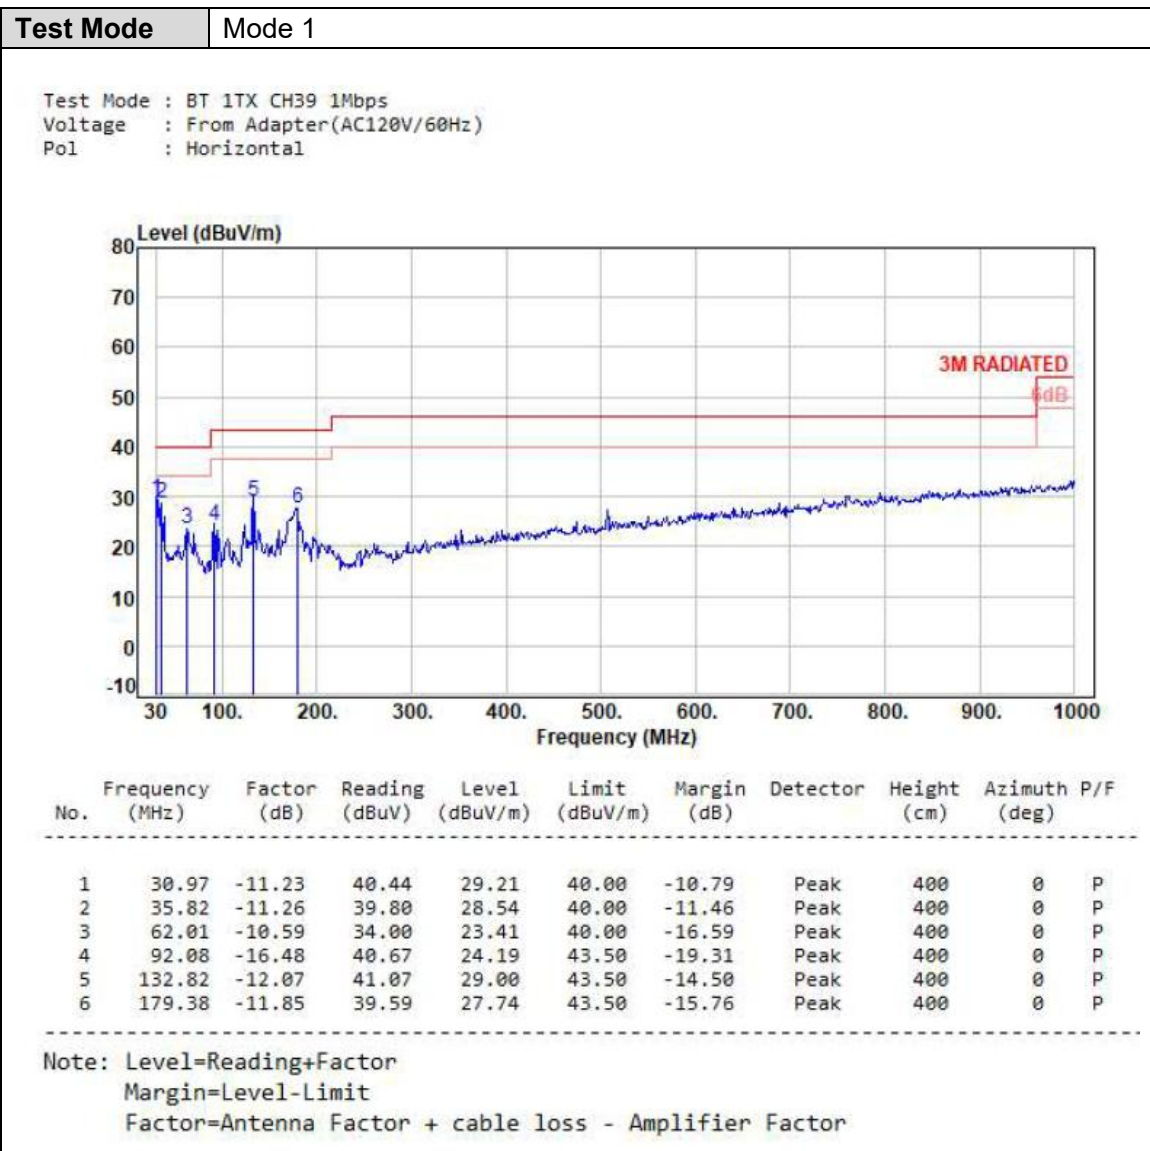






7.6 Test Result and Data (Bandedge)

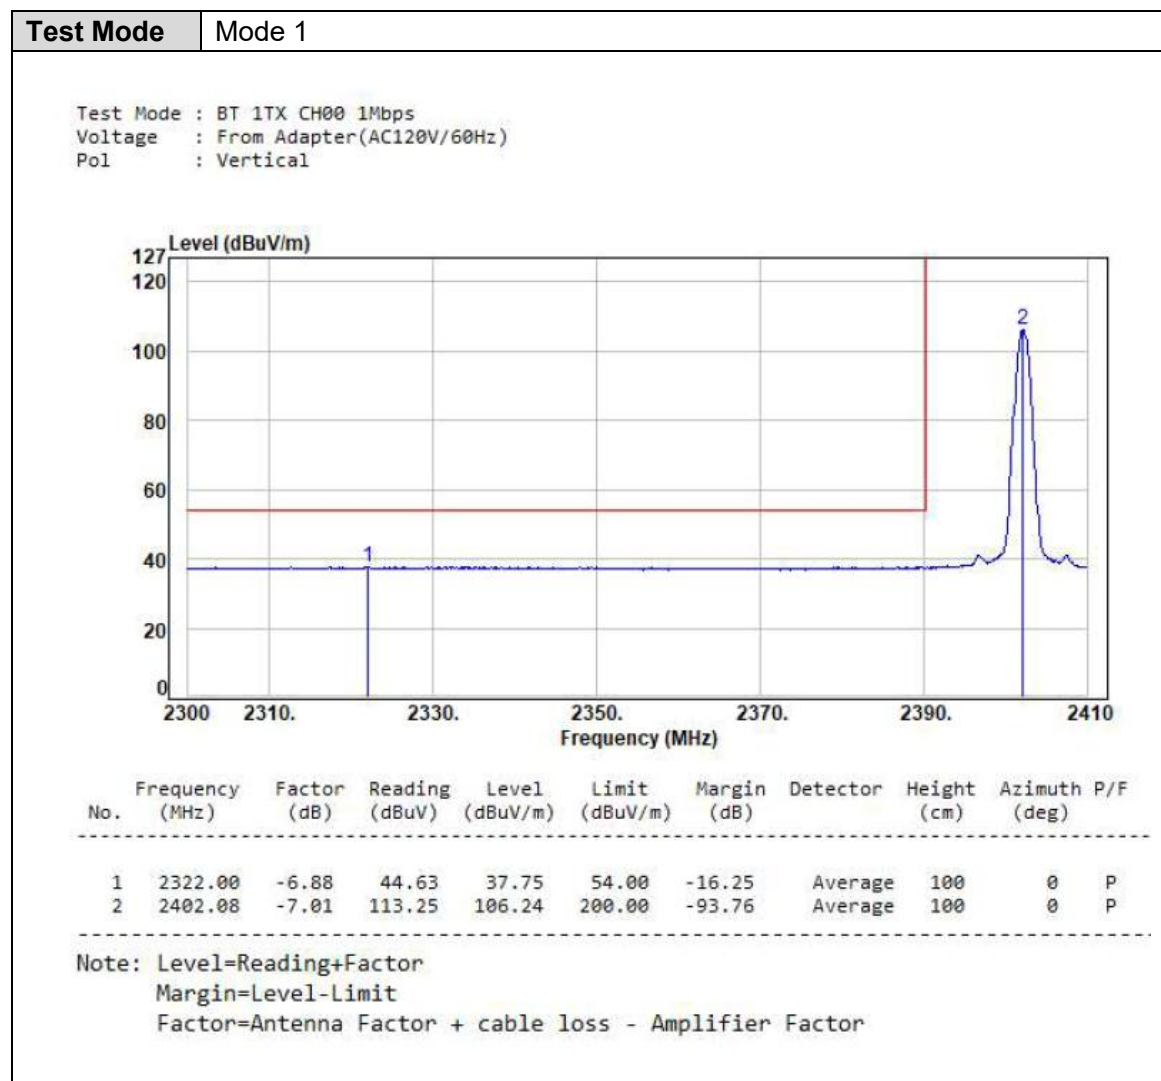


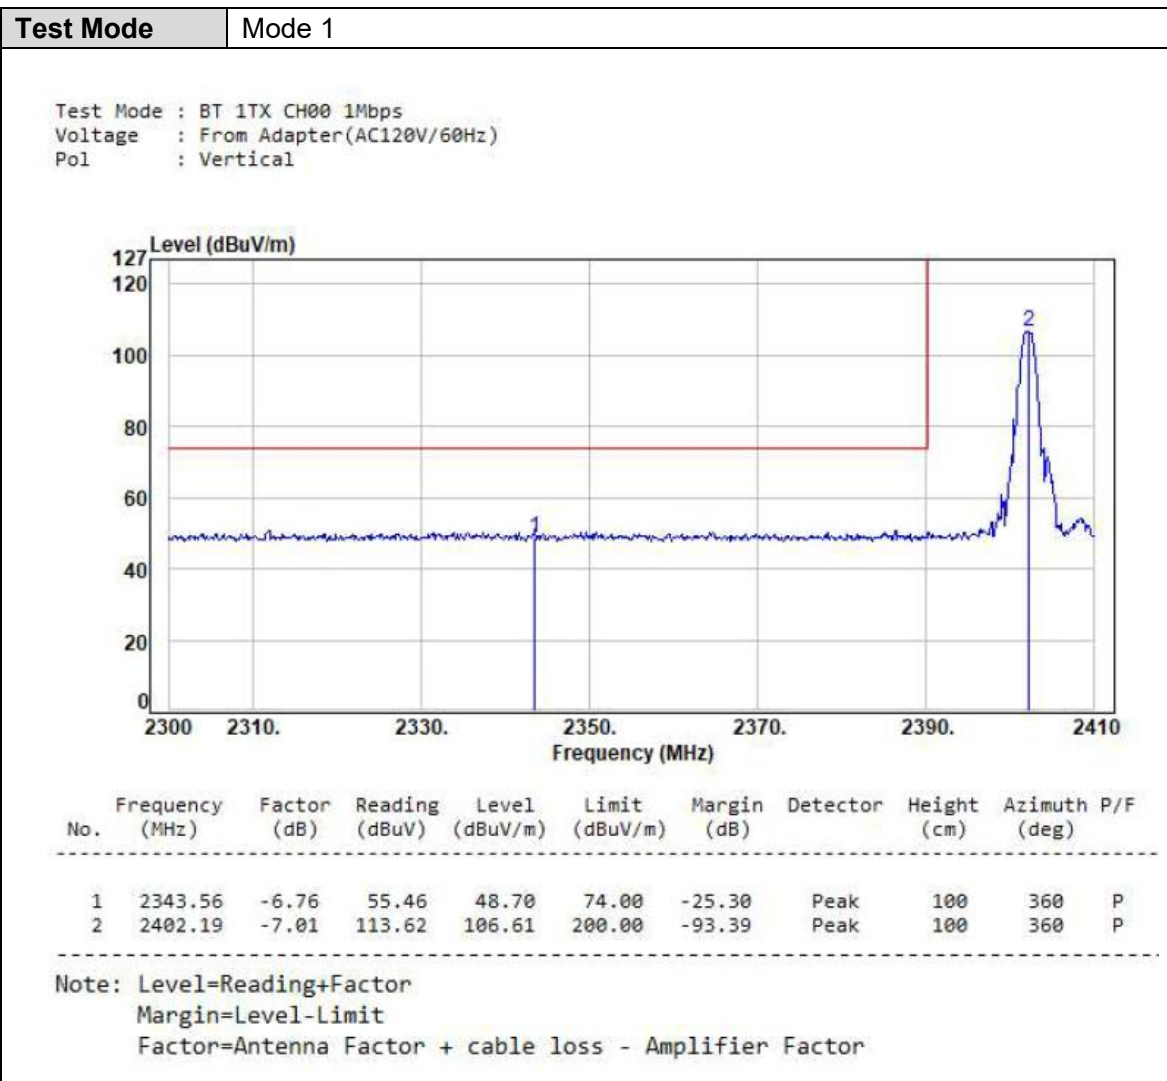


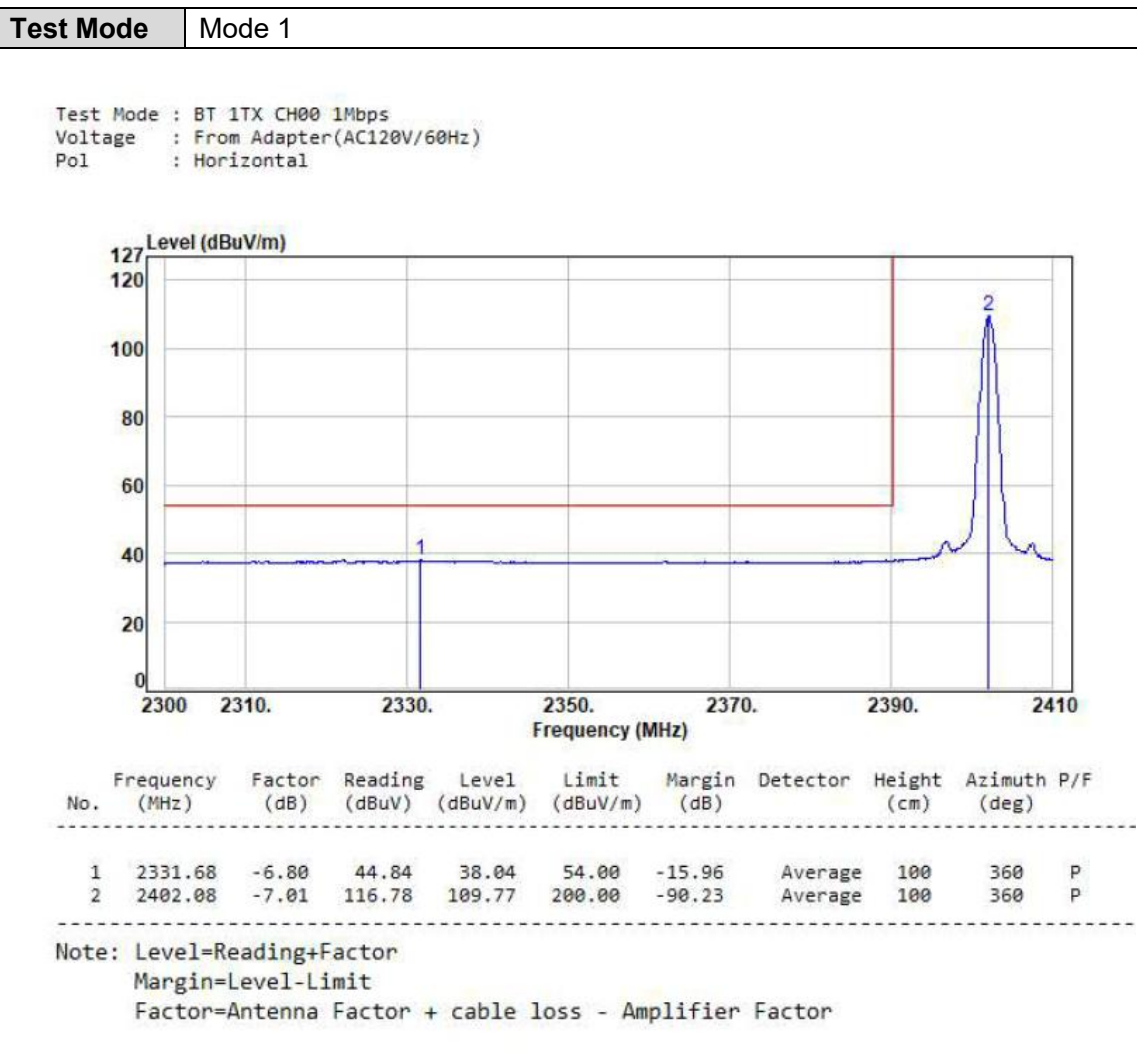


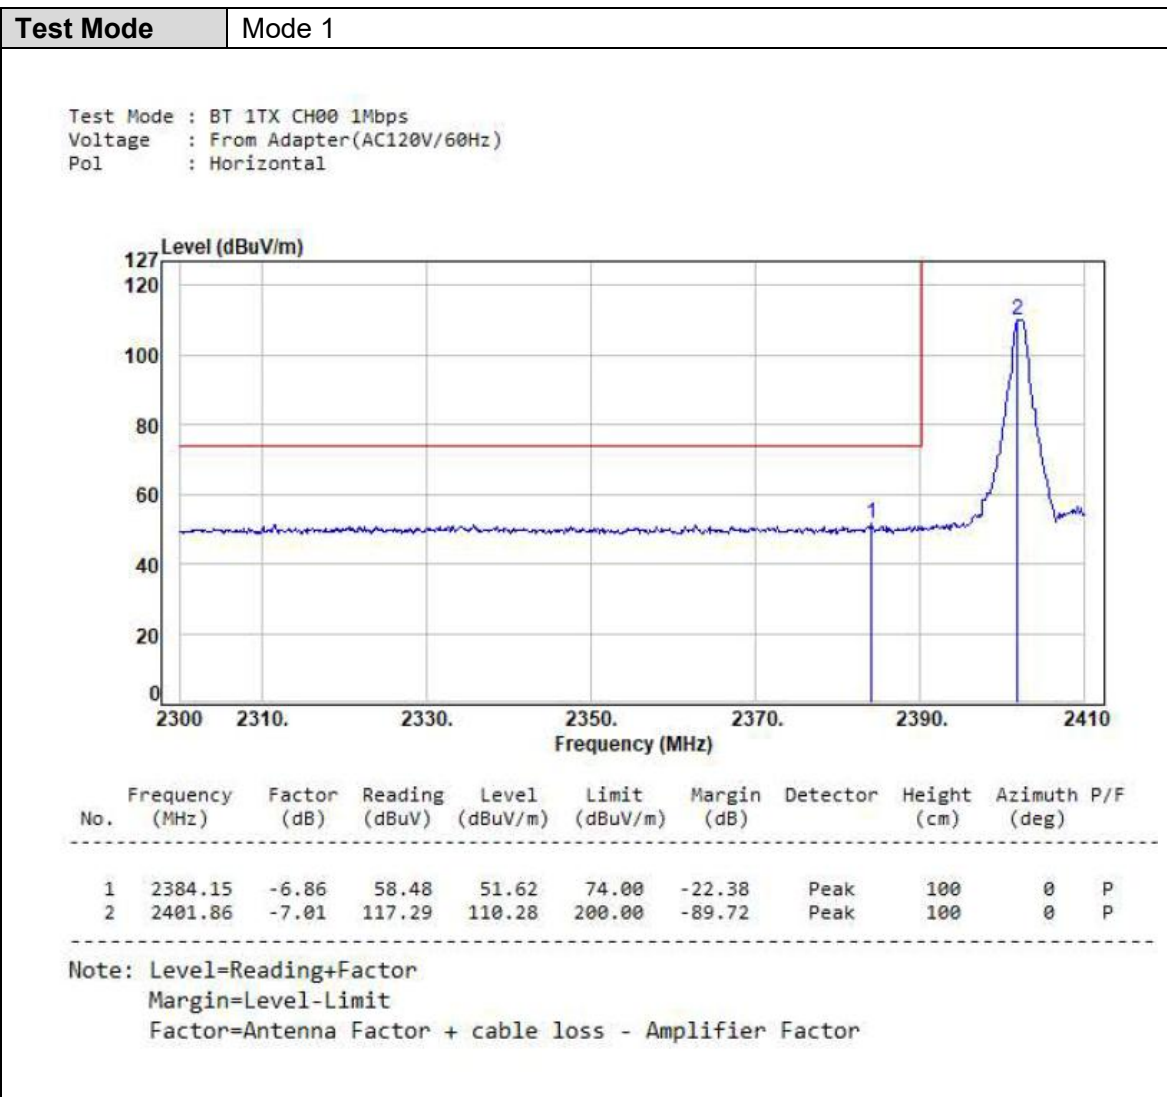


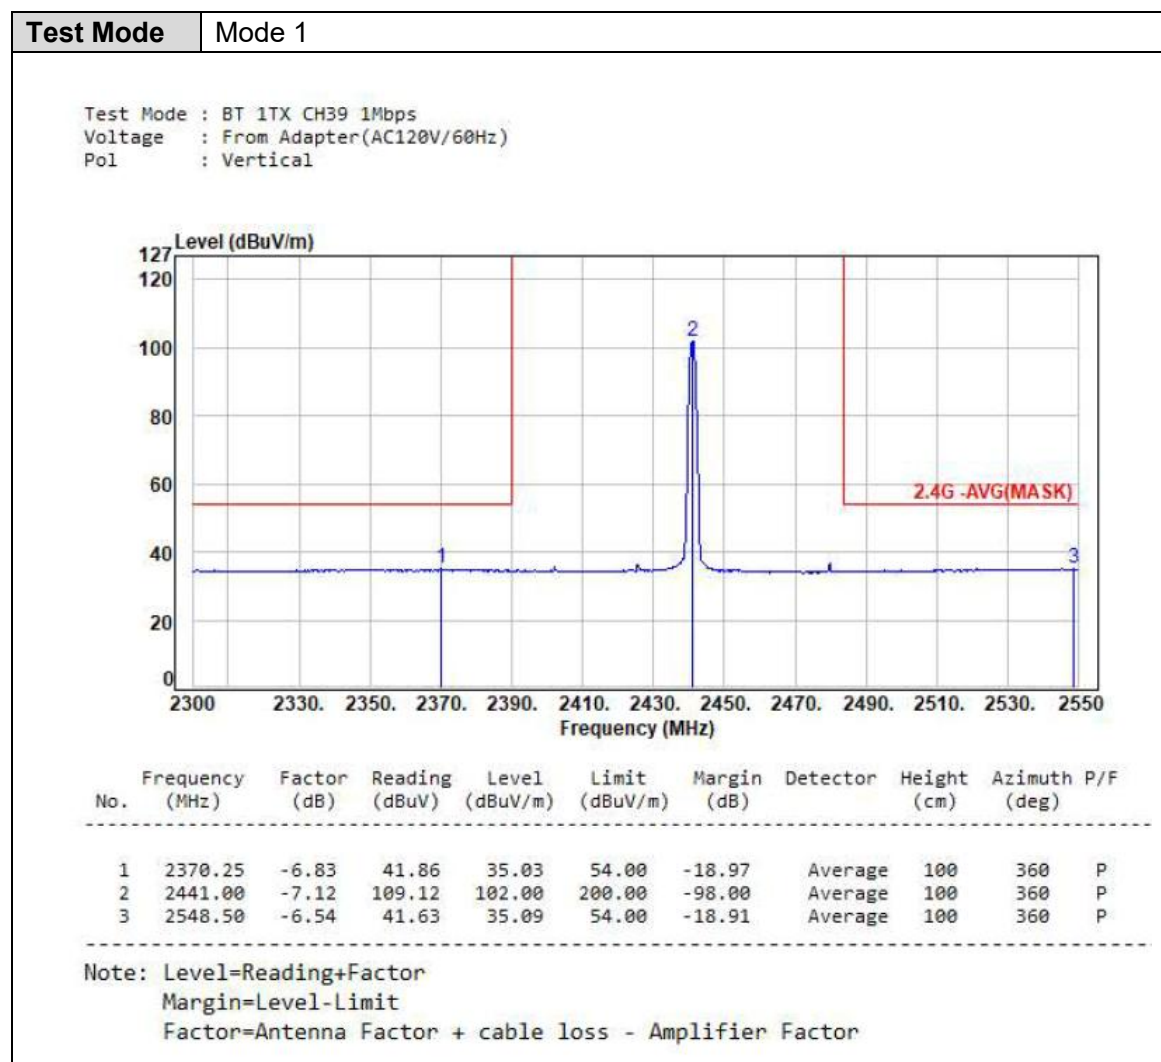


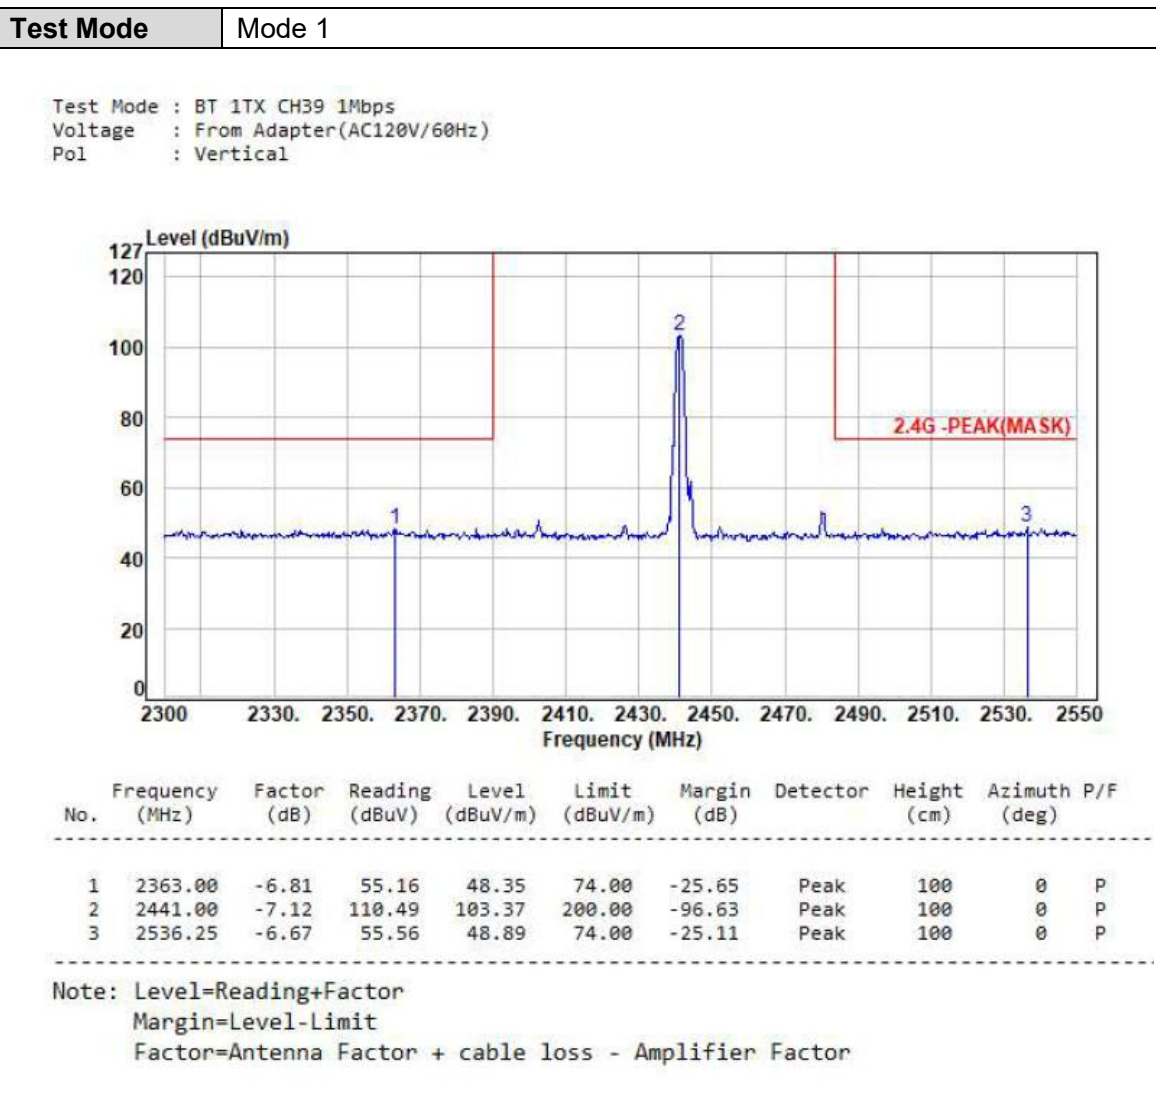


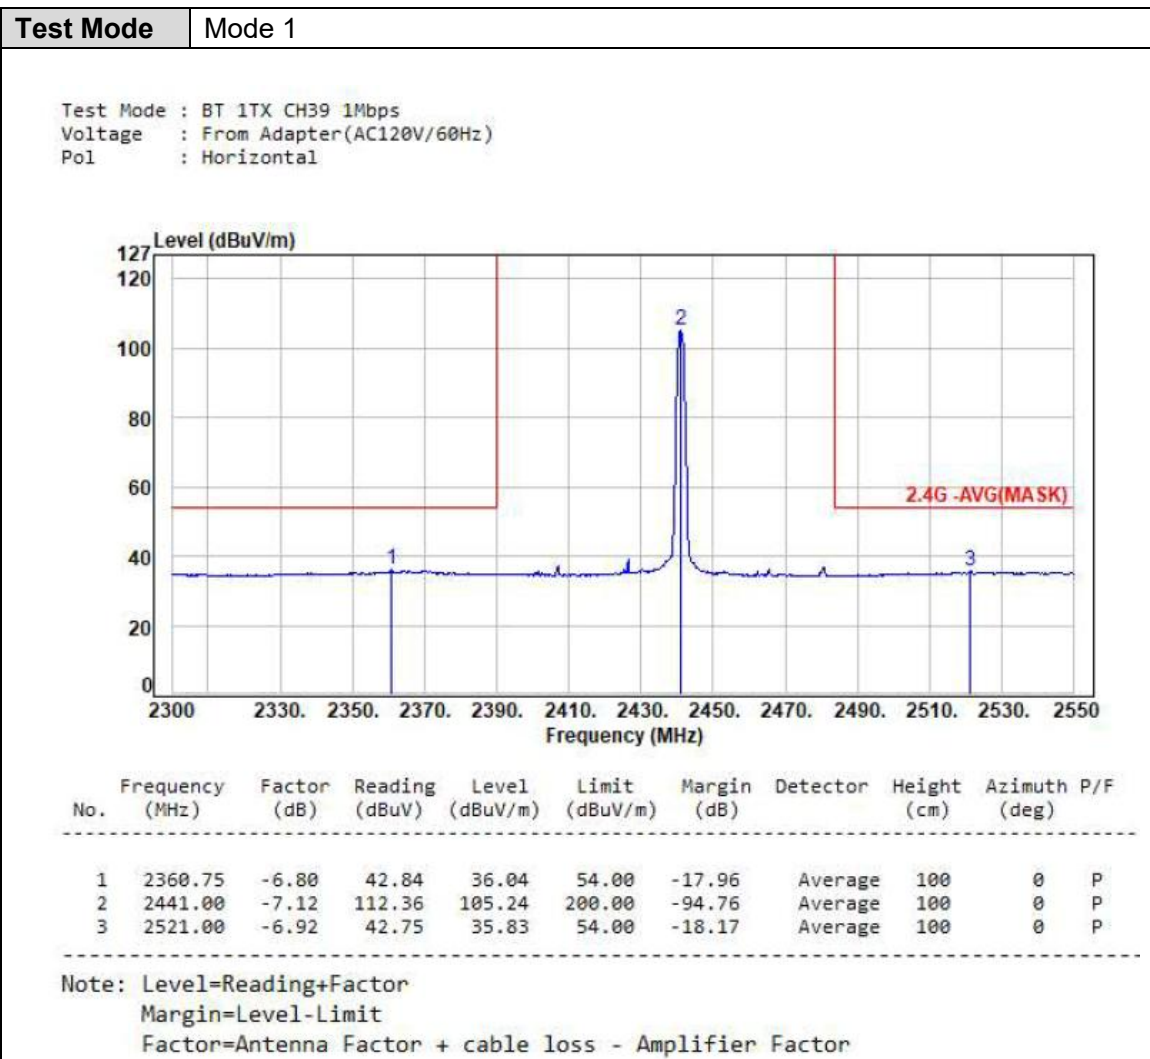


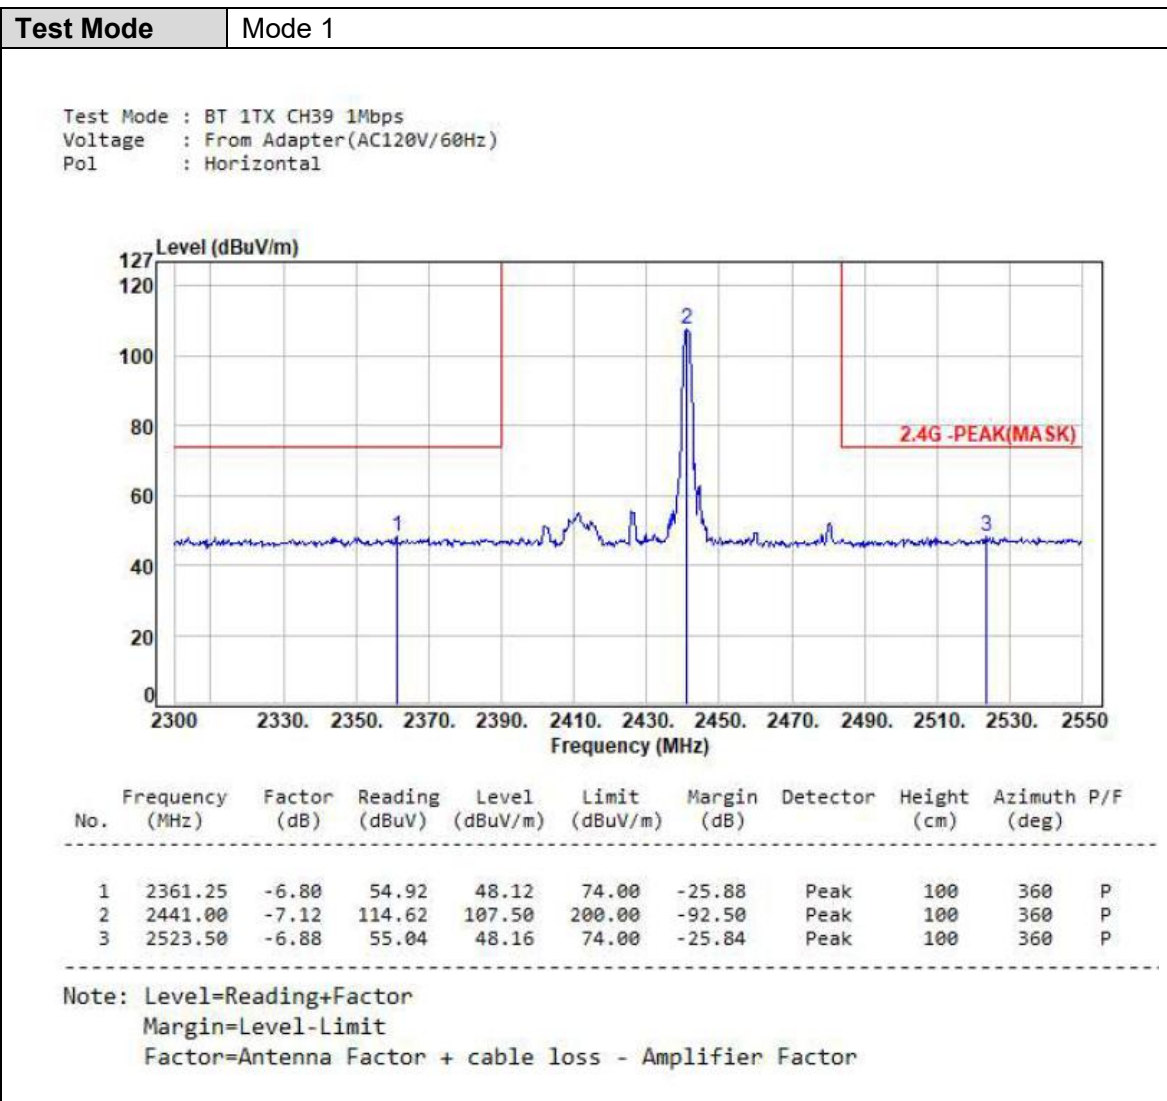


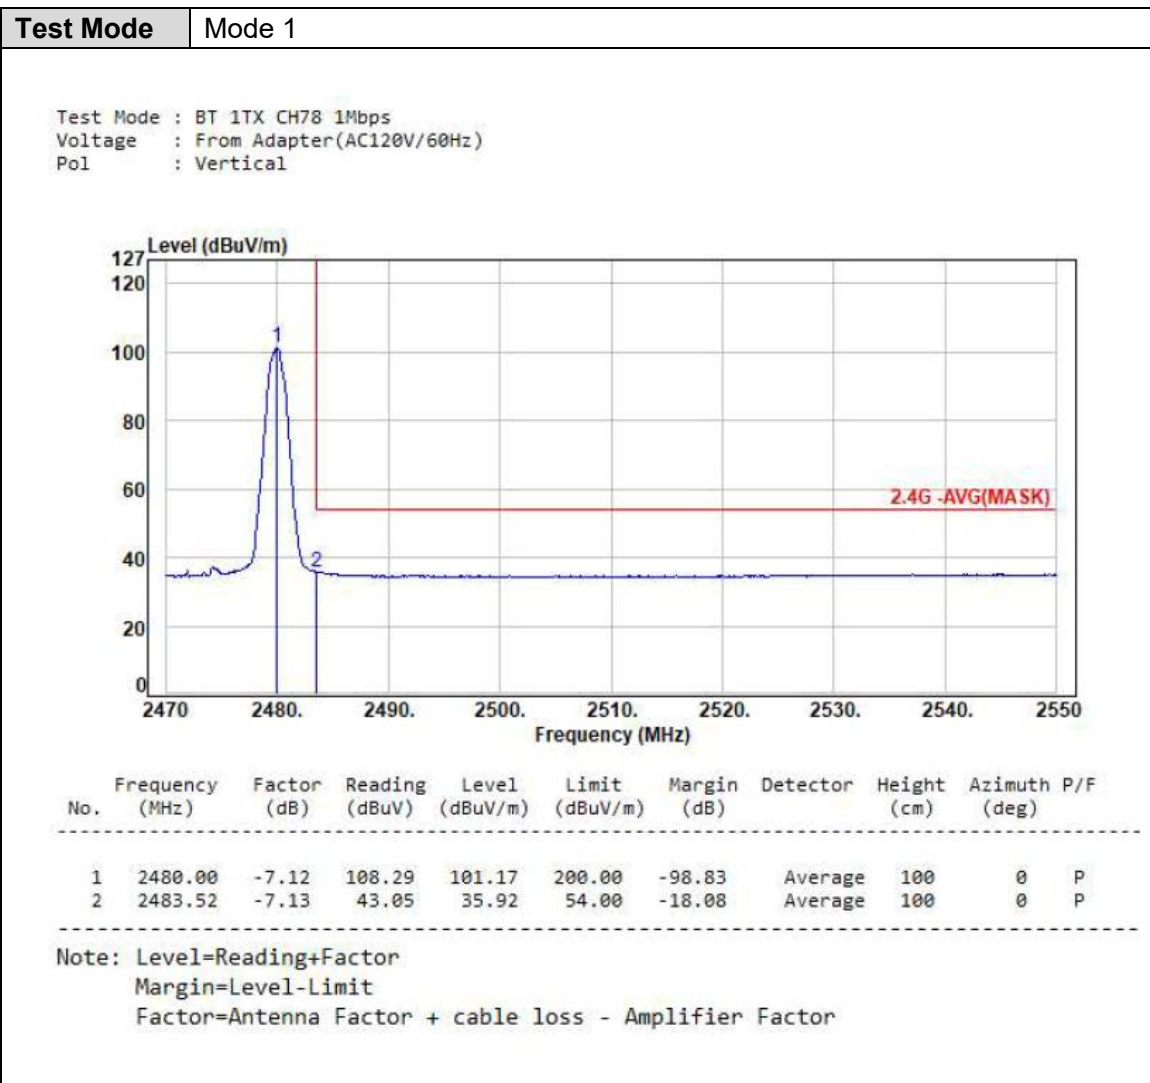


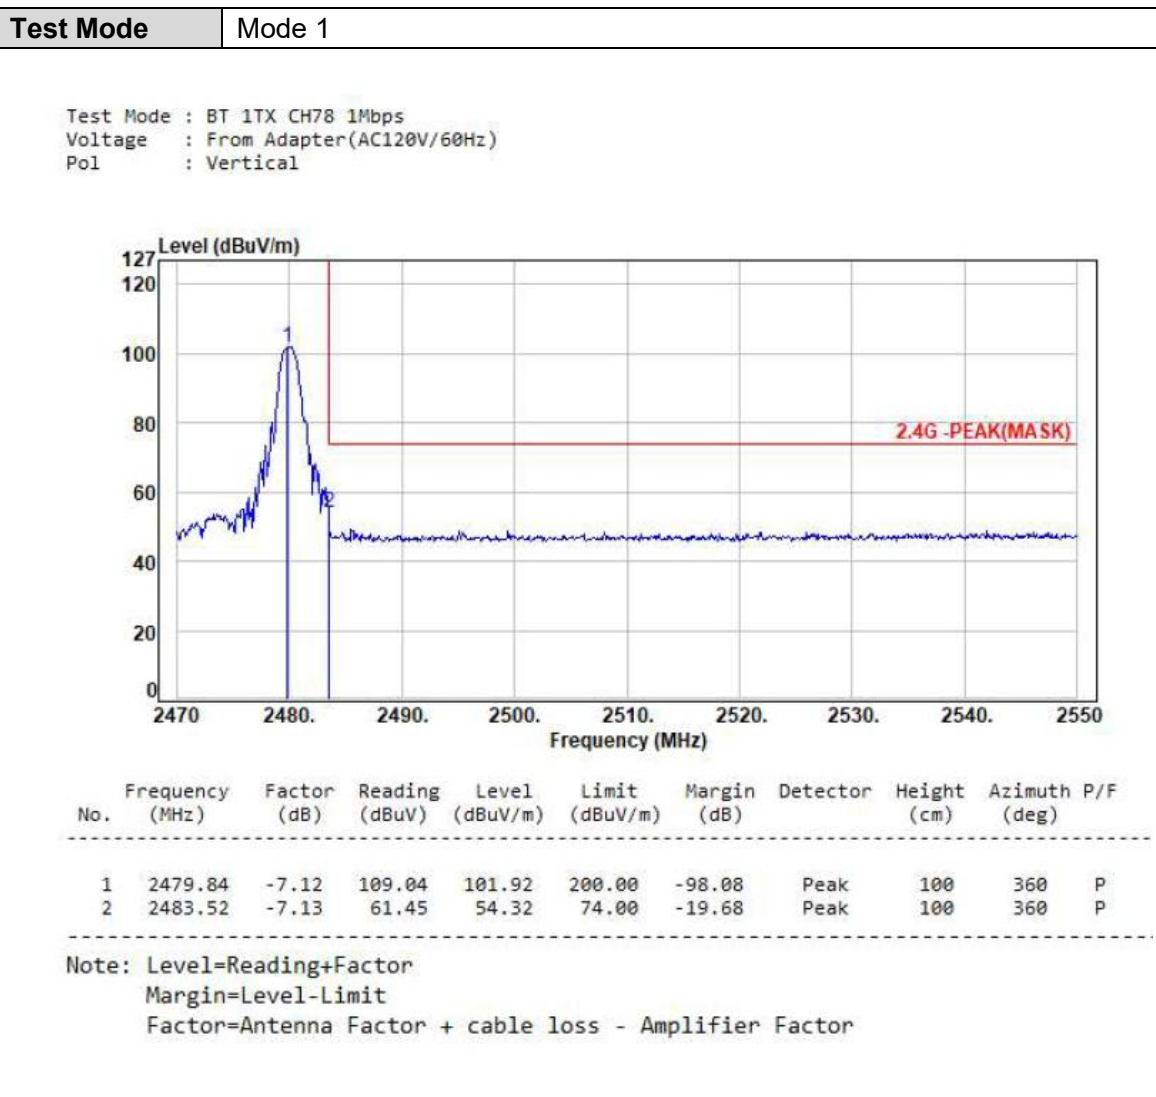


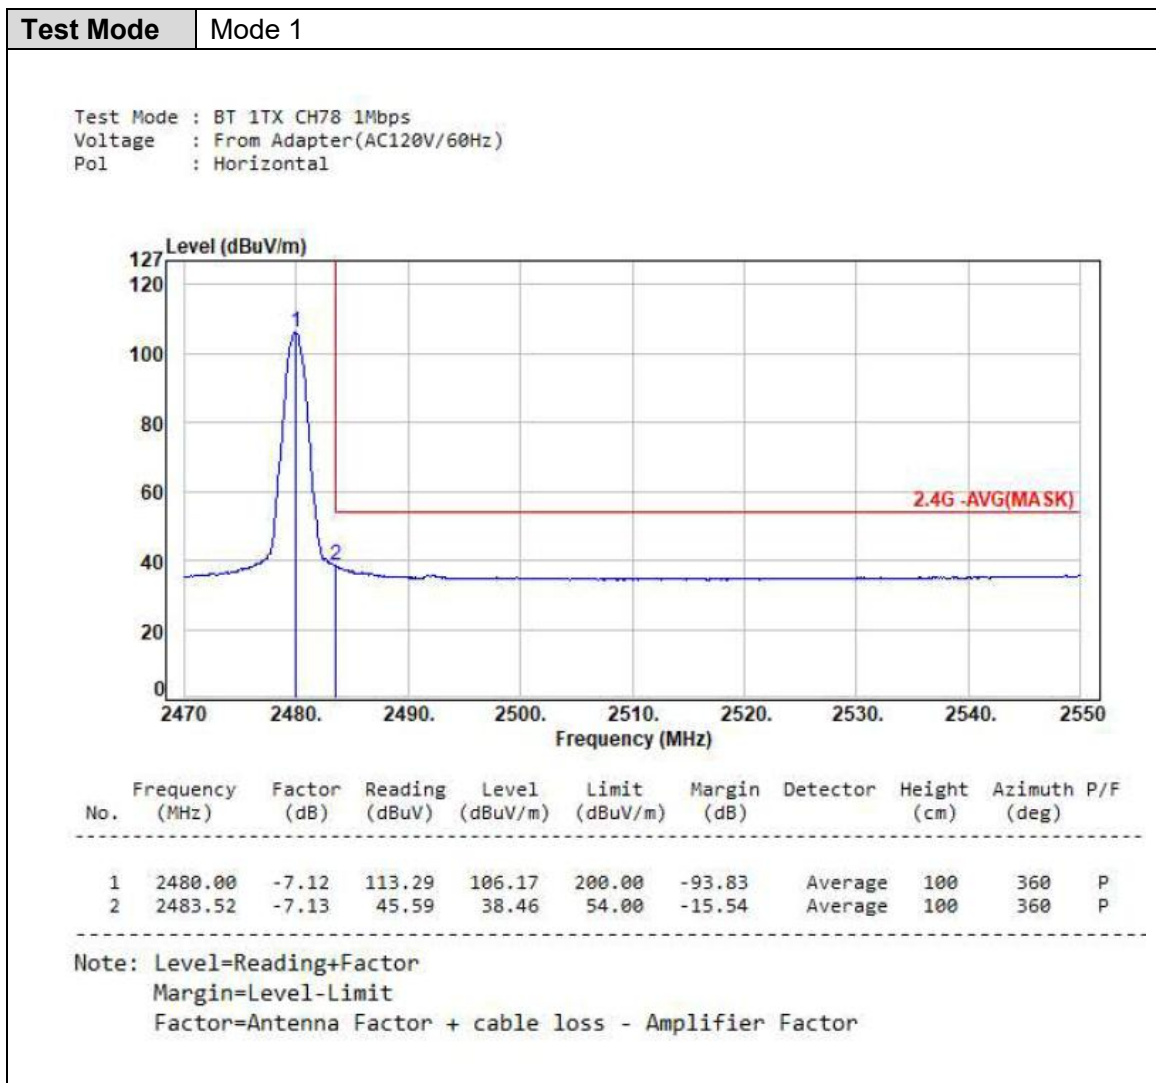


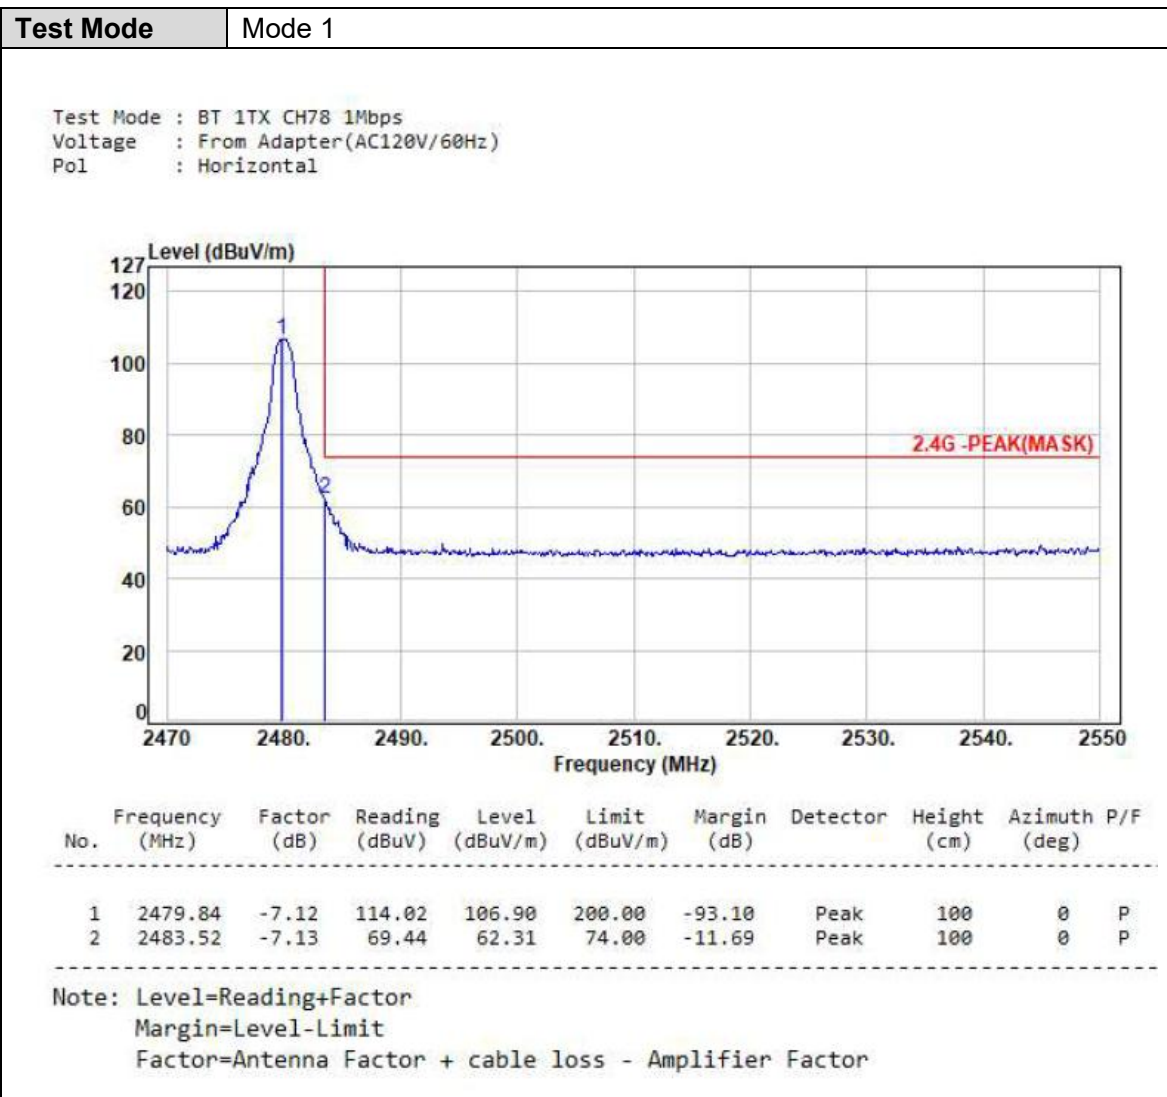


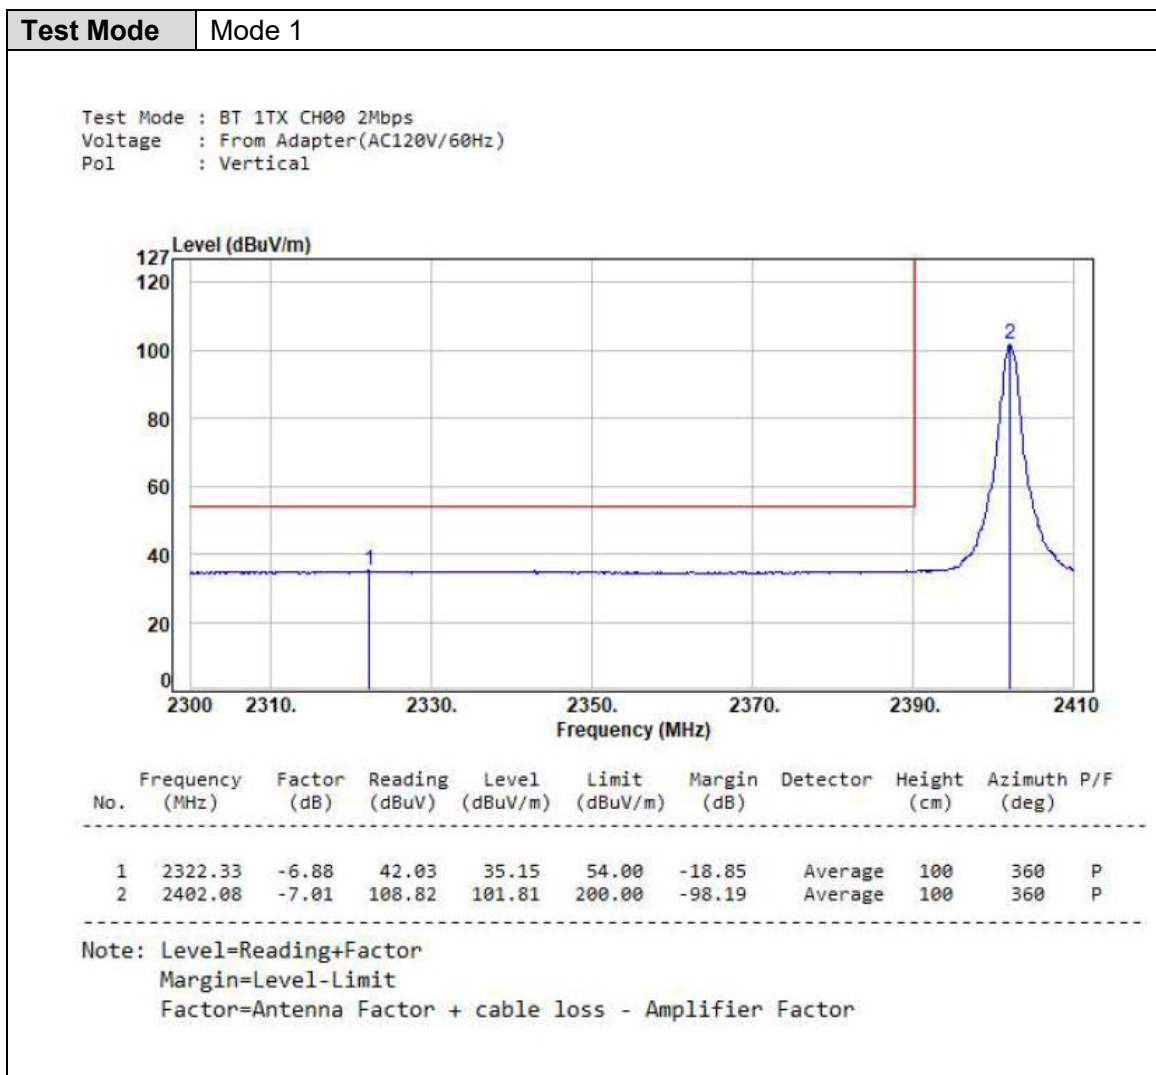


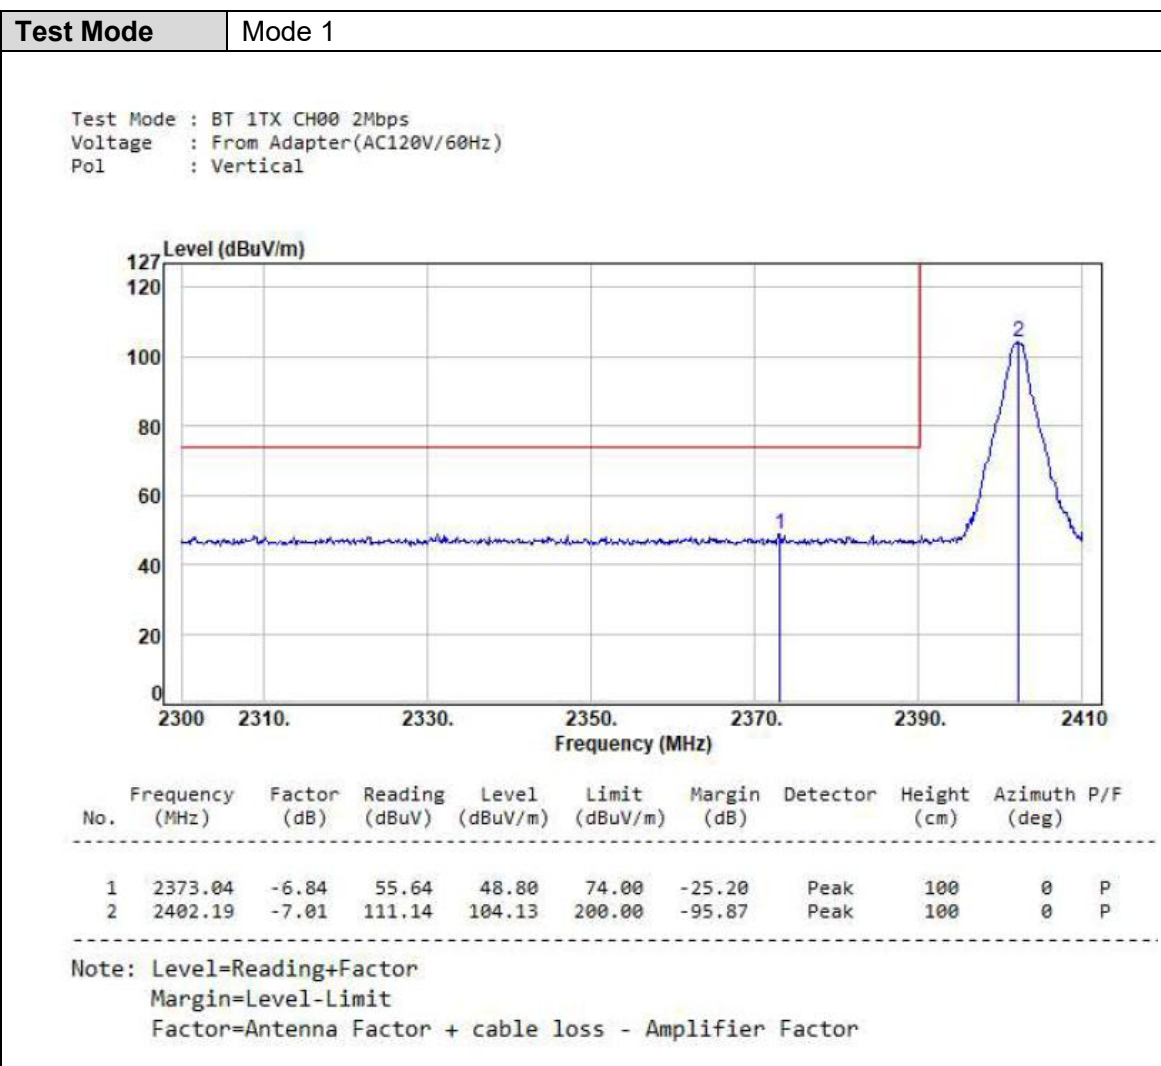


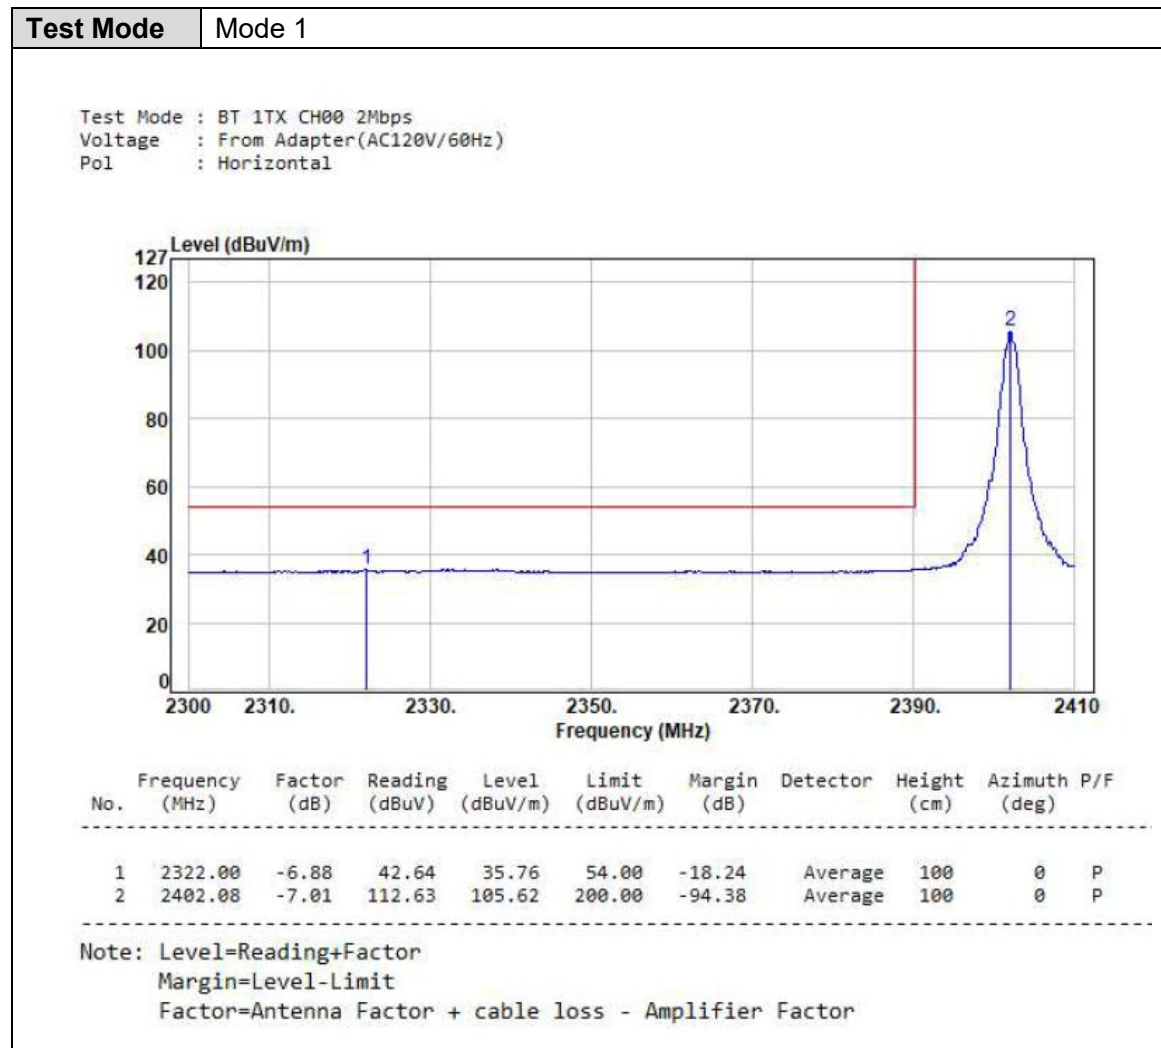


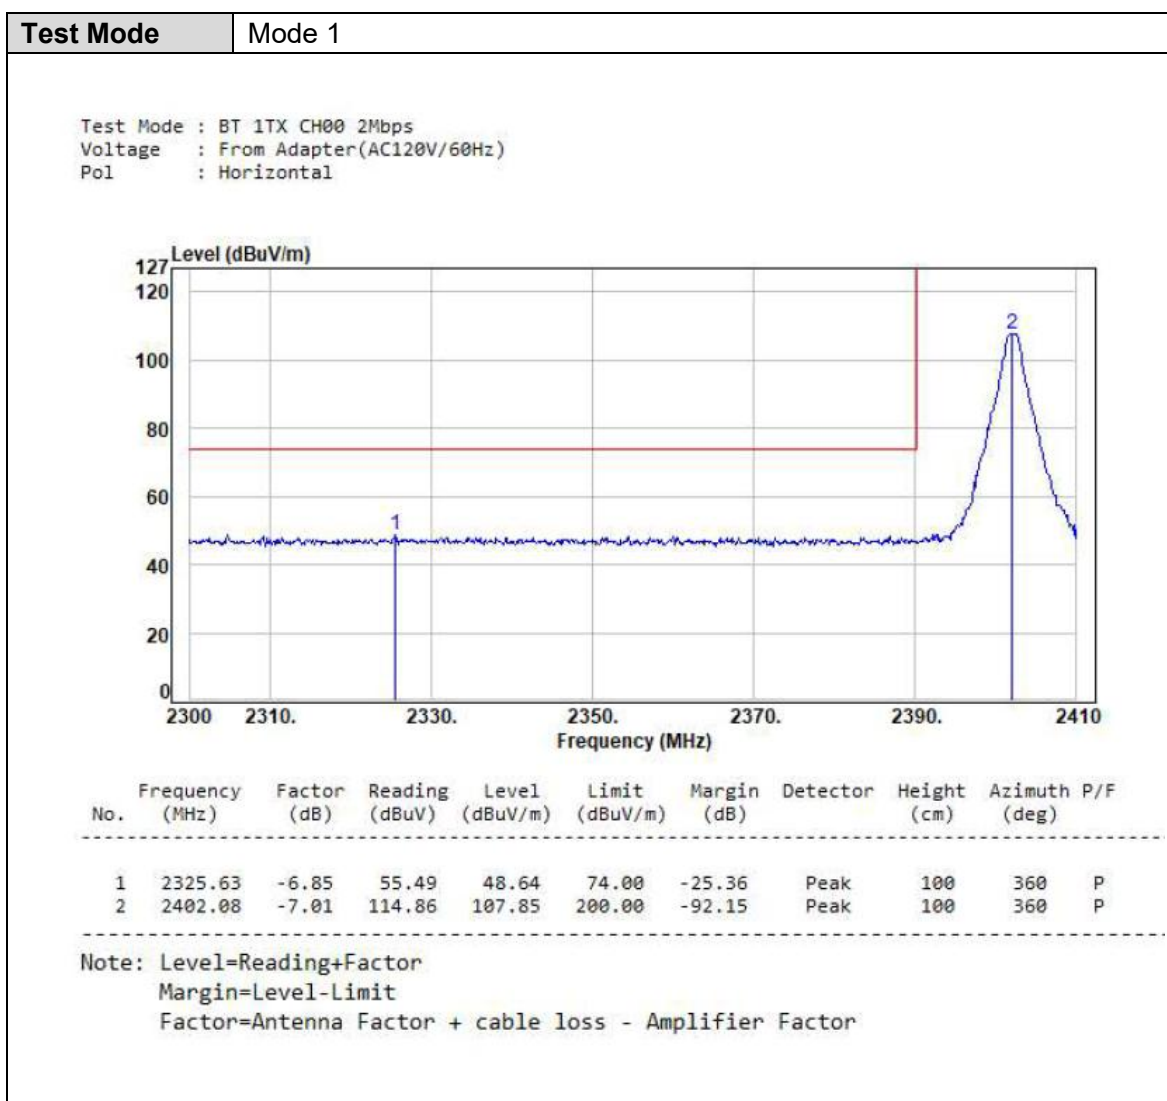


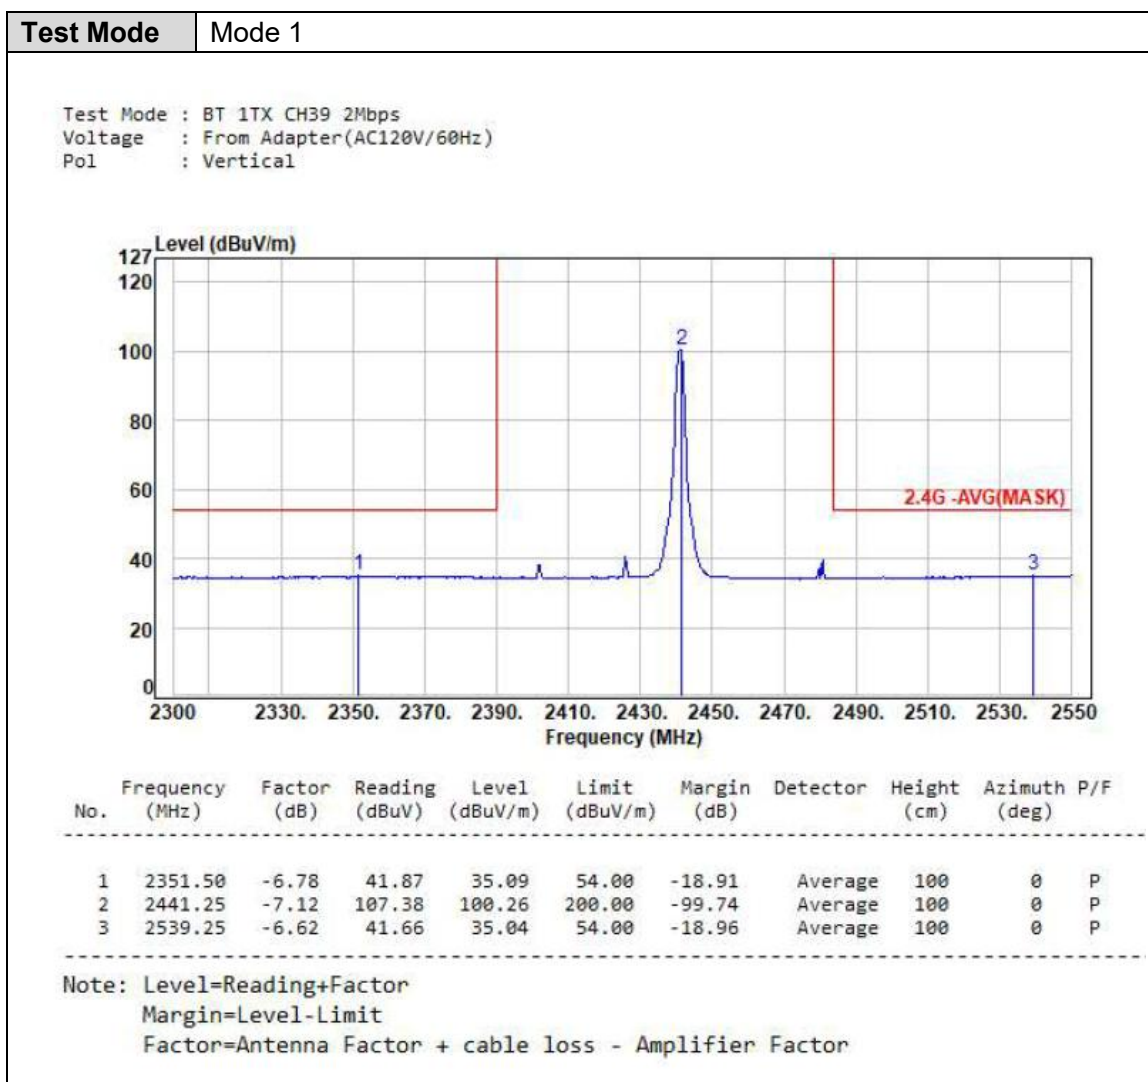


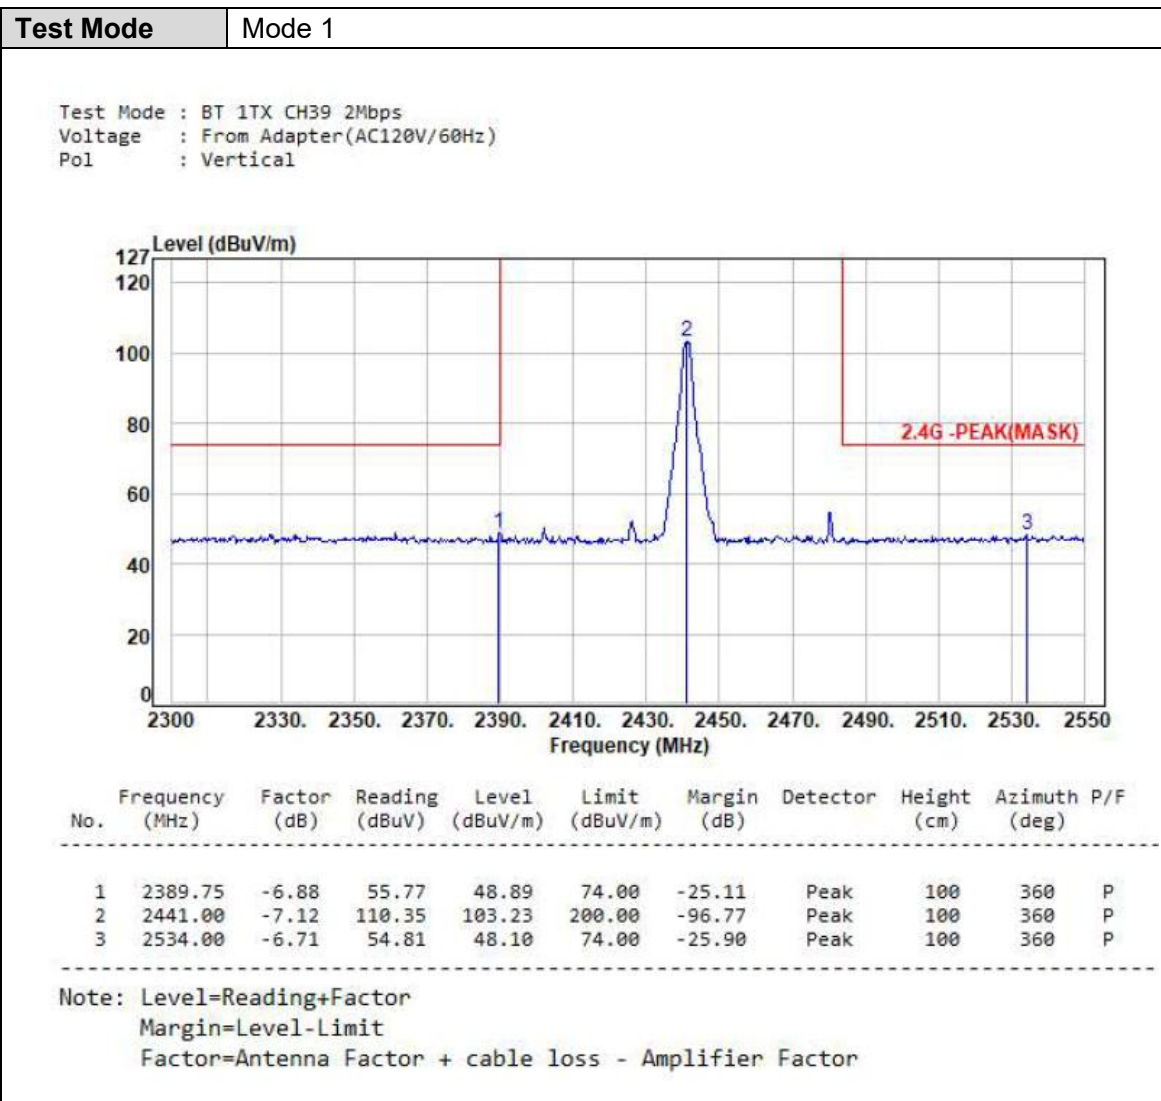


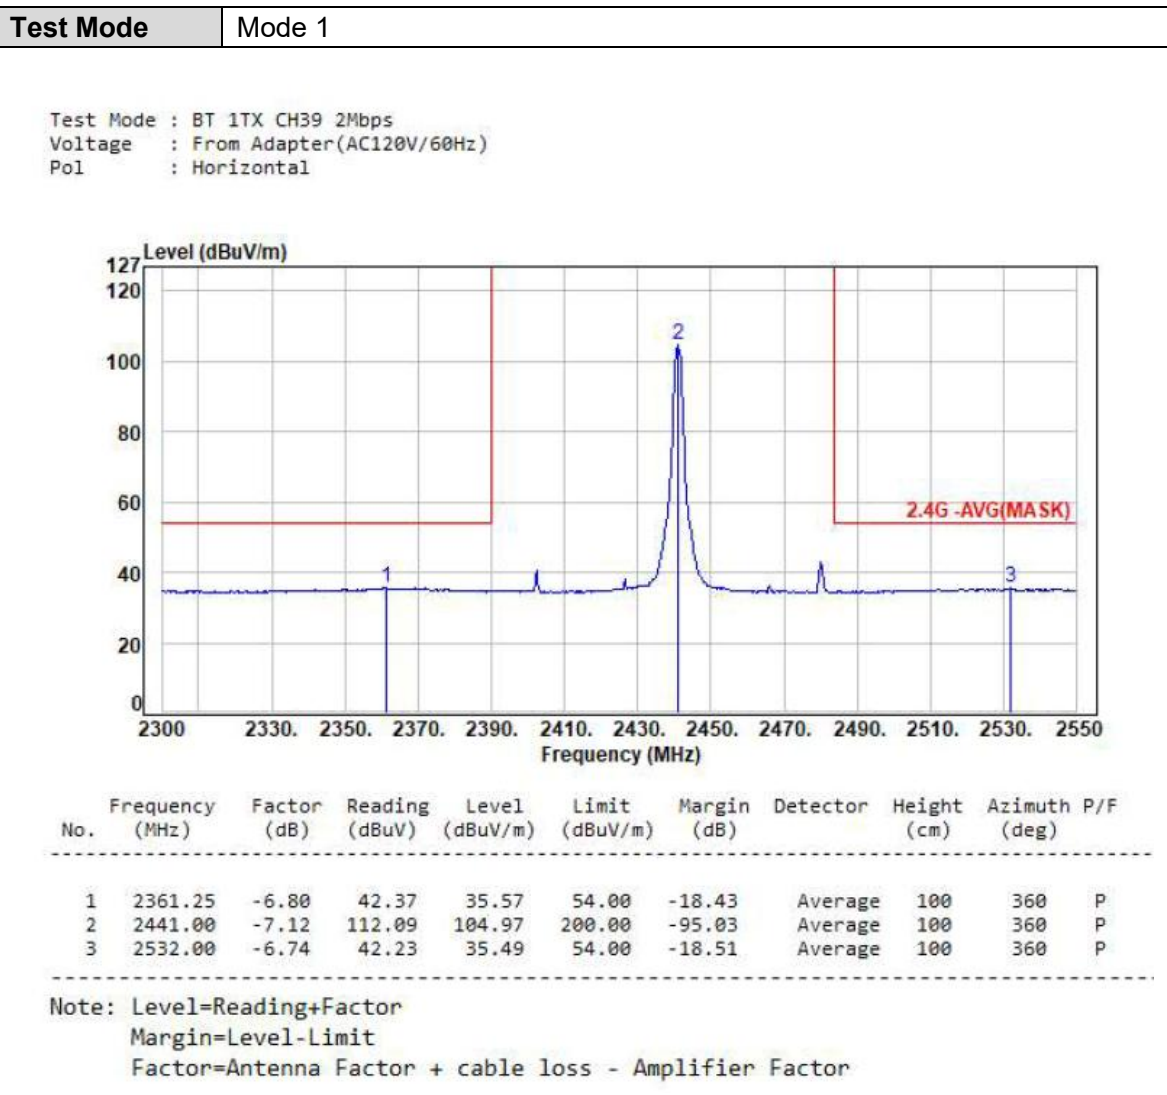


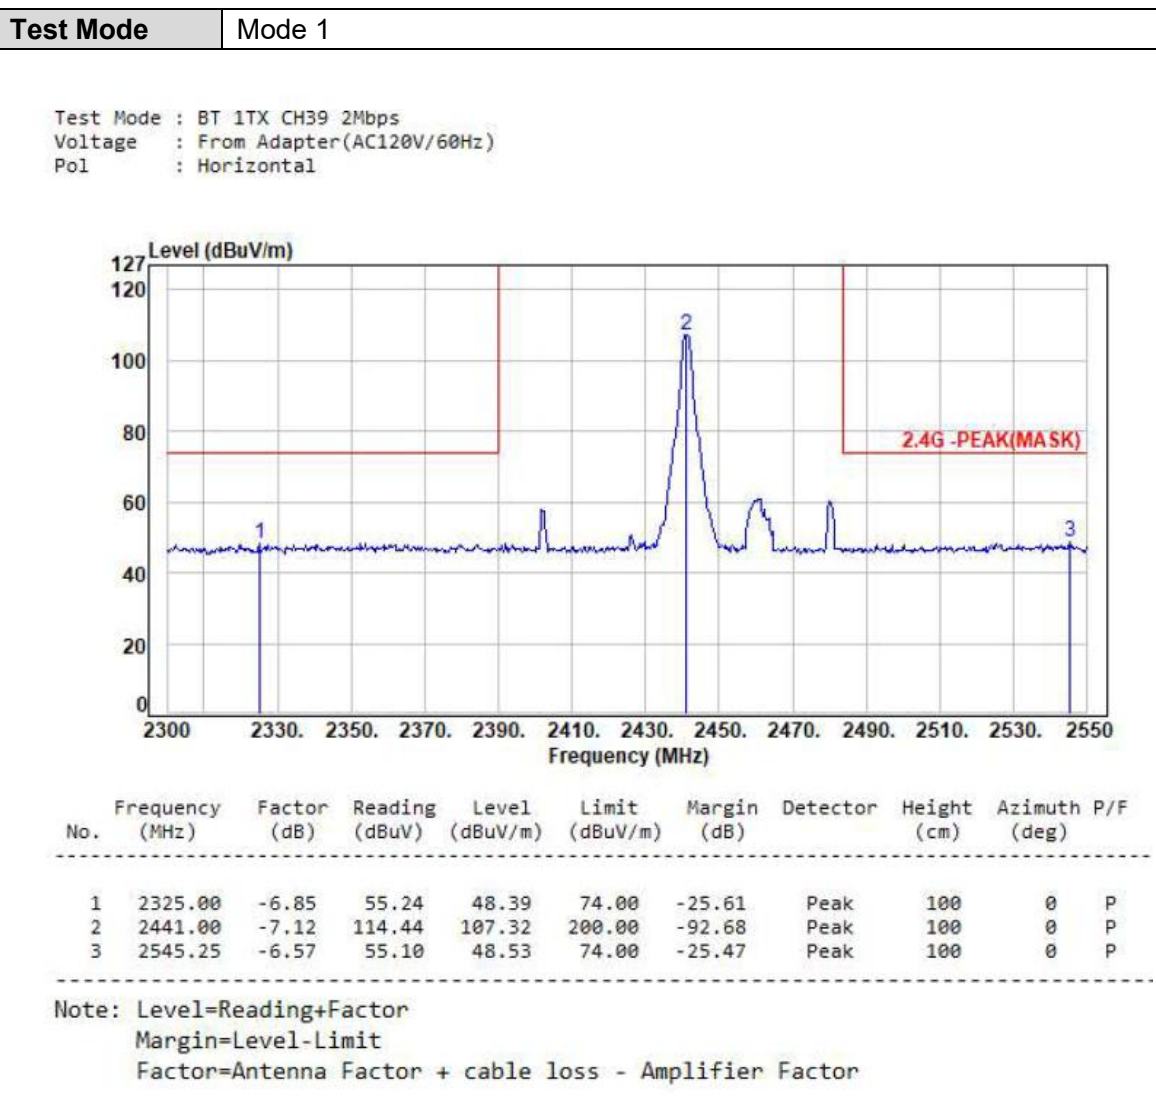


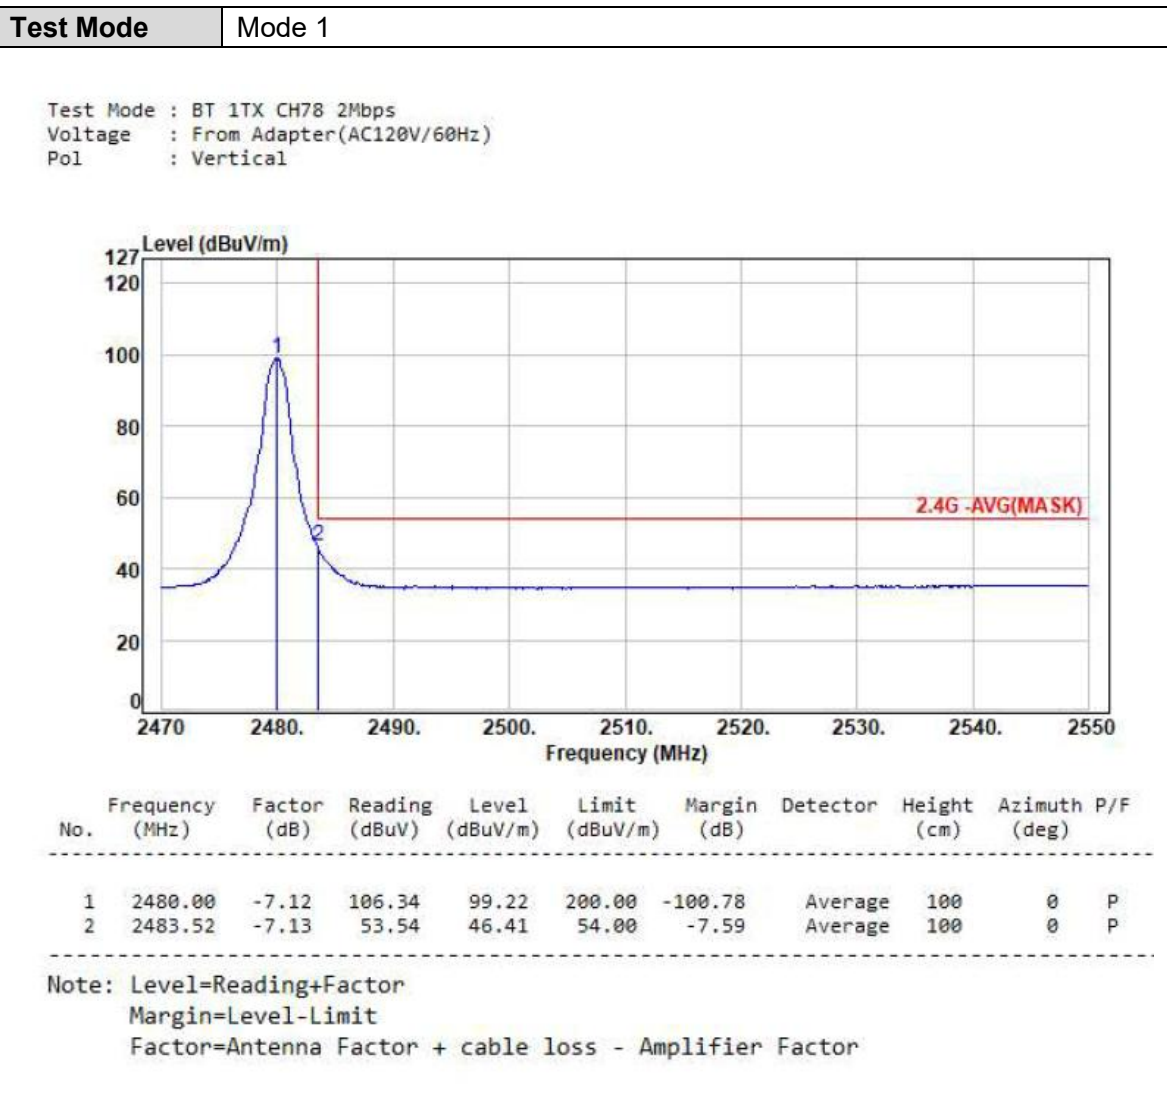


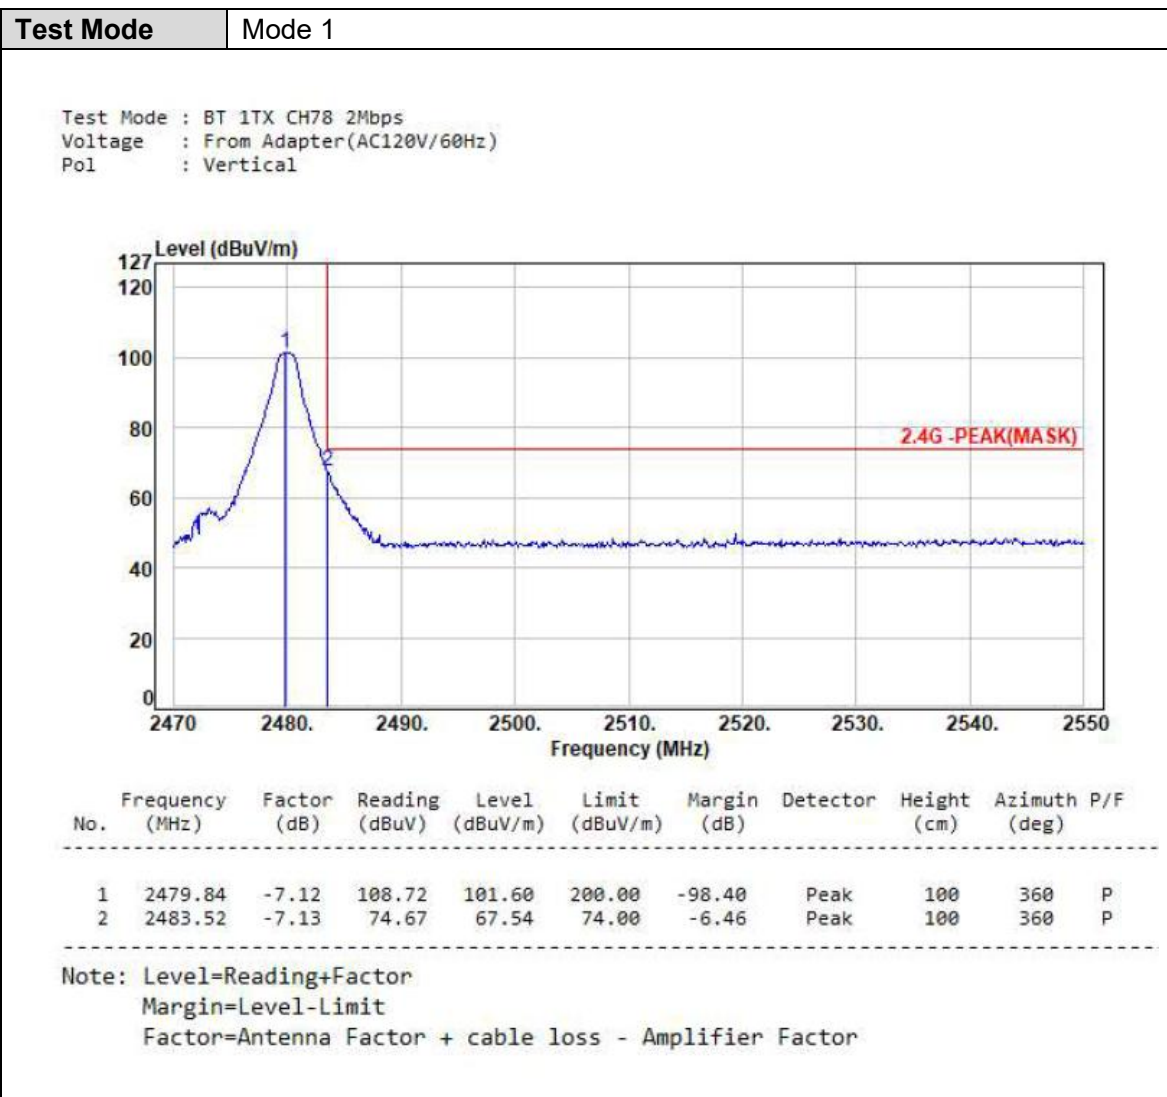


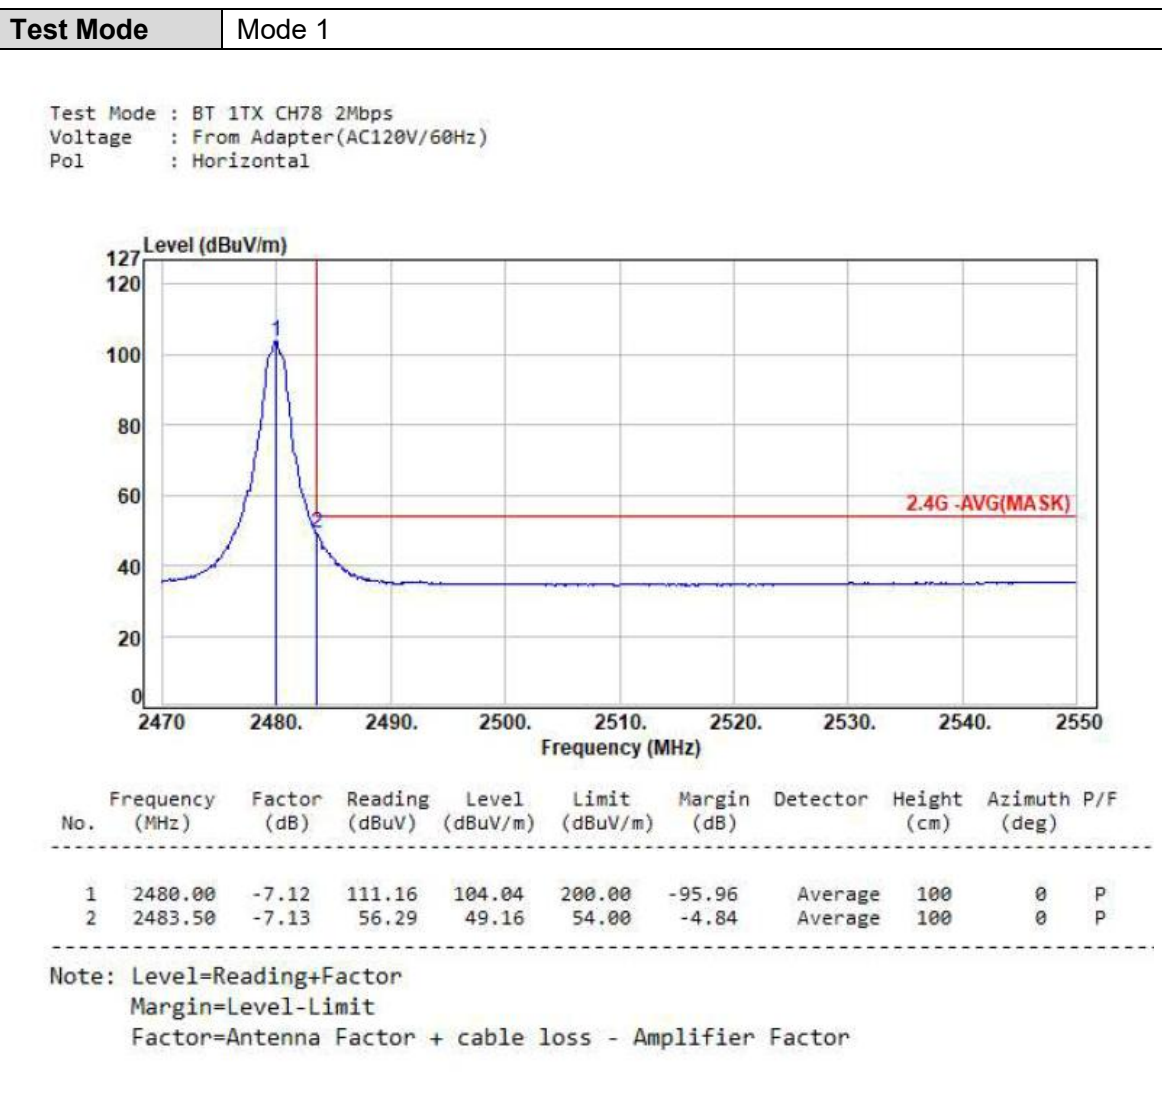


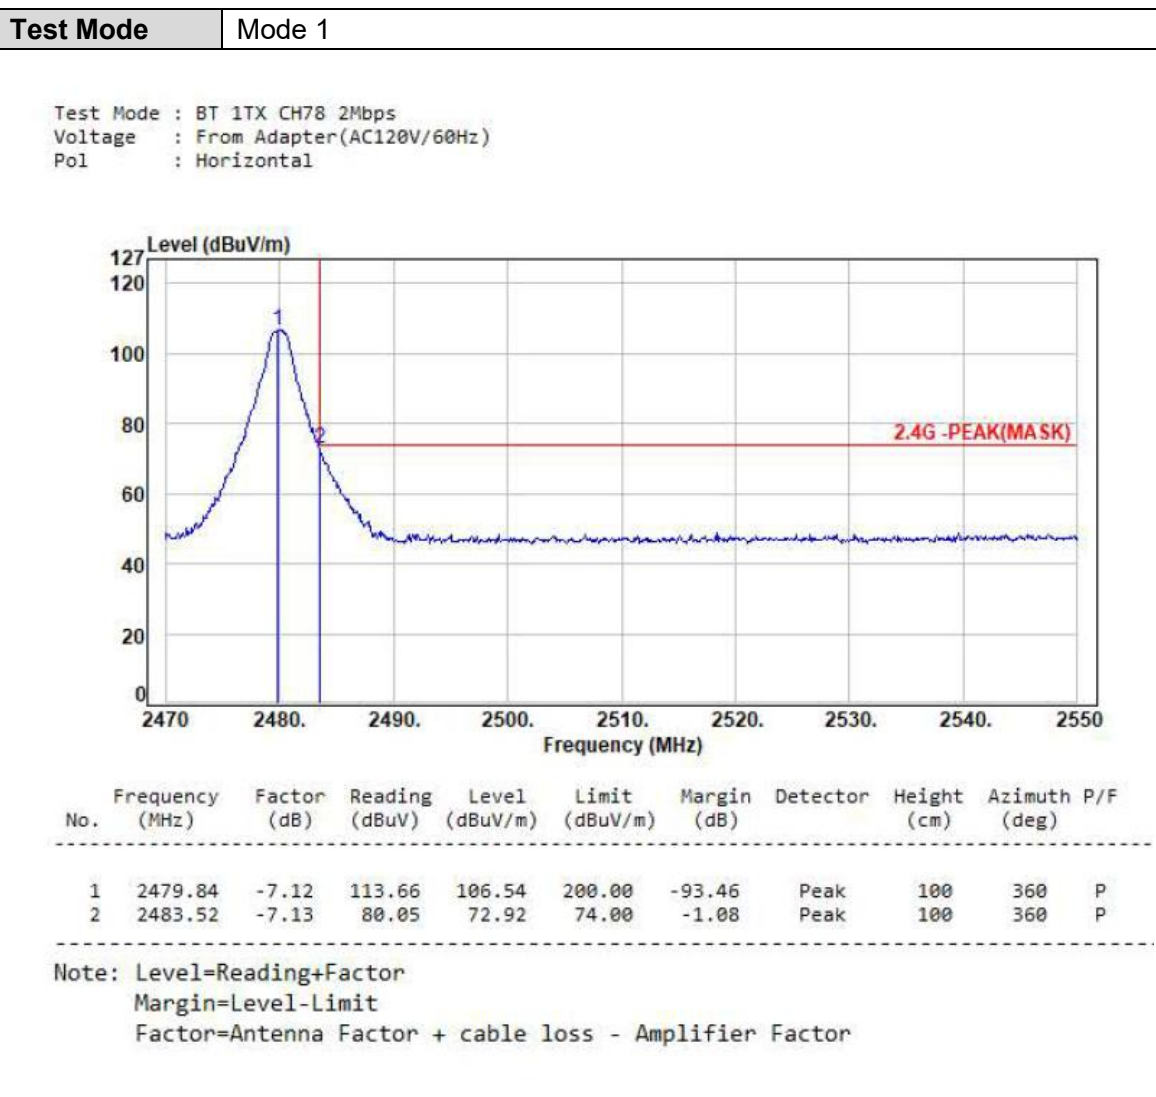


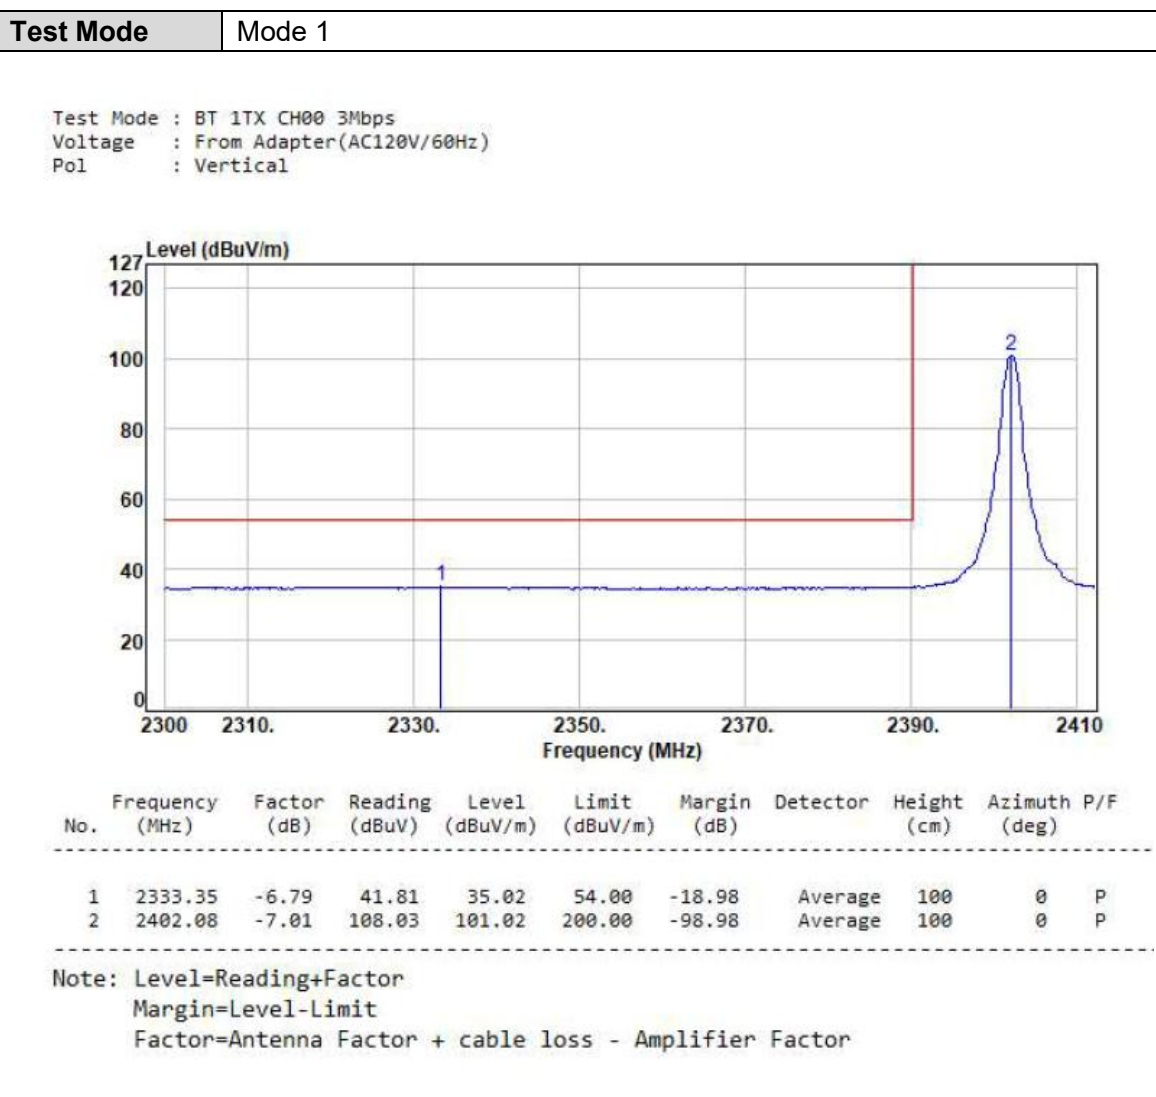


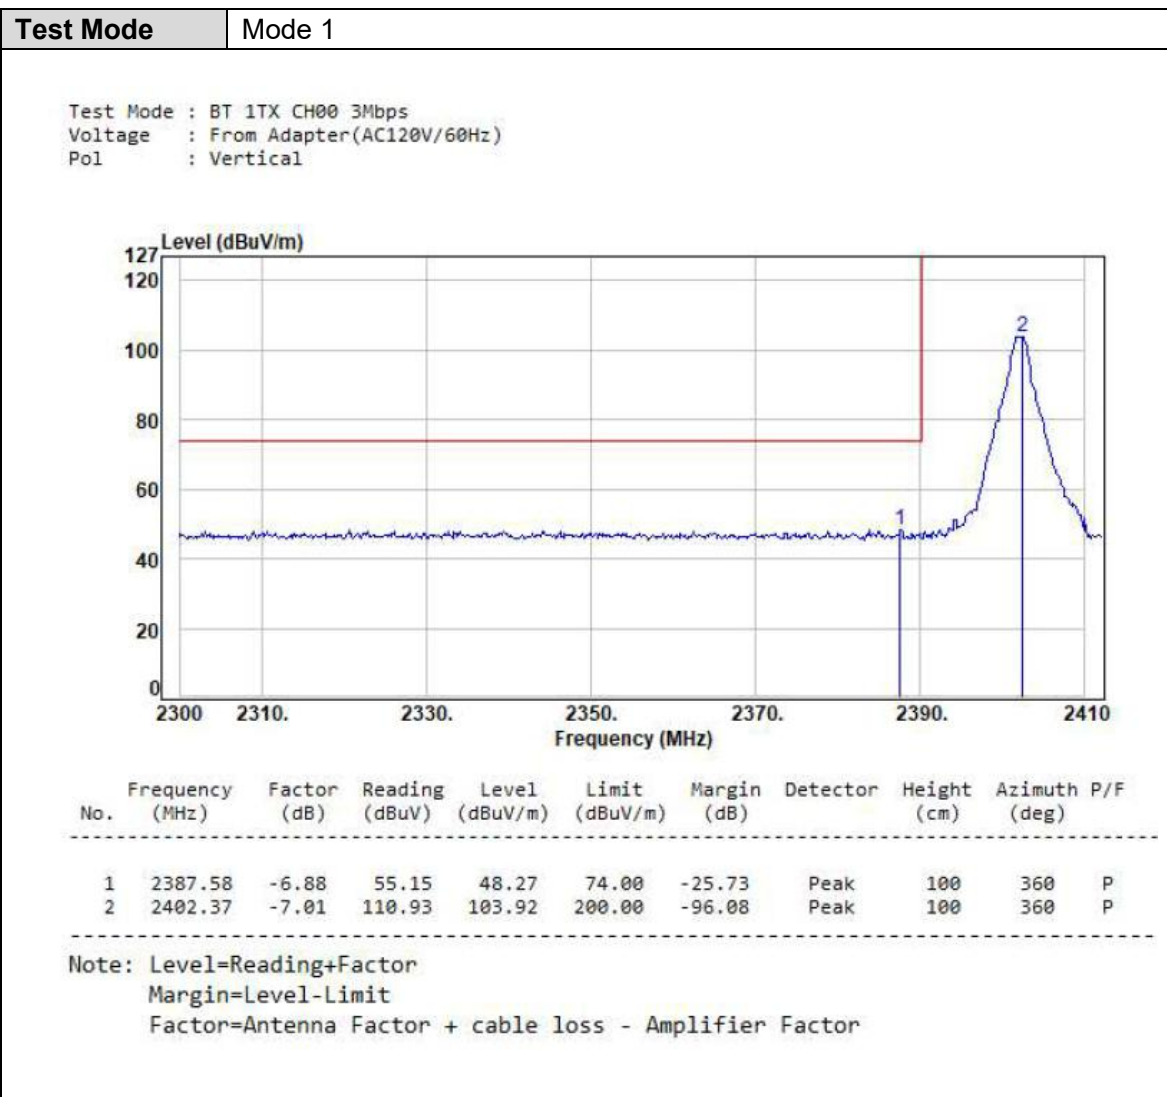


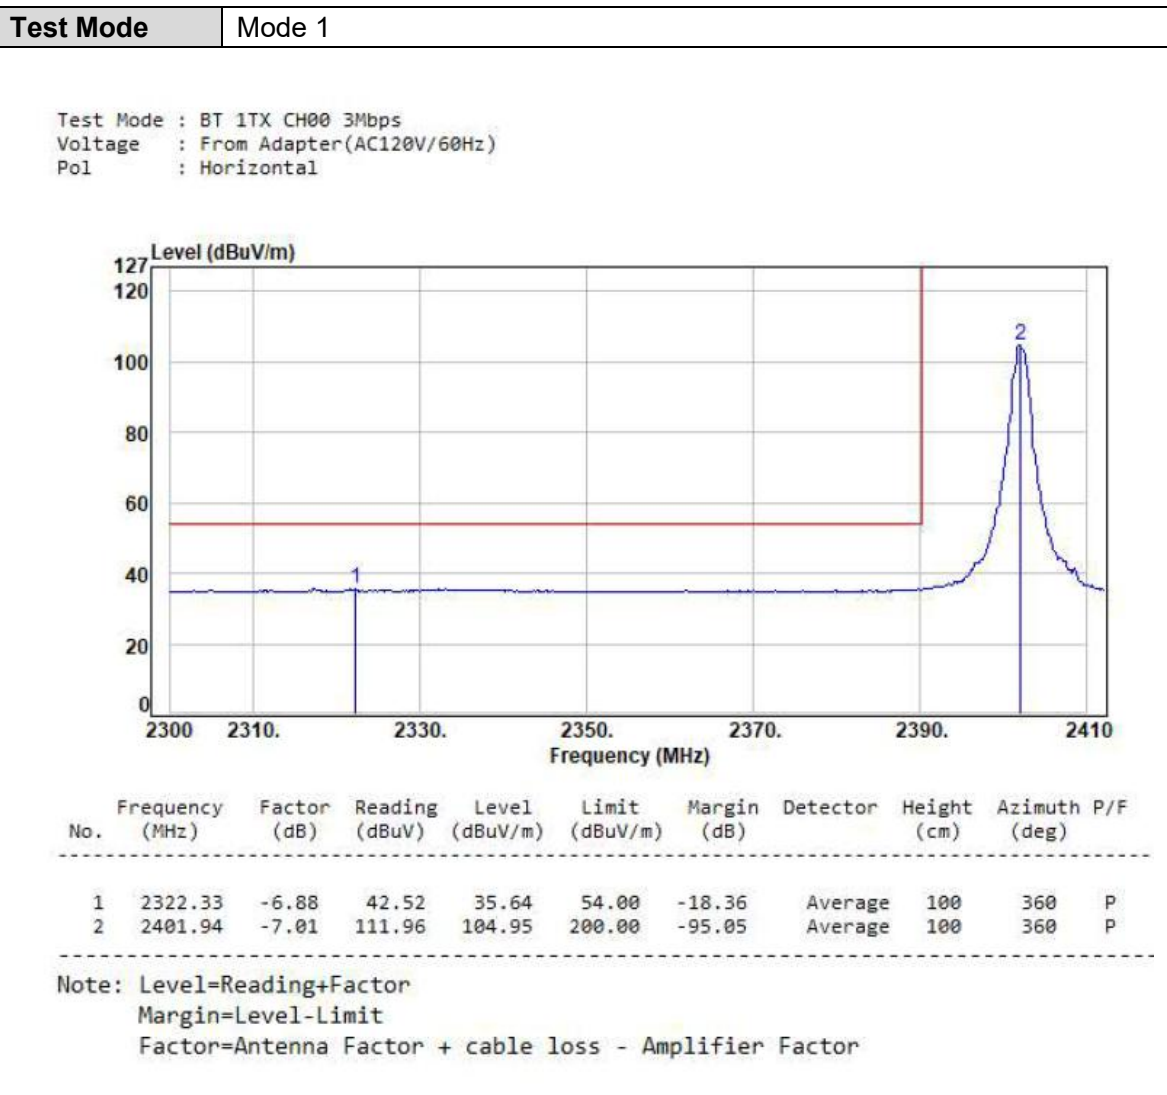


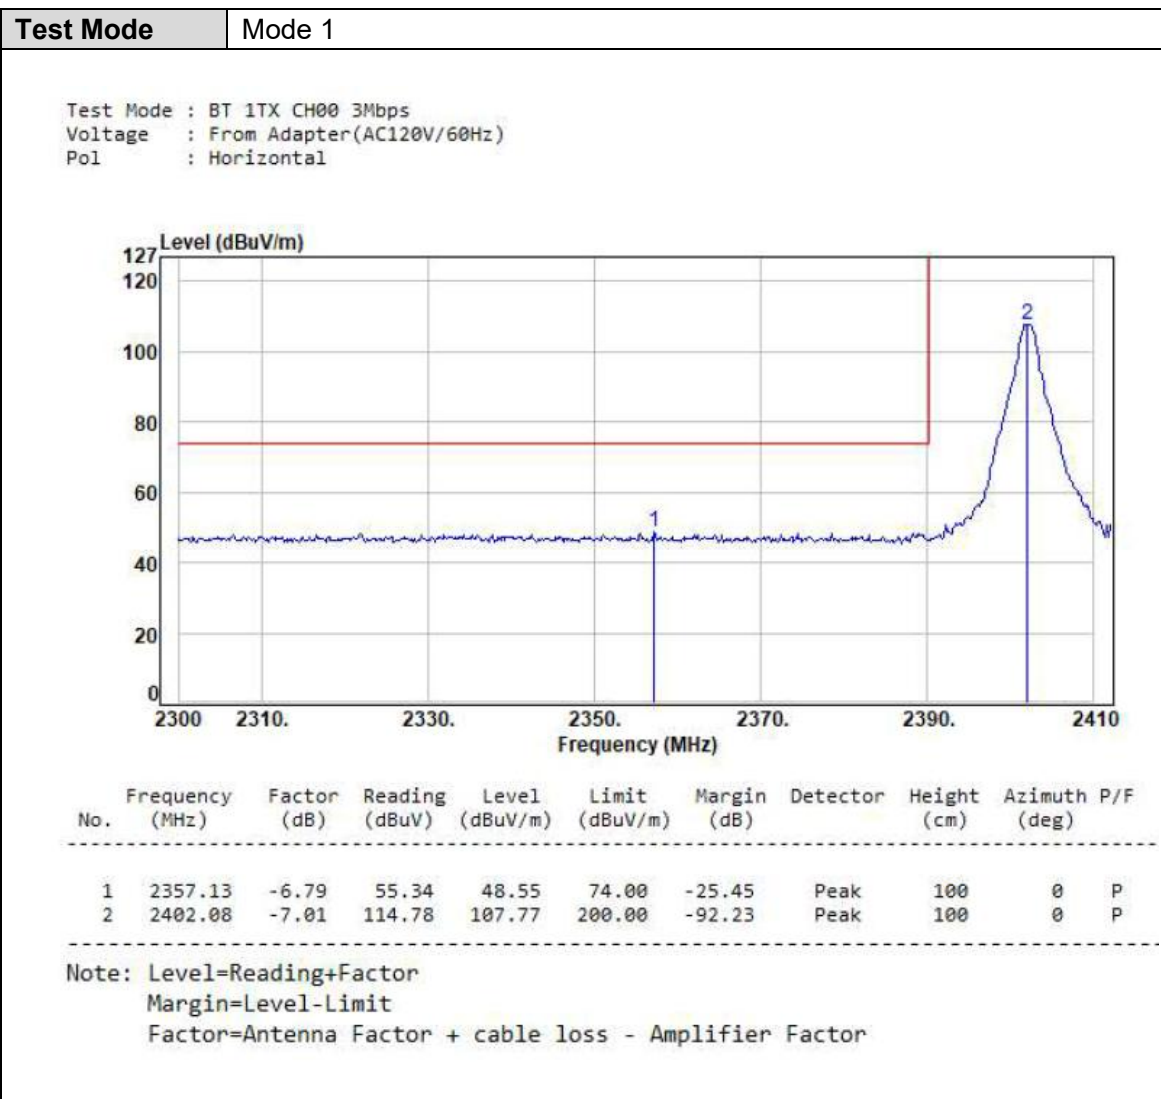


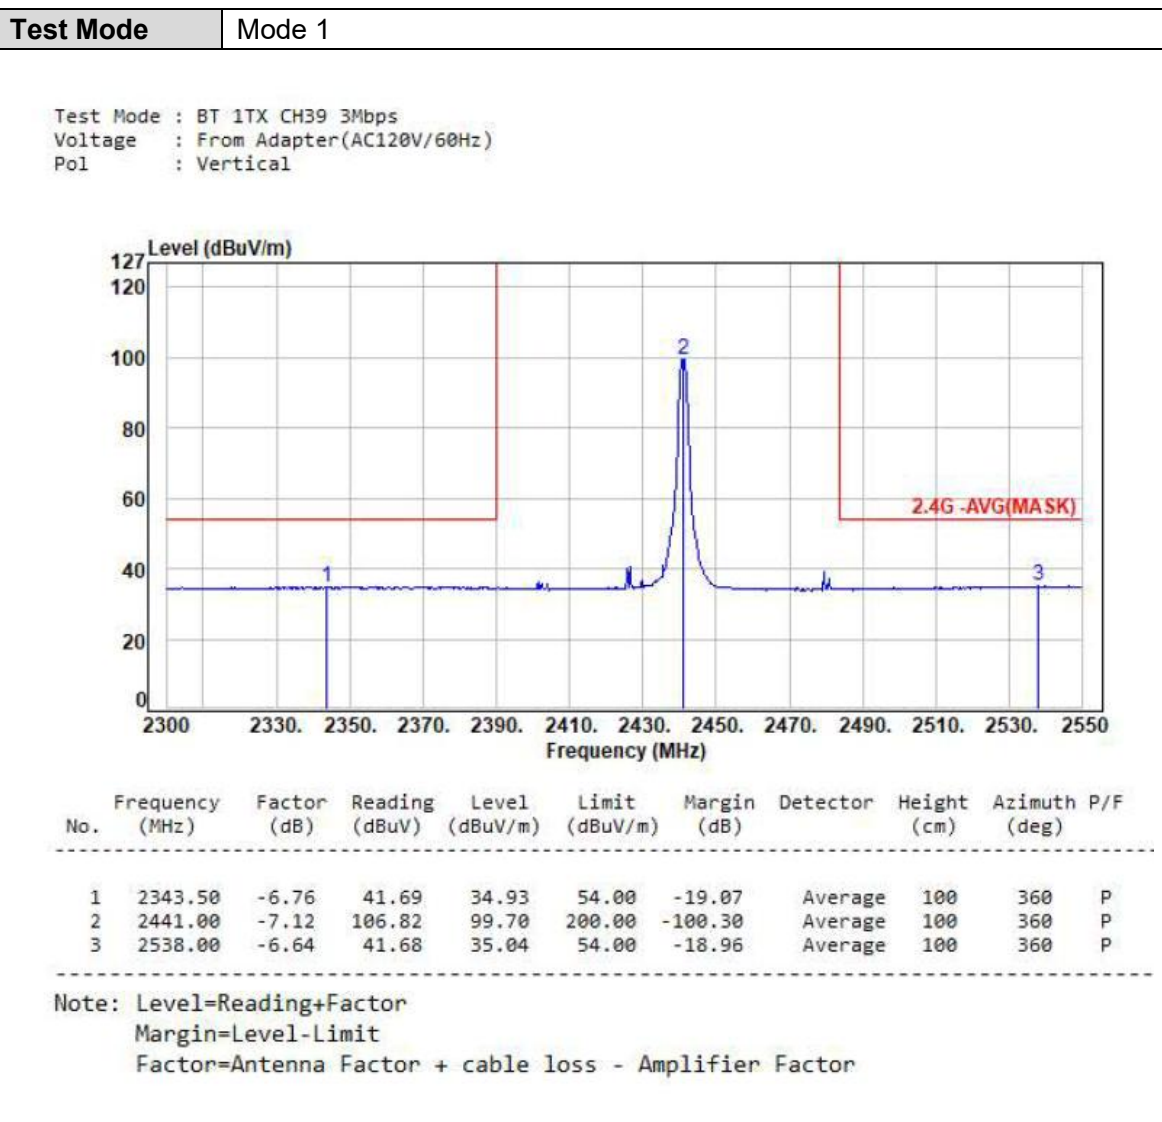


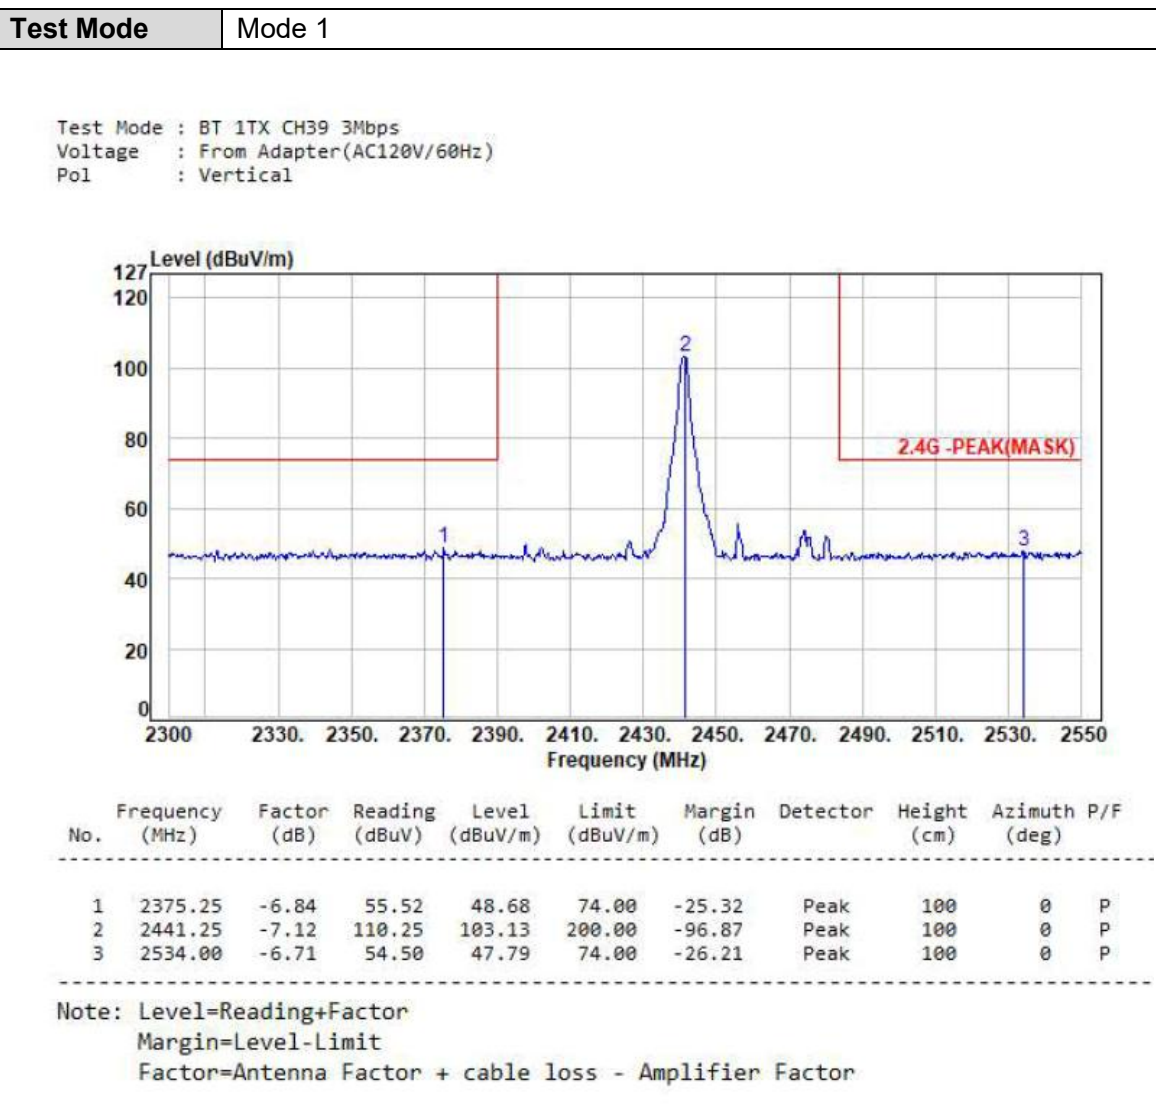


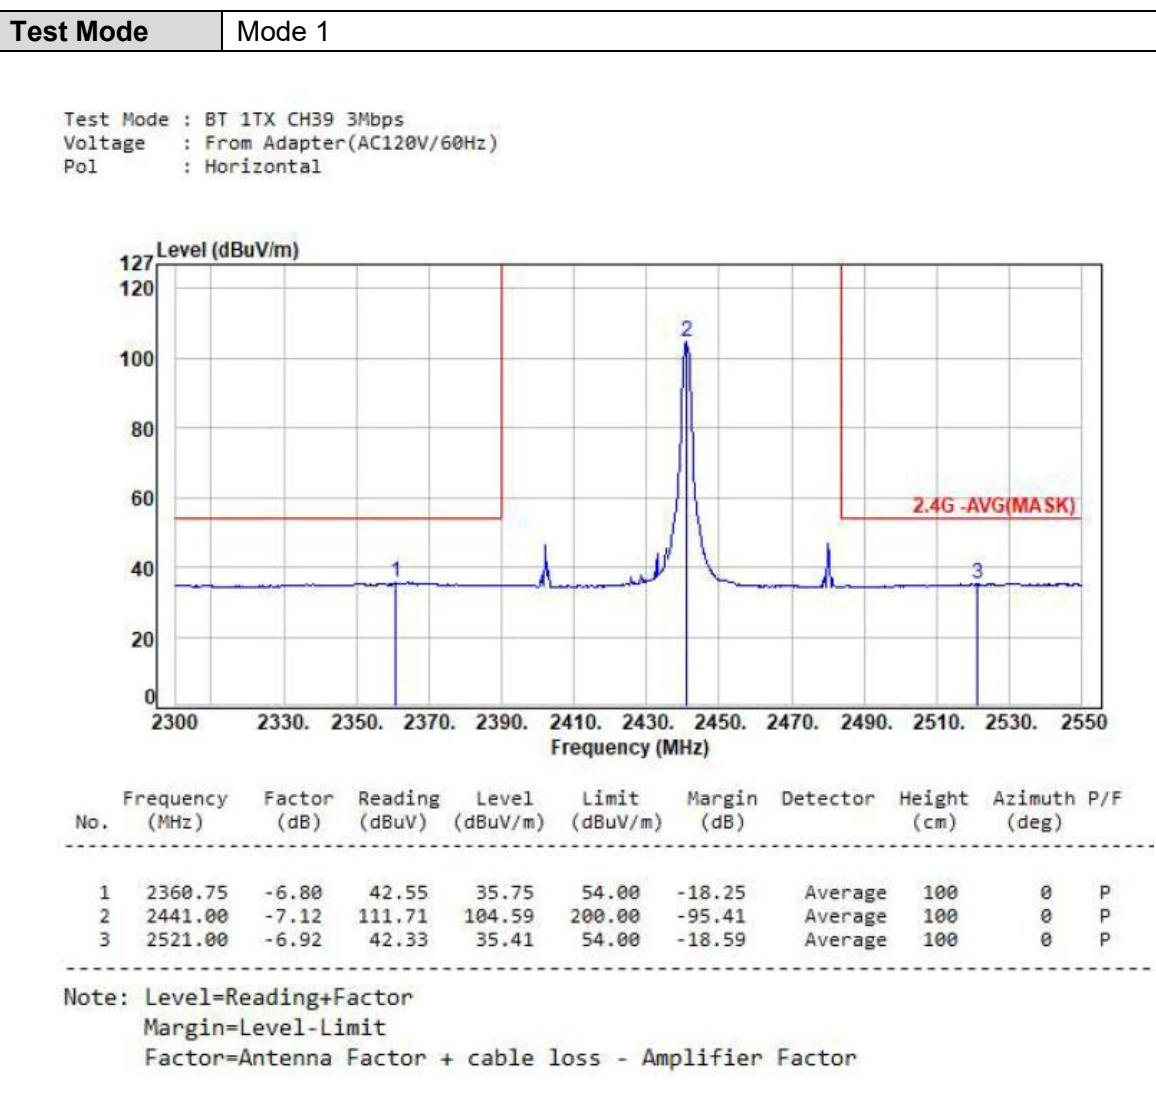


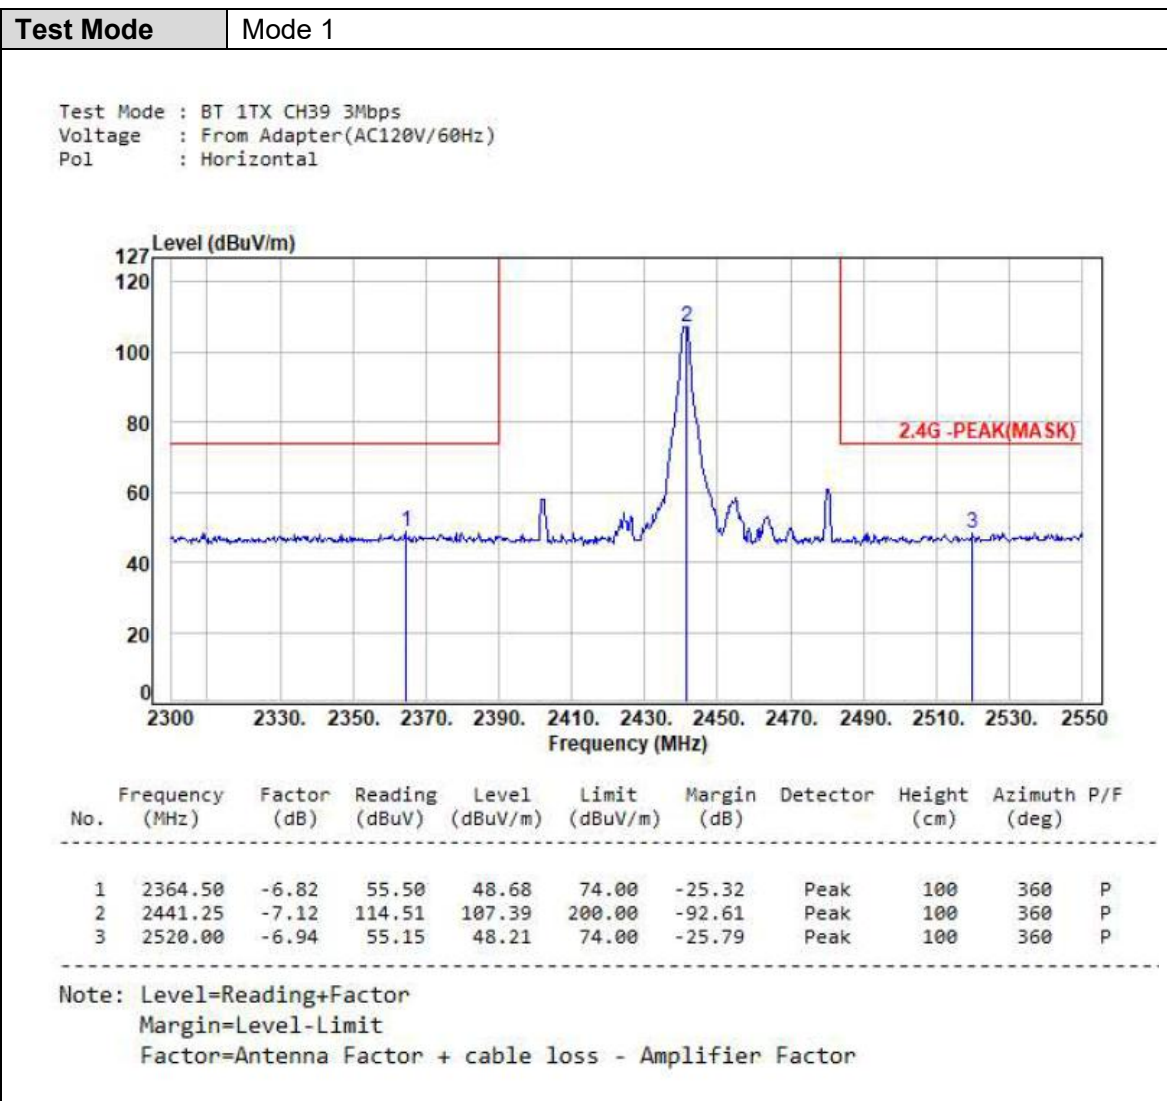

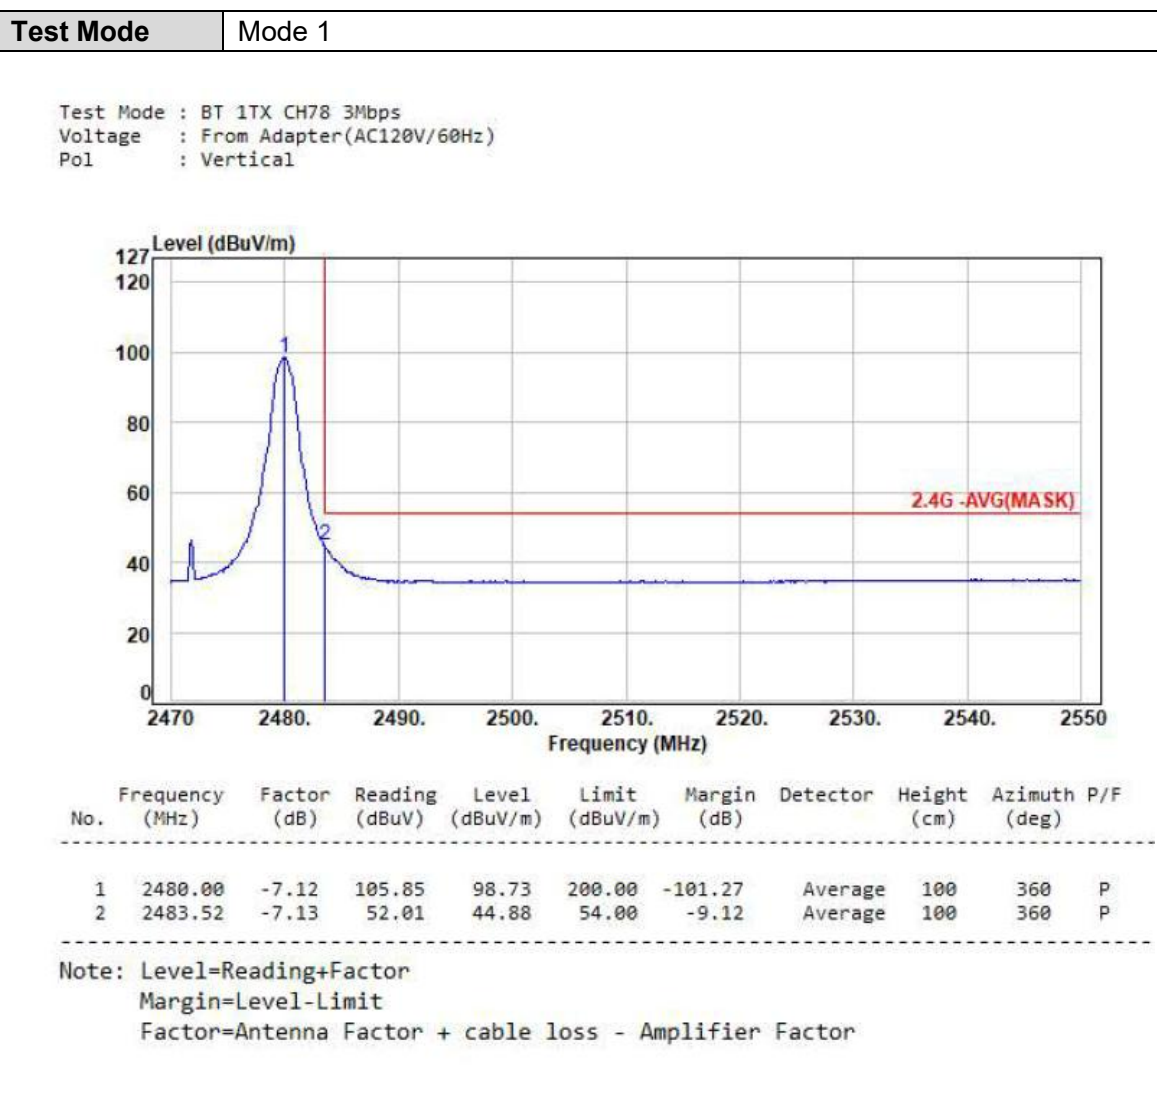

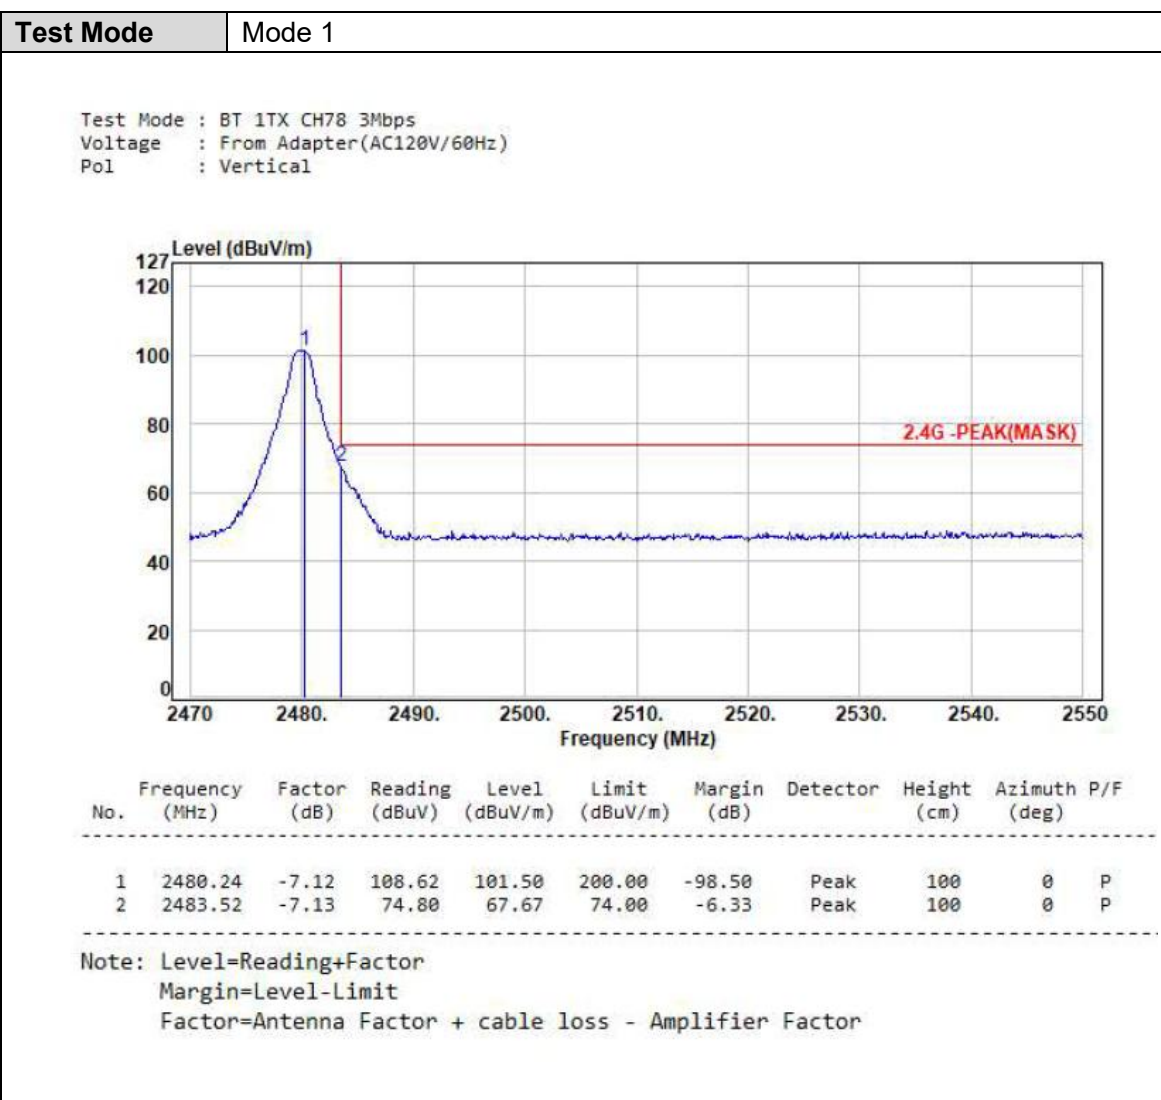

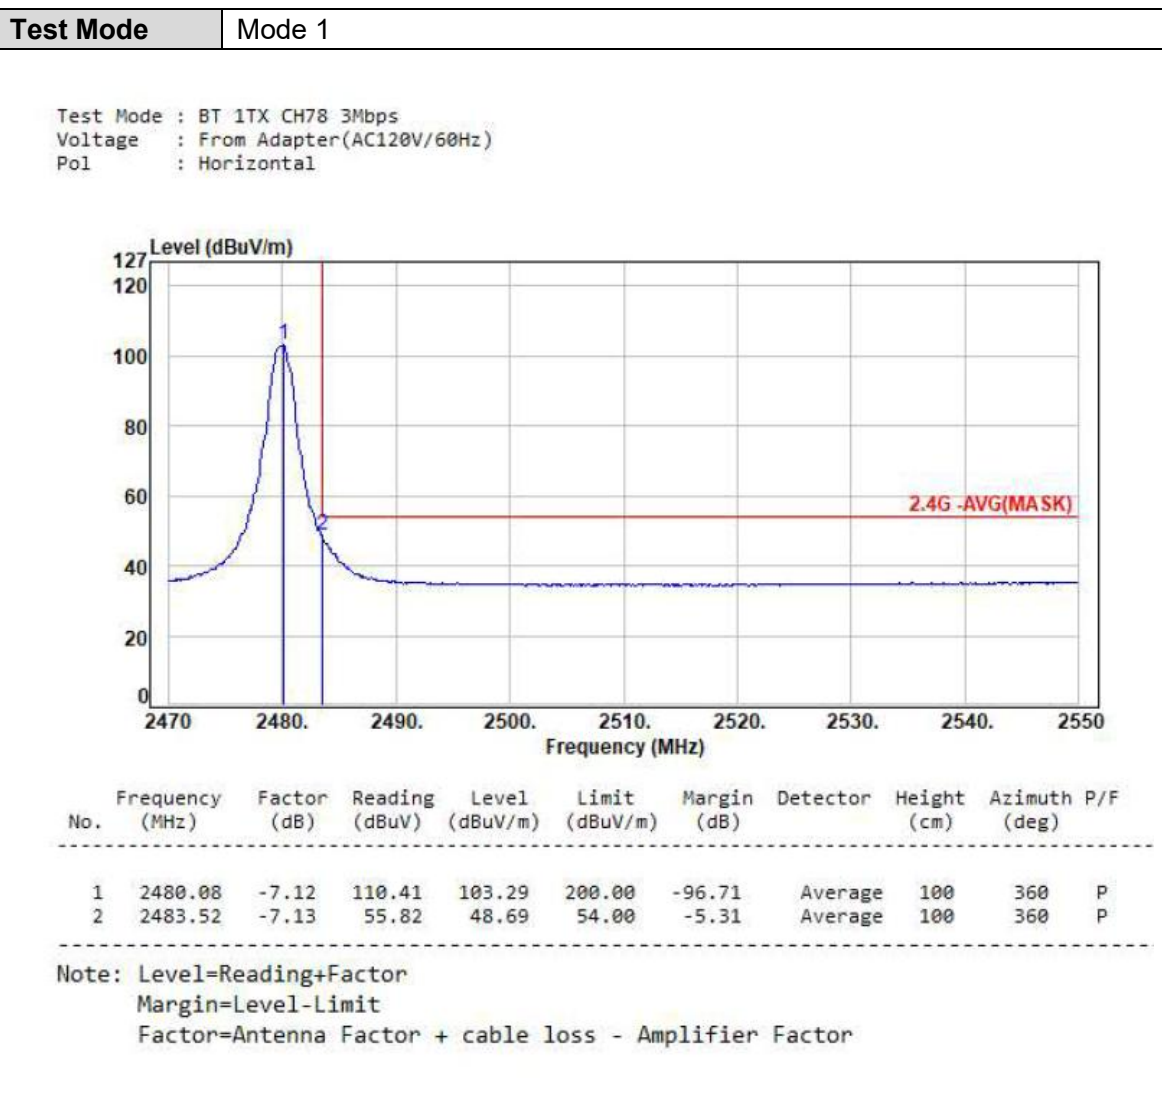

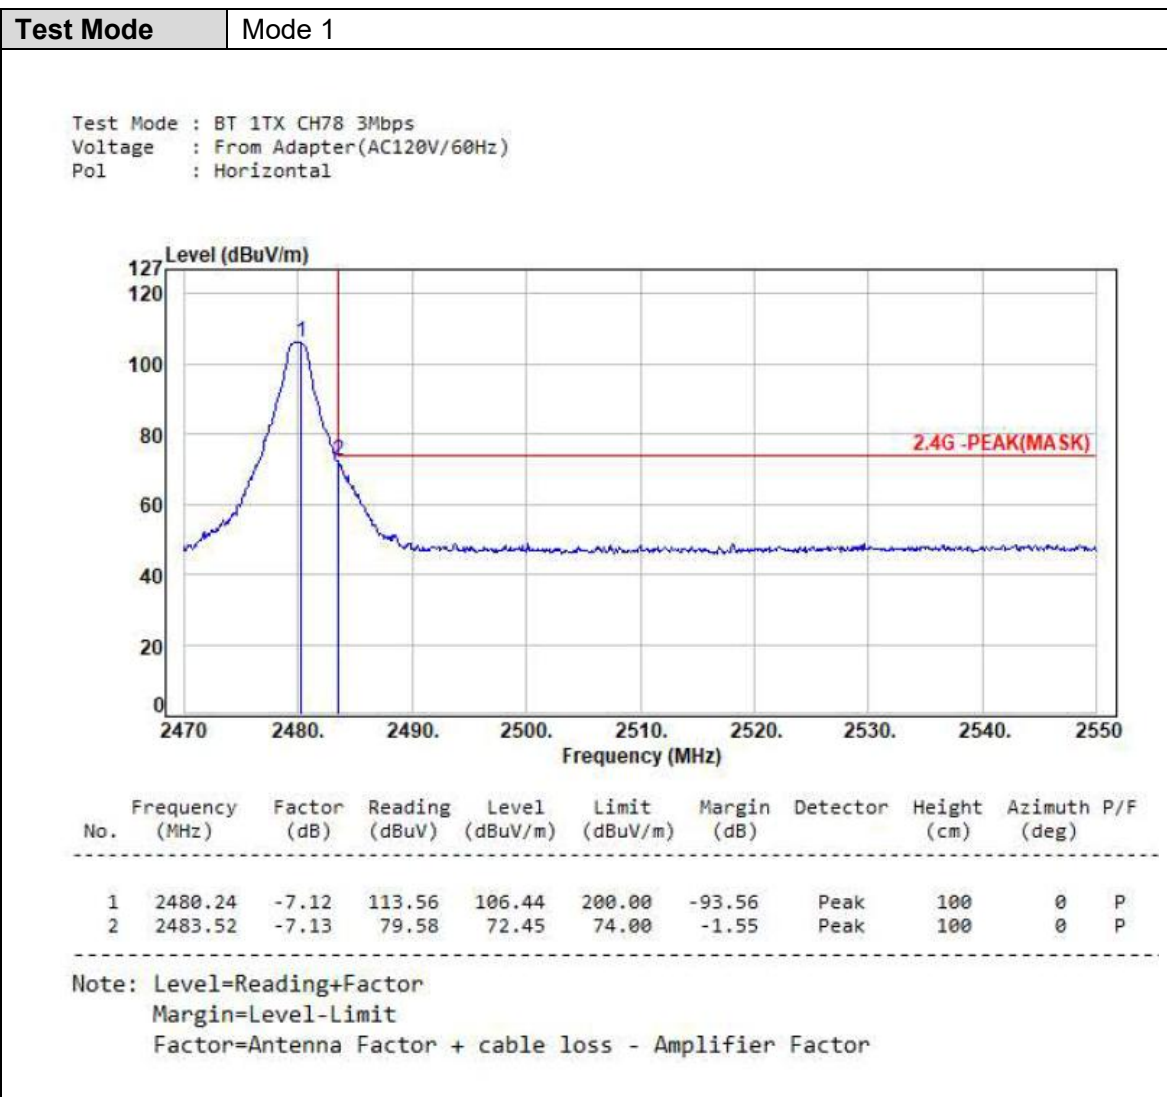



7.7 Test Result and Data (1GHz ~ 3GHz)

