



FCC RADIO TEST REPORT

Applicant : GN Audio USA Inc.

Address : 900 Chelmsford Street, Tower II, 8th Floor, Lowell,
MA 01851, USA

Equipment : Charging Stand

Model No. : GC10TX


Trade Name : 

FCC ID. : ZHK-GC10TX

I HEREBY CERTIFY THAT :

The sample was received on Apr. 09, 2025 and the testing was completed on Jun. 15, 2026 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

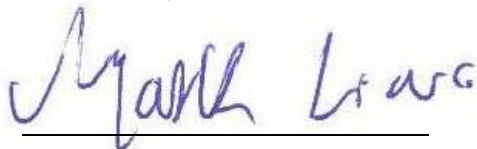

Mark Liao / Supervisor

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory





CONTENTS

1. Summary of Test Procedure and Test Results	5
1.1 Applicable Standards	5
2. Test Configuration of Equipment under Test	6
2.1 Feature of Equipment under Test	6
2.2 Carrier Frequency of Channels	6
2.3 Test Mode and Test Software	8
2.4 Description of Test System	8
2.5 General Information of Test	9
2.6 Measurement Uncertainty	9
3. Test Equipment and Ancillaries Used for Tests	10
4. Antenna Requirements	13
4.1 Standard Applicable	13
4.2 Antenna Construction and Directional Gain	13
5. Test of AC Power Line Conducted Emission	14
5.1 Test Limit	14
5.2 Test Procedures	14
5.3 Typical Test Setup	15
5.4 Test Result and Data	16
5.5 Test Photographs	18
6. Test of Spurious Emission (Radiated)	19
6.1 Test Limit	19
6.2 Test Procedures	20
6.3 Typical Test Setup	21
6.4 Test Result and Data (9kHz ~ 30MHz)	22
6.5 Test Result and Data (30MHz ~ 1GHz)	22
6.6 Test Result and Data (Bandedge)	24
6.7 Test Result and Data (1GHz ~ 3GHz)	48
6.8 Test Result and Data (3GHz ~ 18GHz)	72
6.9 Test Result and Data (18GHz ~ 25GHz)	96
6.10 Restricted Bands of Operation	100
6.11 Test Photographs (30MHz ~ 1GHz)	101
6.12 Test Photographs (1GHz ~ 25GHz)	102
7. Test of Spurious Emission (Conducted)	104
7.1 Test Limit	104
7.2 Test Procedure	104
7.3 Test Setup Layout	104
7.4 Test Result and Data	104
8. On Time, Duty Cycle and Measurement methods	109
8.1 Test Limit	109
8.2 Test Procedure	109
8.3 Test Setup Layout	109



8.4	Test Result and Data	109
9.	6dB Bandwidth Measurement Data	110
9.1	Test Limit	110
9.2	Test Procedures	110
9.3	Test Setup Layout	110
9.4	Test Result and Data	110
10.	Maximum Average Output Power	112
10.1	Test Limit	112
10.2	Test Procedures	112
10.3	Test Setup Layout	112
10.4	Test Result and Data	112
11.	Power Spectral Density	114
11.1	Test Limit	114
11.2	Test Procedures	114
11.3	Test Setup Layout	114
11.4	Test Result and Data	114



History of this test report

Report No.	Issued Date	Description
25030112-TRFCC05	May 22, 2026	Original
25030112-TRFCC05-A	Jun. 16, 2026	Model No. GC10TX has black and white color sample. To ensure consistency, the black sample was used to retest the AC Power line conducted emission and Radiation Emission (30MHz-1GHz).



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024

FCC Rules and Regulations Part 15 Subpart C §15.247

FCC Rule	Description of Test	Result
15.203	Antenna Requirement	PASS
15.207	AC Power Line Conducted Emission	PASS
15.209 15.205	Radiated Spurious Emission	PASS
15.247(d)	Conducted Spurious Emission	PASS
15.247(a)(2)	6dB Bandwidth	PASS
15.247(b)	Maximum Output Power	PASS
15.247(e)	Power Spectral Density	PASS

*The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement, measurement uncertainty evaluation is not considered.



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Operation Frequency Range	2400MHz-2483.5MHz
Center Frequency Range	SRD(FHSS): 2402MHz-2480MHz SRD(DTS): 2402MHz-2480MHz For GFSK 1Mbps SRD(DTS): 2404MHz-2478MHz For GFSK 2Mbps
Modulation Type	SRD(FHSS): GFSK, $\pi/4$ -DQPSK, 8DPSK SRD(DTS): GFSK
Modulation Technology	FHSS, DTS
Data Rate	SRD(FHSS): GFSK: 1Mbps, $\pi/4$ -DQPSK: 2Mbps, 8DPSK: 3Mbps SRD(DTS): GFSK: 1Mbps GFSK: 2Mbps
Antenna Type	L shape Antenna
Antenna Gain	1.8 dBi

Note:

1. This is SRD(DTS) Report.
2. For more details, please refer to the User's manual of the EUT.

2.2 Carrier Frequency of Channels

GFSK(1Mbps)

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
*00	2402	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	*19	2440	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	*39	2480
12	2426	26	2454	--	--
13	2428	27	2456	--	--

Note: Channels remarked * are selected to perform test.



GFSK(2Mbps)

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
*01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	*19	2440	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	*38	2478
11	2424	25	2452	--	--
12	2426	26	2454	--	--
13	2428	27	2456	--	--
14	2430	28	2458	--	--

Note: Channels remarked * are selected to perform test.

(For Above 1GHz)

Below test Channel generated the worst case, they were reported as the final data.

Bluetooth	Channel	Frequency (MHz)	Bandedge		1GHz ~ 3GHz		3GHz ~ 18GHz		18GHz ~ 25GHz	
			Ver PK/AV	Hor PK/AV	Ver PK/AV	Hor PK/AV	Ver PK/AV	Hor PK/AV	Ver PK/AV	Hor PK/AV
SRD 1M	0	2402	V	V	V	V	V	V	--	--
	19	2440	V	V	V	V	V	V	--	--
	39	2480	V	V	V	V	V	V	--	--
SRD 2M	1	2404	V	V	V	V	V	V	V	V
	19	2440	V	V	V	V	V	V	--	--
	38	2478	V	V	V	V	V	V	--	--



2.3 Test Mode and Test Software

- During testing, the interface cables and equipment positions were varied according to ANSI C63.10.
- An executive program, "Bluetooth RF Test Tool Ver.: 5.4.0.5" under Windows 10 system was executed to transmit and receive data via SRD.
- The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode 1	TX Mode, Power from Adapter (AC 120V/60Hz)
Test Mode 2	TX Mode, Power from Adapter (AC 240V/60Hz)
caused "Test Mode 1" generated the worst case, it was reported as the final data.	
Radiation Emissions (30MHz ~ 1GHz)	
Test Mode 1	TX Mode, Power from Adapter (AC 120V/60Hz)
Radiation Emissions (1GHz ~ 25GHz)	
Test Mode 1	TX Mode, Power from Adapter (AC 120V/60Hz)

Modulation Type	TX CONFIGURATION
GFSK (1Mbps)	1TX
GFSK (2Mbps)	1TX

2.4 Description of Test System

RF Conducted				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	lenovo	S1GL2W	N/A	N/A
Test Fixture	YD-TECH	MCS-73 LV	N/A	N/A

Radiated Emissions				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	AUAS	P2430U	N/A	Adapter / 1.8m / NS
Adapter	hoda	TC-03	N/A	N/A
Test Fixture	YD-TECH	MCS-73 LV	N/A	N/A
USB Cable (A to B)	iMAX	BUSB3100AMA	1.5m / NS	N/A

AC Power Line Conducted Emission				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	AUAS	P2430U	N/A	Adapter / 1.8m / NS
Adapter	hoda	TC-03	N/A	N/A
Test Fixture	YD-TECH	MCS-73 LV	N/A	N/A



2.5 General Information of Test

Organization	Cerpass Technology Corp.		
☒ Test Site	Cerpass Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel: +886-3-3226-888 Fax: +886-3-3226-881		
	FCC	TW1439, TW1079	
	ISED Company Number	4934E	
	ISED CAB identifier	TW1439	
Frequency Range Investigated	Conducted: from 150kHz to 30 MHz Radiation: from 9 kHz to 25,000MHz		
Test Distance	The test distance of radiated emission from antenna to EUT is 3 M.		

Test Item	Test Site	Test period	Environmental Conditions	Tested By
RF Conducted	RFCON02-NK	2026/01/14	25.2°C / 52%	Leon Huang
Radiated Emissions (Above 1G)	3M02-NK	2026/01/17	19.8°C / 53%	Leon Huang
Radiated Emissions (Above 1G)	3M02-NK	2026/01/19	20.2°C / 51%	Leon Huang
Radiated Emissions (Below 1G)	3M02-NK	2026/06/15	23.5°C / 55%	Leon Huang
AC Power Line Conducted Emission	CON02-NK	2026/06/15	23.1°C / 64%	Leon Huang

2.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Item	Uncertainty
AC Power Line Conduction(150kHz~30MHz)	±3.2dB
Radiated Spurious Emission(9kHz~30MHz)	±3.4dB
Radiated Spurious Emission(30MHz~1GHz)	±5.2dB
Radiated Spurious Emission(1GHz~40GHz)	±5.2dB
Conducted Spurious Emission	±2.1dB
6dB Bandwidth	±4.4%
20dB Bandwidth	±4.5%
Occupied Bandwidth	±4.4%
Peak Output Power(Conducted Power Meter)	±1.1dB
Dwell Time / Deactivation Time	±3.5%
Power Spectral Density	±2.0dB
Duty Cycle	±3.5%



3. Test Equipment and Ancillaries Used for Tests

Test Item	Radiated Emissions (Below 1G)				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	VULB 9168-1947	2026/02/10	2027/02/09
Active Loop Antenna	Schwarzbeck	FMZB 1513	00414	2026/02/04	2027/02/03
Double Ridged Guide Horn Antenna	RF SPAN	DRH18-E	210309A18-ES	2025/08/22	2026/08/21
Horn Antenna	RF SPIN	DRH0844	KV2E20A0844	2026/03/26	2027/03/25
EMI Receiver	R&S	ESCI	101423	2025/07/10	2026/07/09
Spectrum Analyzer	R&S	FSV 40-N	102151	2025/08/18	2026/08/17
Preamplifier	EMC INSTRUMENTS	EMC118A45V1SS	981069	2025/12/18	2026/12/17
Preamplifier	EMC INSTRUMENTS	EMC184045SEE	981159	2026/04/02	2027/04/01
Preamplifier	EM Electronics corp.	EM330	60659	2025/12/18	2026/12/17
Cable-4m (9k-3G)	EMEC	RG-223	18274M	2025/07/02	2026/07/01
Cable-1m (30M-1G)	EMC INSTRUMENTS	EMCCFD400-NM-NM-1000	260301	2026/04/10	2027/04/09
Cable-3m (30M-1G)	EMC INSTRUMENTS	EMCCFD400-NM-NM-3000	260302	2026/04/10	2027/04/09
Cable-7m (30M-1G)	EMC INSTRUMENTS	EMCCFD400-NM-NM-7000	260303	2026/04/10	2027/04/09
Cable-8m (10M-26.5G)	HUBER SUHNER	SF126E	587396/126E	2025/10/15	2026/10/14
Cable-3m (10M-26.5G)	HUBER SUHNER	SF126E	587399/126E	2025/10/15	2026/10/14
Cable-1m (1G-26.5G)	HUBER SUHNER	SF126E	589848/126E	2025/10/15	2026/10/14
Cable-1m (1G-40G)	EMC INSTRUMENTS	EMC104HS-KM-KM-1000	260304	2026/04/10	2027/04/09
Cable-3m (1G-40G)	EMC INSTRUMENTS	EMC104HS-KM-KM-3000	260305	2026/04/10	2027/04/09
Cable-7m (1G-40G)	EMC INSTRUMENTS	EMC104HS-KM-KM-7000	260306	2026/04/10	2027/04/09
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA
High Pass Filter	WOKEN	WFIL-H3000-18000F-03	WR377WC2B1	2025/10/13	2026/10/12
Highpass Filter	WOKEN	WFIL-H7000-18000F-01	WR468FWC2B1	2025/10/03	2026/10/02



Test Item	Radiated Emissions (Above 1G)				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	369	2025/02/17	2026/02/16
Active Loop Antenna	Schwarzbeck	FMZB 1513	00414	2025/02/18	2026/02/17
Horn Antenna	EMCO	3115	31589	2025/02/20	2026/02/19
Horn Antenna	EMCO	3116	31974	2025/02/20	2026/02/19
EMI Receiver	R&S	ESR 7	101906	2025/05/19	2026/05/18
Spectrum Analyzer	R&S	FSV3044	101744	2025/04/23	2026/04/22
Preamplifier	EMC INSTRUMENTS	EMC0518A45S E	981069	2025/12/18	2026/12/17
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2025/10/13	2026/10/12
Preamplifier	EM Electronics corp.	EM330	60659	2025/12/18	2026/12/17
Cable-4m (9k-3G)	EMEC	RG-223	18274M	2025/07/02	2026/07/01
Cable-3in1 (30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1315	2025/02/21	2026/02/20
Cable-0.5m (1G-40G)	HUBER SUHNER	SUCOFLEX 104	805443/4	2025/02/26	2026/02/25
Cable-3m (1G-40G)	HUBER SUHNER	SUCOFLEX 104	805796/4	2025/02/26	2026/02/25
Cable-8m (1G-26.5G)	WOKEN	WCBA-WCA20 3SM	CCE1374	2025/02/26	2026/02/25
Cable-1m (1G-40G)	HUBER SUHNER	SF102E	602125	2025/07/19	2026/07/18
Cable-3m (1G-40G)	HUBER SUHNER	SF102E	552450	2025/07/09	2026/07/08
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA
High Pass Filter	WOKEN	WFIL-H3000-18000F-03	WR377WC2B1	2025/10/13	2026/10/12
Notch Filter	Warison	WFIL-N5925-7125F-04	WRQ4BFWC4M1	2025/02/21	2026/02/20
Hipass Filter	Warison	WFIL-H7500-18000F	WRQ4BFWC2J1	2025/02/21	2026/02/20



Test Item	RF Conducted				
Test Site	RFCON02-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
CAX Signal Analyzer	KEYSIGHT	N9000B	MY57100339	2025/10/23	2026/10/22
Power Meter	Anritsu	ML2495A	1224005	2025/02/12	2026/02/11
Power Sensor	Anritsu	MA2411B	1207295	2025/02/12	2026/02/11
Attenuator	KEYSIGHT	8491B	MY39250703	2025/02/12	2026/02/11

Test Item	AC Power Line Conducted Emission				
Test Site	CON02-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	R&S	ESCI	101423	2025/07/10	2026/07/09
LISN	Schwarzbeck	NSLK 8127	1197	2025/09/22	2026/09/21
Two-Line V-Network	R&S	ENV216	102185	2025/08/28	2026/08/27
Cable-3m (9k-3G)	EMEC	RG-223	18271M	2025/06/25	2026/06/24
E3	AUDIX	v8.2014-8-6	RK-000536	NA	NA



4. Antenna Requirements

4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2 Antenna Construction and Directional Gain

Antenna Type	L shape Antenna
Antenna Gain	1.8dBi



5. Test of AC Power Line Conducted Emission

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9kHz, according to the methods defined in ANSI C63.10-2020+Cor.1-2023 and ANSI C63.10a-2024. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




5.3 Typical Test Setup

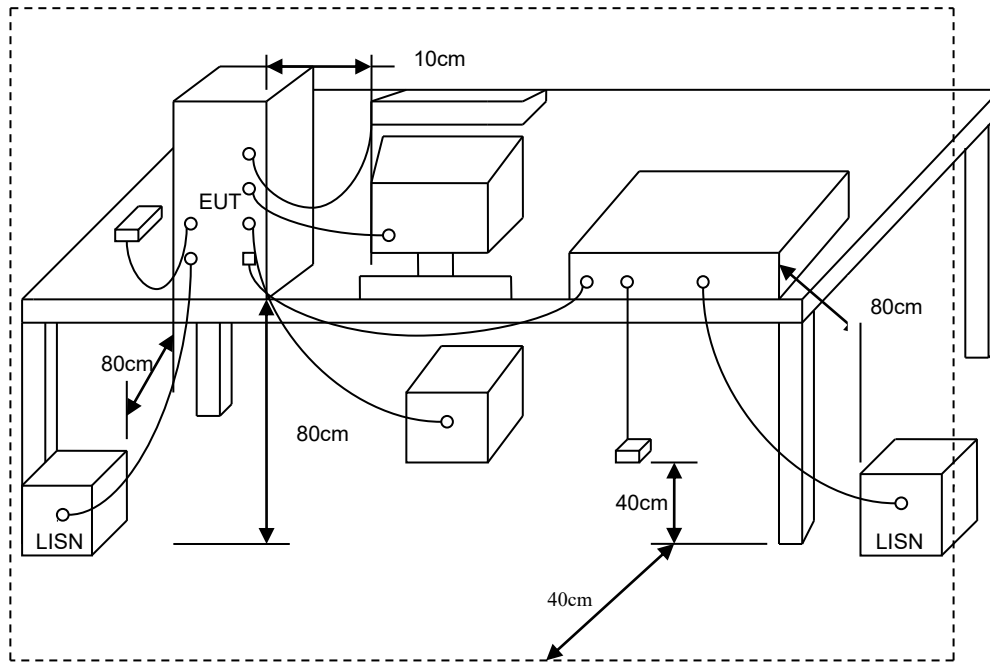




5.4 Test Result and Data

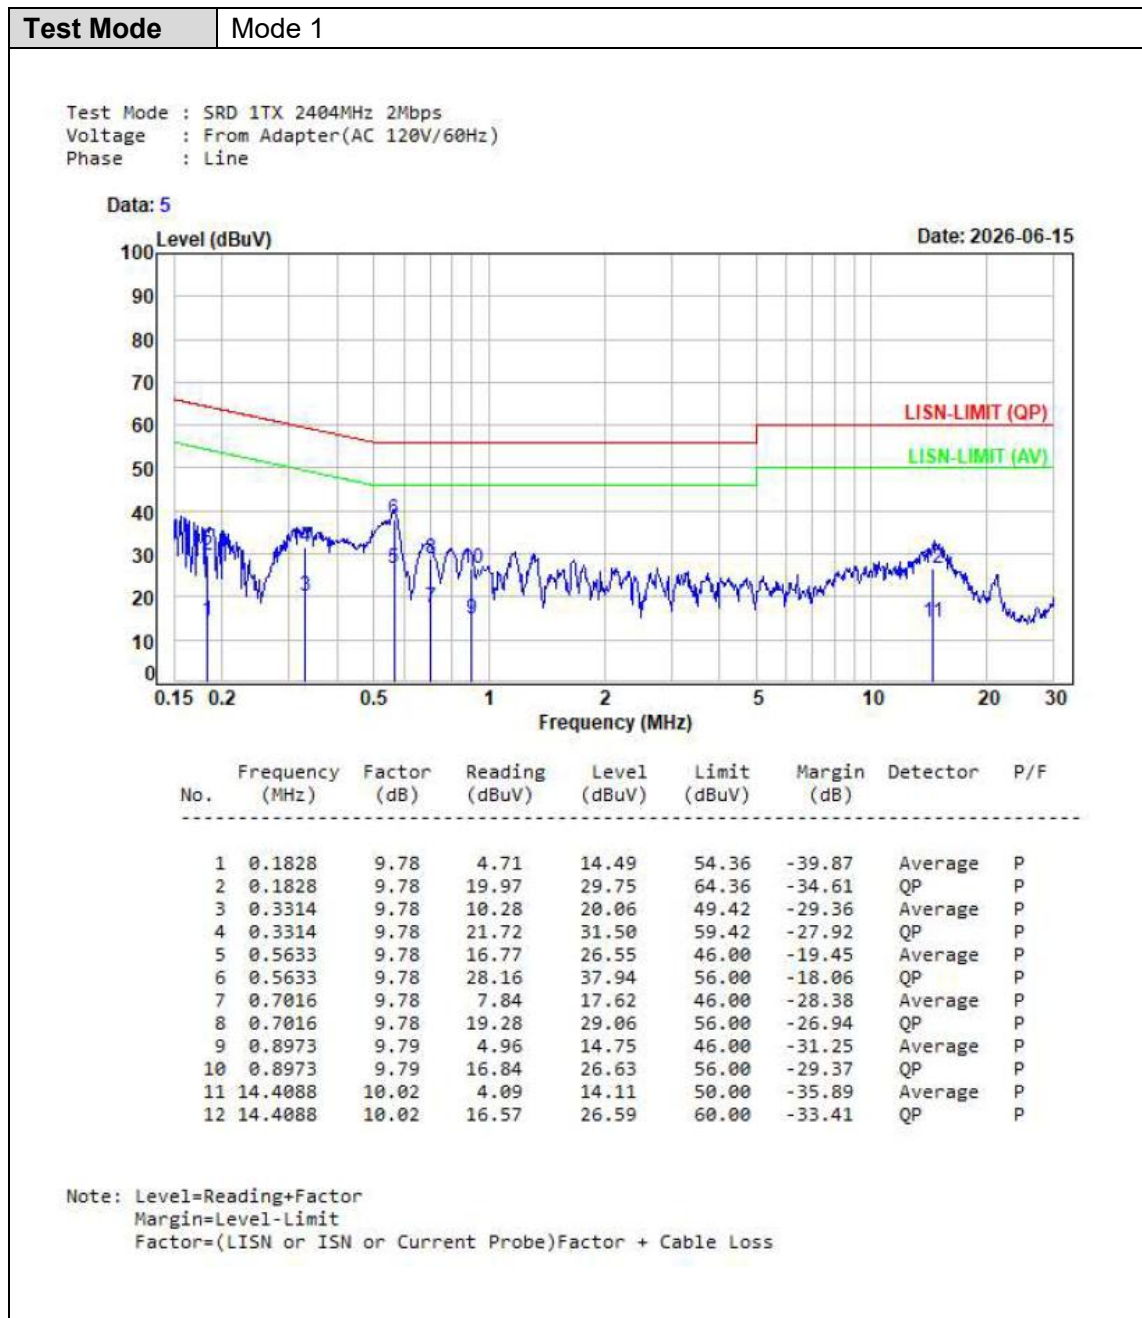

**Test Mode** Mode 1

Test Mode : SRD 1TX 2404MHz 2Mbps
Voltage : From Adapter(AC 120V/60Hz)
Phase : Neutral

Data: 6

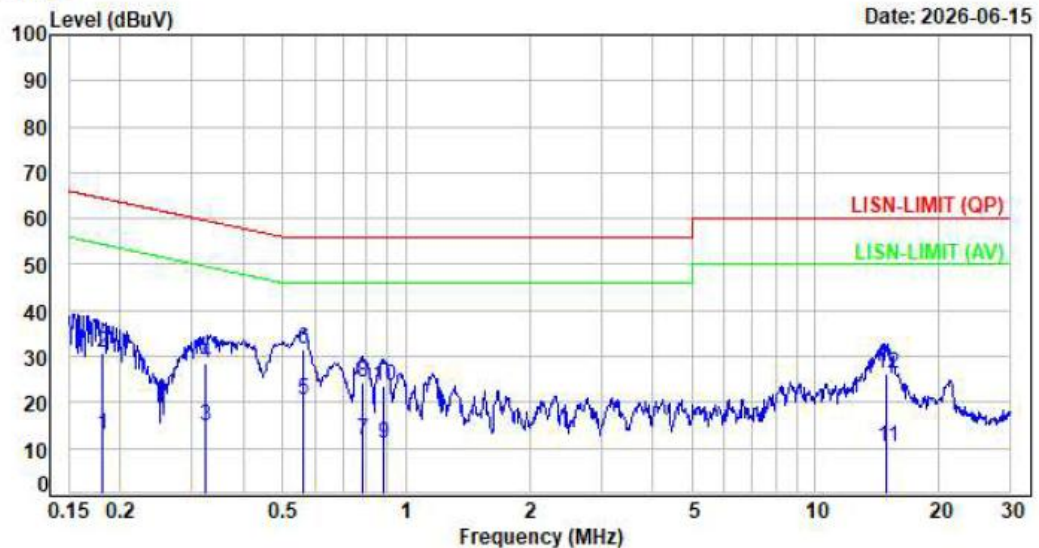

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1805	9.79	3.04	12.83	54.46	-41.63	Average	P
2	0.1805	9.79	21.19	30.98	64.46	-33.48	QP	P
3	0.3249	9.79	4.87	14.66	49.58	-34.92	Average	P
4	0.3249	9.79	18.58	28.37	59.58	-31.21	QP	P
5	0.5609	9.79	10.75	20.54	46.00	-25.46	Average	P
6	0.5609	9.79	21.64	31.43	56.00	-24.57	QP	P
7	0.7809	9.79	1.84	11.63	46.00	-34.37	Average	P
8	0.7809	9.79	14.56	24.35	56.00	-31.65	QP	P
9	0.8779	9.79	1.18	10.97	46.00	-35.03	Average	P
10	0.8779	9.79	13.80	23.59	56.00	-32.41	QP	P
11	14.9465	10.06	0.15	10.21	50.00	-39.79	Average	P
12	14.9465	10.06	16.03	26.09	60.00	-33.91	QP	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



6. Test of Spurious Emission (Radiated)

6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3



6.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.


Note:

- 1.The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized.
- 2.Due to the test software function limit the operation band setting(200dBuV/m).
There's no corresponding limitation in the actual test item.




6.3 Typical Test Setup


Below 30MHz test setup

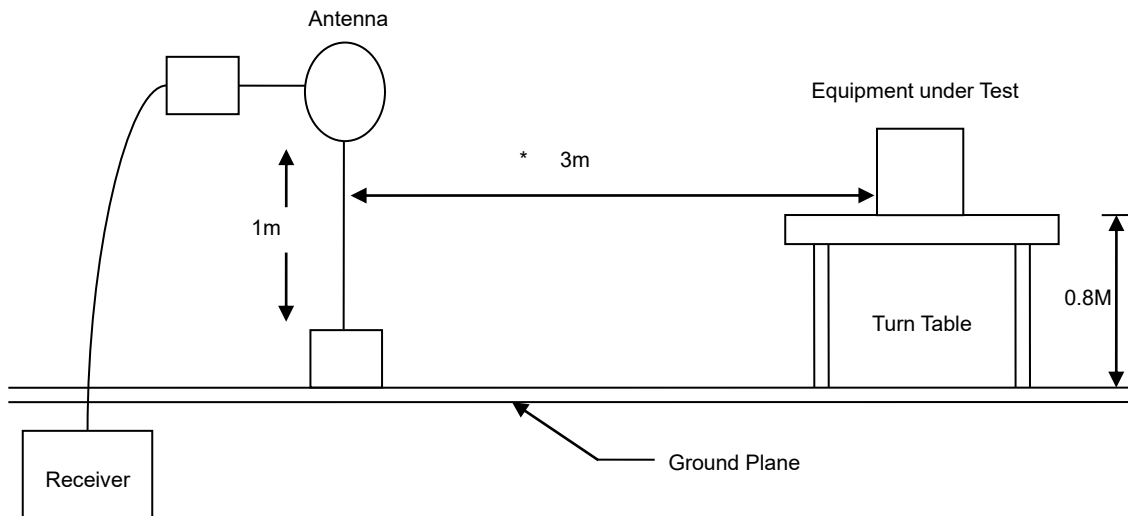

30MHz- 1GHz Test Setup

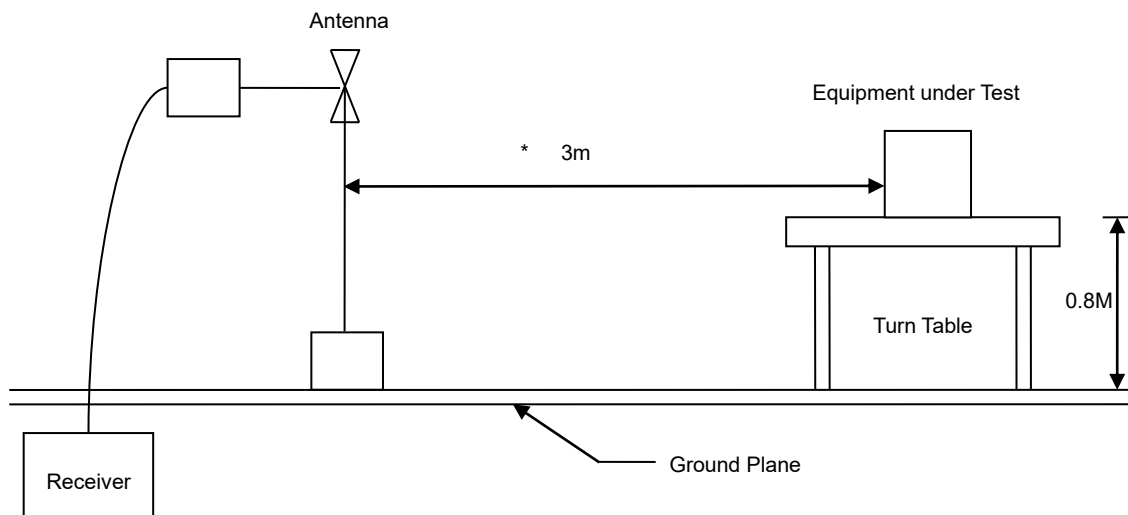

Above 1GHz Test Setup

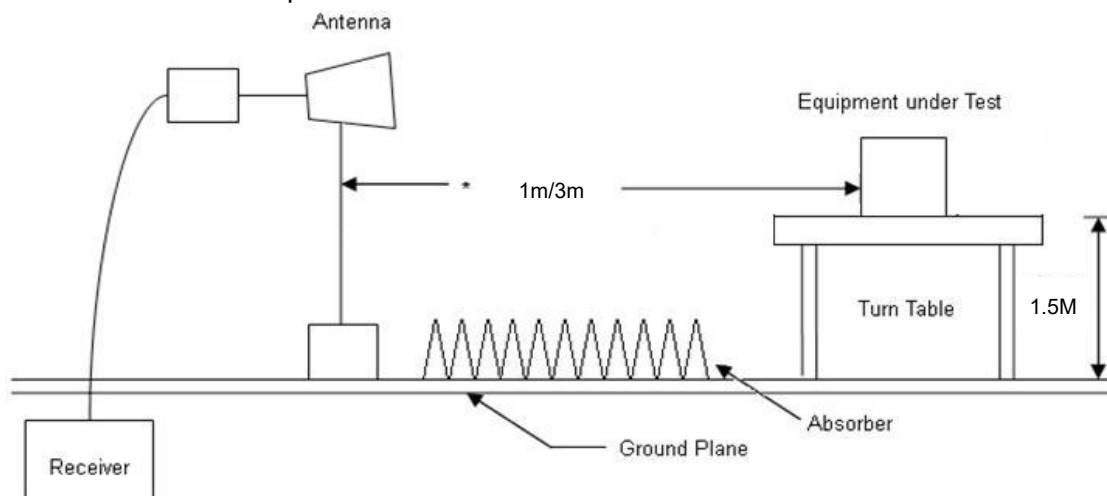





6.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.


6.5 Test Result and Data (30MHz ~ 1GHz)

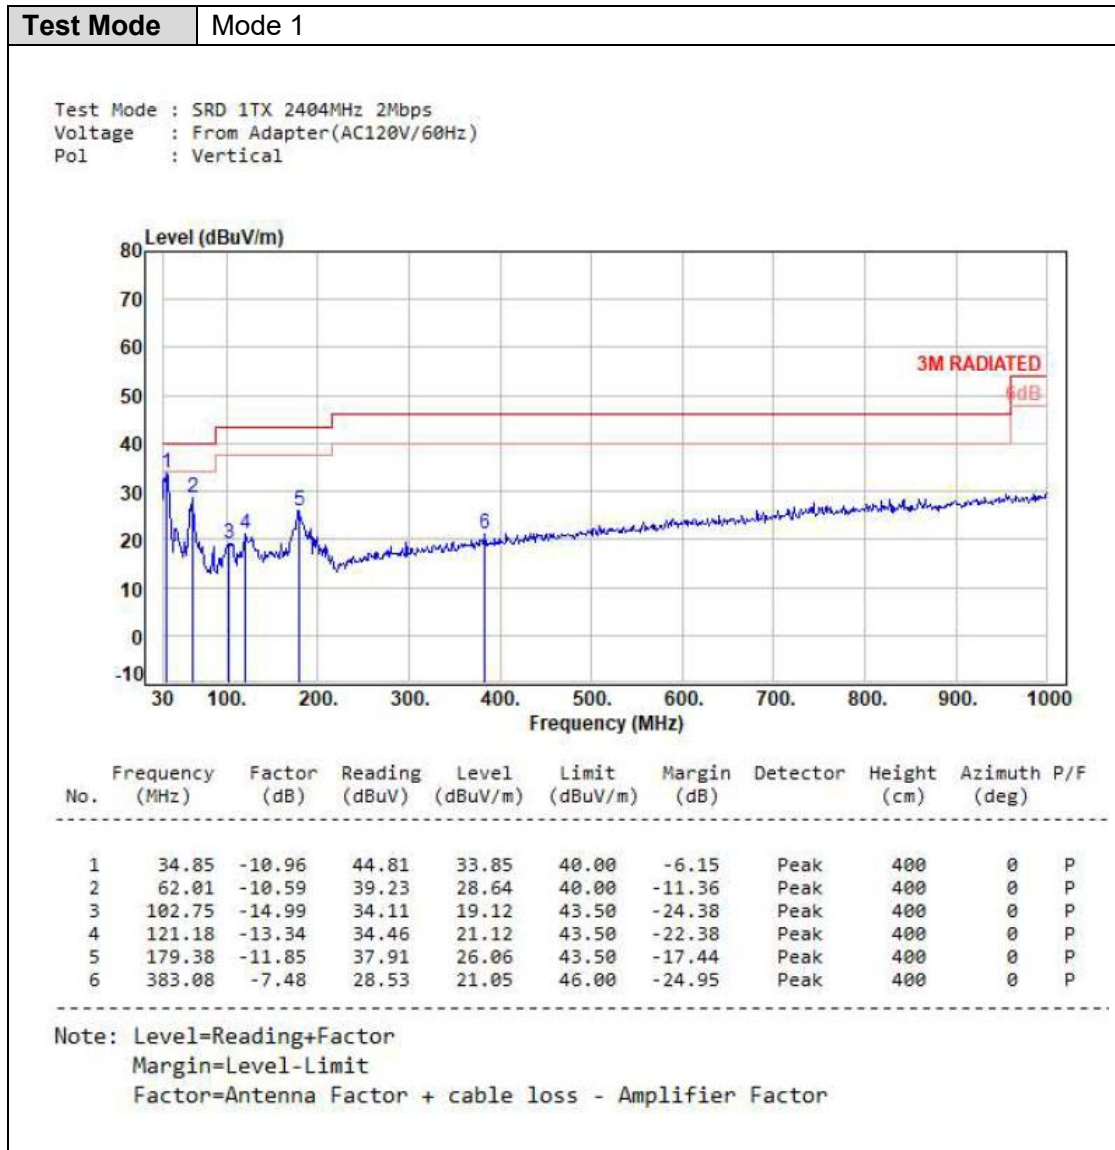


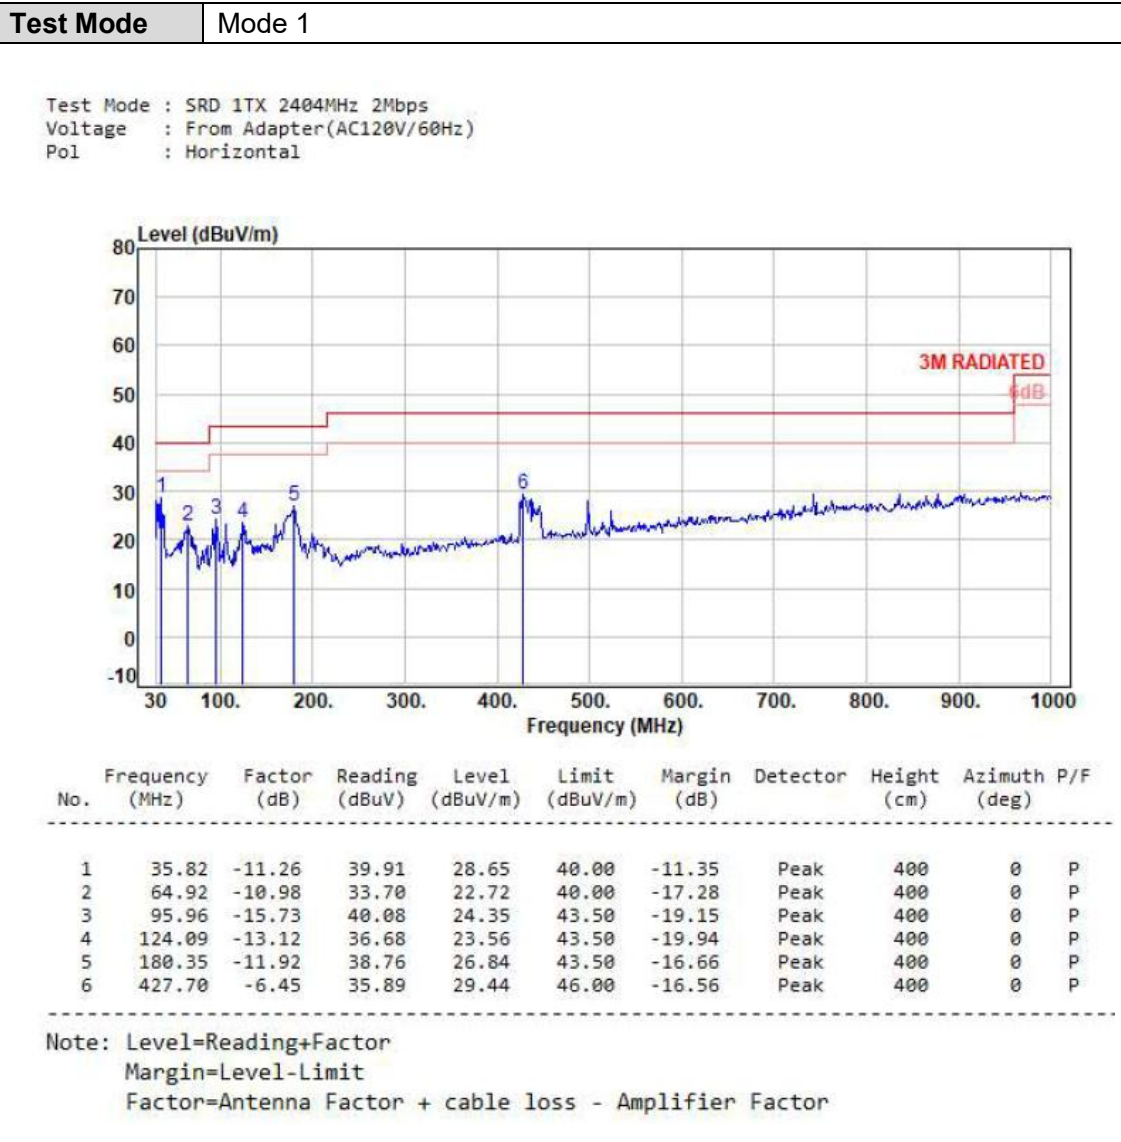






6.6 Test Result and Data (Bandedge)

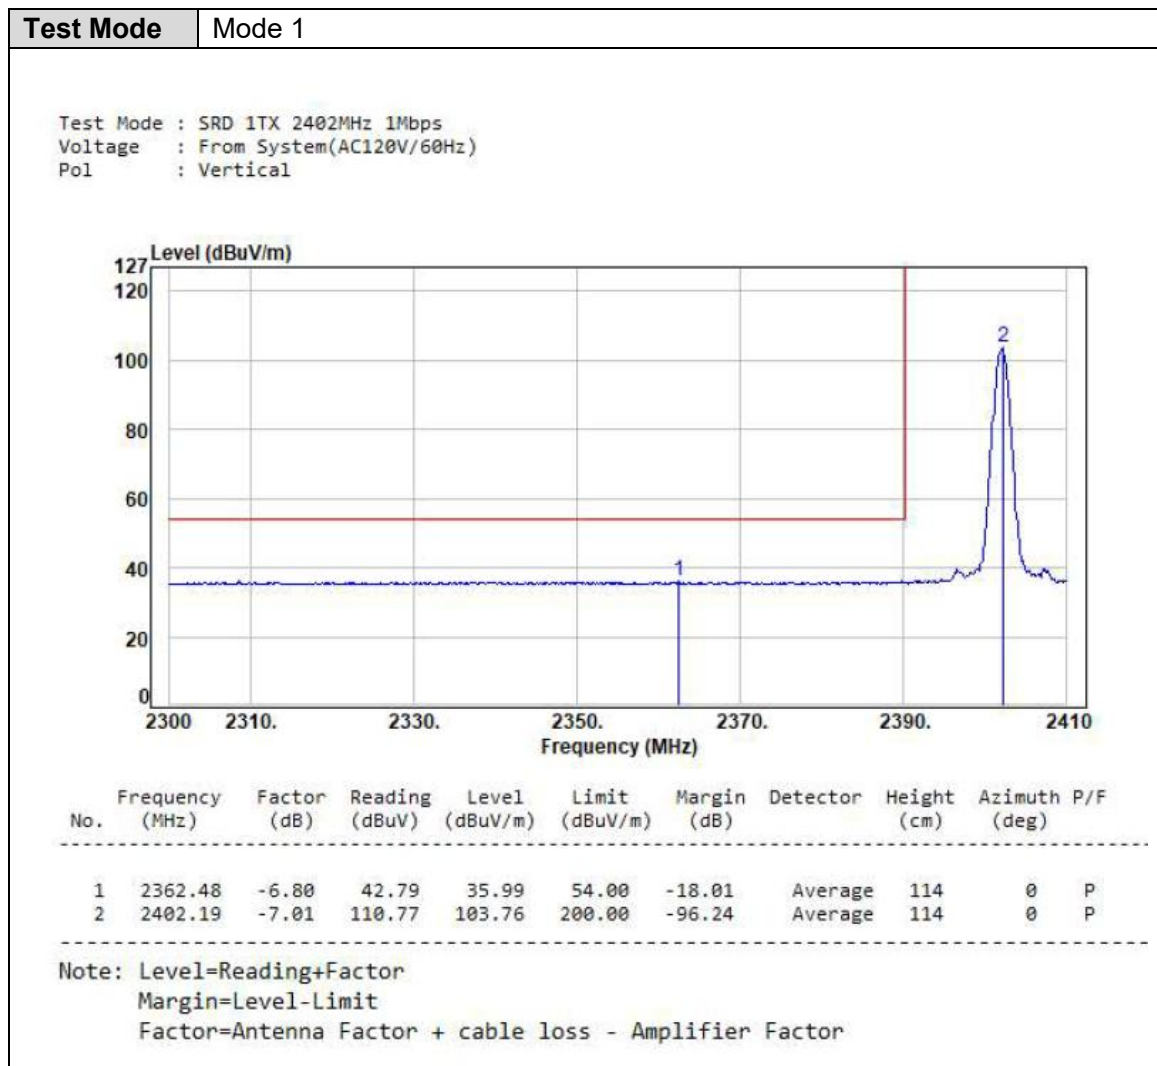


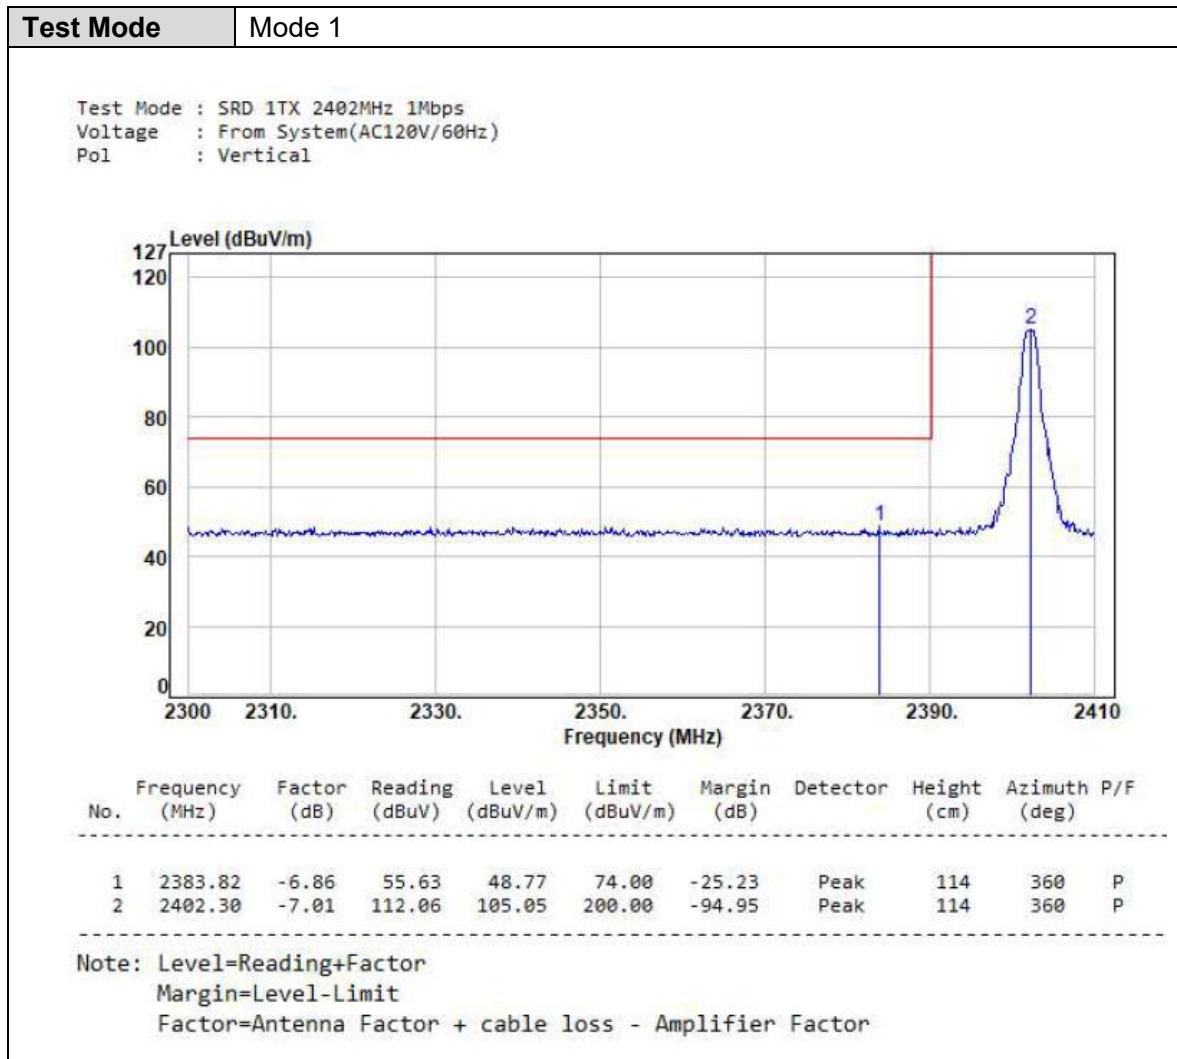


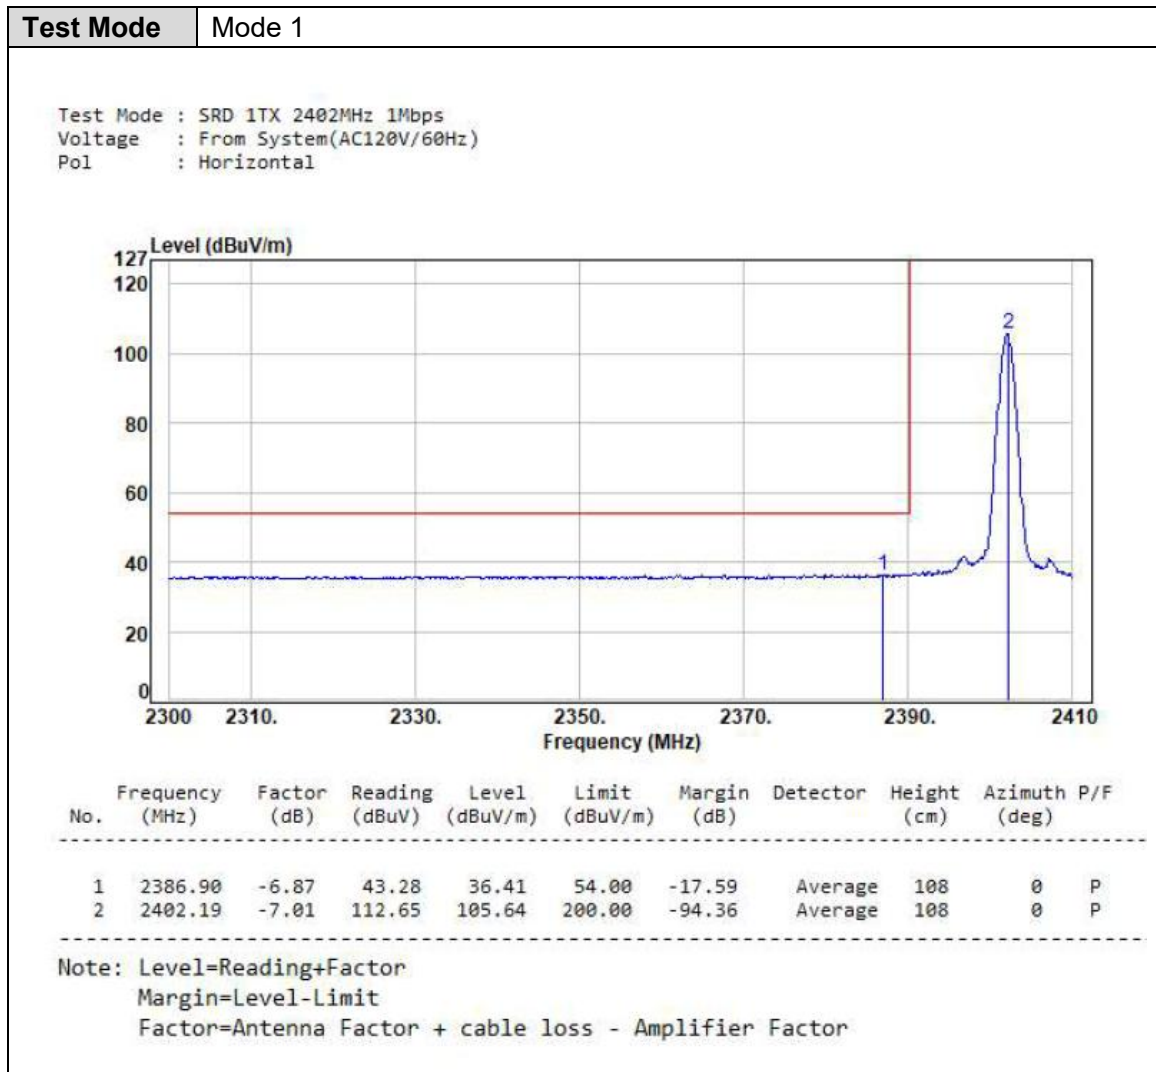


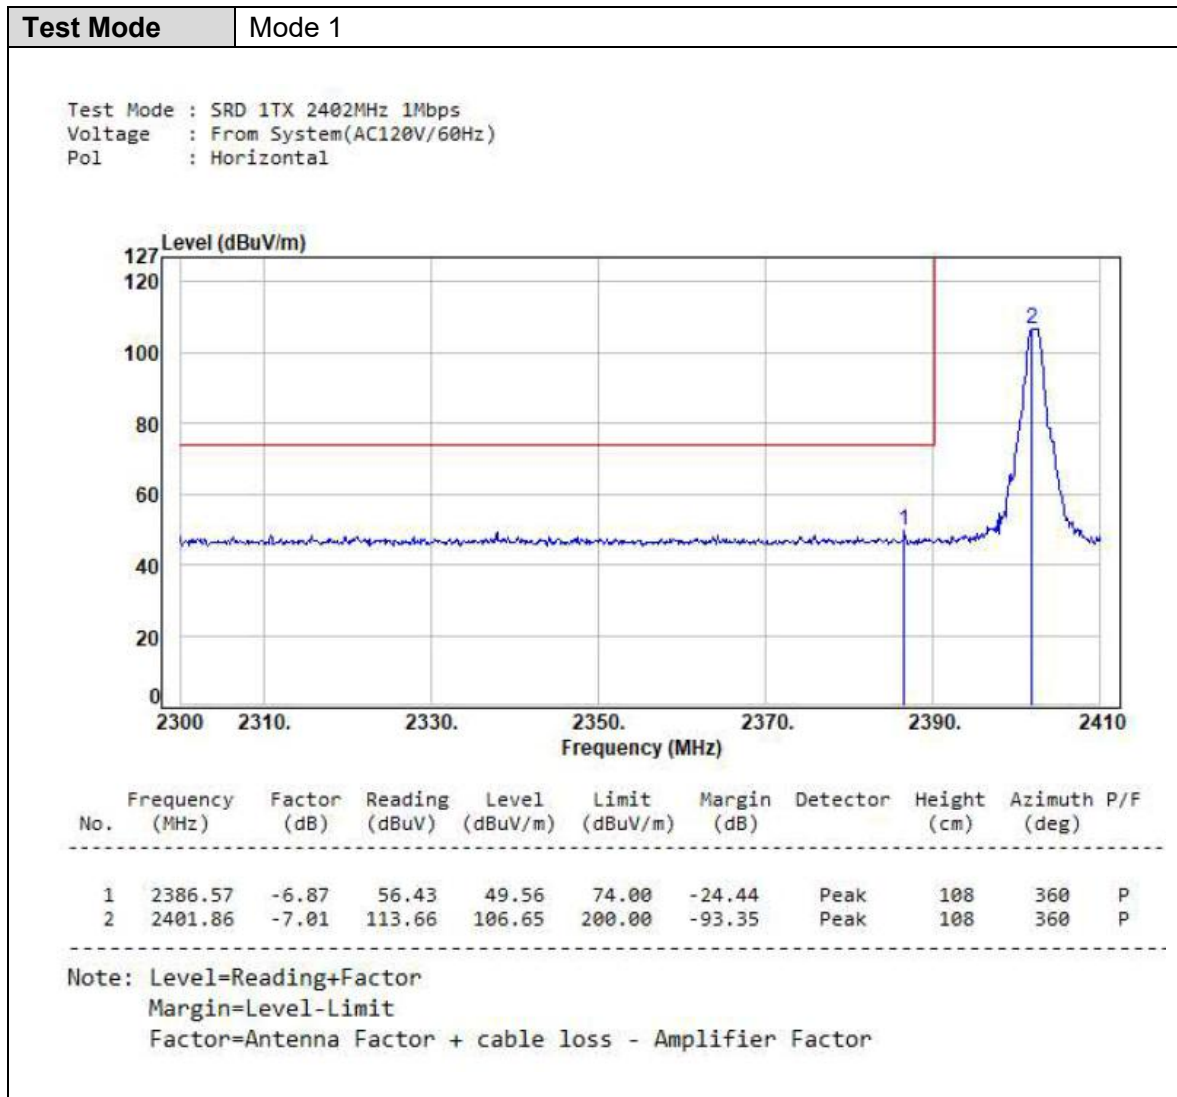


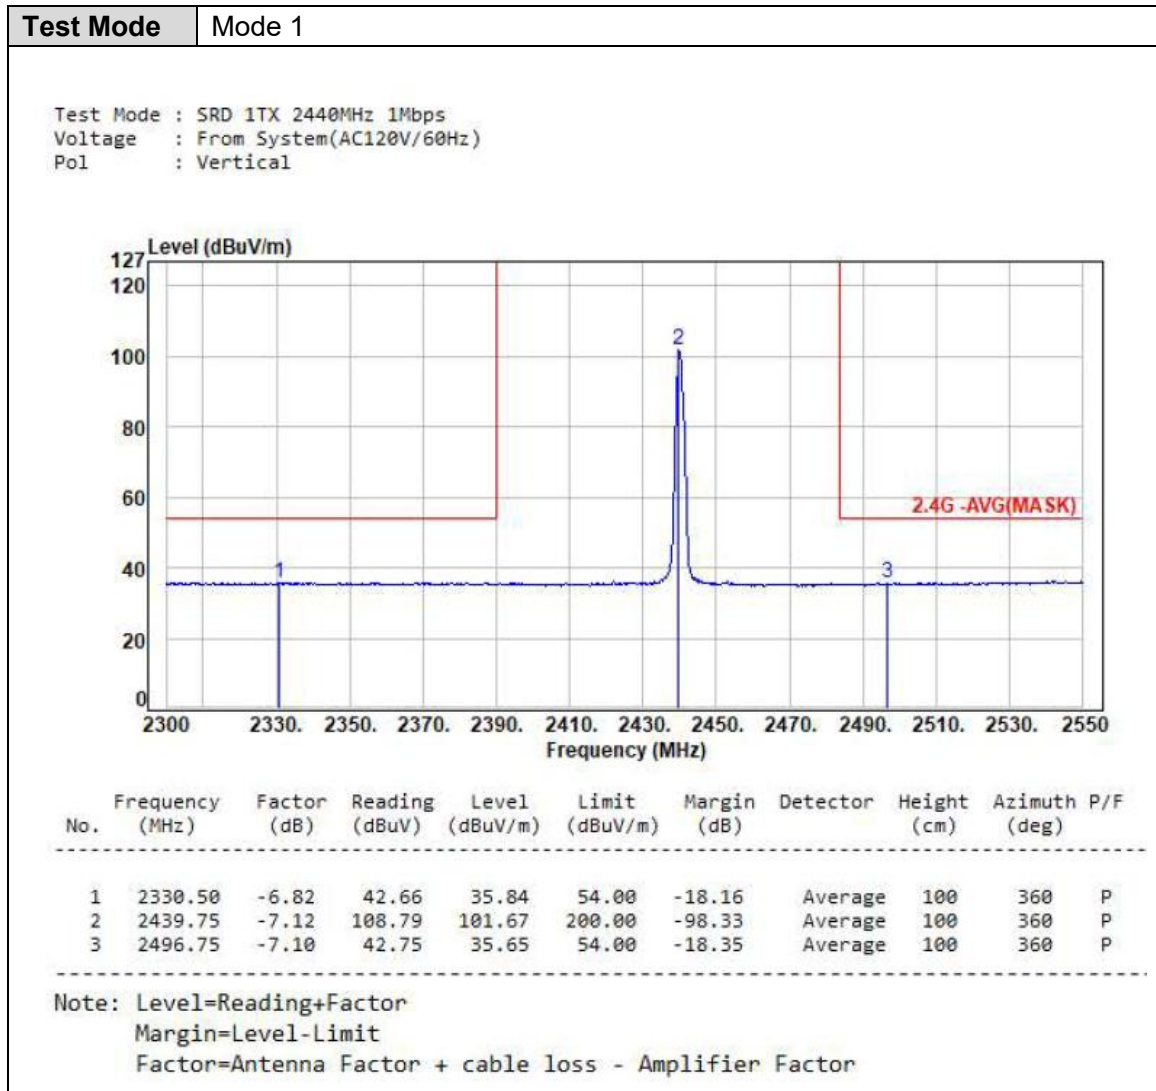


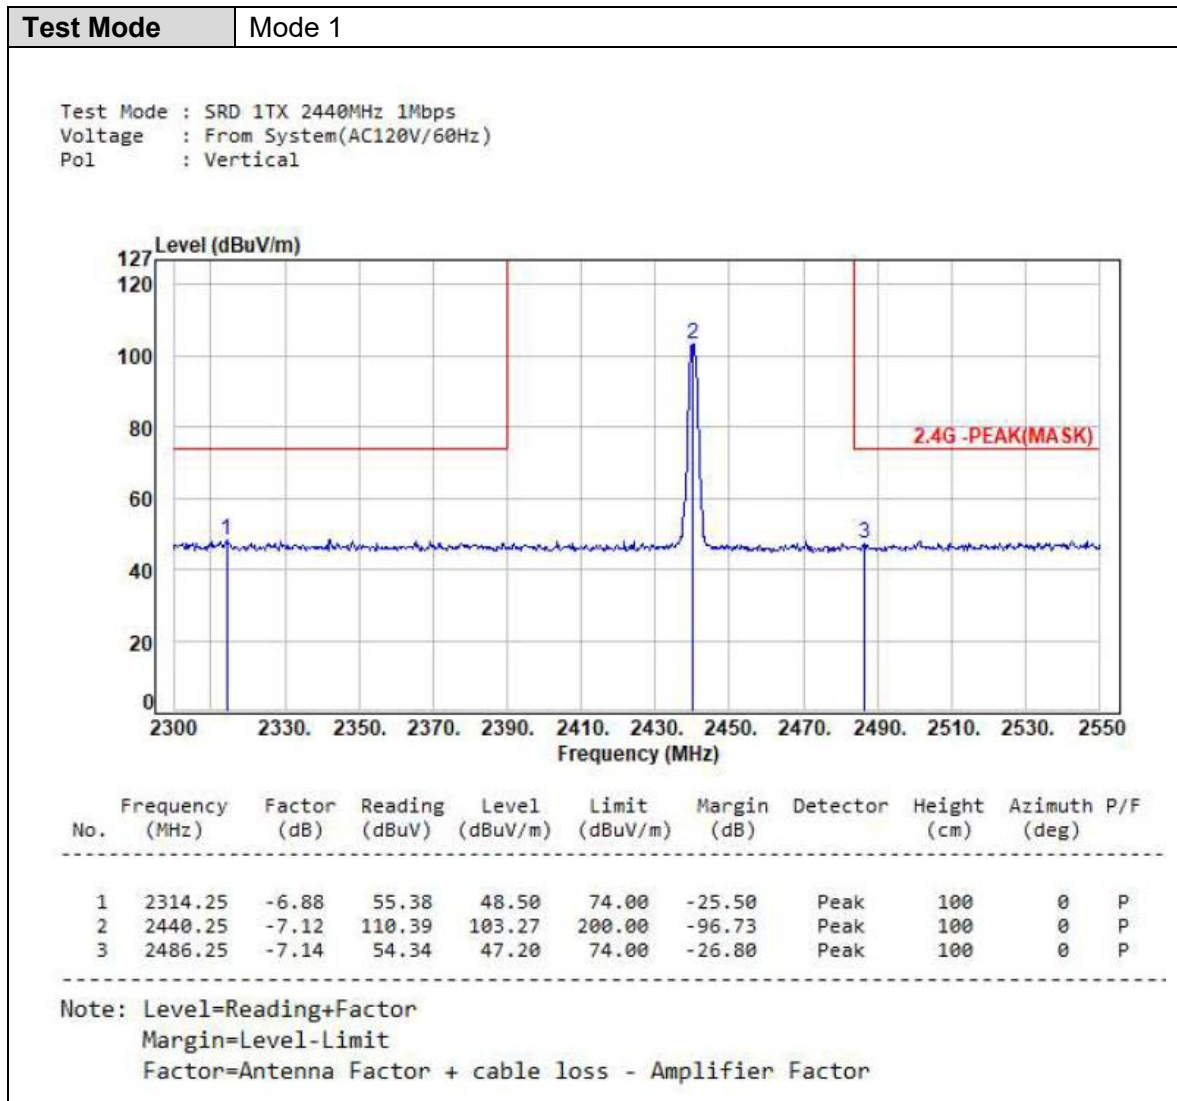


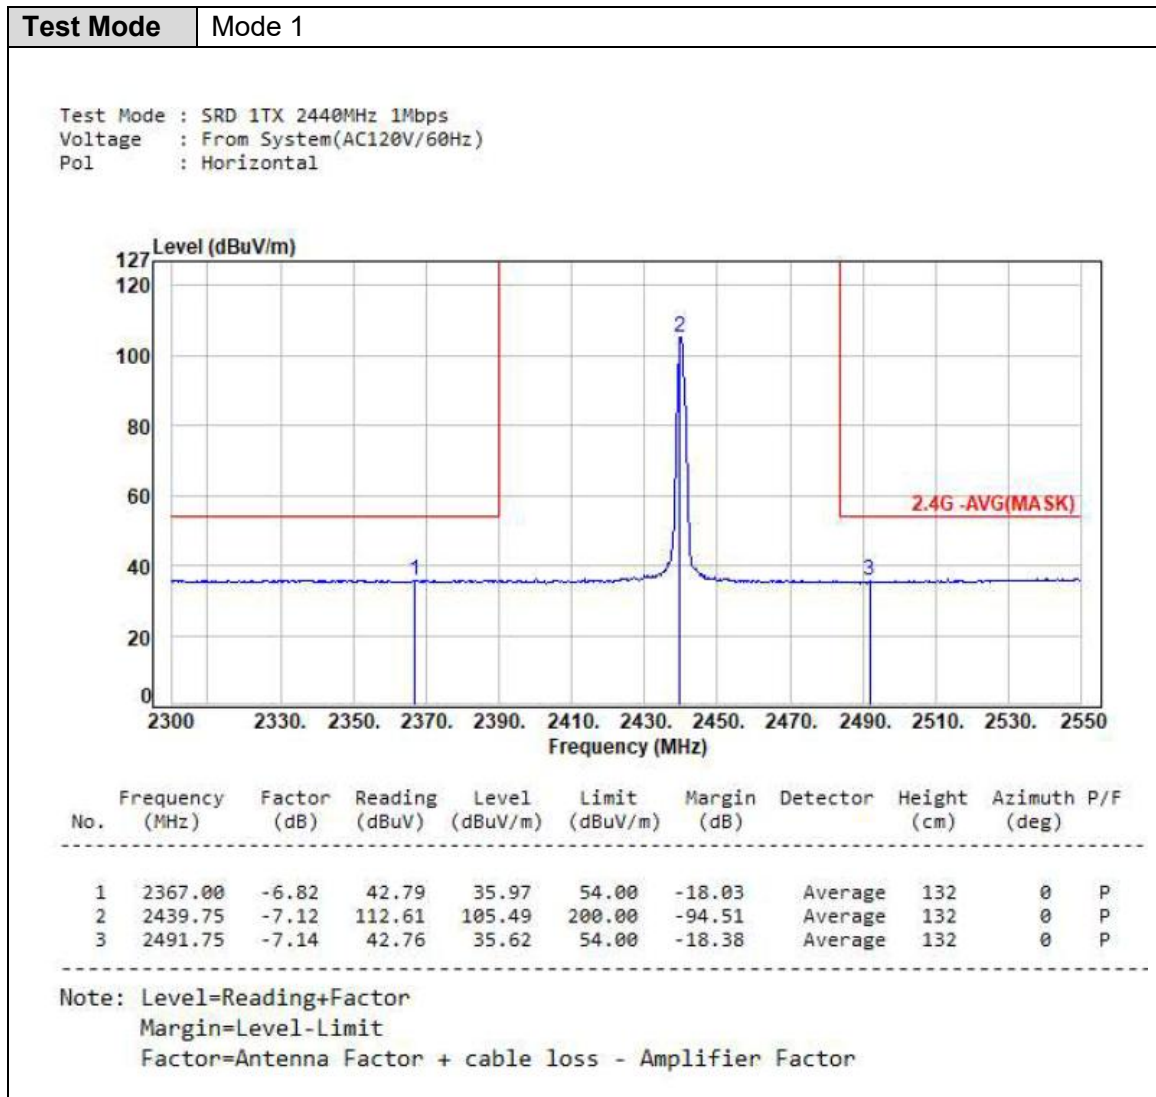


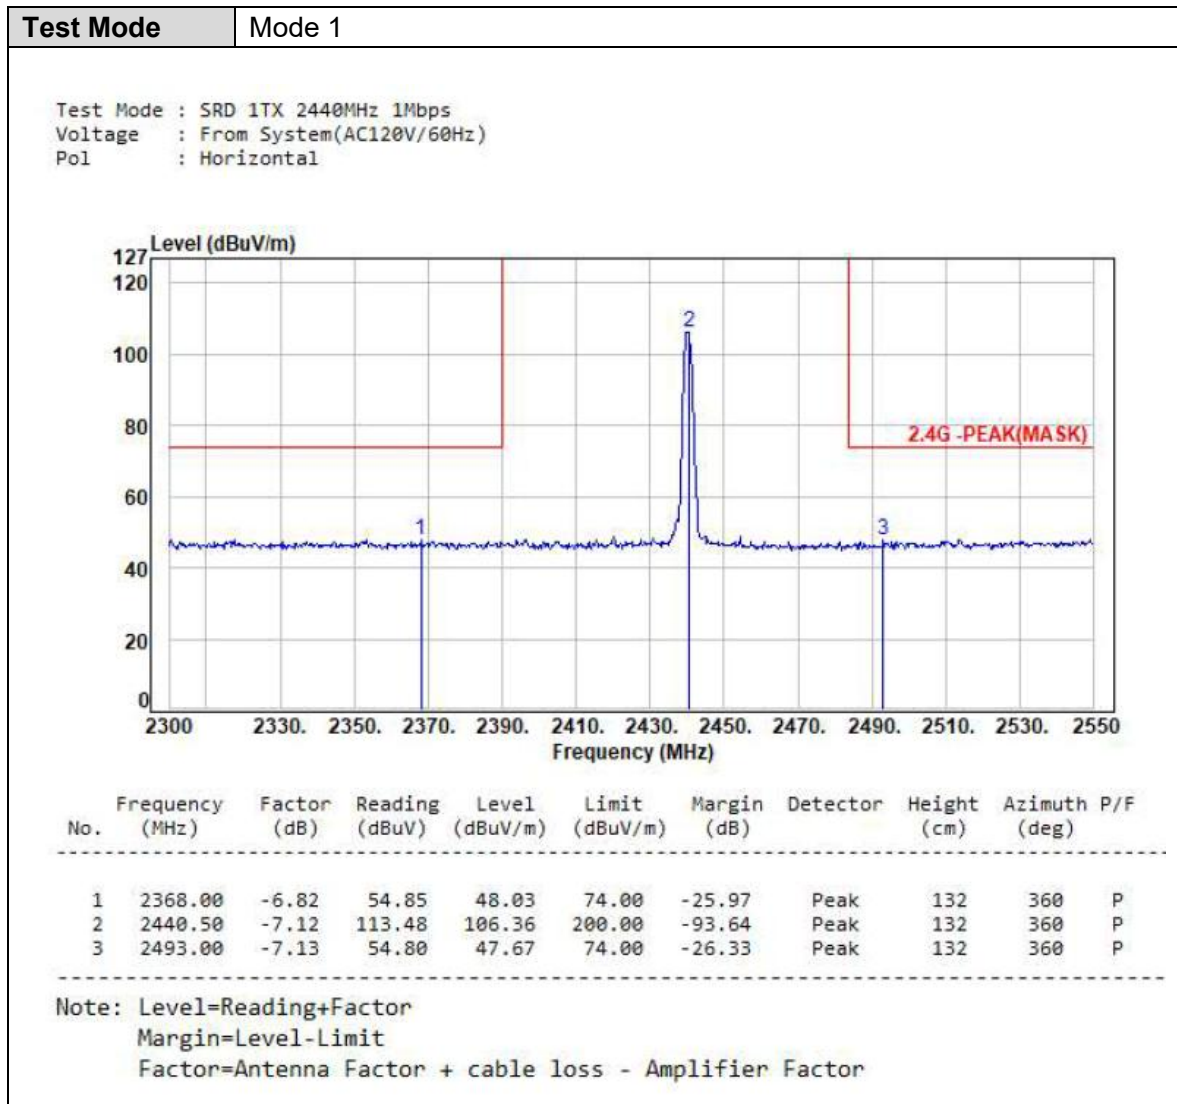


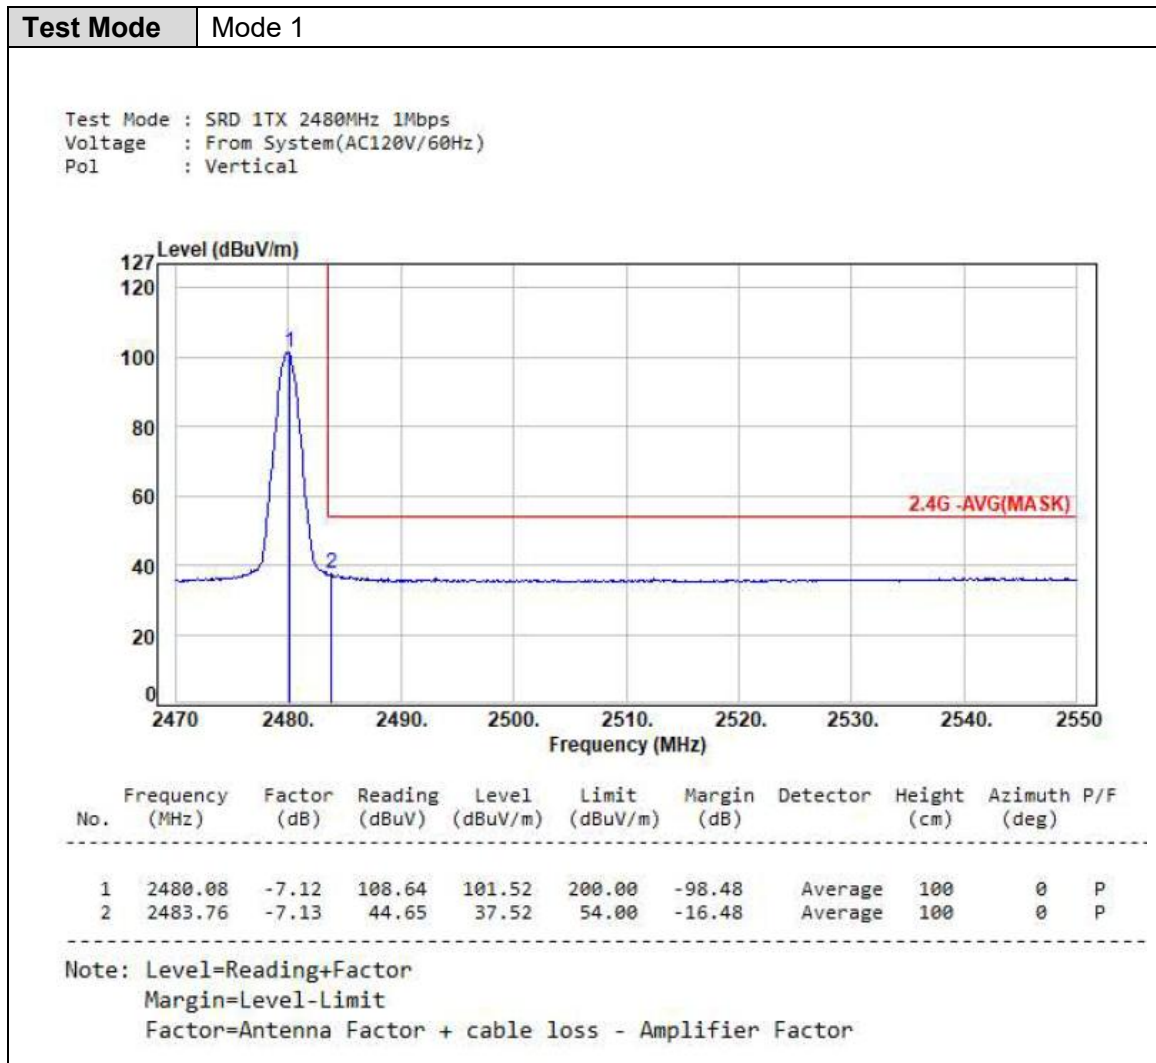


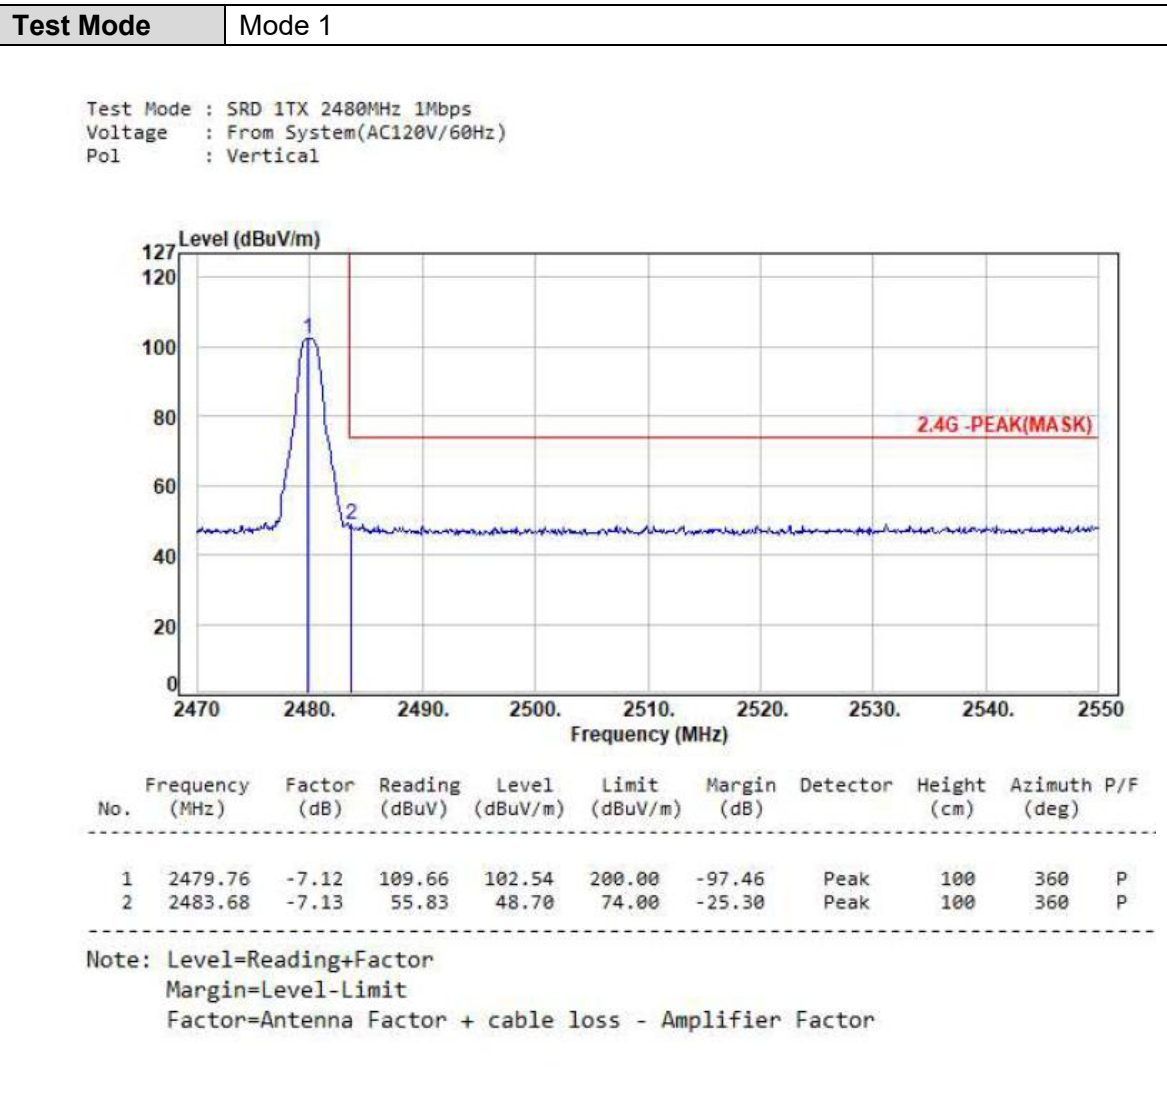


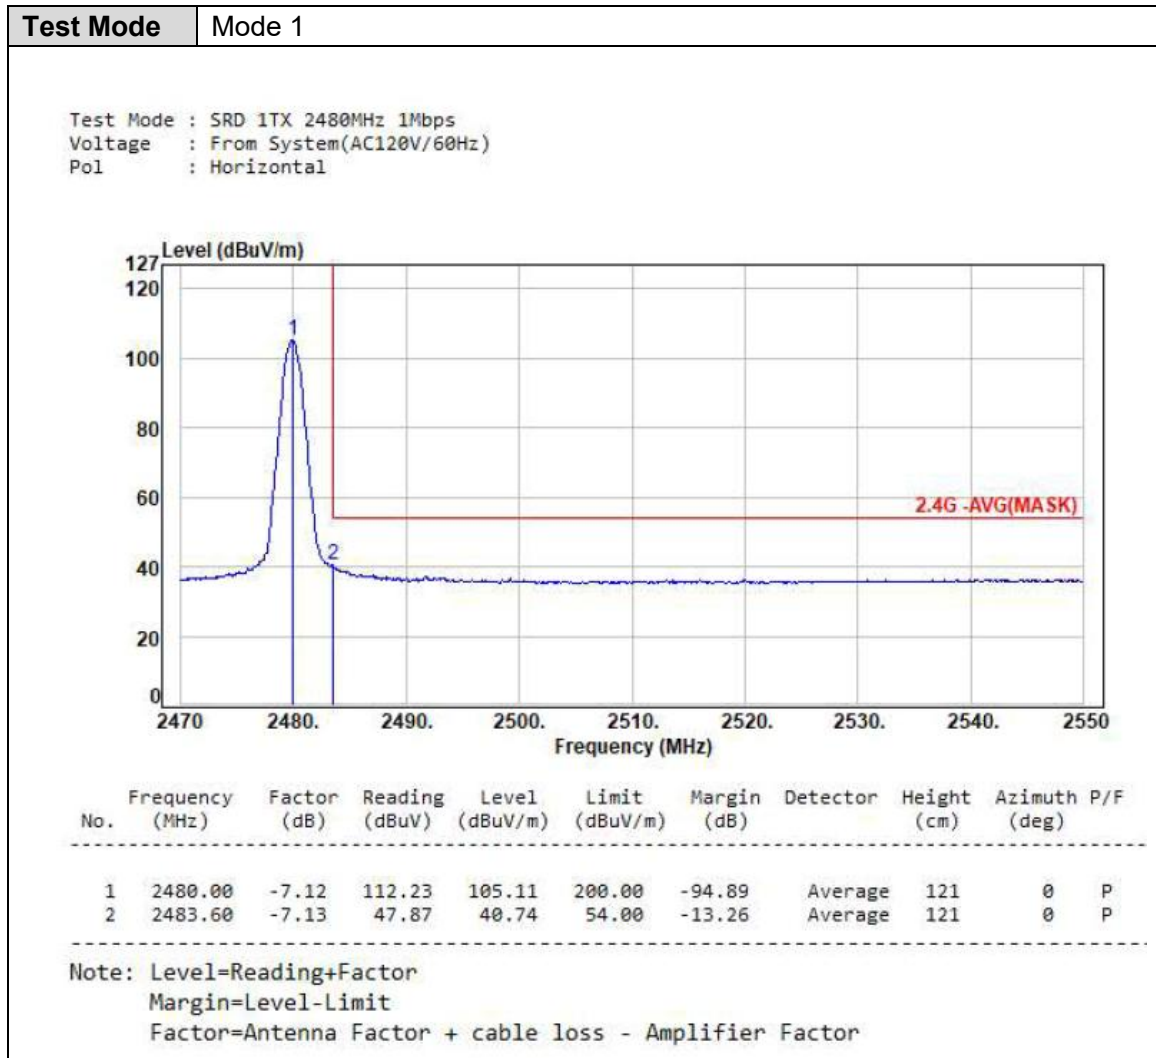


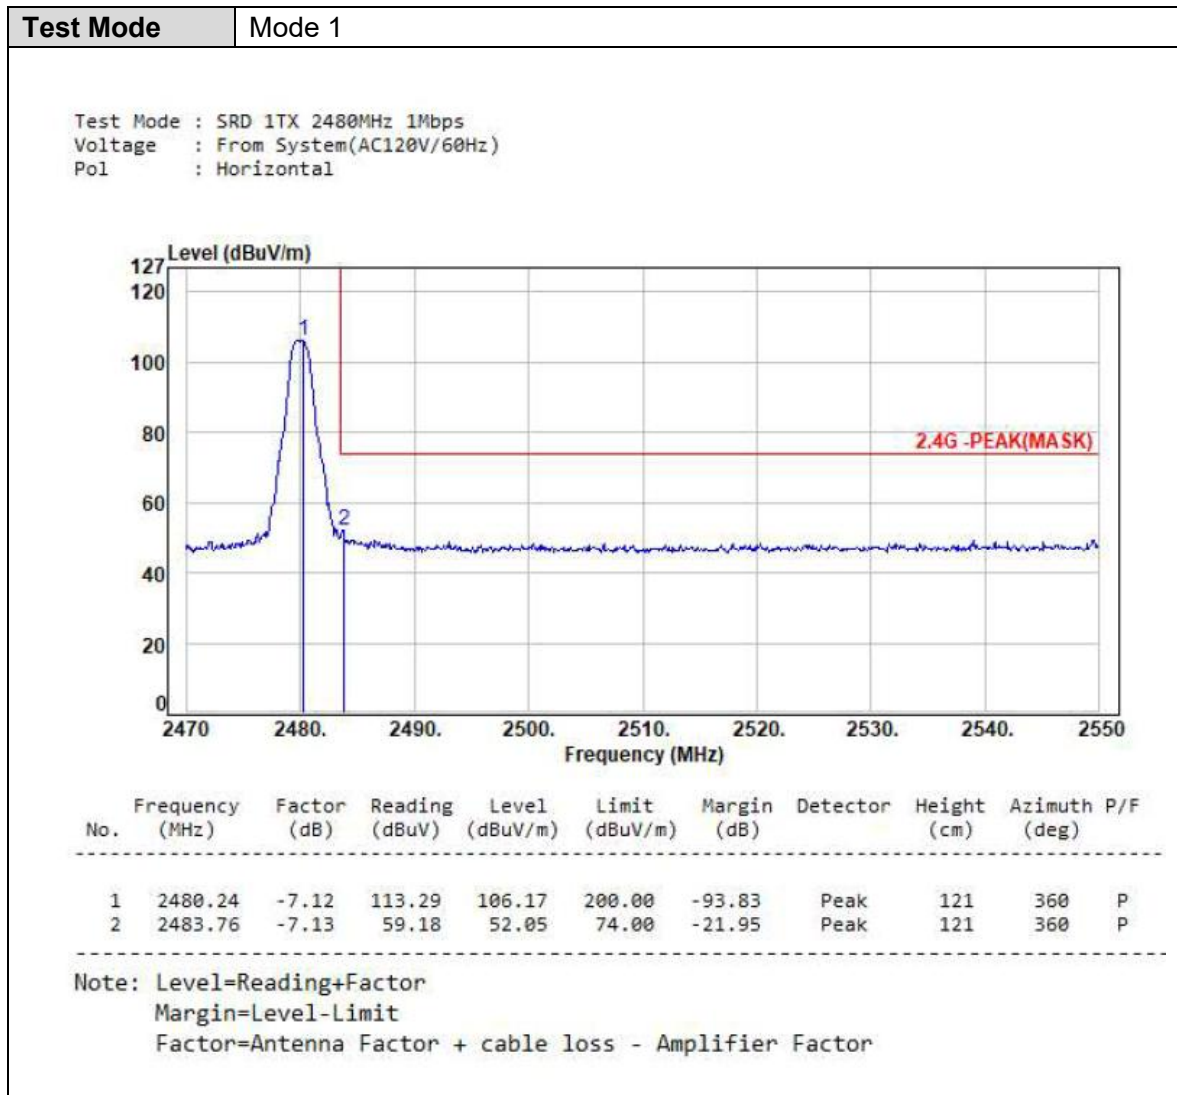


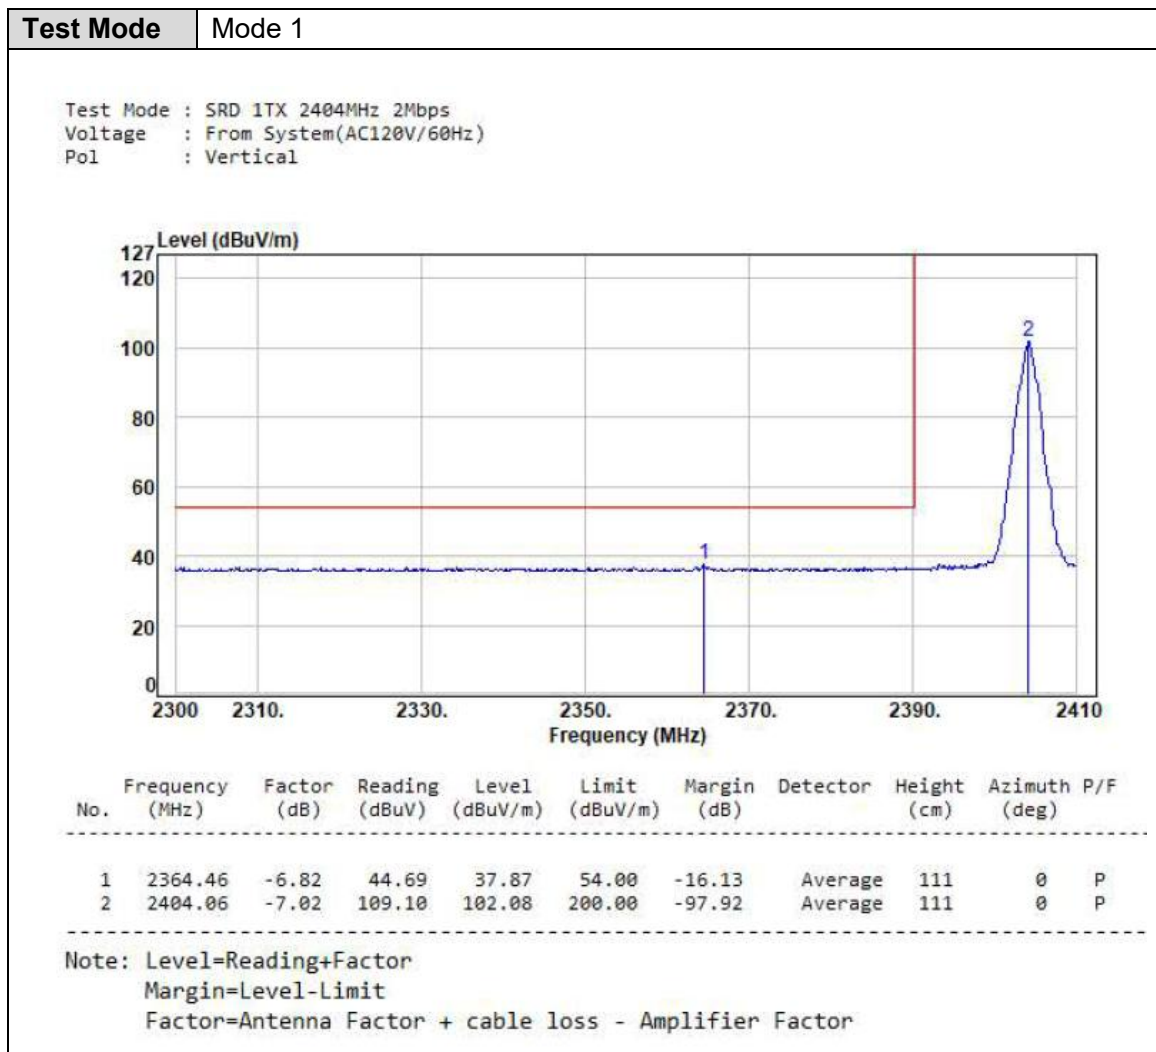


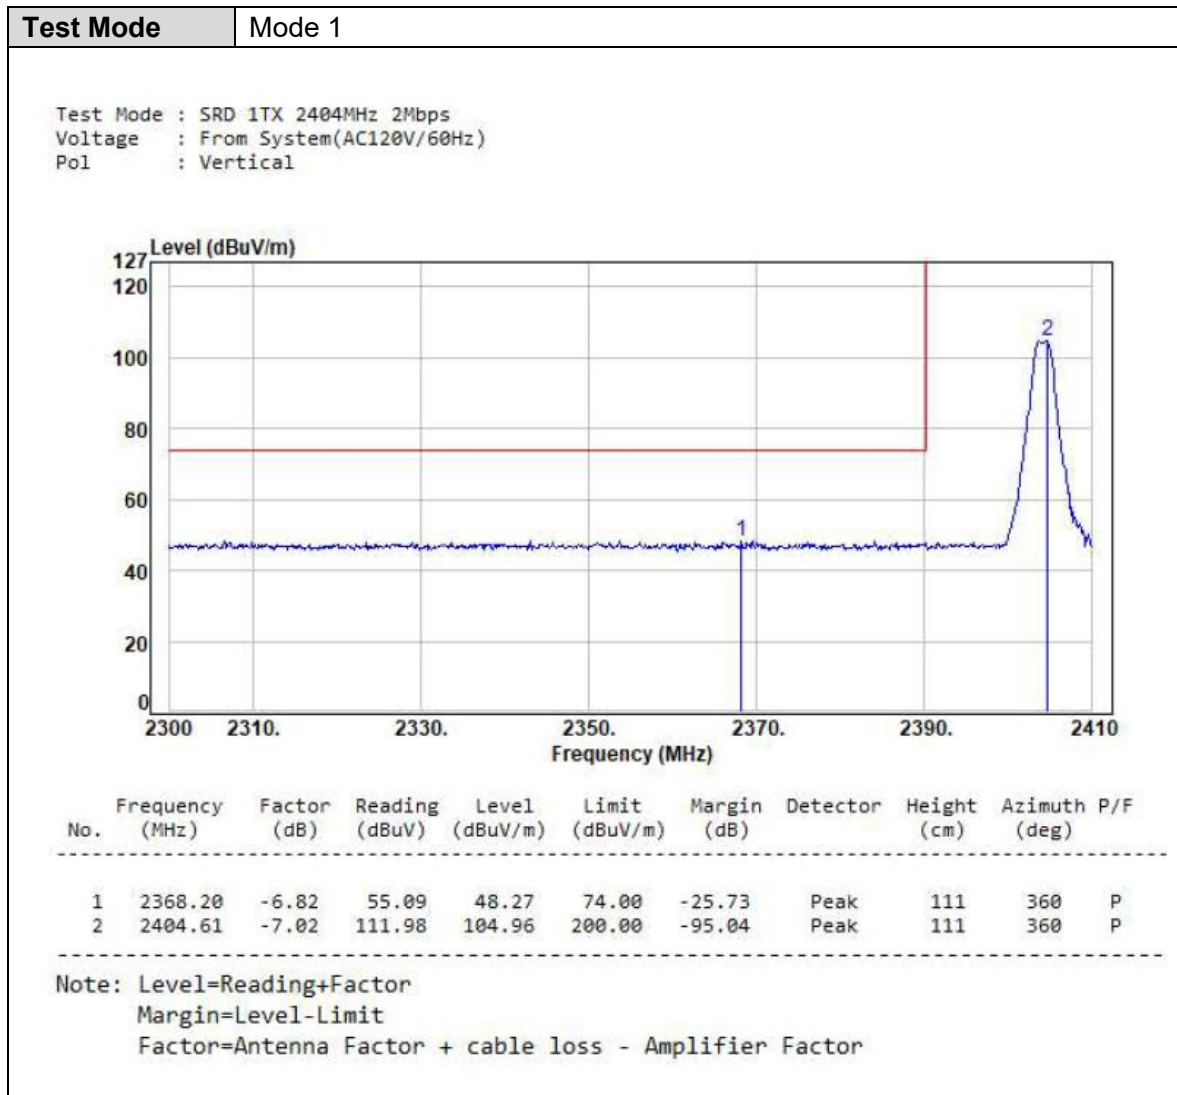


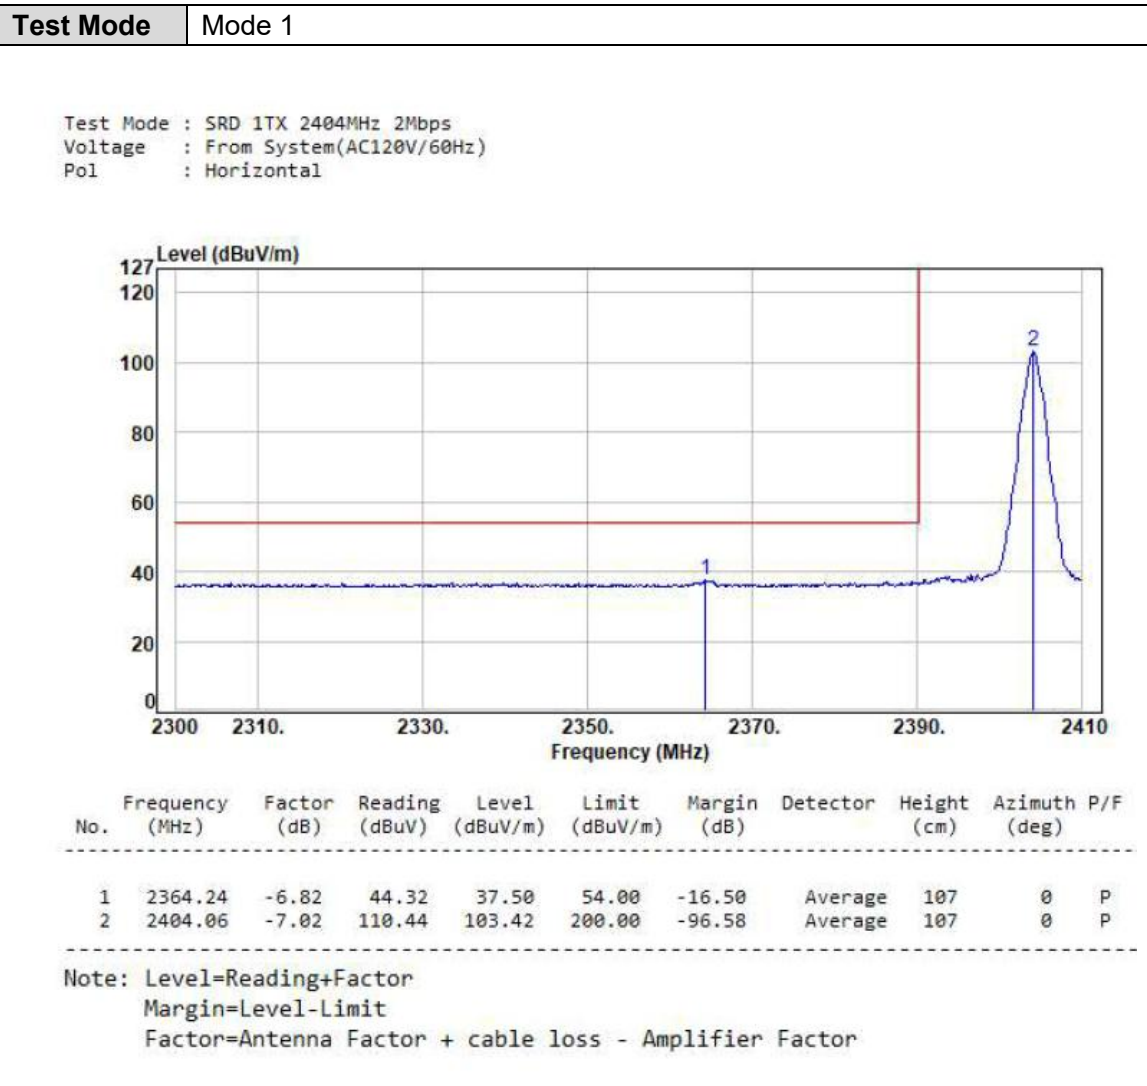


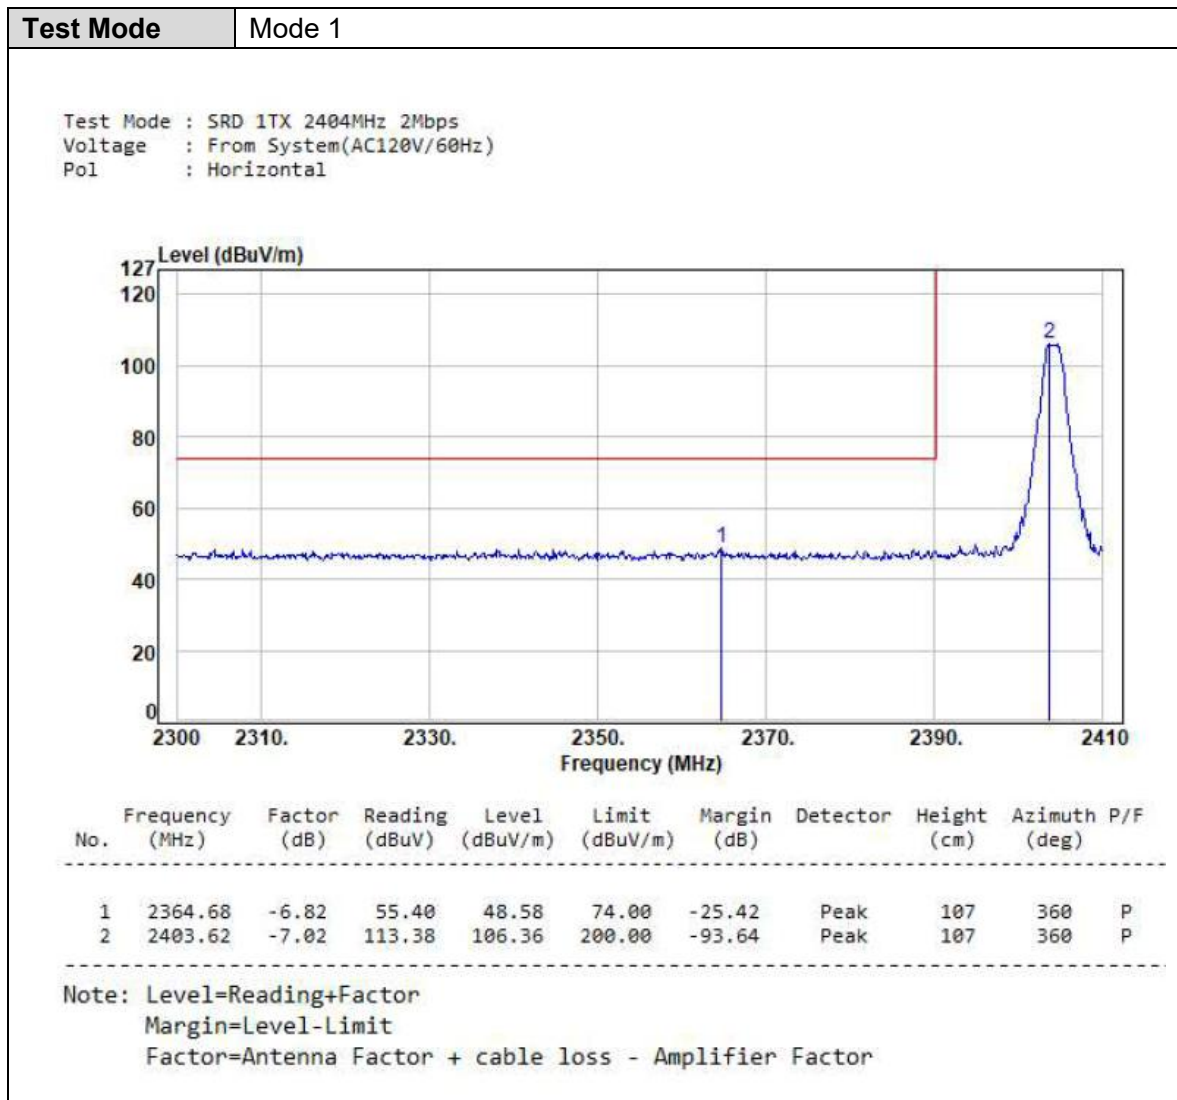


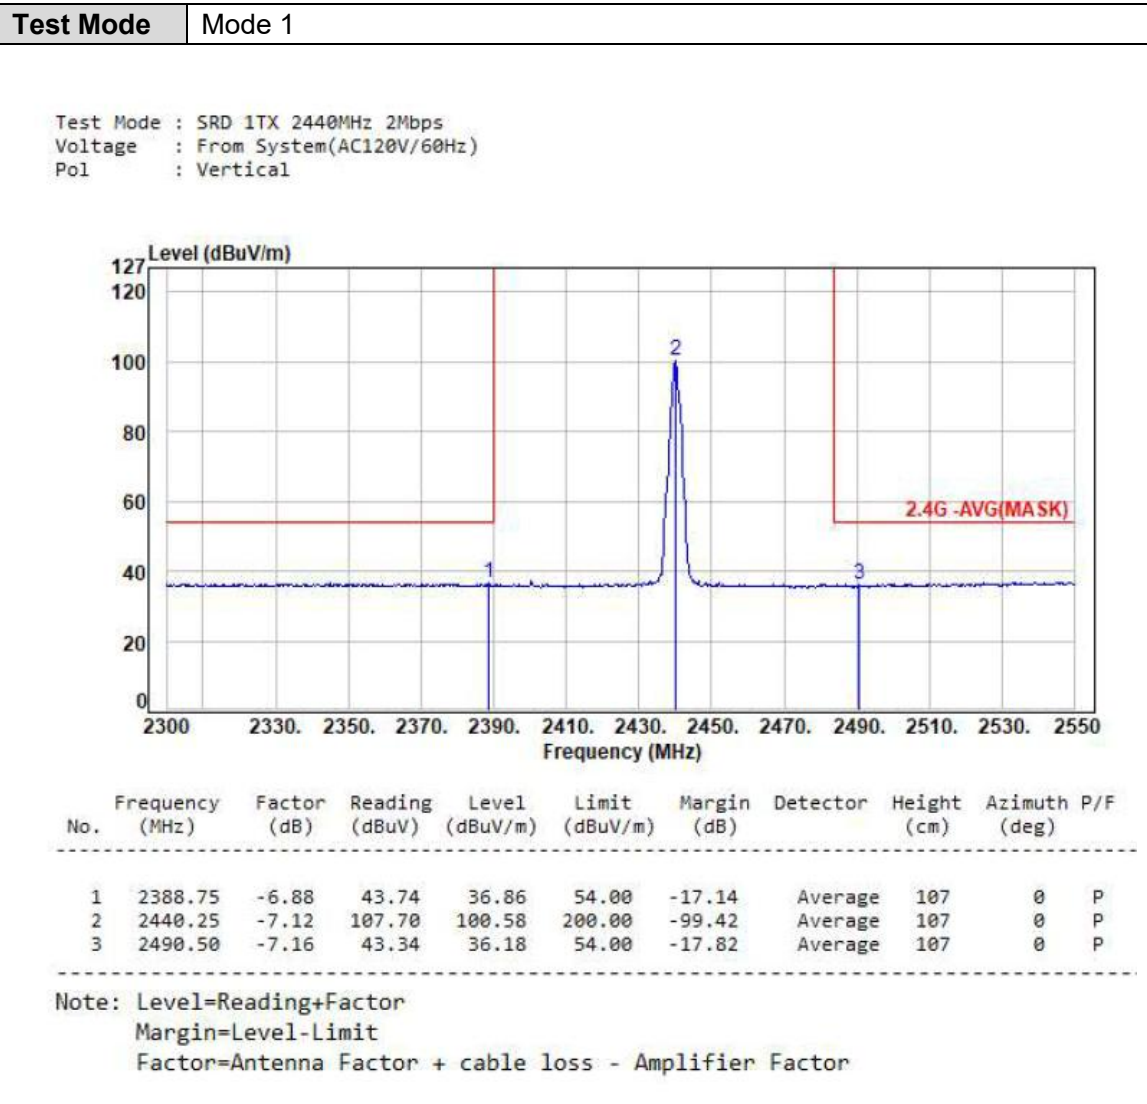


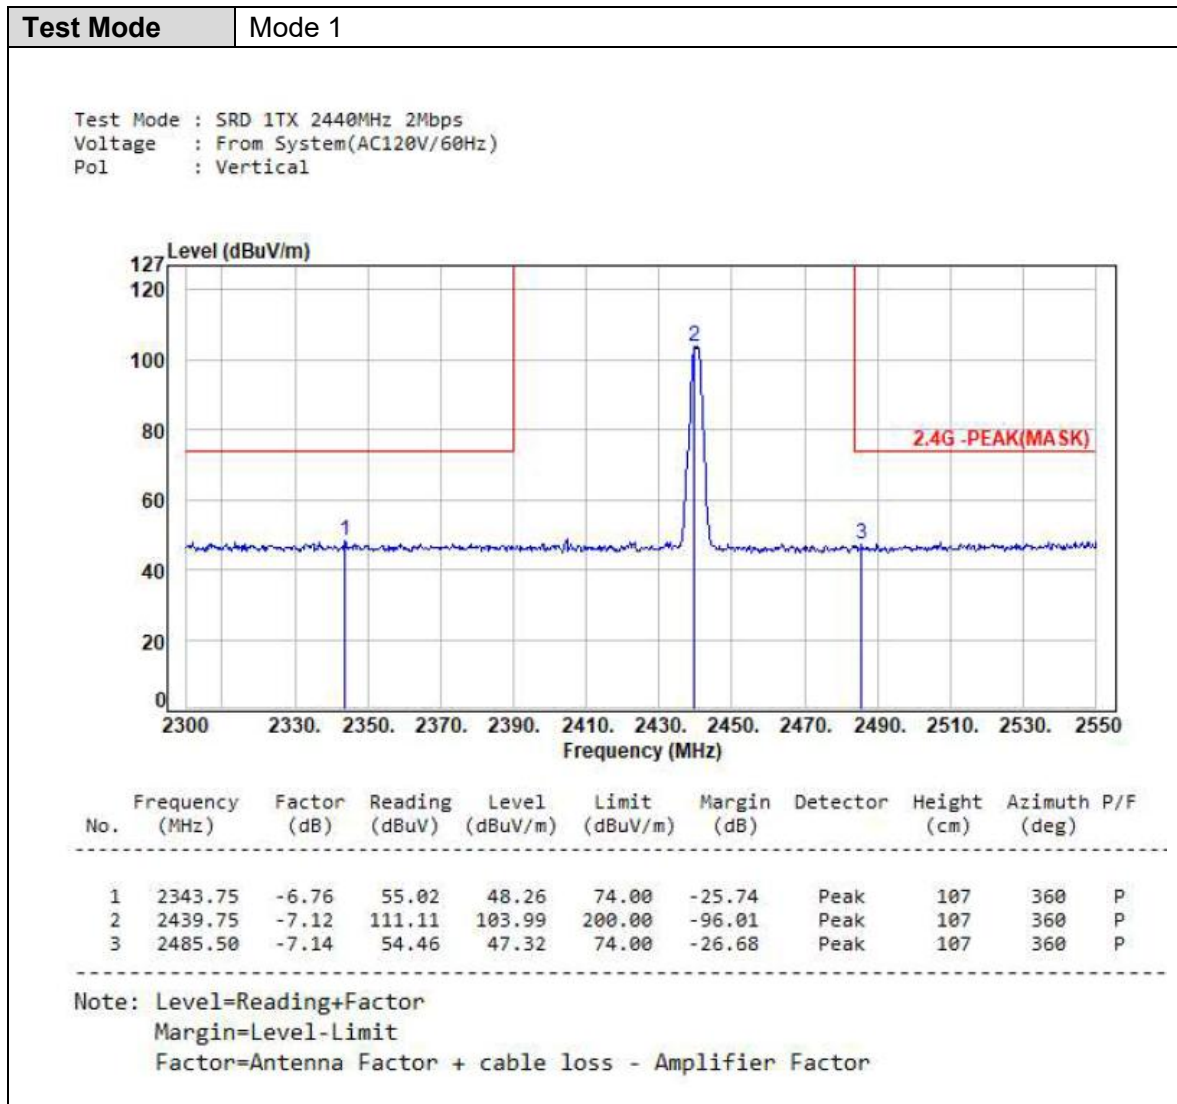


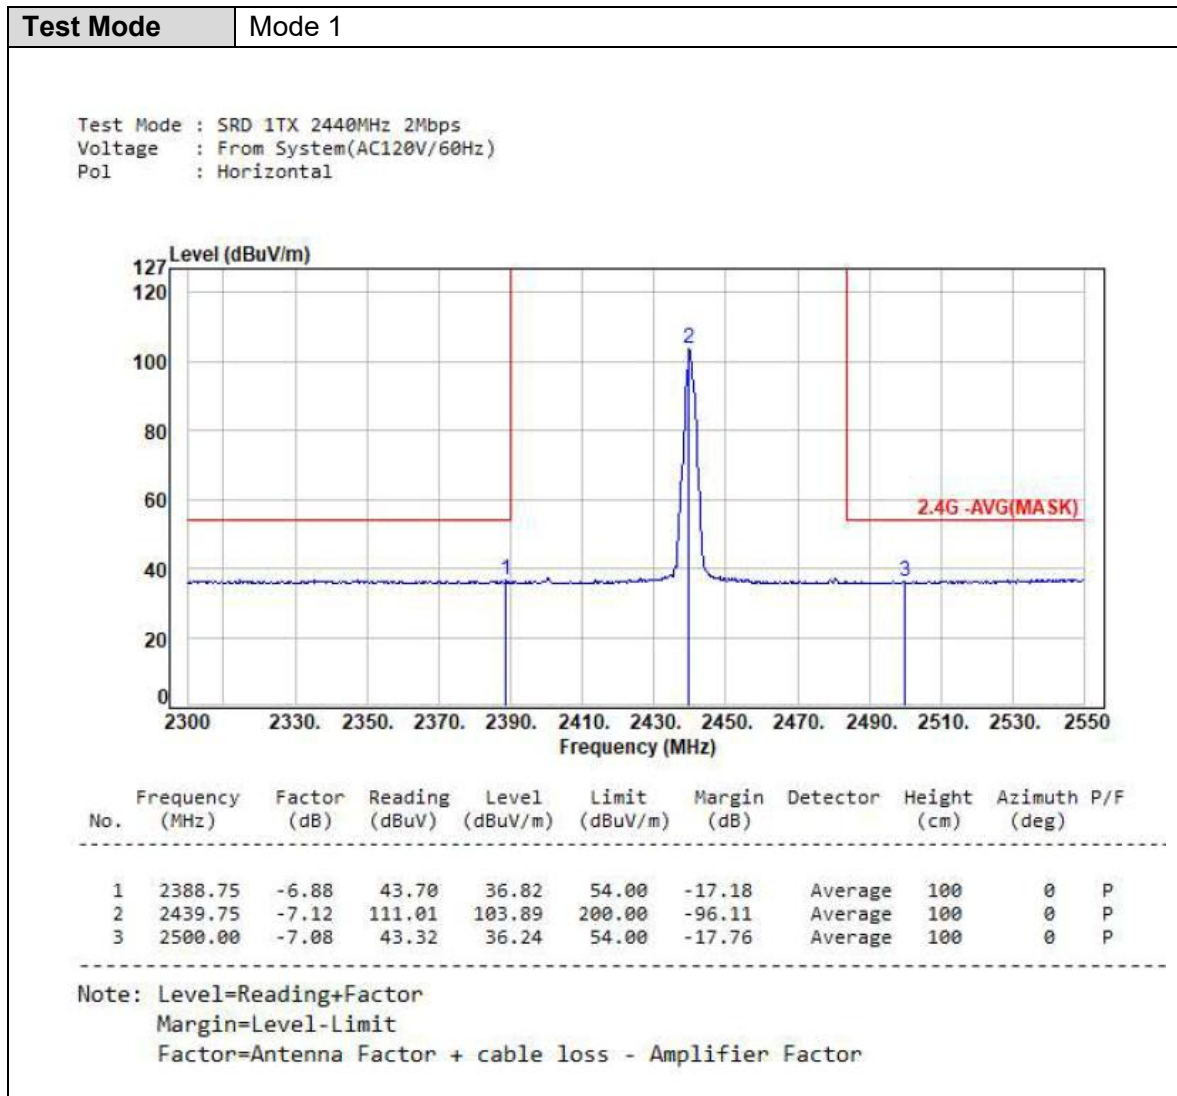


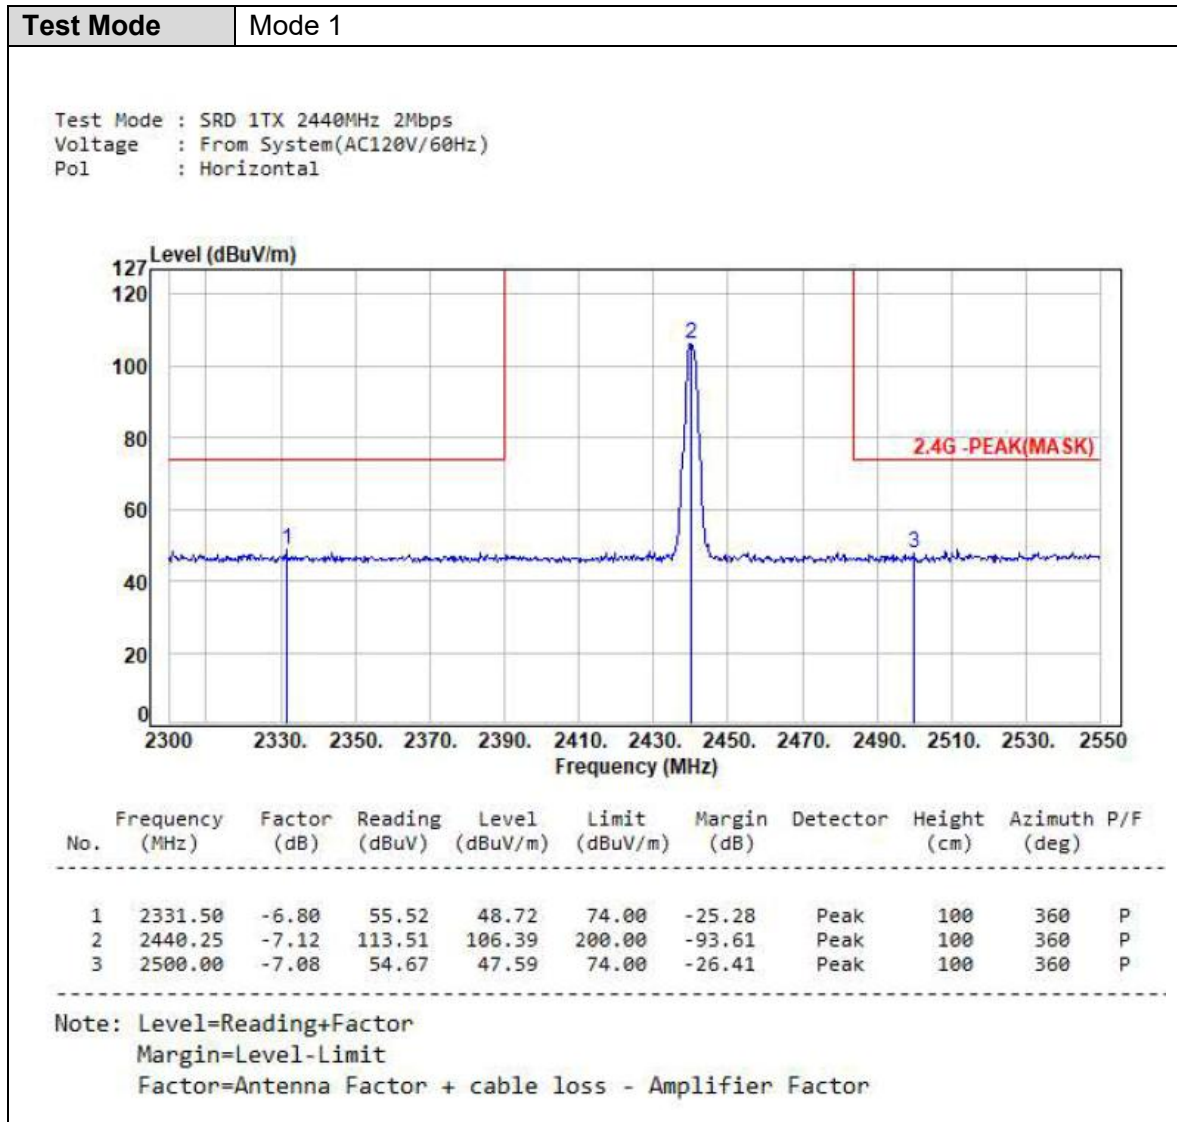

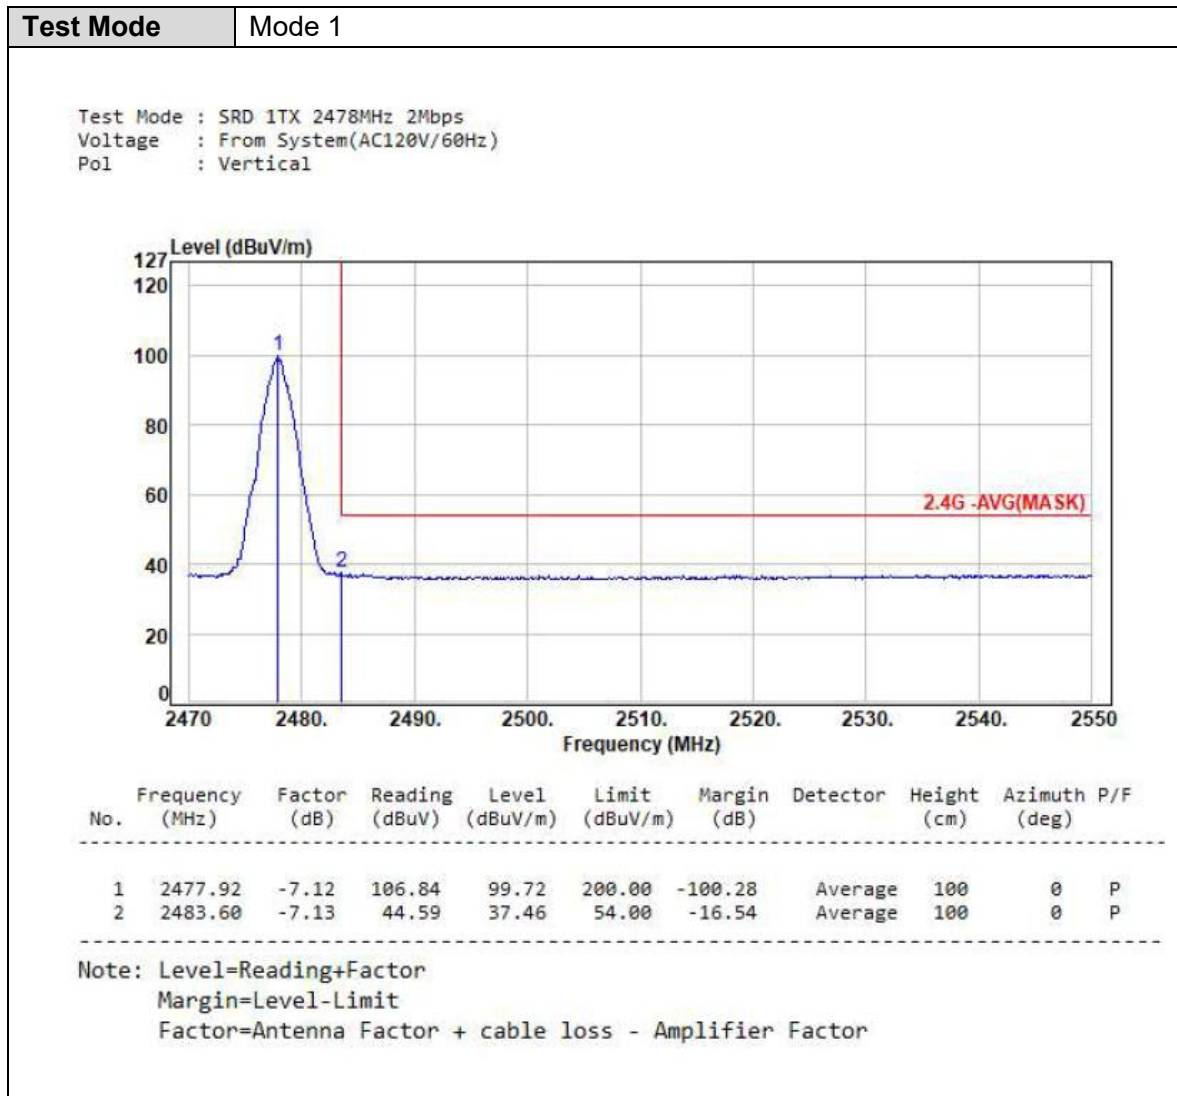

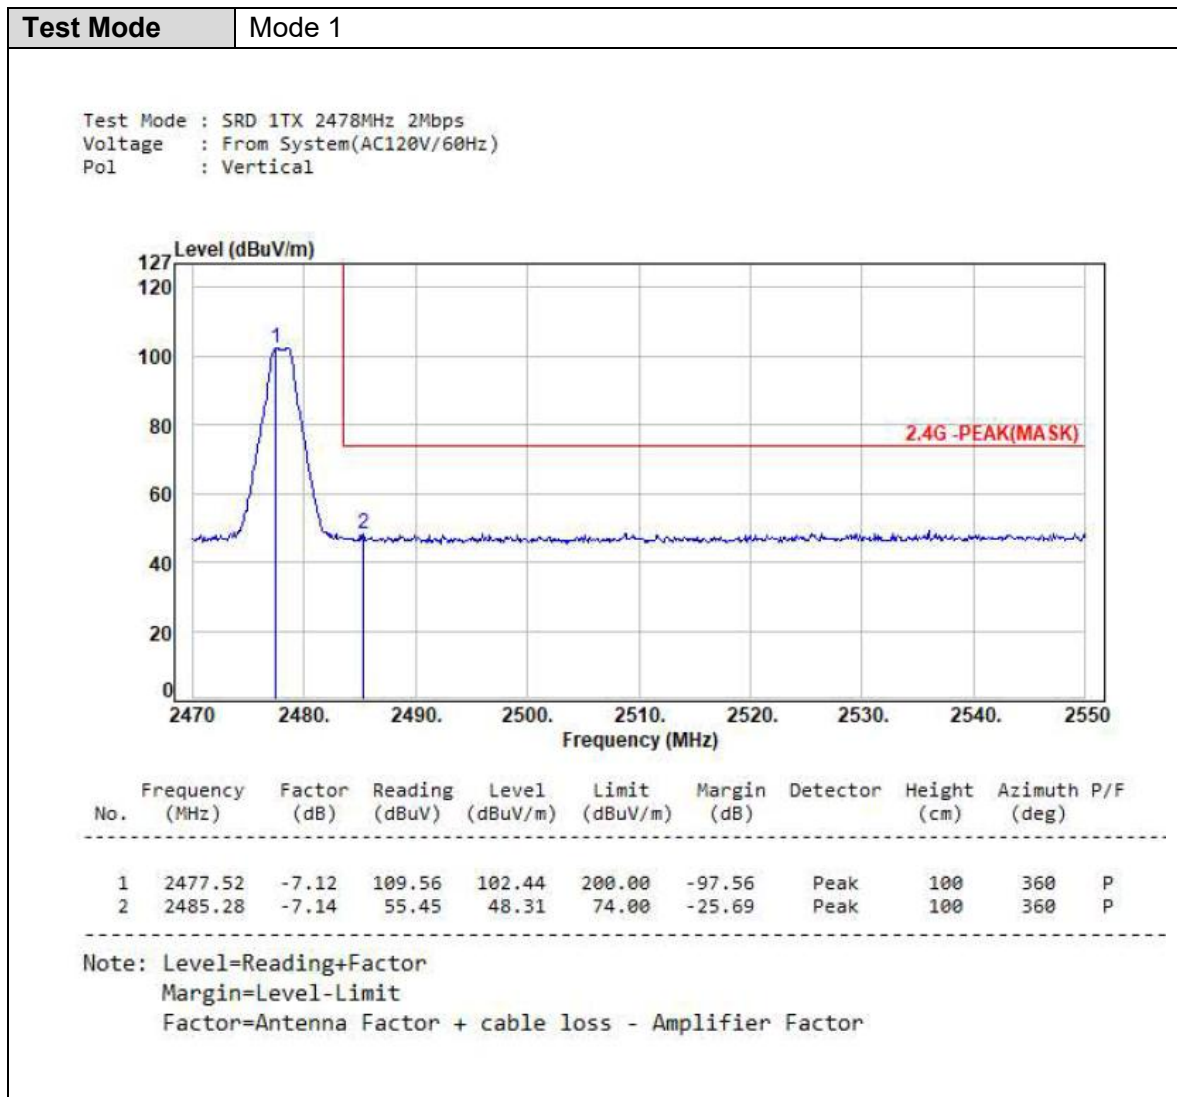

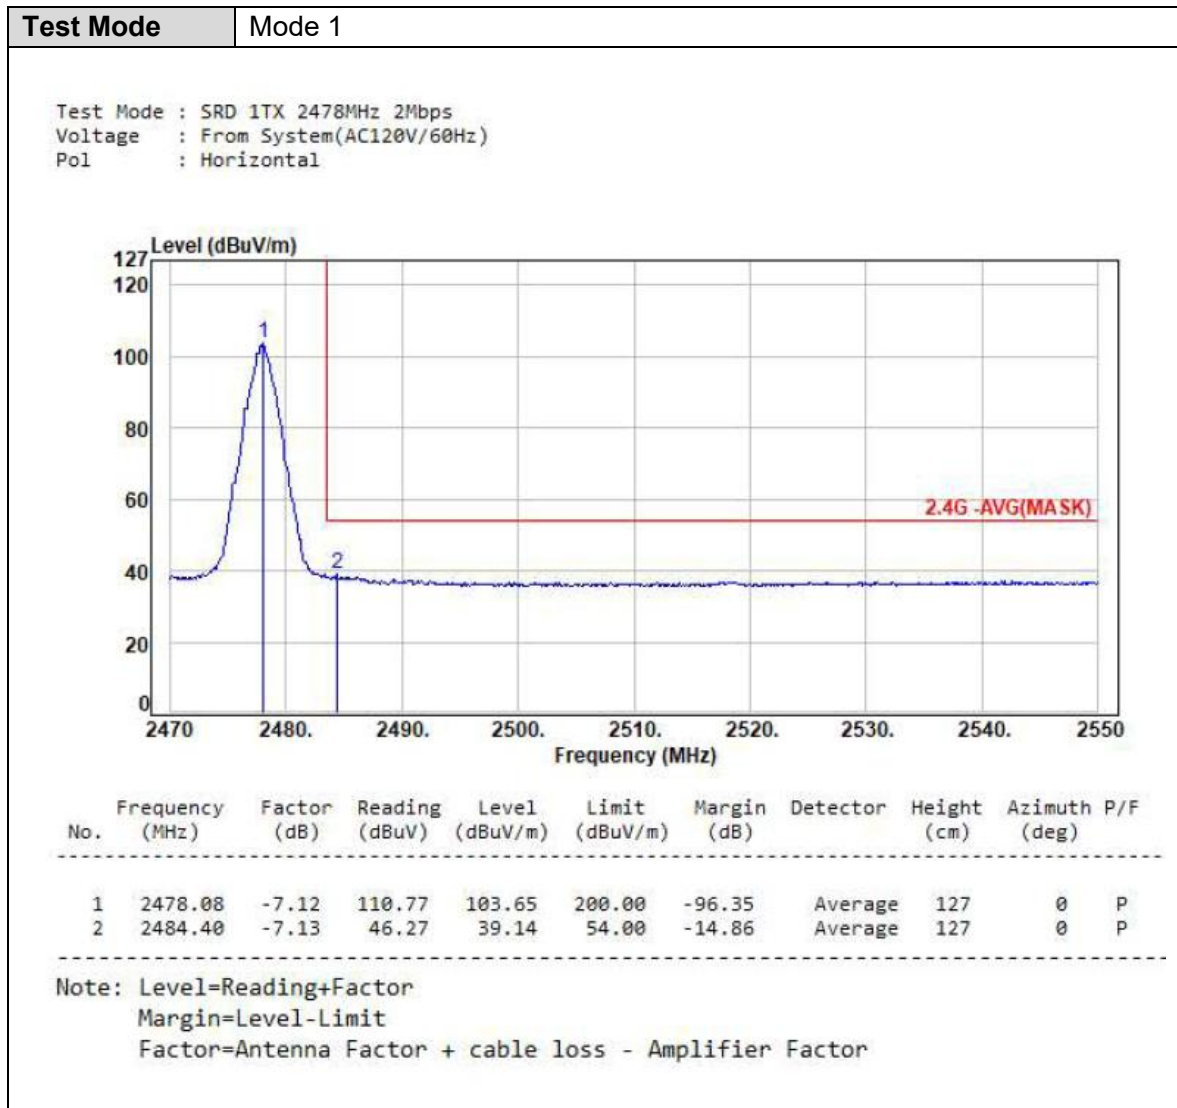

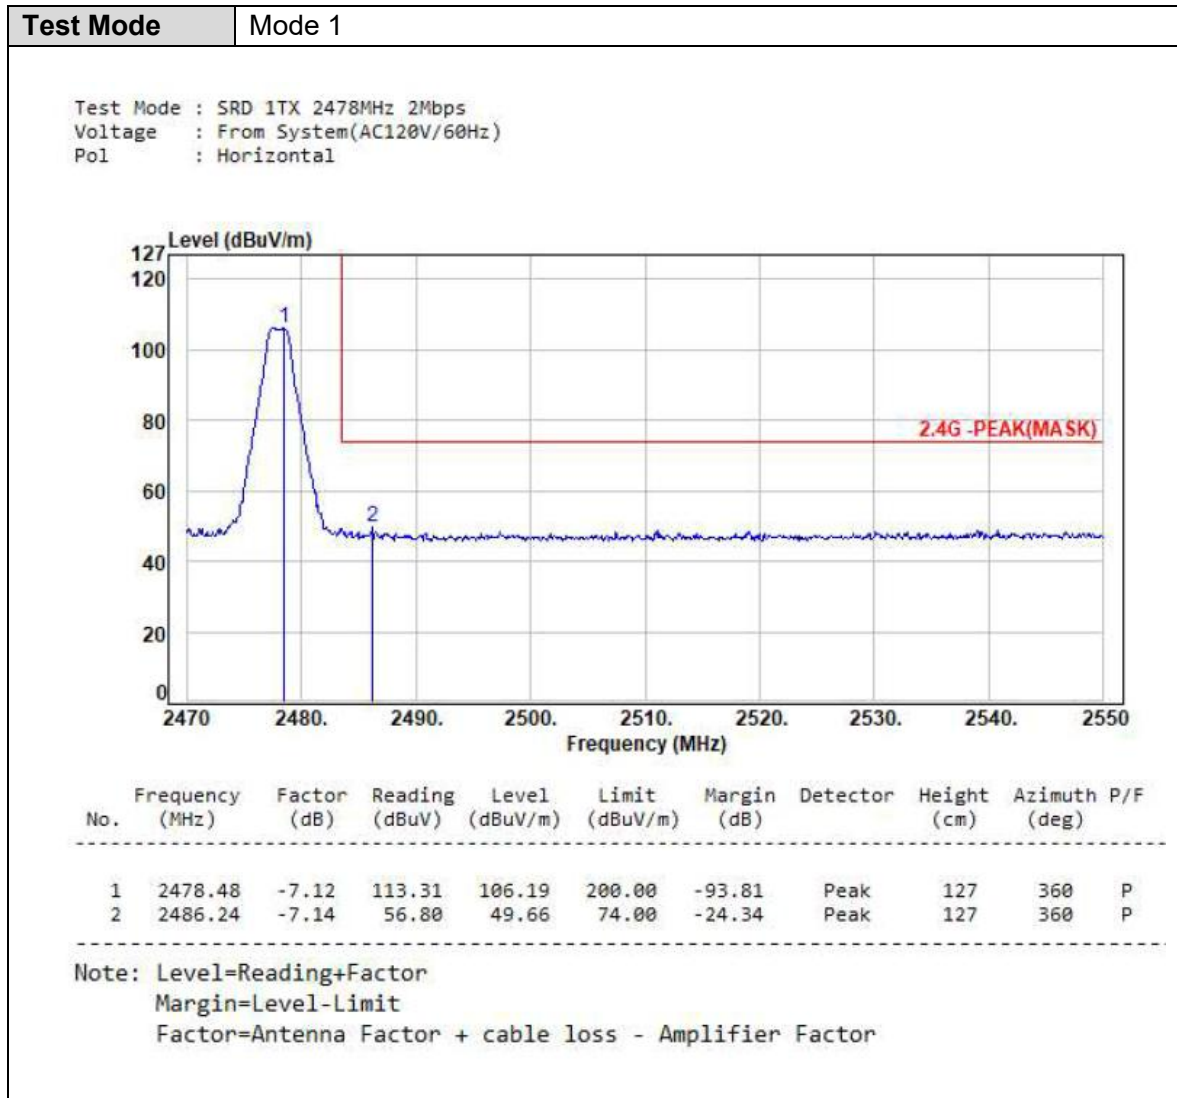



6.7 Test Result and Data (1GHz ~ 3GHz)

