

TEST REPORT

of

FCC Part 15 Subpart C and CANADA RSS-210

Full Modular Approval

☒ New Application; ☐ Class I PC; ☐ Class II PC

Product : Power Pro
Brand: Giant
Model: GT19BTnRF52x
Model Difference: N/A
FCC ID: ZL7-GT20PWRPRO
IC: 9707A-GT20PWRPRO
FCC Rule Part: §15.249
IC Rule Part: RSS-210 issue 9:2017
RSS-Gen issue 5: 2018
Applicant: Giant Manufacturing Co., Ltd.
Address: No. 19, Shun-Farn Road, Tachia Area,
Taichung City, 43774, Taiwan, R.O.C

Test Performed by:
International Standards Laboratory Corp.

<LT Lab.>

*Site Registration No.

BSMI: SL2-IN-E-0013; MRA TW0997; TAF: 0997; IC: IC4067B-4 ;

*Address:

No. 120, Lane 180, Hsin Ho Rd.

Lung-Tan Dist., Tao Yuan City 325, Taiwan

*Tel : 886-3-407-1718; Fax: 886-3-407-1738

Report No.: ISL-19LR065FCDXX

Issue Date : 2019/04/08



Test results given in this report apply only to the specific sample(s) tested and are traceable to national or international standard through calibration of the equipment and evaluating measurement uncertainty herein.

This report MUST not be used to claim product endorsement by TAF, NVLAP or any agency of the Government.

This test report shall not be reproduced except in full, without the written approval of International Standards Laboratory Corp.

VERIFICATION OF COMPLIANCE

Applicant: Giant Manufacturing Co., Ltd.
Product Description: Power Pro
Brand Name: Giant
Model No.: GT19BTnRF52x
Model Difference: N/A
FCC ID: ZL7-GT20PWRPRO
IC: 9707A-GT20PWRPRO
Date of test: 2019/03/11 ~ 2019/04/03
Date of EUT Received: 2019/03/11

We hereby certify that:

All the tests in this report have been performed and recorded in accordance with the standards described above and performed by an independent electromagnetic compatibility consultant, International Standards Laboratory Corp.

The test results contained in this report accurately represent the measurements of the characteristics and the energy generated by sample equipment under test at the time of the test. The sample equipment tested as described in this report is in compliance with the limits of above standards.

Test By:

Barry Lee

Date:

2019/04/08

Barry Lee / Senior Engineer

Prepared By:

Gigi yeh

Date:

2019/04/08

Gigi Yeh / Senior Engineer

Approved By:

Dino Chen

Date:

2019/04/08

Dino Chen / Senior Engineer

Version

Version No.	Date	Description
00	2019/04/08	Initial creation of document

Table of Contents

1.	General Information.....	5
1.1.	Product Description.....	5
1.2.	Related Submittal(s) / Grant (s)	6
1.3.	Test Methodology	6
1.4.	Test Facility.....	6
1.5.	Special Accessories.....	6
1.6.	Equipment Modifications.....	6
2.	System Test Configuration.....	7
2.1.	EUT Configuration	7
2.2.	EUT Exercise	7
2.3.	Test Procedure.....	7
2.4.	Limitation.....	8
2.5.	Configuration of Tested System.....	10
3.	Summary of Test Results.....	11
4.	Conducted Emissions Test	12
4.1	Measurement Procedure:.....	12
4.2	Test SET-UP (Block Diagram of Configuration)	12
4.3	Measurement Equipment Used:	12
4.4	Measurement Result:.....	12
5.	Radiated Emission Test	15
5.1	Measurement Procedure.....	15
5.2	Test SET-UP (Block Diagram of Configuration)	15
5.3	Measurement Equipment Used:	16
5.4	Field Strength Calculation	17
5.5	Measurement Result.....	18
6.	20 dB Band Width Measurement	22
6.1	Measurement Procedure.....	22
6.2	Test SET-UP (Block Diagram of Configuration)	22
6.3	Measurement Equipment Used:	22
6.4	Measurement Results:	22
7.	99% Band Width Measurement	24
7.1	Measurement Procedure.....	24
7.2	Test SET-UP (Block Diagram of Configuration)	24
7.3	Measurement Equipment Used:	24
7.4	Measurement Results:	24
	PHOTOGRAPHS OF SETUP	26
	PHOTOGRAPHS OF EUT	31

1. General Information

1.1. Product Description

General:

Product Name	Power Pro
Brand Name	SECURIFI
Model Name	GT19BTnRF52x
Model Difference	N/A
Power Supply	5Vdc from USB or 3.7Vdc battery

IC RSS-Gen:

Product SW/HW version	HW: V2.03; SW: V1.04
Radio SW/HW version	HW: V2.03; SW: V1.04
PMN (Product Marketing Name)	GT19BTnRF52x
HVIN (Hardware Version Identification Number)	GT19BTnRF52x
FVIN (Firmware Version Identification Number)	N/A
Test SoftWare Version	HCITester 2.1.00
RF power setting:	0

Ant+ Transceiver 1TX / 1RX

Frequency Range(MHz)	2457MHz
Modulation type	GFSK
Channel Number	1
Measured Power	82.94dBuV/m at 3 m
Antenna Designation:	Chip Antenna / 5.05 dBi

This report applies for Ant+.

1.2. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: ZL7-GT20PWRPRO** filing to comply with Section 15.249 of the FCC Part 15, Subpart C Rules and **IC: 9707A-GT20PWRPRO** filing to comply with Industry Canada RSS-210 issue 2: 2017

1.3. Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.10: 2013 and RSS-Gen issue5: 2018. Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4. Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of **International Standards Laboratory Corp** <LT Lab.> No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist., Tao Yuan City 325, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.10: 2013. FCC Registration Number is: 487532; Designation Number is: TW0997, Canada Registration Number: 4067B-4.

1.5. Special Accessories

Not available for this EUT intended for grant.

1.6. Equipment Modifications

Not available for this EUT intended for grant.

2. System Test Configuration

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The Transmitter was operated in the engineering operating mode. the Tx frequency was fixed at 2457MHz which were for the purpose of the measurements.

2.3. Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 6 of ANSI C63.10: 2013 and RSS-Gen issue5: 2018. Con-ducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR 16-1-1 Quasi-Peak and Average detector mode.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m/1.5m(Frequency above 1GHz) above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 6 and 11 of ANSI C63.10: 2013.

2.4. Limitation

(1) Conducted Emission

According to §15.207 and RSS-Gen §7.2.4, frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range MHz	Limits dB(uV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Note 1.The lower limit shall apply at the transition frequencies 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.		

(2) Radiated Emission 15.249(a) and RSS-210 issue 9,§B.10(a)

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following.

Frequency (MHz)	Field strength of Fundamental	Field strength of Harmonics	Distance (m)
902 - 928	50 mV/m (94dBuV/m)	500 uV/m (54dBuV/m)	3
2400 – 2483.5	50 mV/m (94dBuV/m)	500 uV/m (54dBuV/m)	3
5725 – 5875	50 mV/m (94dBuV/m)	500 uV/m (54dBuV/m)	3

(3) Radiated Emission 15.249 (d) and RSS-210 issue 9, §B.10(b)

Emission Radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in Section 15.209 and RSS-Gen as below, whichever is the lesser attenuation.

Frequency (MHz)	Field strength $\mu\text{V/m}$	Distance (m)	Field strength at 3m $\text{dB}\mu\text{V/m}$
1.705-30	30	30	69.54
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

(4) Radiated Emission 15.249(e) and RSS-Gen

For frequencies above 1000MHz, the above field strength limits are based on average limits. The peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20dB under any condition of modulation.

- Remark:
1. Emission level in $\text{dB}\mu\text{V/m} = 20 \log (\mu\text{V/m})$
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
 3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of § 15.205
 4. Emission spurious frequency which appearing within the Restricted Bands specified in provision of § 15.205, then the general radiated emission limits in § 15.209 apply.

2.5. Configuration of Tested System

Fig. 1 Configuration of Tested System

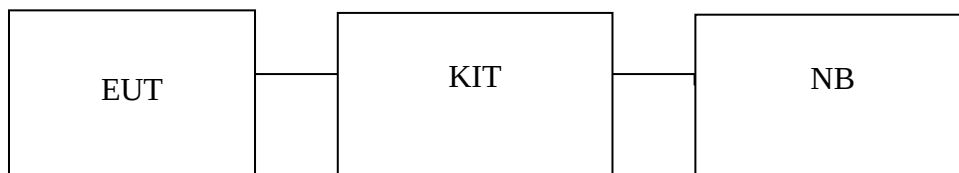


Table 1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.	Data Cable	Power Cord
1	NB	HP	440-G1	NA	shielding	Non-shielding

Note: All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.

Grounding: Grounding was in accordance with the manufacturer's requirements and conditions for the intended use.

3. Summary of Test Results

FCC Rules	Description Of Test	Result
§15.207/ RSS-Gen §7.2.2	Conducted Emission	Compliant
§15.249(a)(d)(e) RSS-210 issue 9, §B.10(a)(b)	Field Strength Measurement	Compliant
§15.215(c)	20dB band width Measurement	Compliant
RSS-Gen §4.6.1	99% Power Bandwidth	Compliant

Description of test modes

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receive mode is programmed.


Channel (2457MHz) with highest data rate are chosen for full testing.

4. Conducted Emissions Test

4.1 Measurement Procedure:

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

4.2 Test SET-UP (Block Diagram of Configuration)

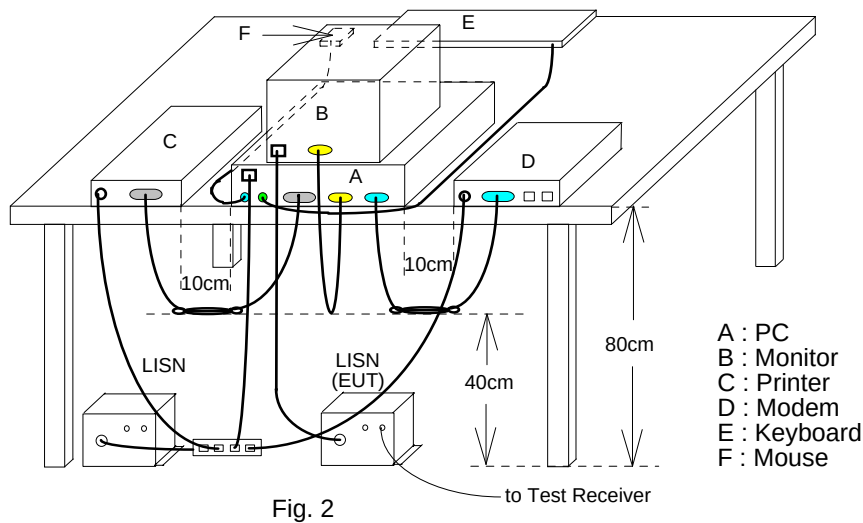

4.3 Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Conduction 04-3 Cable	WOKEN	CFD 300-NL	Conduction 04 -3	08/30/2018	08/29/2019
EMI Receiver 16	Rohde & Schwarz	ESCI	101221	11/17/2018	11/16/2019
LISN 18	ROHDE & SCHWARZ	ENV216	101424	05/31/2018	05/30/2019
LISN 03	ROHDE & SCHWARZ	ESH3-Z5	828874/010	07/22/2018	07/21/2019
Test Software	Farad	EZEMC Ver:ISL-03A2	N/A	N/A	N/A

4.4 Measurement Result:

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Note: Refer to next page for measurement data and plots.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	Normal Operation	Test Date:	2019/03/29
Test By:	Barry		




Address: No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist.,
Tao Yuan City 325, Taiwan.
Tel: 03-4071718

Conducted Emission Measurement

Date: 2019/3/29

operator: Kevin Chan
Temperature: 26 °C
Humidity: 60 %

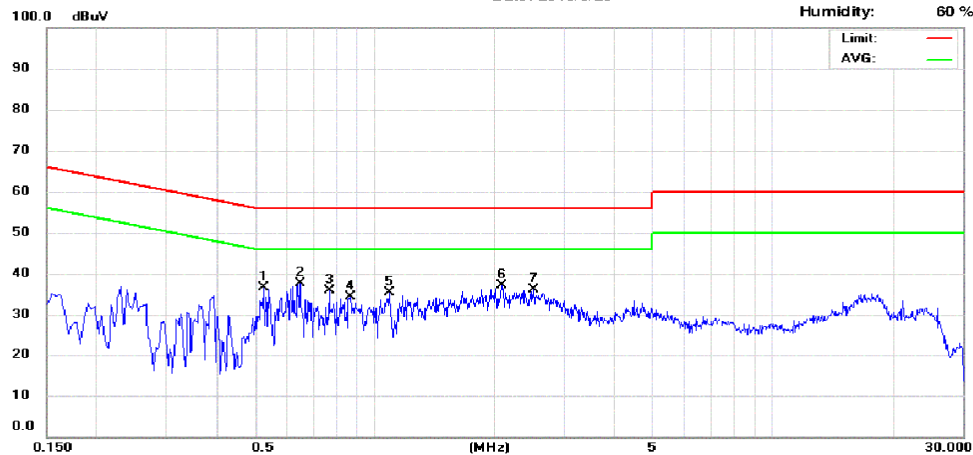

Site: Conduction 02

Phase: L1

CISPR22 Class B Conduction

No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	0.526	24.34	9.03	9.64	33.98	56.00	-22.02	18.67	46.00	-27.33
2	0.650	24.27	11.58	9.64	33.91	56.00	-22.09	21.22	46.00	-24.78
3	0.770	20.99	13.10	9.65	30.64	56.00	-25.36	22.75	46.00	-23.25
4	0.870	20.35	14.04	9.65	30.00	56.00	-26.00	23.69	46.00	-22.31
5	1.090	19.58	12.10	9.65	29.23	56.00	-26.77	21.75	46.00	-24.25
6	2.086	22.24	16.52	9.69	31.93	56.00	-24.07	26.21	46.00	-19.79
7	2.506	21.86	15.74	9.70	31.56	56.00	-24.44	25.44	46.00	-20.56



Address: No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist.,
Tao Yuan City 325, Taiwan.
Tel: 03-4071718


Conducted Emission Measurement

Date: 2019/3/29

operator: Kevin Chan

Temperature: 26 °C

Humidity: 60 %

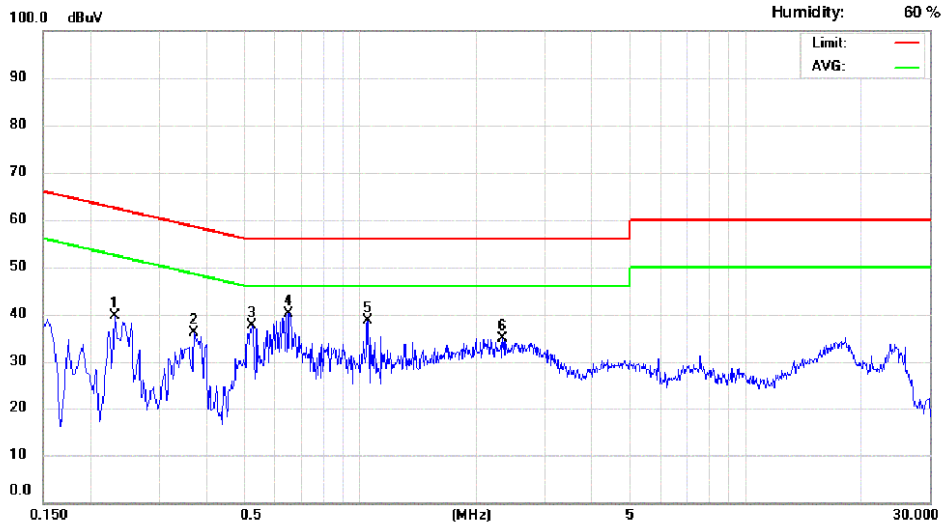

Site: Conduction 02

Phase: **N**

CISPR22 Class B Conduction

No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	0.230	26.61	8.94	9.64	36.25	62.45	-26.20	18.58	52.45	-33.87
2	0.370	21.00	7.34	9.64	30.64	58.50	-27.86	16.98	48.50	-31.52
3	0.522	43.26	12.27	9.65	52.91	56.00	-3.09	21.92	46.00	-24.08
4	0.654	27.48	14.55	9.65	37.13	56.00	-18.87	24.20	46.00	-21.80
5	1.046	23.48	11.89	9.67	33.15	56.00	-22.85	21.56	46.00	-24.44
6	2.342	20.96	15.16	9.72	30.68	56.00	-25.32	24.88	46.00	-21.12


5. Radiated Emission Test

5.1 Measurement Procedure


1. The EUT was placed on a turntable that is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured were complete.

5.2 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

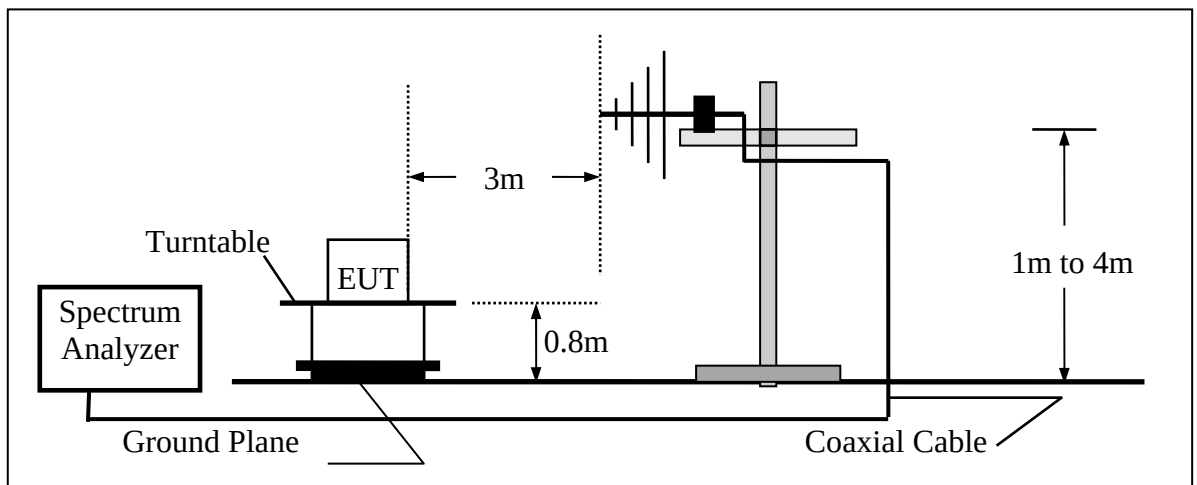

(B) Radiated Emission Test Set-Up Frequency Over 1 GHz

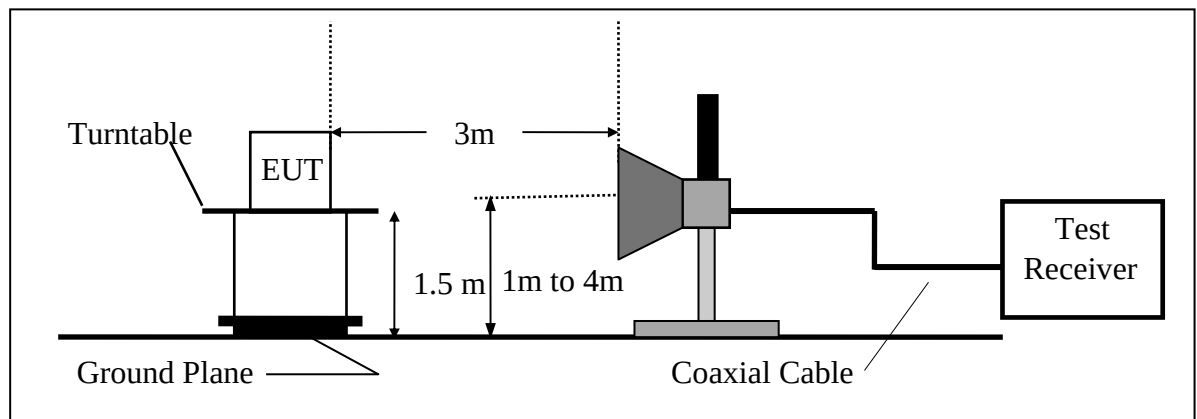

5.3 Measurement Equipment Used:

Chamber 19(966)					
Equipment Type	MFR	Model Number	Serial Number	Last Cal.	Cal Due.
966 Chamber	Chance Most	Chamber 19	N/A	08/13/2018	08/12/2019
Spectrum Analyzer 21(3Hz-44GHz)	Agilent	N9030A	MY51360021	11/18/2018	11/17/2019
EMI Receiver	SCHWARZBECK	FCVU1534	1534149	12/06/2018	12/05/2019
Loop Antenna(9K-30M)	EM	EM-6879	271	06/06/2018	06/05/2020
Bilog Antenna (30M-1G)	SCHWARZBECK	VULB9168 w 5dB Att	736	10/30/2018	10/29/2019
Horn antenna (1G-18G)	SCHWARZBECK	9120D	9120D-1627	11/27/2017	11/26/2019
Horn antenna (18G-26G)	Com-power	AH-826	081001	11/21/2017	11/20/2019
Horn antenna (26G-40G)	Com-power	AH-640	100A	02/22/2019	02/21/2020
Preamplifier (9k-1000M)	HP	8447F	3113A06362	01/14/2019	01/13/2020
Preamplifier(1G-26G)	Agilent	8449B	3008A02471	10/29/2018	10/28/2019
Preamplifier (26G-40G)	MITEQ	JS4-26004000- 27-5A	818471	11/20/2017	07/21/2019
RF Cable (9k-18G)	HUBER SUHNER	SUCOFLEX 104A	MY1397/4A	11/12/2018	11/11/2019
RF cable (18G~40G)	HUBER SUHNER	Sucoflex 102	27963/2&37421/2	11/12/2018	11/11/2019
Turn Table	MF	Turn Table-19	Turn Table-19	N/A	N/A
Mast Tower	MF	JSDS-15A	1308283	N/A	N/A
Controller	MF	MF-7802BS	MF780208460	N/A	N/A
AC power source	T-Power	TFC-1005	40006471	N/A	N/A
Signal Generator	R&S	SMU200A	102330	03/14/2019	03/13/2020
Signal Generator	Anritsu	MG3692A	20311	01/09/2019	01/08/2020
2.4G Filter	Micro-Tronics	Brm50702	76	12/25/2018	12/24/2019
Test Software	Audix	E3 Ver:6.12023	N/A	N/A	N/A

5.4 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

5.5 Measurement Result

Fundamental Emission Measurement Result

Operation Mode : TX mode
Fundamental Frequency : 2457 MHz
Temp : 25 °C

Test Date : 2019/03/26
Test By : Barry
Hum. : 60%

CH Low:

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2456.99	98.65	-15.71	82.94	114.00	-31.06	Peak	VERTICAL
1	2456.97	105.69	-15.71	89.98	114.00	-24.02	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 10KHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode TX CH Low
Fundamental Frequency 2457 MHz
Temperature 25 °C

Test Date 2019/03/26
Test By Barry
Humidity 60 %

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	307.42	34.59	-4.71	29.88	46.00	-16.12	Peak	VERTICAL
2	342.34	31.20	-4.15	27.05	46.00	-18.95	Peak	VERTICAL
3	399.57	30.86	-2.98	27.88	46.00	-18.12	Peak	VERTICAL
4	431.58	29.66	-2.41	27.25	46.00	-18.75	Peak	VERTICAL
5	576.11	30.23	-0.17	30.06	46.00	-15.94	Peak	VERTICAL
6	840.92	28.85	4.22	33.07	46.00	-12.93	Peak	VERTICAL
1	302.57	36.54	-4.77	31.77	46.00	-14.23	Peak	HORIZONTAL
2	399.57	30.44	-2.98	27.46	46.00	-18.54	Peak	HORIZONTAL
3	471.35	30.15	-1.89	28.26	46.00	-17.74	Peak	HORIZONTAL
4	576.11	30.27	-0.17	30.10	46.00	-15.90	Peak	HORIZONTAL
5	747.80	28.84	3.04	31.88	46.00	-14.12	Peak	HORIZONTAL
6	837.04	28.54	4.16	32.70	46.00	-13.30	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 “F” denotes fundamental frequency; “H” denotes harmonics frequency. “S” denotes spurious frequency.
- 4 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 6 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	: TX CH Low	Test Date	: 2019/03/26
Fundamental Frequency	: 2457 MHz	Test By	: Barry
Temp	: 25 °C	Hum.	: 60%

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	4914.00	46.30	-8.99	37.31	74.00	-36.69	Peak	VERTICAL
2	7371.00	43.14	-1.61	41.53	74.00	-32.47	Peak	VERTICAL
1	4914.00	45.82	-8.99	36.83	74.00	-37.17	Peak	HORIZONTAL
2	7371.00	43.55	-1.61	41.94	74.00	-32.06	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 “F” denotes fundamental frequency; “H” denotes harmonics frequency. “S” denotes spurious frequency.
- 4 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 6 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (Band Edge)

Operation Mode : Band Edge Test Date : 2019/03/26
Temp./Hum. : 25 °C / : 60% Test By : Barry

CH Low

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2400.00	61.53	-15.73	45.80	74.00	-28.20	Peak	VERTICAL
2	2457.26	93.10	-15.71	77.39	F	--	Peak	VERTICAL
1	2400.00	58.87	-15.73	43.14	74.00	-30.86	Peak	HORIZONTAL
2	2457.41	100.47	-15.71	84.76	F	--	Peak	HORIZONTAL

CH High

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2456.75	93.03	-15.71	77.32	F	--	Peak	VERTICAL
2	2483.50	57.61	-15.71	41.90	74.00	-32.10	Peak	VERTICAL
1	2456.79	100.49	-15.71	84.78	F	--	Peak	HORIZONTAL
2	2483.50	59.41	-15.71	43.70	74.00	-30.30	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 10MHz.

6. 20 dB Band Width Measurement

6.1 Measurement Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set ETU normal operating mode.
3. Set SPA Center Frequency = fundamental frequency, RBW = 100kHz, VBW = 300kHz, Span = 5MHz.
4. Set SPA Max hold. Mark peak, -20dB.

6.2 Test SET-UP (Block Diagram of Configuration)

Same as 4.2 Radiated Emission Measurement.

6.3 Measurement Equipment Used:

Same as 4.2 Radiated Emission Measurement.


6.4 Measurement Results:

20dB BW = 1.225MHz

Refer to attached data chart.

20dB Band Width test Plot

CH

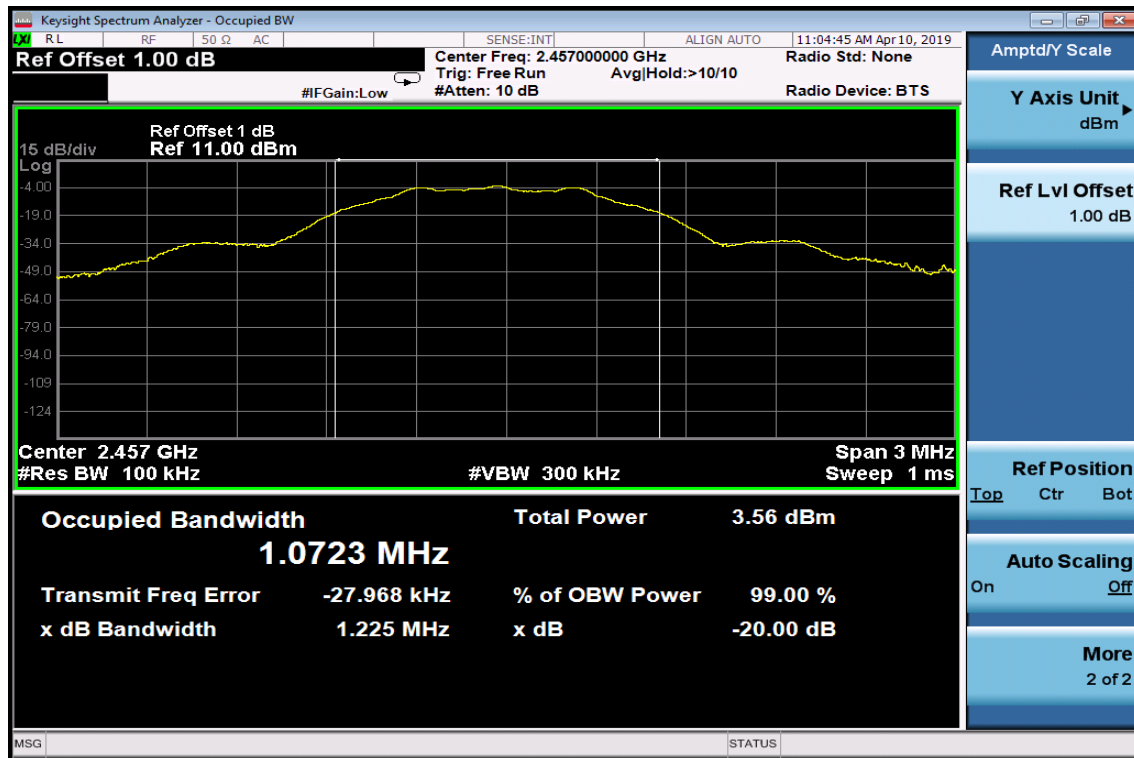

7. 99% Band Width Measurement

7.1 Measurement Procedure

- 1 Place the EUT on the table and set it in transmitting mode.
- 2 Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3 Set the spectrum analyzer as RBW=1% of the approximate emission bandwidth, VBW = 3 times RBW, Span= approximately 20dB below the peak level. Sweep=auto
- 4 Turn on the 99% bandwidth function, max reading.
- 5 Repeat above procedures until all frequency measured were complete.

7.2 Test SET-UP (Block Diagram of Configuration)

Same as 4.2 Radiated Emission Measurement.

7.3 Measurement Equipment Used:

Same as 4.2 Radiated Emission Measurement.


7.4 Measurement Results:

99% OBW = 1.0715MHz

Refer to attached data chart.

99% Band Width test Plot

CH Low

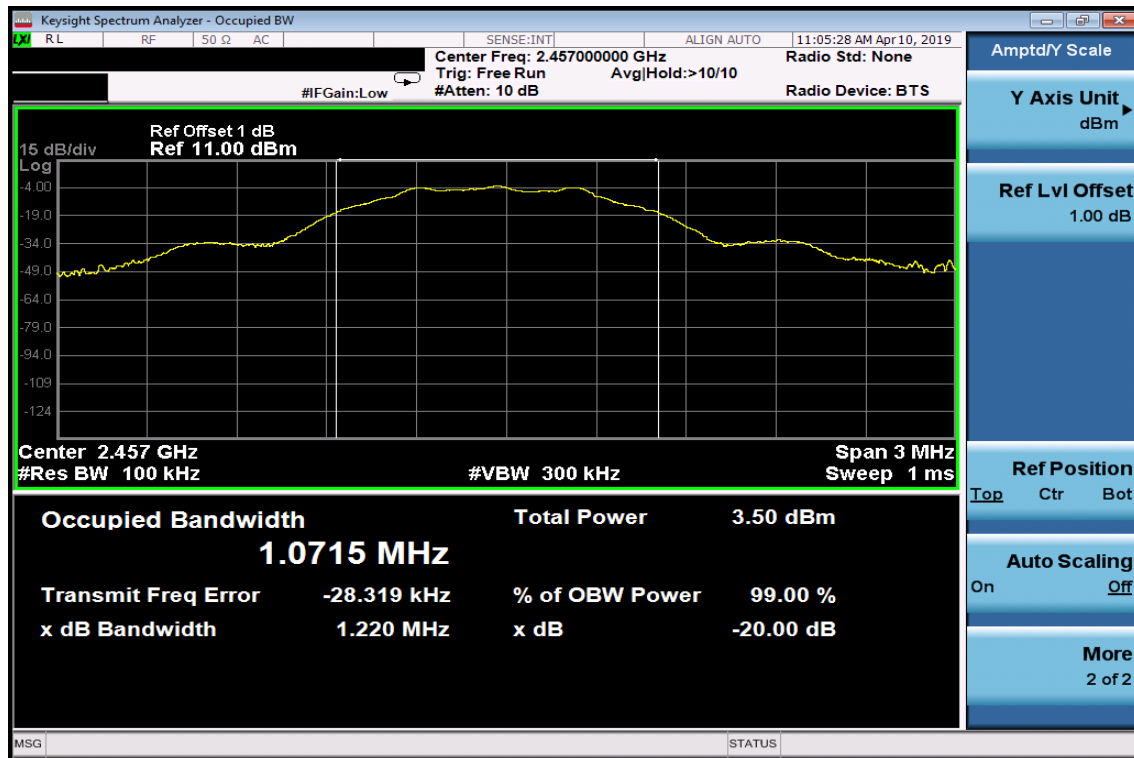


APPENDIX 1


PHOTOGRAPHS OF SETUP


Radiated Emission Setup Photos



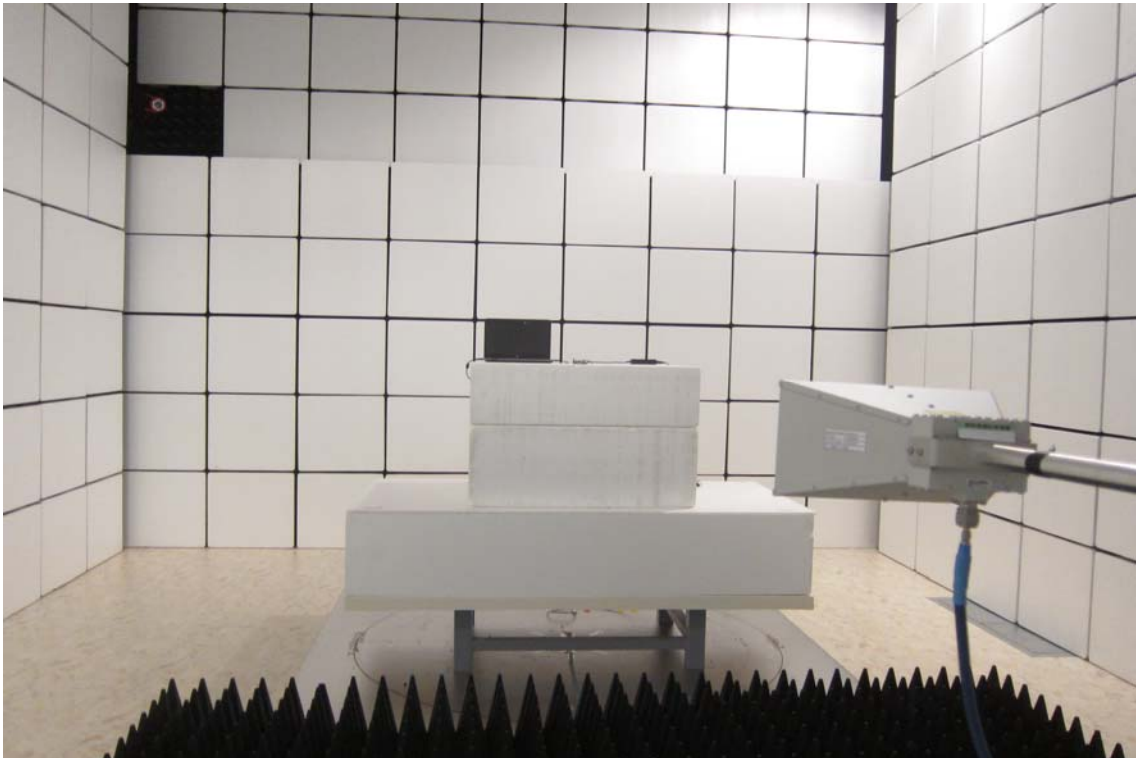

Conducted Emission Setup Photos

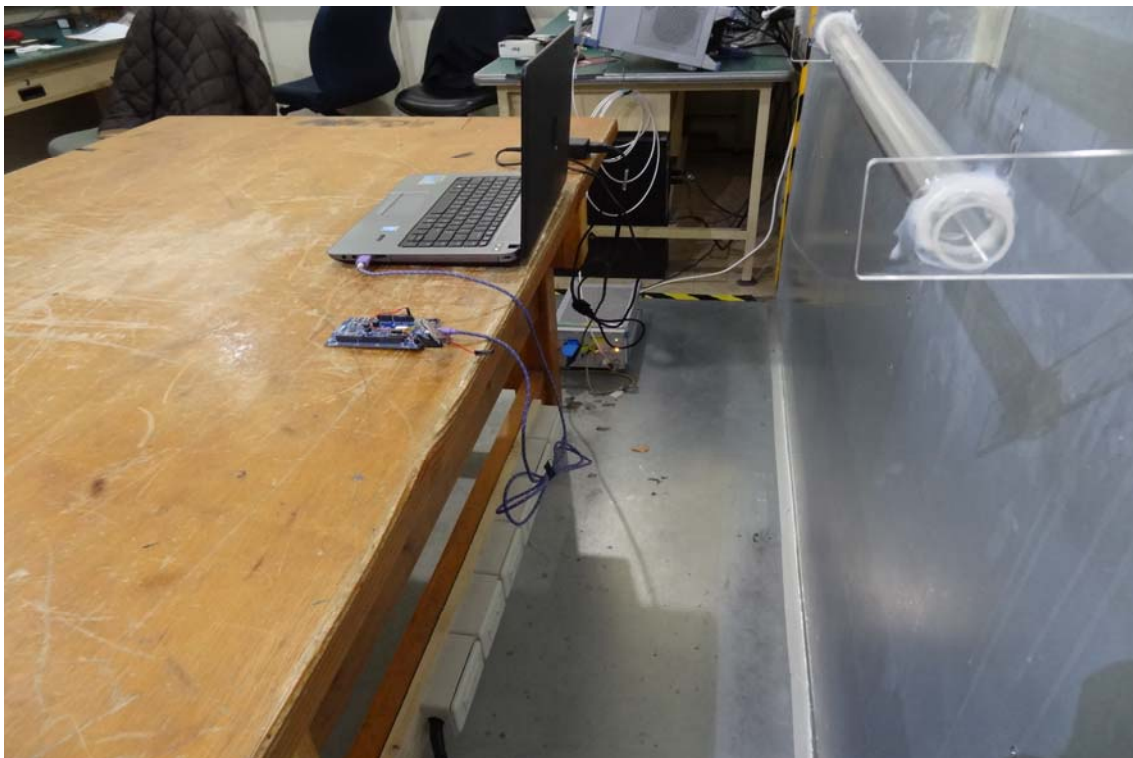


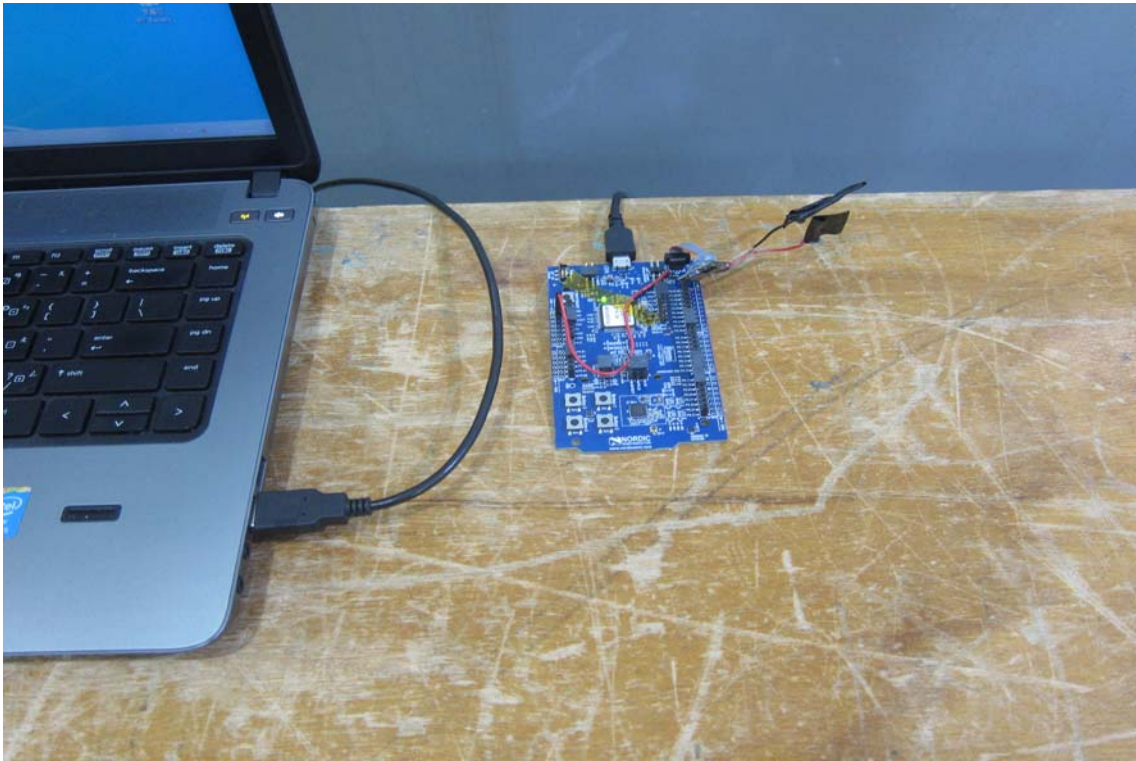


APPENDIX 2

PHOTOGRAPHS OF EUT


EUT 1

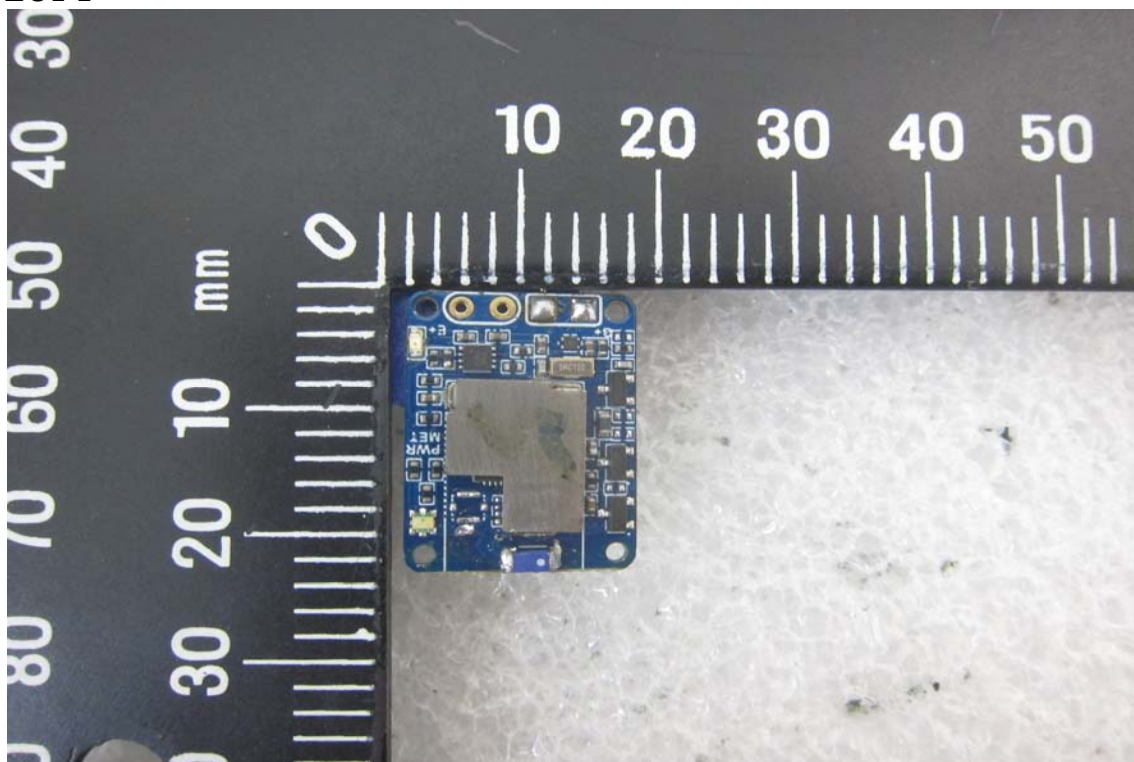

EUT 2

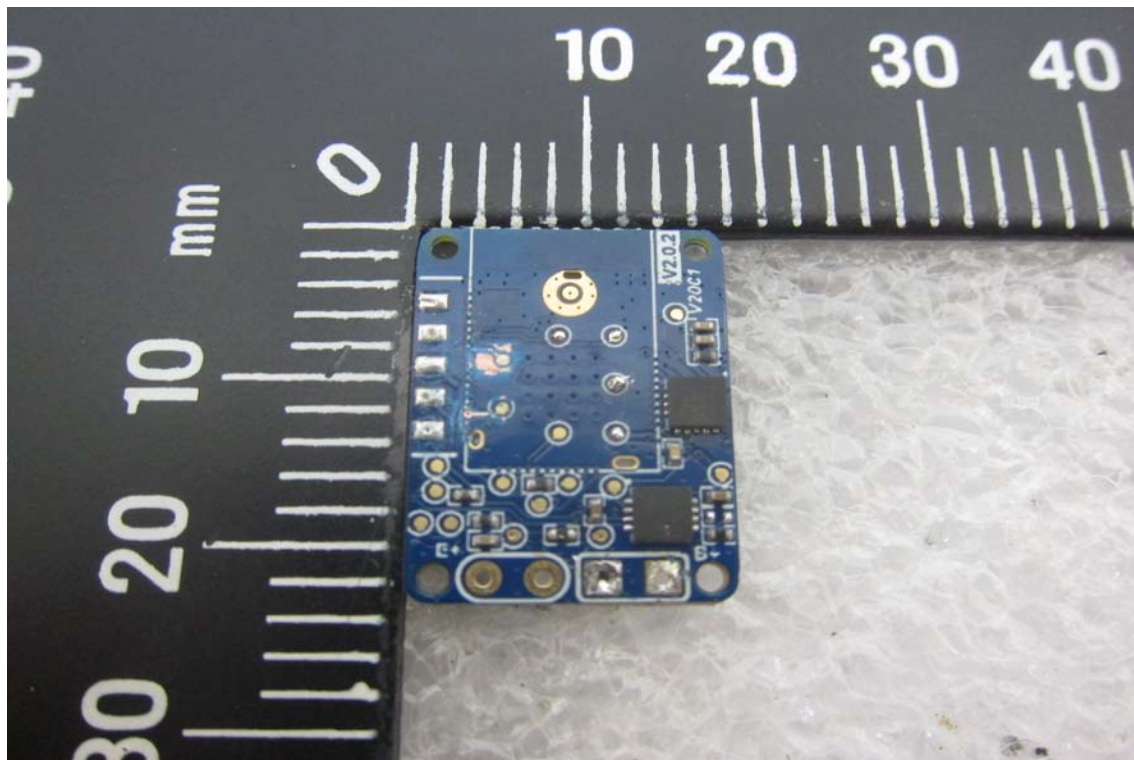

EUT 3

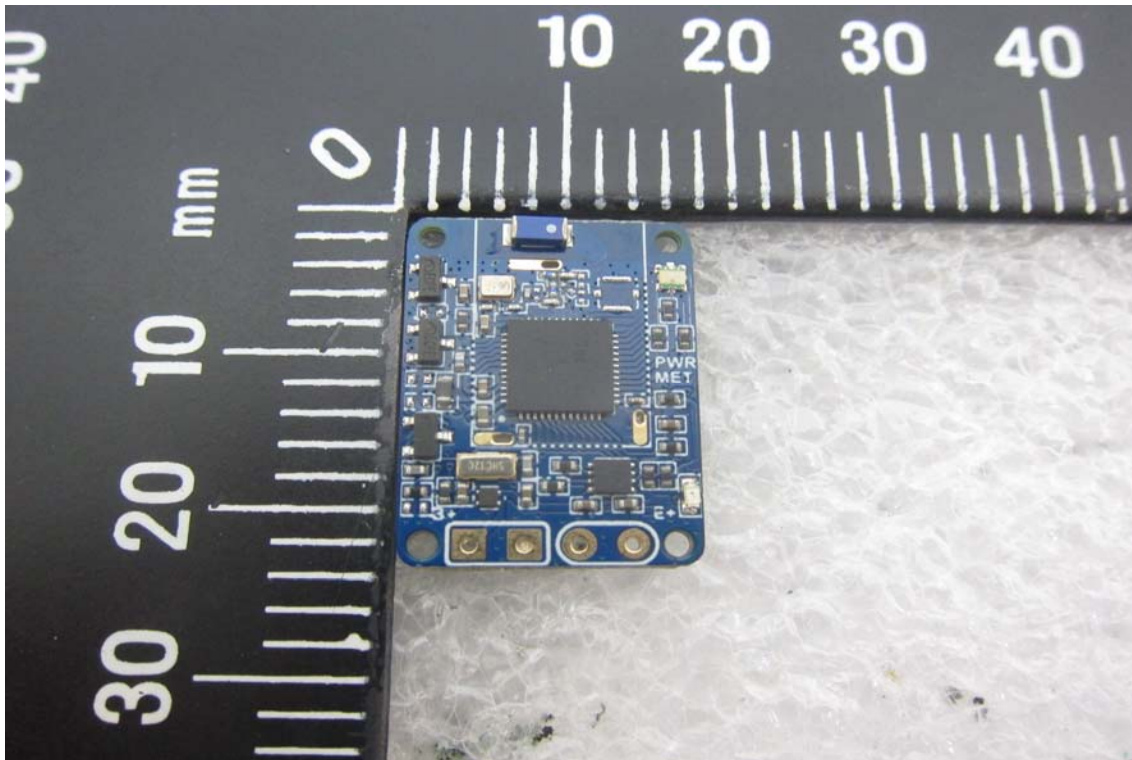

EUT 4



~ End of Report ~