

P01_LTE Band 7_QPSK20M_Rear Face_0cm_Ch21100_1RB_OS0

Communication System: LTE-FDD; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600_0724 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.936$ S/m; $\epsilon_r = 37.776$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6°C; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.31, 7.31, 7.31) @ 2535 MHz; Calibrated: 2024/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1054
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

- **Area Scan (121x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.31 W/kg

- **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.713 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 0.772 W/kg; SAR(10 g) = 0.294 W/kg

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 43.7%

Maximum value of SAR (measured) = 1.45 W/kg

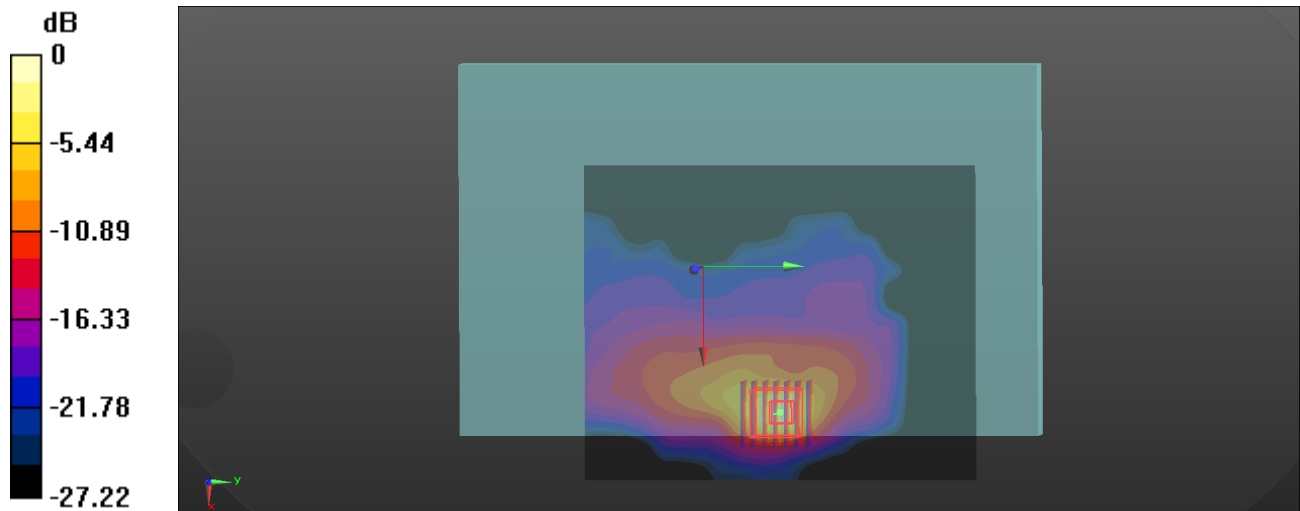

P02_LTE Band 12_QPSK10M_Rear Face_0cm_Ch23130_1RB_OS49

Communication System: LTE-FDD; Frequency: 711 MHz; Duty Cycle: 1:1

Medium: HSL750_0722 Medium parameters used: $f = 711$ MHz; $\sigma = 0.867$ S/m; $\epsilon_r = 42.901$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(9.87, 9.87, 9.87) @ 711 MHz; Calibrated: 2024/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1054
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

- **Area Scan (101x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.27 W/kg

- **Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.401 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.80 W/kg

SAR(1 g) = 0.855 W/kg; SAR(10 g) = 0.488 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 49.9%

Maximum value of SAR (measured) = 1.32 W/kg

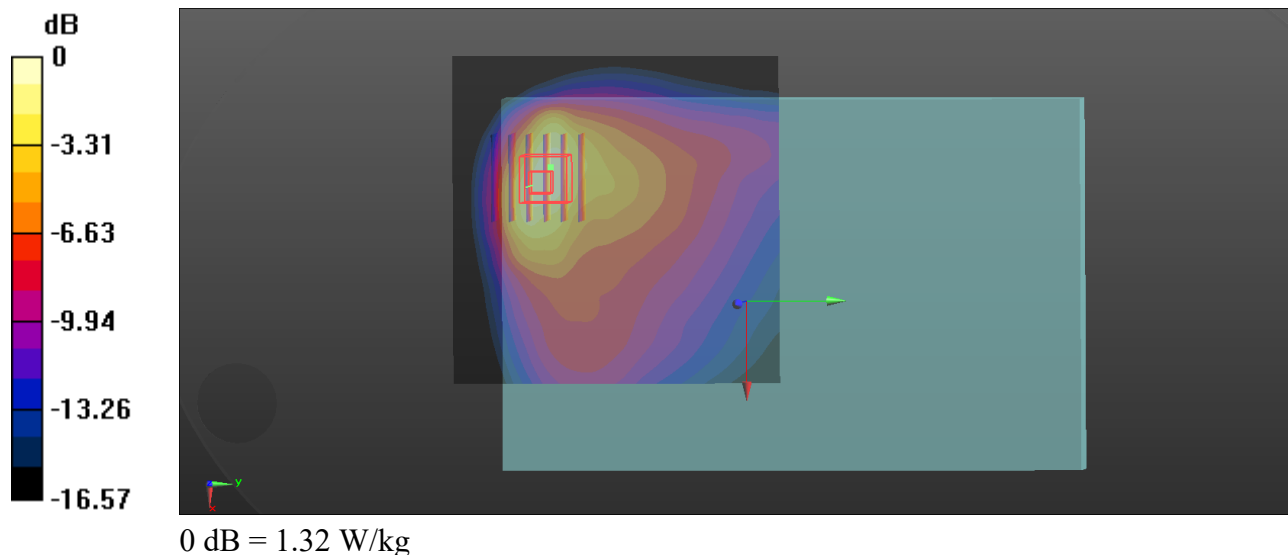

P03_LTE Band 13_QPSK10M_Rear Face_0cm_Ch23230_1RB_OS0

Communication System: LTE-FDD; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL750_0722 Medium parameters used: $f = 782$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 42.741$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(9.87, 9.87, 9.87) @ 782 MHz; Calibrated: 2024/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1054
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

- **Area Scan (101x101x1)**: Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.15 W/kg

- **Zoom Scan (5x5x7)/Cube 0**: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.014 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.790 W/kg; SAR(10 g) = 0.447 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 50.1%

Maximum value of SAR (measured) = 1.17 W/kg

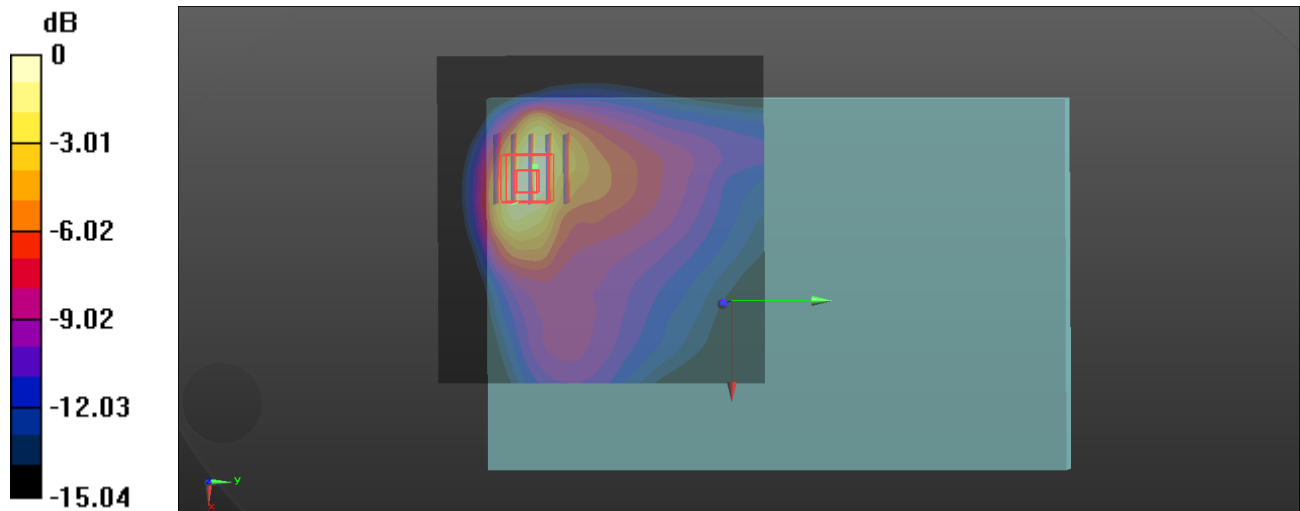

0 dB = 1.17 W/kg

P04_LTE Band 14_QPSK10M_Rear Face_0cm_Ch23330_1RB_OS24

Communication System: LTE-FDD; Frequency: 793 MHz; Duty Cycle: 1:1

Medium: HSL750_0722 Medium parameters used: $f = 793$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 42.718$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(9.87, 9.87, 9.87) @ 793 MHz; Calibrated: 2024/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1054
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

- Area Scan (101x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.13 W/kg

- Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.746 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.815 W/kg; SAR(10 g) = 0.459 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 50.4%

Maximum value of SAR (measured) = 1.19 W/kg

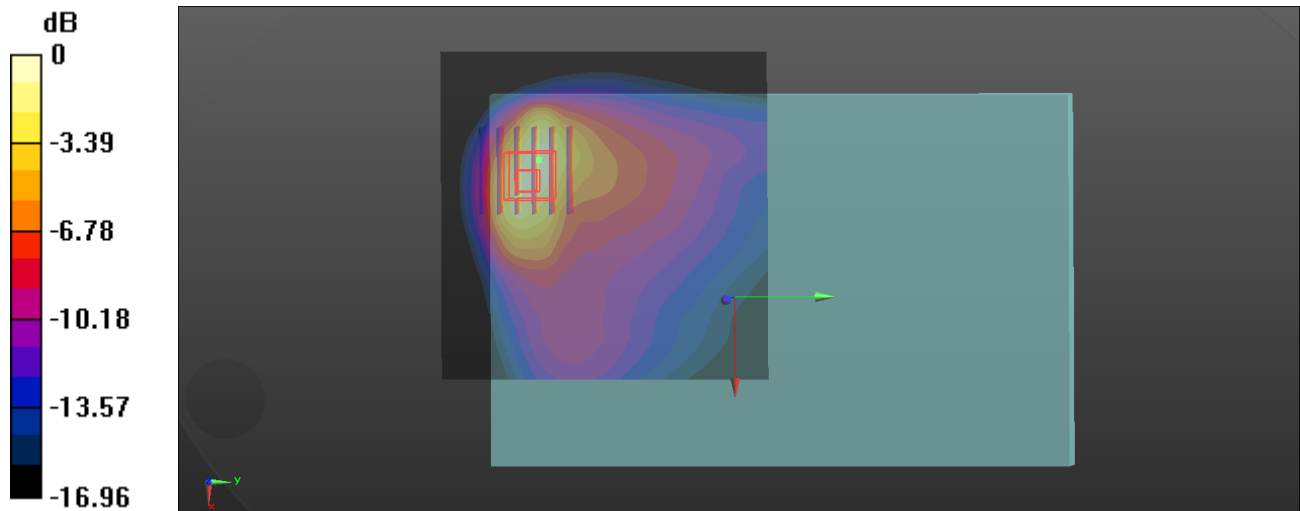

0 dB = 1.19 W/kg

P05_LTE Band 25_QPSK20M_Rear Face_0cm_Ch26590_1RB_OS0

Communication System: LTE-FDD; Frequency: 1905 MHz; Duty Cycle: 1:1

Medium: HSL1900_0723 Medium parameters used: $f = 1905$ MHz; $\sigma = 1.438$ S/m; $\epsilon_r = 40.831$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.97, 7.97, 7.97) @ 1905 MHz; Calibrated: 2024/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1054
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

- **Area Scan (101x121x1):** Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.25 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.603 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.613 W/kg; SAR(10 g) = 0.329 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 47.5%

Maximum value of SAR (measured) = 0.988 W/kg

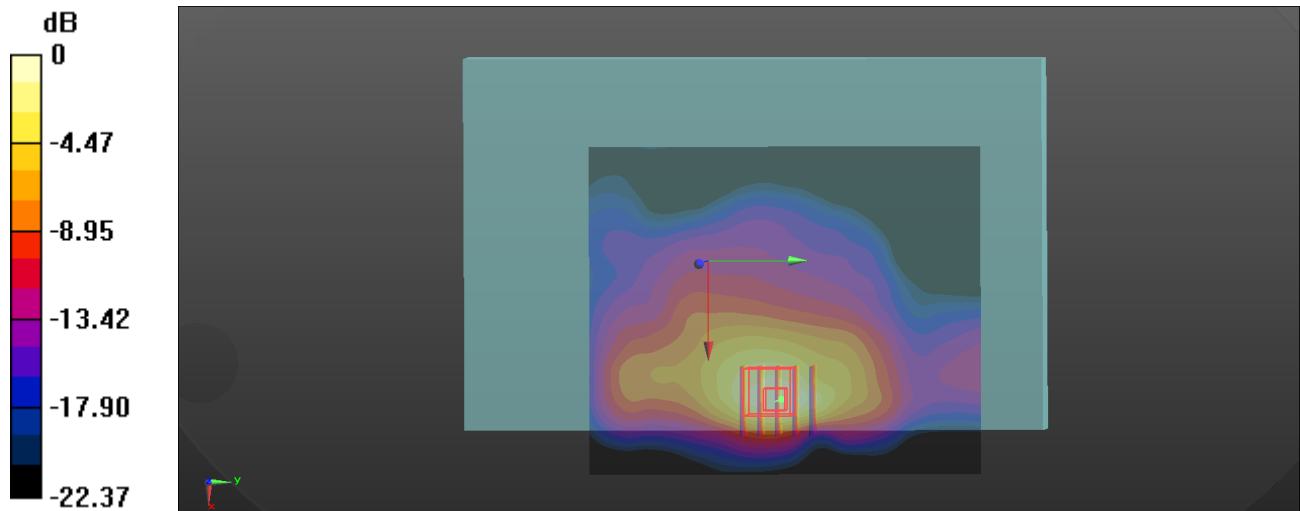

0 dB = 0.988 W/kg

P06_LTE Band 26_QPSK15M_Rear Face_0cm_Ch26965_1RB_OS0

Communication System: LTE-FDD; Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium: HSL835_0723 Medium parameters used: $f = 841.5$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 42.52$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(9.47, 9.47, 9.47) @ 841.5 MHz; Calibrated: 2024/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1054
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

- **Area Scan (101x101x1)**: Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.48 W/kg

- **Zoom Scan (7x7x7)/Cube 0**: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.408 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 2.03 W/kg

SAR(1 g) = 0.897 W/kg; SAR(10 g) = 0.501 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 51.4%

Maximum value of SAR (measured) = 1.63 W/kg

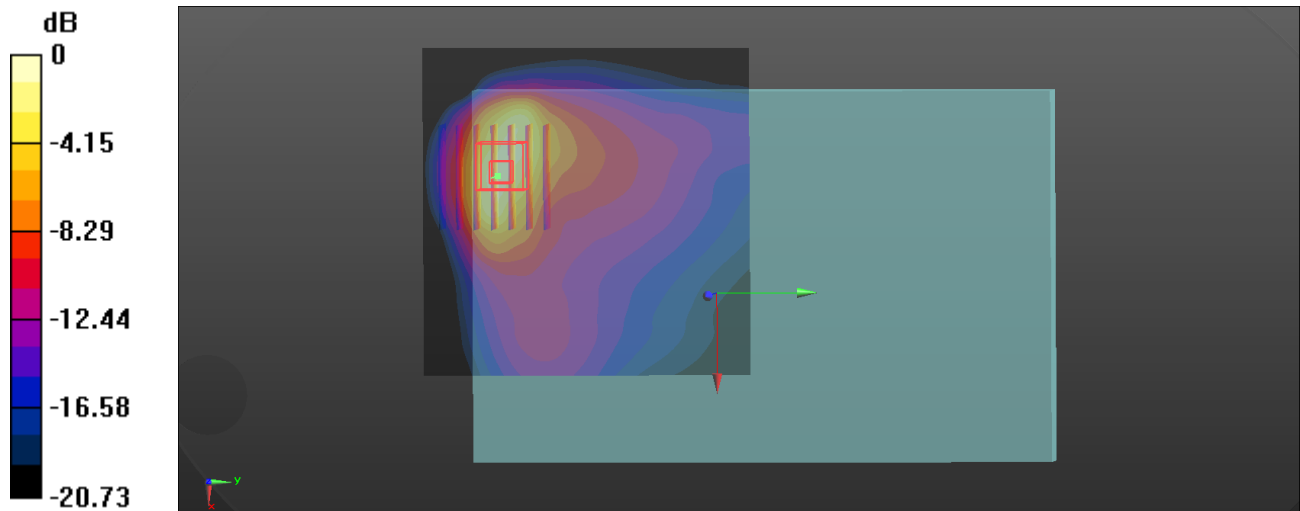

0 dB = 1.63 W/kg

P07_LTE Band 30_QPSK10M_Rear Face_0cm_Ch27710_1RB_OS0

Communication System: LTE-FDD; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL2300_0724 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.684$ S/m; $\epsilon_r = 38.66$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.71, 7.71, 7.71) @ 2310 MHz; Calibrated: 2024/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1054
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

- Area Scan (111x151x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.47 W/kg

- Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 22.57 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 2.19 W/kg

SAR(1 g) = 0.925 W/kg; SAR(10 g) = 0.394 W/kg

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 44.8%

Maximum value of SAR (measured) = 1.67 W/kg

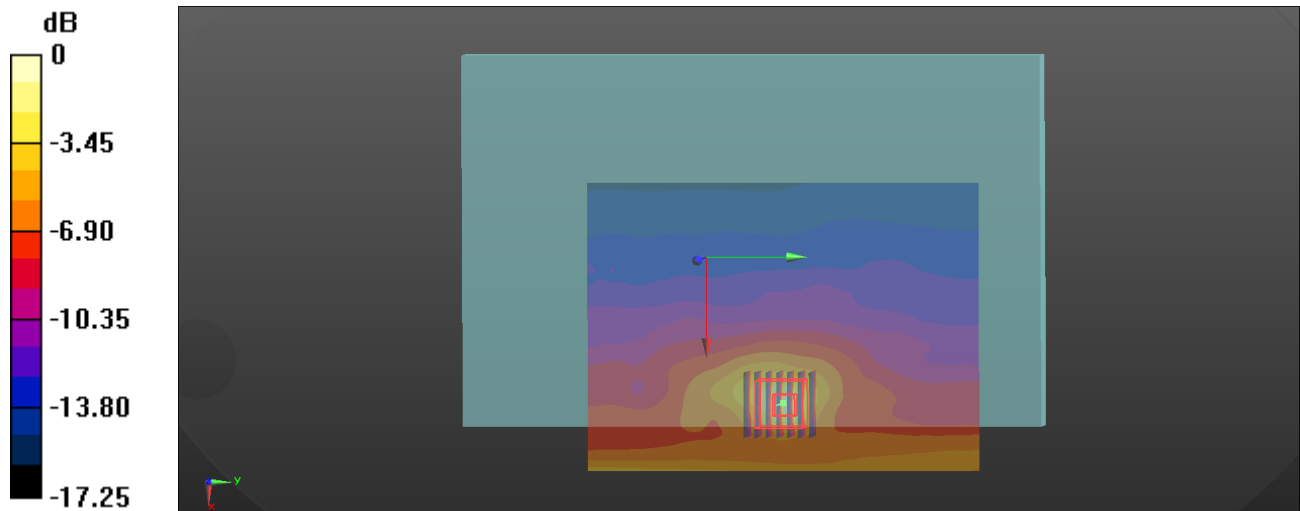

0 dB = 1.67 W/kg

P08_LTE Band 41_QPSK20M_Rear Face_0cm_Ch41055_1RB_OS0

Communication System: LTE-TDD; Frequency: 2636.5 MHz; Duty Cycle: 1:1.59

Medium: HSL2600_0724 Medium parameters used: $f = 2637$ MHz; $\sigma = 2.045$ S/m; $\epsilon_r = 37.396$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.6°C; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.31, 7.31, 7.31) @ 2636.5 MHz; Calibrated: 2024/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1054
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

- Area Scan (111x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.81 W/kg

- Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 2.867 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 2.46 W/kg
SAR(1 g) = 0.923 W/kg; SAR(10 g) = 0.335 W/kg
Smallest distance from peaks to all points 3 dB below = 6 mm
Ratio of SAR at M2 to SAR at M1 = 42.6%
Maximum value of SAR (measured) = 1.87 W/kg

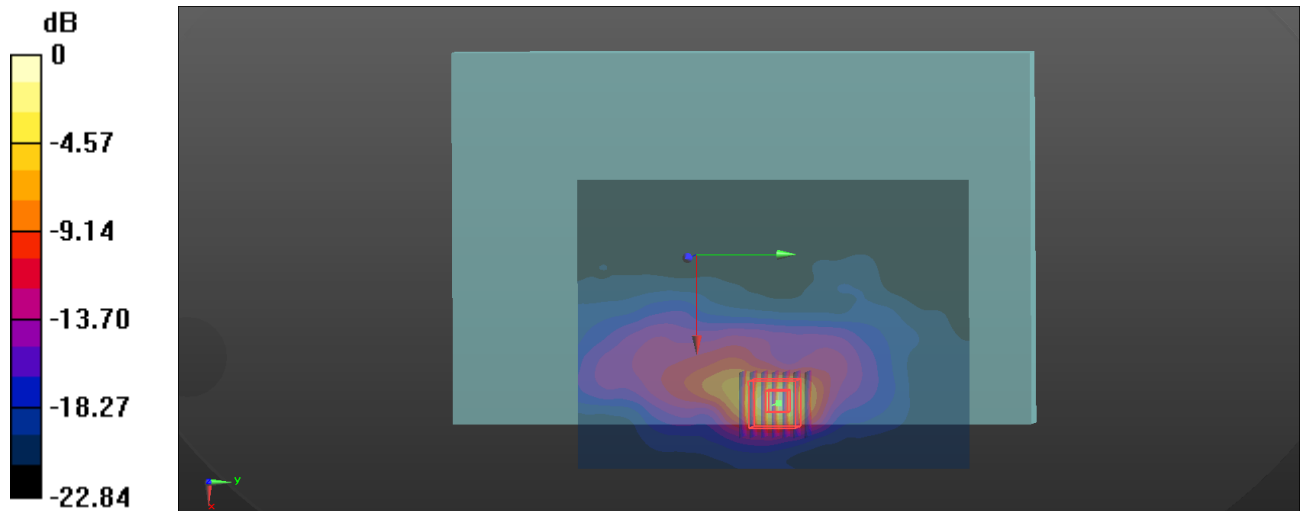

0 dB = 1.87 W/kg

P09_LTE Band 42_QPSK20M_Rear Face_0cm_Ch42990_1RB_OS0

Communication System: LTE-TDD; Frequency: 3540 MHz; Duty Cycle: 1:1.59

Medium: HSL3500_0725 Medium parameters used: $f = 3540$ MHz; $\sigma = 2.938$ S/m; $\epsilon_r = 38.568$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(6.71, 6.71, 6.71) @ 3540 MHz; Calibrated: 2024/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1054
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

- **Area Scan (111x151x1)**: Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.70 W/kg

- **Zoom Scan (7x7x8)/Cube 0**: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 2.991 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 2.39 W/kg

SAR(1 g) = 0.822 W/kg; SAR(10 g) = 0.334 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 42.2%

Maximum value of SAR (measured) = 1.74 W/kg

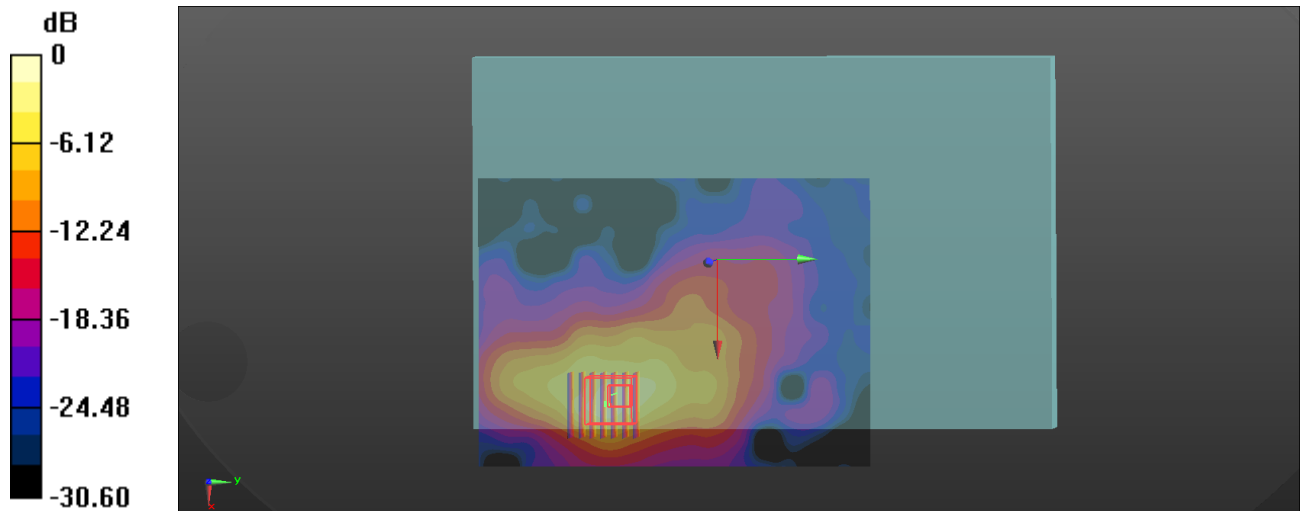

0 dB = 1.74 W/kg

P10_LTE Band 48_QPSK20M_Rear Face_0cm_Ch56640_1RB_OS0

Communication System: LTE-TDD; Frequency: 3690 MHz; Duty Cycle: 1:1.59

Medium: HSL3700_0725 Medium parameters used: $f = 3690$ MHz; $\sigma = 2.997$ S/m; $\epsilon_r = 39.314$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1°C; Liquid Temperature : 22.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(6.5, 6.5, 6.5) @ 3690 MHz; Calibrated: 2024/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1054
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

- **Area Scan (111x151x1)**: Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 2.23 W/kg

- **Zoom Scan (7x7x8)/Cube 0**: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=4$ mm

Reference Value = 2.643 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 2.97 W/kg

SAR(1 g) = 0.982 W/kg; SAR(10 g) = 0.369 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 40.3%

Maximum value of SAR (measured) = 2.11 W/kg

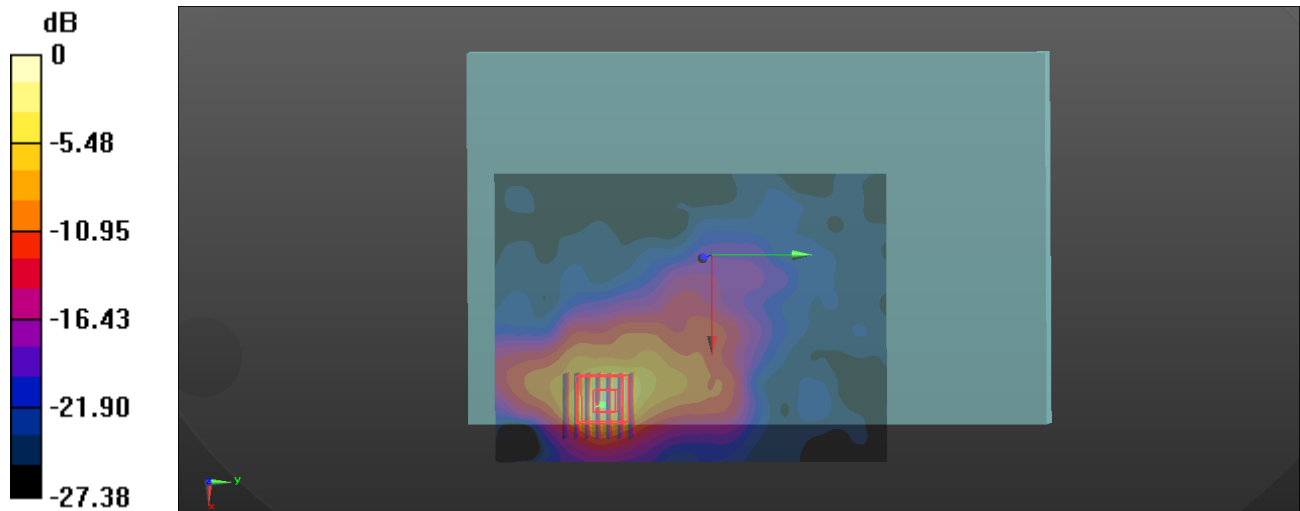

0 dB = 2.11 W/kg

P11_LTE Band 66_QPSK20M_Rear Face_0cm_Ch132072_1RB_OS0

Communication System: LTE-FDD; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: HSL1750_0723 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.331$ S/m; $\epsilon_r = 41.042$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(8.31, 8.31, 8.31) @ 1720 MHz; Calibrated: 2024/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1054
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

- Area Scan (101x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.47 W/kg

- Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.458 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.776 W/kg; SAR(10 g) = 0.423 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 49.6%

Maximum value of SAR (measured) = 1.22 W/kg

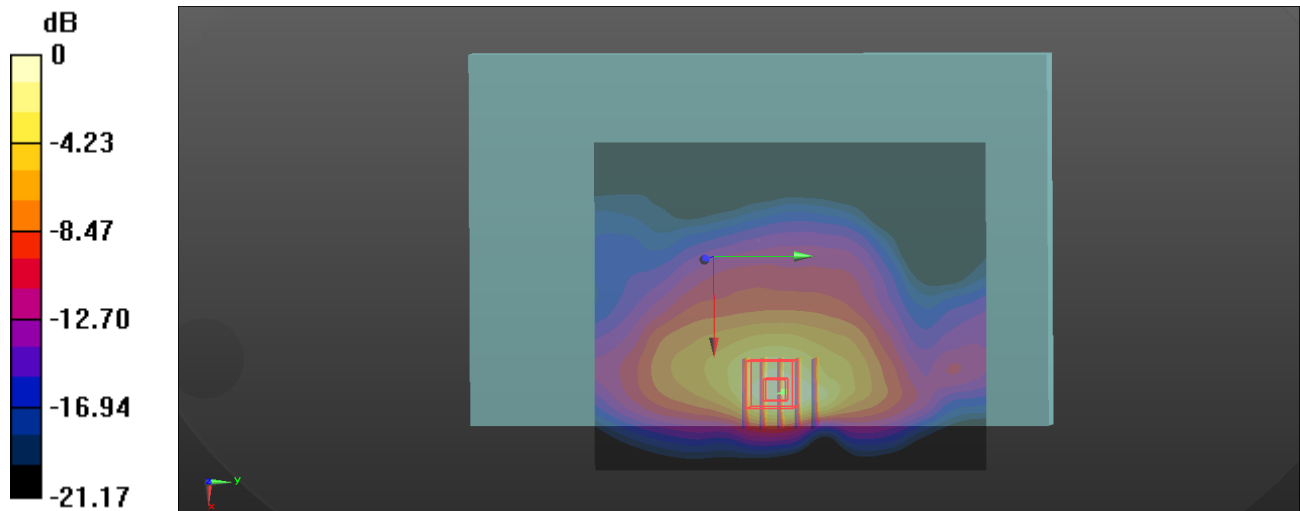

0 dB = 1.22 W/kg

P12_LTE Band 71_QPSK20M_Rear Face_0cm_Ch133372_1RB_OS50

Communication System: LTE-FDD; Frequency: 688 MHz; Duty Cycle: 1:1

Medium: HSL750_0722 Medium parameters used: $f = 688$ MHz; $\sigma = 0.859$ S/m; $\epsilon_r = 43.006$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(9.87, 9.87, 9.87) @ 688 MHz; Calibrated: 2024/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1054
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

- Area Scan (101x101x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.912 W/kg

- Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.710 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.628 W/kg; SAR(10 g) = 0.359 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 48.3%

Maximum value of SAR (measured) = 0.913 W/kg

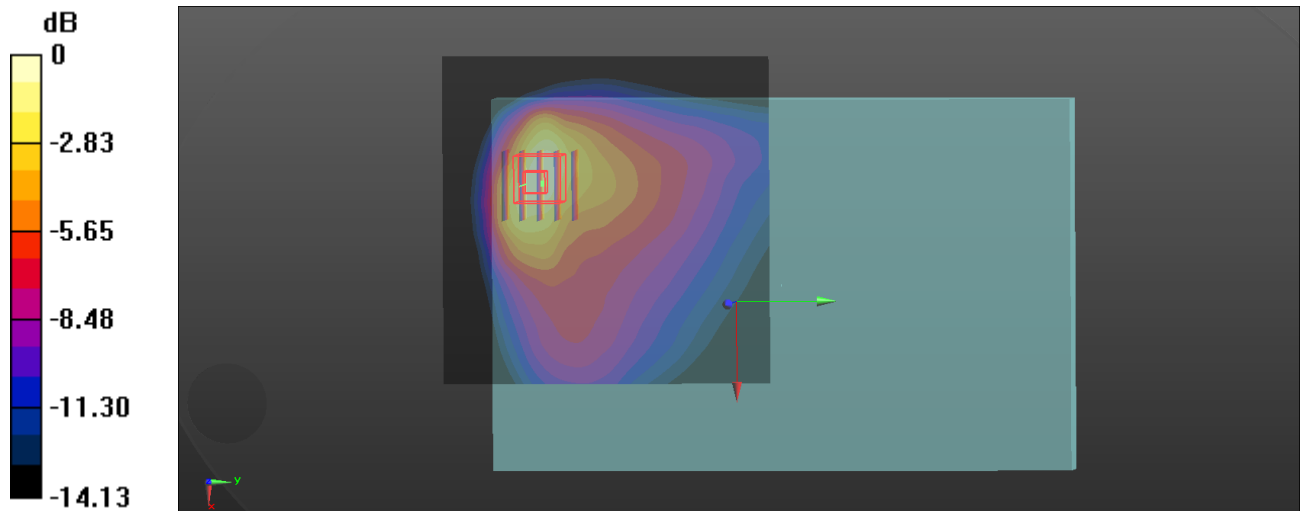

0 dB = 0.913 W/kg

P13_FR1 n5_DFT-QPSK20M_Rear Face_0cm_Ch167800_50RB_OS28

Communication System: 5G NR; Frequency: 839 MHz; Duty Cycle: 1:1

Medium: HSL835_0723 Medium parameters used: $f = 839$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 42.529$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(9.47, 9.47, 9.47) @ 839 MHz; Calibrated: 2024/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1054
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

- **Area Scan (101x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.45 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.142 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 2.17 W/kg

SAR(1 g) = 0.937 W/kg; SAR(10 g) = 0.522 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 52.3%

Maximum value of SAR (measured) = 1.58 W/kg

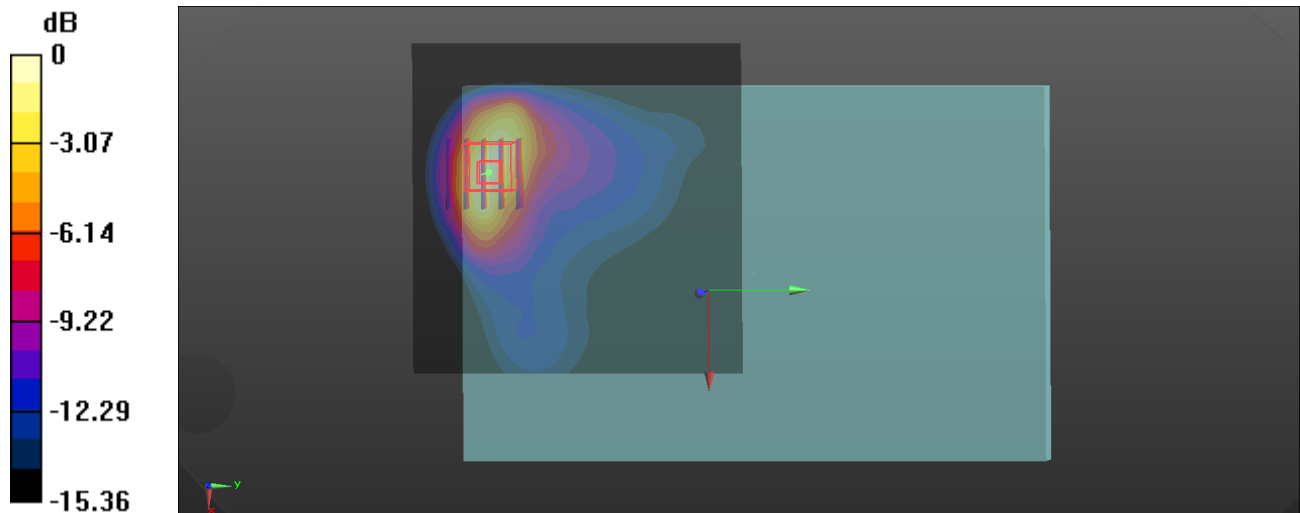

0 dB = 1.58 W/kg

P14_FR1 n7_DFT-QPSK40M_Rear Face_0cm_Ch503500_1RB_OS1

Communication System: 5G NR; Frequency: 2517.5 MHz; Duty Cycle: 1:1

Medium: HSL2600_0724 Medium parameters used: $f = 2517.5$ MHz; $\sigma = 1.919$ S/m; $\epsilon_r = 37.835$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6°C; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.31, 7.31, 7.31) @ 2517.5 MHz; Calibrated: 2024/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1054
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

- **Area Scan (121x151x1)**: Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.47 W/kg

- **Zoom Scan (7x7x7)/Cube 0**: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.244 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 2.02 W/kg

SAR(1 g) = 0.849 W/kg; SAR(10 g) = 0.329 W/kg

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 44.8%

Maximum value of SAR (measured) = 1.57 W/kg

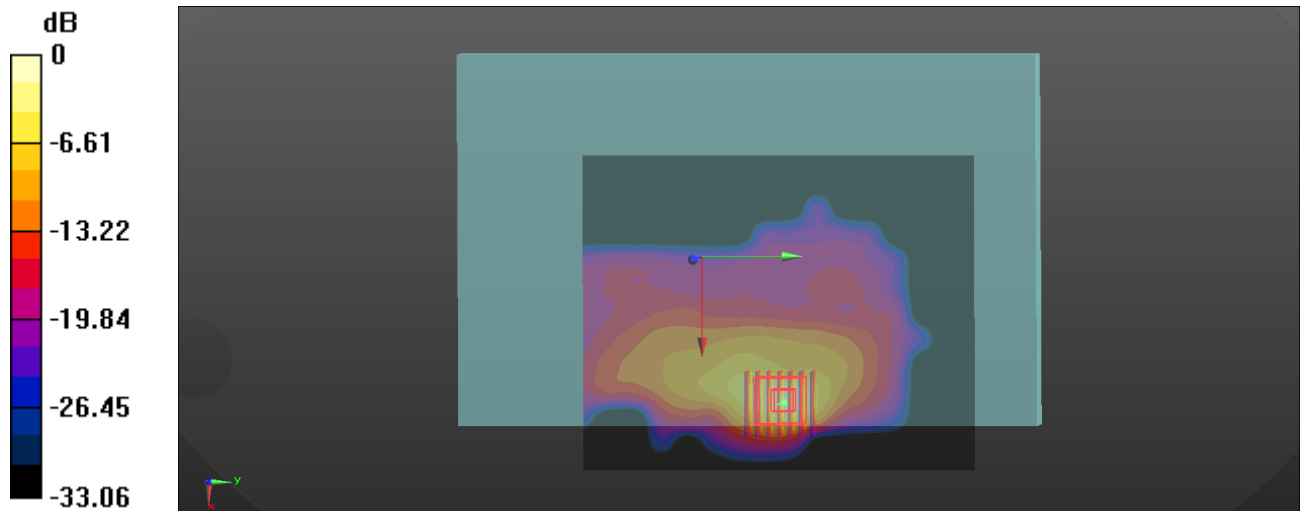

0 dB = 1.57 W/kg

P15_FR1 n12_DFT-QPSK15M_Rear Face_0cm_Ch141500_36RB_OS22

Communication System: 5G NR; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL750_0722 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.866$ S/m; $\epsilon_r = 42.917$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(9.87, 9.87, 9.87) @ 707.5 MHz; Calibrated: 2024/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1054
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

- Area Scan (101x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.12 W/kg

- Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.888 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 0.776 W/kg; SAR(10 g) = 0.446 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 49.3%

Maximum value of SAR (measured) = 1.28 W/kg

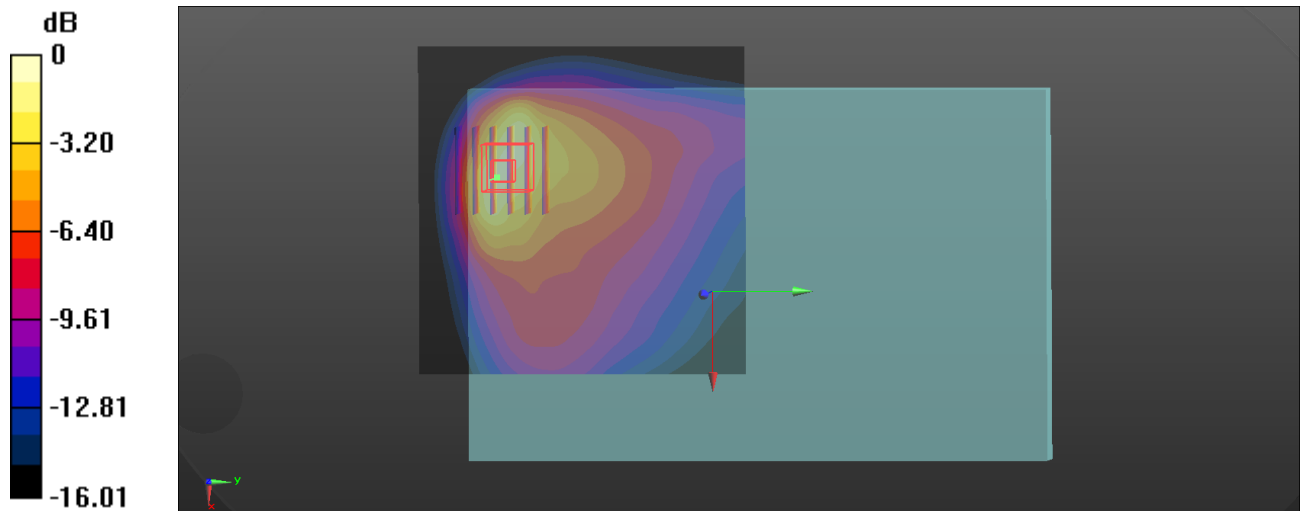

0 dB = 1.28 W/kg

P16_FR1 n14_DFT-QPSK10M_Rear Face_0cm_Ch158600_25RB_OS14

Communication System: 5G NR; Frequency: 793 MHz; Duty Cycle: 1:1

Medium: HSL750_0722 Medium parameters used: $f = 793$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 42.718$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(9.87, 9.87, 9.87) @ 793 MHz; Calibrated: 2024/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1054
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

- **Area Scan (101x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.24 W/kg

- **Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.860 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 1.74 W/kg

SAR(1 g) = 0.795 W/kg; SAR(10 g) = 0.451 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 51.5%

Maximum value of SAR (measured) = 1.34 W/kg

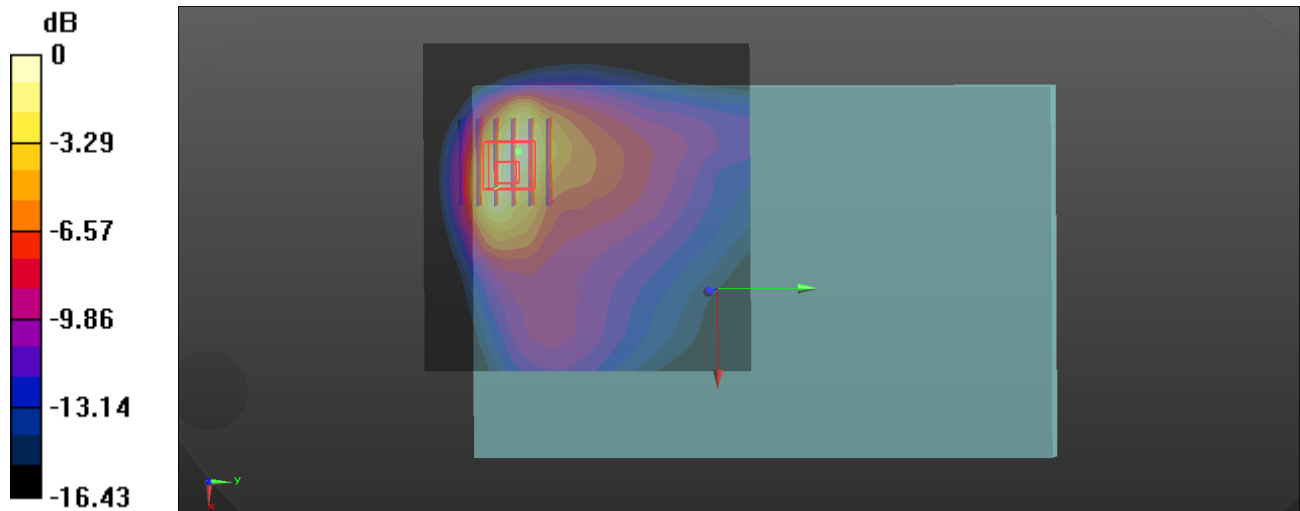

0 dB = 1.34 W/kg

P17_FR1 n25_DFT-QPSK40M_Rear Face_0cm_Ch376500_108RB_OS54

Communication System: 5G NR; Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL1900_0723 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.427$ S/m; $\epsilon_r = 40.861$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.97, 7.97, 7.97) @ 1882.5 MHz; Calibrated: 2024/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1054
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

- Area Scan (101x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.36 W/kg

- Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.297 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.724 W/kg; SAR(10 g) = 0.394 W/kg

Smallest distance from peaks to all points 3 dB below = 11.6 mm

Ratio of SAR at M2 to SAR at M1 = 48.6%

Maximum value of SAR (measured) = 1.17 W/kg

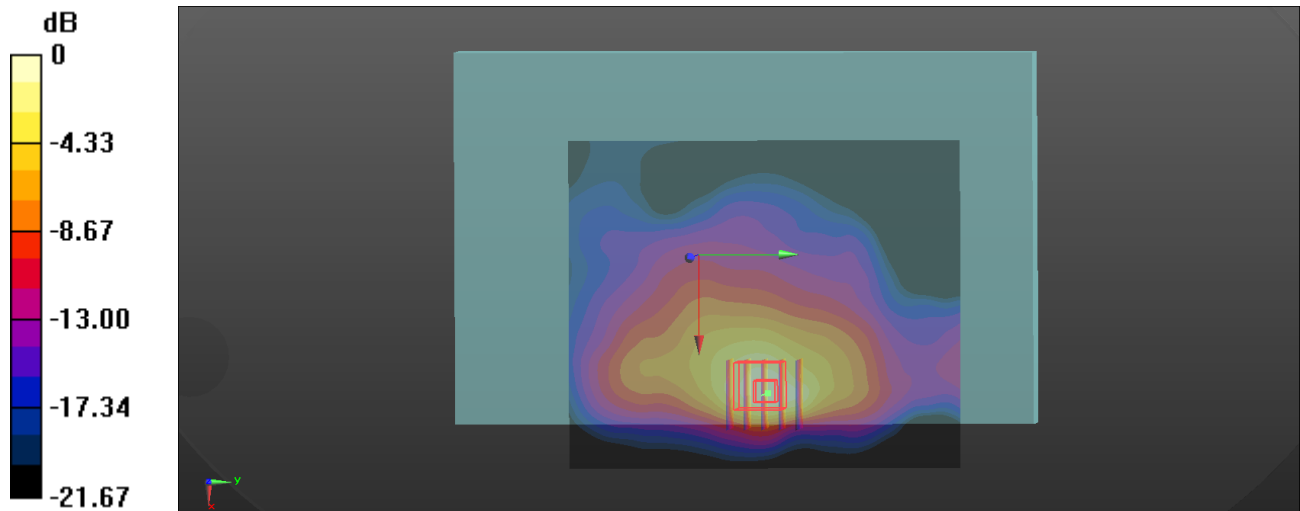

0 dB = 1.17 W/kg

P18_FR1 n30_DFT-QPSK10M_Rear Face_0cm_Ch462000_1RB_OS1

Communication System: 5G NR; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL2300_0724 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.684$ S/m; $\epsilon_r = 38.66$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.71, 7.71, 7.71) @ 2310 MHz; Calibrated: 2024/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1054
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

- Area Scan (121x151x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.20 W/kg

- Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.788 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.747 W/kg; SAR(10 g) = 0.321 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 45.7%

Maximum value of SAR (measured) = 1.32 W/kg

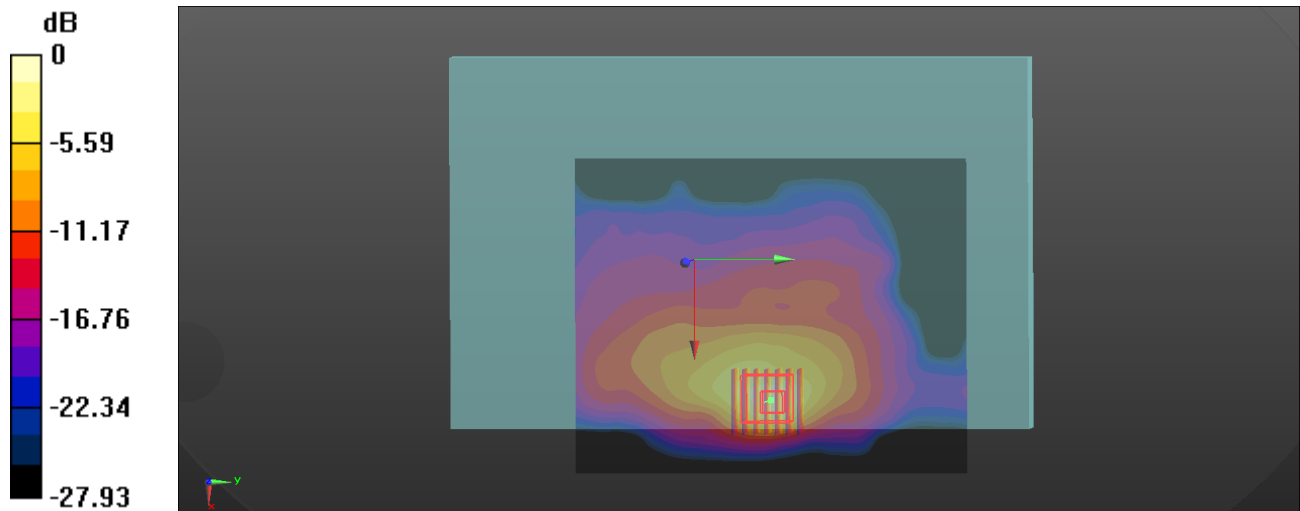

0 dB = 1.32 W/kg

P19_FR1 n41_DFT-QPSK100M_Rear Face_0cm_Ch528000_135RB_OS69

Communication System: 5G NR; Frequency: 2640 MHz; Duty Cycle: 1:2.5

Medium: HSL2600_0724 Medium parameters used: $f = 2640$ MHz; $\sigma = 2.047$ S/m; $\epsilon_r = 37.386$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6°C; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.31, 7.31, 7.31) @ 2640 MHz; Calibrated: 2024/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1054
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

- Area Scan (121x151x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.47 W/kg

- Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.218 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 2.05 W/kg

SAR(1 g) = 0.847 W/kg; SAR(10 g) = 0.315 W/kg

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 43.8%

Maximum value of SAR (measured) = 1.59 W/kg

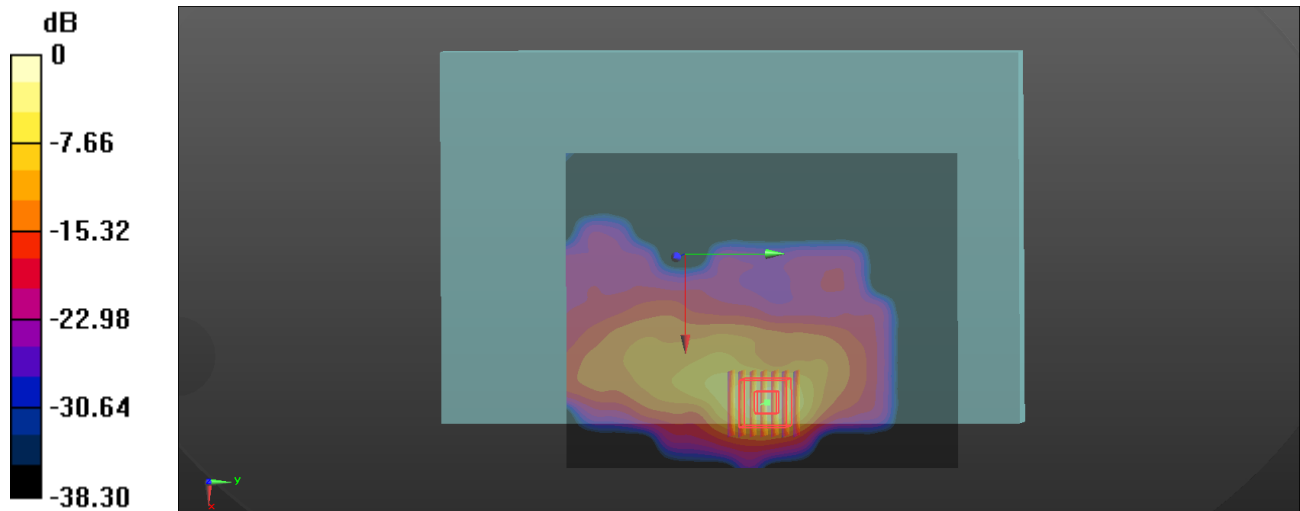

0 dB = 1.59 W/kg

P20_FR1 n48_DFT-QPSK40M_Rear Face_0cm_Ch645332_50RB_OS28

Communication System: 5G NR; Frequency: 3679.98 MHz; Duty Cycle: 1:2.5

Medium: HSL3700_0725 Medium parameters used: $f = 3680$ MHz; $\sigma = 2.989$ S/m; $\epsilon_r = 39.329$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1°C; Liquid Temperature : 22.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(6.5, 6.5, 6.5) @ 3679.98 MHz; Calibrated: 2024/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1054
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

- Area Scan (111x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.62 W/kg

- Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 2.625 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 2.54 W/kg

SAR(1 g) = 0.906 W/kg; SAR(10 g) = 0.342 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 42.1%

Maximum value of SAR (measured) = 1.84 W/kg

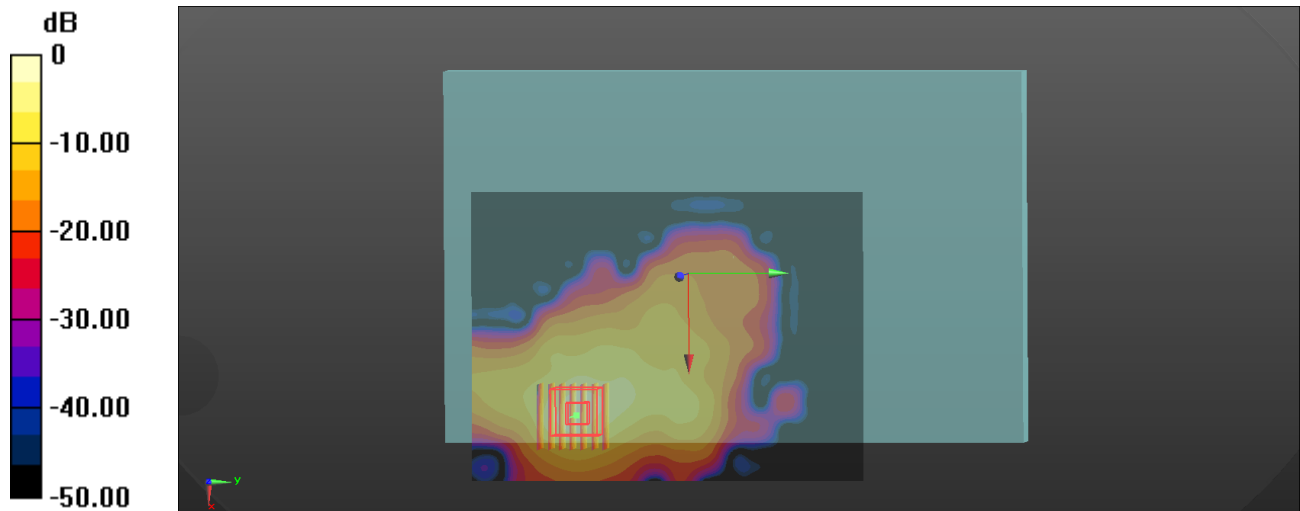

0 dB = 1.84 W/kg

P21_FR1 n66_DFT-QPSK40M_Rear Face_0cm_Ch346000_1RB_OS1

Communication System: 5G NR; Frequency: 1730 MHz; Duty Cycle: 1:1

Medium: HSL1750_0723 Medium parameters used: $f = 1730$ MHz; $\sigma = 1.336$ S/m; $\epsilon_r = 41.039$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(8.31, 8.31, 8.31) @ 1730 MHz; Calibrated: 2024/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1054
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

- Area Scan (101x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.24 W/kg

- Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.597 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.742 W/kg; SAR(10 g) = 0.417 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 50.3%

Maximum value of SAR (measured) = 1.13 W/kg

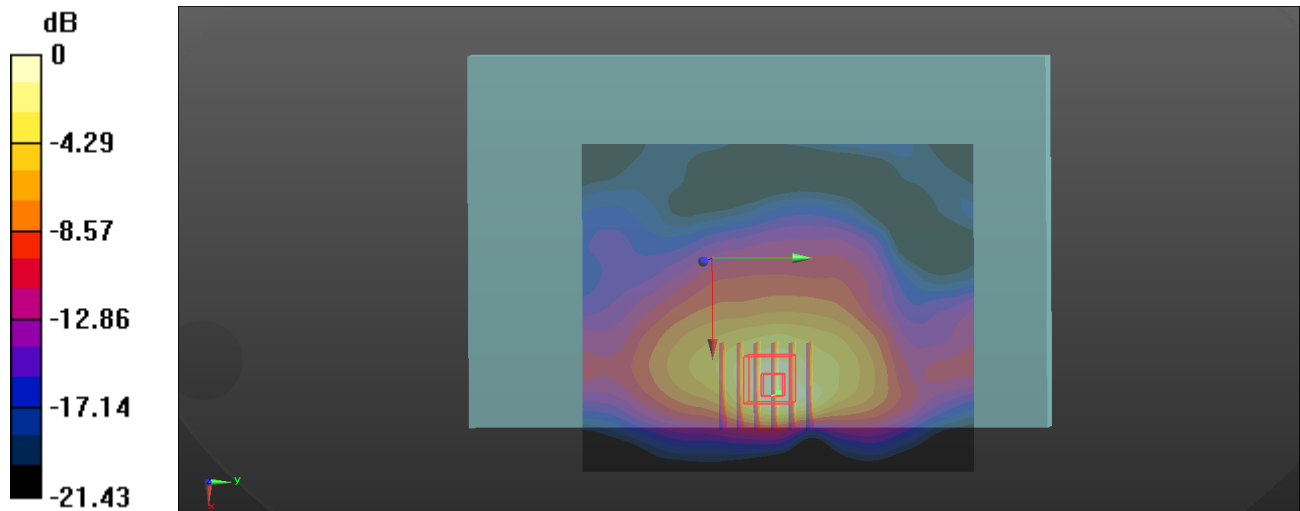

0 dB = 1.13 W/kg

P22_FR1 n71_DFT-QPSK20M_Rear Face_0cm_Ch137600_50RB_OS28

Communication System: 5G NR; Frequency: 688 MHz; Duty Cycle: 1:1

Medium: HSL750_0722 Medium parameters used: $f = 688$ MHz; $\sigma = 0.859$ S/m; $\epsilon_r = 43.006$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(9.87, 9.87, 9.87) @ 688 MHz; Calibrated: 2024/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1054
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

- **Area Scan (101x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.08 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.895 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 0.676 W/kg; SAR(10 g) = 0.391 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 49.1%

Maximum value of SAR (measured) = 1.19 W/kg

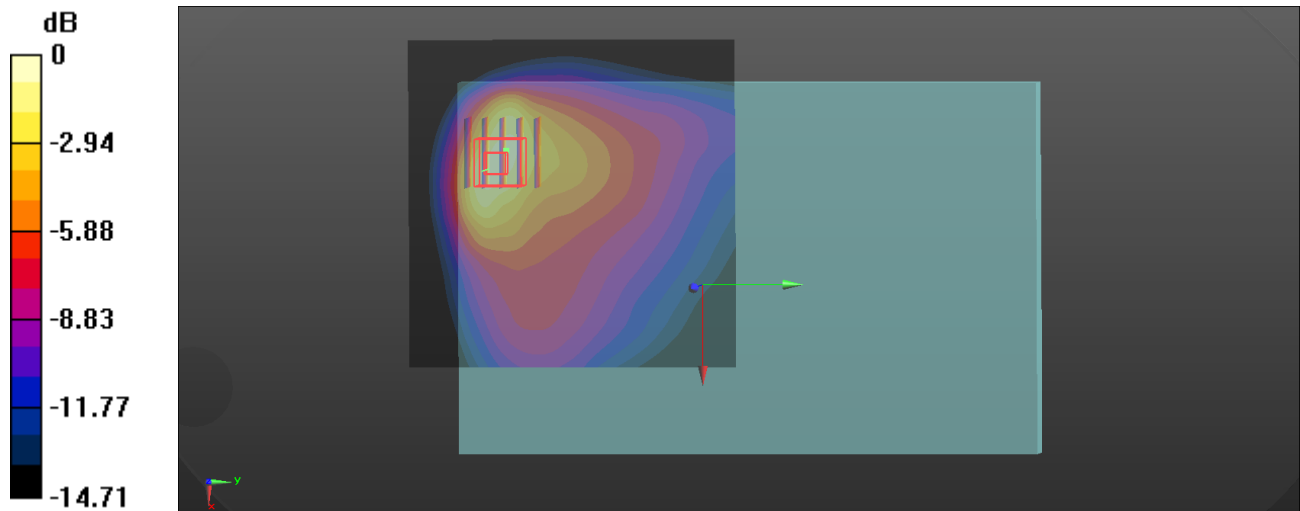

0 dB = 1.19 W/kg

P23_FR1 n77_DFT-QPSK100M_Rear Face_0cm_Ch656000_135RB_OS69

Communication System: 5G NR; Frequency: 3840 MHz; Duty Cycle: 1:2.5

Medium: HSL3900_0725 Medium parameters used: $f = 3840$ MHz; $\sigma = 3.145$ S/m; $\epsilon_r = 39.062$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(6.4, 6.4, 6.4) @ 3840 MHz; Calibrated: 2024/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1054
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

- Area Scan (111x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.36 W/kg

- Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 1.296 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 2.02 W/kg

SAR(1 g) = 0.672 W/kg; SAR(10 g) = 0.229 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 40.3%

Maximum value of SAR (measured) = 1.43 W/kg

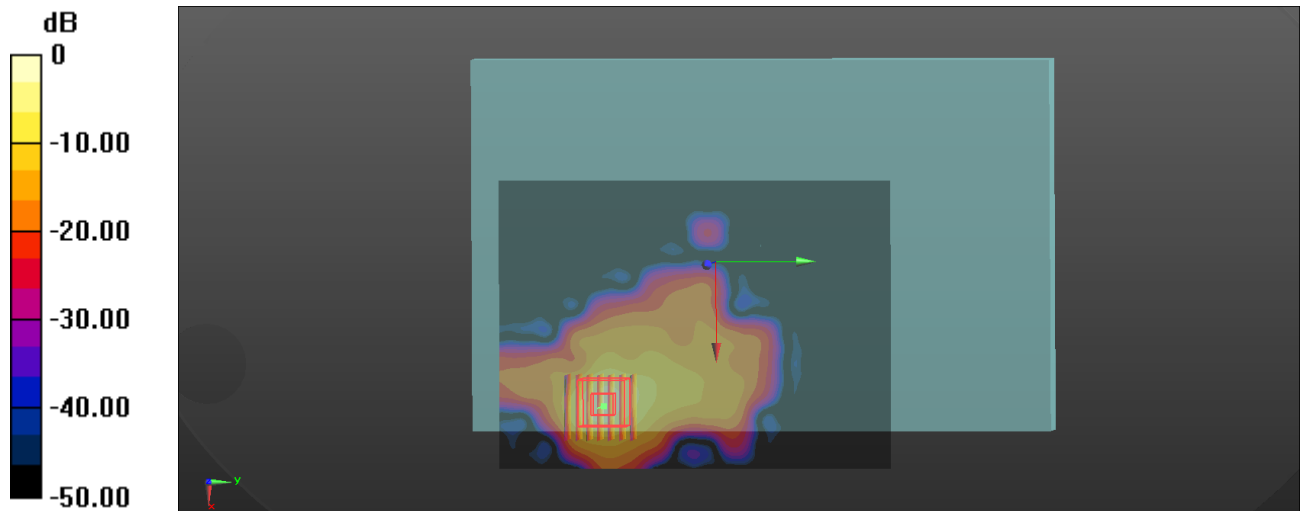

P24_WLAN 2.4GHz_802.11b_Right Side_0cm_Ch1


Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2412 MHz; Duty Cycle: 1:1.022
Medium: HSL2450_0724 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.802$ S/m; $\epsilon_r = 38.279$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4°C; Liquid Temperature : 22.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.46, 7.46, 7.46) @ 2412 MHz; Calibrated: 2024/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1054
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

- Area Scan (61x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.51 W/kg

- Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0.4410 V/m; Power Drift = 0.15 dB
Peak SAR (extrapolated) = 1.85 W/kg
SAR(1 g) = 0.823 W/kg; SAR(10 g) = 0.327 W/kg
Smallest distance from peaks to all points 3 dB below = 7.1 mm
Ratio of SAR at M2 to SAR at M1 = 46.7%
Maximum value of SAR (measured) = 1.48 W/kg

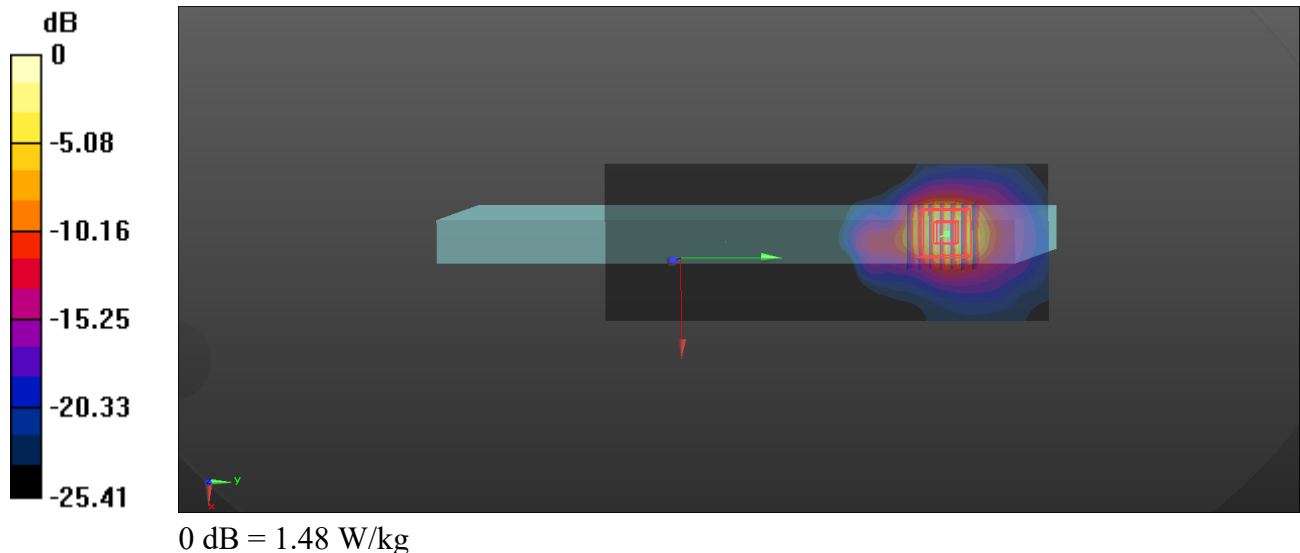

P25_WLAN 5GHz_802.11a_Rear Face_0cm_Ch56

Communication System: IEEE 802.11a WiFi 5 GHz; Frequency: 5280 MHz; Duty Cycle: 1:1.01

Medium: HSL5250_0728 Medium parameters used: $f = 5280$ MHz; $\sigma = 4.536$ S/m; $\epsilon_r = 37.048$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(5.16, 5.16, 5.16) @ 5280 MHz; Calibrated: 2024/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1054
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

- Area Scan (111x141x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.38 W/kg

- Zoom Scan (9x9x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 2.73 W/kg

SAR(1 g) = 0.580 W/kg; SAR(10 g) = 0.145 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 52%

Maximum value of SAR (measured) = 1.54 W/kg

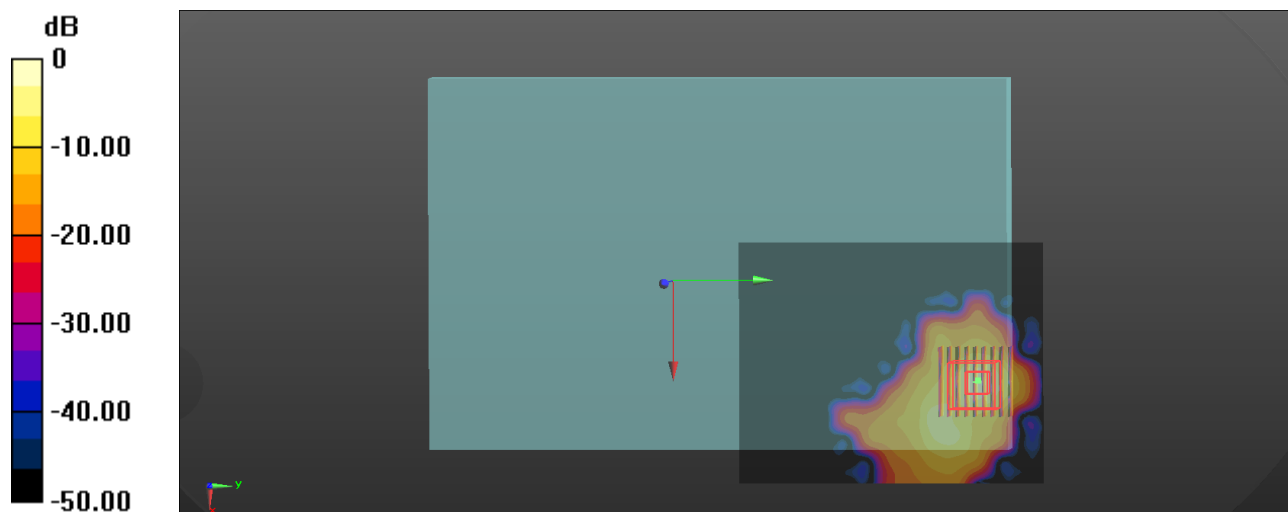

0 dB = 1.54 W/kg

P26_WLAN 5GHz_802.11a_Rear Face_0cm_Ch100

Communication System: IEEE 802.11a WiFi 5 GHz; Frequency: 5500 MHz; Duty Cycle: 1:1.01

Medium: HSL5600_0728 Medium parameters used: $f = 5500$ MHz; $\sigma = 4.782$ S/m; $\epsilon_r = 36.701$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4°C; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(4.56, 4.56, 4.56) @ 5500 MHz; Calibrated: 2024/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1054
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

- Area Scan (111x141x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.80 W/kg

- Zoom Scan (9x9x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 3.84 W/kg

SAR(1 g) = 0.722 W/kg; SAR(10 g) = 0.184 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 51.3%

Maximum value of SAR (measured) = 2.17 W/kg

- Zoom Scan (9x9x12)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 3.78 W/kg

SAR(1 g) = 0.575 W/kg; SAR(10 g) = 0.172 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 52.2%

Maximum value of SAR (measured) = 2.22 W/kg

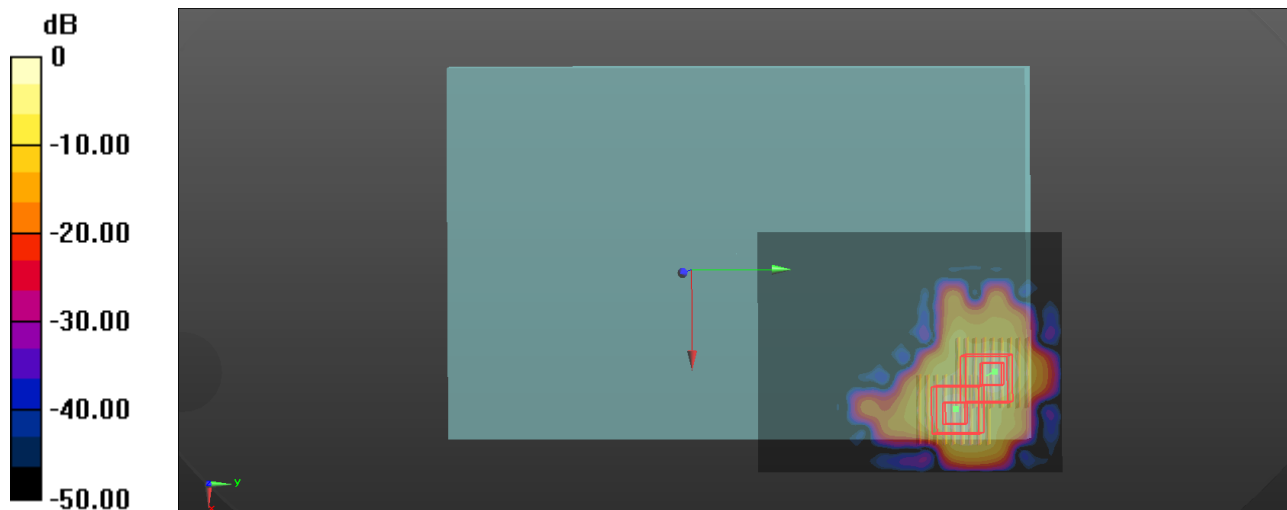

0 dB = 1.80 W/kg

P27_WLAN 5GHz_802.11a_Rear Face_0cm_Ch165

Communication System: IEEE 802.11a WiFi 5 GHz; Frequency: 5825 MHz; Duty Cycle: 1:1.01

Medium: HSL5750_0728 Medium parameters used: $f = 5825$ MHz; $\sigma = 5.153$ S/m; $\epsilon_r = 36.139$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(4.62, 4.62, 4.62) @ 5825 MHz; Calibrated: 2024/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1054
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

- Area Scan (111x141x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.86 W/kg

- Zoom Scan (9x9x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 3.57 W/kg

SAR(1 g) = 0.689 W/kg; SAR(10 g) = 0.196 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 47.9%

Maximum value of SAR (measured) = 1.87 W/kg

- Zoom Scan (9x9x12)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 3.34 W/kg

SAR(1 g) = 0.654 W/kg; SAR(10 g) = 0.174 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 49.5%

Maximum value of SAR (measured) = 1.74 W/kg

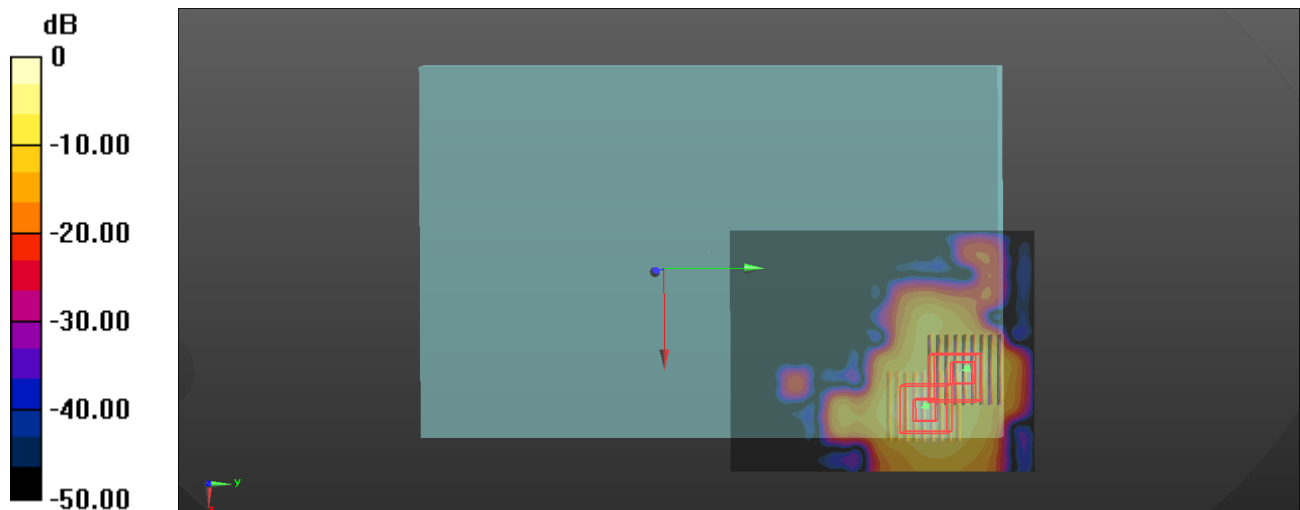

0 dB = 1.74 W/kg

P28_Bluetooth_GFSK_Right Side_0cm_Ch39

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.298

Medium: HSL2450_0724 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.833$ S/m; $\epsilon_r = 38.16$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4°C; Liquid Temperature : 22.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.46, 7.46, 7.46) @ 2441 MHz; Calibrated: 2024/9/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1054
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

- **Area Scan (61x171x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.636 W/kg

- **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.543 W/kg

SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.090 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 45.7%

Maximum value of SAR (measured) = 0.425 W/kg

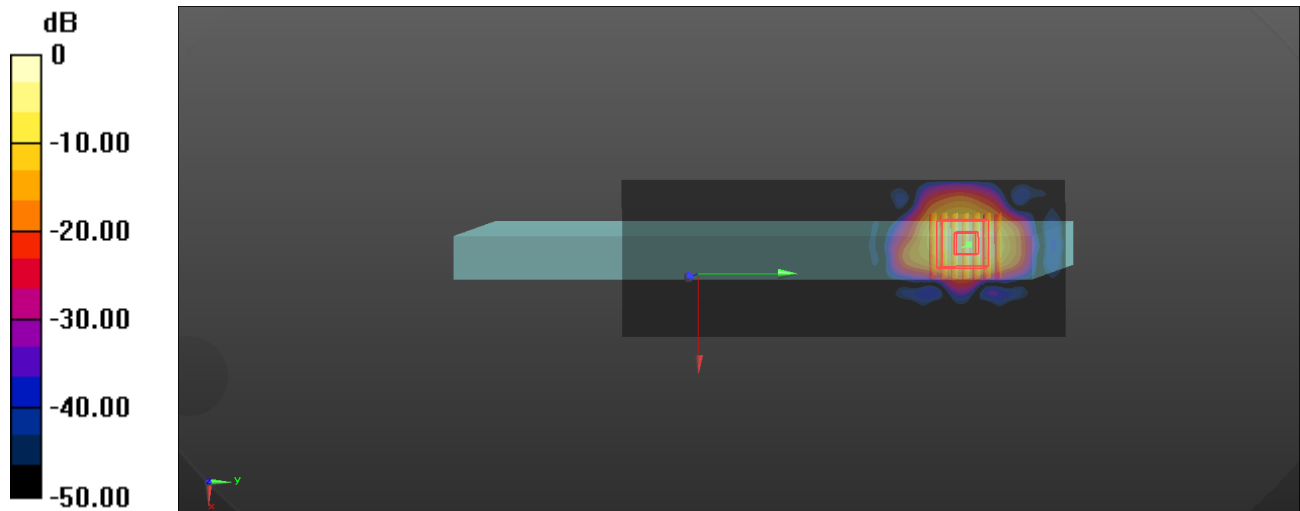

0 dB = 0.425 W/kg