




BUREAU
VERITAS

FCC SAR Test Report




Certificate #6613.01

<Photographs of EUT>

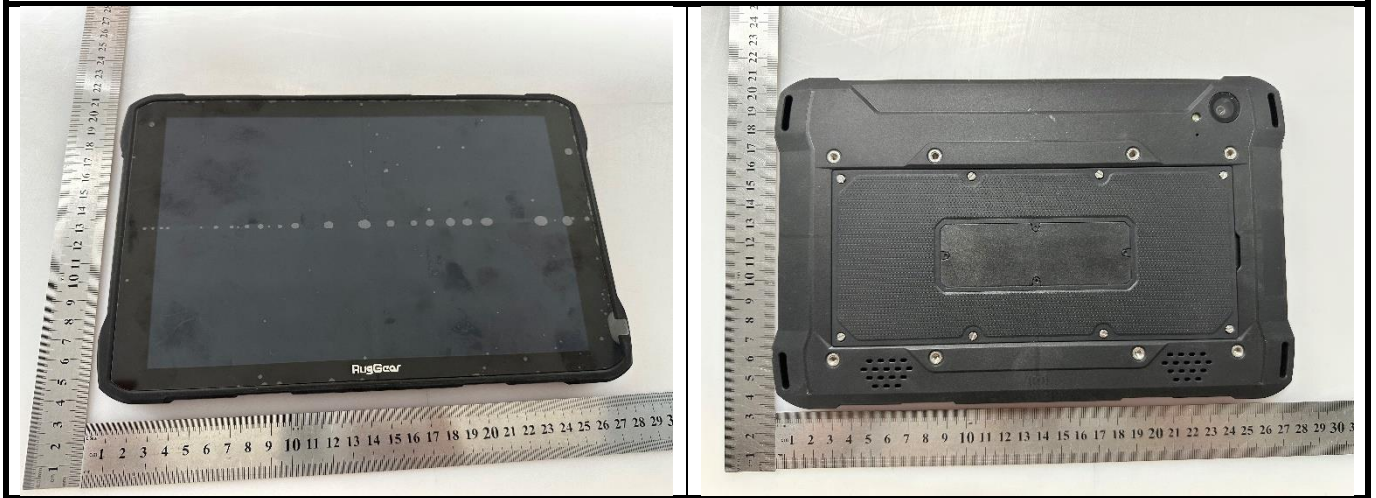



<Antenna Location>

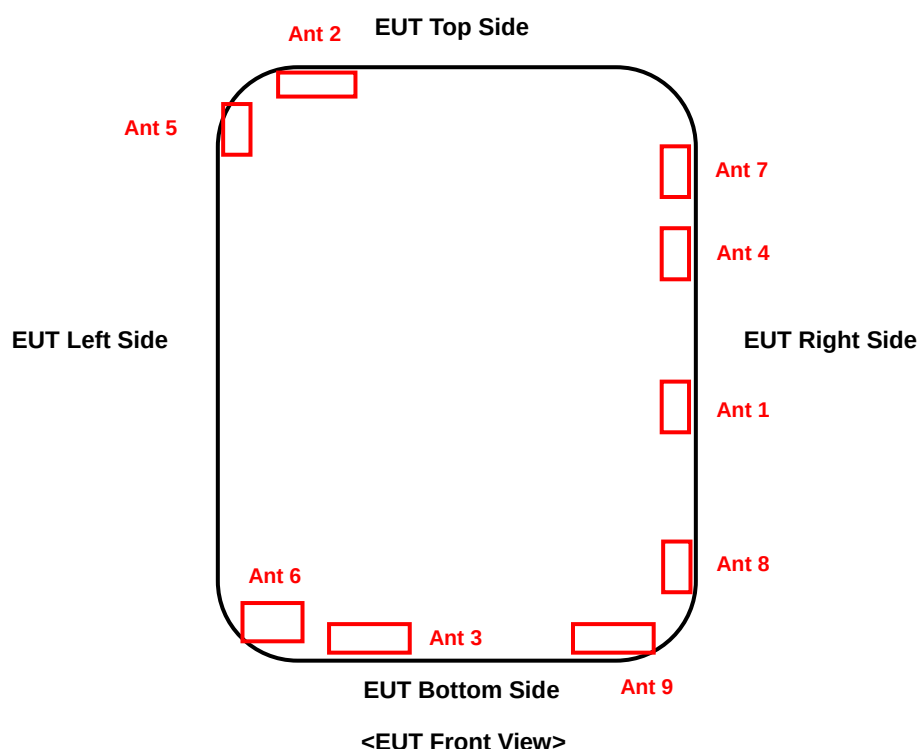

The separation distance for antenna to edge:

Antenna	Overall diagonal(mm)	Display diagonal(mm)	To Left Side (mm)	To Right Side (mm)	To Top Side (mm)	To Bottom Side (mm)
Ant 1	303	255	156.2	9.2	141.5	124
Ant 2			30.5	137.8	17.4	248
Ant 3			37.5	130.8	17	249
Ant 4			156.2	9.2	121	145
Ant 5			15.4	153.1	20.5	242.5
Ant 6			10.6	157.8	238	28
Ant 7			156.2	9.2	59.8	206
Ant 8			156.2	9.2	235	30.6
Ant 9			133.8	34.5	248.5	17.3

Antenna	Supported bands
Ant 1	LTE 2/4/7/25/30/38/41/66, NR n2/7/30/25/38/41/66
Ant 2	LTE 2/4/5/7/12/13/14/17/25/26/38/41/66/71, NR n2/5/12/14/25/41/48/66/71
Ant 3	RX only
Ant 4	LTE 42, NR n48/77/78
Ant 5	RX only
Ant 6	RX only
Ant 7	LTE 42/43/48, NR n48/77/78
Ant 8	WLAN2.4G, WLAN5G, Bluetooth
Ant 9	WLAN2.4G, WLAN5G

Note:

1. LTE Band 2/4/7/25/38/41/66 and NR n2/25/66 of antenna 2 can only TX transmit in ENDC or UL CA mode.
2. NR n41 of antenna 2 can only TX transmit in NR UL MIMO mode.
3. LTE Band 42 and NR n48 of antenna 4 can only TX transmit in ENDC or UL CA mode.
4. NR n77/78 of antenna 4 can only TX transmit in ENDC or NR UL MIMO mode.




BUREAU
VERITAS

FCC SAR Test Report



Certificate #6613.01

<Photographs of SAR Setup>

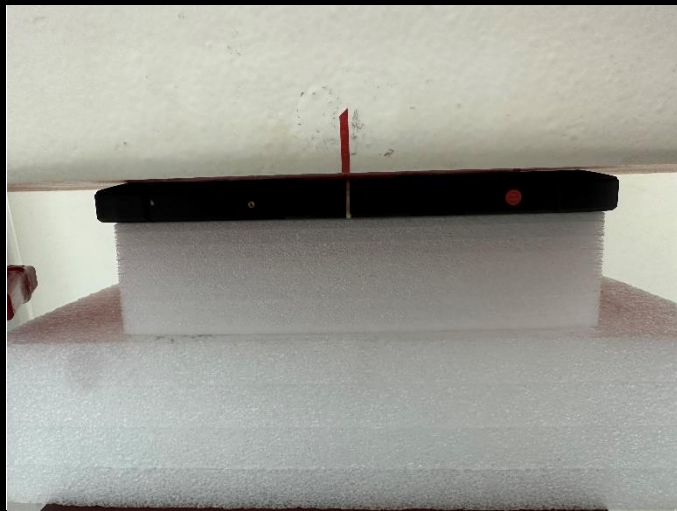

Rear Face of EUT with 0 cm Gap



Right Side of EUT with 0 cm Gap



Top Side of EUT with 0 cm Gap