

TEST REPORT

Applicant:	Power Idea Technology (Shenzhen) Co., Ltd.
Address:	4th Floor, A Section, Languang Science&technology Building, No.7 Xinxi RD, Hi-Tech Industrial Park North, Nanshan District, ShenZhen, P.R.C.

Manufacturer or Supplier:	Power Idea Technology (Shenzhen) Co., Ltd.
Address:	4th Floor, A Section, Languang Science&technology Building, No.7 Xinxi RD, Hi-Tech Industrial Park North, Nanshan District, ShenZhen, P.R.C.
Product:	Smart Phone
Brand Name:	RugGear
Model Name:	PSM03G
Marketing name:	RG880
FCC ID:	ZLE-RG880
Date of tests:	Dec. 20, 2023 ~Mar. 20, 2024

The submitted sample of the above equipment has been tested for according to the requirements of the following standards:

- | | |
|--|---|
| ☒ FCC Part 15, Subpart C, Section 15.247 | ☒ ANSI C63.10-2020 |
| ☒ FCC Part 15, Subpart E, Section 15.407 | |
| ☒ FCC Part 22 | ☒ FCC Part 24 |
| ☒ FCC Part 90 | |
| ☒ FCC Part 27 | ☒ ANSI/TIA/EIA-603-D |
| ☒ FCC Part 2 | ☒ ANSI/TIA/EIA-603-E ☒ ANSI C63.26-2015 |

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Hanwen Xu Engineer / Mobile Department	Approved by Peibo Sun Manager / Mobile Department
	
Date: Mar. 20, 2024	Date: Mar. 20, 2024

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

TABLE OF CONTENTS

RELEASE CONTROL RECORD	3
1 GENERAL INFORMATION	4
1.1 GENERAL DESCRIPTION OF EUT.....	4
2 SUMMARY OF TEST RESULTS	7
2.1 TEST RESULTS	7
2.2 MEASUREMENT UNCERTAINTY	8
2.3 TEST INSTRUMENTS.....	9
2.4 REFERENCED STANDARDS	11
2.5 TEST CONFIGURATIONS	12
2.6 TEST DATA.....	13
2.6.1 EUT OPERATING CONDITIONS	14
2.6.2 TEST RESULTS	15



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
PSU-QSU2312200110RF12	Original release	Mar. 20, 2024

1 GENERAL INFORMATION

1.1 GENERAL DESCRIPTION OF EUT

PRODUCT*	Smart Phone	
BRAND NAME*	RugGear	
MODEL NAME*	PSM03G	
MARKETING NAME*	RG880	
NOMINAL VOLTAGE*	5.0Vdc/ 9.0Vdc/ 12.0Vdc(Adapter) 3.85Vdc (battery)	
MODULATION TYPE	BT_LE	GFSK
	Bluetooth	GFSK, $\pi/4$ -DQPSK, 8DPSK
	NFC	ASK
	WLAN	DSSS, OFDM
	GPS/GALILEO/GLO NASS/BDS	BPSK
	GSM/GPRS/EDGE	GMSK, 8PSK
	WCDMA	BPSK/QPSK
	CDMA2000	CDMA2000 1xRTT: BPSK, QPSK CDMA2000 1xEV-DO: 8PSK
	LTE	QPSK/16QAM/64QAM
OPERATING FREQUENCY	Bluetooth/BT_LE	2402MHz ~ 2480MHz
	NFC	13.56 MHz
	WLAN	2412 ~ 2462MHz for 11b/g/n(HT20/40)/ ac(VHT20/40) 5180 ~ 5240MHz, 5260 ~ 5320 MHz, 5745 ~ 5825 MHz for 11a/ n(HT20)/ n(HT40) / ac(VHT20)/ ac(VHT40) / ac(VHT80)
	GPS/GALILEO/GLO NASS/BDS	1559MHz ~ 1610MHz
	GSM	824.2MHz ~ 848.8MHz (FOR GSM 850) 1850.2MHz ~ 1909.8MHz (FOR GSM 1900)
	CDMA2000	824.70 MHz ~ 848.31 MHz (FOR CDMA2000 BC0) 1851.25 MHz ~ 1908.75 MHz (FOR CDMA2000 BC1)
	WCDMA	1852.4MHz ~ 1907.6MHz(FOR WCDMA Band 2)

		1712.4MHz ~ 1752.6MHz(FOR WCDMA Band 4) 826.4MHz ~ 846.6MHz (FOR WCDMA Band 5)
	LTE	1850.7MHz ~ 1909.3MHz (FOR LTE Band2) 1710.7MHz ~ 1754.3MHz (FOR LTE Band4) 824.7MHz ~ 848.3MHz (FOR LTE Band5) 2502.5MHz ~ 2567.5MHz (FOR LTE Band7) 699.7MHz ~ 715.3MHz (FOR LTE Band12) 779.5MHz ~ 784.5MHz (FOR LTE Band13) 790.5MHz ~ 795.5MHz (FOR LTE Band14) 706.5MHz ~ 713.5MHz (FOR LTE Band17) 2572.5MHz ~ 2617.5MHz (FOR LTE Band38) 2498.5MHz ~2687.5MHz (FOR LTE Band41) 1710.7MHz ~ 1779.3MHz (FOR LTE Band66) 2505.5MHz ~ 2564.7MHz (FOR LTE Band7C) 2499.3MHz ~2686.7MHz (FOR LTE Band41C) The following only support downlink CA_2A_4A CA_2A_12A CA_2A_13A CA_2A_17A CA_4A_12A CA_4A_17A
HW VERSION*	MP619_MB_V1.02_PCB	
SW VERSION*	RG880_EEA_00.00_1_20240305	
I/O PORTS*	Refer to user's manual	
CABLE SUPPLIED*	USB cable: non-shielded cable, with w/o ferrite core, 1.0 meter	
ACCESSORY DEVICES*	Refer to note as below	

NOTE:

1. *Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, Test Lab is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
2. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
4. Antenna gain and EUT conducted cable loss are provided by the customer, and the laboratory will record the results based on these items that involve these two parameters.

5. List of Accessory:

ACCESSORIES	BRAND	MANUFACTURER	MODEL	SPECIFICATION
CPU	QUALCOMM	N/A	SM6225	N/A
eMMC 1 (=ROM 1)	SAMSUNG	N/A	KM2L9001CM-B518	N/A
eMMC 2 (=ROM 2)	Hynix	N/A	H9QT0GECN6X145R	N/A
RAM 1	N/A	N/A	N/A	N/A
RAM 2	N/A	N/A	N/A	N/A
BT/WLAN Module	N/A	N/A	N/A	N/A
NFC chipset	NXP	N/A	N/A	N/A
Battery	N/A	N/A	BL450AGP	Power Rating: 4.4V 4500mAh
Adapter	N/A	SHENZHEN MERRYKING ELECTRONICS CO., LTD	MK-Q181US	I/P: 100-240Vac, 50/60Hz, 0.5A, O/P:5.0V 3.0A or 9.0V 2.0A or 12.0V 1.5A
USB Cable	N/A	Huizhou Huating Technology Co., Ltd	USB1.0	Signal Line,1.0meter

2 SUMMARY OF TEST RESULTS

2.1 TEST RESULTS


TEST TYPE	Result
Radiated Emissions	Pass

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Radiated emissions & Radiated Power (30MHz~1GHz)	±4.98dB
Radiated emissions & Radiated Power (1GHz ~6GHz)	±4.70dB
Radiated emissions (6GHz ~18GHz)	±4.60dB
Radiated emissions (18GHz ~40GHz)	±4.12dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

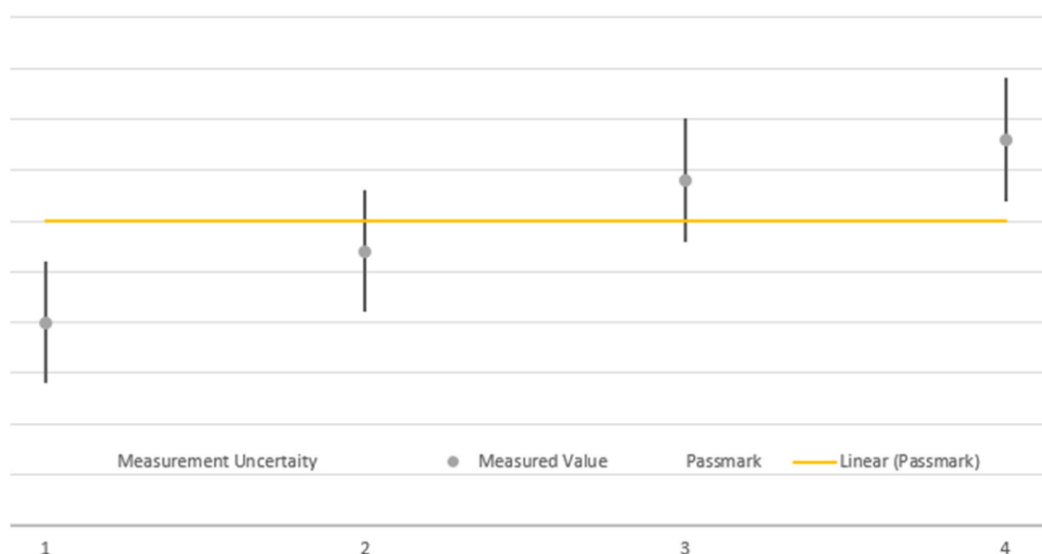

The verdicts in this test report are given according the above diagram:

Case	Measured Value	Uncertainty Range	Verdict
1	below pass mark	below pass mark	Passed
2	below pass mark	within pass mark	Passed
3	above pass mark	within pass mark	Failed
4	above pass mark	above pass mark	Failed

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so-called shared risk principle.

2.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Pre-Amplifier	R&S	SCU18F1	100815	Aug.30,22	Aug.29,24
Pre-Amplifier	R&S	SCU08F1	101028	Sep.16,22	Sep.15,24
Signal Generator	R&S	SMB100A	182185	Feb.16,22	Feb.15,24
Signal Generator	R&S	SMB100A	182185	Feb.15,24	Feb.14,26
3m Fully-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-01Chamber	Nov.25,22	Nov.24,25
3m Semi-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-02Chamber	Nov.25,22	Nov.24,25
6DB attenuator	Tonscend Technology Co., Ltd	N/A	23062787	N/A	N/A
EMI TEST Receiver	R&S	ESW44	101973	Feb.25,22	Feb.24,24
EMI TEST Receiver	R&S	ESW44	101973	Feb.24,24	Feb.23,26
Bilog Antenna	SCHWARZBECK	VULB 9163	1264	Feb.28,22	Feb.27,24
Bilog Antenna	SCHWARZBECK	VULB 9163	1264	Feb.27,24	Feb.26,26
Horn Antenna	ETS-LINDGREN	3117	227836	Aug.22,22	Aug.21,24
Horn Antenna (18GHz-40GHz)	Steatite Q-par Antennas	QMS 00880	23486	Feb.23,22	Feb.22,24
Horn Antenna (18GHz-40GHz)	Steatite Q-par Antennas	QMS 00880	23486	Feb.22,24	Feb.21,26
Horn Antenna	Steatite Q-par Antennas	QMS 00208	23485	Aug.22,22	Aug.21,24
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.23,22	Feb.22,24
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.22,24	Feb.21,26
WIDEBANDRADIO COMMUNICATION TESTER	R&S	CMW500	169399	Jun.27,22	Jun.26,24
Test Software	ELEKTRA	ELEKTRA4.32	N/A	N/A	N/A
Open Switch and Control Unit	R&S	OSP220	101964	N/A	N/A
DC Source	HYELEC	HY3010B	551016	Aug.31,22	Aug.30,24
Hygrothermograph	DELI	20210528	SZ014	Sep.06,22	Sep.05,24
PC	LENOVO	E14	HRSW0024	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-7.00M	N/A	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-4.00M	N/A	N/A	N/A
CABLE	R&S	W13.02	N/A	Apr.28,23	Apr.27,24
CABLE	R&S	W12.14	N/A	Apr.28,23	Apr.27,24

- NOTE:**
1. The calibration interval of the above test instruments is 12 / 24/ 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Chamber.
 3. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.



Test Report No.: PSU-QSU2312200110RF12

4. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
5. The FCC Site Registration No. is 434559; The Designation No. is CN1325.

2.4 REFERENCED STANDARDS

The following referenced standards are necessary for the report. For undated references in this report, the cited version applies.

No.	Identify	Note
1	FCC Part 15, Subpart C, Section 15.247	For BT
2	FCC Part 15, Subpart E, Section 15.407	For WLAN
3	FCC PART 22, Subpart H	For WWAN
4	FCC PART 24, Subpart E	For WWAN
5	FCC Part 27	For WWAN
6	FCC Part 90	For WWAN

Note: More informations and test procedures pls refer to 15.247/15.407/Part22/Part24/ Part27/ Part90 reports.


2.5 TEST CONFIGURATIONS

Test Configurations	Description
Worst case test Mode	
1	GSM850-MID + WLAN-5G-11N20-CH64
2	WCDMA-B4-LOW + WLAN-2.4G-11N40-CH3
3	LTE-B7-HIGH-20M + BT2.0-1DH5_CH78


- Note:**
1. Test equipment and site refer to Referenced Standards report
 2. For higher frequency, the emission is 20dB below the limit was not record

2.6 TEST DATA


<Frequency Range 9KHz~30MHz >

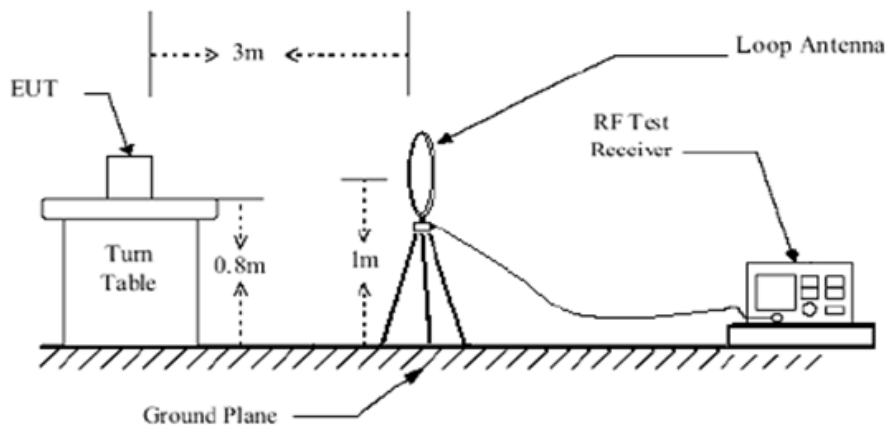

< Frequency Range 30MHz~1GHz >

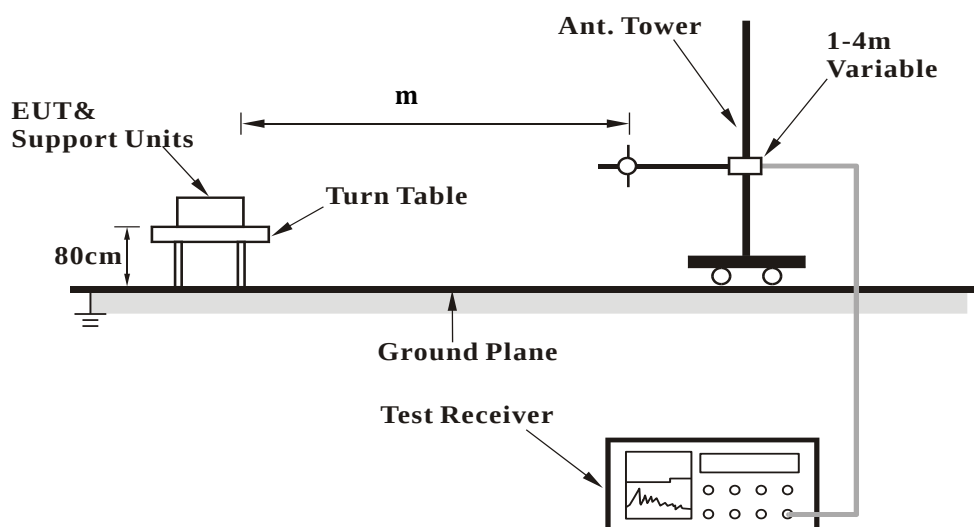

<Frequency Range above 1GHz>

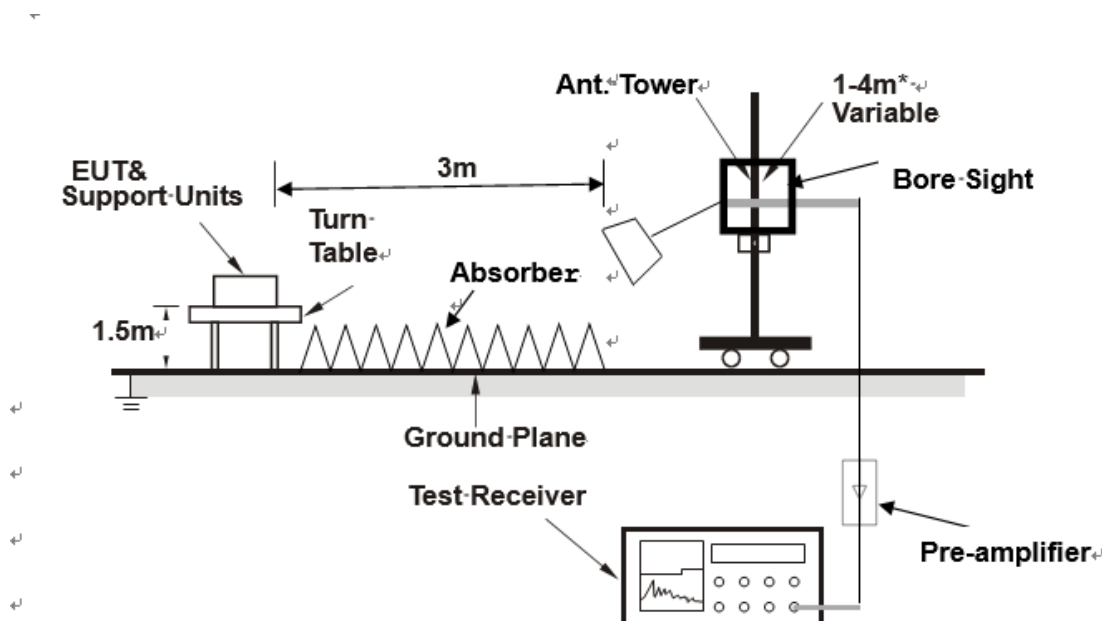

Note: Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

2.6.1 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.

2.6.2 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.


GSM850-MID + WLAN-5G-11N20-CH64:

BELOW 1GHz WORST-CASE DATA:

30 MHz – 1GHz data:


CHANNEL	GSM850-MID + WLAN-5G-11N20-CH64	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+: QPK Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	55.948	26.89	40.00	13.11	-8.23	H	1	1.00
1	105.757	22.97	43.50	20.53	-9.04	H	359	2.00
1	163.860	19.69	43.50	23.81	-11.42	H	258.9	1.00
1	263.479	23.17	46.00	22.83	-6.70	H	358	1.00
1	388.949	26.01	46.00	19.99	-3.46	H	358	1.00
1	599.439	27.95	46.00	18.05	-1.78	H	258.9	1.00

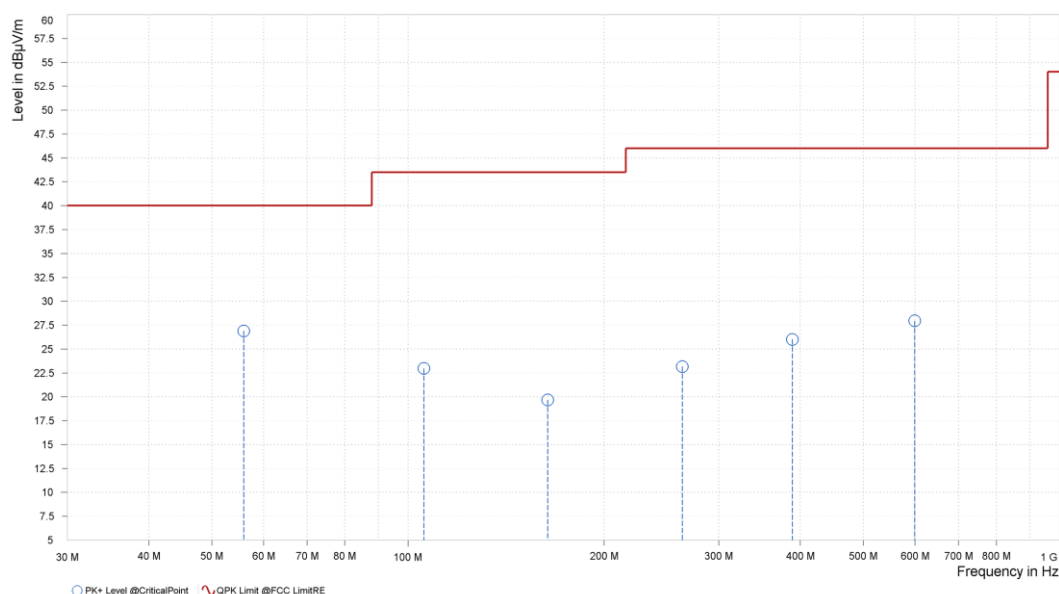

CHANNEL	GSM850-MID + WLAN-5G-11N20-CH64	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+: QPK Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	49.012	28.03	40.00	11.97	-7.40	V	359	2.00
1	73.990	21.38	40.00	18.62	-13.16	V	0.9	2.00
1	112.353	22.86	43.50	20.64	-9.64	V	3.9	1.00
1	232.536	21.53	46.00	24.47	-7.59	V	101.2	2.00
1	498.607	26.82	46.00	19.18	-3.55	V	359.1	1.00
1	742.514	30.93	46.00	15.07	0.51	V	354.9	2.00

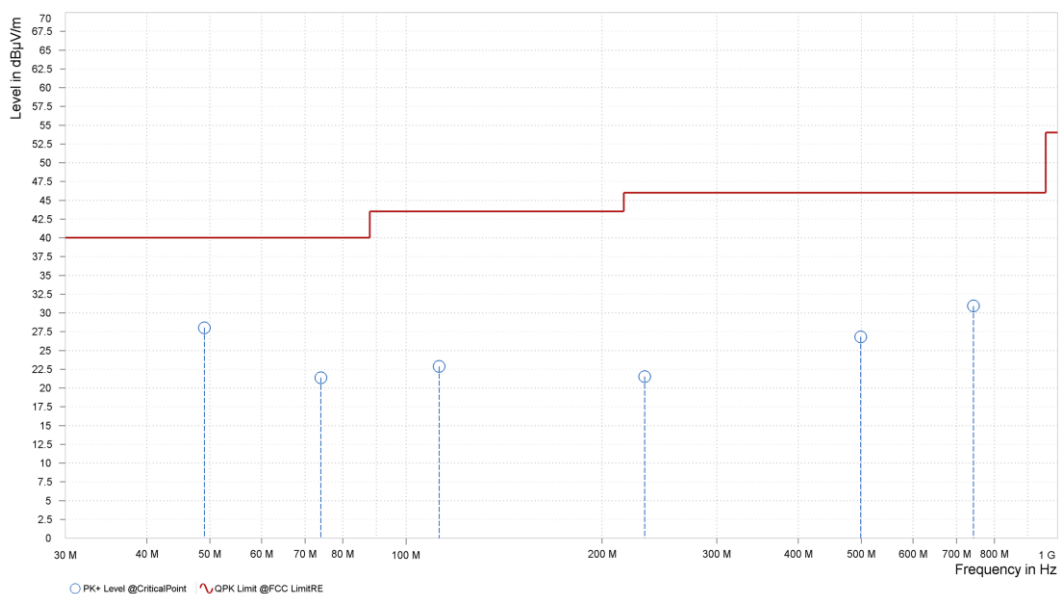


ABOVE 1GHz WORST-CASE DATA:

Note: 1. For radiated emissions testing, the full testing range of different modes have been scanned, only the worst case harmonic data is reported in the sheet.

2. All other emissions that more than 20dB below the limit were not recorded


CHANNEL	GSM850-MID + WLAN-5G-11N20-CH64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,673.000	41.26	74.00	32.74	27.74	54.00	26.26	-5.88	V	1	2.00
1	2,509.000	45.82	74.00	28.18	33.15	54.00	20.85	1.17	V	5.1	2.00
4	10,640.000	38.29	74.00	35.71	27.64	54.00	26.36	12.29	V	358.6	2.00
4	15,960.000	43.92	74.00	30.08	31.56	54.00	22.44	16.86	V	358.6	2.00

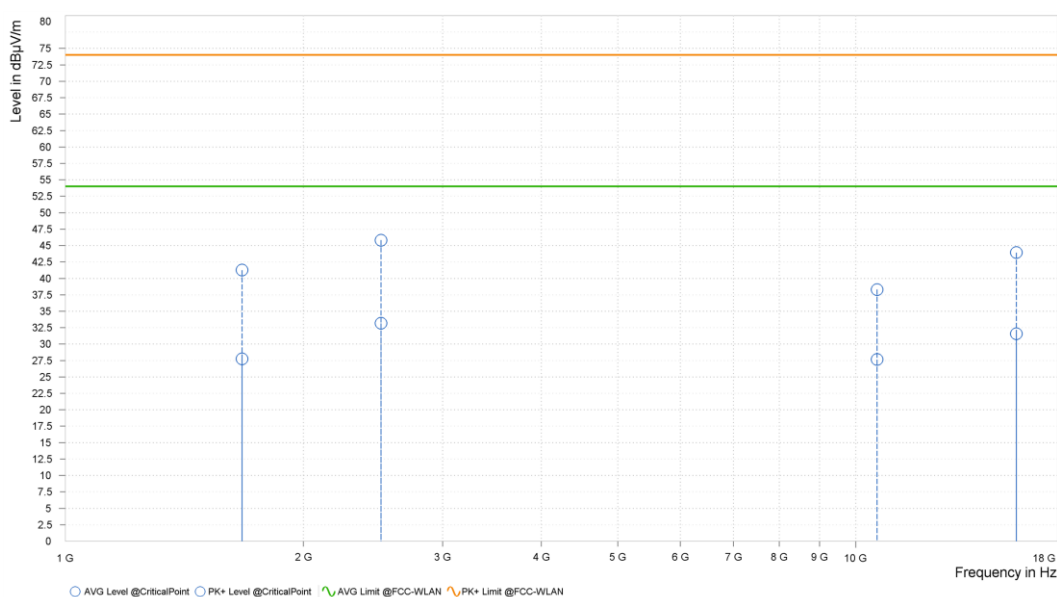

CHANNEL	GSM850-MID + WLAN-5G-11N20-CH64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,673.000	40.45	74.00	33.55	28.39	54.00	25.61	-5.27	H	1	2.00
1	2,509.000	45.67	74.00	28.33	33.59	54.00	20.41	1.49	H	1	2.00
4	10,640.000	39.16	74.00	34.84	27.23	54.00	26.77	12.10	H	359.1	2.00
4	15,960.000	43.65	74.00	30.35	31.62	54.00	22.38	17.08	H	358.3	2.00

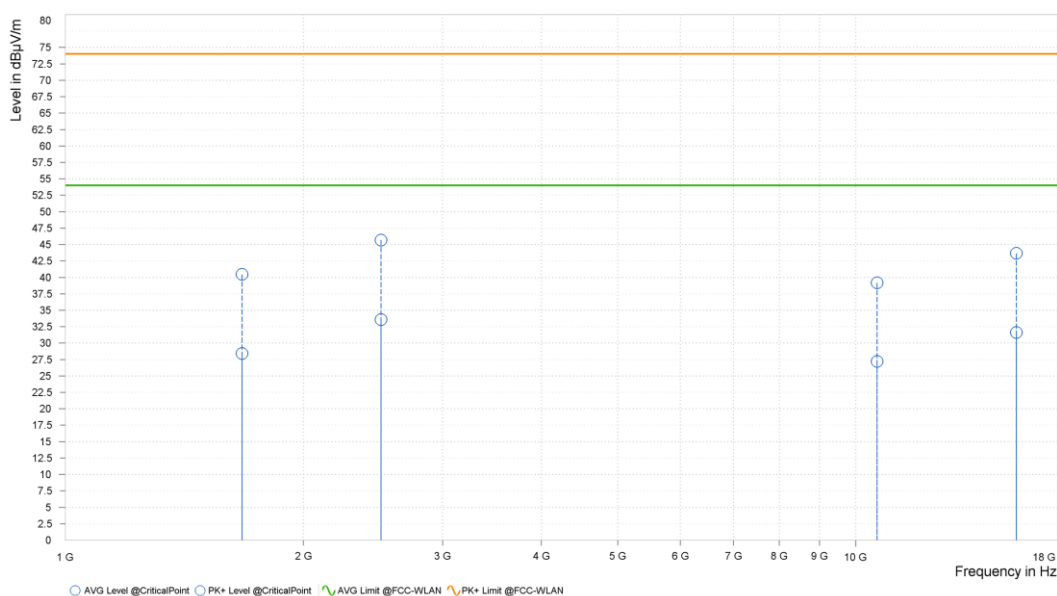

Note: For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.


WCDMA-B4-LOW + WLAN-2.4G-11N40-CH3:

BELOW 1GHz WORST-CASE DATA:

30 MHz – 1GHz data:


CHANNEL	WCDMA-B4-LOW + WLAN-2.4G-11N40-CH3	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+: QPK Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	48.964	28.98	40.00	11.02	-7.40	H	1	1.00
1	110.801	22.81	43.50	20.69	-9.41	H	279.2	1.00
1	198.829	21.56	43.50	21.94	-8.53	H	359.1	1.00
1	286.662	23.33	46.00	22.67	-5.95	H	1.7	2.00
1	352.234	25.78	46.00	20.22	-3.64	H	355.6	2.00
1	626.744	28.66	46.00	17.34	-1.52	H	231.5	2.00

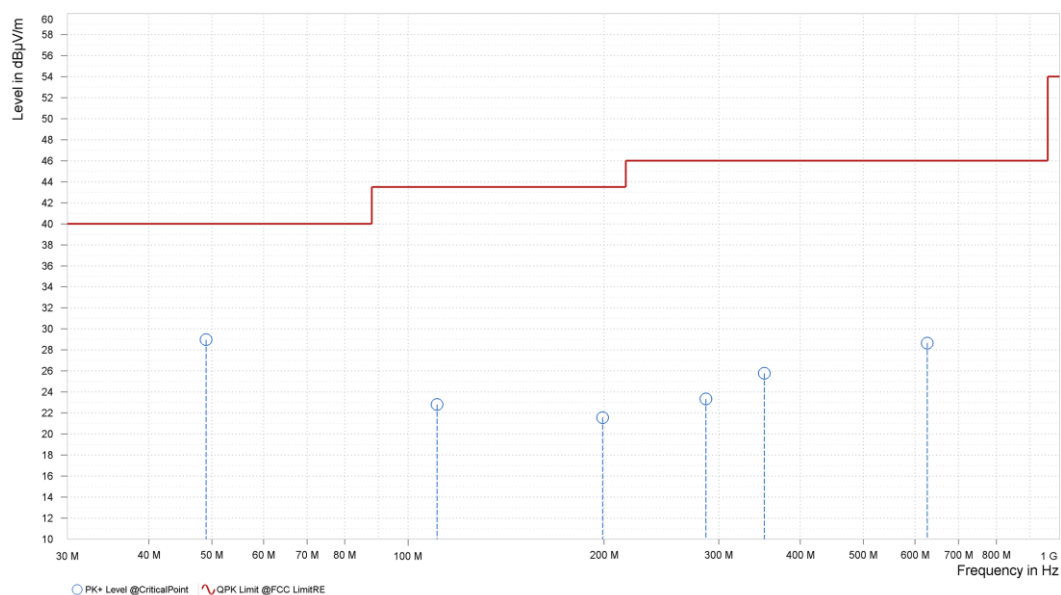

CHANNEL	WCDMA-B4-LOW + WLAN-2.4G-11N40-CH3	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+: QPK Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	55.123	27.14	40.00	12.86	-8.01	V	262.6	1.00
1	78.646	20.66	40.00	19.34	-13.57	V	354.2	2.00
1	111.626	23.47	43.50	20.03	-9.54	V	1	1.00
1	178.071	19.64	43.50	23.86	-10.63	V	359	2.00
1	255.574	22.85	46.00	23.15	-6.89	V	359.1	1.00
1	416.157	27.00	46.00	19.00	-3.37	V	358.6	1.00

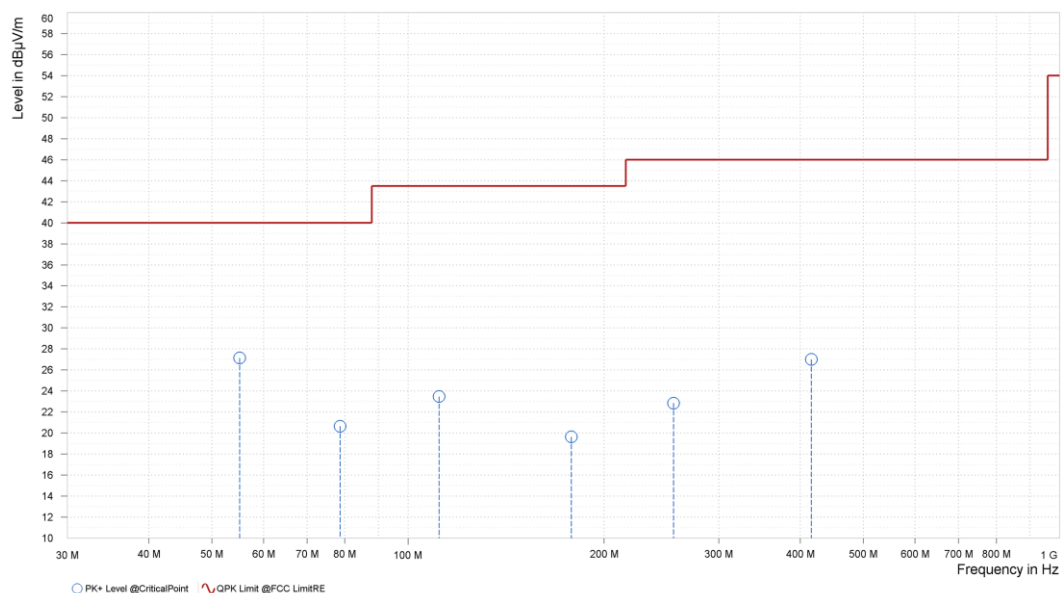


ABOVE 1GHz WORST-CASE DATA:

Note: 1. For radiated emissions testing, the full testing range of different modes have been scanned, only the worst case harmonic data is reported in the sheet.

2. All other emissions that more than 20dB below the limit were not recorded


CHANNEL	WCDMA-B4-LOW + WLAN-2.4G-11N40-CH3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	3,465.000	49.30	74.00	24.70	36.80	54.00	17.20	2.90	H	359	2.00
3	4,844.000	52.45	74.00	21.55	40.02	54.00	13.98	4.52	H	359	2.00
3	5,198.000	53.62	74.00	20.38	41.01	54.00	12.99	5.27	H	359	2.00
3	7,266.000	57.10	74.00	16.90	44.95	54.00	9.05	11.18	H	225.5	1.00

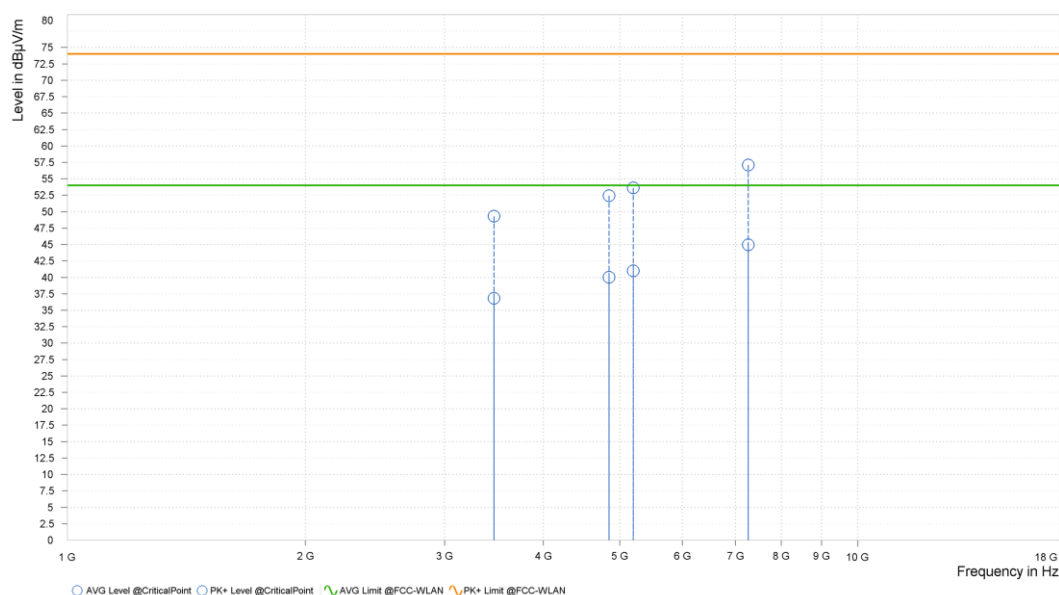

CHANNEL	WCDMA-B4-LOW + WLAN-2.4G-11N40-CH3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	3,465.000	49.86	74.00	24.14	37.39	54.00	16.61	2.87	V	133.4	2.00
3	4,844.000	52.51	74.00	21.49	40.18	54.00	13.82	4.44	V	1	1.00
3	5,198.000	53.35	74.00	20.65	41.93	54.00	12.07	5.86	V	0.9	2.00
3	7,266.000	57.02	74.00	16.98	44.90	54.00	9.10	11.16	V	133.4	2.00

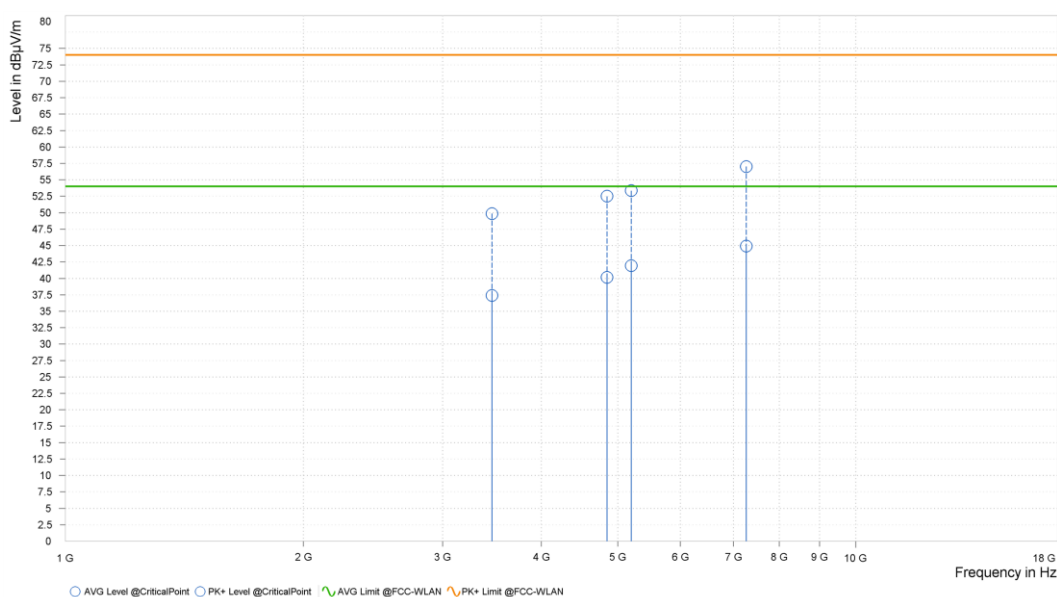

Note: For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.


LTE-B7-HIGH-20M + BT2.0-1DH5_CH78:

BELOW 1GHz WORST-CASE DATA:

30 MHz – 1GHz data:


CHANNEL	LTE-B7-HIGH-20M + BT2.0-1DH5_CH78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+: QPK Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	40.476	28.46	40.00	11.54	-8.26	H	261.3	1.00
1	64.823	25.71	40.00	14.29	-9.71	H	230.3	2.00
1	150.329	19.20	43.50	24.30	-12.20	H	1	1.00
1	211.342	21.34	43.50	22.16	-8.71	H	354.2	2.00
1	348.888	24.69	46.00	21.31	-3.67	H	128.6	1.00
1	513.933	27.34	46.00	18.66	-3.46	H	1.7	2.00

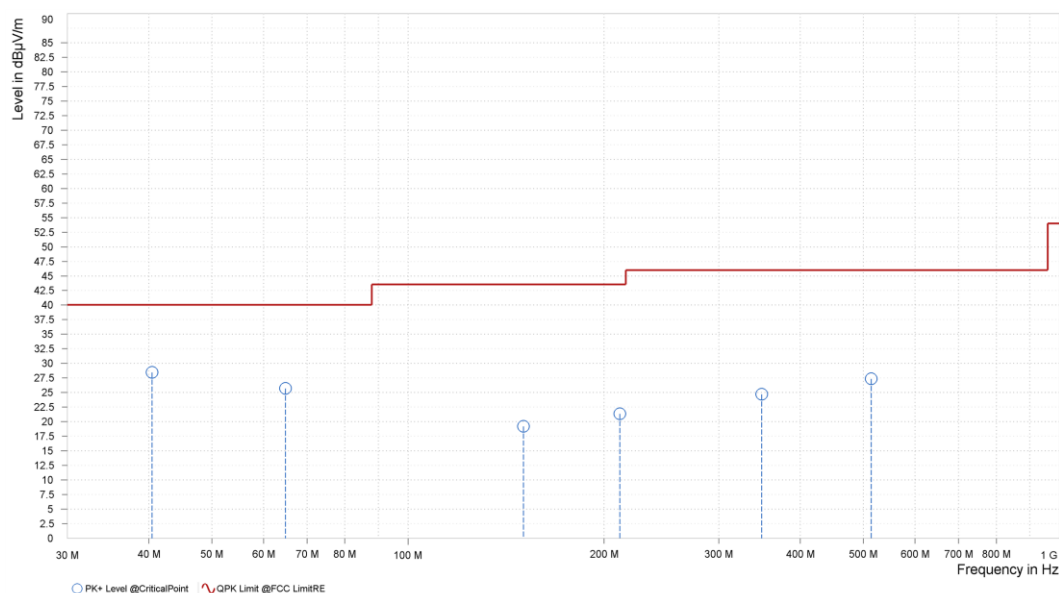

CHANNEL	LTE-B7-HIGH-20M + BT2.0-1DH5_CH78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+: QPK Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	41.010	28.26	40.00	11.74	-8.07	V	1	1.00
1	57.257	26.75	40.00	13.25	-8.61	V	232.6	2.00
1	103.332	23.37	43.50	20.13	-9.10	V	232.6	2.00
1	189.274	19.93	43.50	23.57	-9.51	V	0.9	2.00
1	330.264	25.13	46.00	20.87	-4.48	V	274.5	1.00
1	514.855	27.51	46.00	18.49	-3.45	V	355.5	2.00

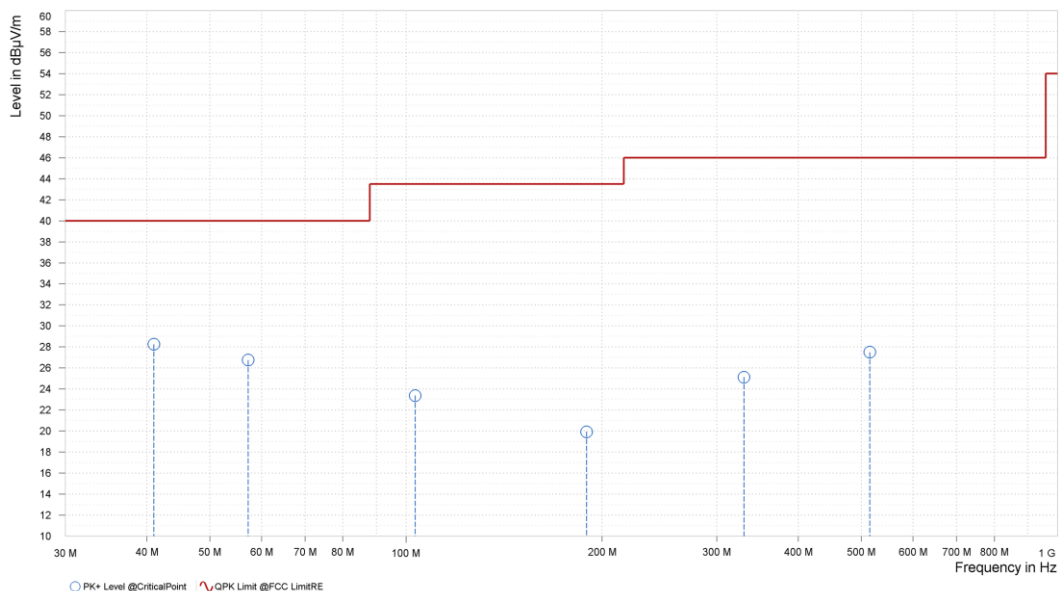


ABOVE 1GHz WORST-CASE DATA:

Note: 1. For radiated emissions testing, the full testing range of different modes have been scanned, only the worst case harmonic data is reported in the sheet.

2. All other emissions that more than 20dB below the limit were not recorded


CHANNEL	LTE-B7-HIGH-20M + BT2.0-1DH5_CH78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	4,960.000	50.21	74.00	23.79	39.05	54.00	14.95	4.83	H	132.2	2.00
3	5,120.000	50.06	74.00	23.94	39.64	54.00	14.36	5.34	H	359	1.00
3	7,440.000	55.88	74.00	18.12	45.37	54.00	8.63	10.81	H	278	1.00
3	7,680.000	56.75	74.00	17.25	46.25	54.00	7.75	10.48	H	0.9	2.00

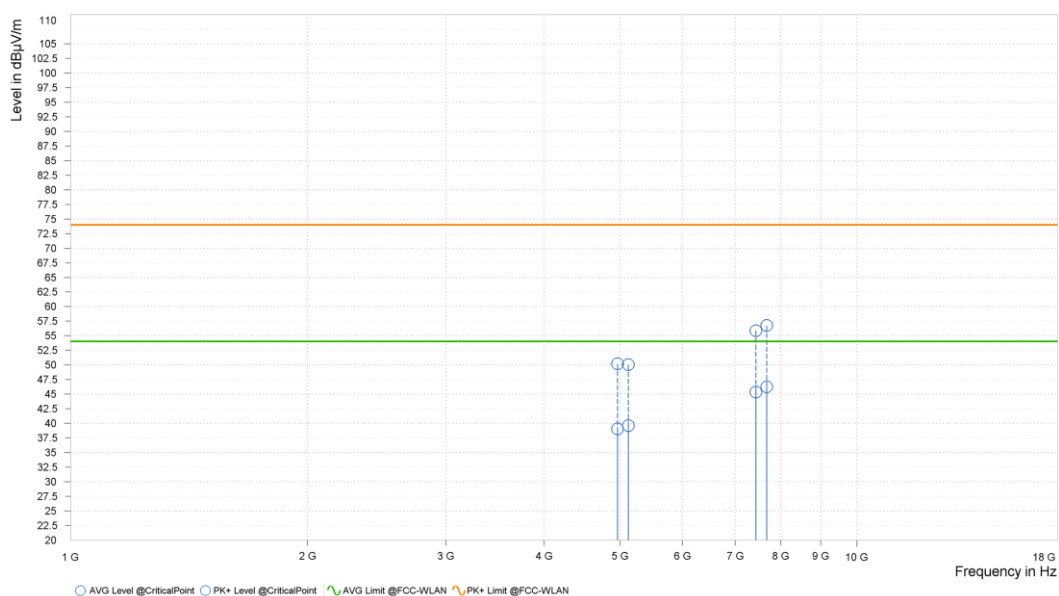

CHANNEL	LTE-B7-HIGH-20M + BT2.0-1DH5_CH78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	4,960.000	50.11	74.00	23.89	40.87	54.00	13.13	4.83	V	0.9	2.00
3	5,120.000	51.02	74.00	22.98	40.90	54.00	13.10	5.34	V	0.9	2.00
3	7,440.000	58.52	74.00	15.48	48.14	54.00	5.86	10.81	V	0.9	2.00
3	7,680.000	58.57	74.00	15.43	47.35	54.00	6.65	10.48	V	0.9	2.00

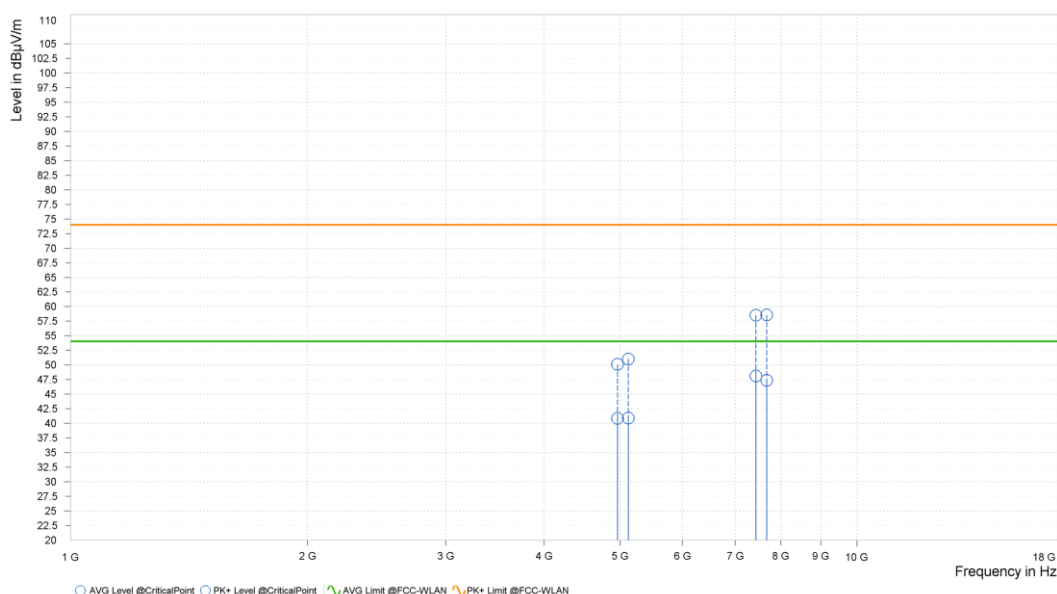

Note: For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.

--END--