


Measurements Results

No.1-5618/22-01-11_Annex_MR

Test logging

This document is electronically signed and valid without handwritten signature.
For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Document authorized:



cn=Marco Bertolino, o=CTC
advanced GmbH, ou=BTL-211209,
email=marco.bertolino@ctcadvan
ced.com, c=DE
2023.05.23 09:51:19 +02'00'

Marco Bertolino
Supervisor Radio Services
Radio Labs

Test/s performed:



cn=Andreas Kurzkurt, o=CTC
advanced GmbH,
ou=KZK-200114,
email=Andreas.Kurzkurt@ctc
advanced.com, c=DE

Andreas Kurzkurt
Testing Manager
Radio Labs

Table of Content

EUT Information	3
FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1	4
ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1	8
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-1	12
FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1	16
ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1	20
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-1	24
FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1	28
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-1	32
ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1	36

EUT Information

EUT DEFINITION

Manufacturer	Teledyne Flir
Type	Flir-E1330
Serial Number	Prot 2.12
Setup Number	1.0
Version SW	NI
Version FW	NI
Version HW	NI
Comment 1	
Comment 2	
Temperature [°C] Min	-15
Temperature [°C] Nom	20
Temperature [°C] Max	40
Voltage [V] Min	3.3
Voltage [V] Nom	3.7
Voltage [V] Max	4.2

FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1

Test References

TC Start	11.05.2023 13:21:23
Ambit Temp [°C] Humidity [rel%]	22.9 41
System Version	4.0.1.0
Test Specification	FCC 15.407 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-1
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5180 MHz


RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	4.48	dBm	INFO
Ref. Frequency	---	---	5176.000	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Result Summary					
Number of detected Bursts:48					
Duty Cycle (Burst Ratio) max	---	---	0.938	---	INFO
Duty Cycle max	---	---	0.278	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	0.904	---	INFO
Duty Cycle min	---	---	0.438	dB	INFO
Max TX Burst Length	---	---	1.9	ms	INFO
Min Gap Length	---	---	0.125	ms	INFO
Max Gap Length	---	---	0.2	ms	INFO

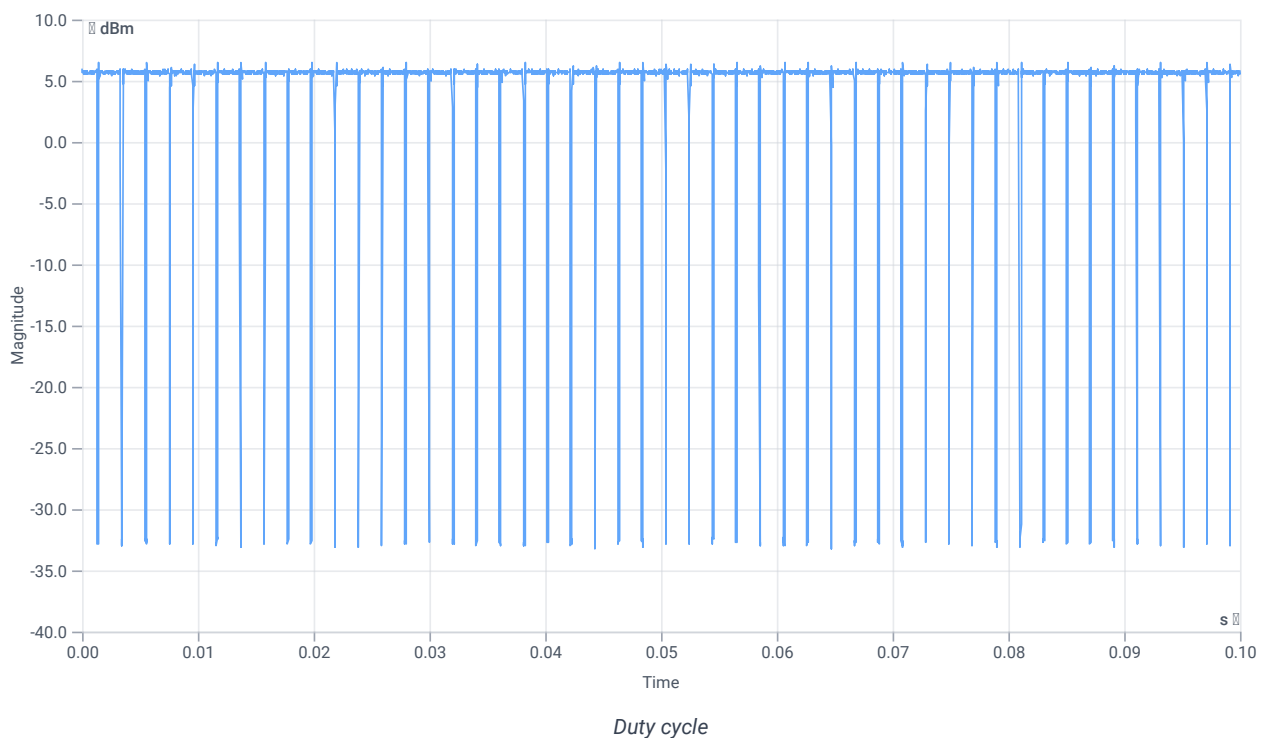

Evaluation Bandwidth

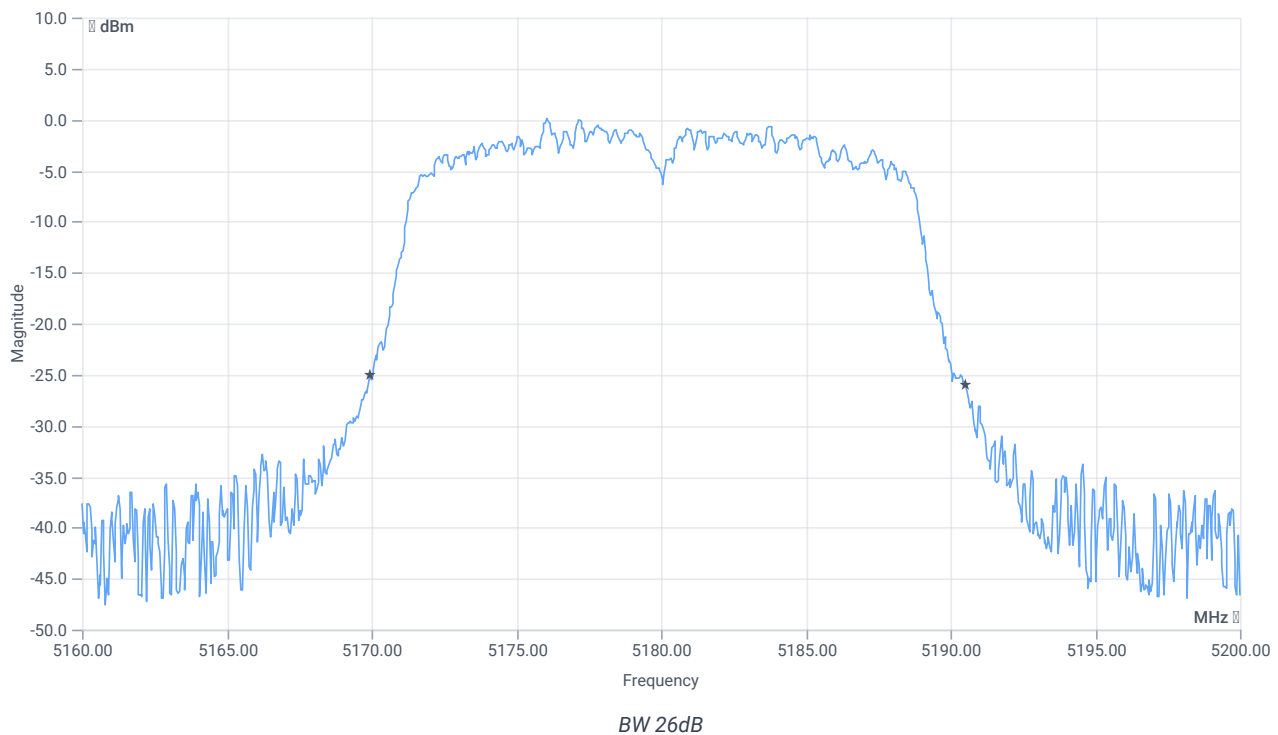


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	20.6	MHz	INFO
T1 26dB	---	---	5169.9200	MHz	INFO
T2 26dB	---	---	5190.5200	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.48 15.09 20
Start [MHz] Stop [MHz]	5160.000 5200.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

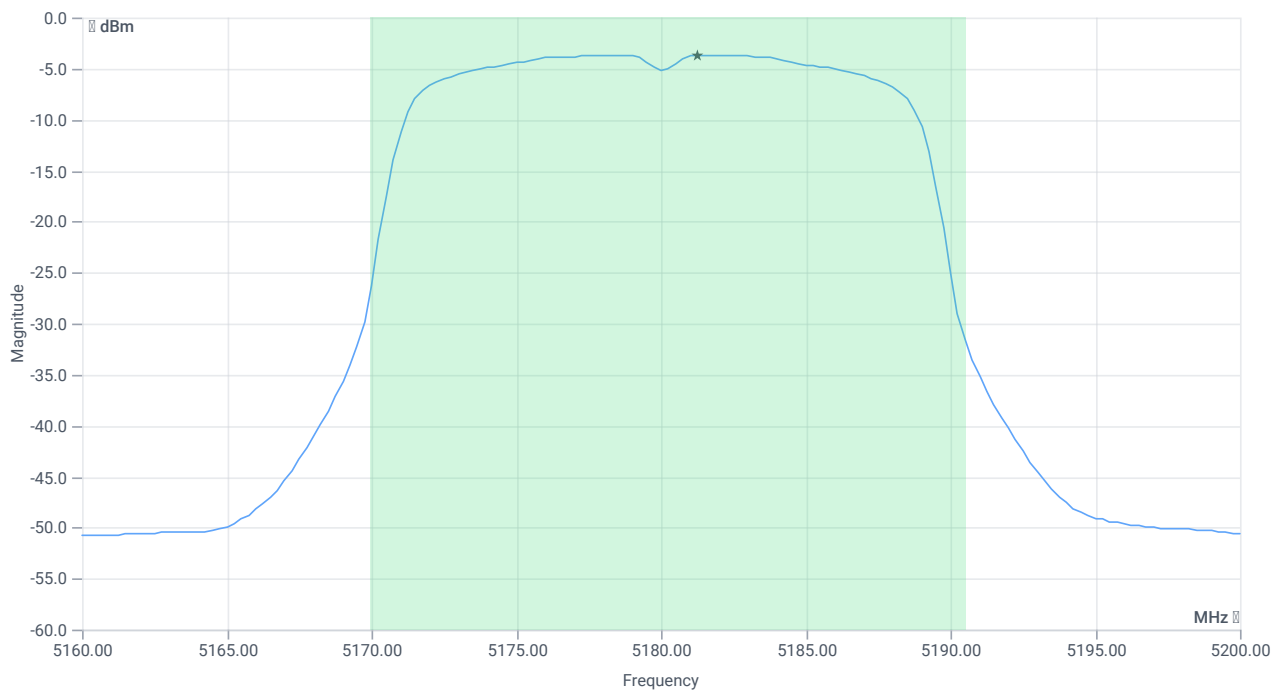

Max OP and PSD

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	7.55	dBm	INFO
Duty Cycle Correction	---	---	0.44	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	7.99	dBm	PASS
Limit: 11 dBm + 10 log 20.6					
Max Output Power DC corrected	---	24.14	7.99	dBm	na

Power Spectral Density

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-3.7	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0.44	dB	INFO
Power Spectral Density DC corrected	---	11	-3.26	dBm/1MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1

Test References

TC Start	11.05.2023 13:22:55
Ambit Temp [°C] Humidity [rel%]	22.9 41
System Version	4.0.1.0
Test Specification	ISED RSS247 -
Test Method	
TC Version	0.0.1
My Description	ISED Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-1
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5180 MHz


RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	3.82	dBm	INFO
Ref. Frequency	---	---	5175.600	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Result Summary					
Number of detected Bursts:48					
Duty Cycle (Burst Ratio) max	---	---	0.938	---	INFO
Duty Cycle max	---	---	0.278	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	0.893	---	INFO
Duty Cycle min	---	---	0.491	dB	INFO
Max TX Burst Length	---	---	1.9	ms	INFO
Min Gap Length	---	---	0.125	ms	INFO
Max Gap Length	---	---	0.225	ms	INFO

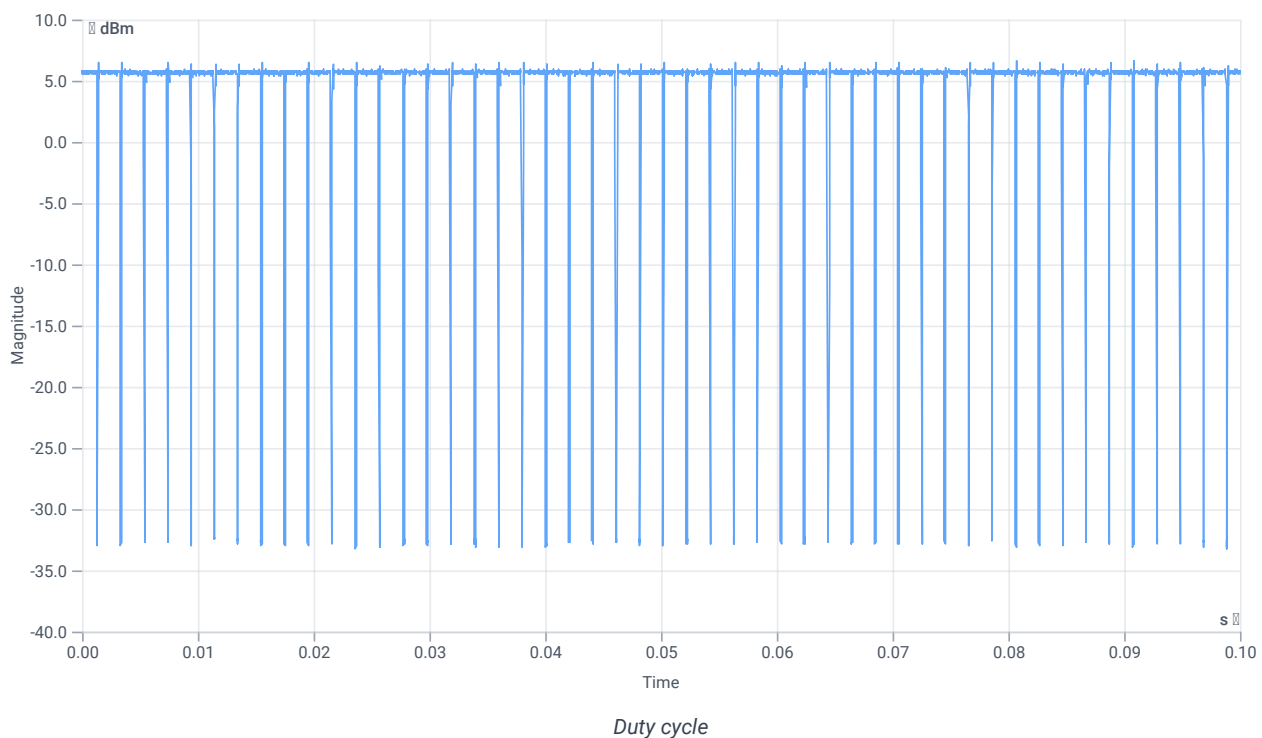

Evaluation Bandwidth

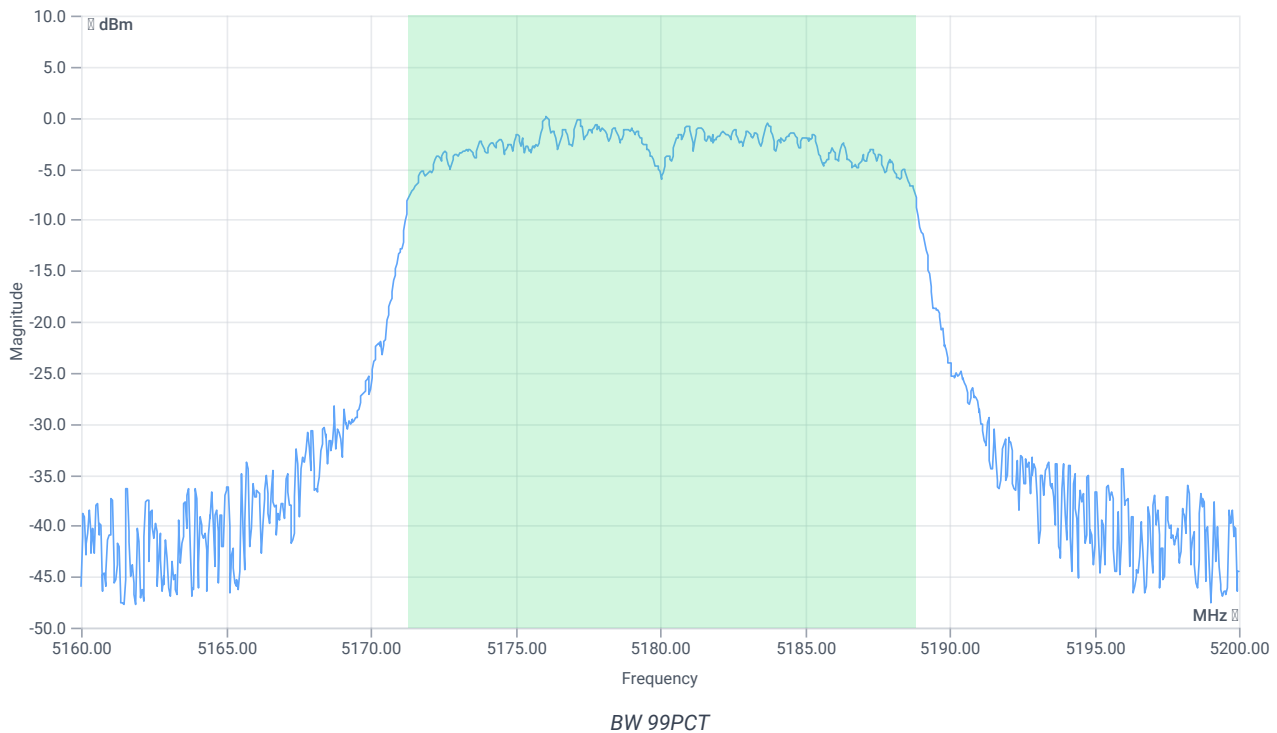


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17.502	MHz	INFO
T1 99%	---	---	5171.3287	MHz	INFO
T2 99%	---	---	5188.8312	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.82 15.09 15
Start [MHz] Stop [MHz]	5160.000 5200.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

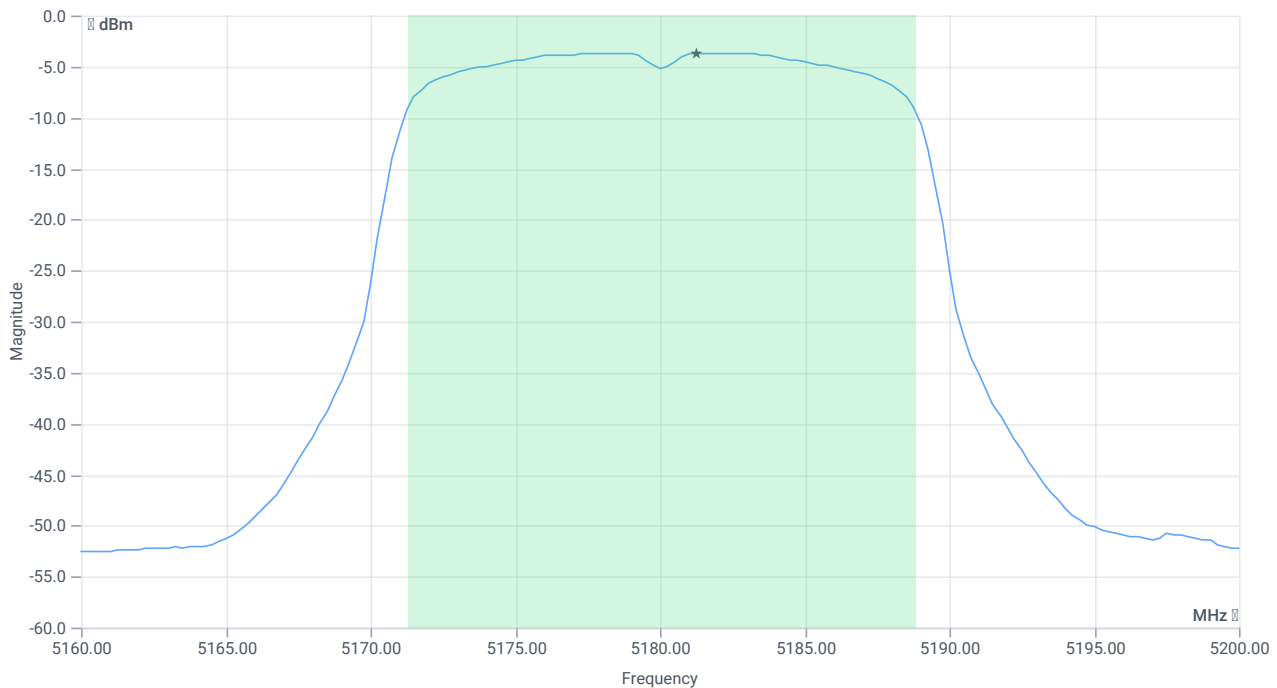

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	7.49	dBm	INFO
Duty Cycle Correction	---	---	0.49	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	7.98	dBm	na
Limit: 11 dBm + 10 log 17.502					
Max Output Power DC corrected	---	23.43	7.98	dBm	na

Power Spectral Density

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-3.68	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0.49	dB	INFO
Power Spectral Density DC corrected	---	11	-3.19	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-1

Test References

TC Start	11.05.2023 13:24:26
Ambit Temp [°C] Humidity [rel%]	22.9 42
System Version	4.0.1.0
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT20 mode U-NII-1
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 5180 MHz


RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	4.72	dBm	INFO
Ref. Frequency	---	---	5177.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.72 15.09 15
Start [MHz] Stop [MHz]	5155.000 5205.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1 2500 1001 SWE

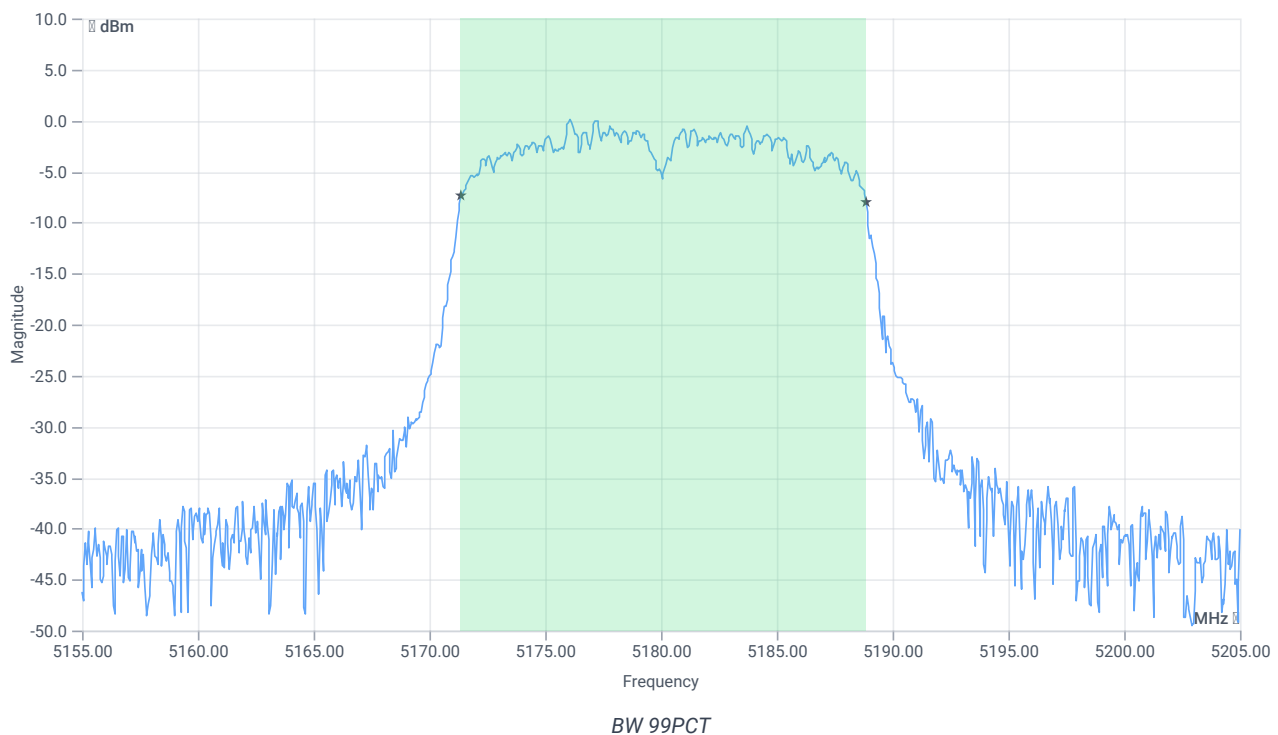


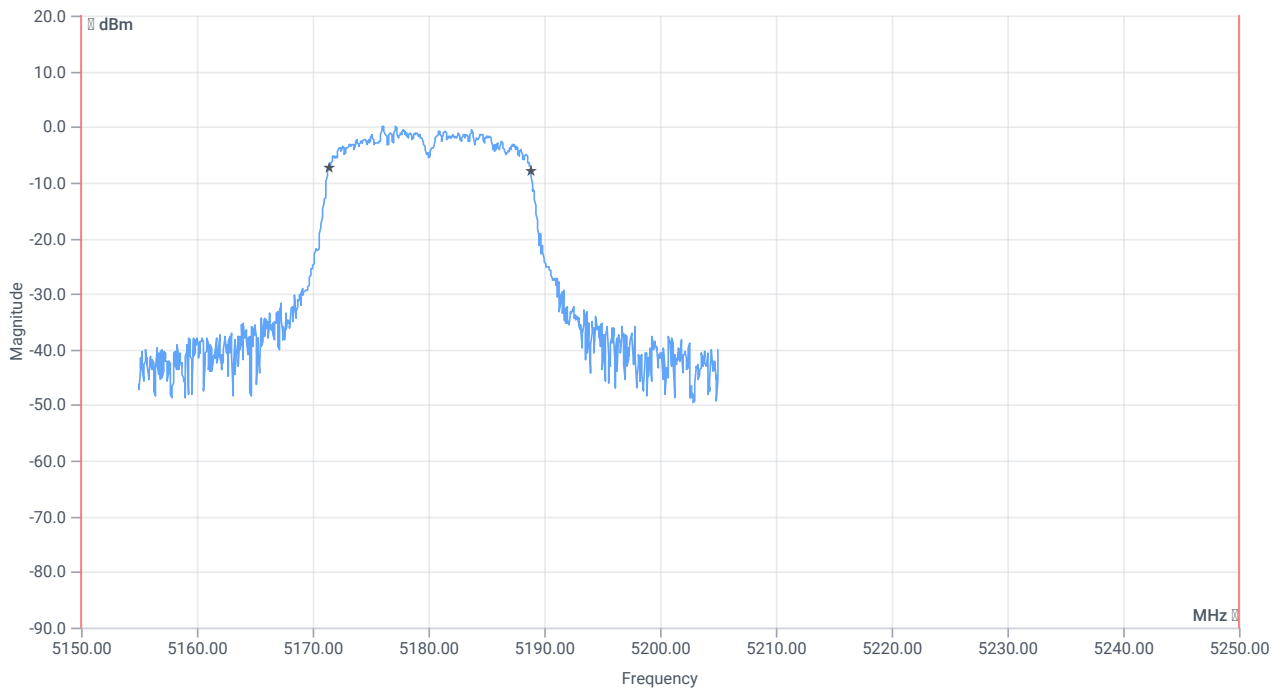


BW within Band 99PCT

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17.483	MHz	INFO
T1 99%	5150.000000	---	5171.3586	MHz	PASS
T2 99%	---	5250.000000	5188.8412	MHz	PASS

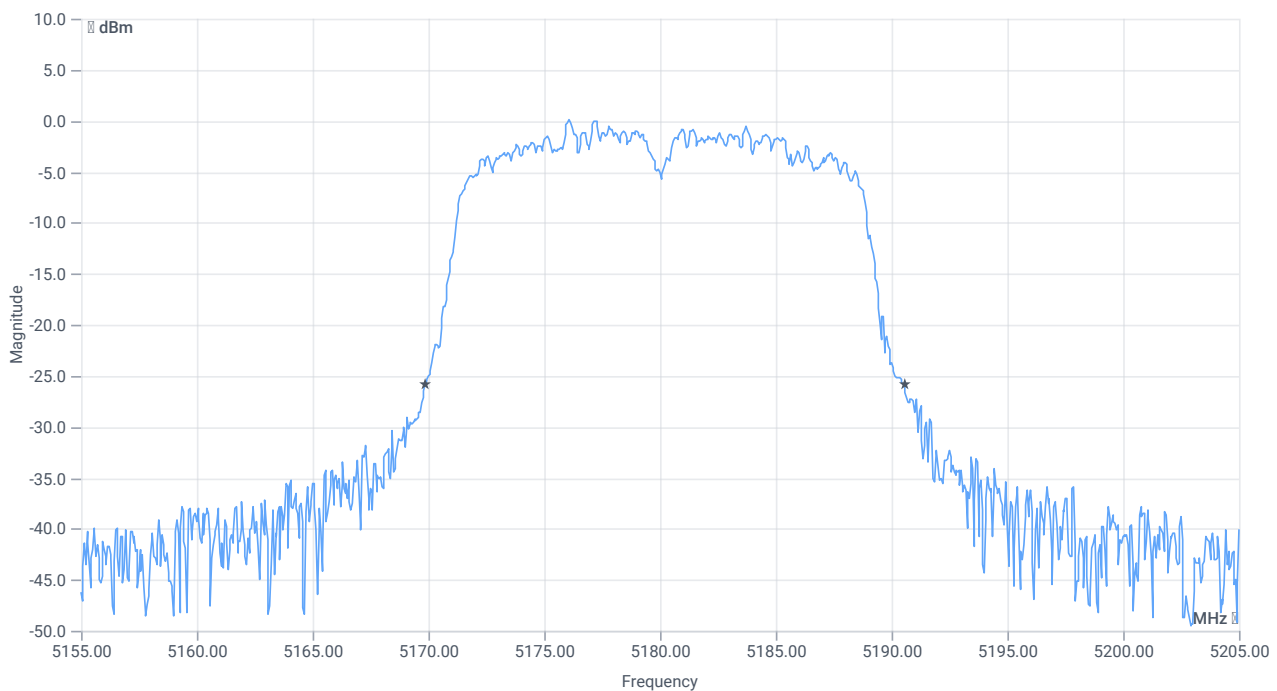

BW 26dB

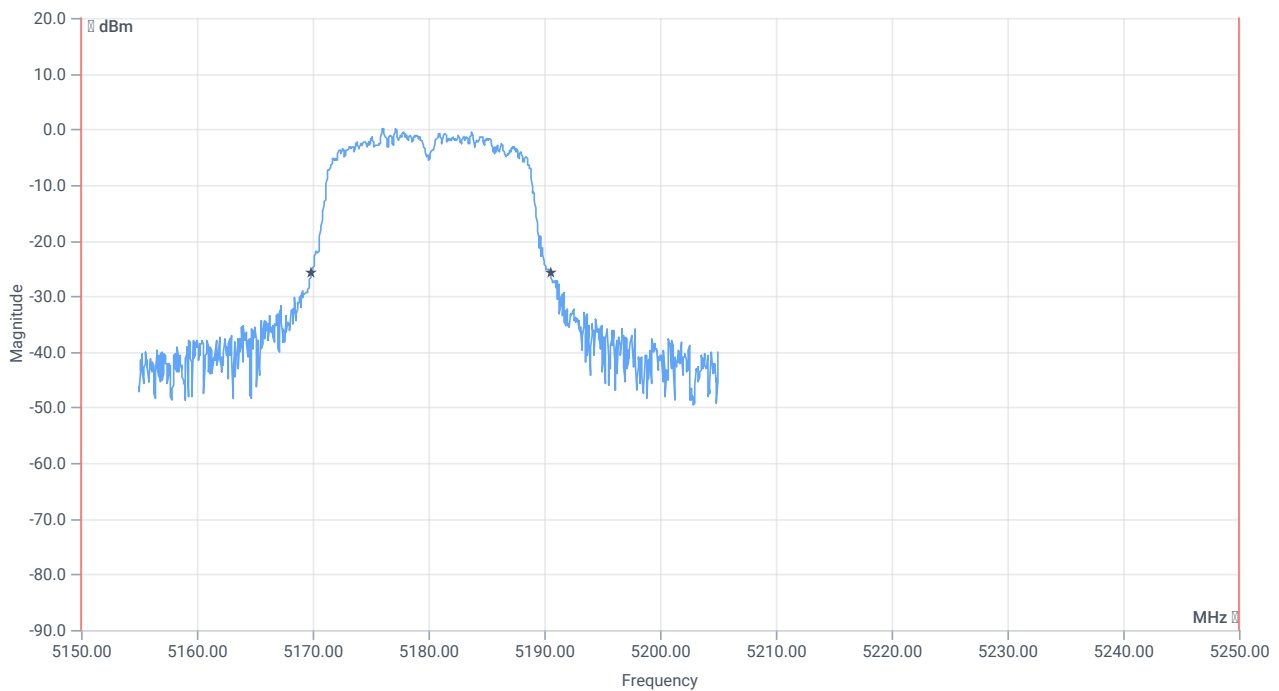

BW within Band 26dB

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	20.7	MHz	INFO
T1 26dB	5150.000000	---	5169.8500	MHz	PASS
T2 26dB	---	5250.000000	5190.5500	MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1

Test References

TC Start	11.05.2023 13:26:39
Ambit Temp [°C] Humidity [rel%]	22.9 41
System Version	4.0.1.0
Test Specification	FCC 15.407 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-1
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	True Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5200 MHz


RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	5.70	dBm	INFO
Ref. Frequency	---	---	5197.600	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Result Summary					
Number of detected Bursts:48					
Duty Cycle (Burst Ratio) max	---	---	0.938	---	INFO
Duty Cycle max	---	---	0.278	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	0.893	---	INFO
Duty Cycle min	---	---	0.491	dB	INFO
Max TX Burst Length	---	---	1.9	ms	INFO
Min Gap Length	---	---	0.125	ms	INFO
Max Gap Length	---	---	0.225	ms	INFO

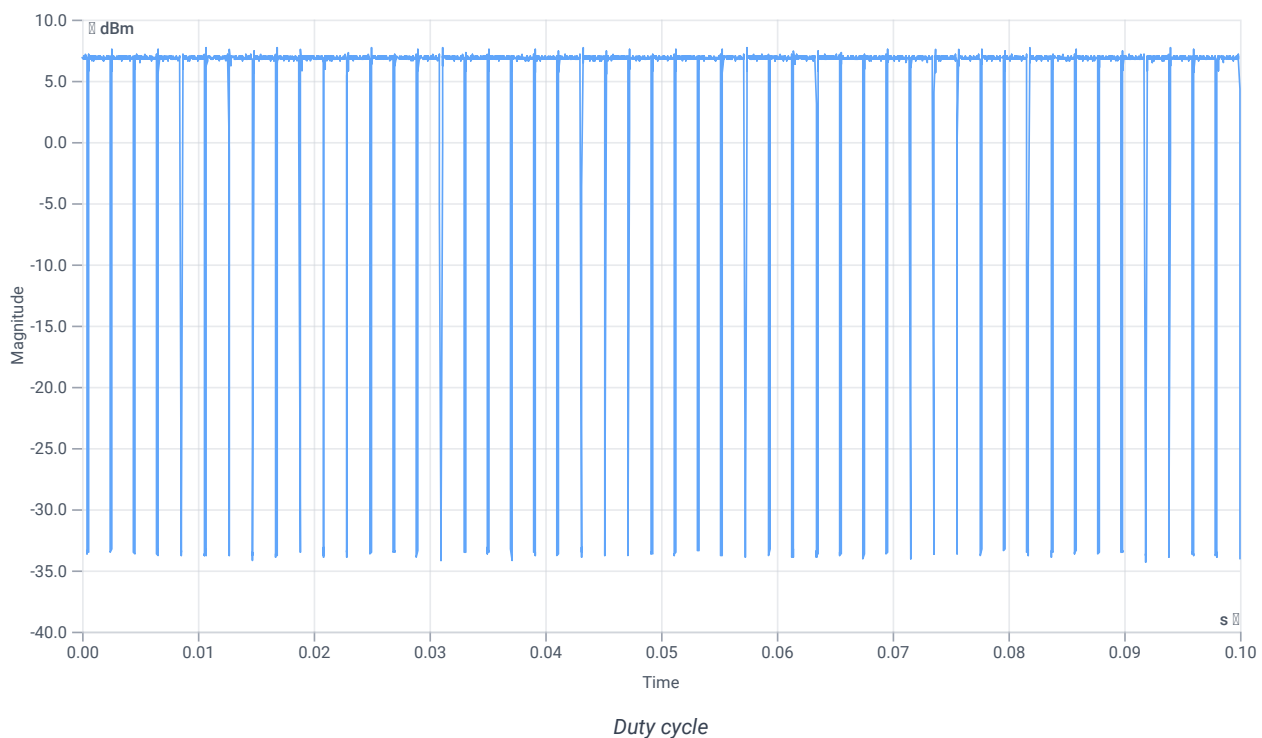

Evaluation Bandwidth

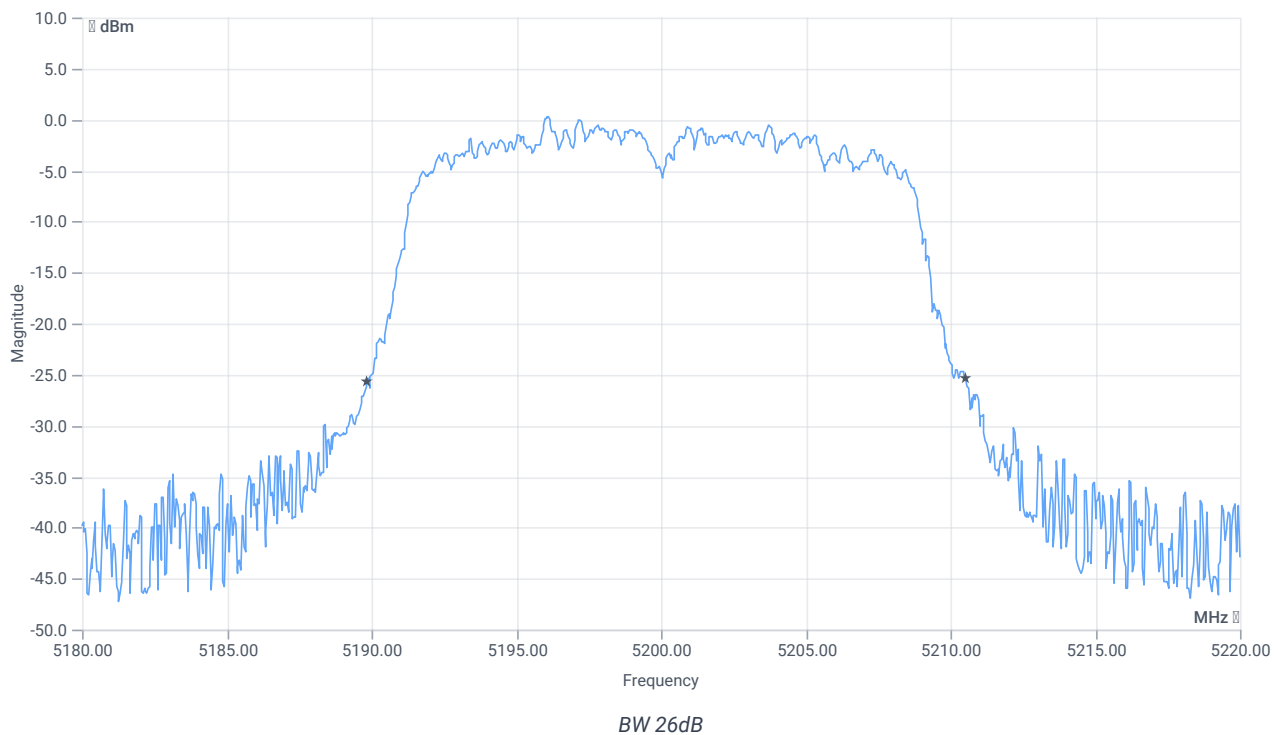


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	20.68	MHz	INFO
T1 26dB	---	---	5189.8400	MHz	INFO
T2 26dB	---	---	5210.5200	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.70 15.01 20
Start [MHz] Stop [MHz]	5180.000 5220.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

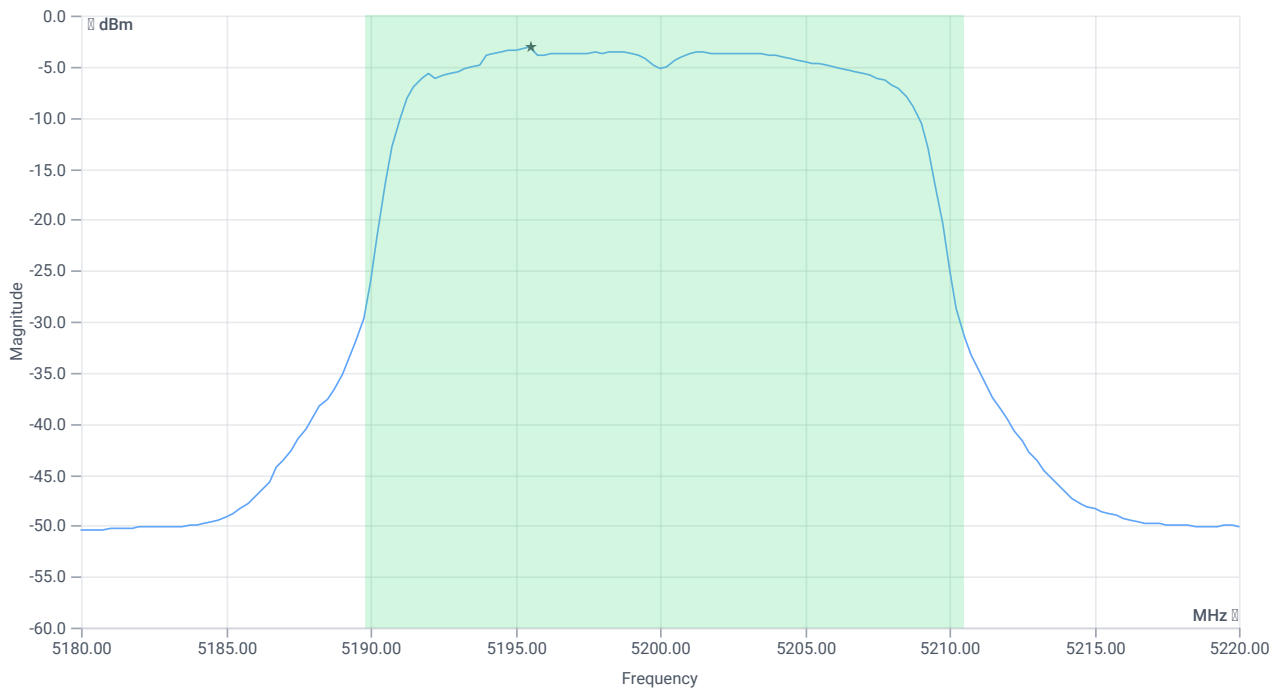

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	7.78	dBm	INFO
Duty Cycle Correction	---	---	0.49	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	8.27	dBm	PASS
Limit: 11 dBm + 10 log 20.68					
Max Output Power DC corrected	---	24.16	8.27	dBm	na

Power Spectral Density

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-3.1	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0.49	dB	INFO
Power Spectral Density DC corrected	---	11	-2.61	dBm/1MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1

Test References

TC Start	11.05.2023 13:28:07
Ambit Temp [°C] Humidity [rel%]	22.9 42
System Version	4.0.1.0
Test Specification	ISED RSS247 -
Test Method	
TC Version	0.0.1
My Description	ISED Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-1
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	True Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5200 MHz


RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	4.09	dBm	INFO
Ref. Frequency	---	---	5199.400	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Result Summary					
Number of detected Bursts:48					
Duty Cycle (Burst Ratio) max	---	---	0.938	---	INFO
Duty Cycle max	---	---	0.278	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	0.893	---	INFO
Duty Cycle min	---	---	0.491	dB	INFO
Max TX Burst Length	---	---	1.9	ms	INFO
Min Gap Length	---	---	0.125	ms	INFO
Max Gap Length	---	---	0.225	ms	INFO

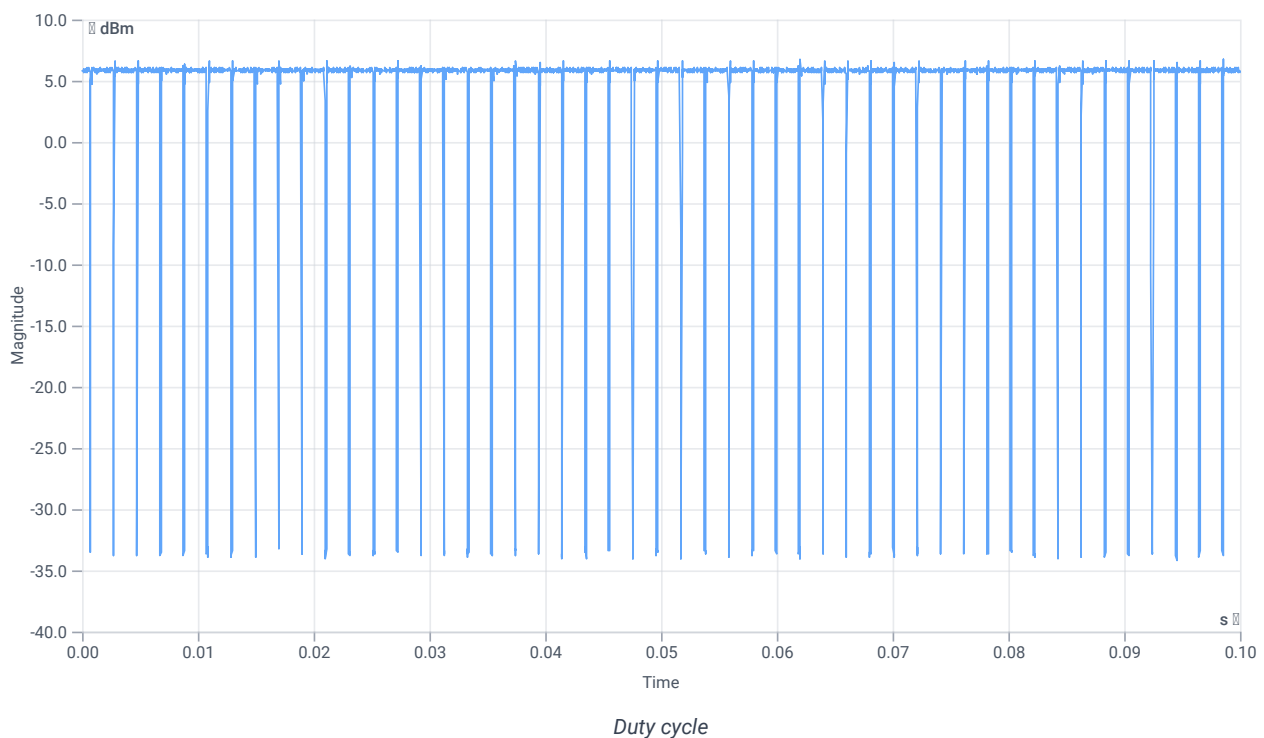

Evaluation Bandwidth

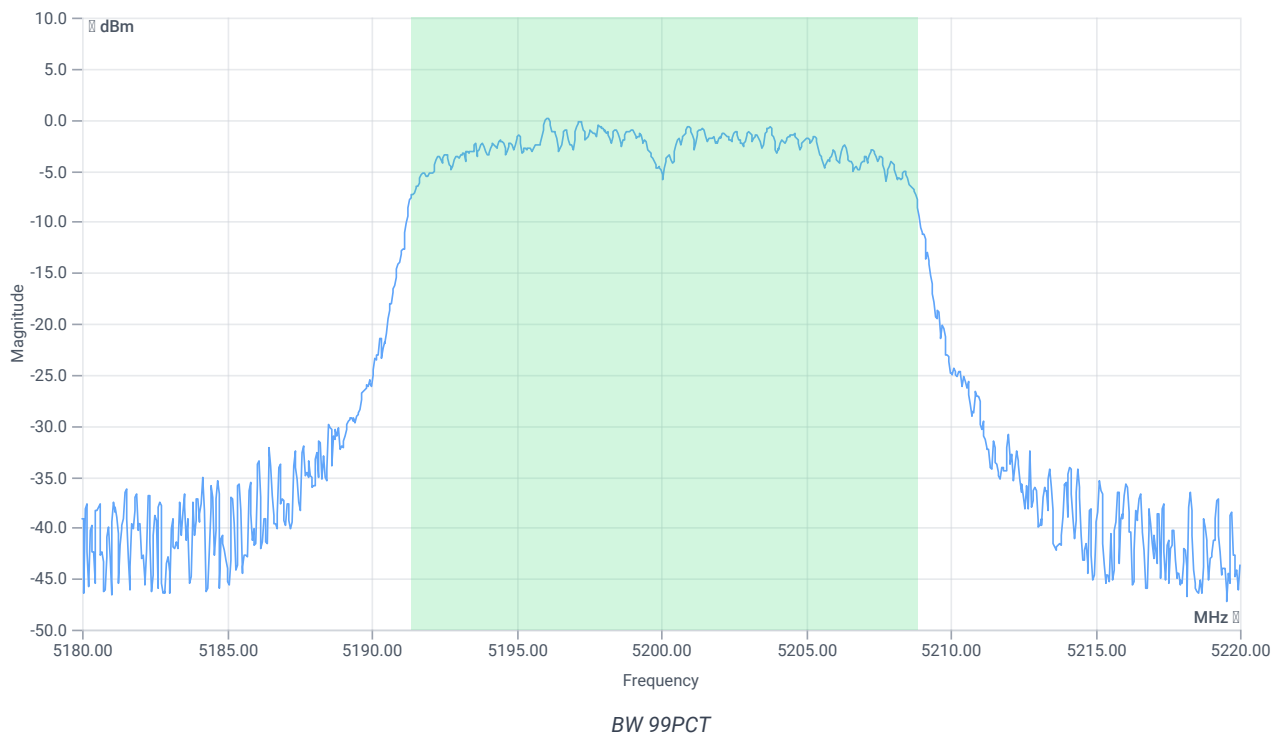


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17.463	MHz	INFO
T1 99%	---	---	5191.3686	MHz	INFO
T2 99%	---	---	5208.8312	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.09 15.01 20
Start [MHz] Stop [MHz]	5180.000 5220.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

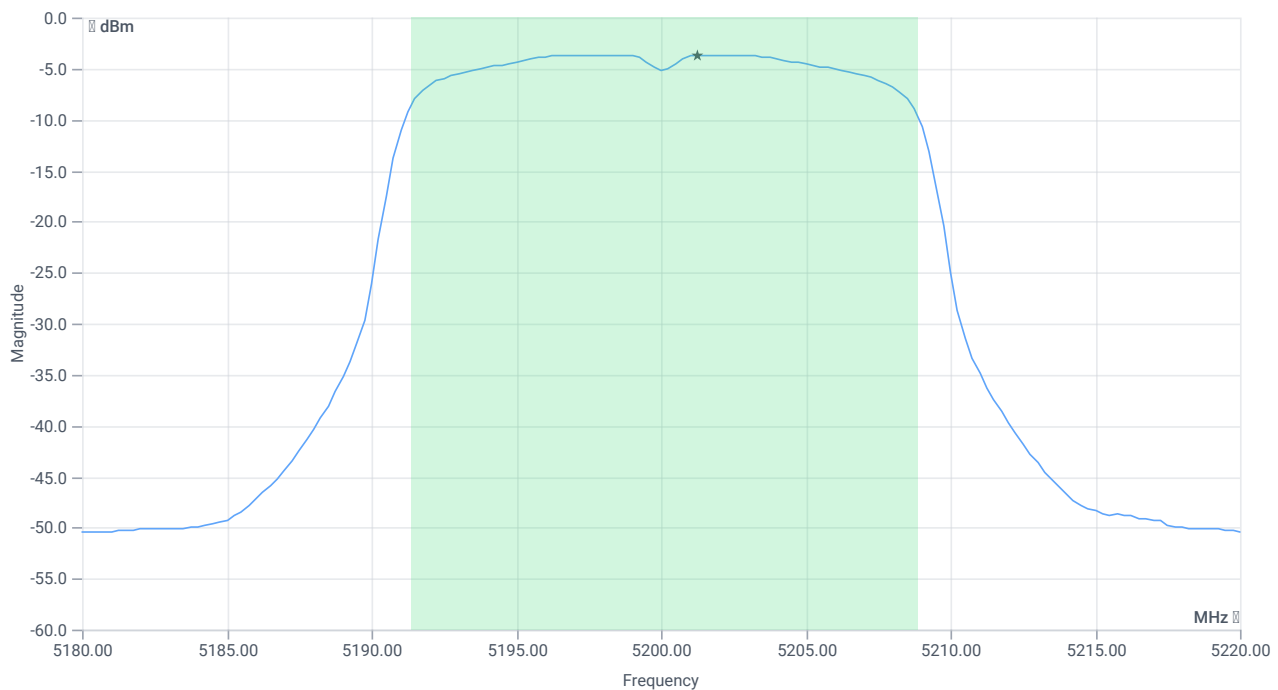

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	7.52	dBm	INFO
Duty Cycle Correction	---	---	0.49	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	8.01	dBm	na
Limit: 11 dBm + 10 log 17.463					
Max Output Power DC corrected	---	23.42	8.01	dBm	na

Power Spectral Density

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-3.65	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0.49	dB	INFO
Power Spectral Density DC corrected	---	11	-3.16	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-1

Test References

TC Start	11.05.2023 13:29:35
Ambit Temp [°C] Humidity [rel%]	22.9 42
System Version	4.0.1.0
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT20 mode U-NII-1
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	True Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 5200 MHz


RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	4.34	dBm	INFO
Ref. Frequency	---	---	5201.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.34 15.01 15
Start [MHz] Stop [MHz]	5175.000 5225.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1 2500 1001 SWE

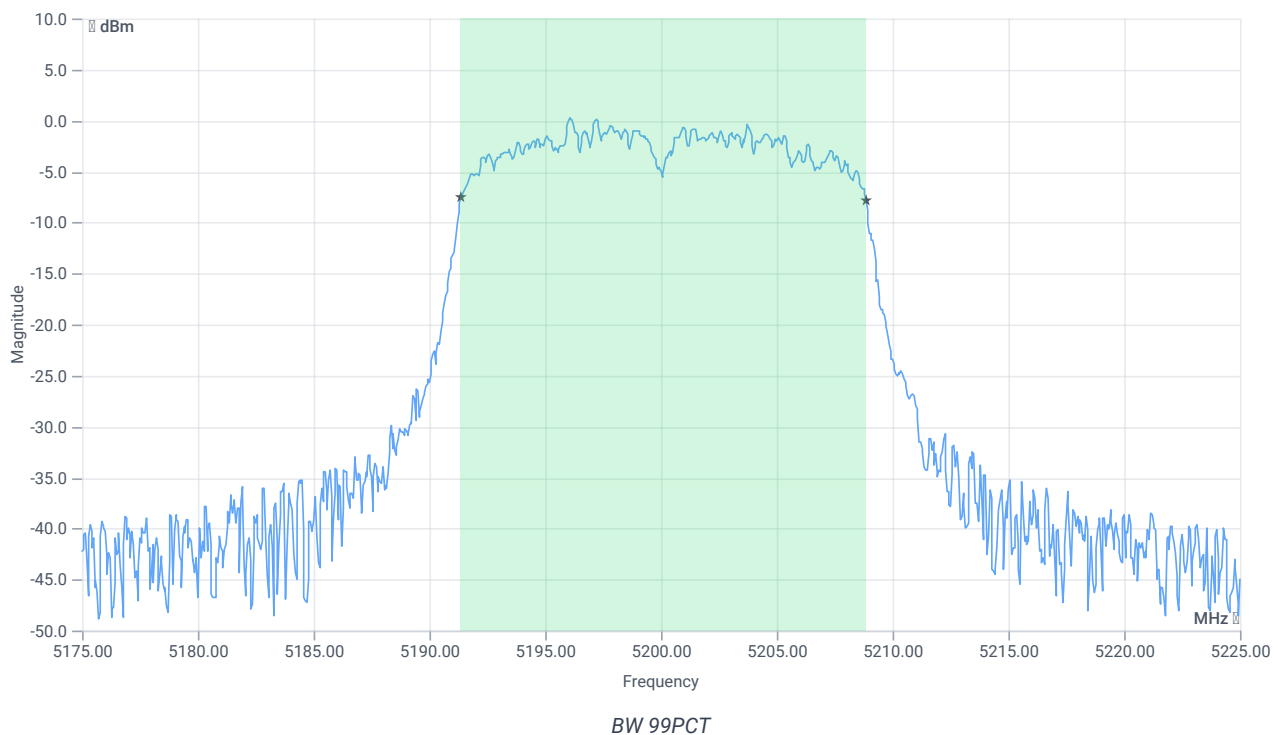


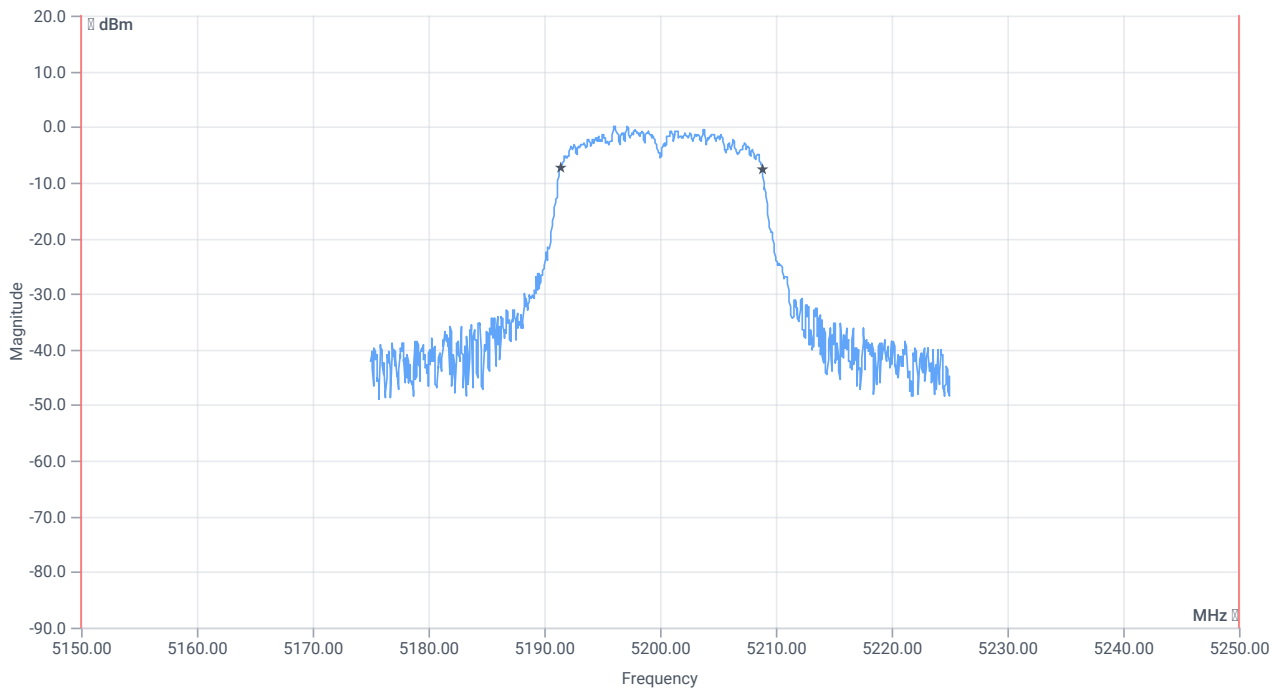


BW within Band 99PCT

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17.483	MHz	INFO
T1 99%	5150.000000	---	5191.3586	MHz	PASS
T2 99%	---	5250.000000	5208.8412	MHz	PASS

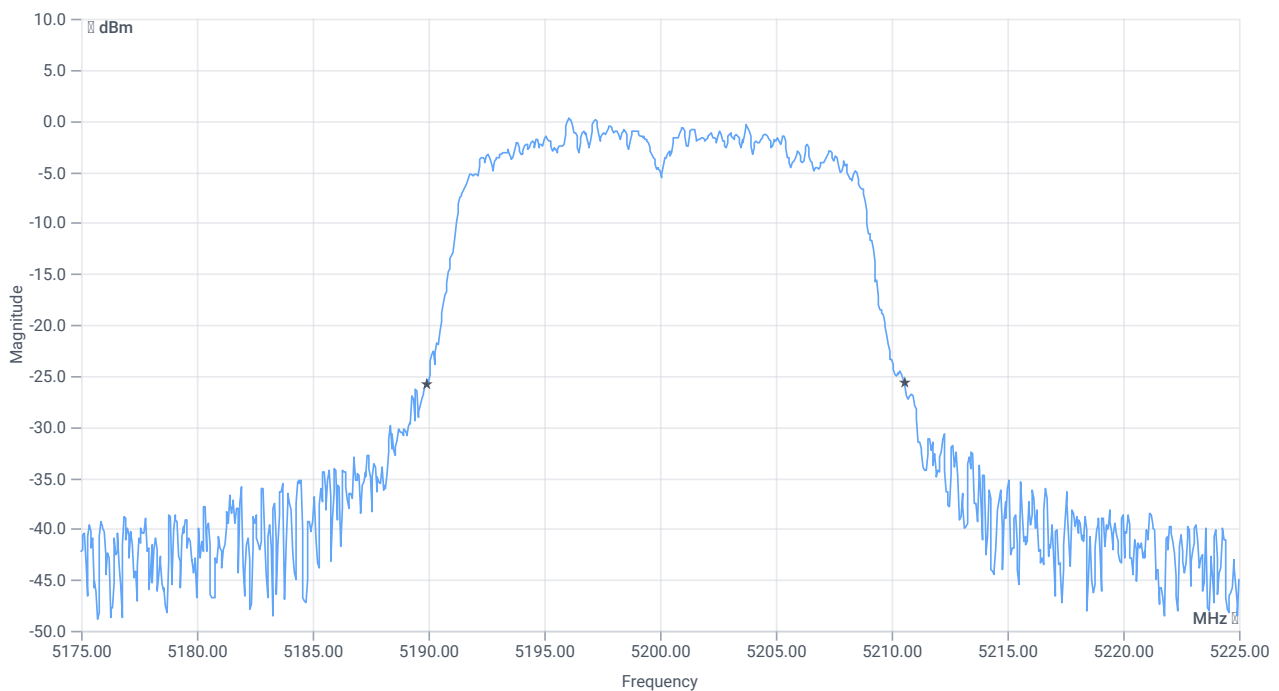

BW 26dB

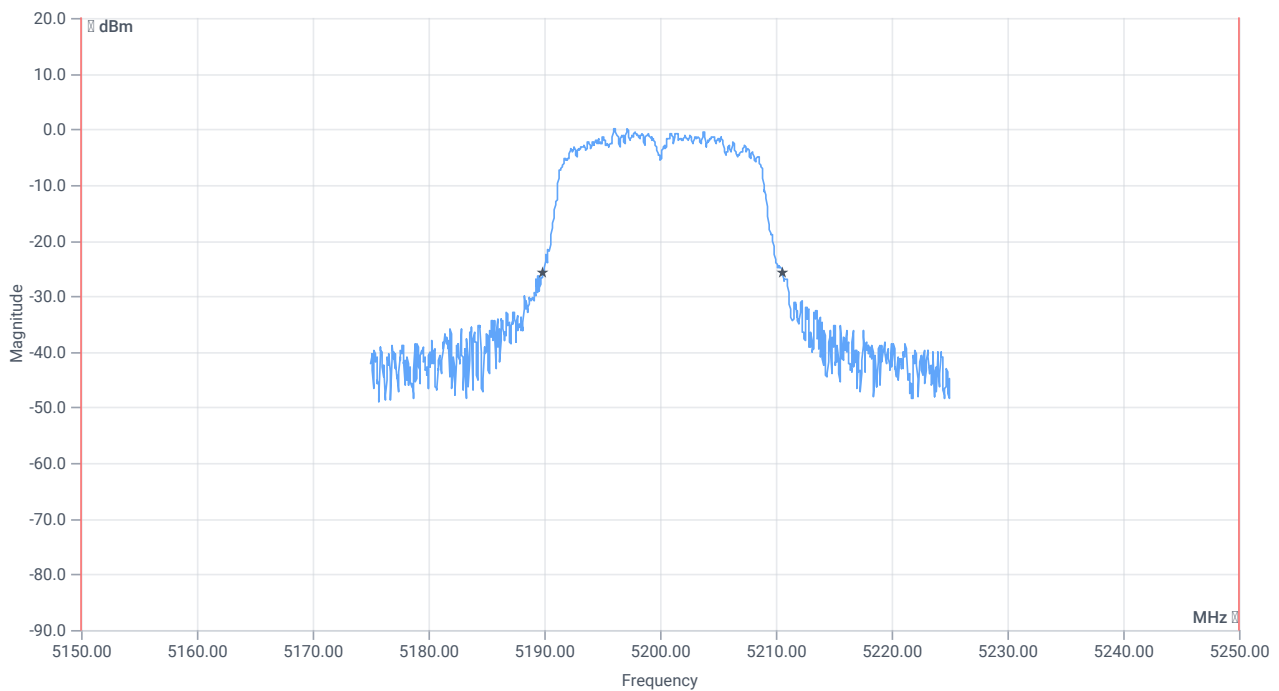

BW within Band 26dB

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	20.65	MHz	INFO
T1 26dB	5150.000000	---	5189.9000	MHz	PASS
T2 26dB	---	5250.000000	5210.5500	MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1

Test References

TC Start	11.05.2023 13:31:15
Ambit Temp [°C] Humidity [rel%]	22.9 42
System Version	4.0.1.0
Test Specification	FCC 15.407 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-1
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	True Freq [MHz] 5240
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5240 MHz


RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	5.91	dBm	INFO
Ref. Frequency	---	---	5237.600	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Result Summary					
Number of detected Bursts:48					
Duty Cycle (Burst Ratio) max	---	---	0.938	---	INFO
Duty Cycle max	---	---	0.278	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	0.893	---	INFO
Duty Cycle min	---	---	0.491	dB	INFO
Max TX Burst Length	---	---	1.9	ms	INFO
Min Gap Length	---	---	0.125	ms	INFO
Max Gap Length	---	---	0.225	ms	INFO

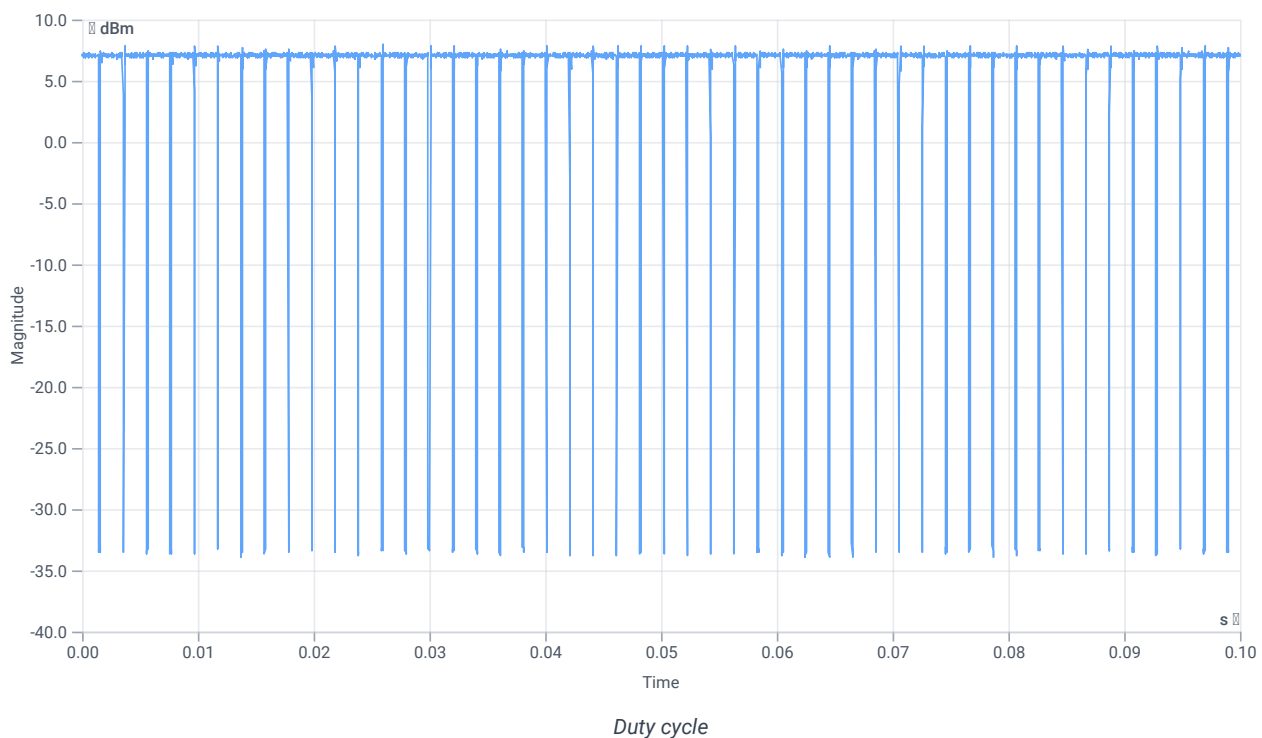

Evaluation Bandwidth

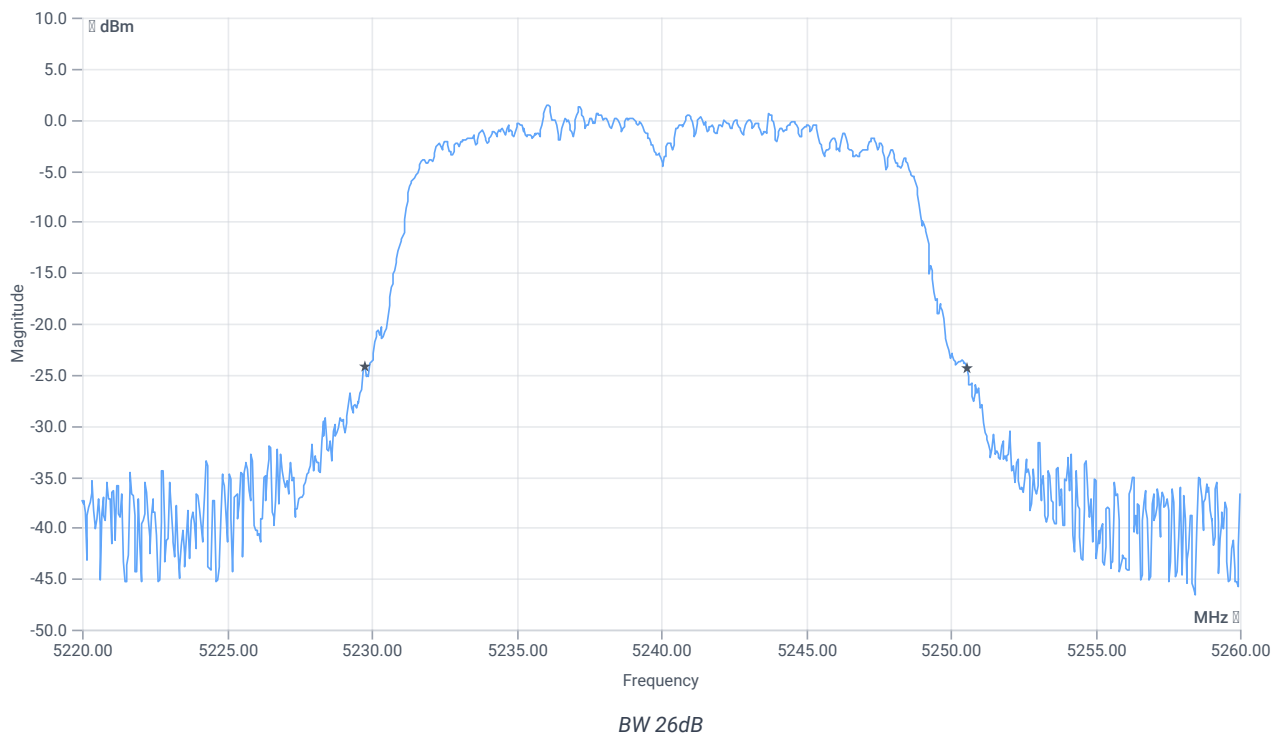


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	20.8	MHz	INFO
T1 26dB	---	---	5229.7600	MHz	INFO
T2 26dB	---	---	5250.5600	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.91 15.07 20
Start [MHz] Stop [MHz]	5220.000 5260.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

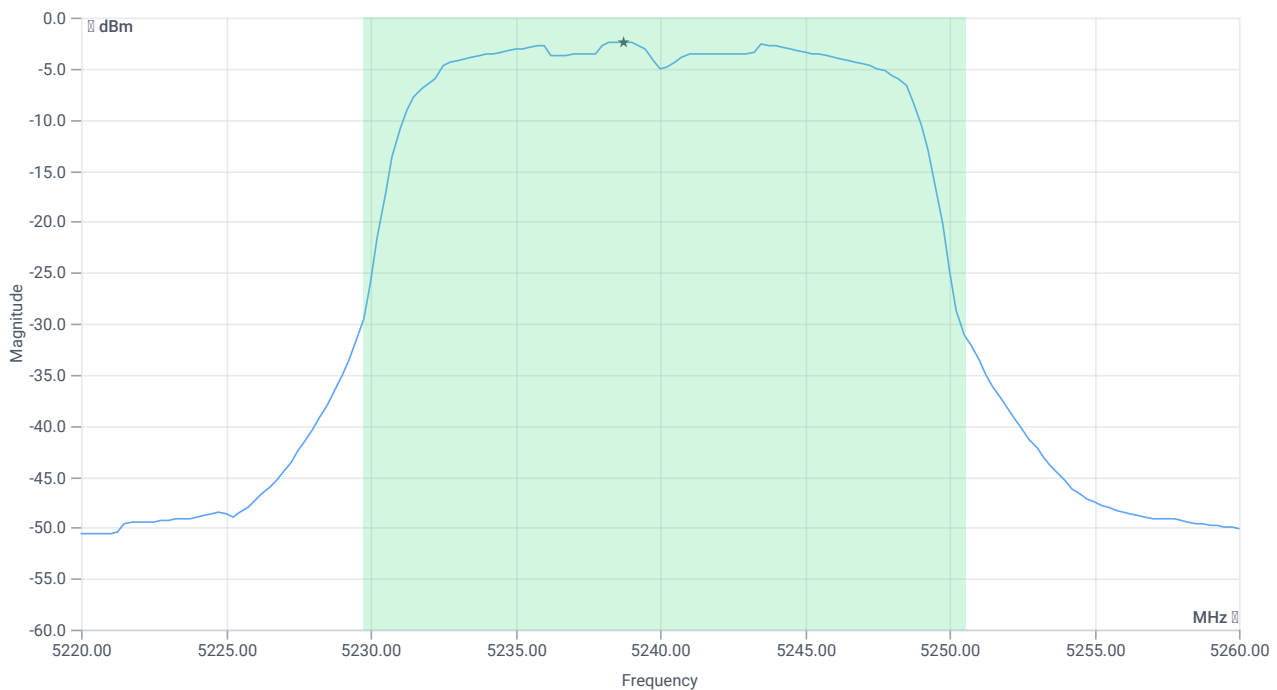

Max OP and PSD

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	8.39	dBm	INFO
Duty Cycle Correction	---	---	0.49	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	8.88	dBm	PASS
Limit: 11 dBm + 10 log 20.8					
Max Output Power DC corrected	---	24.18	8.88	dBm	na

Power Spectral Density

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-2.44	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0.49	dB	INFO
Power Spectral Density DC corrected	---	11	-1.95	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT20 mode U-NII-1

Test References

TC Start	11.05.2023 13:34:10
Ambit Temp [°C] Humidity [rel%]	22.9 42
System Version	4.0.1.0
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT20 mode U-NII-1
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	True Freq [MHz] 5240
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 5240 MHz


RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	5.24	dBm	INFO
Ref. Frequency	---	---	5242.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.24 15.07 15
Start [MHz] Stop [MHz]	5215.000 5265.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1 2500 1001 SWE

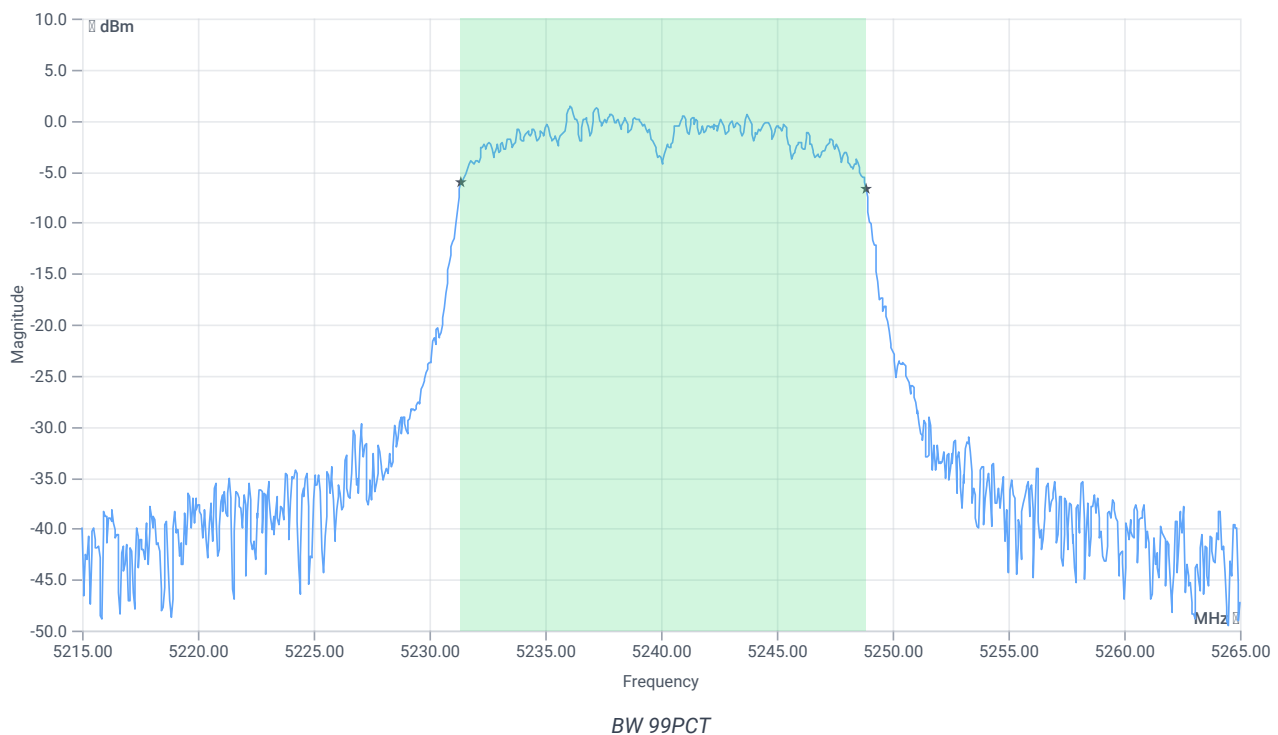


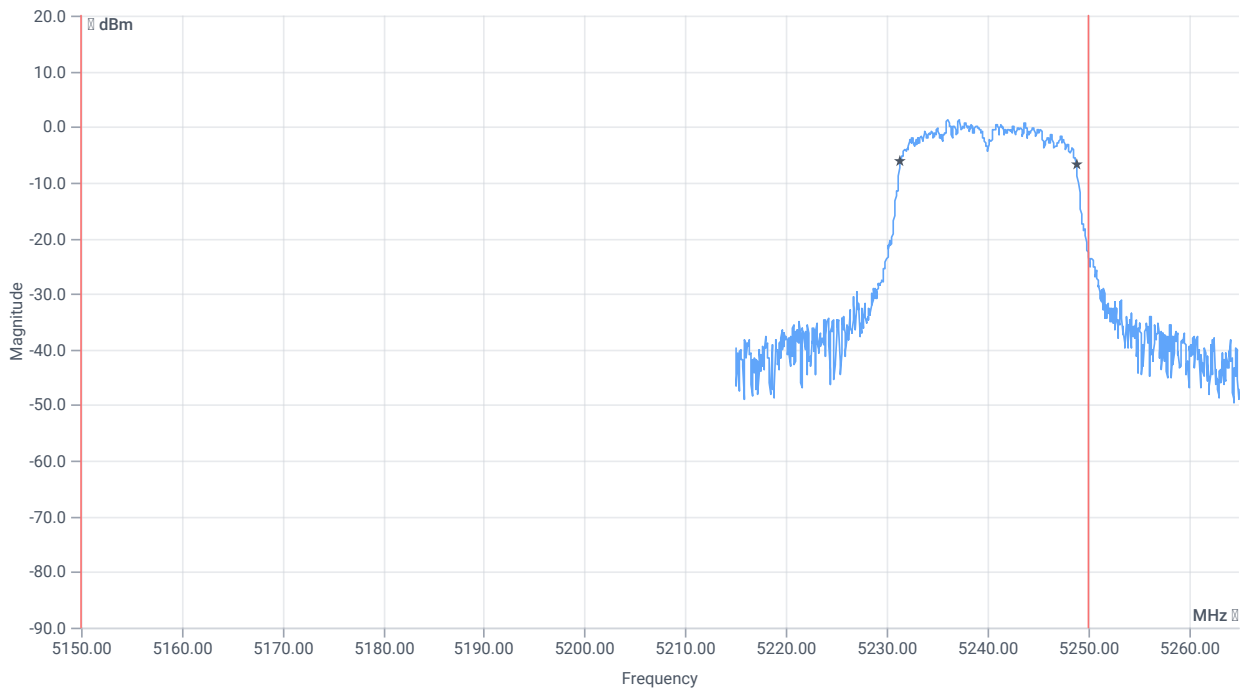


BW within Band 99PCT

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17.483	MHz	INFO
T1 99%	5150.000000	---	5231.3586	MHz	PASS
T2 99%	---	5250.000000	5248.8412	MHz	PASS

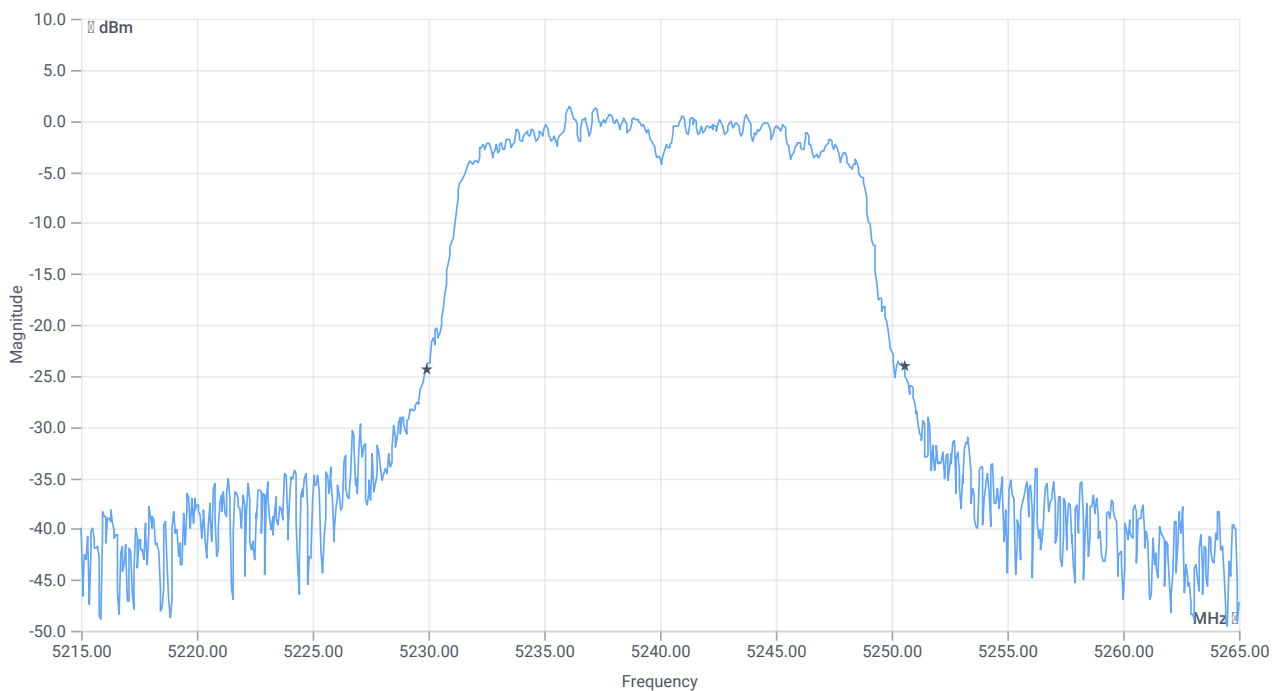

BW 26dB

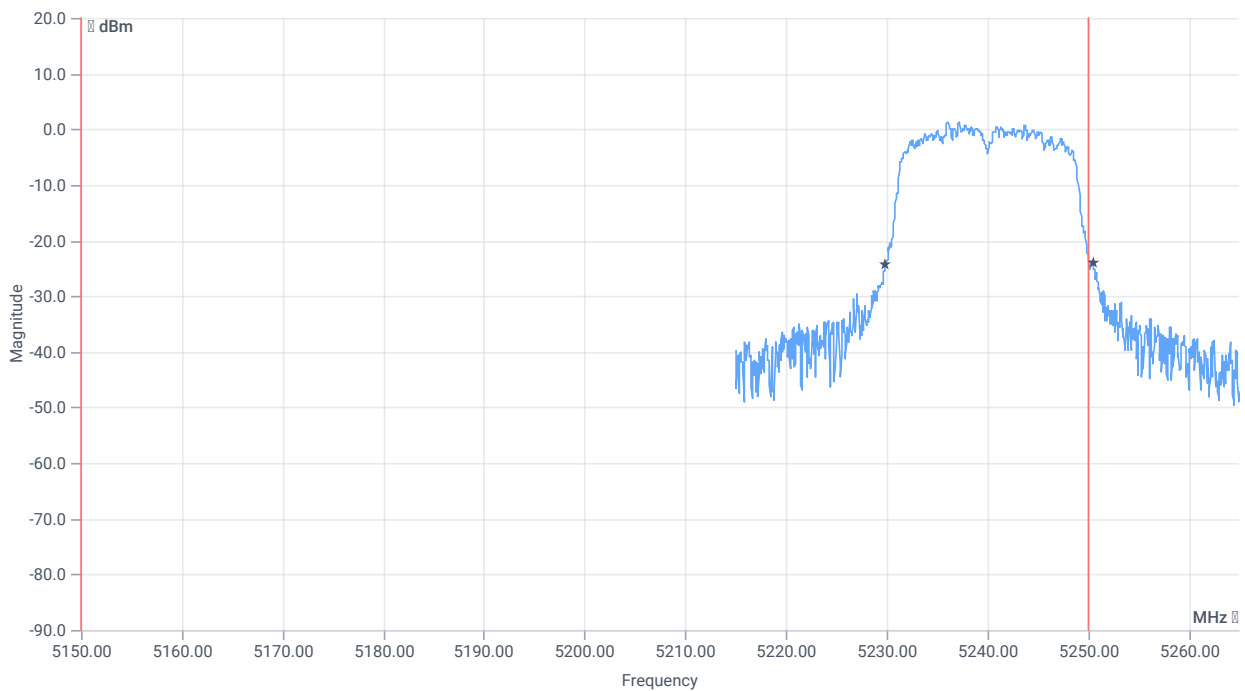

BW within Band 26dB

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	20.65	MHz	INFO
T1 26dB	5150.000000	---	5229.9000	MHz	PASS
T2 26dB	---	5250.000000	5250.5500	MHz	DFS required

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1

Test References

TC Start	11.05.2023 13:37:03
Ambit Temp [°C] Humidity [rel%]	22.9 42
System Version	4.0.1.0
Test Specification	ISED RSS247 -
Test Method	
TC Version	0.0.1
My Description	ISED Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-1
Add. Information	

EUT Common Settings WLAN5Gx

Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client
Limit W52 Japan	Standard

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	True Freq [MHz] 5240
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 5240 MHz


RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	6.50	dBm	INFO
Ref. Frequency	---	---	5241.400	MHz	INFO


Evaluation max. Duty Cycle

Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Result Summary					
Number of detected Bursts:48					
Duty Cycle (Burst Ratio) max	---	---	0.938	---	INFO
Duty Cycle max	---	---	0.278	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	0.893	---	INFO
Duty Cycle min	---	---	0.491	dB	INFO
Max TX Burst Length	---	---	1.9	ms	INFO
Min Gap Length	---	---	0.125	ms	INFO
Max Gap Length	---	---	0.225	ms	INFO

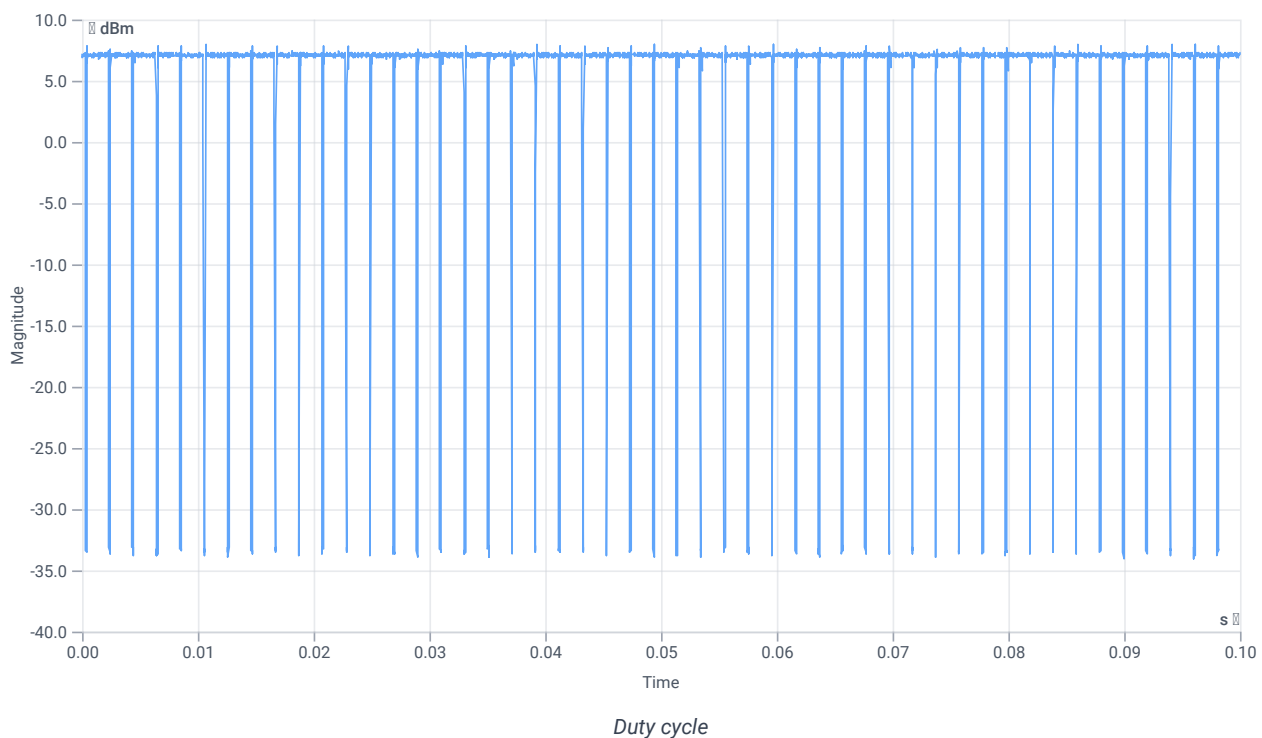

Evaluation Bandwidth

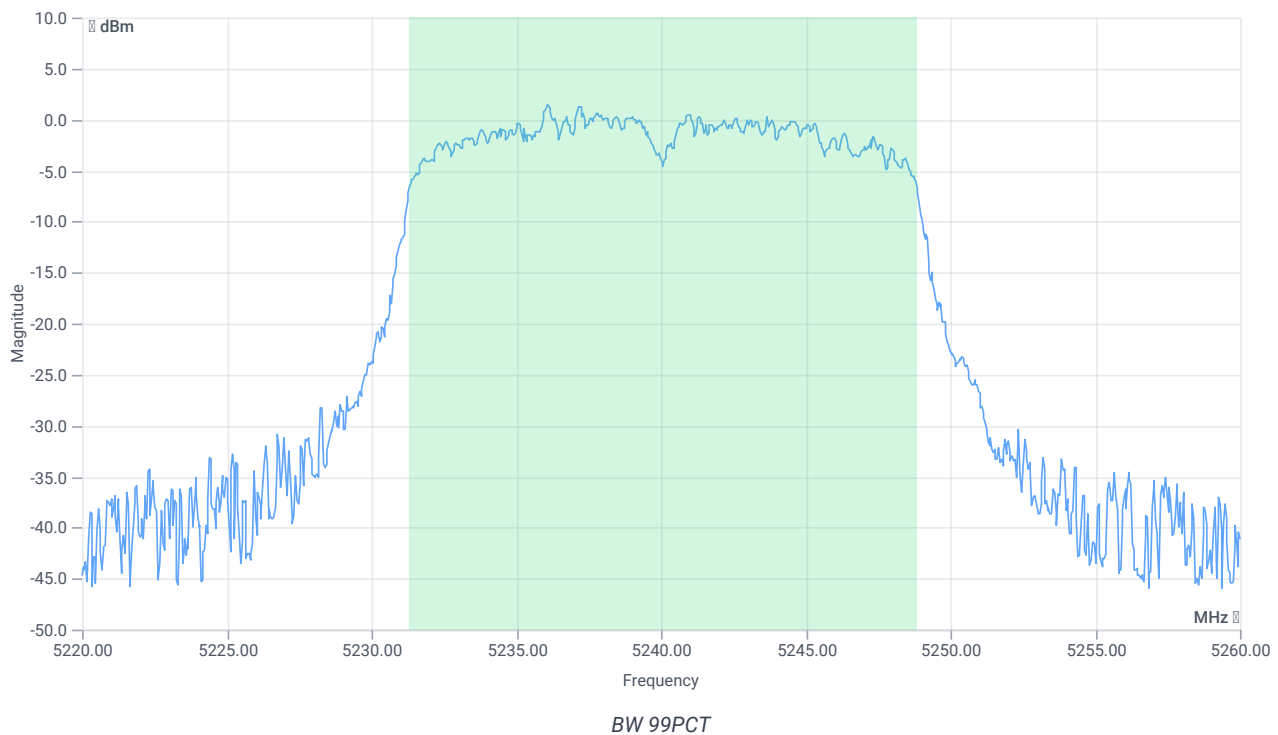


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17.502	MHz	INFO
T1 99%	---	---	5231.3287	MHz	INFO
T2 99%	---	---	5248.8312	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.50 15.07 20
Start [MHz] Stop [MHz]	5220.000 5260.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

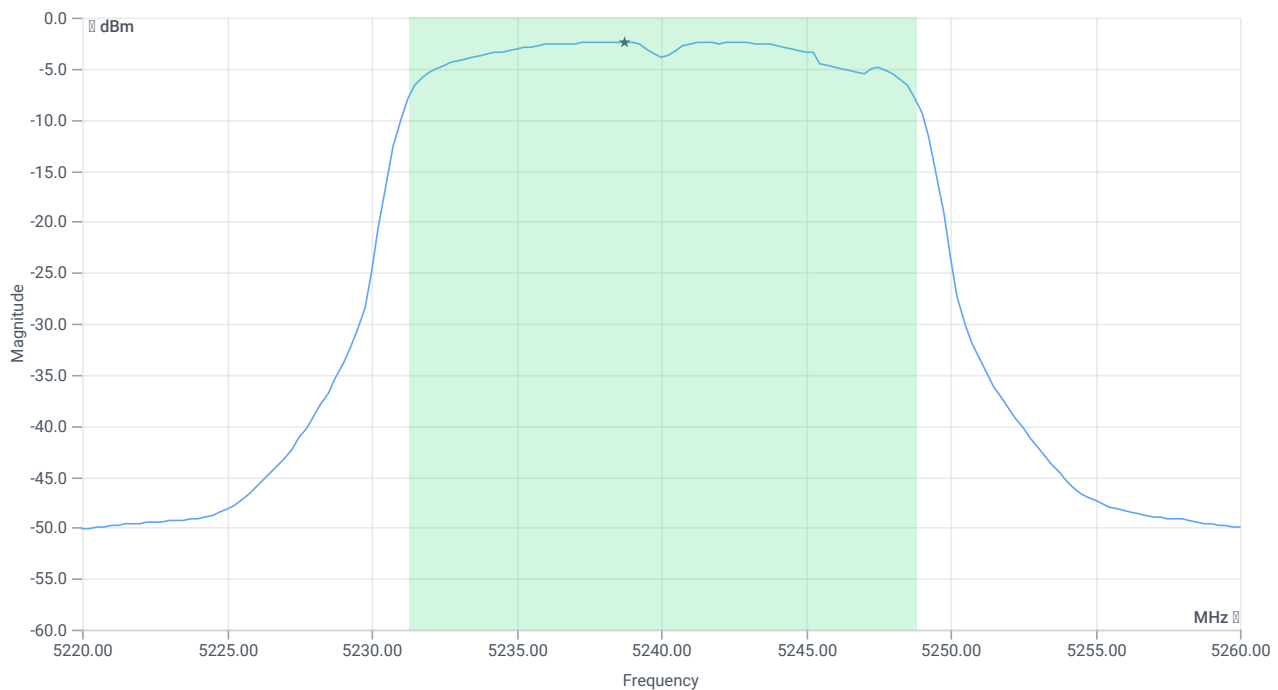

Max OP and PSD

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	8.68	dBm	INFO
Duty Cycle Correction	---	---	0.49	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	9.17	dBm	na
Limit: 11 dBm + 10 log 17.502					
Max Output Power DC corrected	---	23.43	9.17	dBm	na

Power Spectral Density

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-2.42	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0.49	dB	INFO
Power Spectral Density DC corrected	---	11	-1.93	dBm/1MHz	PASS

Verdict

PASS

- END OF DOCUMENT -