



**SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch**

No. 1 Workshop, M-10, Middle section, Science & Technology Park,
Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053
Fax: +86 (0) 755 2671 0594
Email: ee.shenzhen@sgs.com

Report No.: SZEM181000924401
Page: 1 of 346

TEST REPORT

Application No.: SZEM1810009244CR
Applicant: Shenzhen Mindray Bio-Medical Electronics Co., Ltd.
Address of Applicant: Mindray Building, Keji 12th Road South, High-tech Ind, Nanshan, Shenzhen, China.
Manufacturer: Shenzhen Mindray Bio-Medical Electronics Co., Ltd.
Address of Manufacturer: Mindray Building, Keji 12th Road South, High-tech Industrial Park, Nanshan, Shenzhen
Factory: Shenzhen Mindray Bio-Medical Electronics Co., Ltd.
Address of Factory: Mindray Building, Keji 12th Road South, High-tech Industrial Park, Nanshan, Shenzhen
Equipment Under Test (EUT):
EUT Name: Embedded wireless module
Model No.: SX-SDMAC-2832S+
Trade mark: Mindray
FCC ID: ZLZ-PMACS
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2018-10-25
Date of Test: 2018-10-31 to 2018-11-21
Date of Issue: 2018-11-22

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.



Keny Xu
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.





SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 2 of 346

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2018-11-22		Original

Authorized for issue by:				
				
		Edison Li /Project Engineer		
				
		Eric Fu /Reviewer		



2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.9.1	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass

Remark:

Model No.: SX-SDMAC-2832S+

There are five antennas of the above model, with only difference as below:

Antenna Type	Supplier	Antenna Part No.	Freq.	Peak Antenna Gain(dBi)	Remark
Dipole	AMPHENOL	MG7018-41-000-R	2.4G 5G	1.87dBi Peak @2.4G 0.94dBi Peak @5G	Antenna1
PCB Dipole	Laird	MAF95310	2.4G 5G	2.79dBi Peak @2.4G 3.38dBi Peak @5G	Antenna2
Dipole	AMPHENOL	MG7324-41-000-R	2.4G 5G	1.32dBi Peak @2.4G 2.75dBi Peak @5G	Antenna3
PCB Dipole	Laird	EMF2449A2-8UFL	2.4G 5G	2.79dBi Peak @2.4G 3.38dBi Peak @5G	Antenna4
PCB Dipole	Yichuang	AZM24510-1A	2.4G 5G	1dBi Peak @2.4G 1dBi Peak @5G	Antenna5



3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	6
4.1 DETAILS OF E.U.T.	6
4.2 DESCRIPTION OF SUPPORT UNITS	6
4.3 MEASUREMENT UNCERTAINTY	6
4.4 TEST LOCATION.....	7
4.5 TEST FACILITY.....	7
4.6 DEVIATION FROM STANDARDS.....	7
4.7 ABNORMALITIES FROM STANDARD CONDITIONS	7
5 EQUIPMENT LIST.....	8
6 RADIO SPECTRUM TECHNICAL REQUIREMENT	11
6.1 ANTENNA REQUIREMENT	11
6.1.1 Test Requirement:	11
6.1.2 Conclusion	11
7 RADIO SPECTRUM MATTER TEST RESULTS.....	12
7.1 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ).....	12
7.1.1 E.U.T. Operation	12
7.1.2 Test Setup Diagram.....	12
7.1.3 Measurement Procedure and Data.....	13
7.2 MINIMUM 6DB BANDWIDTH.....	16
7.2.1 E.U.T. Operation	16
7.2.2 Test Setup Diagram.....	16
7.2.3 Measurement Procedure and Data.....	16
7.3 CONDUCTED PEAK OUTPUT POWER.....	17
7.3.1 E.U.T. Operation	17
7.3.2 Test Setup Diagram.....	17
7.3.3 Measurement Procedure and Data.....	17
7.4 POWER SPECTRUM DENSITY.....	18
7.4.1 E.U.T. Operation	18
7.4.2 Test Setup Diagram.....	18
7.4.3 Measurement Procedure and Data.....	18
7.5 CONDUCTED BAND EDGES MEASUREMENT	19
7.5.1 E.U.T. Operation	19
7.5.2 Test Setup Diagram.....	19
7.5.3 Measurement Procedure and Data.....	19
7.6 CONDUCTED SPURIOUS EMISSIONS.....	20
7.6.1 E.U.T. Operation	20
7.6.2 Test Setup Diagram.....	20
7.6.3 Measurement Procedure and Data.....	20
7.7 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	21
7.7.1 E.U.T. Operation	21
7.7.2 Test Setup Diagram.....	21



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 5 of 346

7.7.3	Measurement Procedure and Data.....	22
7.8	RADIATED SPURIOUS EMISSIONS	183
7.8.1	E.U.T. Operation	184
7.8.2	Test Setup Diagram.....	184
7.8.3	Measurement Procedure and Data.....	185
8	PHOTOGRAPHS.....	308
8.1	EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS).....	308
9	APPENDIX.....	309
9.1	APPENDIX 15.247	309-346



4 General Information

4.1 Details of E.U.T.

Power supply:	3.3V DC from mainboard
Operation Frequency:	802.11b/g/n(HT20): 2412MHz to 2462MHz 802.11n(HT40): 2422MHz to 2452MHz
Number of Channels:	802.11b/g/n(HT20):11 802.11n(HT40):7
Modulation Type:	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK)
Channel Spacing:	5MHz
Antenna Type:	Please refer to section 2 of this report
Antenna Gain:	Please refer to section 2 of this report

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Adapter	Apple	A1357 W010A051	REF. No.SEA0500
Laptop	Lenovo	T430u	REF. No.SEA1800
Network Cable	SGS	N/A	REF. No.SEA1100
USB Cable	PHILIPS	SWR2101	REF. No.SEA0700
mainboard	Provided by client	N/A	N/A

4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	Duty cycle	$\pm 0.37\%$
3	Occupied Bandwidth	$\pm 3\%$
4	RF conducted power	$\pm 0.75\text{dB}$
5	RF power density	$\pm 2.84\text{dB}$
6	Conducted Spurious emissions	$\pm 0.75\text{dB}$
7	RF Radiated power	$\pm 4.5\text{dB}$ (below 1GHz) $\pm 4.8\text{dB}$ (above 1GHz)
8	Radiated Spurious emission test	$\pm 4.5\text{dB}$ (Below 1GHz) $\pm 4.8\text{dB}$ (Above 1GHz)
9	Temperature test	$\pm 1^\circ\text{C}$
10	Humidity test	$\pm 3\%$
11	Supply voltages	$\pm 1.5\%$
12	Time	$\pm 3\%$



4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI**

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

- **FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2017-05-10	2020-05-09
Measurement Software	AUDIX	e3 V5.4.1221d	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM024-01	2018-07-12	2019-07-11
LISN	Rohde & Schwarz	ENV216	SEM007-01	2018-09-25	2019-09-24
LISN	ETS-LINDGREN	3816/2	SEM007-02	2018-04-02	2019-04-01
EMI Test Receiver	Rohde & Schwarz	ESCI	SEM004-02	2018-04-02	2019-04-01

RF Conducted Test					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2018-09-25	2019-09-24
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2018-09-27	2019-09-26
Measurement Software	JS Tonscend	JS1120-2 BT/WIFI V2.	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-02	2018-07-12	2019-07-11
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2018-09-27	2019-09-26
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2018-09-25	2019-09-24
Power Sensor	KEYSIGHT	U2021XA	SEM009-13	2018-04-13	2019-04-12

Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018-03-13	2021-03-12
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2018-07-12	2019-07-11
Spectrum Analyzer	Rohde & Schwarz	FSU43	SEM004-08	2018-04-02	2019-04-01
BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-01	2017-06-27	2020-06-26
Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2018-04-13	2021-04-12
Horn Antenna (15GHz-40GHz)	Schwarzbeck	BBHA 9170	SEM003-15	2017-10-17	2020-10-16
Pre-amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2018-09-25	2019-09-24
Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEM004-11	2018-09-27	2019-09-26
Pre-amplifier(18-26GHz)	Rohde & Schwarz	CH14-H052	SEM005-17	2018-04-02	2019-04-01
Pre-amplifier (26GHz-40GHz)	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2018-04-02	2019-04-01

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM181000924401

Page: 9 of 346

DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2018-09-25	2019-09-24
Active Loop Antenna	ETS-Lindgren	6502	SEM003-08	2017-08-22	2020-08-21
Band filter	N/A	N/A	SEM023-01	N/A	N/A

Radiated Spurious Emissions

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018-03-13	2021-03-12
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2018-07-12	2019-07-11
Spectrum Analyzer	Rohde & Schwarz	FSU43	SEM004-08	2018-04-02	2019-04-01
BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-01	2017-06-27	2020-06-26
Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2018-04-13	2021-04-12
Horn Antenna (15GHz-40GHz)	Schwarzbeck	BBHA 9170	SEM003-15	2017-10-17	2020-10-16
Pre-amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2018-09-25	2019-09-24
Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEM004-11	2018-09-27	2019-09-26
Pre-amplifier(18-26GHz)	Rohde & Schwarz	CH14-H052	SEM005-17	2018-04-02	2019-04-01
Pre-amplifier (26GHz-40GHz)	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2018-04-02	2019-04-01
DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2018-09-25	2019-09-24
Active Loop Antenna	ETS-Lindgren	6502	SEM003-08	2017-08-22	2020-08-21
Band filter	N/A	N/A	SEM023-01	N/A	N/A

RE in Chamber

Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2017-08-05	2020-08-04
MXE EMI Receiver (20Hz-8.4GHz)	Agilent Technologies	N9038A	SEM004-05	2018-09-25	2019-09-24
BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEM003-01	2017-06-27	2020-06-26
Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEM005-01	2018-04-02	2019-04-01
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM025-01	2018-07-12	2019-07-11



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 10 of 346

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-03	2018-09-27	2019-09-26
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-04	2018-09-27	2019-09-26
Humidity/ Temperature Indicator	Mingle	N/A	SEM002-08	2018-09-27	2019-09-26
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2018-04-08	2019-04-07



6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(c)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement.

Antenna location: Refer to Internal photos.

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement: 47 CFR Part 15, Subpart C 15.207
Test Method: ANSI C63.10 (2013) Section 6.2
Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 24.5 °C Humidity: 46.8 % RH Atmospheric Pressure: 1010 mbar

Test mode: a:TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.

7.1.2 Test Setup Diagram

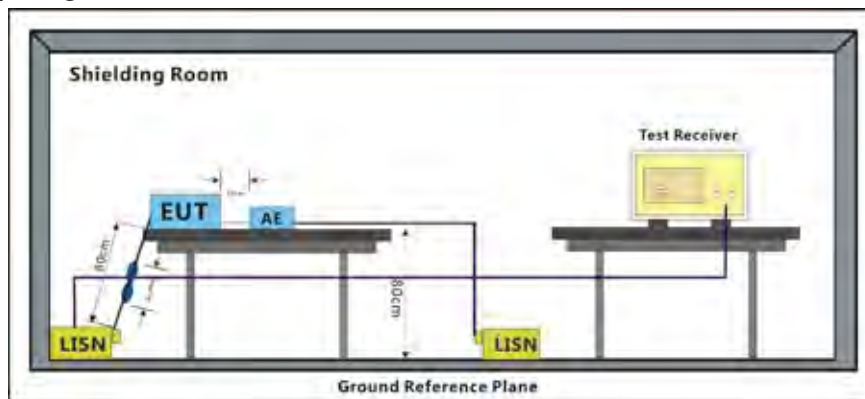



7.1.3 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 14 of 346

Mode:a; Line:Live Line

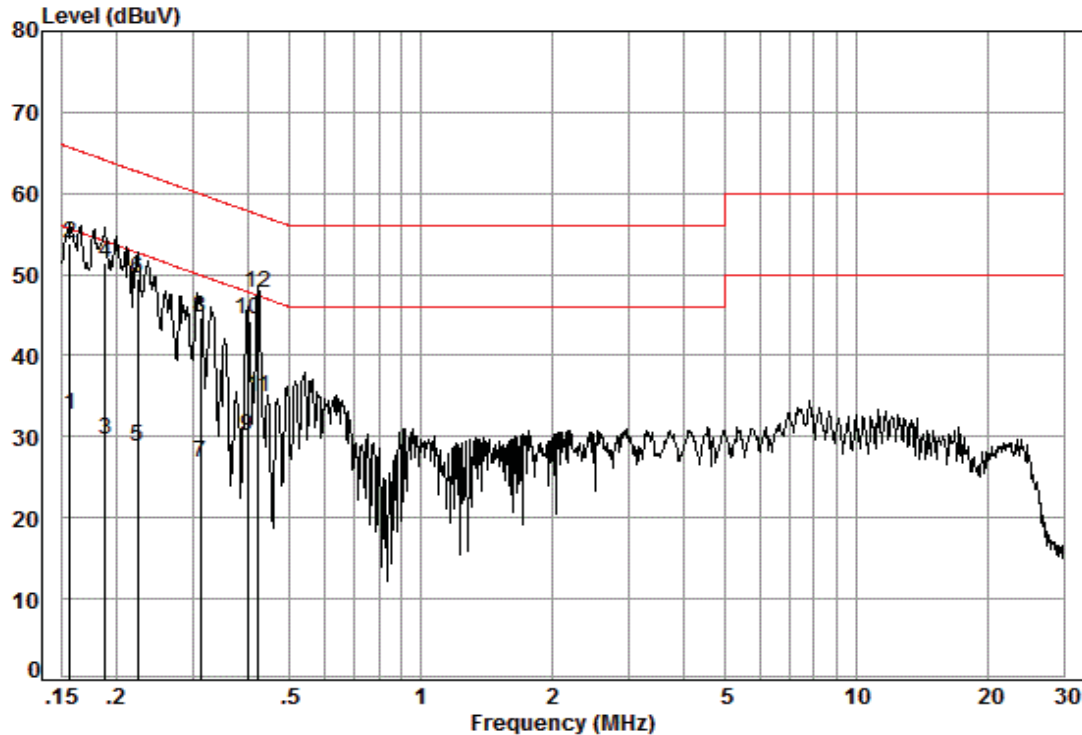

Site : Shielding Room
Condition: Line
Job No. : 09244CR
Test mode: a

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.16	0.02	9.51	23.17	32.70	55.65	-22.95	Average
2	0.16	0.02	9.51	44.38	53.91	65.65	-11.74	QP
3	0.19	0.03	9.51	20.14	29.68	54.11	-24.43	Average
4	0.19	0.03	9.51	41.92	51.46	64.11	-12.65	QP
5	0.22	0.03	9.50	19.23	28.76	52.70	-23.94	Average
6	0.22	0.03	9.50	40.04	49.57	62.70	-13.13	QP
7	0.31	0.03	9.51	17.32	26.86	49.93	-23.07	Average
8	0.31	0.03	9.51	35.12	44.66	59.93	-15.27	QP
9	0.40	0.04	9.49	20.61	30.14	47.86	-17.72	Average
10	0.40	0.04	9.49	34.83	44.36	57.86	-13.50	QP
11	0.42	0.04	9.49	25.27	34.80	47.37	-12.57	Average
12	0.42	0.04	9.49	38.11	47.64	57.37	-9.73	QP




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 15 of 346

Mode:a; Line:Neutral Line

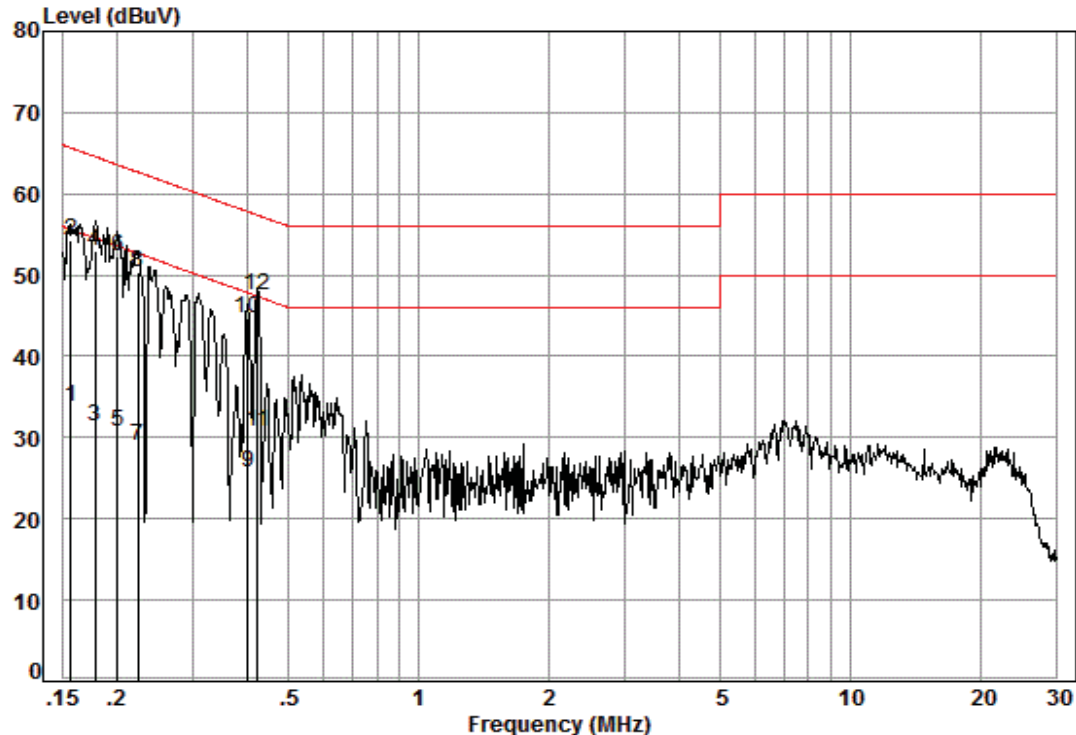

Site : Shielding Room
Condition: Neutral
Job No. : 09244CR
Test mode: a

	Freq	Cable	LISN	Read	Limit	Over	
	MHz	Loss	Factor	Level	Line	Limit	Remark
		dB	dB	dBuV	dBuV	dBuV	dB
1	0.16	0.02	9.58	24.21	33.81	55.65	-21.84 Average
2	0.16	0.02	9.58	44.77	54.37	65.65	-11.28 QP
3	0.18	0.03	9.58	21.76	31.37	54.59	-23.22 Average
4	0.18	0.03	9.58	43.33	52.94	64.59	-11.65 QP
5	0.20	0.03	9.57	21.21	30.81	53.58	-22.77 Average
6	0.20	0.03	9.57	42.64	52.24	63.58	-11.34 QP
7	0.22	0.03	9.57	19.35	28.95	52.70	-23.75 Average
8	0.22	0.03	9.57	40.70	50.30	62.70	-12.40 QP
9	0.40	0.04	9.59	16.02	25.65	47.81	-22.16 Average
10	0.40	0.04	9.59	35.11	44.74	57.81	-13.07 QP
11	0.42	0.04	9.59	21.06	30.69	47.37	-16.68 Average
12	0.42	0.04	9.59	37.96	47.59	57.37	-9.78 QP

7.2 Minimum 6dB Bandwidth

Test Requirement	47 CFR Part 15, Subpart C 15.247a(2)
Test Method:	ANSI C63.10 (2013) Section 11.8.1
Limit:	≥ 500 kHz


7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 24.5 °C Humidity: 46.8 % RH Atmospheric Pressure: 1010 mbar

Test mode: a:TX mode Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.

7.2.2 Test Setup Diagram

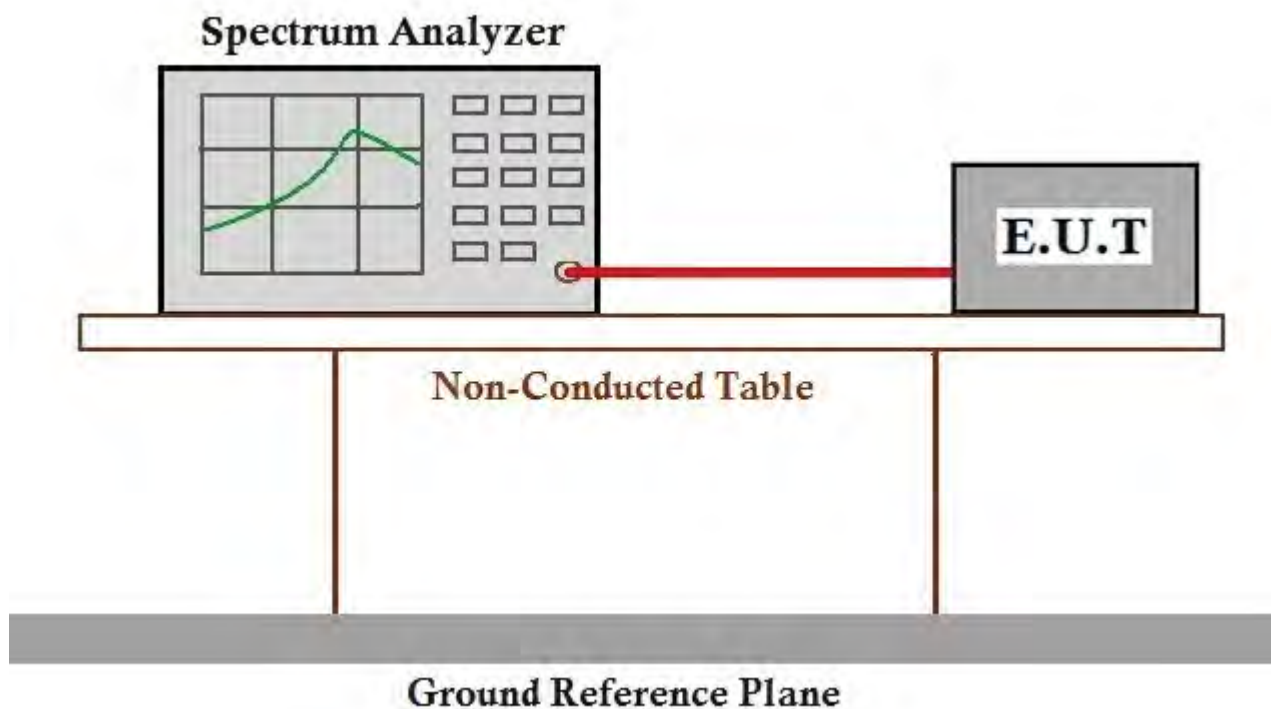

7.2.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

7.3 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)
Test Method: ANSI C63.10 (2013) Section 11.9.1
Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation


7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 24.5 °C Humidity: 46.8 % RH Atmospheric Pressure: 1010 mbar

Test mode: a:TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.

7.3.2 Test Setup Diagram

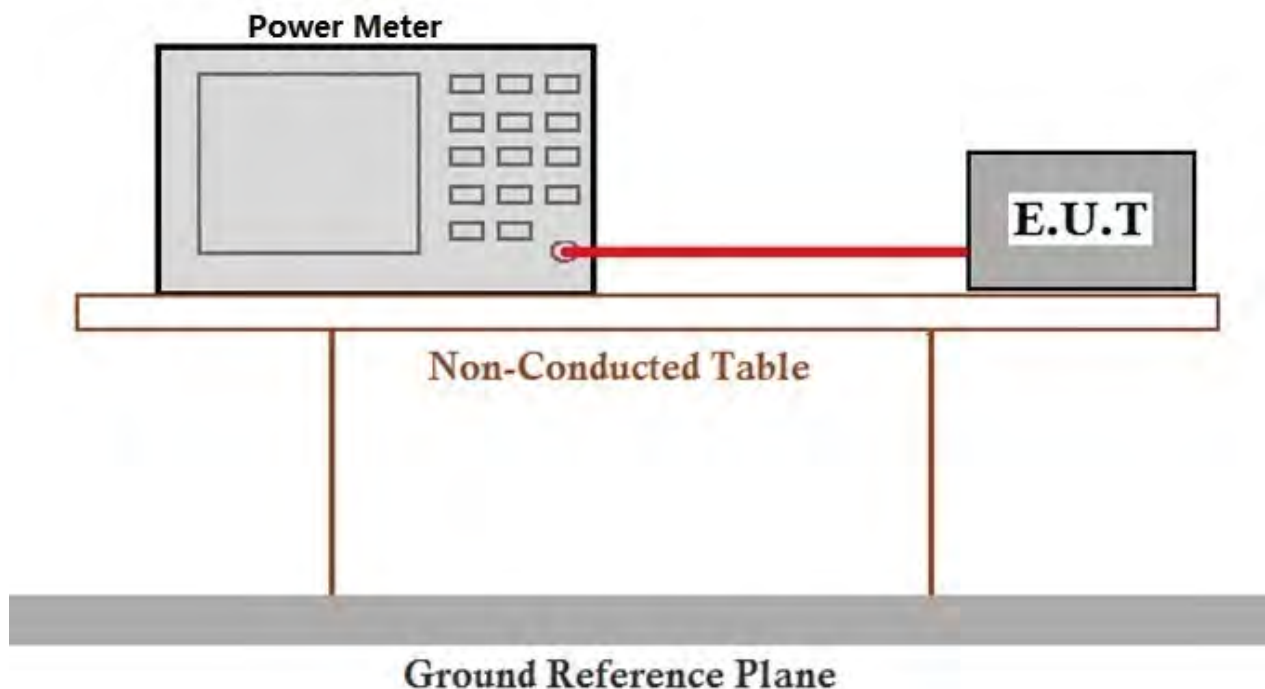

7.3.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

7.4 Power Spectrum Density

Test Requirement: 47 CFR Part 15, Subpart C 15.247(e)
 Test Method: ANSI C63.10 (2013) Section 11.10.2
 Limit: $\leq 8\text{dBm}$ in any 3 kHz band during any time interval of continuous transmission


7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 24.5 °C Humidity: 46.8 % RH Atmospheric Pressure: 1010 mbar

Test mode: a:TX mode. Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.

7.4.2 Test Setup Diagram

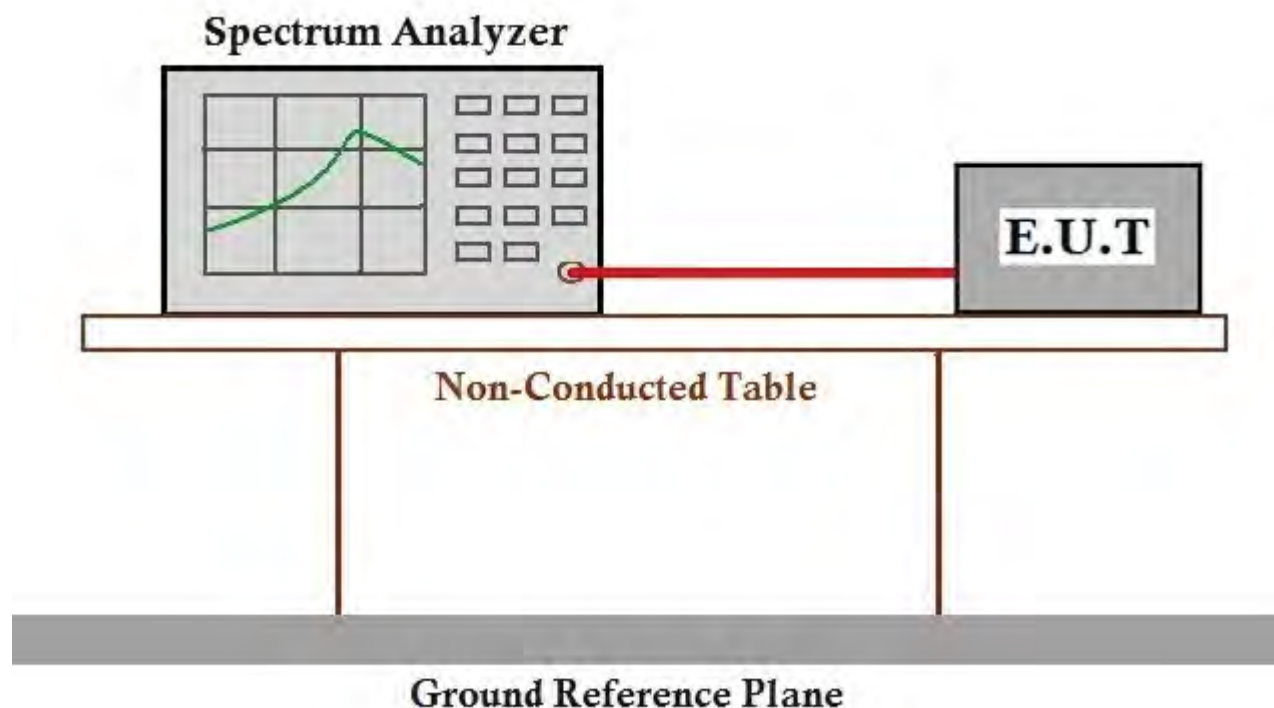

7.4.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

7.5 Conducted Band Edges Measurement

Test Requirement	47 CFR Part 15, Subpart C 15.247(d)
Test Method:	ANSI C63.10 (2013) Section 11.13.3.2
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))


7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 24.5 °C Humidity: 46.8 % RH Atmospheric Pressure: 1010 mbar

Test mode: a:TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.

7.5.2 Test Setup Diagram

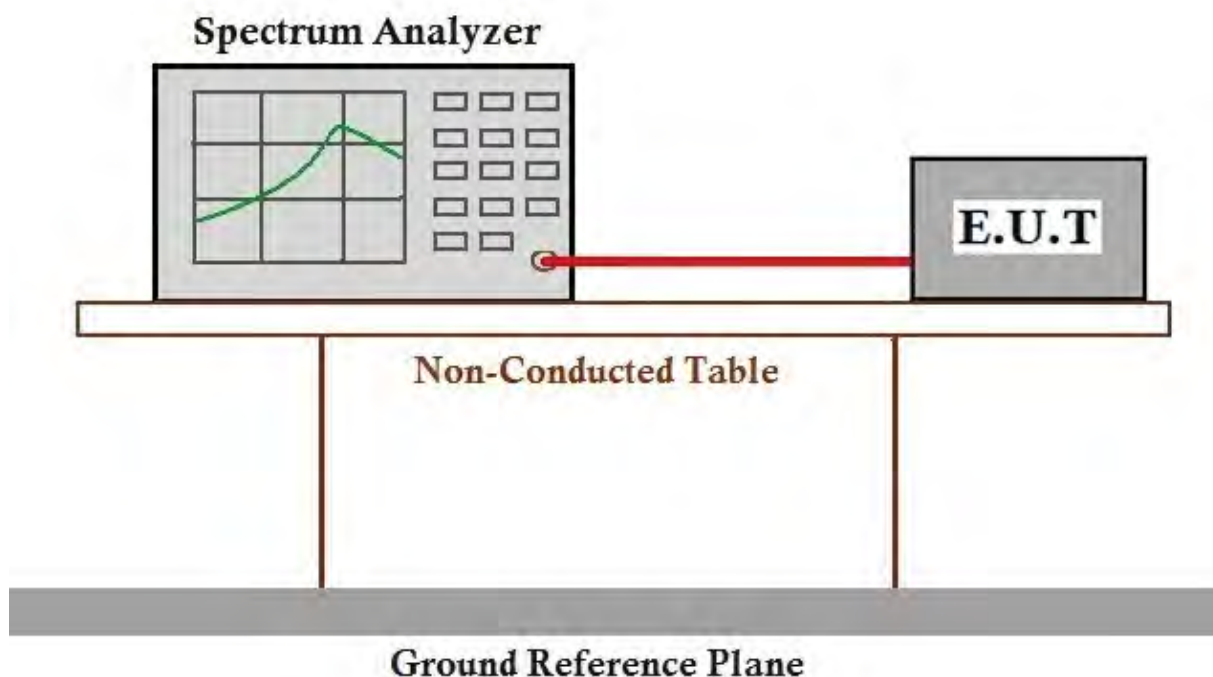

7.5.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247


7.6 Conducted Spurious Emissions

Test Requirement	47 CFR Part 15, Subpart C 15.247(d)
Test Method:	ANSI C63.10 (2013) Section 11.11
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))

7.6.1 E.U.T. Operation

Operating Environment:			
Temperature:	24.5 °C	Humidity:	46.8 % RH Atmospheric Pressure: 1010 mbar
Test mode:	a:TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.		

7.6.2 Test Setup Diagram

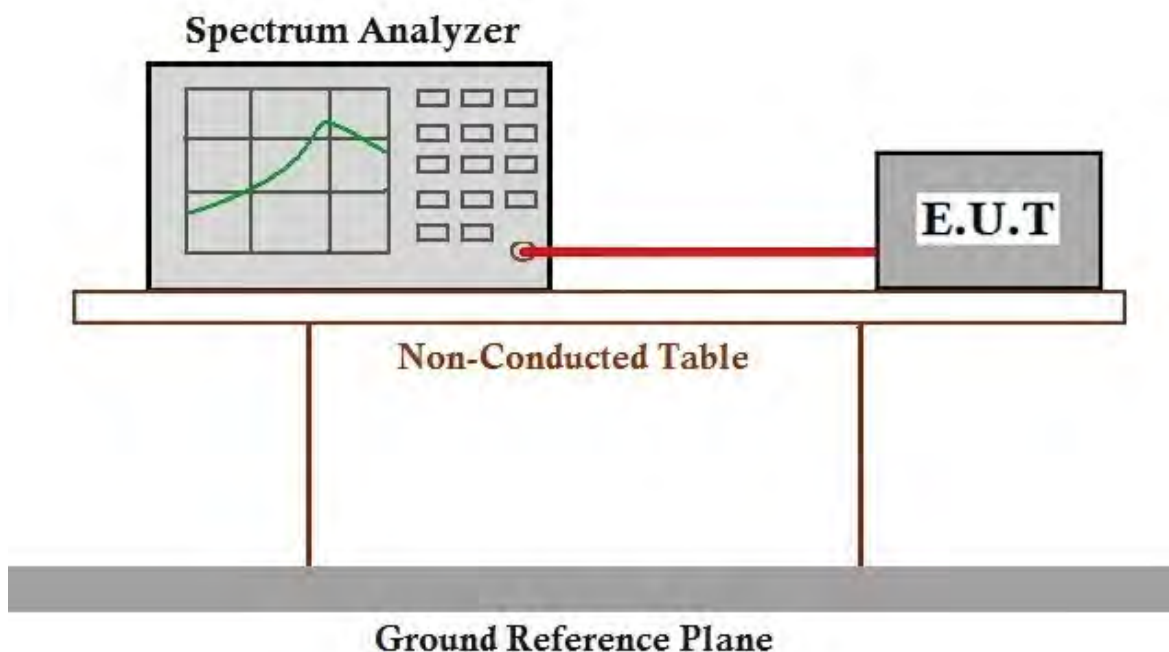

7.6.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

7.7 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.247(d)

Test Method: ANSI C63.10 (2013) Section 6.10.5

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.


7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 25.5 °C Humidity: 65.2 % RH Atmospheric Pressure: 1020 mbar

Test mode: a:TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.

7.7.2 Test Setup Diagram

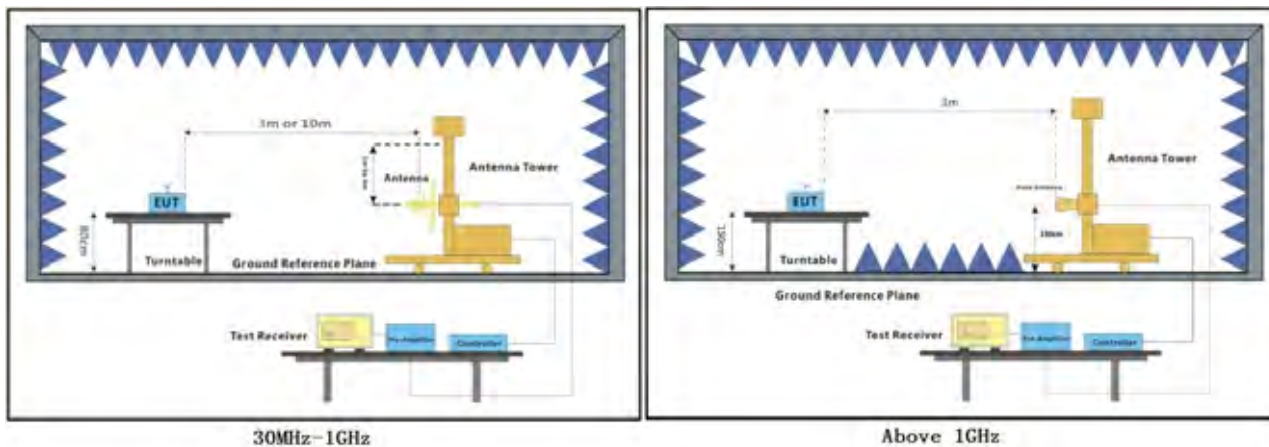



7.7.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 23 of 346

Test data for Antenna1:

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:Low

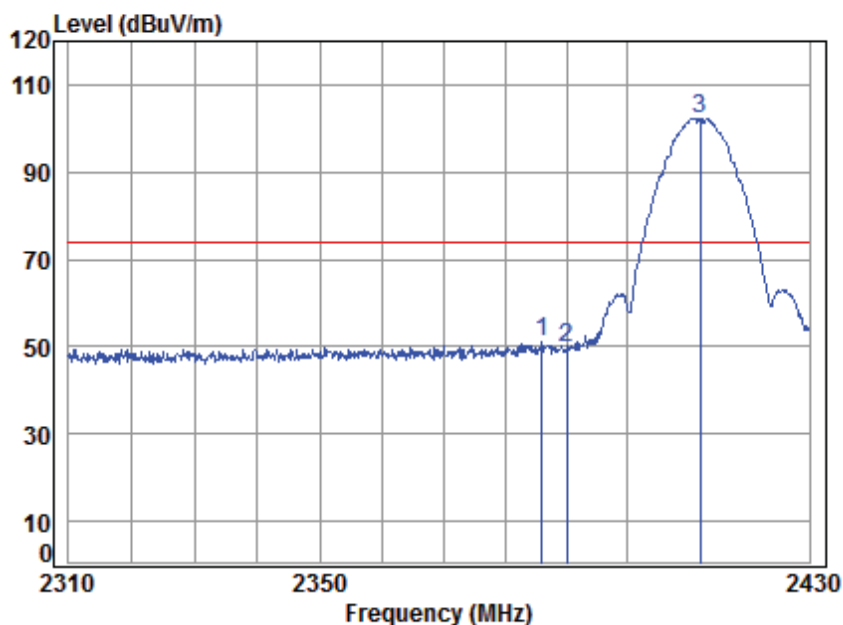

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2385.978	5.47	28.51	41.87	58.99	51.10	74.00	-22.90	peak
2	2390.000	5.47	28.52	41.87	57.55	49.67	74.00	-24.33	peak
3 *	2412.000	5.50	28.56	41.88	110.22	102.40	74.00	28.40	peak



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401
Page: 24 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:Low

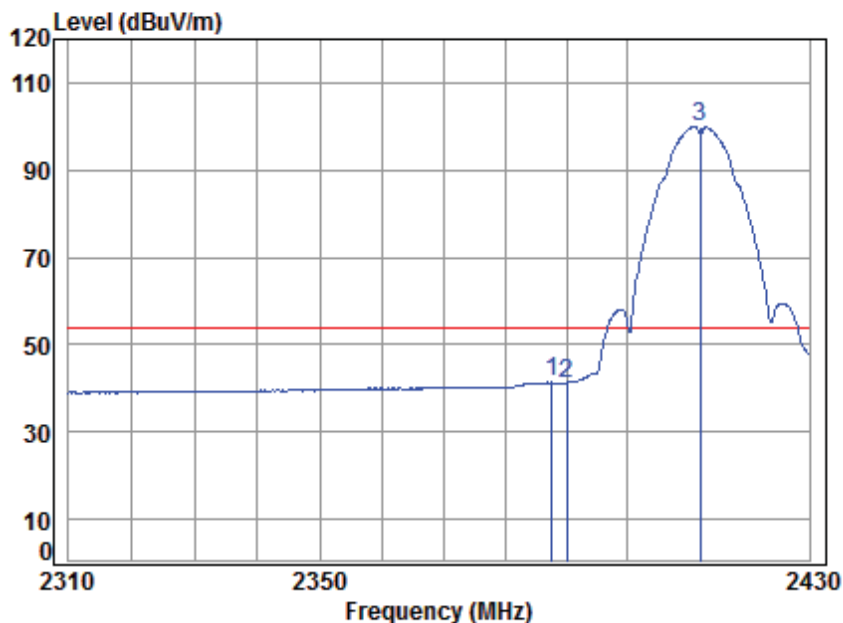

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2387.670	5.47	28.51	41.87	49.25	41.36	54.00	-12.64	Average
2	2390.000	5.47	28.52	41.87	49.09	41.21	54.00	-12.79	Average
3 *	2412.000	5.50	28.56	41.88	107.83	100.01	54.00	46.01	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 25 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:Low

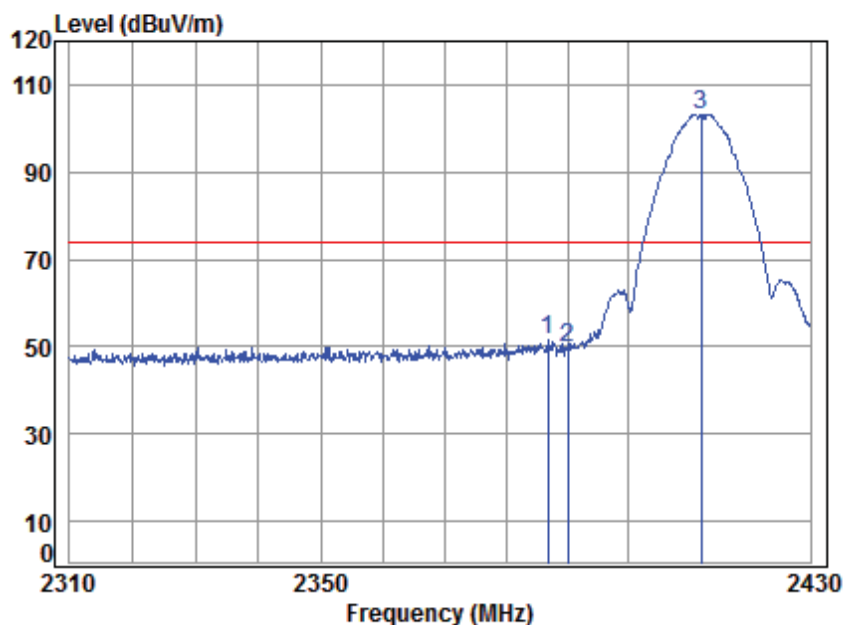

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2386.823	5.47	28.51	41.87	59.29	51.40	74.00	-22.60	peak
2	2390.000	5.47	28.52	41.87	57.71	49.83	74.00	-24.17	peak
3 *	2412.000	5.50	28.56	41.88	111.06	103.24	74.00	29.24	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 26 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:Low

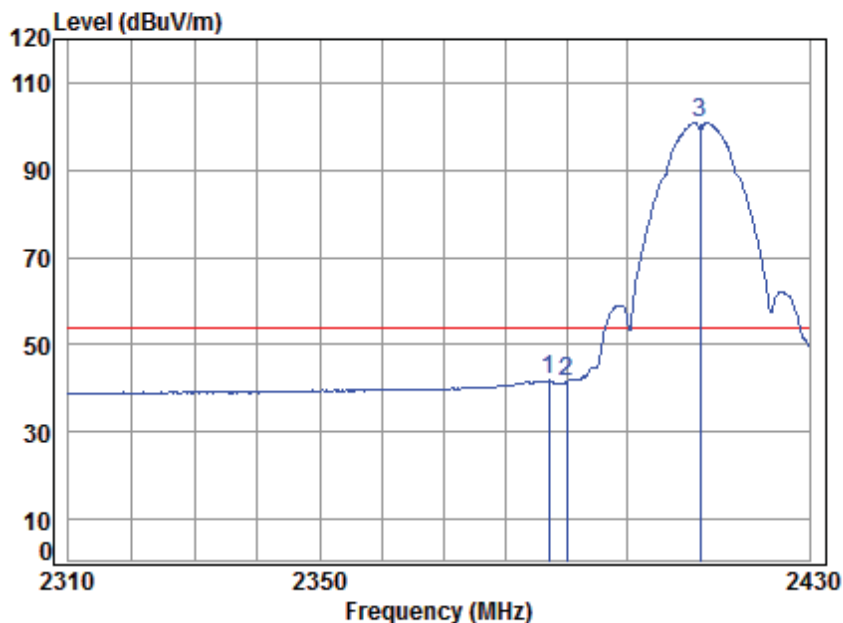

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2387.065	5.47	28.51	41.87	49.66	41.77	54.00	-12.23	Average
2	2390.000	5.47	28.52	41.87	49.41	41.53	54.00	-12.47	Average
3 *	2412.000	5.50	28.56	41.88	108.68	100.86	54.00	46.86	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 27 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:High

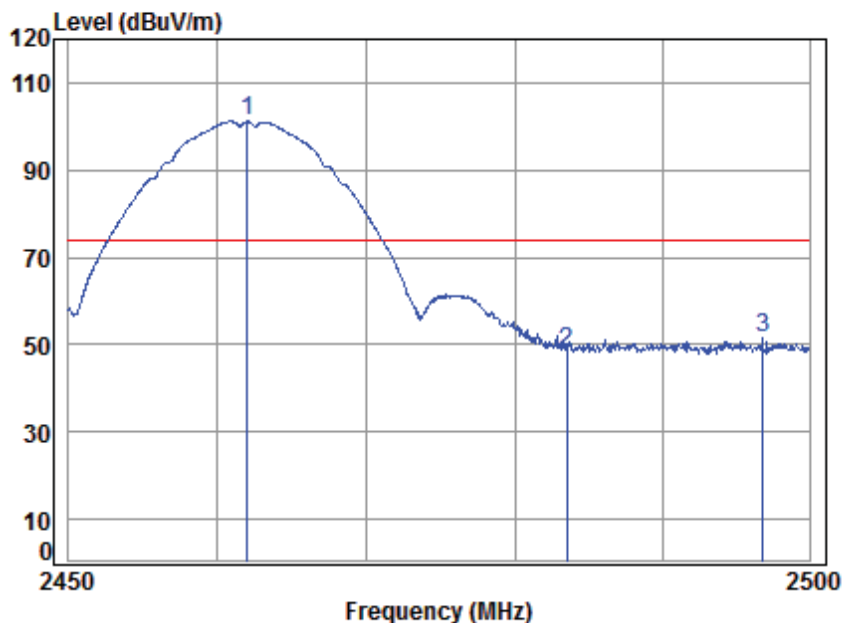

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	108.82	101.13	74.00	27.13 peak
2	2483.500	5.60	28.67	41.91	56.19	48.55	74.00	-25.45 peak
3	2496.820	5.62	28.69	41.92	59.14	51.53	74.00	-22.47 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 28 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:High

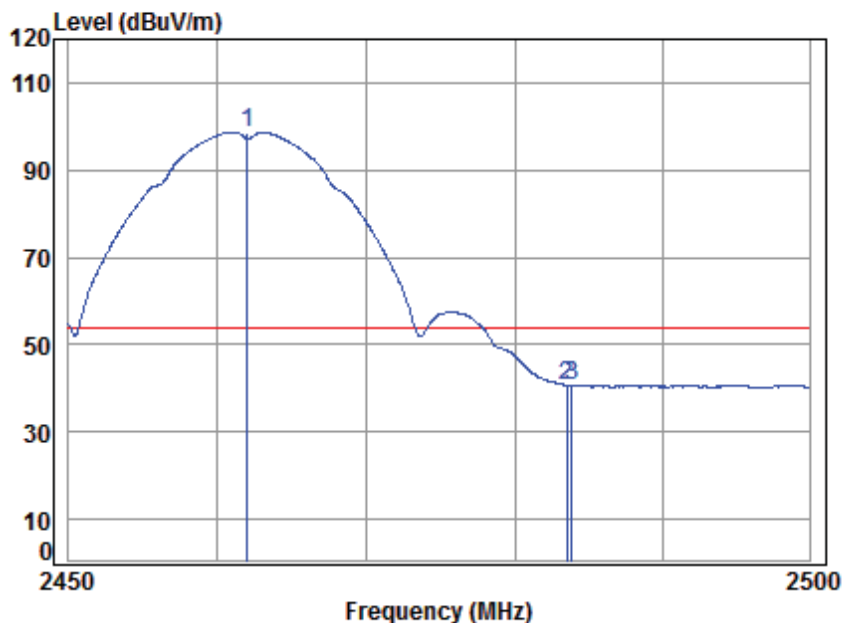

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	106.42	98.73	54.00	44.73 Average
2	2483.500	5.60	28.67	41.91	48.35	40.71	54.00	-13.29 Average
3	2483.840	5.60	28.67	41.91	48.47	40.83	54.00	-13.17 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 29 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:High

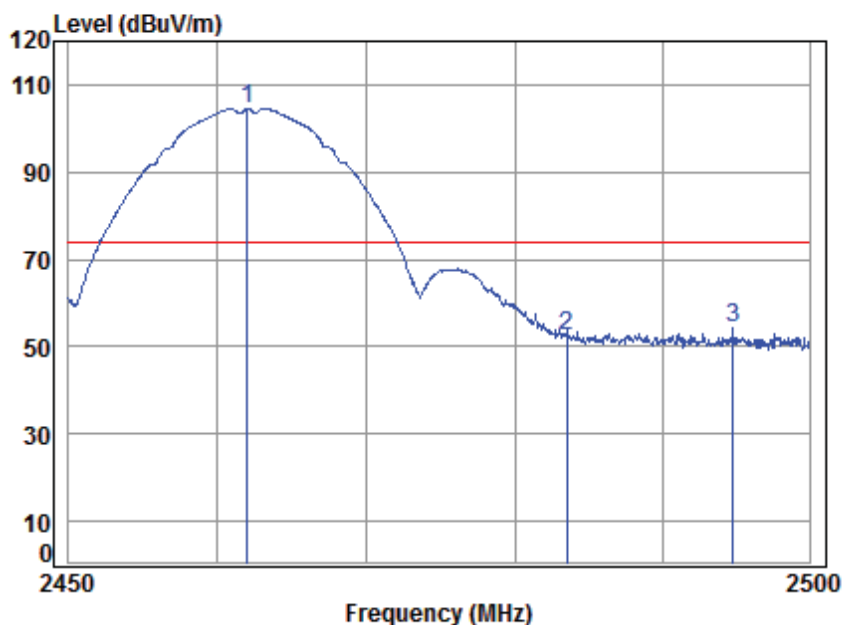

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	112.22	104.53	74.00	30.53 peak
2	2483.500	5.60	28.67	41.91	59.96	52.32	74.00	-21.68 peak
3	2494.803	5.61	28.69	41.92	61.82	54.20	74.00	-19.80 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 30 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:High

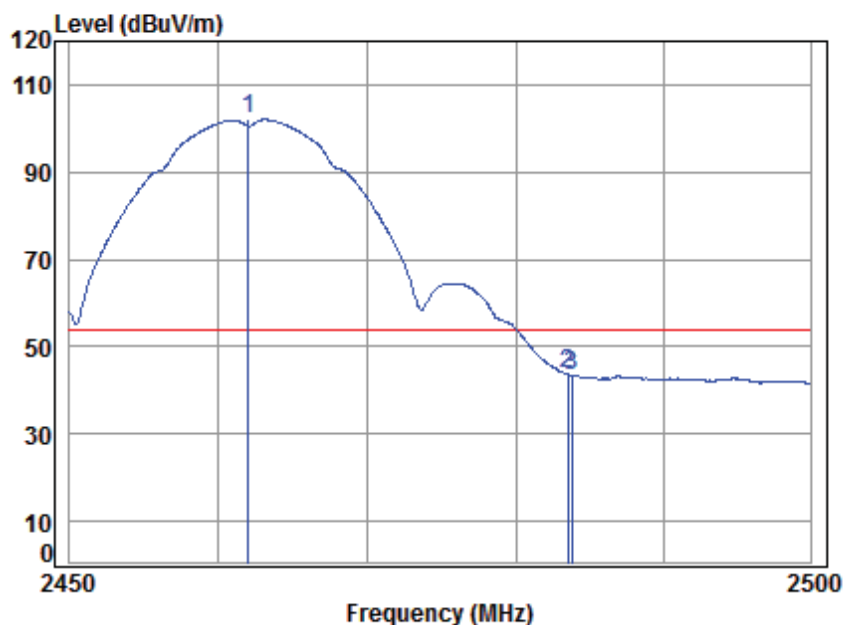

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	109.72	102.03	54.00	48.03 Average
2	2483.500	5.60	28.67	41.91	51.38	43.74	54.00	-10.26 Average
3	2483.790	5.60	28.67	41.91	51.08	43.44	54.00	-10.56 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 31 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:Low

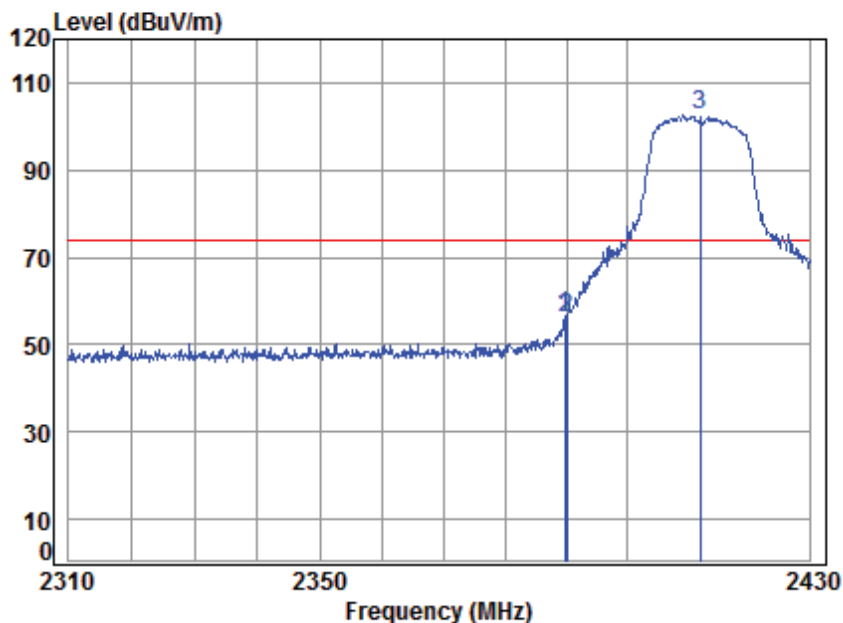

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.726	5.47	28.52	41.87	64.29	56.41	74.00	-17.59	peak
2	2390.000	5.47	28.52	41.87	63.81	55.93	74.00	-18.07	peak
3 *	2412.000	5.50	28.56	41.88	110.32	102.50	74.00	28.50	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 32 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:Low

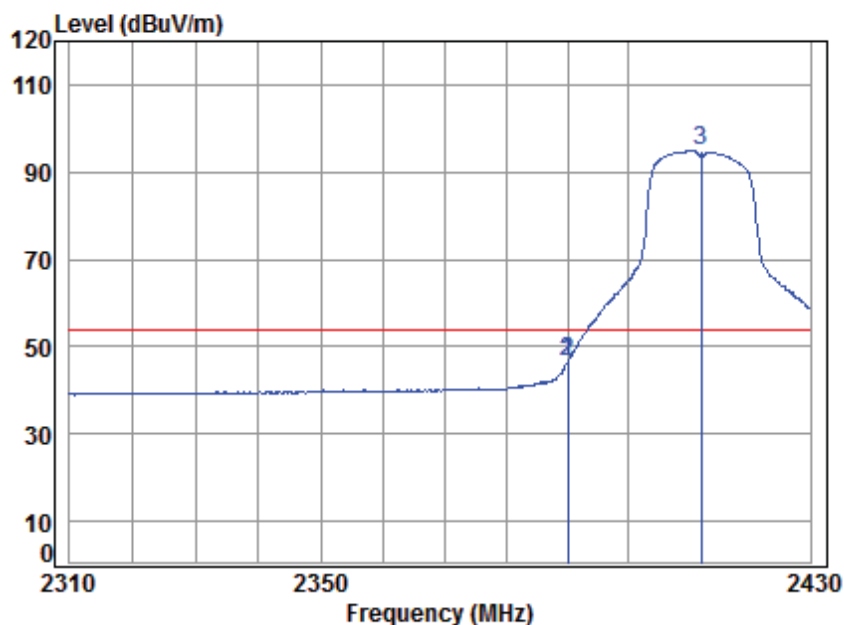

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	5.47	28.52	41.87	54.28	46.40	54.00	-7.60	Average
2	2390.000	5.47	28.52	41.87	54.28	46.40	54.00	-7.60	Average
3 *	2412.000	5.50	28.56	41.88	102.58	94.76	54.00	40.76	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 33 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:Low

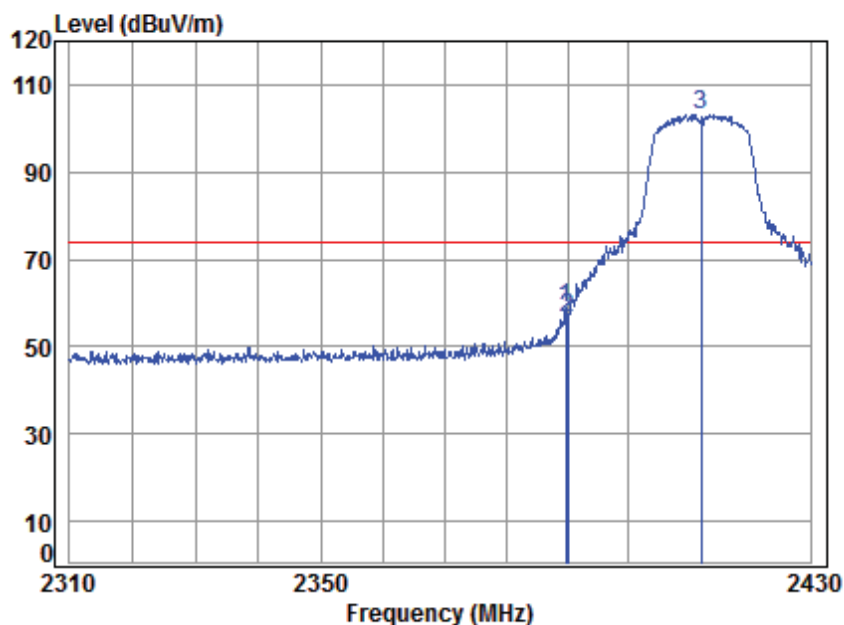

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.726	5.47	28.52	41.87	66.86	58.98	74.00	-15.02	peak
2	2390.000	5.47	28.52	41.87	64.47	56.59	74.00	-17.41	peak
3 *	2412.000	5.50	28.56	41.88	111.10	103.28	74.00	29.28	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 34 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:Low

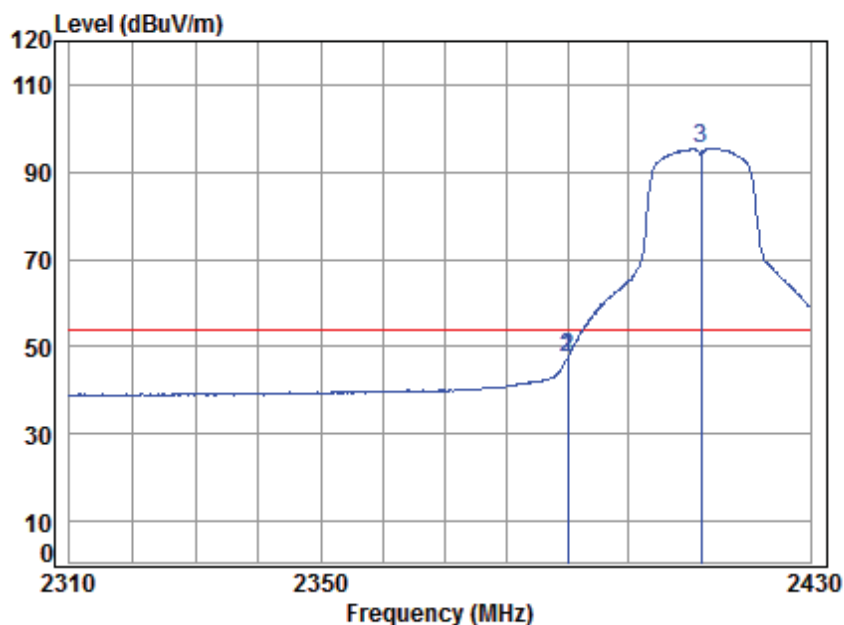

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	5.47	28.52	41.87	55.28	47.40	54.00	-6.60	Average
2	2390.000	5.47	28.52	41.87	55.28	47.40	54.00	-6.60	Average
3 *	2412.000	5.50	28.56	41.88	103.23	95.41	54.00	41.41	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 35 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:High

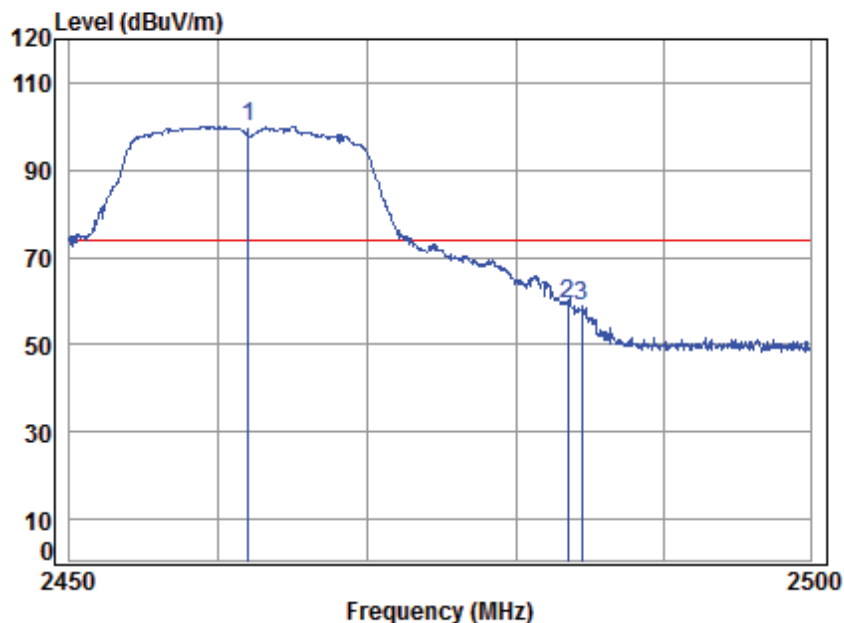

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	107.64	99.95	74.00	25.95 peak
2	2483.500	5.60	28.67	41.91	66.84	59.20	74.00	-14.80 peak
3	2484.492	5.60	28.67	41.91	66.63	58.99	74.00	-15.01 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 36 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:High

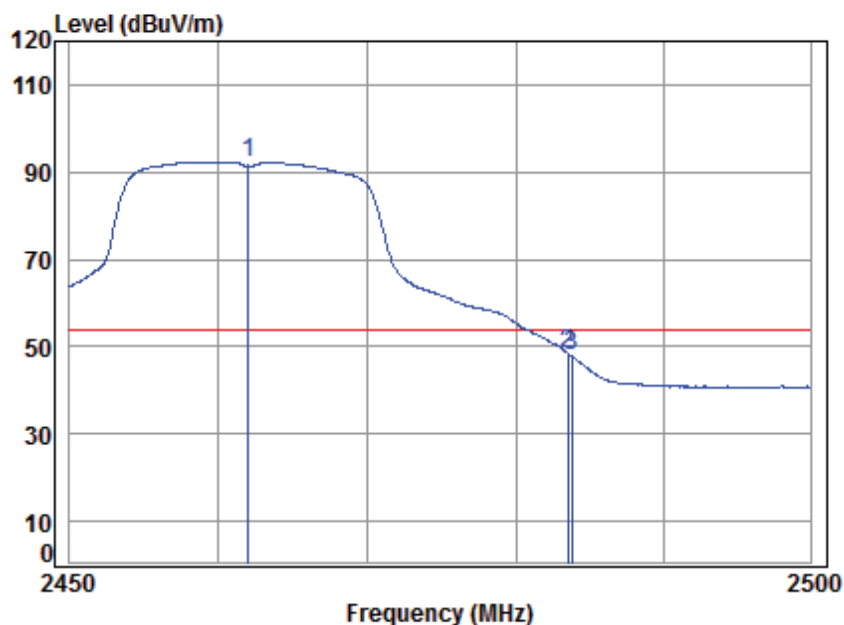

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	100.04	92.35	54.00	38.35	Average
2	2483.500	5.60	28.67	41.91	56.12	48.48	54.00	-5.52	Average
3	2483.790	5.60	28.67	41.91	55.43	47.79	54.00	-6.21	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 37 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:High

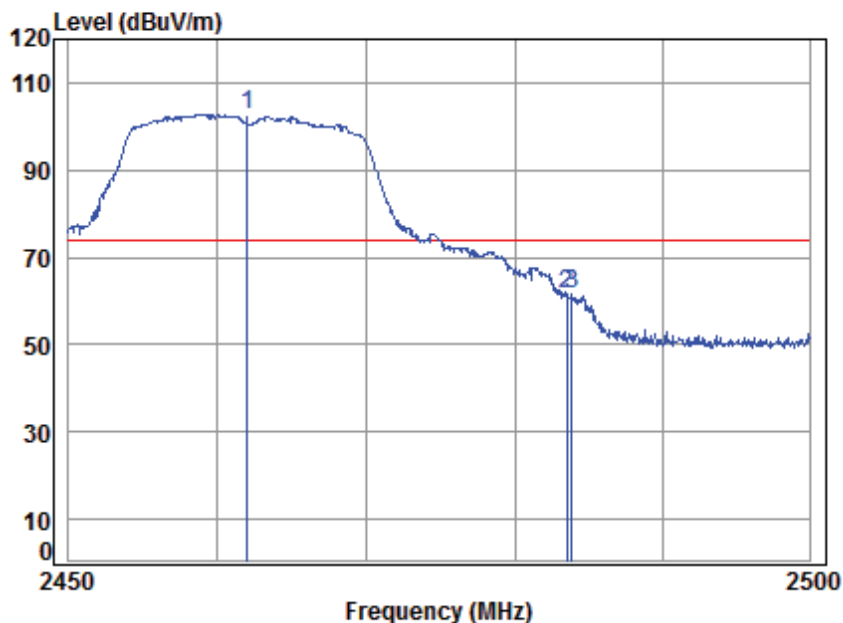

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	110.48	102.79	74.00	28.79 peak
2	2483.500	5.60	28.67	41.91	69.12	61.48	74.00	-12.52 peak
3	2483.890	5.60	28.67	41.91	69.07	61.43	74.00	-12.57 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 38 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:High

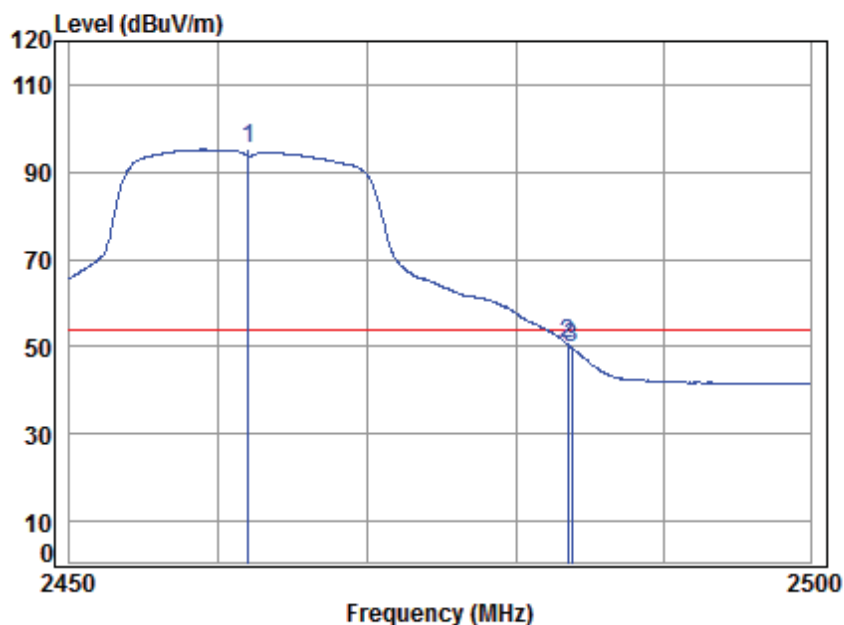

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	102.85	95.16	54.00	41.16 Average
2	2483.500	5.60	28.67	41.91	58.17	50.53	54.00	-3.47 Average
3	2483.790	5.60	28.67	41.91	57.41	49.77	54.00	-4.23 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 39 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:Low

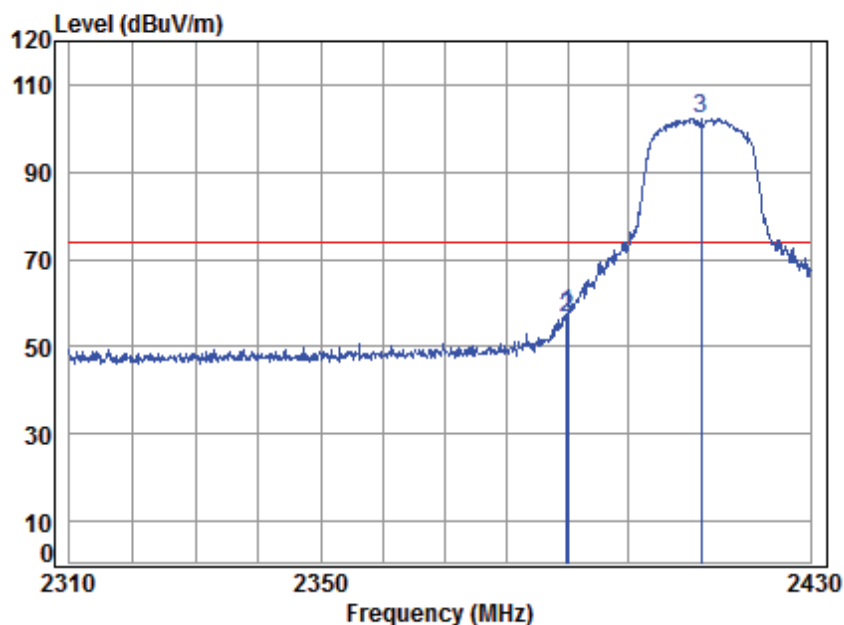

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11N 20
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.847	5.47	28.52	41.87	65.23	57.35	74.00	-16.65	peak
2	2390.000	5.47	28.52	41.87	64.46	56.58	74.00	-17.42	peak
3 *	2412.000	5.50	28.56	41.88	110.25	102.43	74.00	28.43	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 40 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:Low

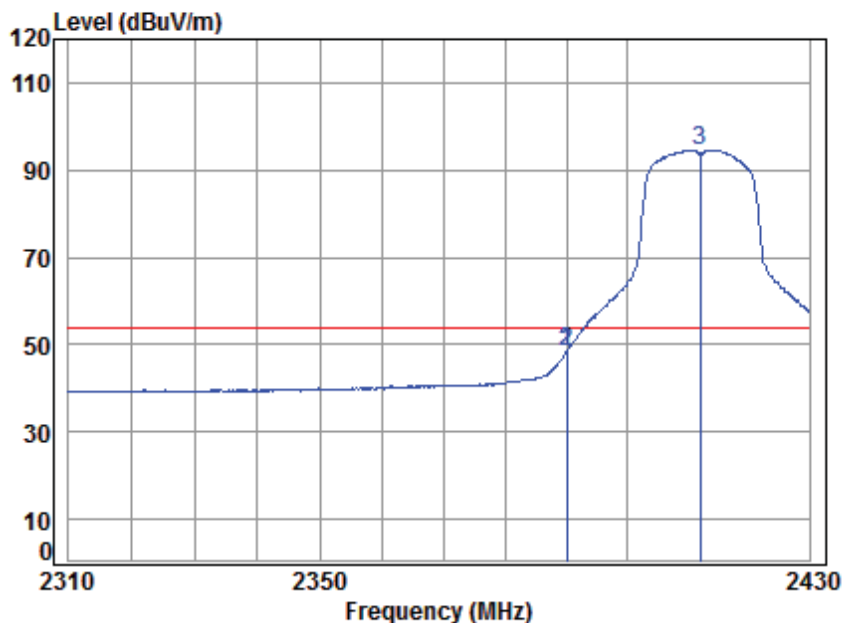

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11N 20
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	5.47	28.52	41.87	56.30	48.42	54.00	-5.58	Average
2	2390.000	5.47	28.52	41.87	56.30	48.42	54.00	-5.58	Average
3 *	2412.000	5.50	28.56	41.88	102.47	94.65	54.00	40.65	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 41 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:Low

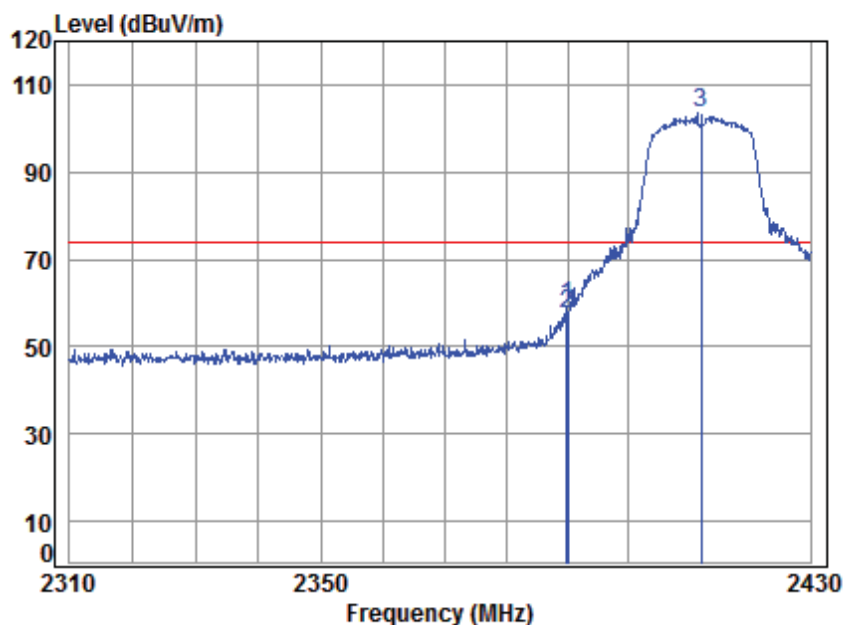

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11N 20
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.847	5.47	28.52	41.87	67.13	59.25	74.00	-14.75	peak
2	2390.000	5.47	28.52	41.87	65.43	57.55	74.00	-16.45	peak
3 *	2412.000	5.50	28.56	41.88	111.25	103.43	74.00	29.43	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 42 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:Low

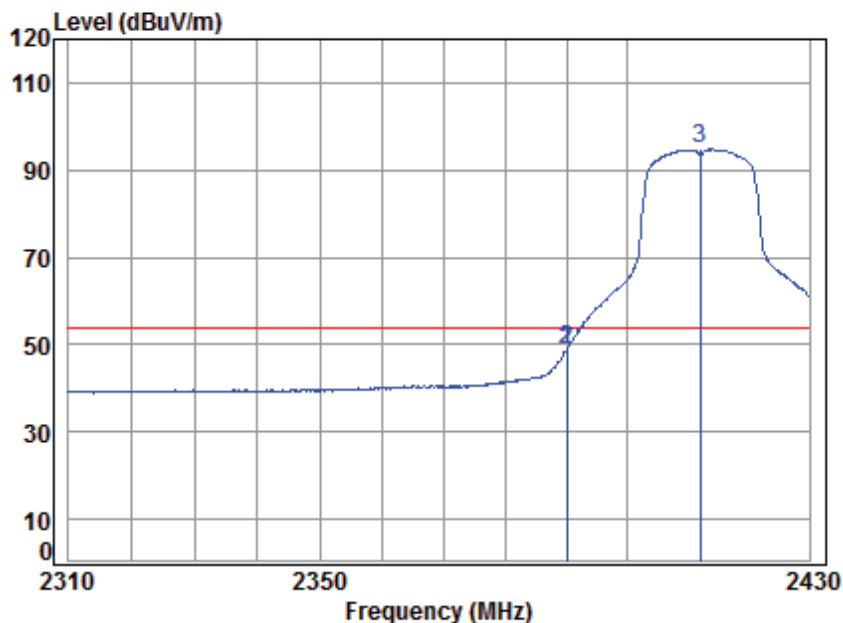

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11N 20
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	5.47	28.52	41.87	56.64	48.76	54.00	-5.24	Average
2	2390.000	5.47	28.52	41.87	56.64	48.76	54.00	-5.24	Average
3 *	2412.000	5.50	28.56	41.88	102.53	94.71	54.00	40.71	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 43 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:High

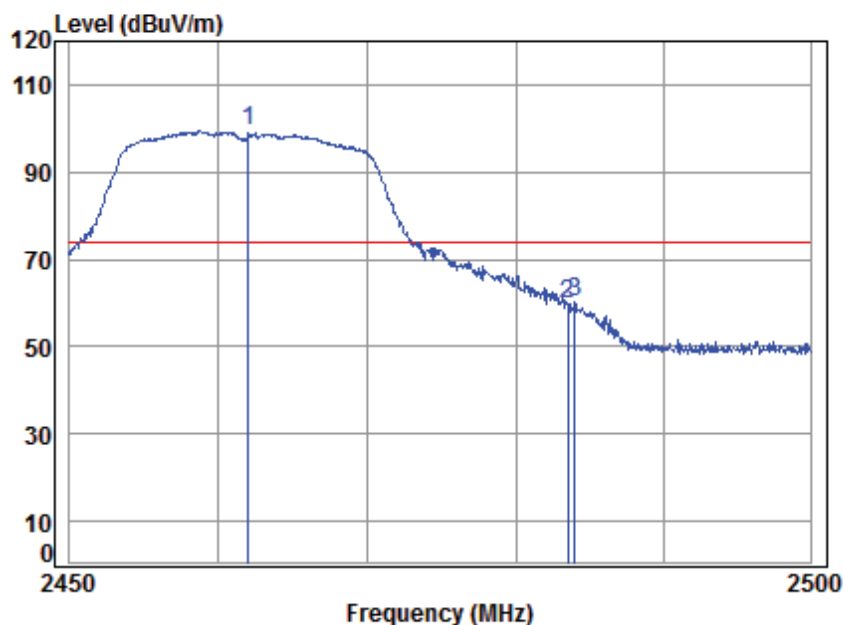

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16.5

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	106.98	99.29	74.00	25.29 peak
2	2483.500	5.60	28.67	41.91	67.20	59.56	74.00	-14.44 peak
3	2483.990	5.60	28.67	41.91	67.80	60.16	74.00	-13.84 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 44 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:High

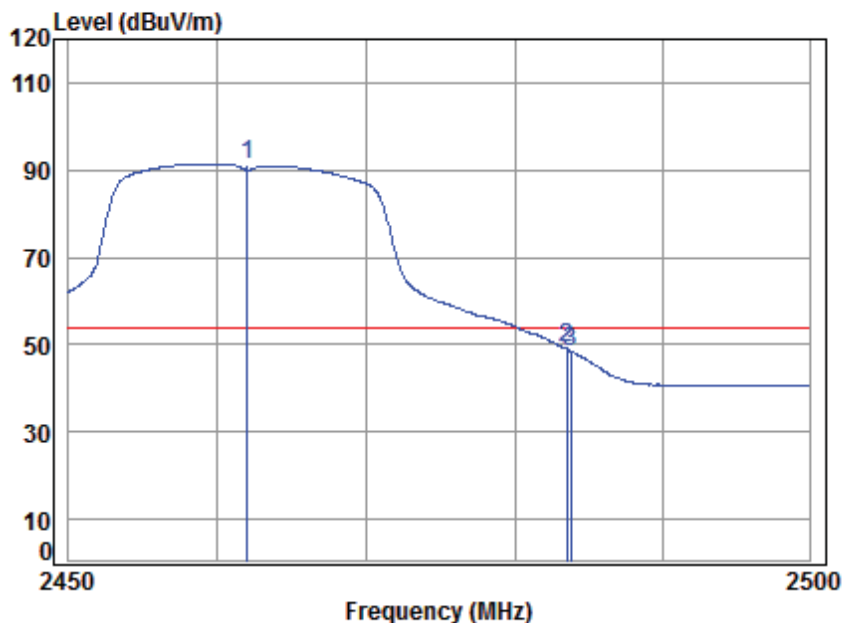

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	99.14	91.45	54.00	37.45	Average
2	2483.500	5.60	28.67	41.91	56.72	49.08	54.00	-4.92	Average
3	2483.790	5.60	28.67	41.91	56.22	48.58	54.00	-5.42	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 45 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:High

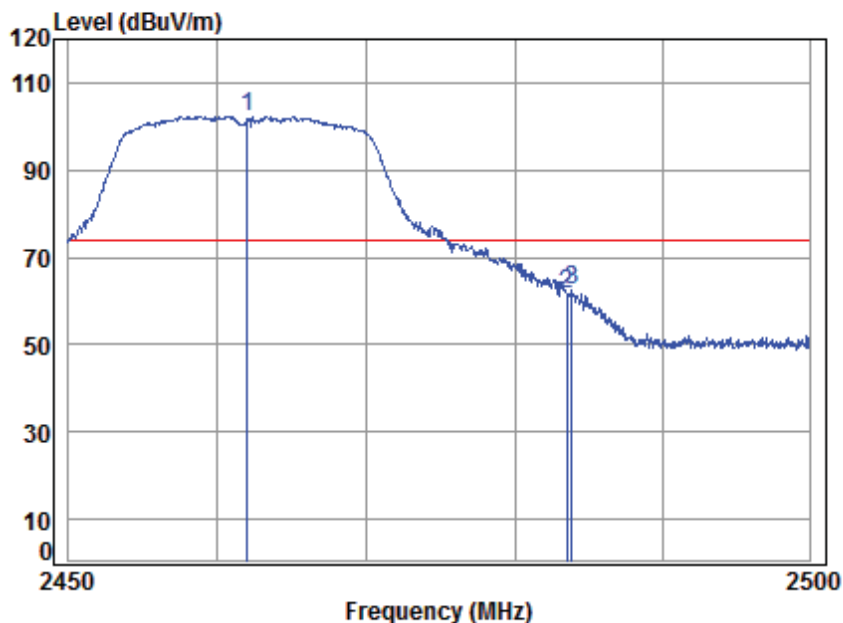

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	110.01	102.32	74.00	28.32	peak
2	2483.500	5.60	28.67	41.91	69.17	61.53	74.00	-12.47	peak
3	2483.890	5.60	28.67	41.91	70.03	62.39	74.00	-11.61	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 46 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:High

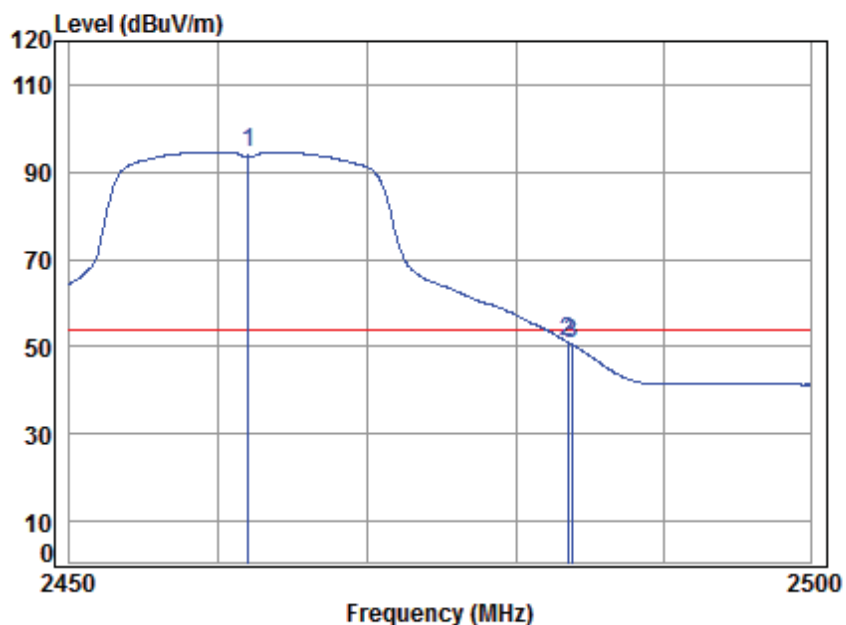

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	102.25	94.56	54.00	40.56	Average
2	2483.500	5.60	28.67	41.91	58.72	51.08	54.00	-2.92	Average
3	2483.790	5.60	28.67	41.91	58.17	50.53	54.00	-3.47	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 47 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:Low

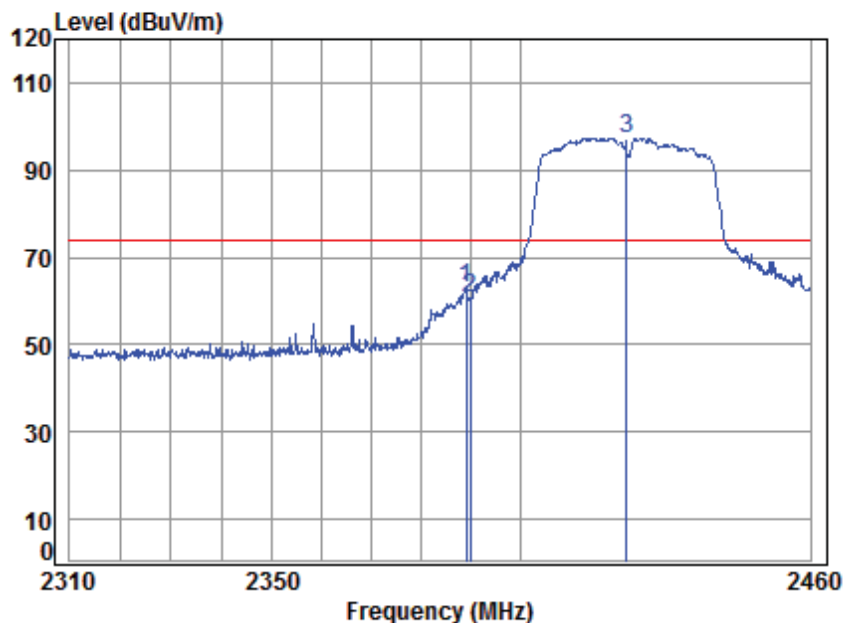

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2422 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 15.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.075	5.47	28.52	41.87	71.01	63.13	74.00	-10.87	peak
2	2390.000	5.47	28.52	41.87	68.49	60.61	74.00	-13.39	peak
3 *	2422.000	5.52	28.57	41.89	105.20	97.40	74.00	23.40	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 48 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:Low

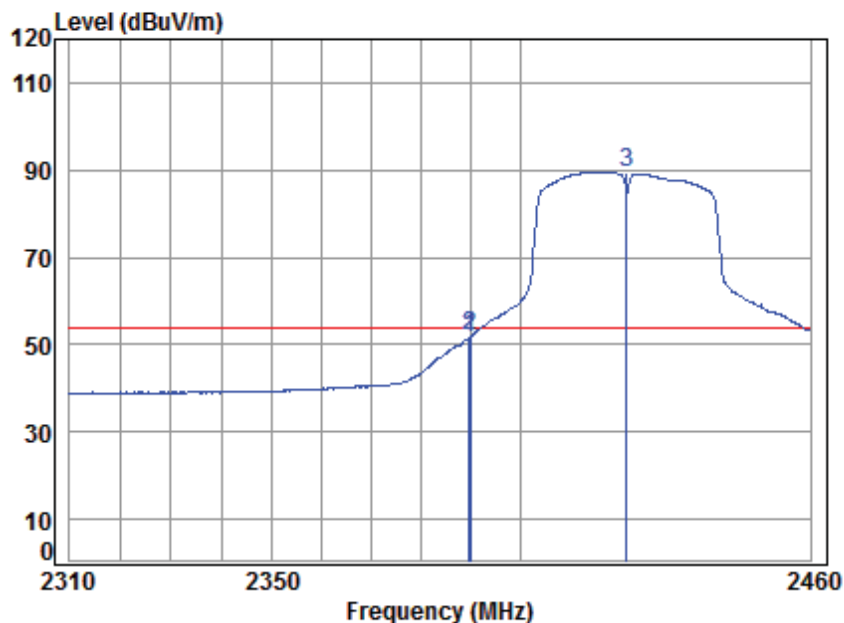

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2422 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 15.5


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.827	5.47	28.52	41.87	59.60	51.72	54.00	-2.28	Average
2	2390.000	5.47	28.52	41.87	59.81	51.93	54.00	-2.07	Average
3 *	2422.000	5.52	28.57	41.89	97.36	89.56	54.00	35.56	Average



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401
Page: 49 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:Low

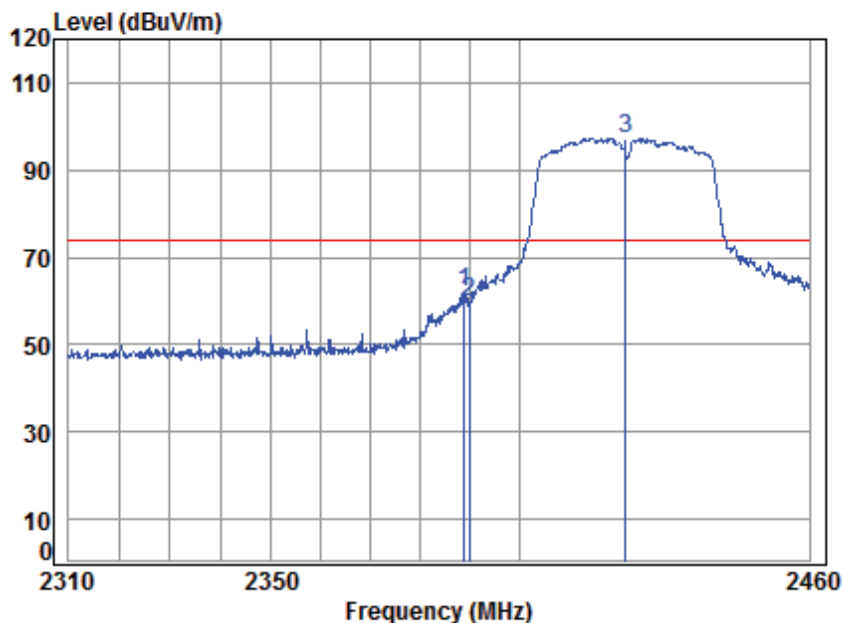

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2422 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 15

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2388.925	5.47	28.52	41.87	69.75	61.87	74.00	-12.13	peak
2	2390.000	5.47	28.52	41.87	67.64	59.76	74.00	-14.24	peak
3 *	2422.000	5.52	28.57	41.89	105.10	97.30	74.00	23.30	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 50 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:Low

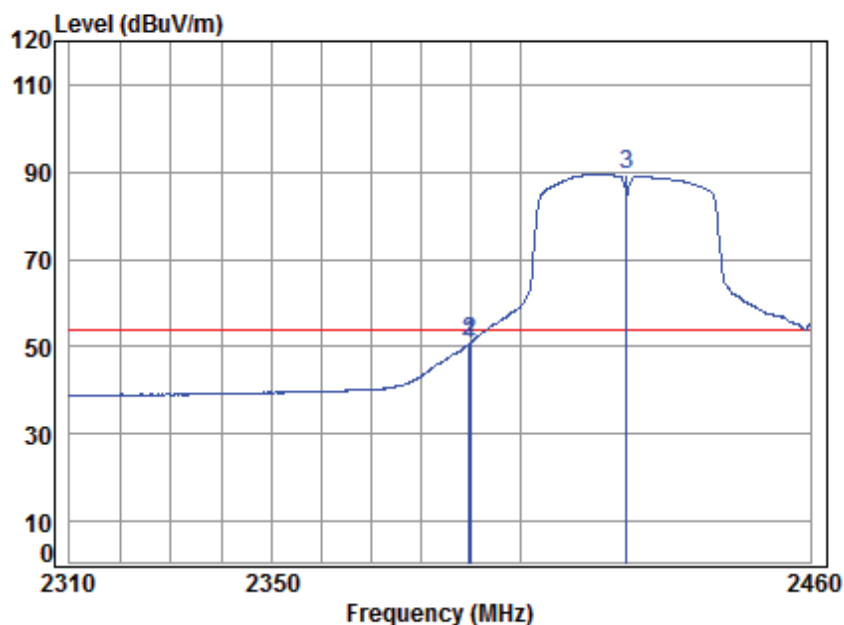

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2422 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 15

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.827	5.47	28.52	41.87	58.51	50.63	54.00	-3.37	Average
2	2390.000	5.47	28.52	41.87	58.82	50.94	54.00	-3.06	Average
3 *	2422.000	5.52	28.57	41.89	97.30	89.50	54.00	35.50	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 51 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:High

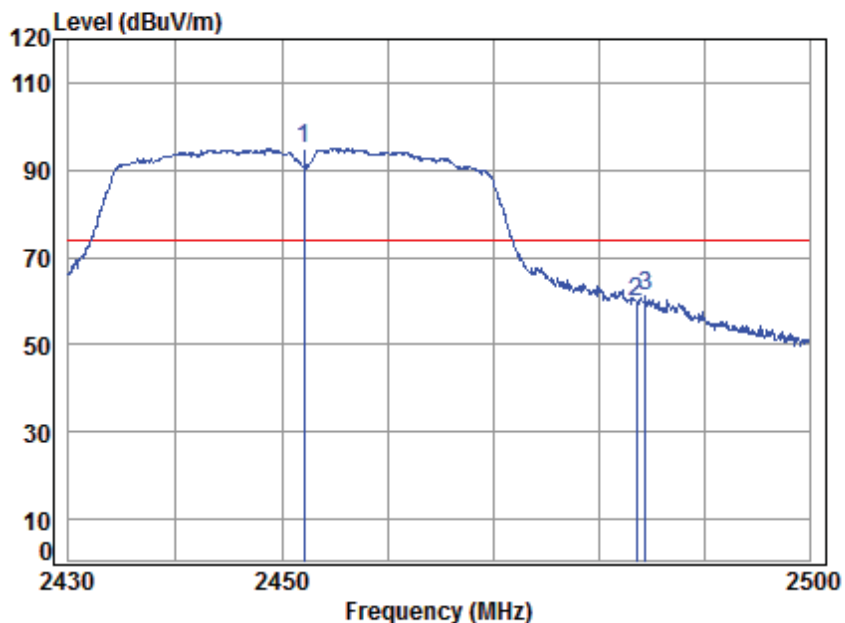

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2452 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 14.5

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2452.000	5.56	28.62	41.90	102.64	94.92	74.00	20.92 peak
2	2483.500	5.60	28.67	41.91	67.59	59.95	74.00	-14.05 peak
3	2484.358	5.60	28.67	41.91	68.84	61.20	74.00	-12.80 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 52 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:High

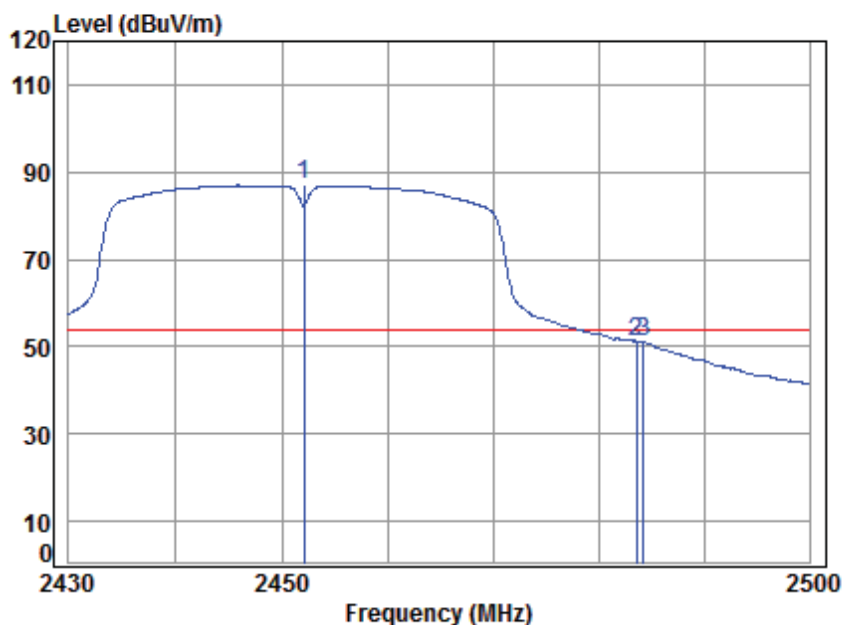

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2452 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 14.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2452.000	5.56	28.62	41.90	94.64	86.92	54.00	32.92	Average
2	2483.500	5.60	28.67	41.91	58.86	51.22	54.00	-2.78	Average
3	2484.147	5.60	28.67	41.91	58.74	51.10	54.00	-2.90	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 53 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:High

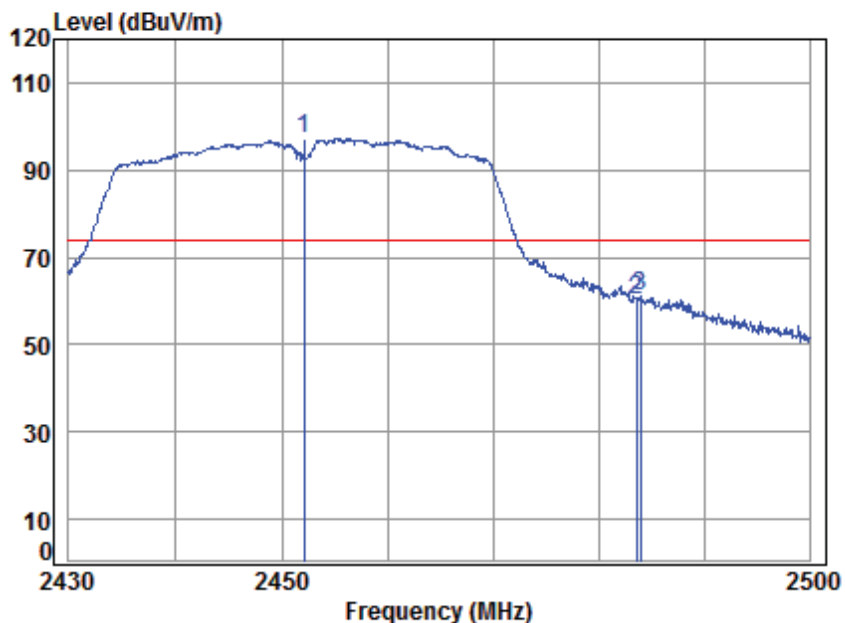

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2452 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 14

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2452.000	5.56	28.62	41.90	104.86	97.14	74.00	23.14 peak
2	2483.500	5.60	28.67	41.91	67.81	60.17	74.00	-13.83 peak
3	2483.865	5.60	28.67	41.91	68.75	61.11	74.00	-12.89 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 54 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:High

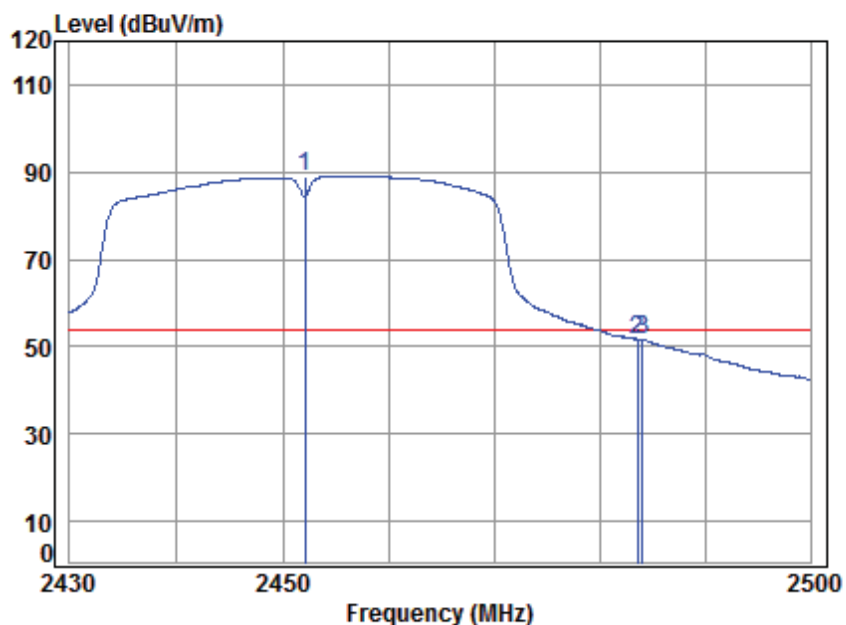

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2452 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 14

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2452.000	5.56	28.62	41.90	96.85	89.13	54.00	35.13 Average
2	2483.500	5.60	28.67	41.91	59.42	51.78	54.00	-2.22 Average
3	2483.935	5.60	28.67	41.91	59.22	51.58	54.00	-2.42 Average




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM181000924401

Page: 55 of 346

Test data for Antenna2:

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:Low

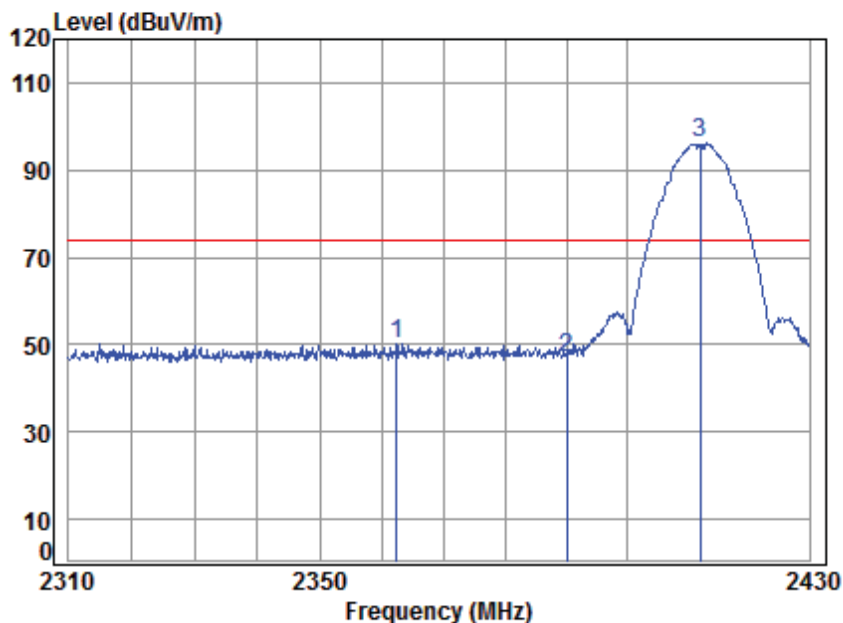

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2362.411	5.44	28.47	41.86	58.17	50.22	74.00	-23.78	peak
2	2390.000	5.47	28.52	41.87	54.81	46.93	74.00	-27.07	peak
3 *	2412.000	5.50	28.56	41.88	103.87	96.05	74.00	22.05	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 56 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:Low

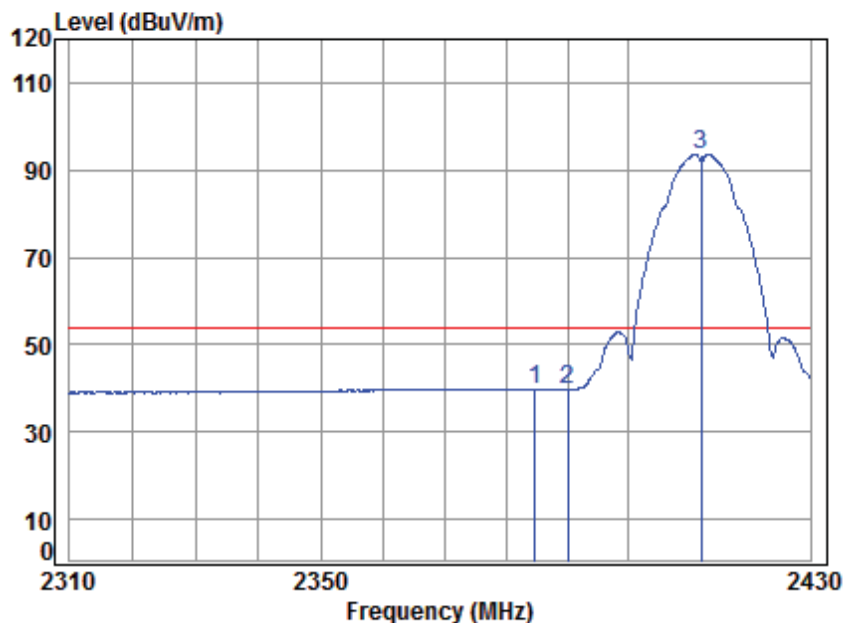

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2384.649	5.47	28.51	41.87	47.74	39.85	54.00	-14.15	Average
2	2390.000	5.47	28.52	41.87	47.70	39.82	54.00	-14.18	Average
3 *	2412.000	5.50	28.56	41.88	101.43	93.61	54.00	39.61	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 57 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:Low

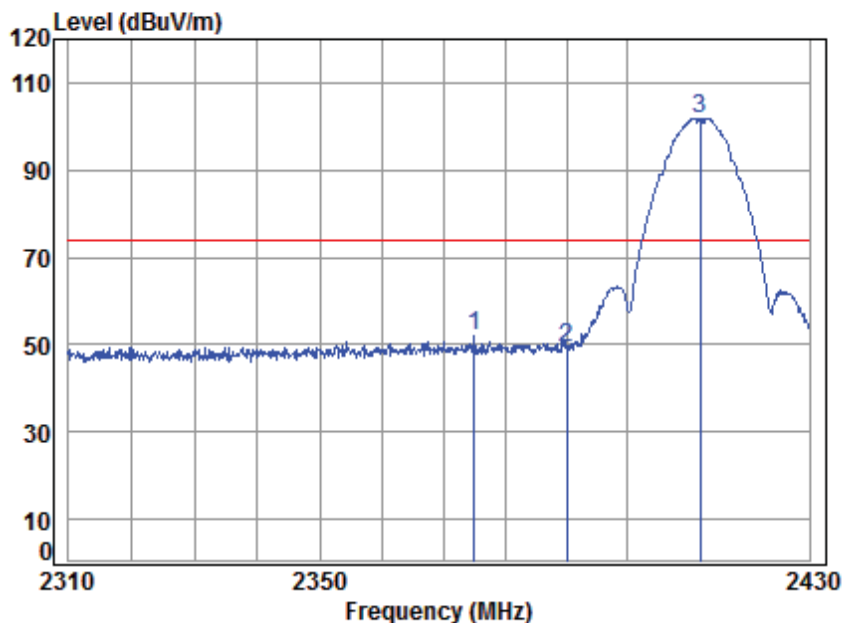

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2375.007	5.45	28.49	41.87	59.77	51.84	74.00	-22.16	peak
2	2390.000	5.47	28.52	41.87	57.21	49.33	74.00	-24.67	peak
3 *	2412.000	5.50	28.56	41.88	109.76	101.94	74.00	27.94	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 58 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:Low

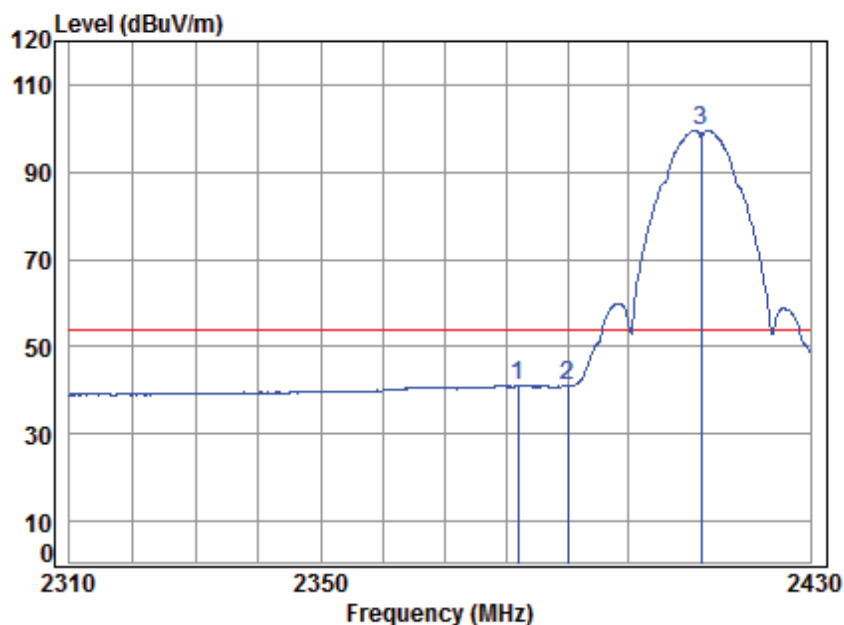

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2381.993	5.46	28.50	41.87	49.05	41.14	54.00	-12.86	Average
2	2390.000	5.47	28.52	41.87	48.93	41.05	54.00	-12.95	Average
3 *	2412.000	5.50	28.56	41.88	107.50	99.68	54.00	45.68	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 59 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:High

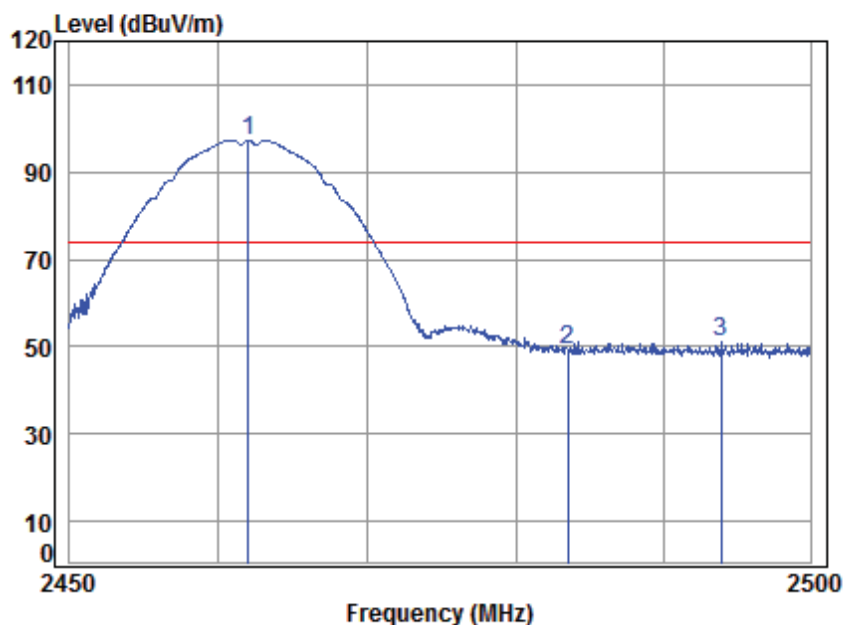

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	105.07	97.38	74.00	23.38	peak
2	2483.500	5.60	28.67	41.91	57.04	49.40	74.00	-24.60	peak
3	2493.947	5.61	28.69	41.92	58.76	51.14	74.00	-22.86	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 60 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:High

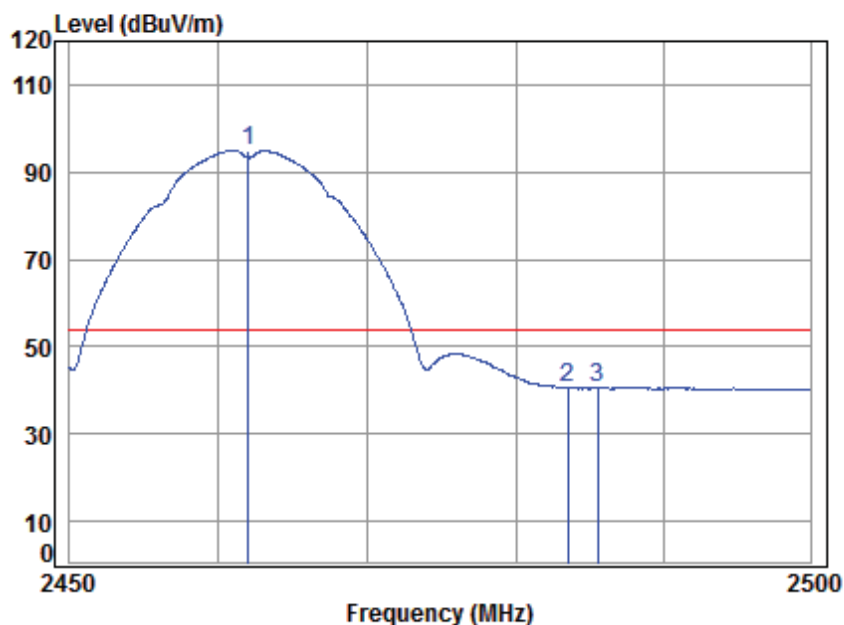

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	102.69	95.00	54.00	41.00 Average
2	2483.500	5.60	28.67	41.91	48.13	40.49	54.00	-13.51 Average
3	2485.546	5.60	28.68	41.91	48.22	40.59	54.00	-13.41 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 61 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:High

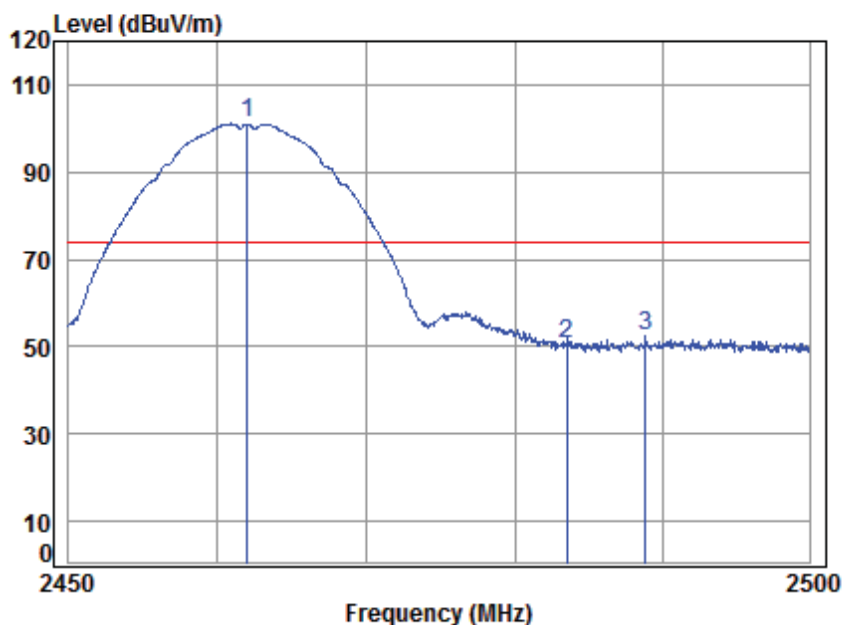

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	108.76	101.07	74.00	27.07	peak
2	2483.500	5.60	28.67	41.91	58.22	50.58	74.00	-23.42	peak
3	2488.863	5.61	28.68	41.91	59.87	52.25	74.00	-21.75	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 62 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:High

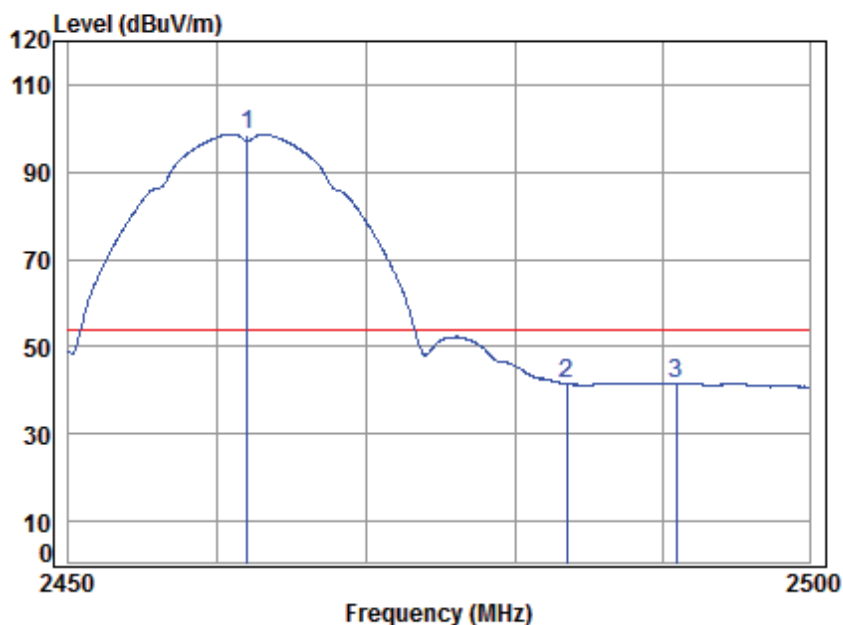

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	106.42	98.73	54.00	44.73 Average
2	2483.500	5.60	28.67	41.91	49.06	41.42	54.00	-12.58 Average
3	2490.976	5.61	28.69	41.91	49.26	41.65	54.00	-12.35 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 63 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:Low

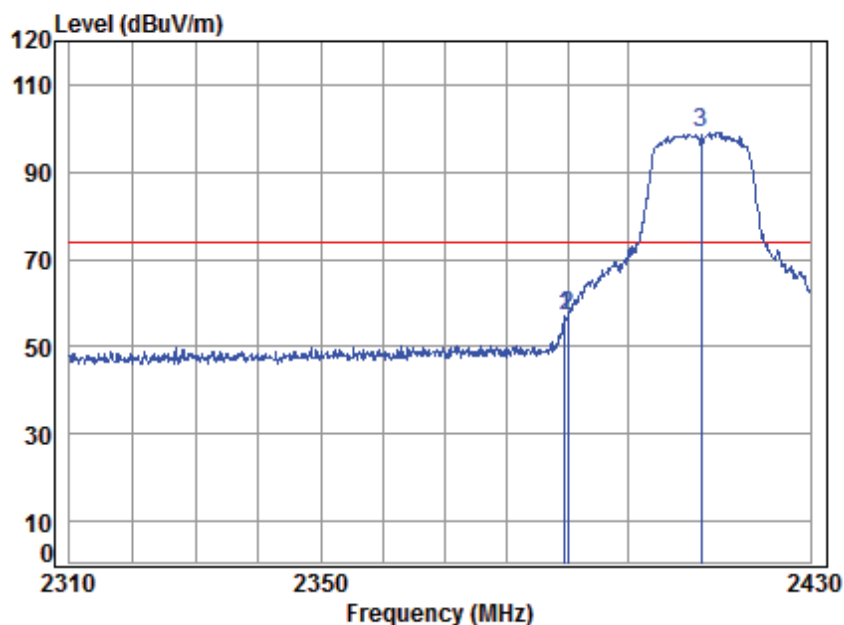

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.605	5.47	28.52	41.87	65.12	57.24	74.00	-16.76	peak
2	2390.000	5.47	28.52	41.87	64.70	56.82	74.00	-17.18	peak
3 *	2412.000	5.50	28.56	41.88	107.06	99.24	74.00	25.24	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 64 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:Low

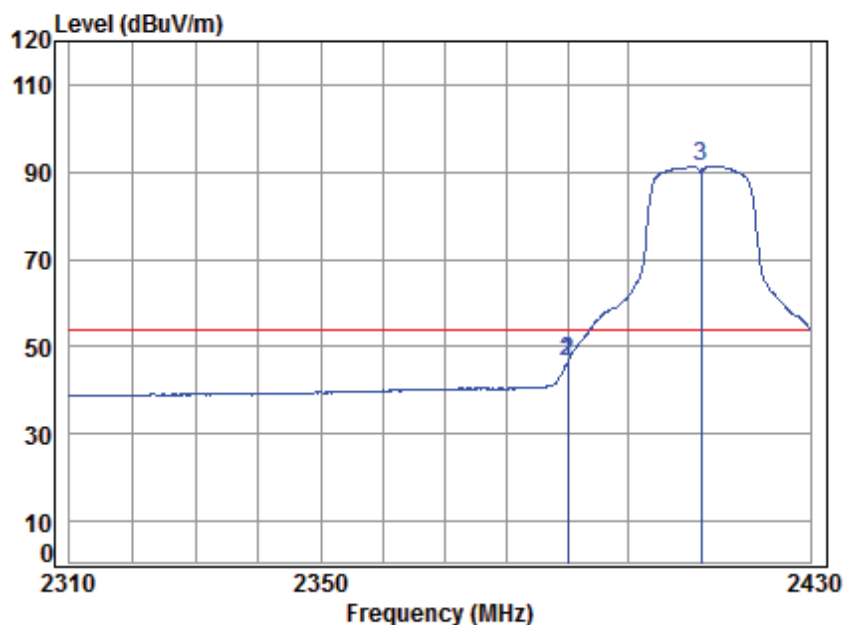

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	5.47	28.52	41.87	54.34	46.46	54.00	-7.54	Average
2	2390.000	5.47	28.52	41.87	54.34	46.46	54.00	-7.54	Average
3 *	2412.000	5.50	28.56	41.88	99.12	91.30	54.00	37.30	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 65 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:Low

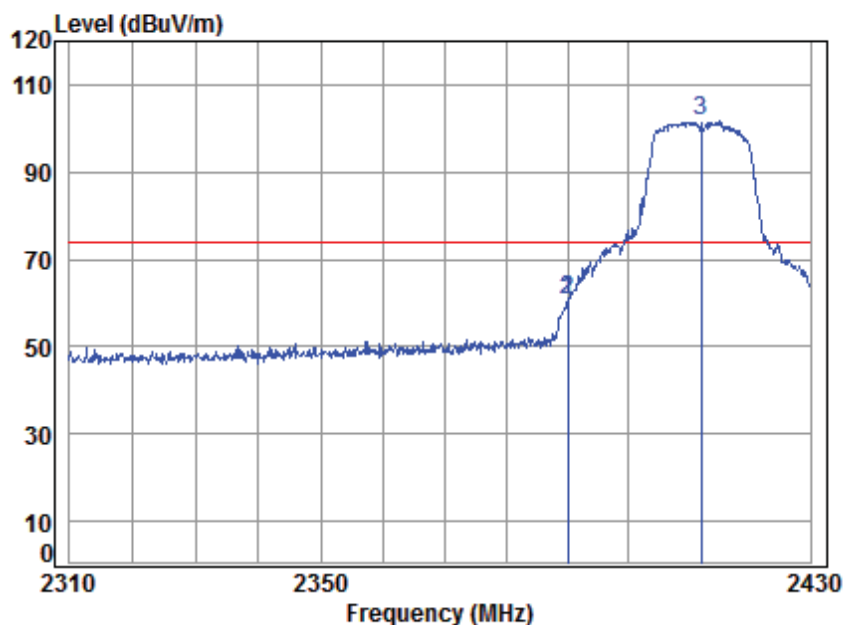

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	5.47	28.52	41.87	68.56	60.68	74.00	-13.32	peak
2	2390.000	5.47	28.52	41.87	68.56	60.68	74.00	-13.32	peak
3 *	2412.000	5.50	28.56	41.88	109.38	101.56	74.00	27.56	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 66 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:Low

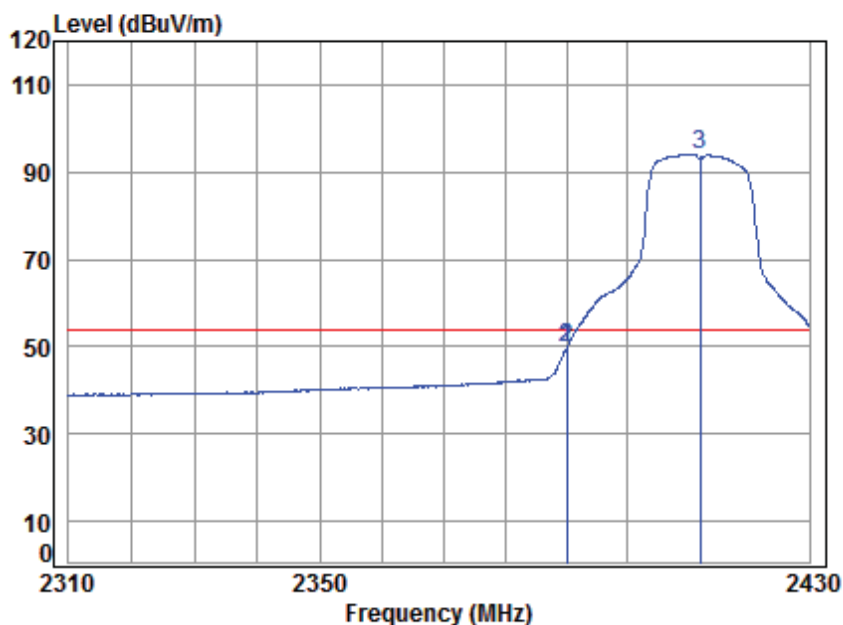

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	5.47	28.52	41.87	57.62	49.74	54.00	-4.26	Average
2	2390.000	5.47	28.52	41.87	57.62	49.74	54.00	-4.26	Average
3 *	2412.000	5.50	28.56	41.88	101.79	93.97	54.00	39.97	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 67 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:High

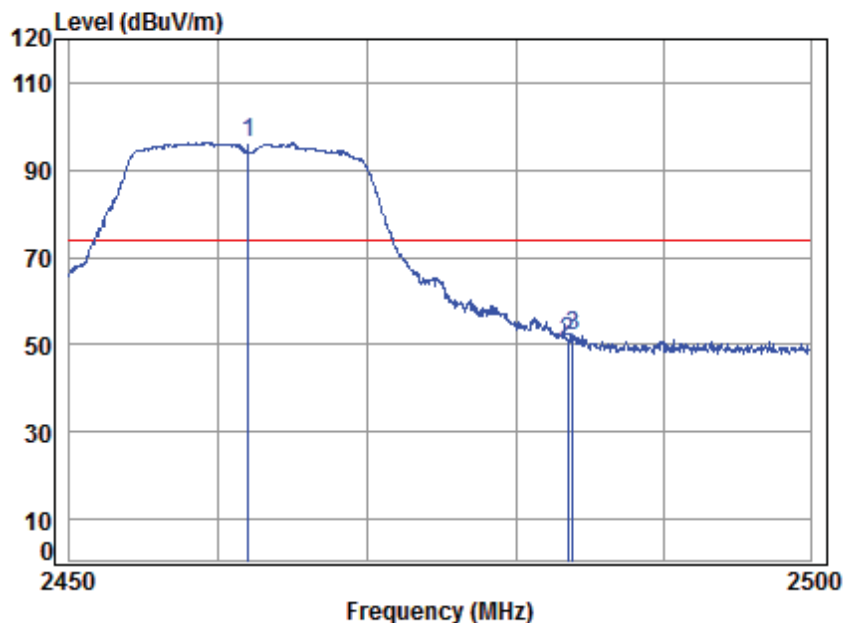

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	103.92	96.23	74.00	22.23 peak
2	2483.500	5.60	28.67	41.91	58.39	50.75	74.00	-23.25 peak
3	2483.890	5.60	28.67	41.91	59.83	52.19	74.00	-21.81 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 68 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:High

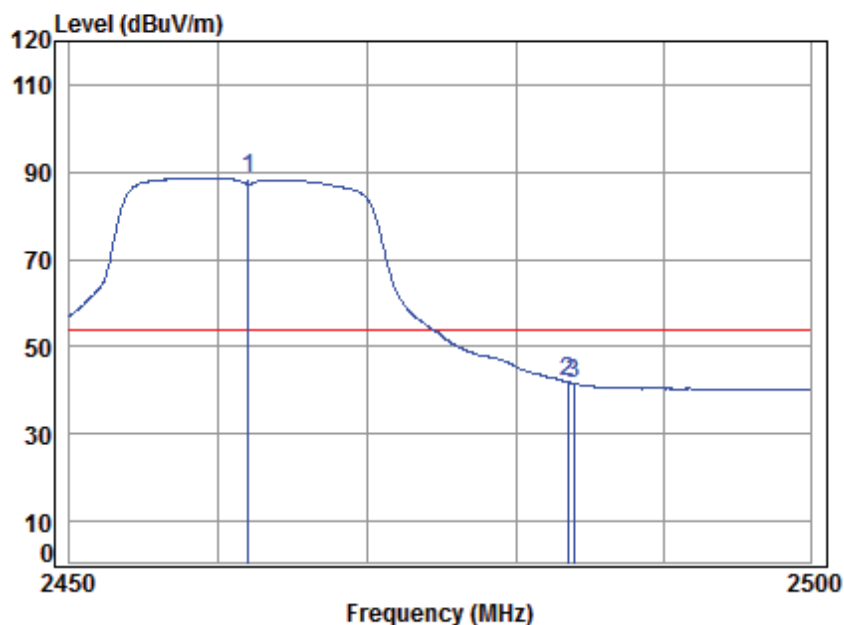

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	96.23	88.54	54.00	34.54	Average
2	2483.500	5.60	28.67	41.91	49.58	41.94	54.00	-12.06	Average
3	2483.940	5.60	28.67	41.91	49.28	41.64	54.00	-12.36	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 69 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:High

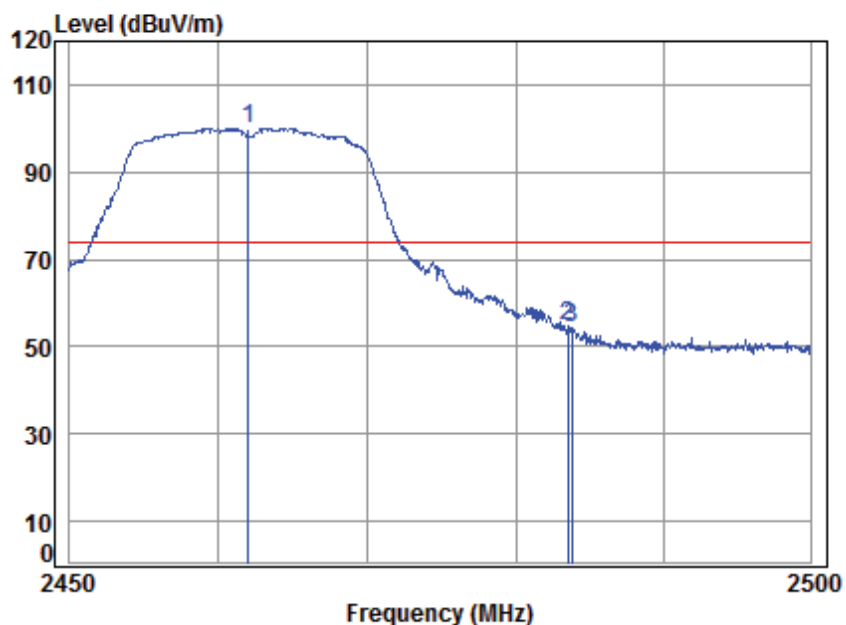

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	107.79	100.10	74.00	26.10 peak
2	2483.500	5.60	28.67	41.91	62.59	54.95	74.00	-19.05 peak
3	2483.790	5.60	28.67	41.91	61.88	54.24	74.00	-19.76 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 70 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:High

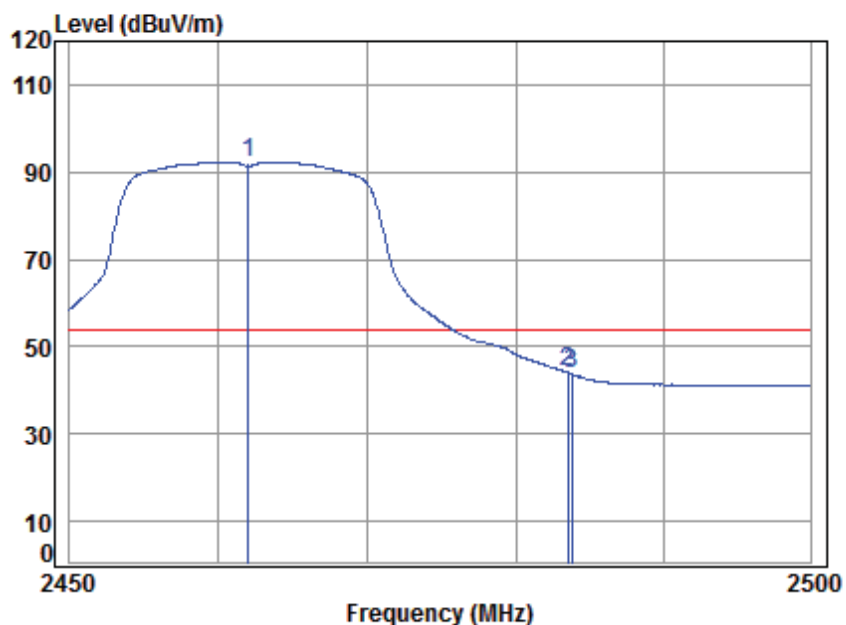

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	100.04	92.35	54.00	38.35	Average
2	2483.500	5.60	28.67	41.91	51.69	44.05	54.00	-9.95	Average
3	2483.790	5.60	28.67	41.91	51.30	43.66	54.00	-10.34	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 71 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:Low

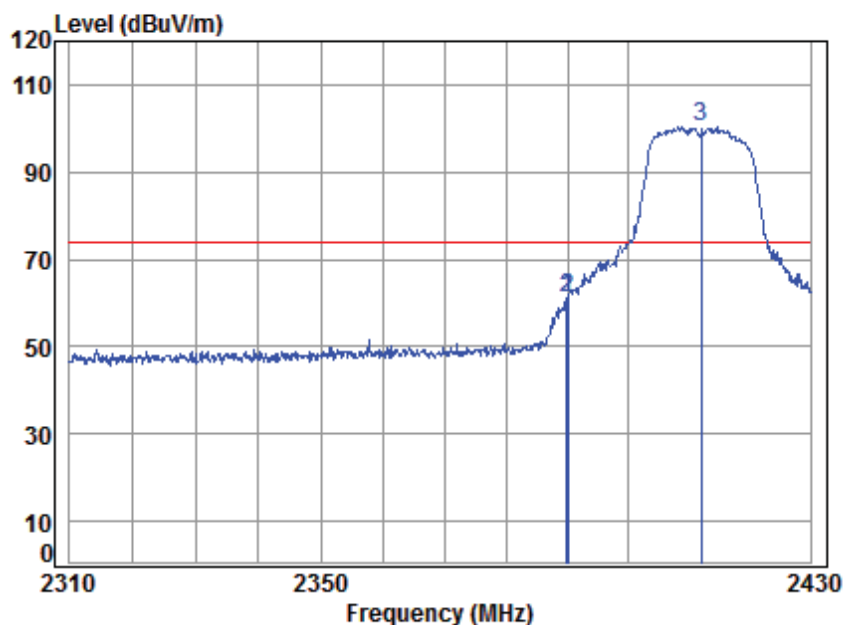

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.847	5.47	28.52	41.87	69.20	61.32	74.00	-12.68	peak
2	2390.000	5.47	28.52	41.87	69.14	61.26	74.00	-12.74	peak
3 *	2412.000	5.50	28.56	41.88	108.28	100.46	74.00	26.46	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 72 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:Low

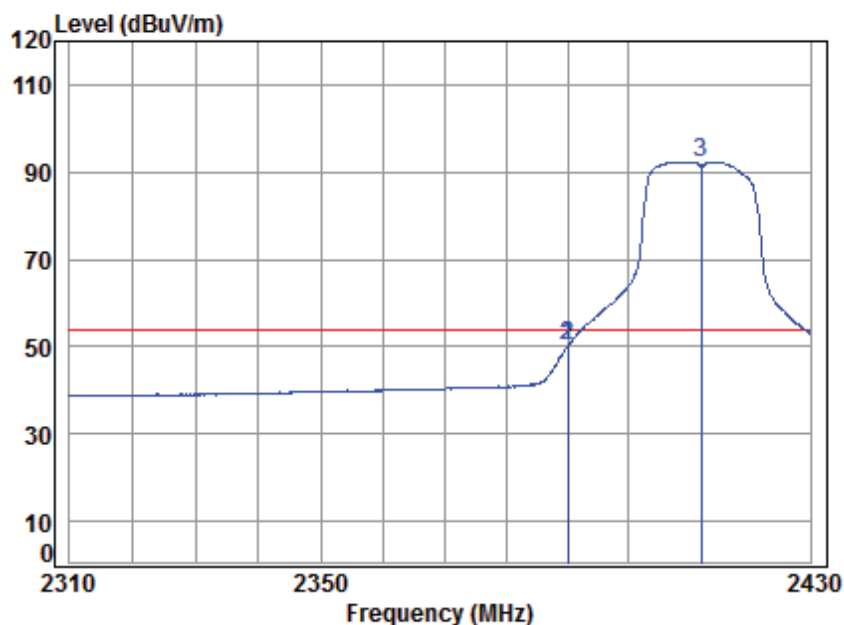

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	5.47	28.52	41.87	57.91	50.03	54.00	-3.97	Average
2	2390.000	5.47	28.52	41.87	57.91	50.03	54.00	-3.97	Average
3 *	2412.000	5.50	28.56	41.88	100.20	92.38	54.00	38.38	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 73 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:Low

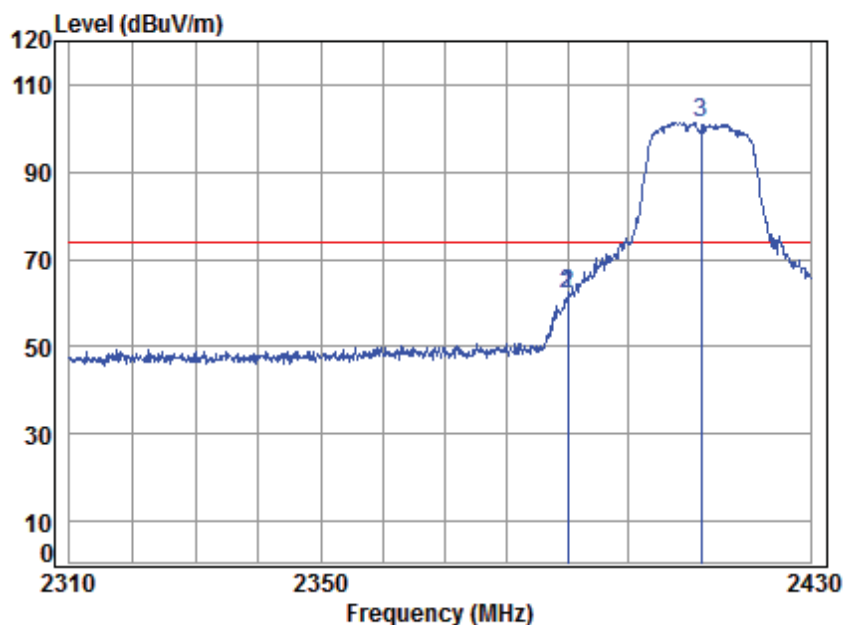

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	5.47	28.52	41.87	69.97	62.09	74.00	-11.91	peak
2	2390.000	5.47	28.52	41.87	69.97	62.09	74.00	-11.91	peak
3 *	2412.000	5.50	28.56	41.88	109.31	101.49	74.00	27.49	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 74 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:Low

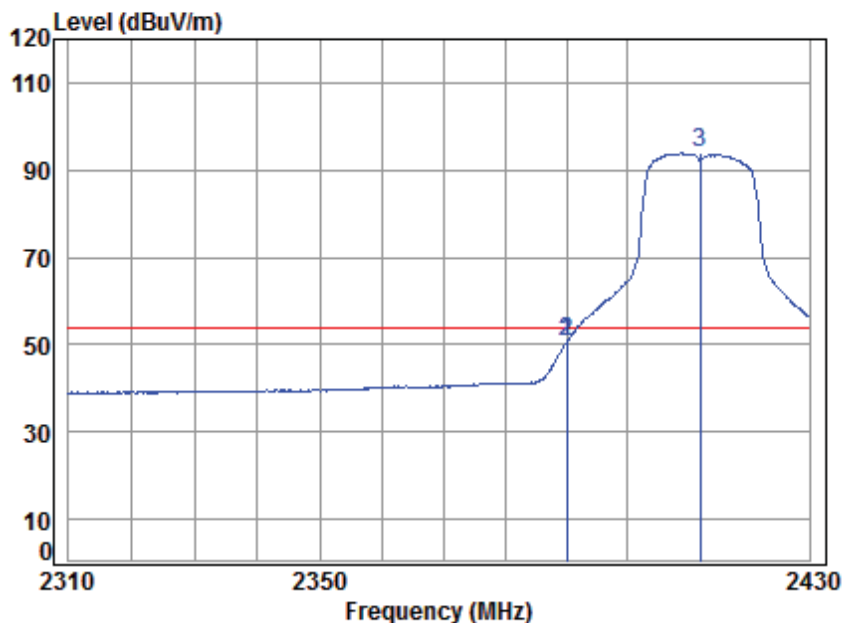

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	5.47	28.52	41.87	58.40	50.52	54.00	-3.48	Average
2	2390.000	5.47	28.52	41.87	58.40	50.52	54.00	-3.48	Average
3 *	2412.000	5.50	28.56	41.88	101.60	93.78	54.00	39.78	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 75 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:High

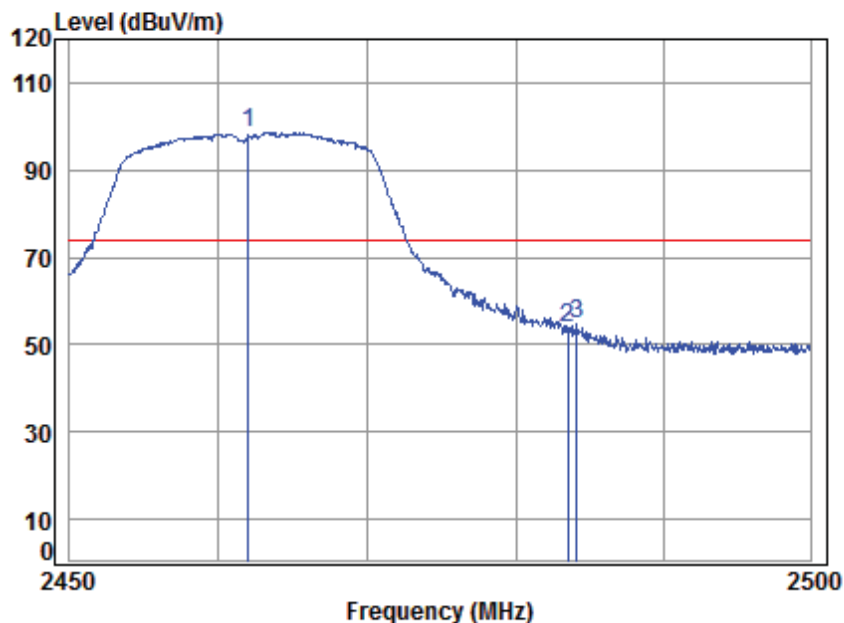

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16.5

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	106.34	98.65	74.00	24.65 peak
2	2483.500	5.60	28.67	41.91	61.39	53.75	74.00	-20.25 peak
3	2484.141	5.60	28.67	41.91	62.28	54.64	74.00	-19.36 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 76 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:High

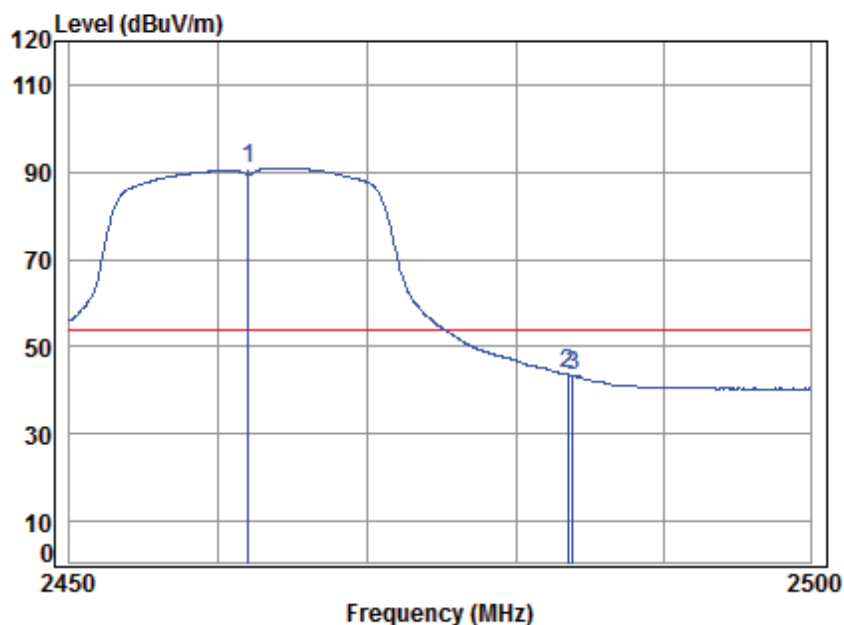

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	98.58	90.89	54.00	36.89	Average
2	2483.500	5.60	28.67	41.91	51.25	43.61	54.00	-10.39	Average
3	2483.840	5.60	28.67	41.91	51.06	43.42	54.00	-10.58	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 77 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:High

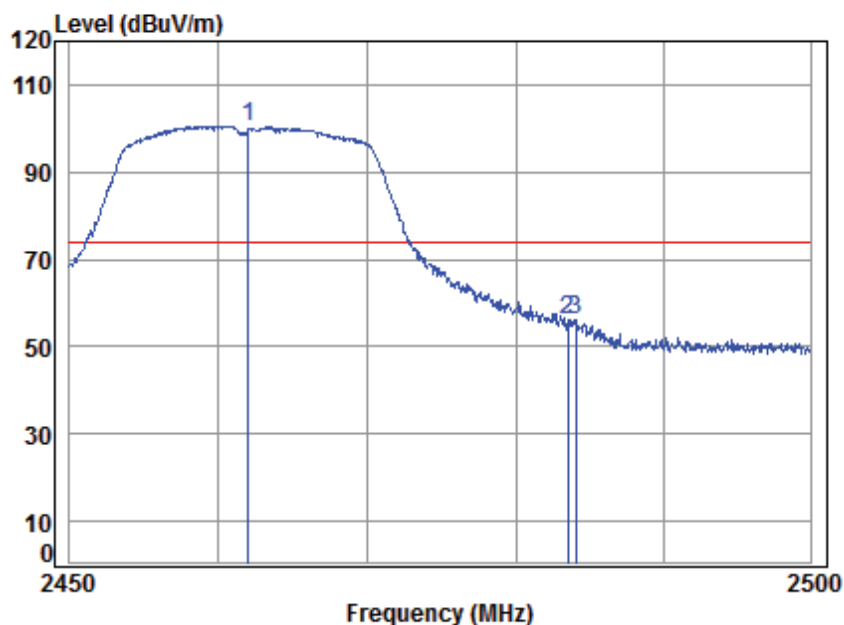

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16.5

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	108.25	100.56	74.00	26.56 peak
2	2483.500	5.60	28.67	41.91	63.72	56.08	74.00	-17.92 peak
3	2484.041	5.60	28.67	41.91	63.80	56.16	74.00	-17.84 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 78 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:High

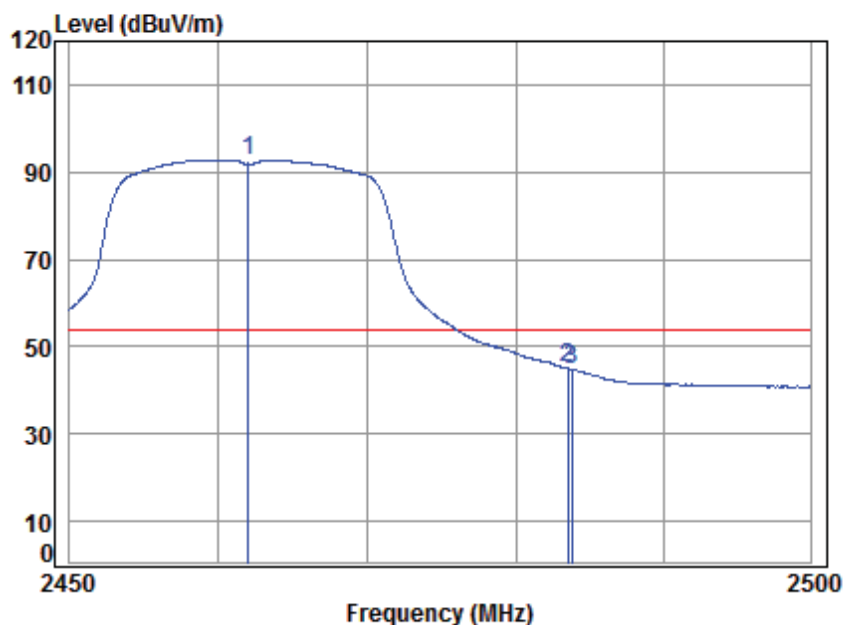

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16.5


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	100.47	92.78	54.00	38.78	Average
2	2483.500	5.60	28.67	41.91	52.59	44.95	54.00	-9.05	Average
3	2483.790	5.60	28.67	41.91	52.43	44.79	54.00	-9.21	Average



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401
Page: 79 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:Low

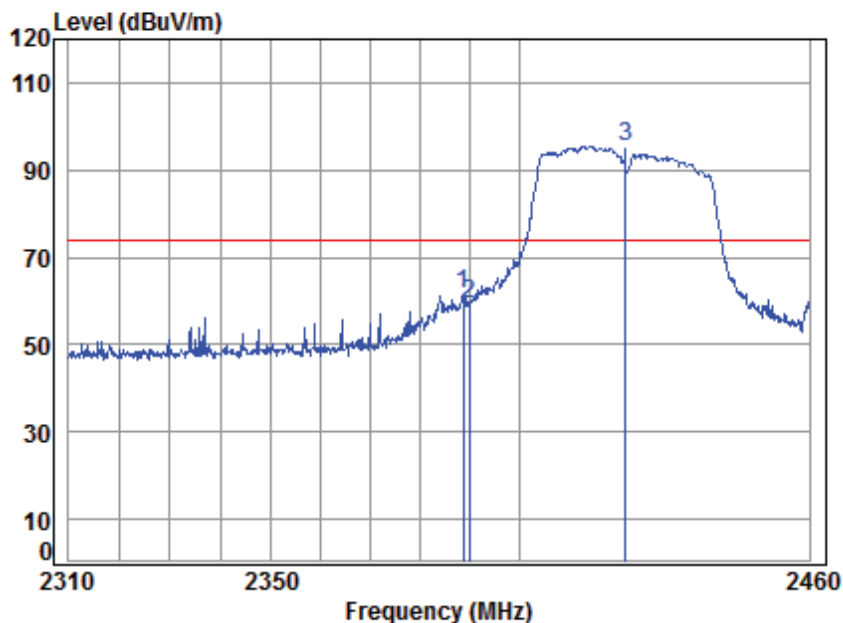

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2422 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 14.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2388.775	5.47	28.52	41.87	69.54	61.66	74.00	-12.34	peak
2	2390.000	5.47	28.52	41.87	66.99	59.11	74.00	-14.89	peak
3 *	2422.000	5.52	28.57	41.89	103.36	95.56	74.00	21.56	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 80 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:Low

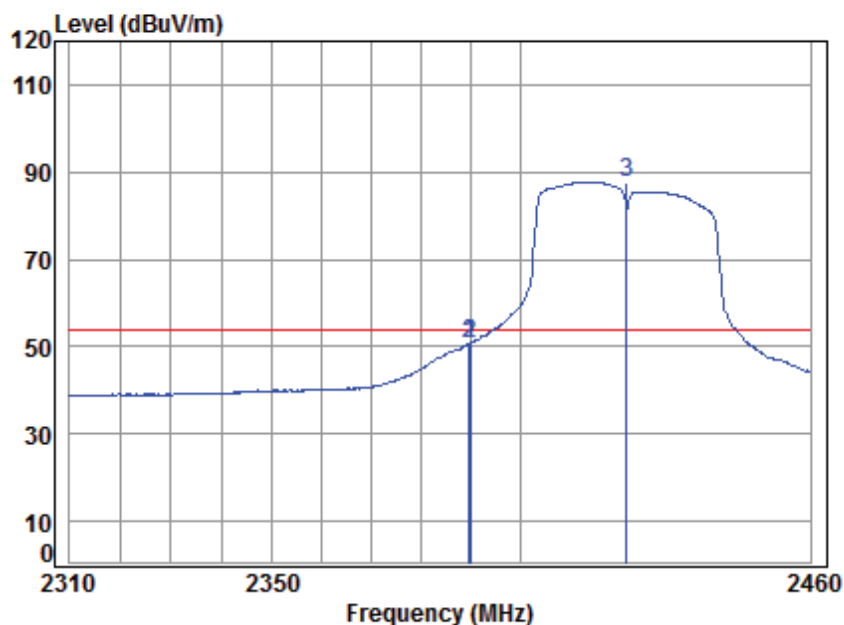

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2422 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 14.5


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.827	5.47	28.52	41.87	58.62	50.74	54.00	-3.26	Average
2	2390.000	5.47	28.52	41.87	58.62	50.74	54.00	-3.26	Average
3 *	2422.000	5.52	28.57	41.89	95.58	87.78	54.00	33.78	Average



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401
Page: 81 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:Low

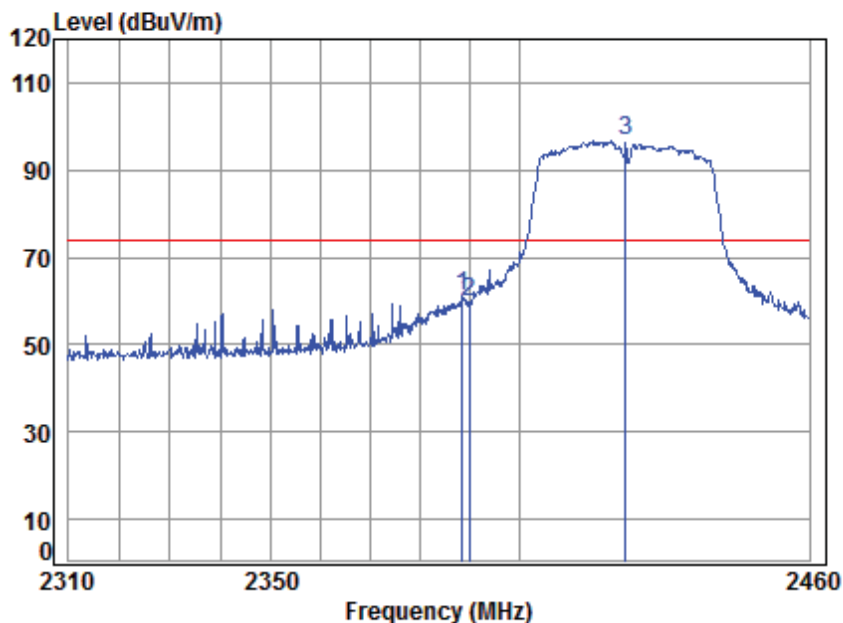

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2422 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 14.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2388.625	5.47	28.52	41.87	68.80	60.92	74.00	-13.08	peak
2	2390.000	5.47	28.52	41.87	67.54	59.66	74.00	-14.34	peak
3 *	2422.000	5.52	28.57	41.89	104.45	96.65	74.00	22.65	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 82 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:Low

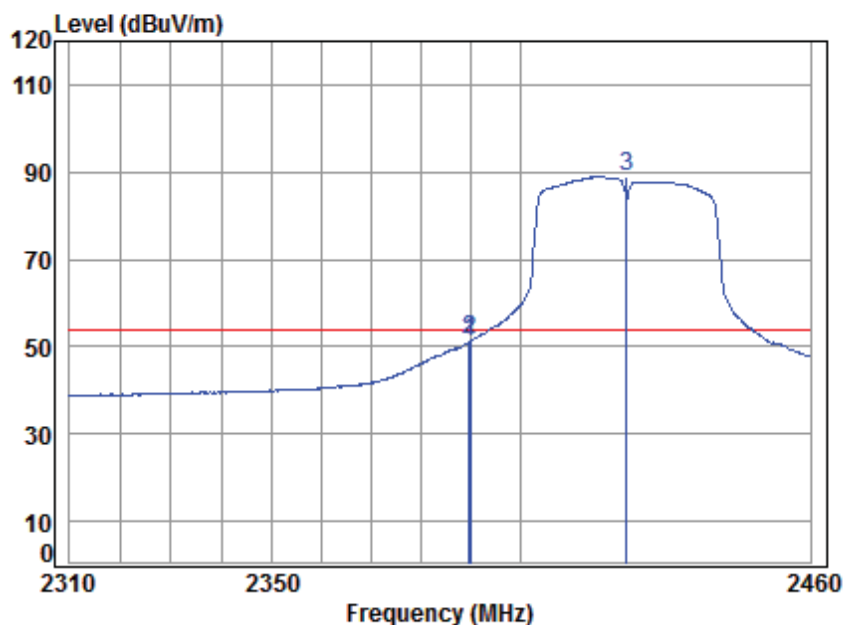

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2422 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 14.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.827	5.47	28.52	41.87	59.03	51.15	54.00	-2.85	Average
2	2390.000	5.47	28.52	41.87	59.25	51.37	54.00	-2.63	Average
3 *	2422.000	5.52	28.57	41.89	96.63	88.83	54.00	34.83	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 83 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:High

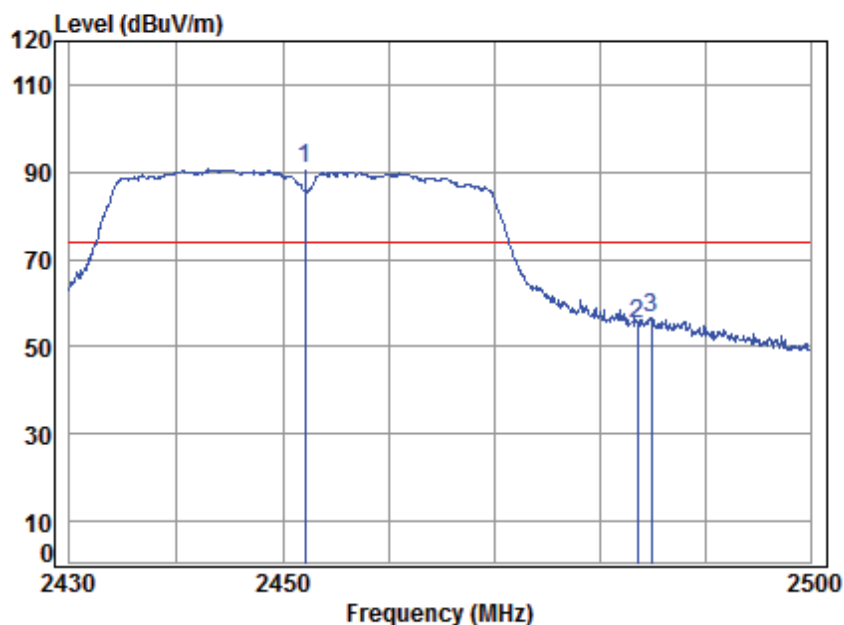

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2452 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 16.5

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2452.000	5.56	28.62	41.90	98.29	90.57	74.00	16.57 peak
2	2483.500	5.60	28.67	41.91	62.90	55.26	74.00	-18.74 peak
3	2484.782	5.60	28.68	41.91	64.17	56.54	74.00	-17.46 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 84 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:High

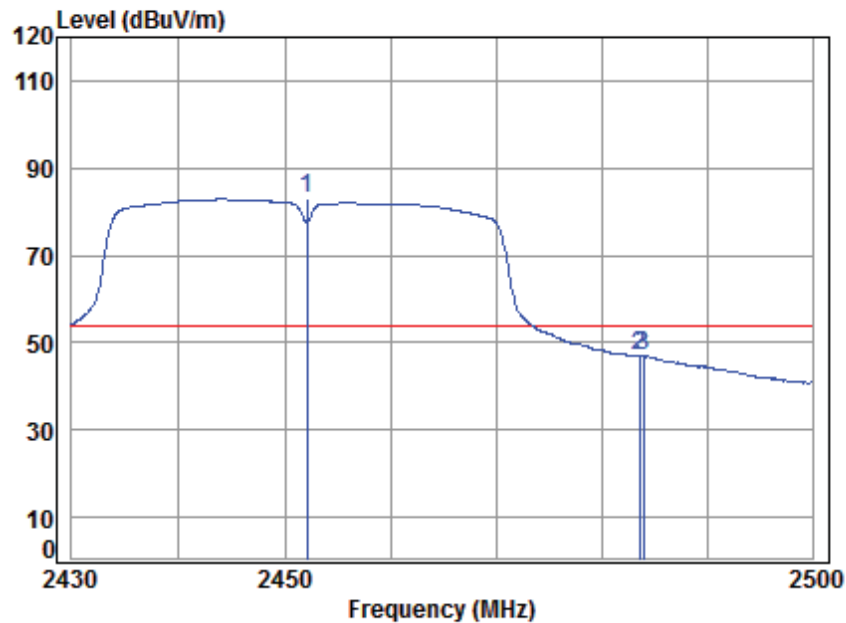

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2452 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2452.000	5.56	28.62	41.90	90.62	82.90	54.00	28.90	Average
2	2483.500	5.60	28.67	41.91	54.47	46.83	54.00	-7.17	Average
3	2483.865	5.60	28.67	41.91	54.51	46.87	54.00	-7.13	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 85 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:High

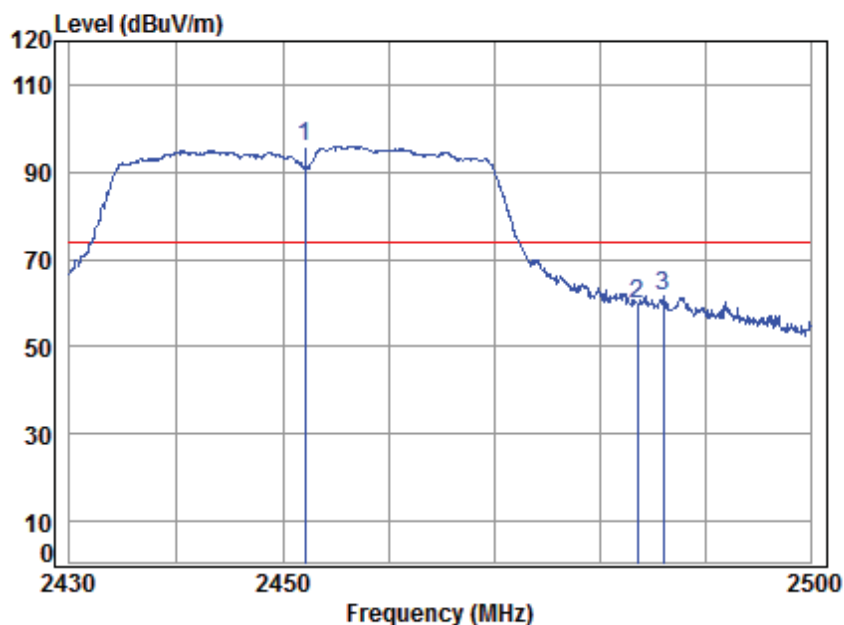

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2452 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 16.5

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2452.000	5.56	28.62	41.90	103.73	96.01	74.00	22.01 peak
2	2483.500	5.60	28.67	41.91	67.50	59.86	74.00	-14.14 peak
3	2485.911	5.60	28.68	41.91	69.32	61.69	74.00	-12.31 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 86 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:High

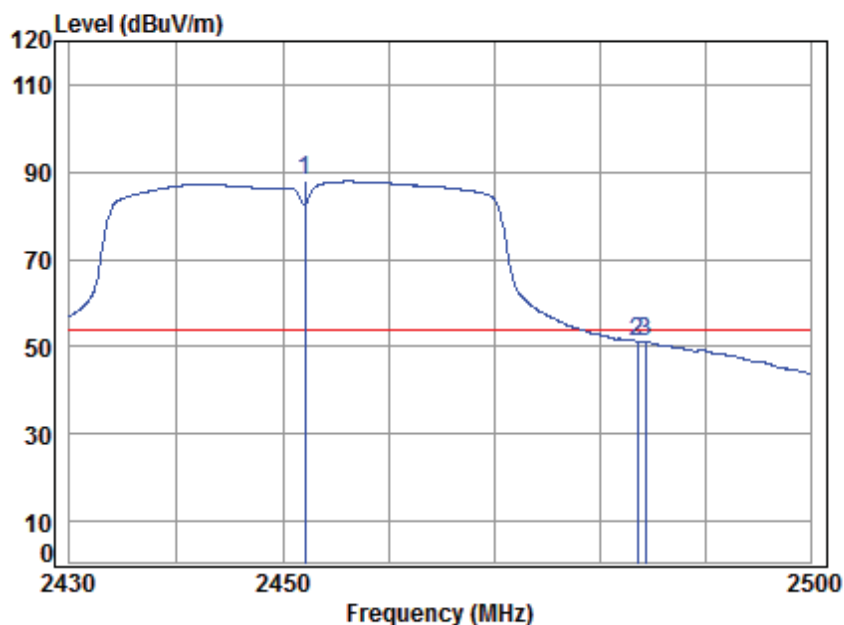

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2452 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2452.000	5.56	28.62	41.90	95.60	87.88	54.00	33.88	Average
2	2483.500	5.60	28.67	41.91	58.89	51.25	54.00	-2.75	Average
3	2484.217	5.60	28.67	41.91	58.93	51.29	54.00	-2.71	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 87 of 346

Test data for Antenna3:

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:Low

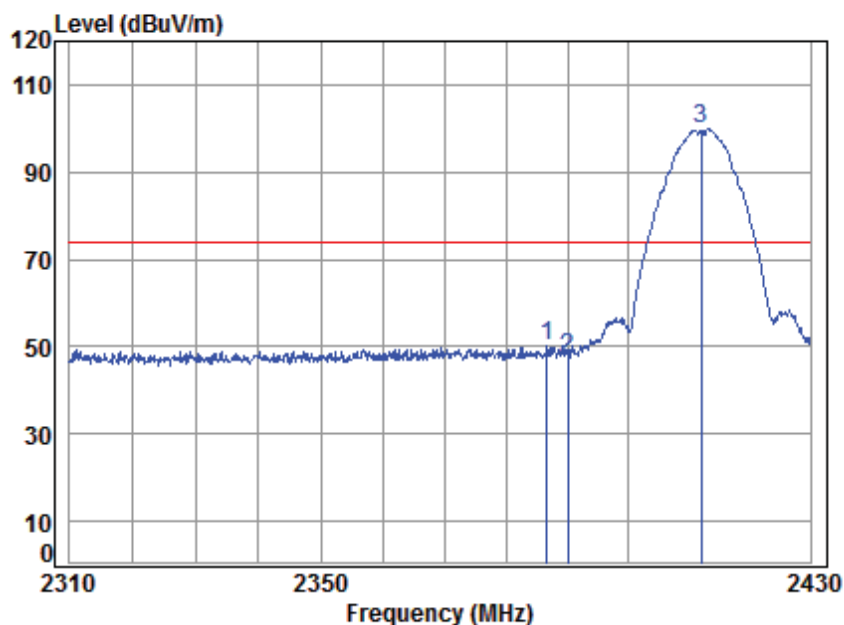

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2386.703	5.47	28.51	41.87	57.88	49.99	74.00	-24.01	peak
2	2390.000	5.47	28.52	41.87	55.15	47.27	74.00	-26.73	peak
3 *	2412.000	5.50	28.56	41.88	107.62	99.80	74.00	25.80	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 88 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:Low

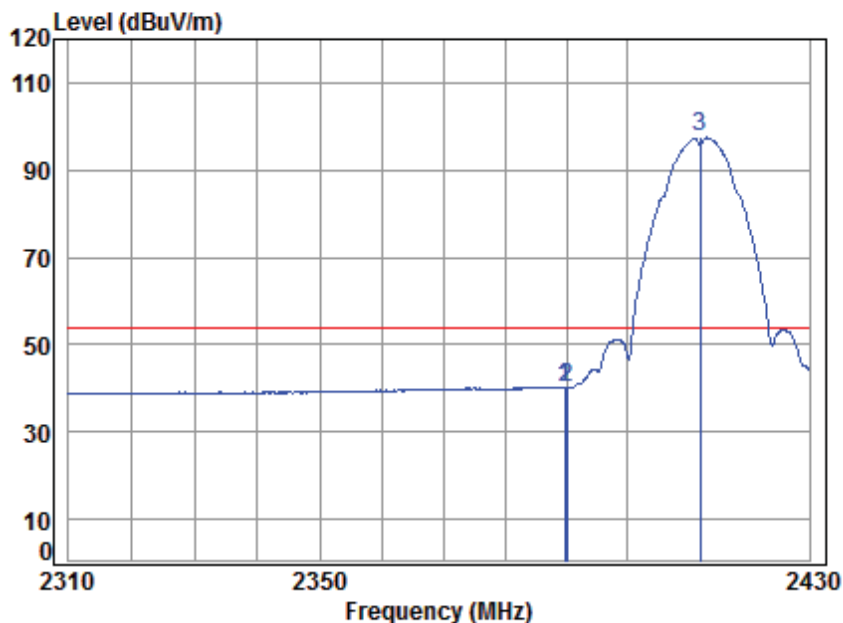

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.726	5.47	28.52	41.87	48.07	40.19	54.00	-13.81	Average
2	2390.000	5.47	28.52	41.87	47.99	40.11	54.00	-13.89	Average
3 *	2412.000	5.50	28.56	41.88	105.24	97.42	54.00	43.42	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 89 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:Low

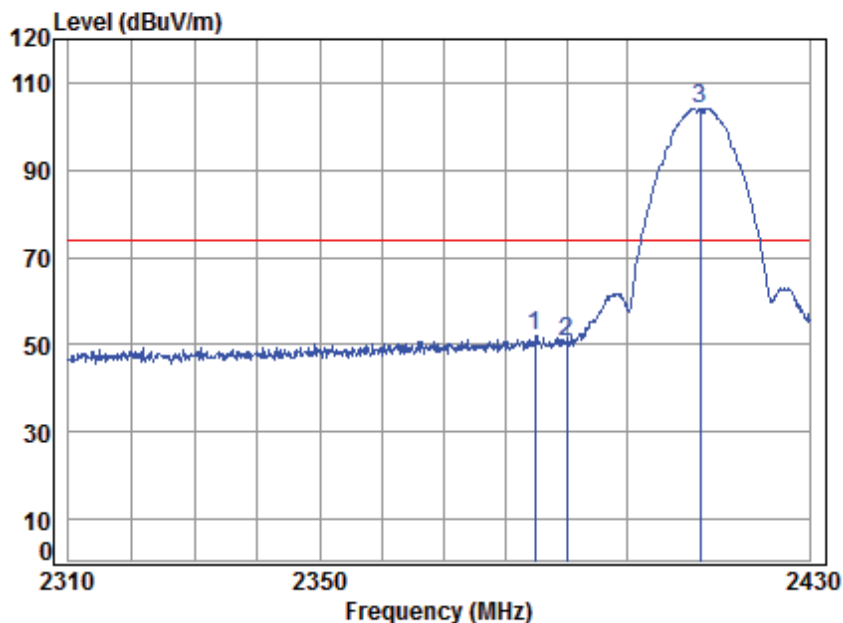

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2384.769	5.47	28.51	41.87	59.92	52.03	74.00	-21.97	peak
2	2390.000	5.47	28.52	41.87	58.36	50.48	74.00	-23.52	peak
3 *	2412.000	5.50	28.56	41.88	112.00	104.18	74.00	30.18	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 90 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:Low

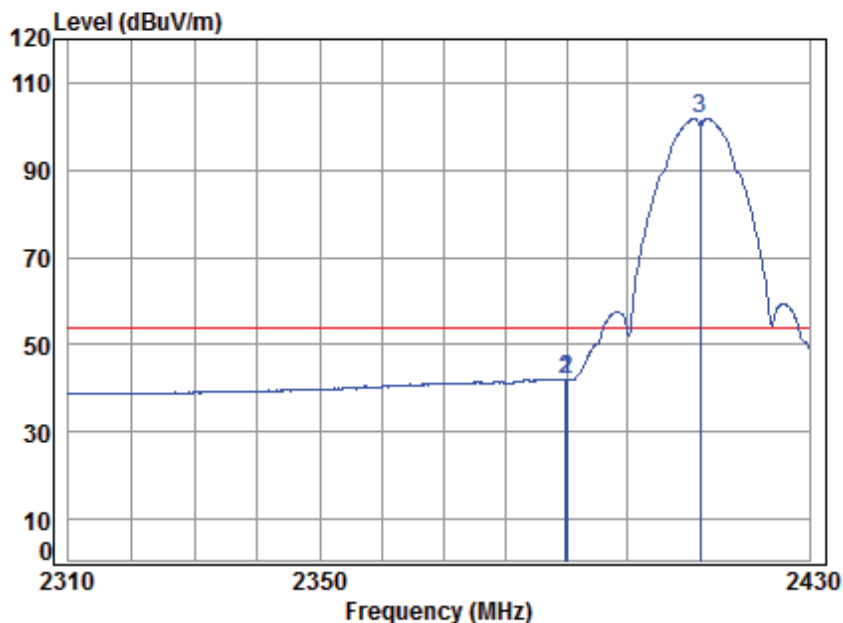

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2389.847	5.47	28.52	41.87	50.01	42.13	54.00	-11.87 Average
2	2390.000	5.47	28.52	41.87	49.93	42.05	54.00	-11.95 Average
3 *	2412.000	5.50	28.56	41.88	109.57	101.75	54.00	47.75 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 91 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:High

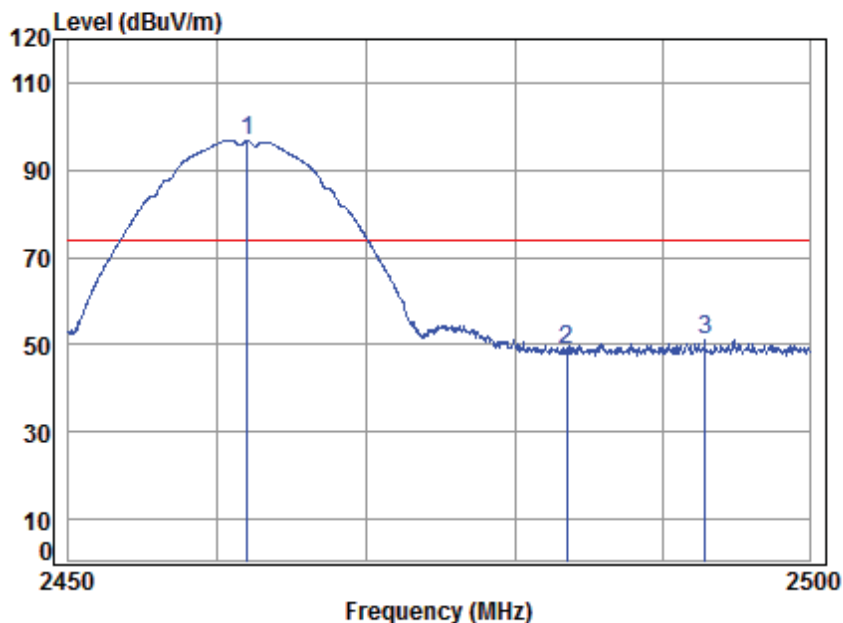

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	104.50	96.81	74.00	22.81 peak
2	2483.500	5.60	28.67	41.91	56.67	49.03	74.00	-24.97 peak
3	2492.889	5.61	28.69	41.91	58.60	50.99	74.00	-23.01 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 92 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:High

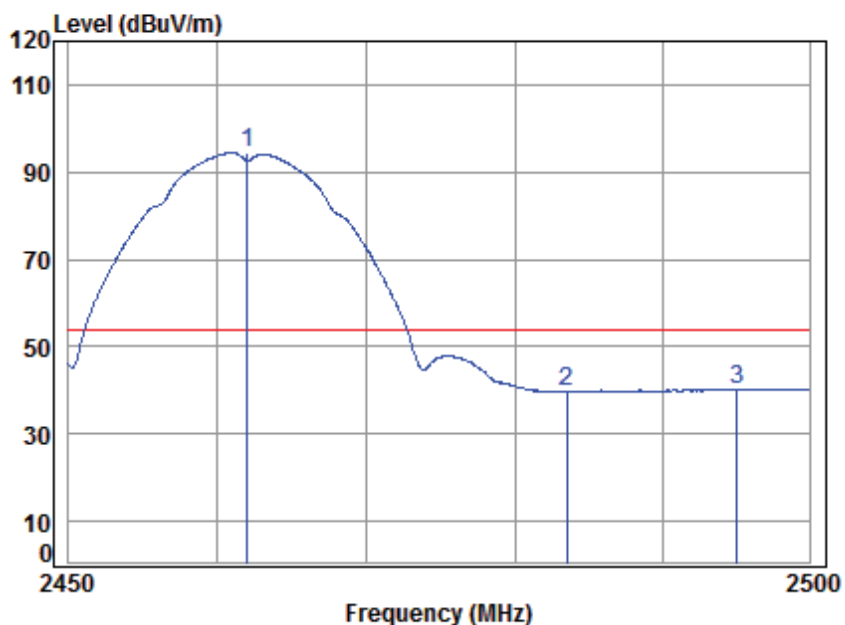

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	102.16	94.47	54.00	40.47 Average
2	2483.500	5.60	28.67	41.91	47.35	39.71	54.00	-14.29 Average
3	2495.055	5.61	28.69	41.92	47.84	40.22	54.00	-13.78 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 93 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:High

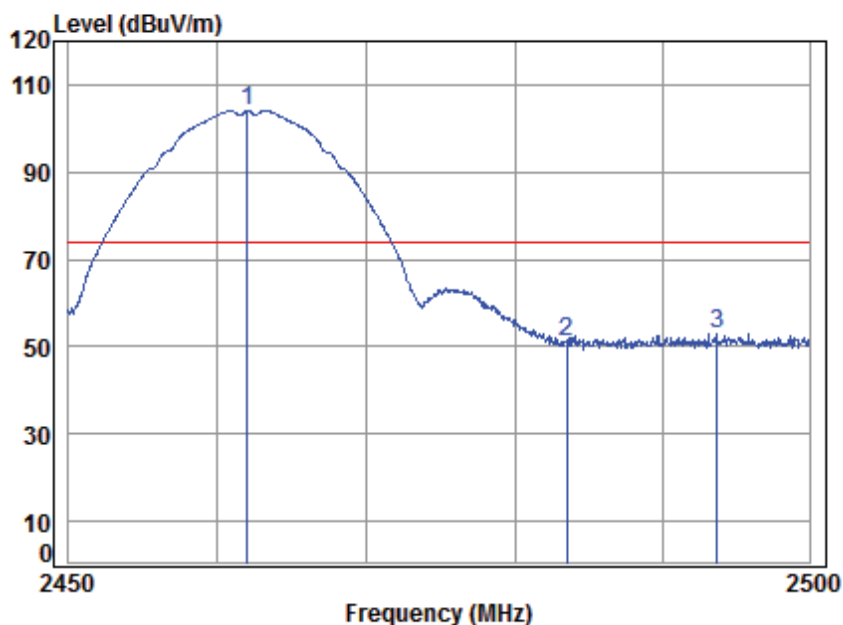

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	111.72	104.03	74.00	30.03 peak
2	2483.500	5.60	28.67	41.91	58.83	51.19	74.00	-22.81 peak
3	2493.695	5.61	28.69	41.91	60.43	52.82	74.00	-21.18 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 94 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:High

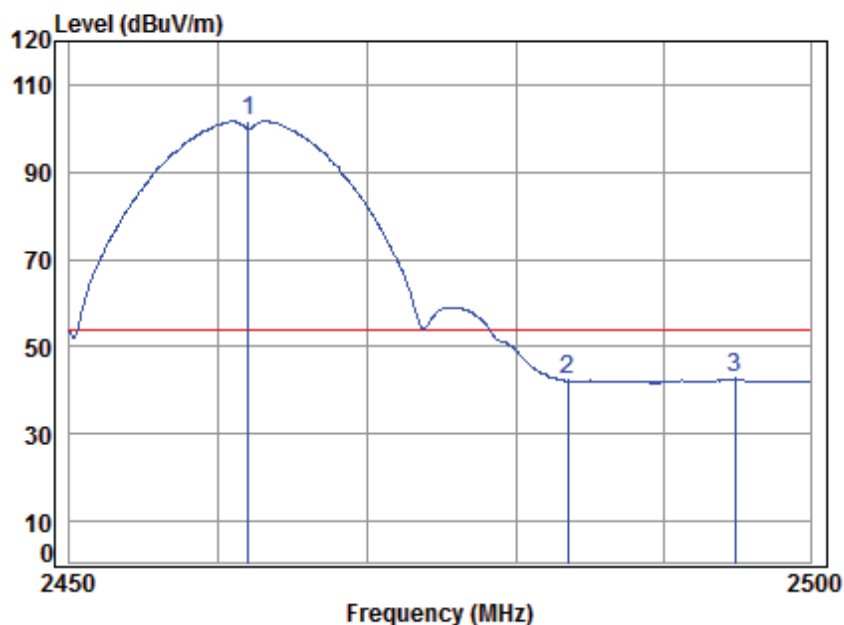

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	109.31	101.62	54.00	47.62 Average
2	2483.500	5.60	28.67	41.91	49.88	42.24	54.00	-11.76 Average
3	2494.904	5.61	28.69	41.92	50.30	42.68	54.00	-11.32 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 95 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:Low

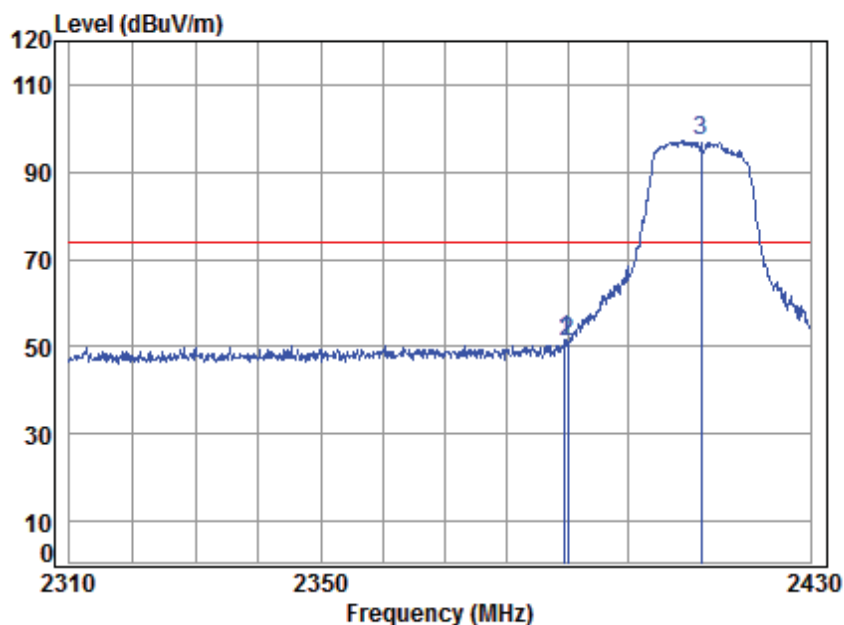

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.605	5.47	28.52	41.87	59.35	51.47	74.00	-22.53	peak
2	2390.000	5.47	28.52	41.87	58.85	50.97	74.00	-23.03	peak
3 *	2412.000	5.50	28.56	41.88	105.05	97.23	74.00	23.23	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 96 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:Low

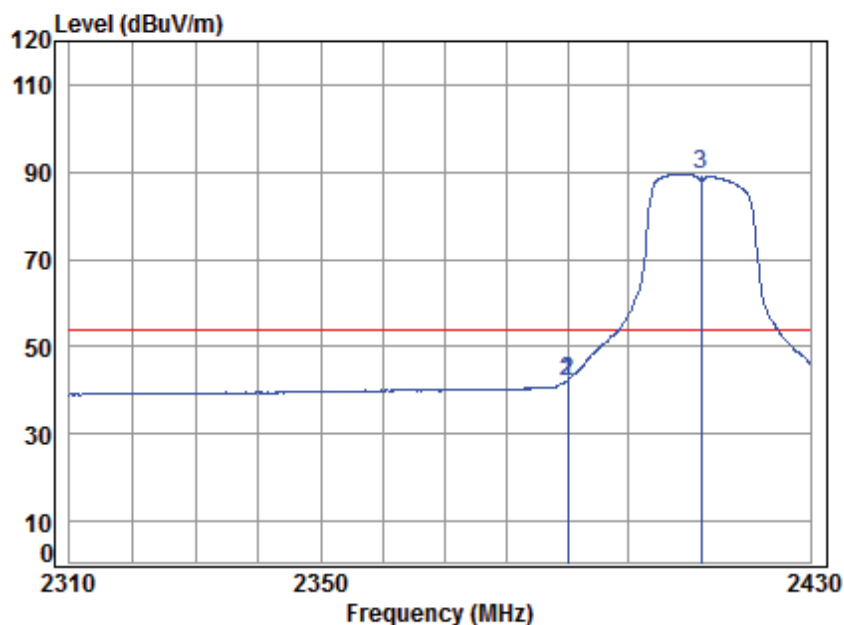

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	5.47	28.52	41.87	50.02	42.14	54.00	-11.86	Average
2	2390.000	5.47	28.52	41.87	50.02	42.14	54.00	-11.86	Average
3 *	2412.000	5.50	28.56	41.88	97.26	89.44	54.00	35.44	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 97 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:Low

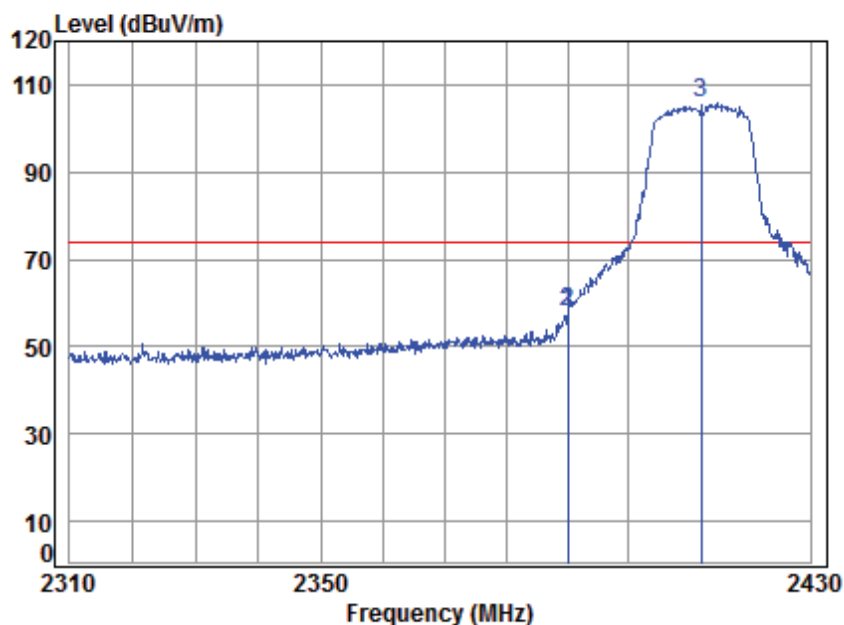

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	5.47	28.52	41.87	66.02	58.14	74.00	-15.86	peak
2	2390.000	5.47	28.52	41.87	66.02	58.14	74.00	-15.86	peak
3 *	2412.000	5.50	28.56	41.88	113.46	105.64	74.00	31.64	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 98 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:Low

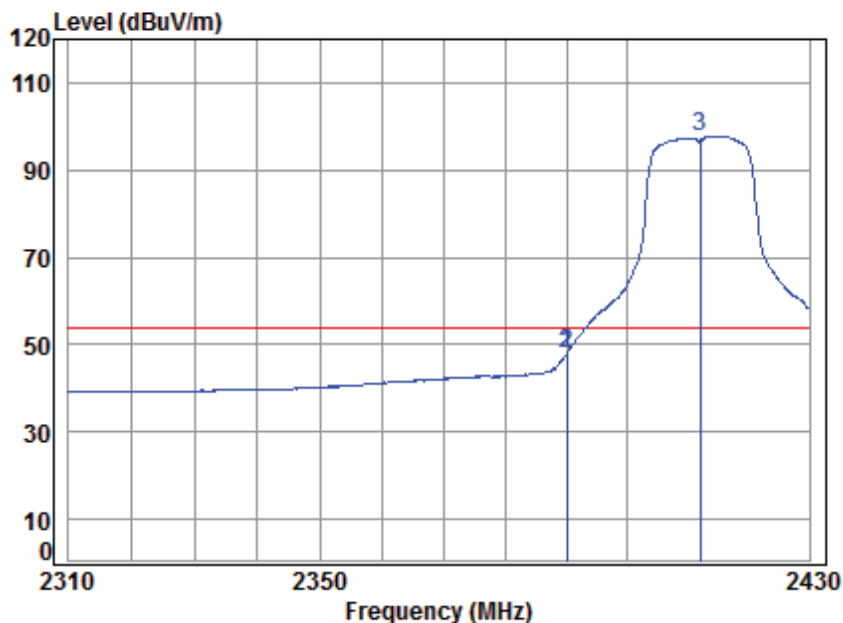

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	5.47	28.52	41.87	55.82	47.94	54.00	-6.06	Average
2	2390.000	5.47	28.52	41.87	55.82	47.94	54.00	-6.06	Average
3 *	2412.000	5.50	28.56	41.88	105.67	97.85	54.00	43.85	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 99 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:High

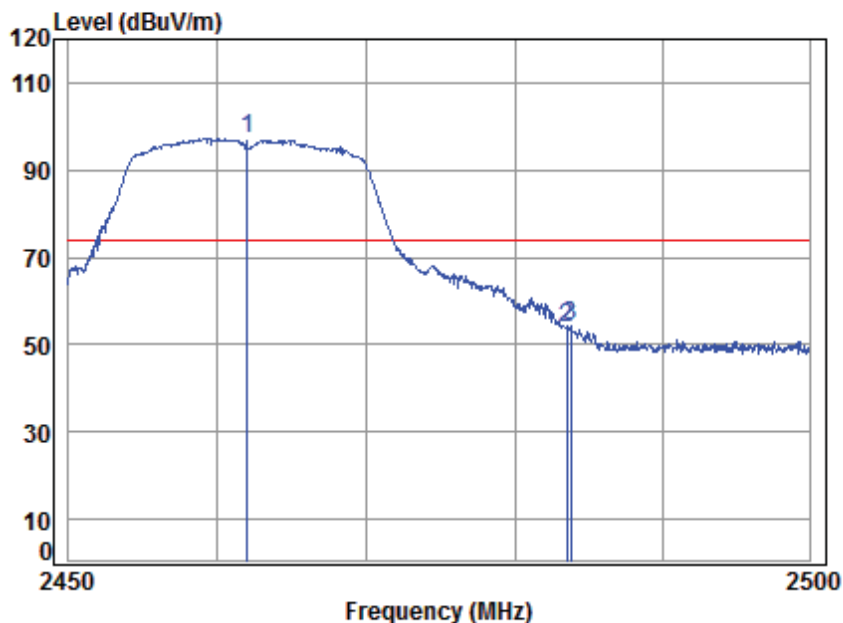

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	105.01	97.32	74.00	23.32	peak
2	2483.500	5.60	28.67	41.91	61.42	53.78	74.00	-20.22	peak
3	2483.790	5.60	28.67	41.91	61.97	54.33	74.00	-19.67	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 100 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:High

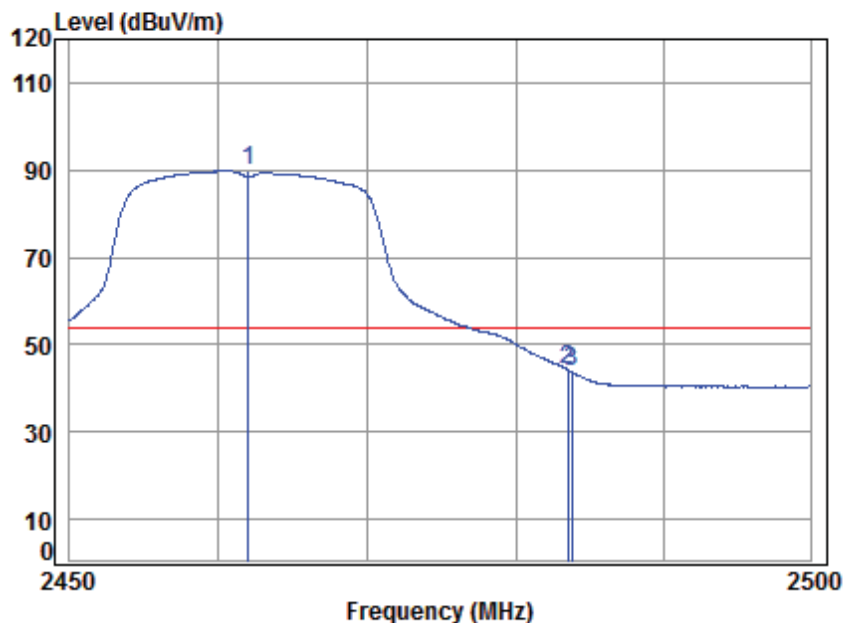

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	97.42	89.73	54.00	35.73	Average
2	2483.500	5.60	28.67	41.91	51.92	44.28	54.00	-9.72	Average
3	2483.790	5.60	28.67	41.91	51.26	43.62	54.00	-10.38	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 101 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:High

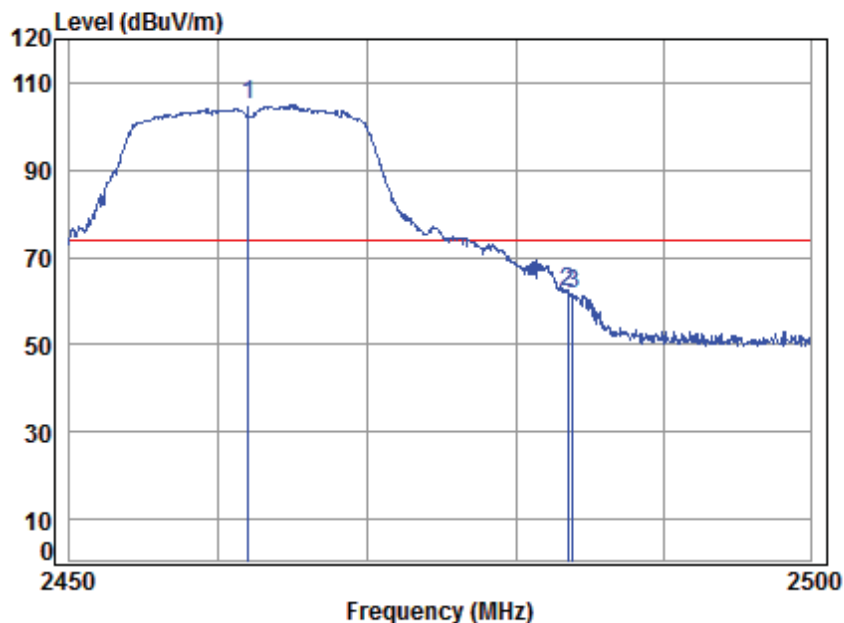

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	112.58	104.89	74.00	30.89 peak
2	2483.500	5.60	28.67	41.91	69.91	62.27	74.00	-11.73 peak
3	2483.890	5.60	28.67	41.91	69.24	61.60	74.00	-12.40 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 102 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:High

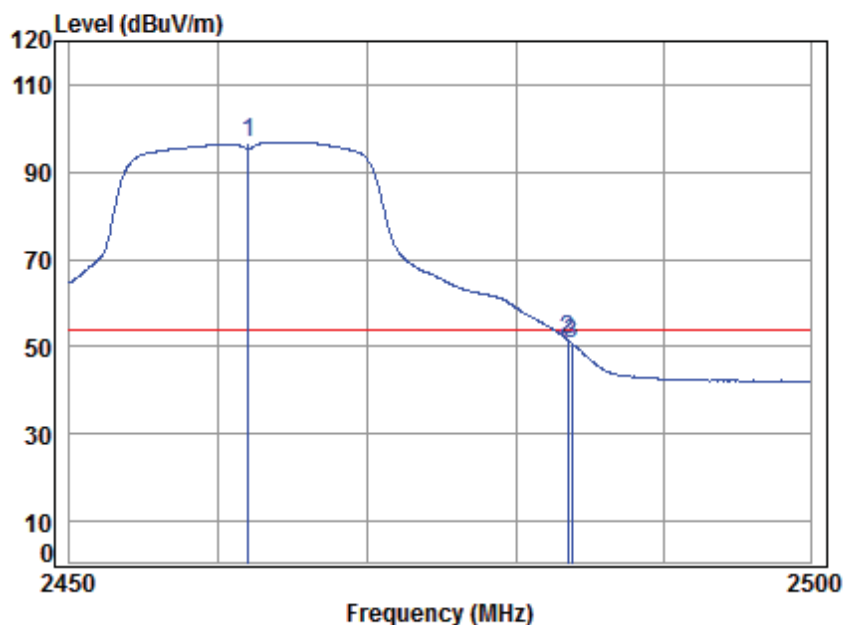

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	104.62	96.93	54.00	42.93	Average
2	2483.500	5.60	28.67	41.91	59.25	51.61	54.00	-2.39	Average
3	2483.790	5.60	28.67	41.91	58.37	50.73	54.00	-3.27	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 103 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:Low

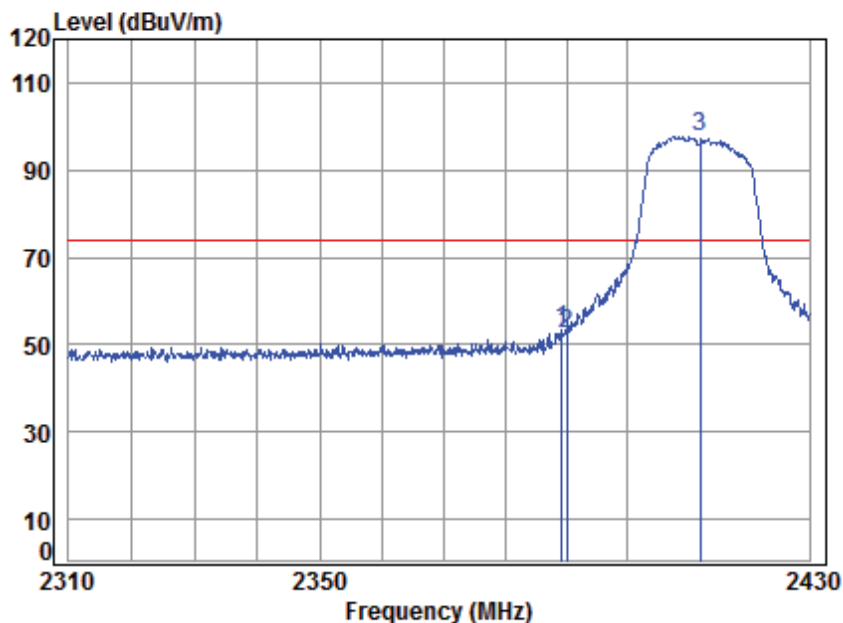

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.242	5.47	28.52	41.87	61.45	53.57	74.00	-20.43	peak
2	2390.000	5.47	28.52	41.87	60.47	52.59	74.00	-21.41	peak
3 *	2412.000	5.50	28.56	41.88	105.50	97.68	74.00	23.68	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 104 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:Low

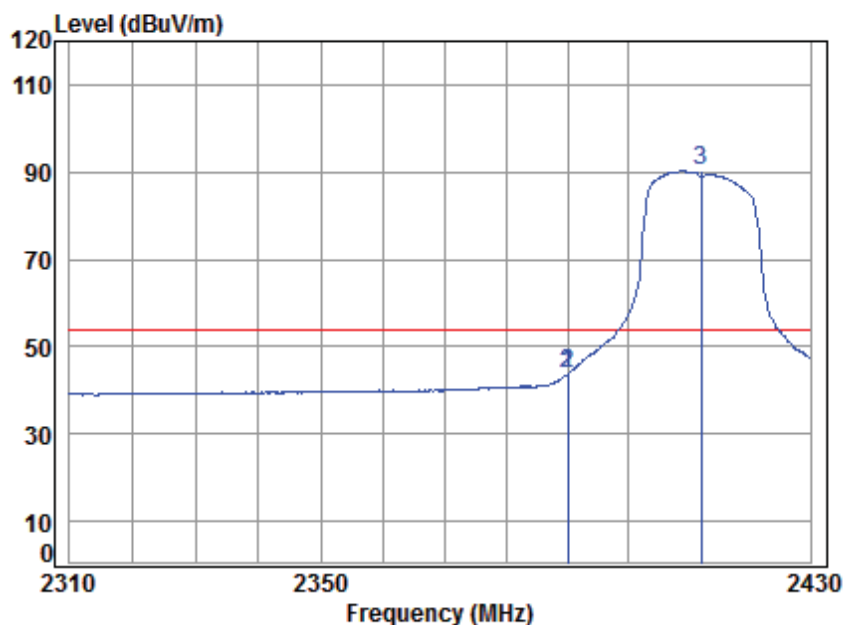

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	5.47	28.52	41.87	51.61	43.73	54.00	-10.27	Average
2	2390.000	5.47	28.52	41.87	51.61	43.73	54.00	-10.27	Average
3 *	2412.000	5.50	28.56	41.88	97.99	90.17	54.00	36.17	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 105 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:Low

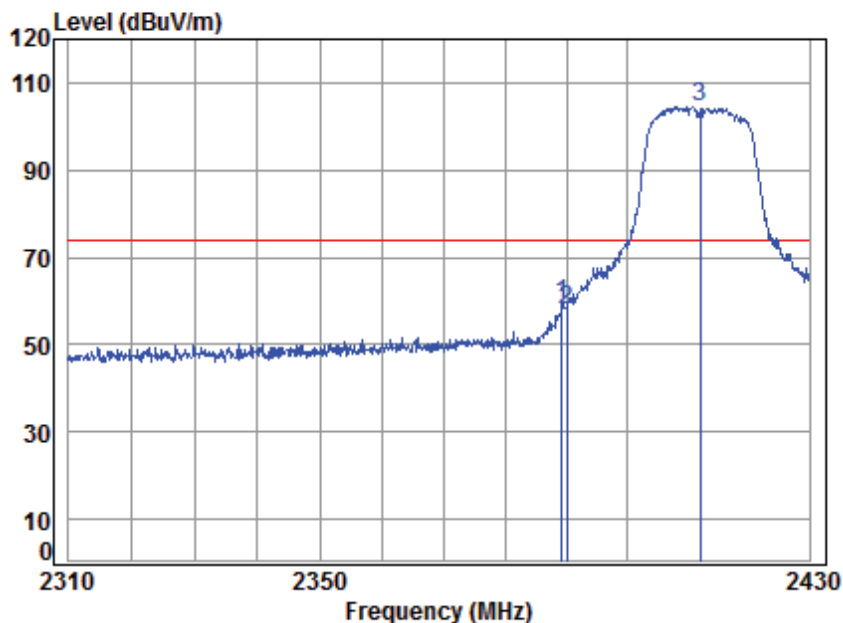

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.242	5.47	28.52	41.87	67.15	59.27	74.00	-14.73	peak
2	2390.000	5.47	28.52	41.87	65.92	58.04	74.00	-15.96	peak
3 *	2412.000	5.50	28.56	41.88	112.25	104.43	74.00	30.43	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 106 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:Low

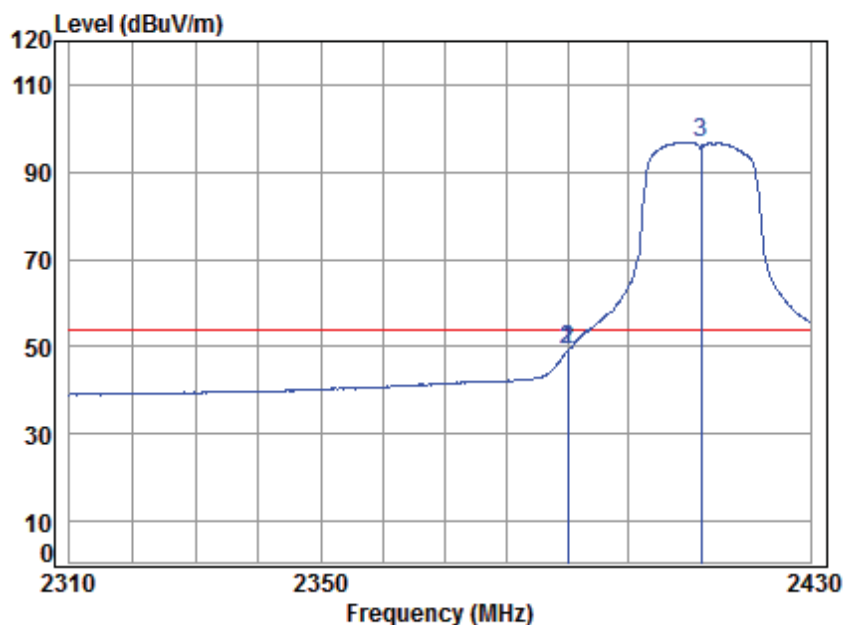

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	5.47	28.52	41.87	56.94	49.06	54.00	-4.94	Average
2	2390.000	5.47	28.52	41.87	56.94	49.06	54.00	-4.94	Average
3 *	2412.000	5.50	28.56	41.88	104.59	96.77	54.00	42.77	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 107 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:High

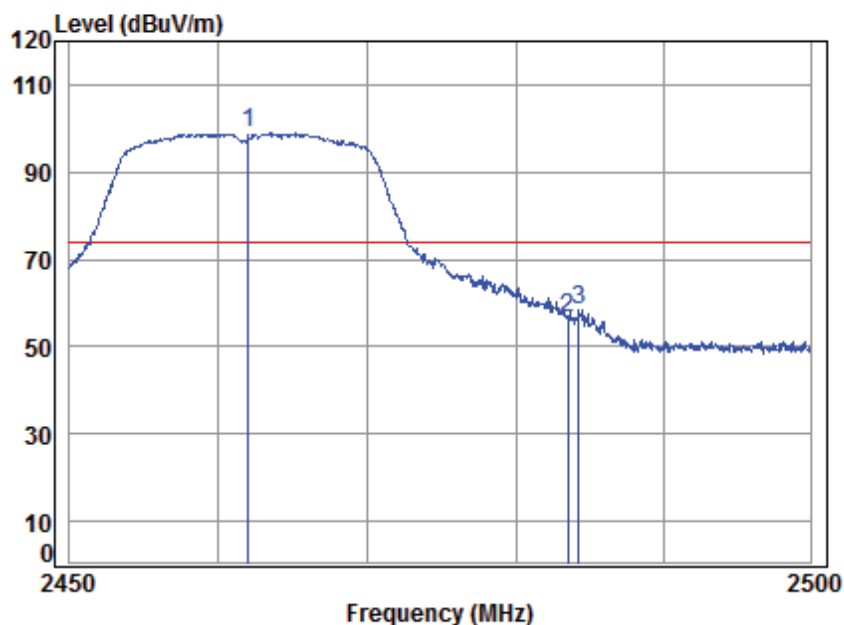

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16.5

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	106.53	98.84	74.00	24.84 peak
2	2483.500	5.60	28.67	41.91	64.27	56.63	74.00	-17.37 peak
3	2484.241	5.60	28.67	41.91	66.02	58.38	74.00	-15.62 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 108 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:High

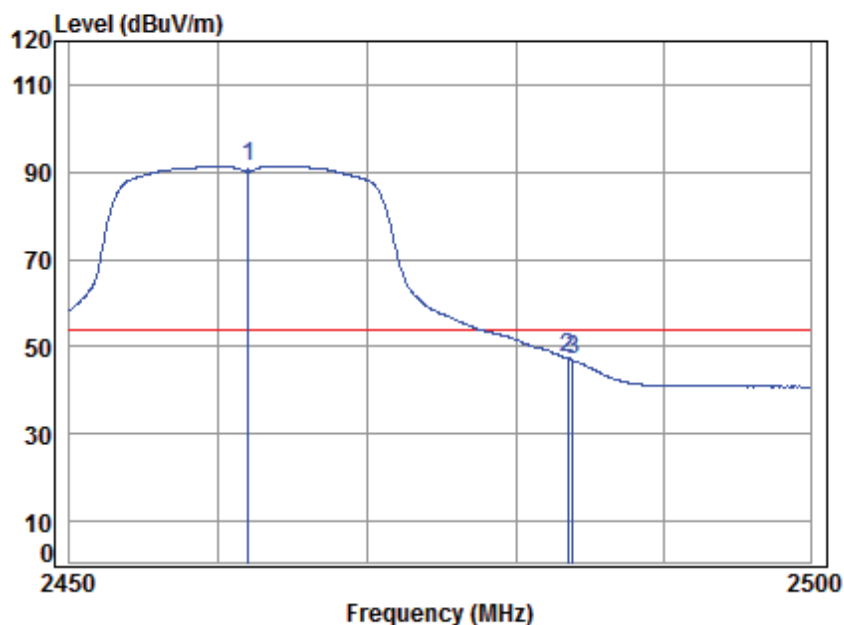

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	99.02	91.33	54.00	37.33	Average
2	2483.500	5.60	28.67	41.91	54.96	47.32	54.00	-6.68	Average
3	2483.890	5.60	28.67	41.91	54.51	46.87	54.00	-7.13	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 109 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:High

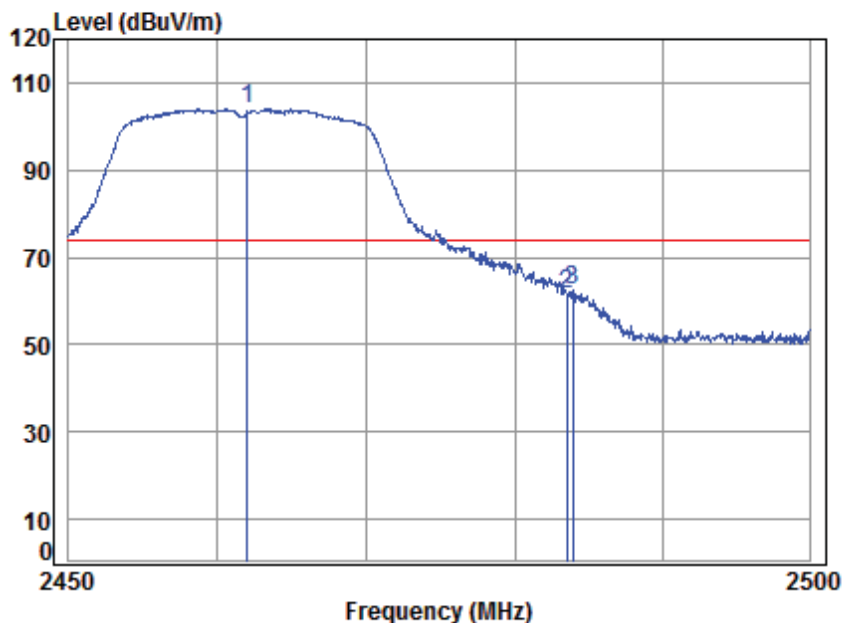

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16.5

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	111.63	103.94	74.00	29.94 peak
2	2483.500	5.60	28.67	41.91	69.08	61.44	74.00	-12.56 peak
3	2483.940	5.60	28.67	41.91	69.93	62.29	74.00	-11.71 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 110 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:High

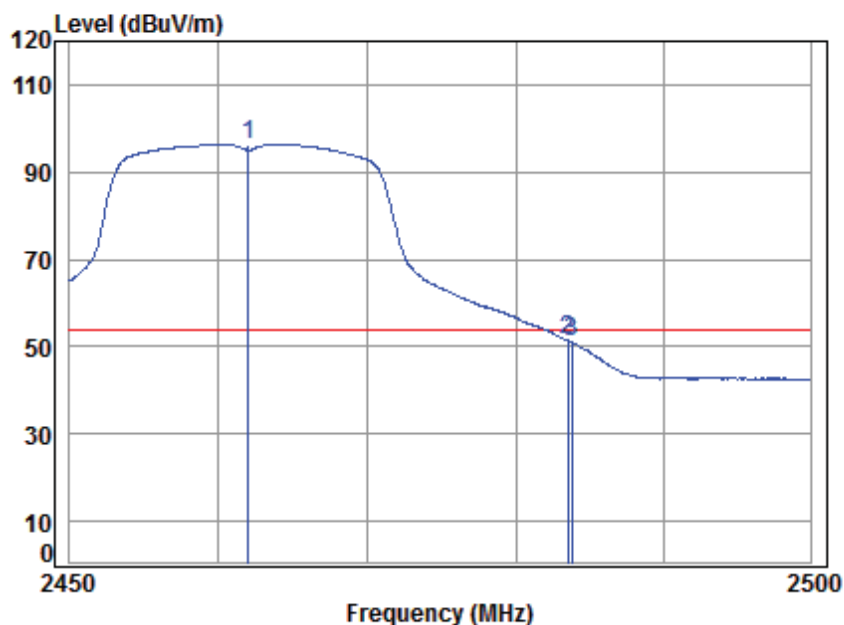

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	103.88	96.19	54.00	42.19	Average
2	2483.500	5.60	28.67	41.91	59.01	51.37	54.00	-2.63	Average
3	2483.790	5.60	28.67	41.91	58.63	50.99	54.00	-3.01	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 111 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:Low

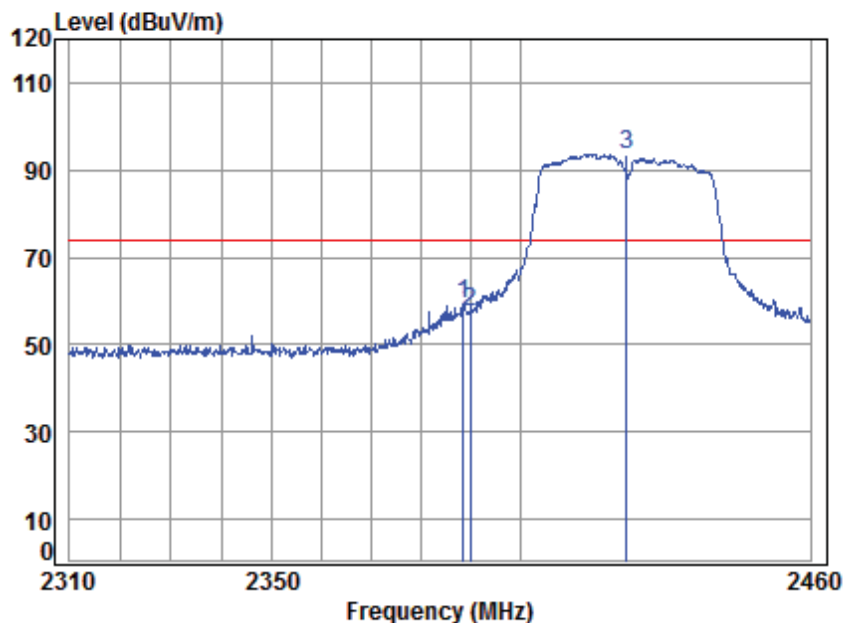

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2422 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2388.625	5.47	28.52	41.87	67.34	59.46	74.00	-14.54	peak
2	2390.000	5.47	28.52	41.87	65.53	57.65	74.00	-16.35	peak
3 *	2422.000	5.52	28.57	41.89	101.41	93.61	74.00	19.61	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 112 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:Low

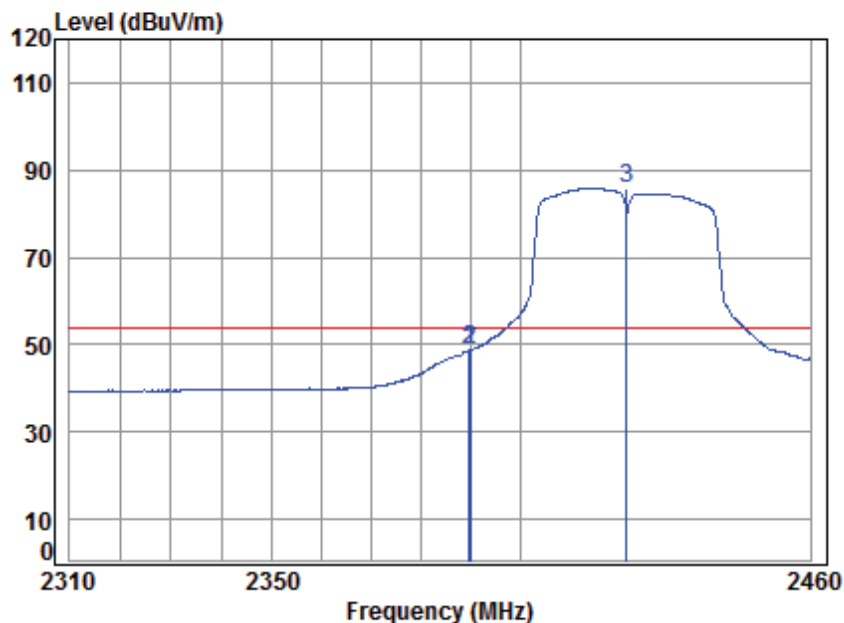

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2422 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.827	5.47	28.52	41.87	56.63	48.75	54.00	-5.25	Average
2	2390.000	5.47	28.52	41.87	56.63	48.75	54.00	-5.25	Average
3 *	2422.000	5.52	28.57	41.89	93.68	85.88	54.00	31.88	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 113 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:Low

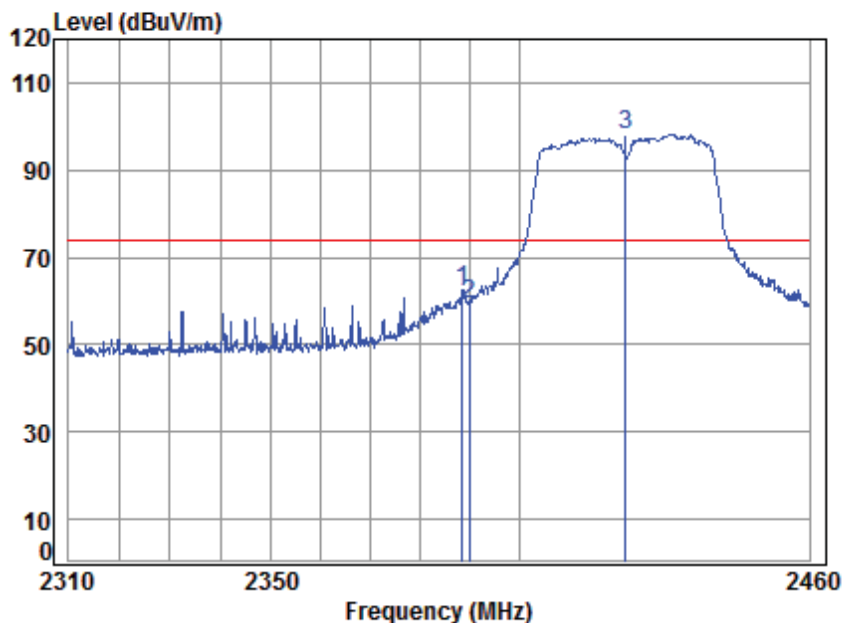

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2422 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 15

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2388.625	5.47	28.52	41.87	70.32	62.44	74.00	-11.56	peak
2	2390.000	5.47	28.52	41.87	67.40	59.52	74.00	-14.48	peak
3 *	2422.000	5.52	28.57	41.89	106.07	98.27	74.00	24.27	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 114 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:Low

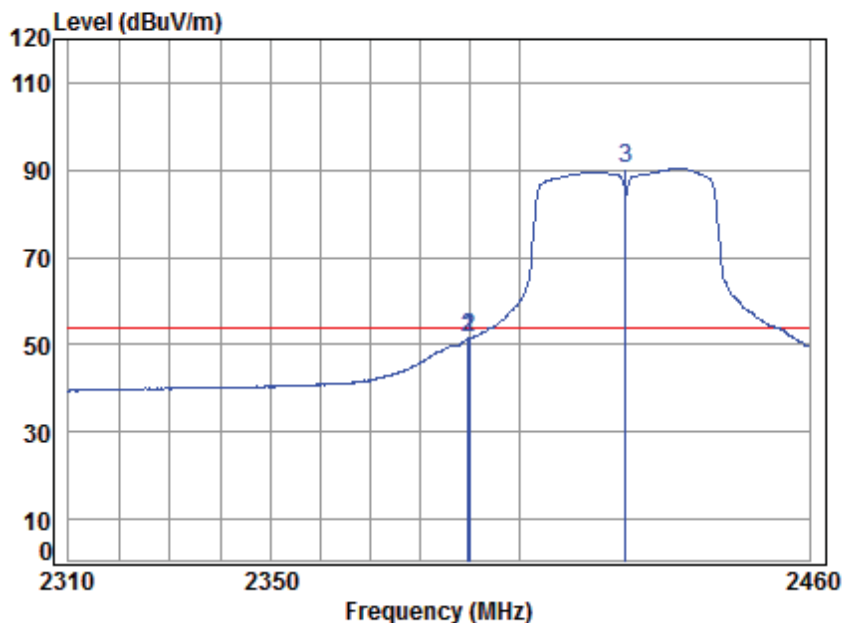

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2422 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 15

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.827	5.47	28.52	41.87	59.23	51.35	54.00	-2.65	Average
2	2390.000	5.47	28.52	41.87	59.25	51.37	54.00	-2.63	Average
3 *	2422.000	5.52	28.57	41.89	98.10	90.30	54.00	36.30	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 115 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:High

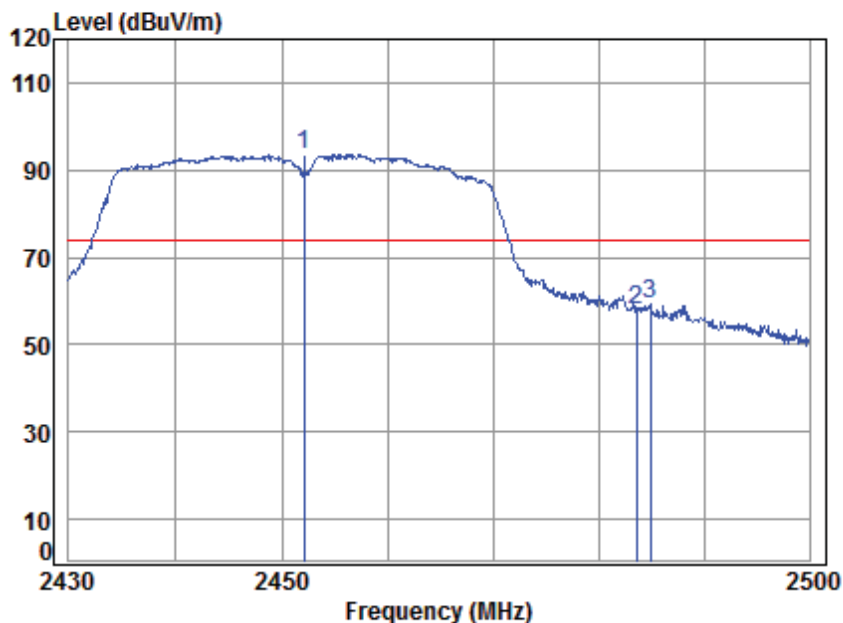

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2452 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 16.5

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2452.000	5.56	28.62	41.90	101.26	93.54	74.00	19.54 peak
2	2483.500	5.60	28.67	41.91	65.54	57.90	74.00	-16.10 peak
3	2484.782	5.60	28.68	41.91	67.09	59.46	74.00	-14.54 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 116 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:High

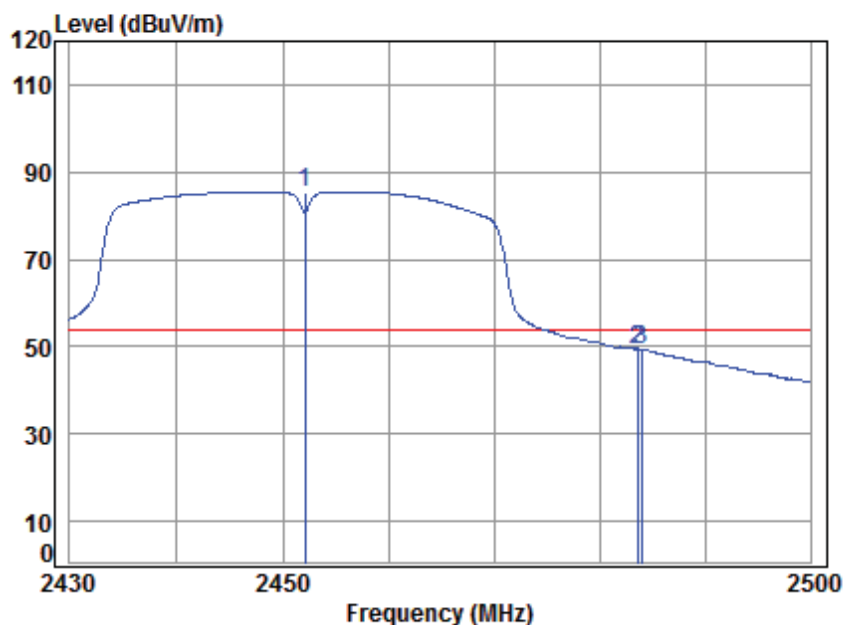

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2452 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2452.000	5.56	28.62	41.90	93.19	85.47	54.00	31.47	Average
2	2483.500	5.60	28.67	41.91	57.10	49.46	54.00	-4.54	Average
3	2483.865	5.60	28.67	41.91	57.06	49.42	54.00	-4.58	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 117 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:High

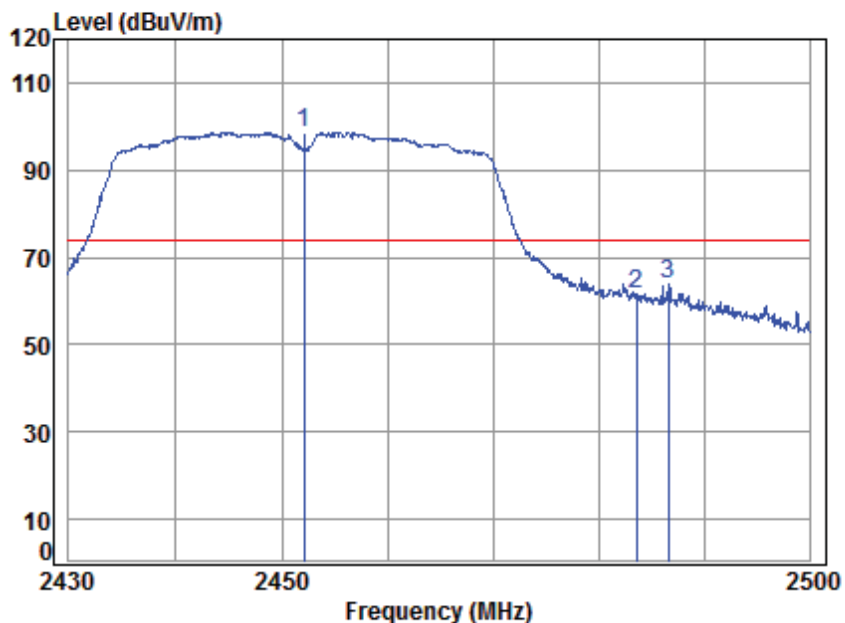

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2452 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 13.5

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2452.000	5.56	28.62	41.90	106.41	98.69	74.00	24.69 peak
2	2483.500	5.60	28.67	41.91	69.08	61.44	74.00	-12.56 peak
3	2486.547	5.60	28.68	41.91	71.71	64.08	74.00	-9.92 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 118 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:High

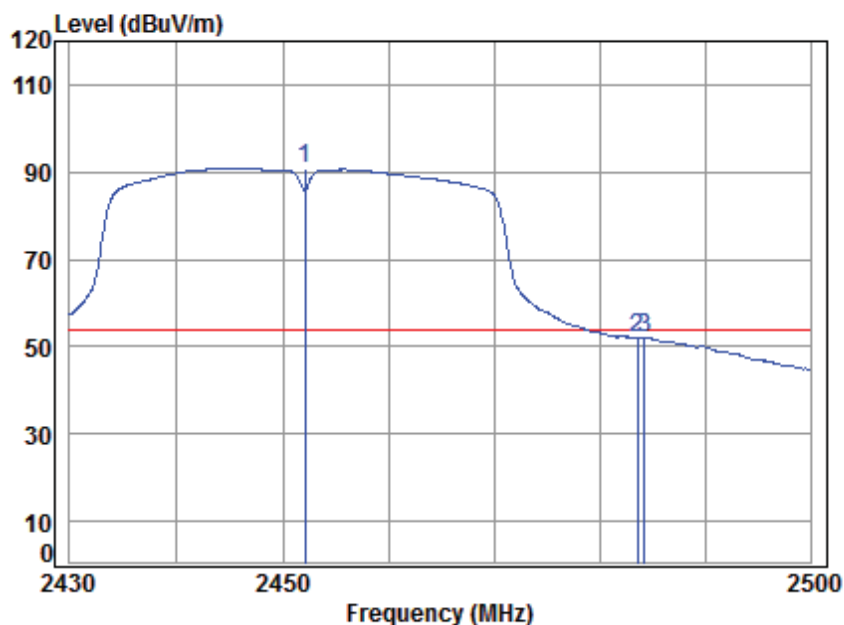

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2452 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 13.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2452.000	5.56	28.62	41.90	98.58	90.86	54.00	36.86	Average
2	2483.500	5.60	28.67	41.91	59.62	51.98	54.00	-2.02	Average
3	2484.147	5.60	28.67	41.91	59.62	51.98	54.00	-2.02	Average




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM181000924401

Page: 119 of 346

Test data for Antenna4:

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:Low

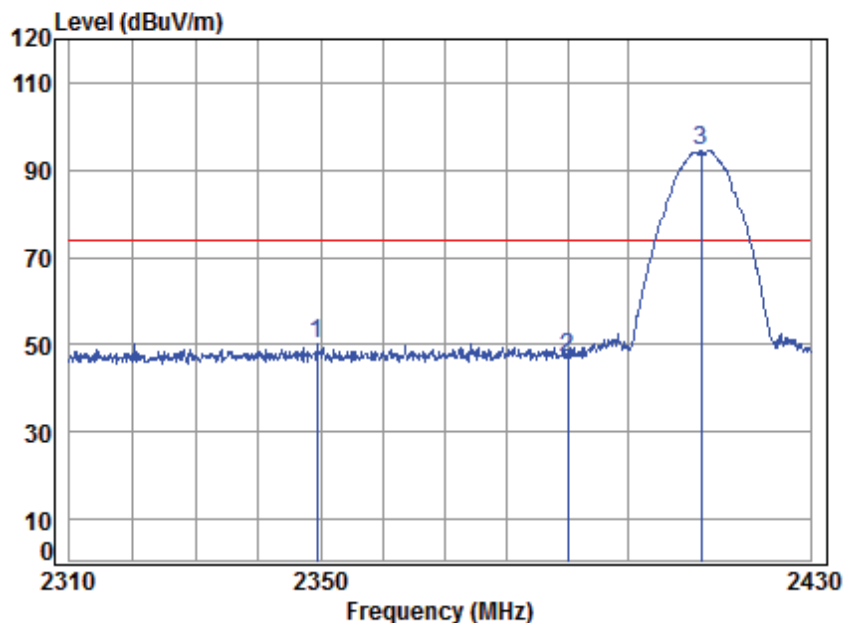

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2349.406	5.42	28.45	41.86	58.21	50.22	74.00	-23.78	peak
2	2390.000	5.47	28.52	41.87	54.82	46.94	74.00	-27.06	peak
3 *	2412.000	5.50	28.56	41.88	102.30	94.48	74.00	20.48	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 120 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:Low

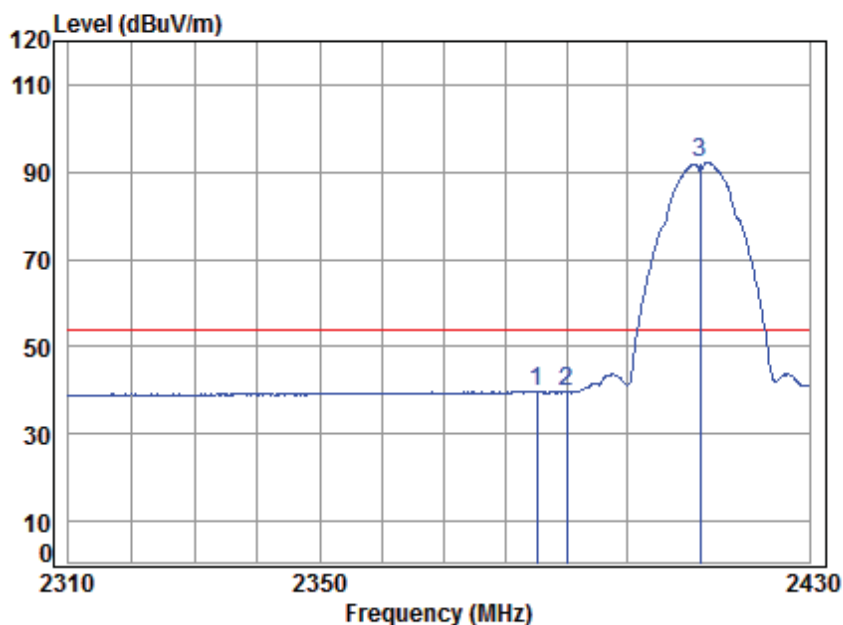

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2385.252	5.47	28.51	41.87	47.54	39.65	54.00	-14.35	Average
2	2390.000	5.47	28.52	41.87	47.46	39.58	54.00	-14.42	Average
3 *	2412.000	5.50	28.56	41.88	99.95	92.13	54.00	38.13	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 121 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:Low

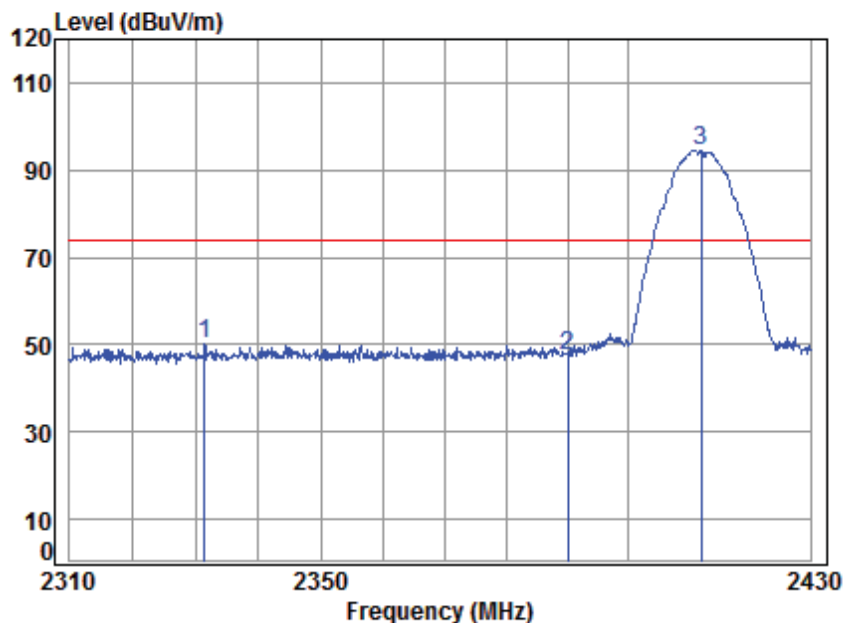

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2331.390	5.39	28.42	41.85	58.17	50.13	74.00	-23.87	peak
2	2390.000	5.47	28.52	41.87	55.26	47.38	74.00	-26.62	peak
3 *	2412.000	5.50	28.56	41.88	102.46	94.64	74.00	20.64	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 122 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:Low

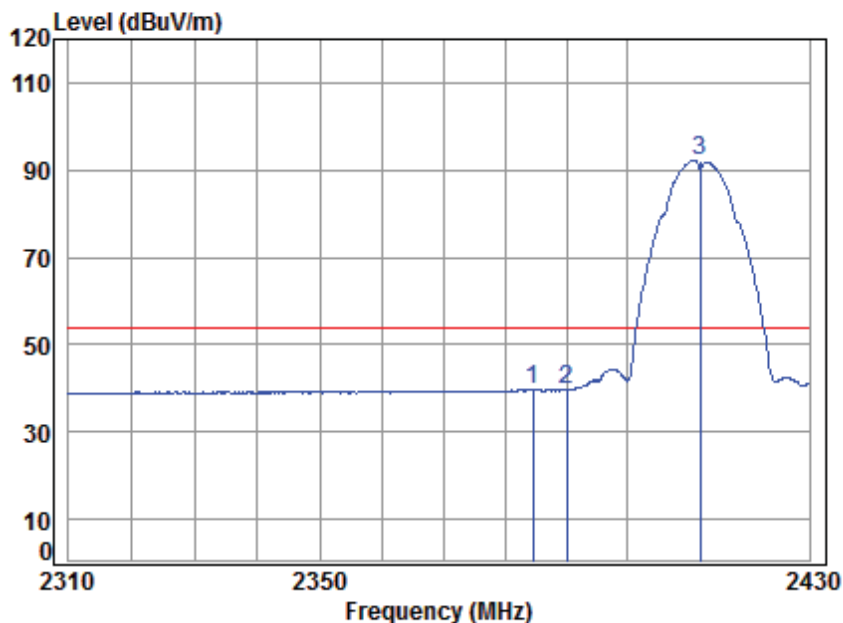

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2384.528	5.47	28.51	41.87	47.54	39.65	54.00	-14.35	Average
2	2390.000	5.47	28.52	41.87	47.45	39.57	54.00	-14.43	Average
3 *	2412.000	5.50	28.56	41.88	100.07	92.25	54.00	38.25	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 123 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:High

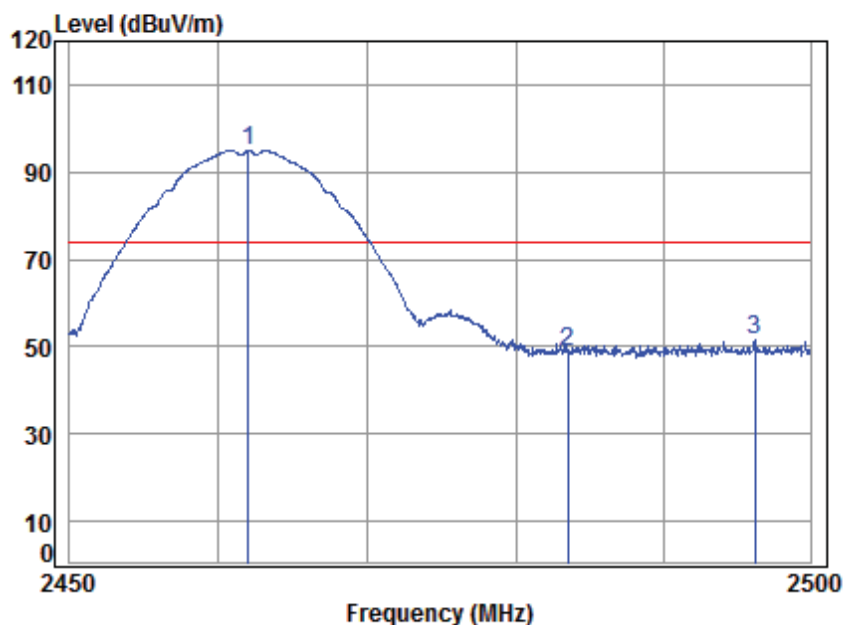

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	102.63	94.94	74.00	20.94 peak
2	2483.500	5.60	28.67	41.91	56.66	49.02	74.00	-24.98 peak
3	2496.215	5.62	28.69	41.92	58.95	51.34	74.00	-22.66 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 124 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:High

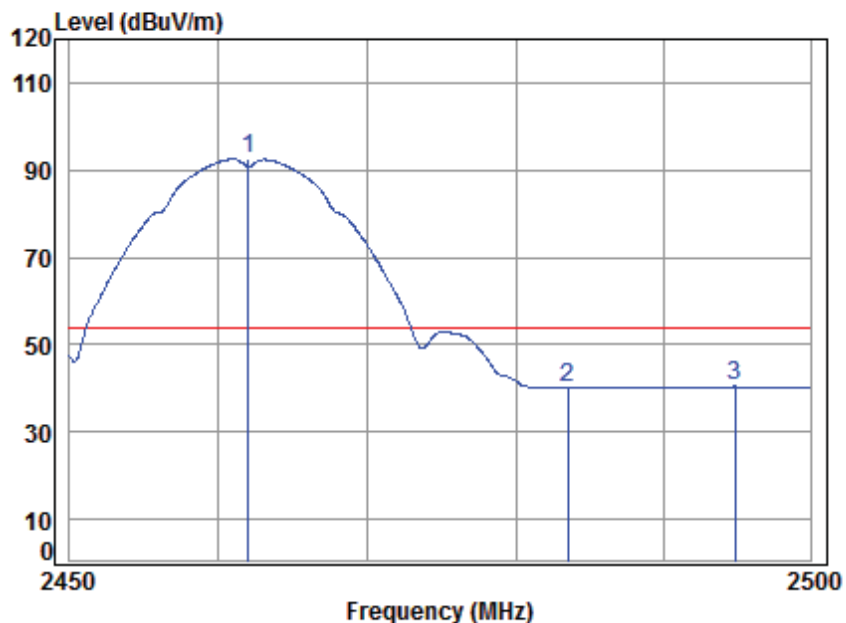

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	100.19	92.50	54.00	38.50 Average
2	2483.500	5.60	28.67	41.91	47.88	40.24	54.00	-13.76 Average
3	2494.854	5.61	28.69	41.92	48.05	40.43	54.00	-13.57 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 125 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:High

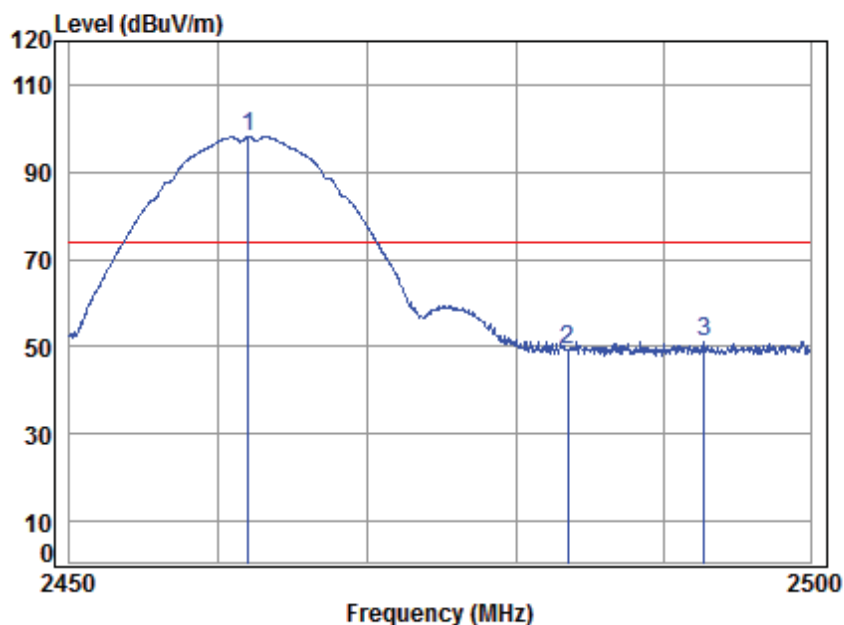

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	105.76	98.07	74.00	24.07 peak
2	2483.500	5.60	28.67	41.91	56.87	49.23	74.00	-24.77 peak
3	2492.788	5.61	28.69	41.91	58.83	51.22	74.00	-22.78 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 126 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:High

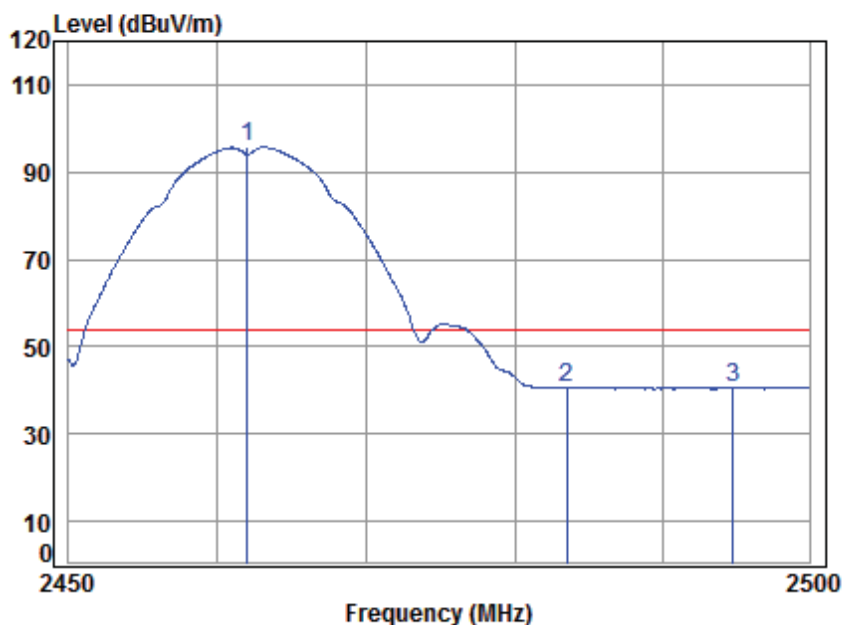

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	103.36	95.67	54.00	41.67 Average
2	2483.500	5.60	28.67	41.91	48.39	40.75	54.00	-13.25 Average
3	2494.803	5.61	28.69	41.92	48.42	40.80	54.00	-13.20 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 127 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:Low

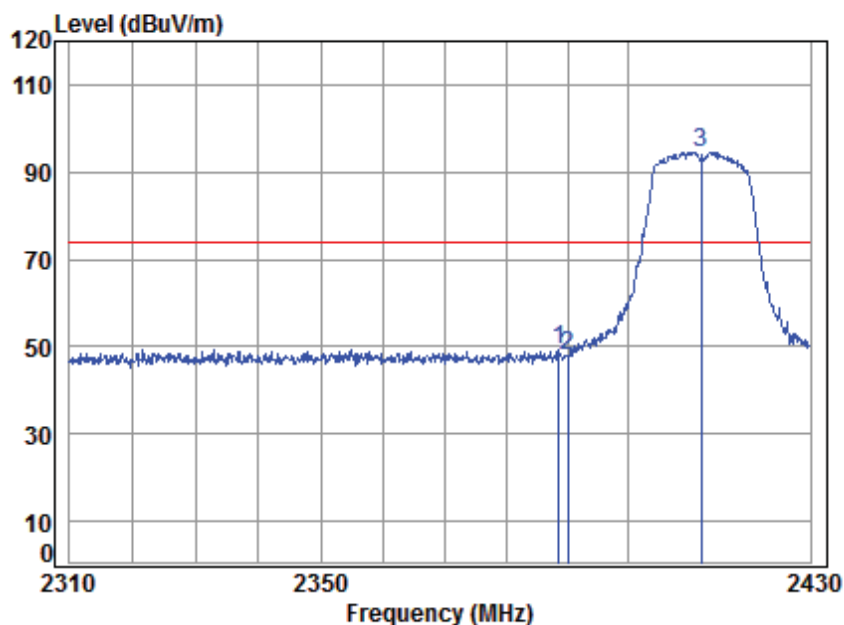

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2388.637	5.47	28.52	41.87	57.22	49.34	74.00	-24.66	peak
2	2390.000	5.47	28.52	41.87	55.71	47.83	74.00	-26.17	peak
3 *	2412.000	5.50	28.56	41.88	102.44	94.62	74.00	20.62	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 128 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:Low

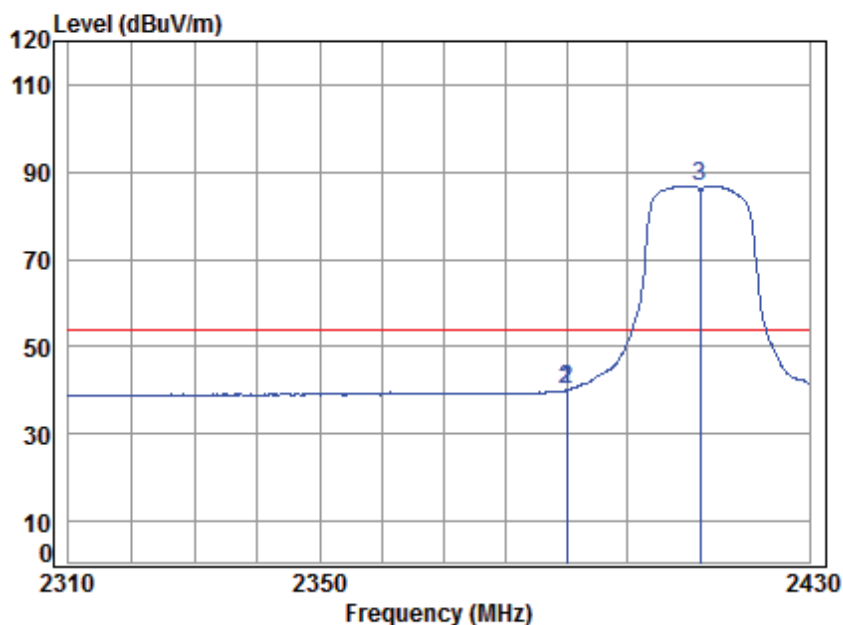

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	5.47	28.52	41.87	47.89	40.01	54.00	-13.99	Average
2	2390.000	5.47	28.52	41.87	47.89	40.01	54.00	-13.99	Average
3 *	2412.000	5.50	28.56	41.88	94.70	86.88	54.00	32.88	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 129 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:Low

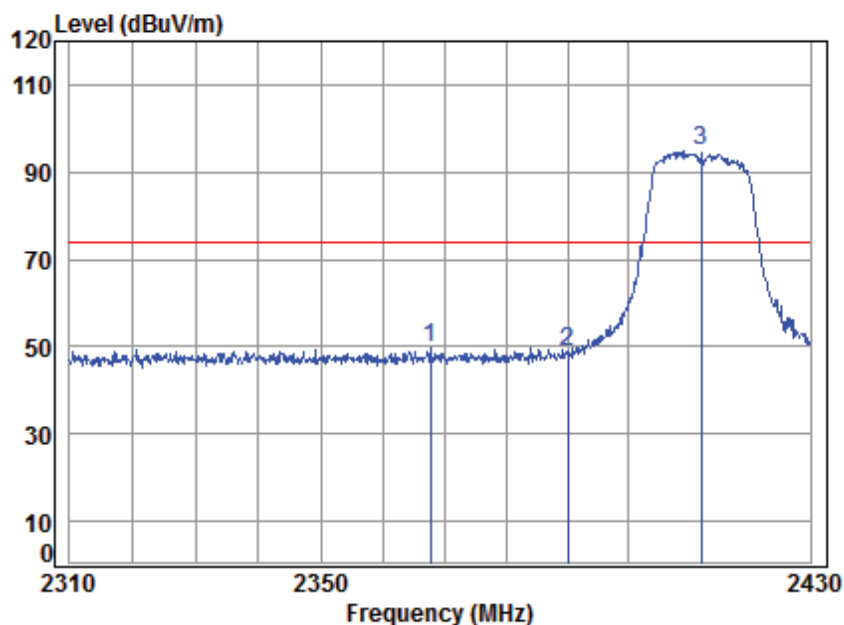

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2367.681	5.44	28.48	41.86	57.68	49.74	74.00	-24.26	peak
2	2390.000	5.47	28.52	41.87	56.65	48.77	74.00	-25.23	peak
3 *	2412.000	5.50	28.56	41.88	102.55	94.73	74.00	20.73	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 130 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:Low

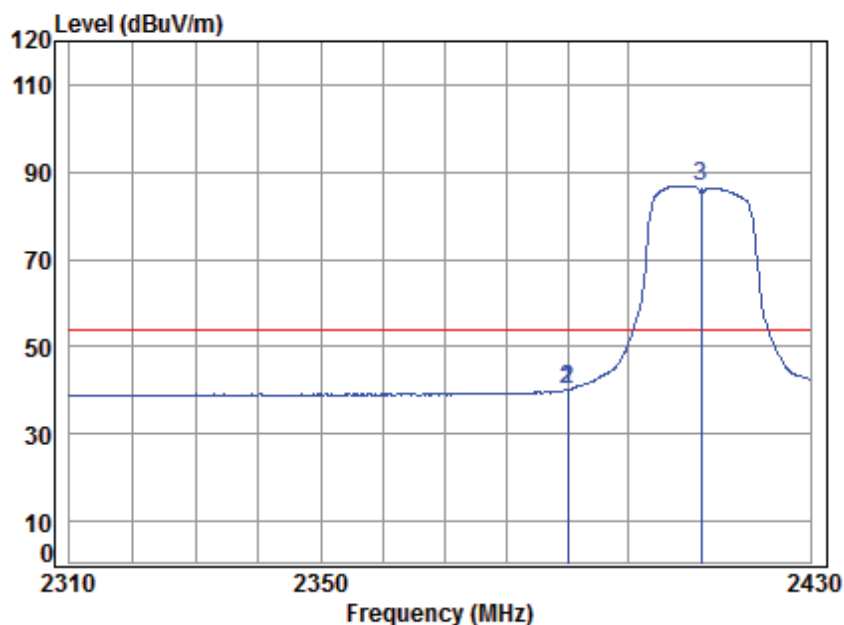

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	5.47	28.52	41.87	48.01	40.13	54.00	-13.87	Average
2	2390.000	5.47	28.52	41.87	48.01	40.13	54.00	-13.87	Average
3 *	2412.000	5.50	28.56	41.88	94.68	86.86	54.00	32.86	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 131 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:High

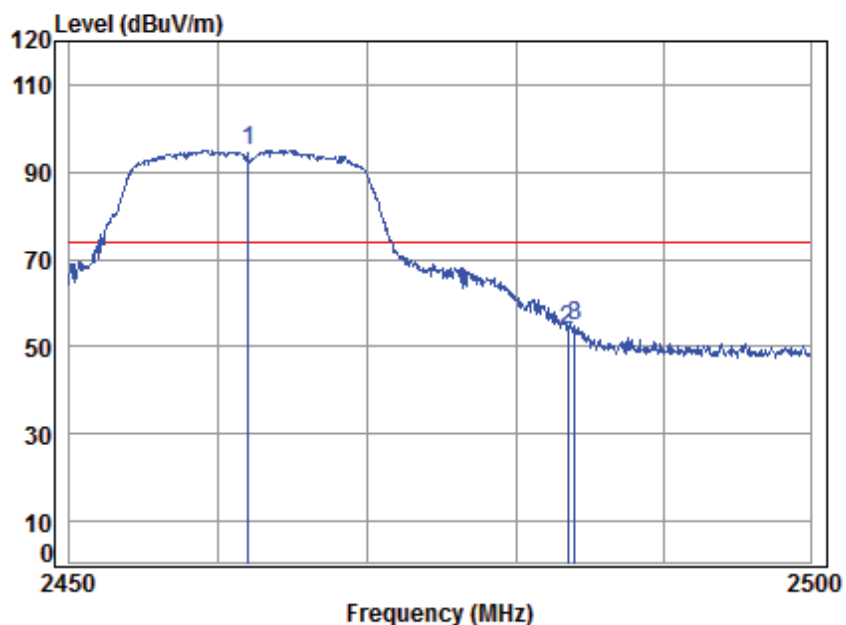

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	102.80	95.11	74.00	21.11 peak
2	2483.500	5.60	28.67	41.91	61.69	54.05	74.00	-19.95 peak
3	2483.990	5.60	28.67	41.91	62.56	54.92	74.00	-19.08 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 132 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:High

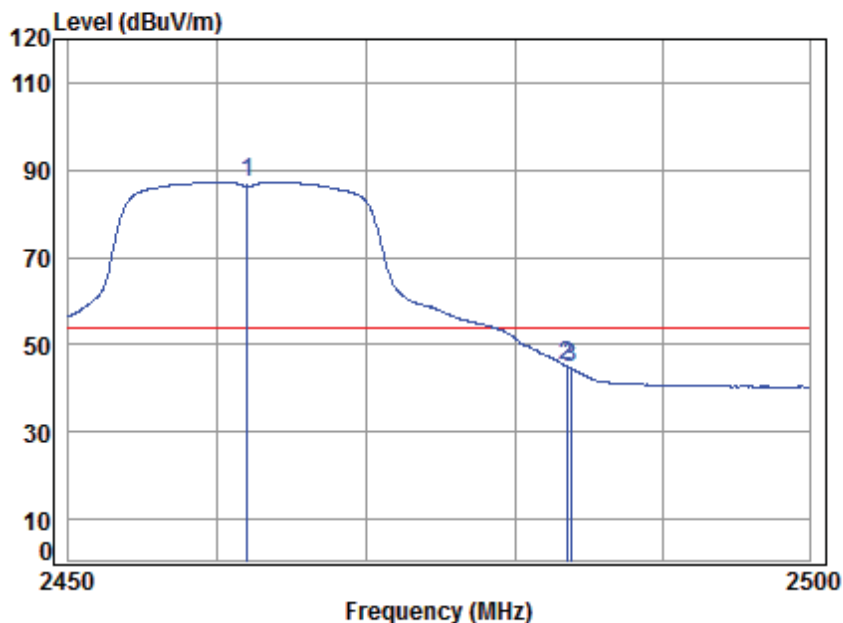

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	94.90	87.21	54.00	33.21	Average
2	2483.500	5.60	28.67	41.91	52.83	45.19	54.00	-8.81	Average
3	2483.790	5.60	28.67	41.91	52.19	44.55	54.00	-9.45	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 133 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:High

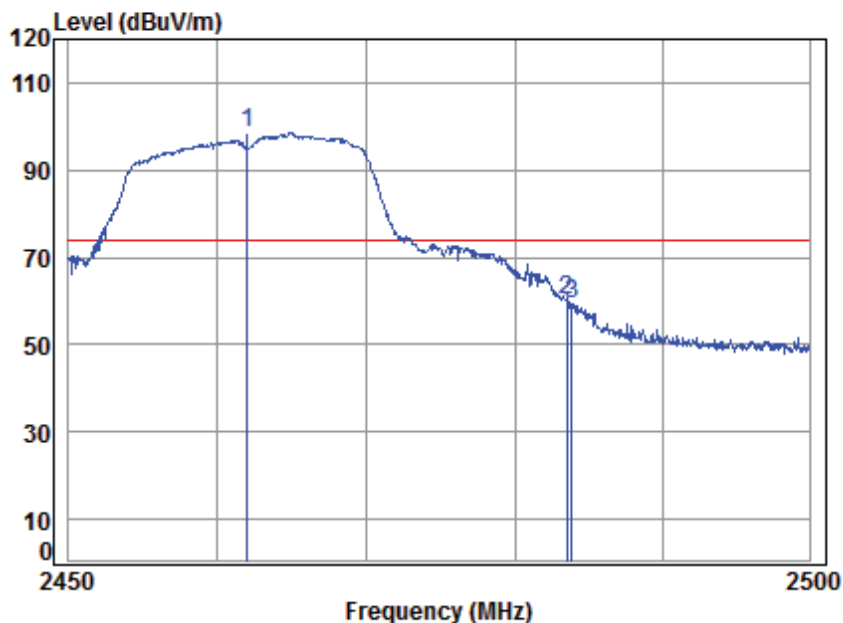

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	106.10	98.41	74.00	24.41 peak
2	2483.500	5.60	28.67	41.91	67.92	60.28	74.00	-13.72 peak
3	2483.840	5.60	28.67	41.91	67.06	59.42	74.00	-14.58 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 134 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:High

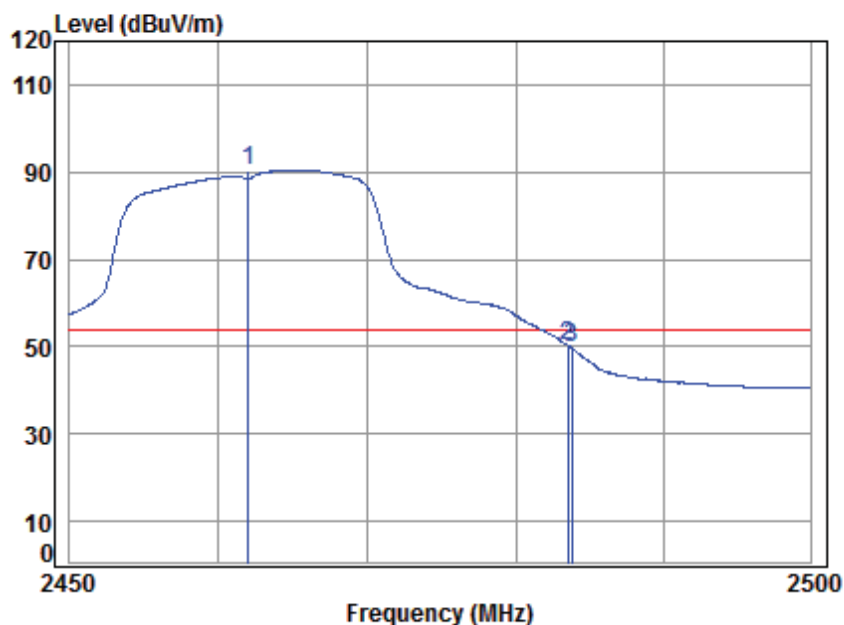

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	98.19	90.50	54.00	36.50	Average
2	2483.500	5.60	28.67	41.91	57.93	50.29	54.00	-3.71	Average
3	2483.790	5.60	28.67	41.91	57.22	49.58	54.00	-4.42	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 135 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:Low

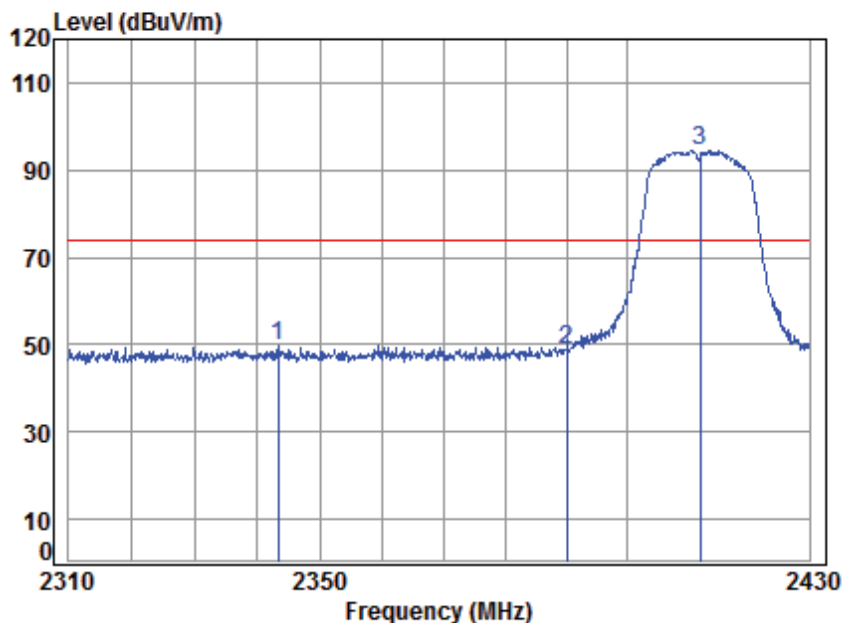

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2343.346	5.41	28.44	41.85	57.76	49.76	74.00	-24.24	peak
2	2390.000	5.47	28.52	41.87	56.92	49.04	74.00	-24.96	peak
3 *	2412.000	5.50	28.56	41.88	102.28	94.46	74.00	20.46	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 136 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:Low

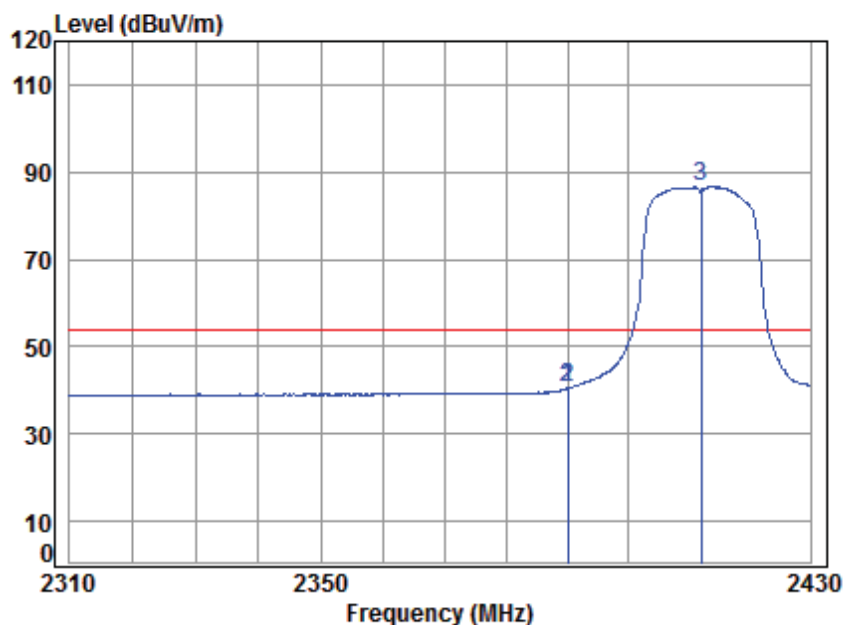

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	5.47	28.52	41.87	48.31	40.43	54.00	-13.57	Average
2	2390.000	5.47	28.52	41.87	48.31	40.43	54.00	-13.57	Average
3 *	2412.000	5.50	28.56	41.88	94.36	86.54	54.00	32.54	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 137 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:Low

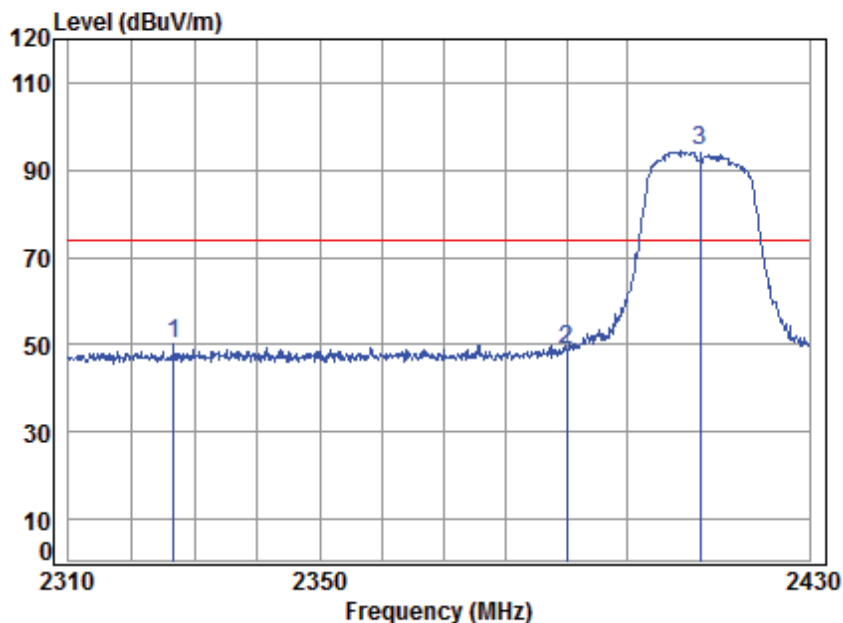

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2326.672	5.39	28.41	41.85	58.08	50.03	74.00	-23.97	peak
2	2390.000	5.47	28.52	41.87	56.73	48.85	74.00	-25.15	peak
3 *	2412.000	5.50	28.56	41.88	102.06	94.24	74.00	20.24	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 138 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:Low

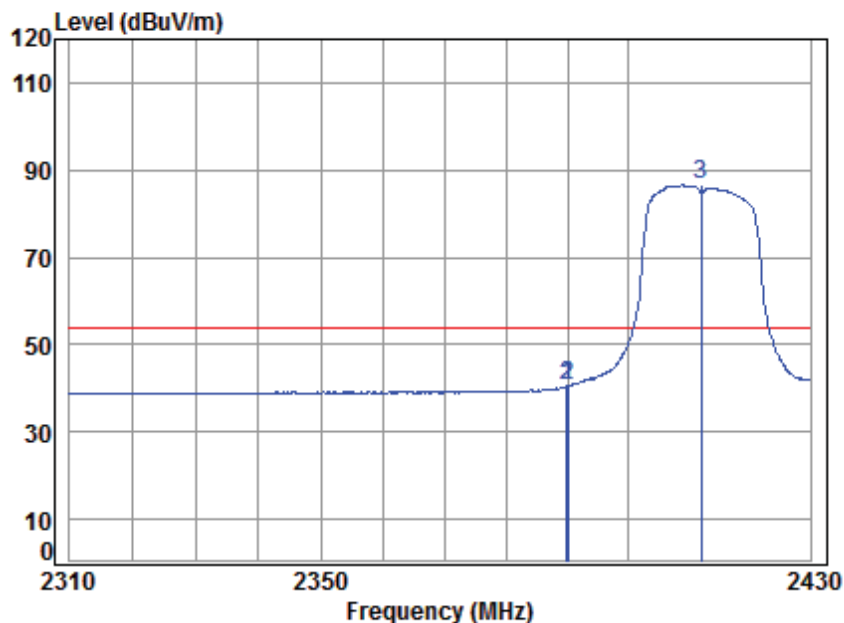

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.847	5.47	28.52	41.87	48.39	40.51	54.00	-13.49	Average
2	2390.000	5.47	28.52	41.87	48.32	40.44	54.00	-13.56	Average
3 *	2412.000	5.50	28.56	41.88	94.30	86.48	54.00	32.48	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 139 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:High

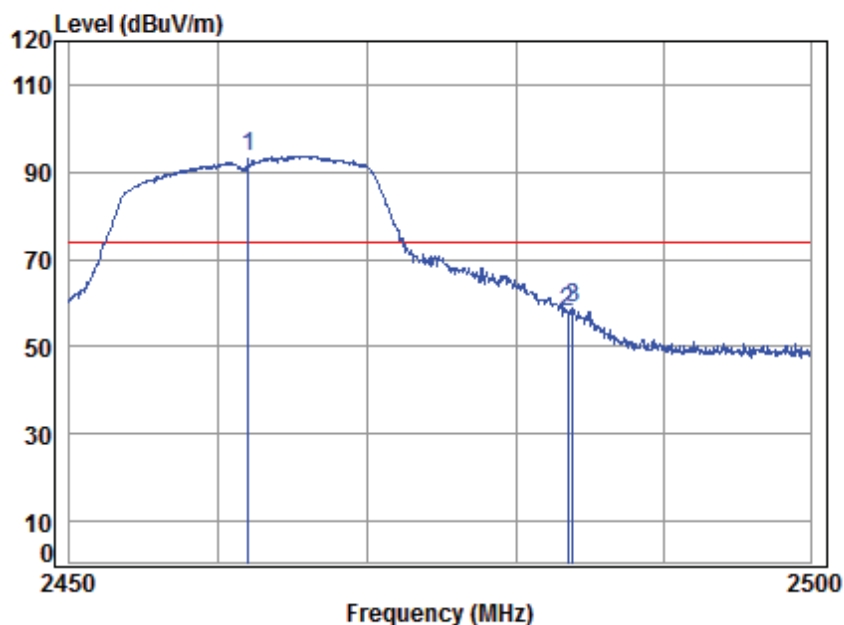

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16.5

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	101.45	93.76	74.00	19.76 peak
2	2483.500	5.60	28.67	41.91	65.66	58.02	74.00	-15.98 peak
3	2483.890	5.60	28.67	41.91	66.65	59.01	74.00	-14.99 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 140 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:High

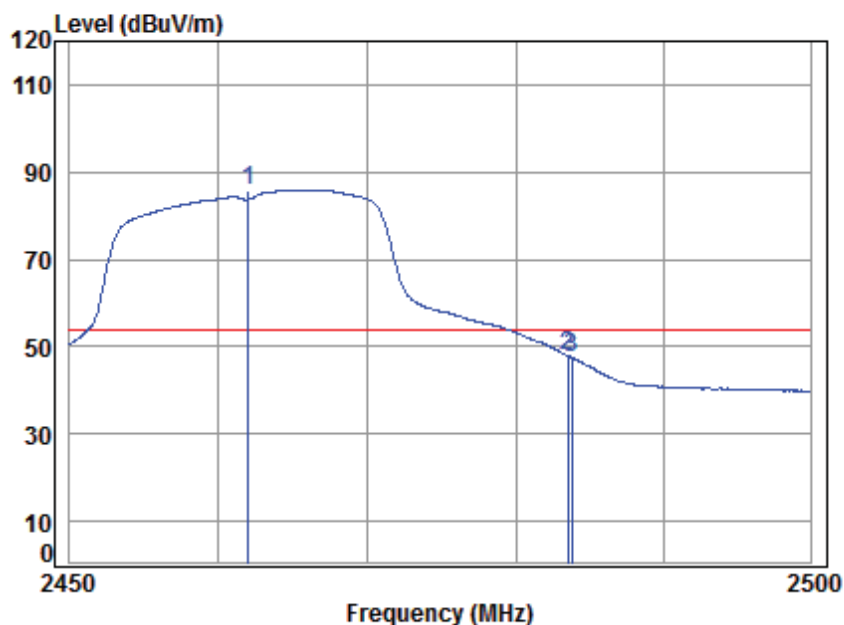

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16.5

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	93.67	85.98	54.00	31.98 Average
2	2483.500	5.60	28.67	41.91	55.58	47.94	54.00	-6.06 Average
3	2483.790	5.60	28.67	41.91	55.18	47.54	54.00	-6.46 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 141 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:High

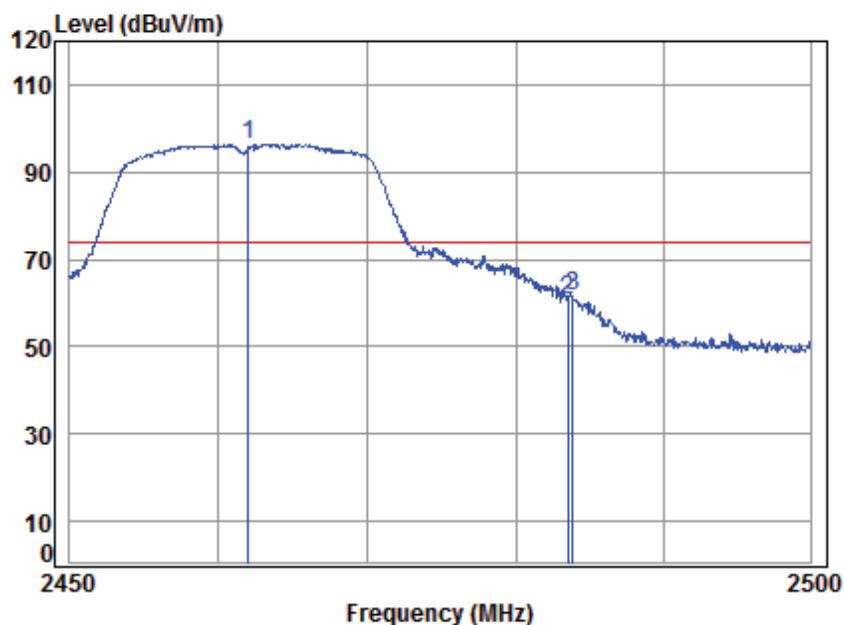

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	104.14	96.45	74.00	22.45	peak
2	2483.500	5.60	28.67	41.91	68.45	60.81	74.00	-13.19	peak
3	2483.840	5.60	28.67	41.91	69.15	61.51	74.00	-12.49	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 142 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:High

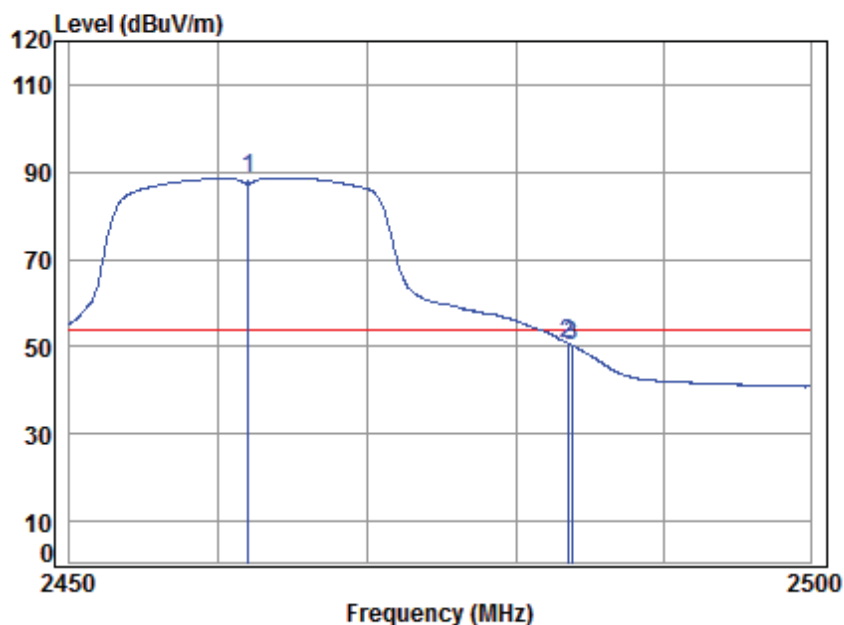

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	96.36	88.67	54.00	34.67	Average
2	2483.500	5.60	28.67	41.91	58.46	50.82	54.00	-3.18	Average
3	2483.790	5.60	28.67	41.91	58.00	50.36	54.00	-3.64	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 143 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:Low

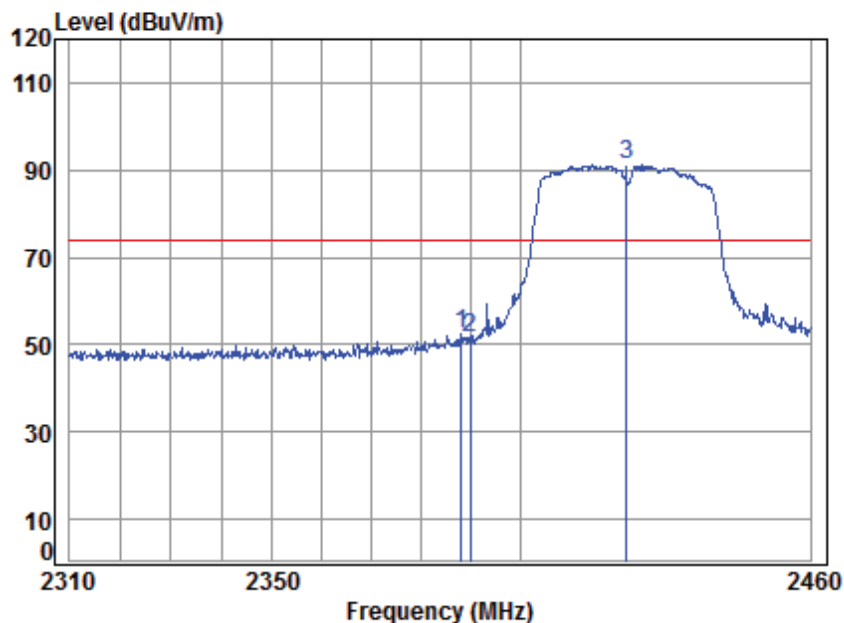

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2422 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2388.174	5.47	28.52	41.87	60.14	52.26	74.00	-21.74	peak
2	2390.000	5.47	28.52	41.87	59.45	51.57	74.00	-22.43	peak
3 *	2422.000	5.52	28.57	41.89	98.89	91.09	74.00	17.09	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 144 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:Low

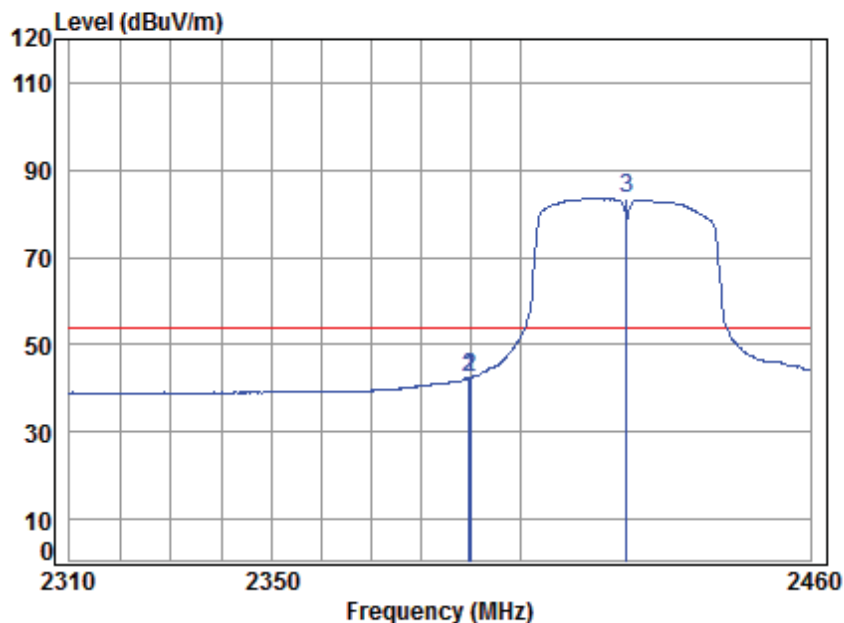

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2422 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.827	5.47	28.52	41.87	50.36	42.48	54.00	-11.52	Average
2	2390.000	5.47	28.52	41.87	50.36	42.48	54.00	-11.52	Average
3 *	2422.000	5.52	28.57	41.89	91.24	83.44	54.00	29.44	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 145 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:Low

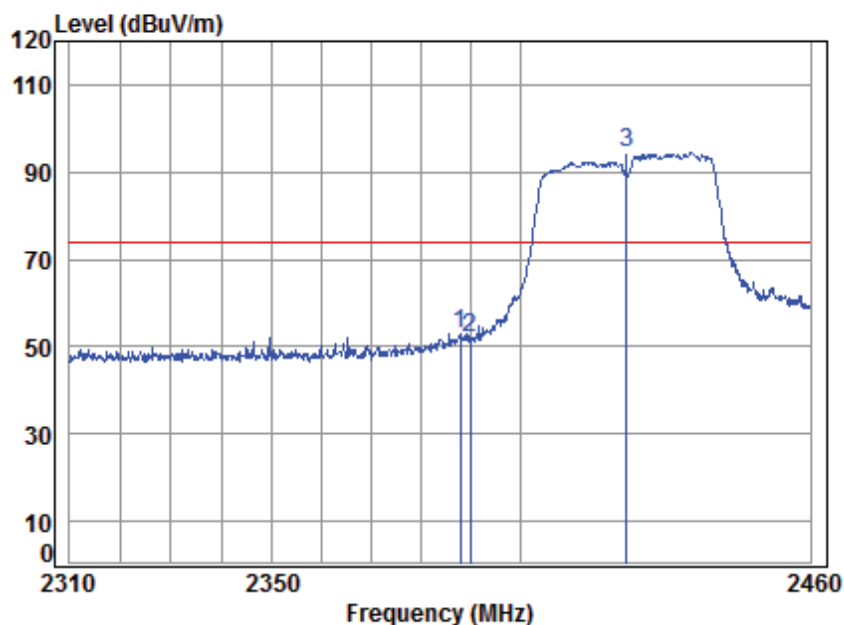

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2422 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2387.873	5.47	28.51	41.87	60.94	53.05	74.00	-20.95	peak
2	2390.000	5.47	28.52	41.87	59.76	51.88	74.00	-22.12	peak
3 *	2422.000	5.52	28.57	41.89	102.32	94.52	74.00	20.52	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 146 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:Low

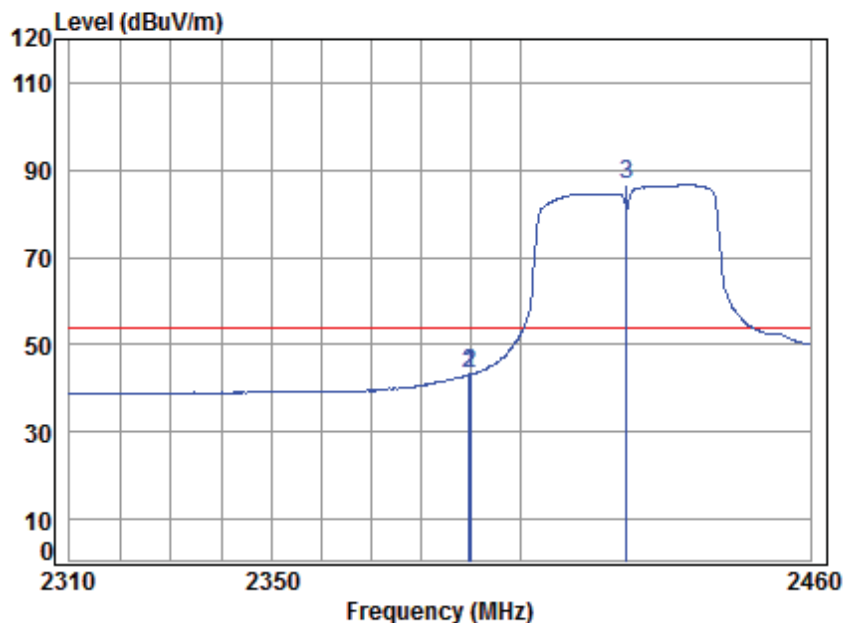

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2422 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.827	5.47	28.52	41.87	51.19	43.31	54.00	-10.69	Average
2	2390.000	5.47	28.52	41.87	51.12	43.24	54.00	-10.76	Average
3 *	2422.000	5.52	28.57	41.89	94.47	86.67	54.00	32.67	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 147 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:High

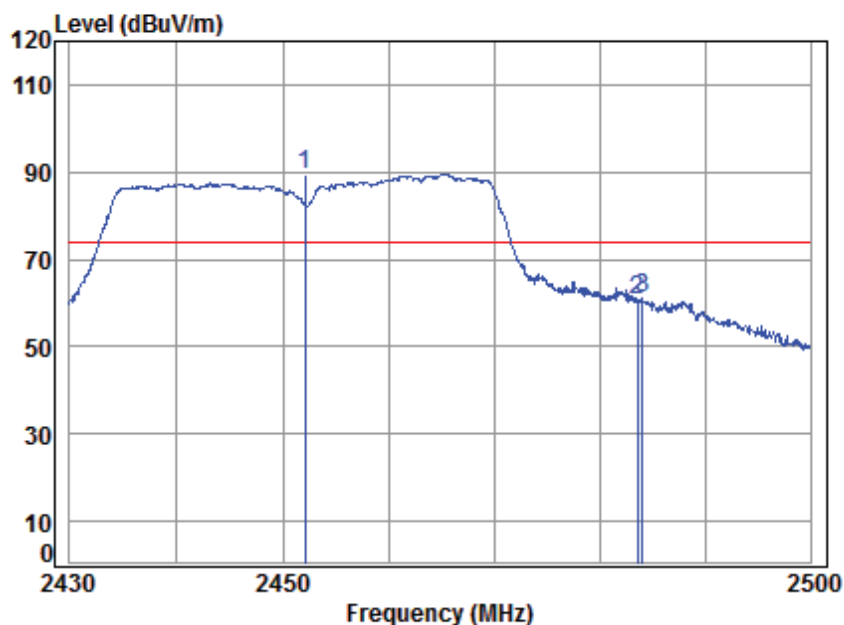

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2452 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 16


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2452.000	5.56	28.62	41.90	97.21	89.49	74.00	15.49	peak
2	2483.500	5.60	28.67	41.91	68.43	60.79	74.00	-13.21	peak
3	2483.935	5.60	28.67	41.91	68.68	61.04	74.00	-12.96	peak



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401
Page: 148 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:High

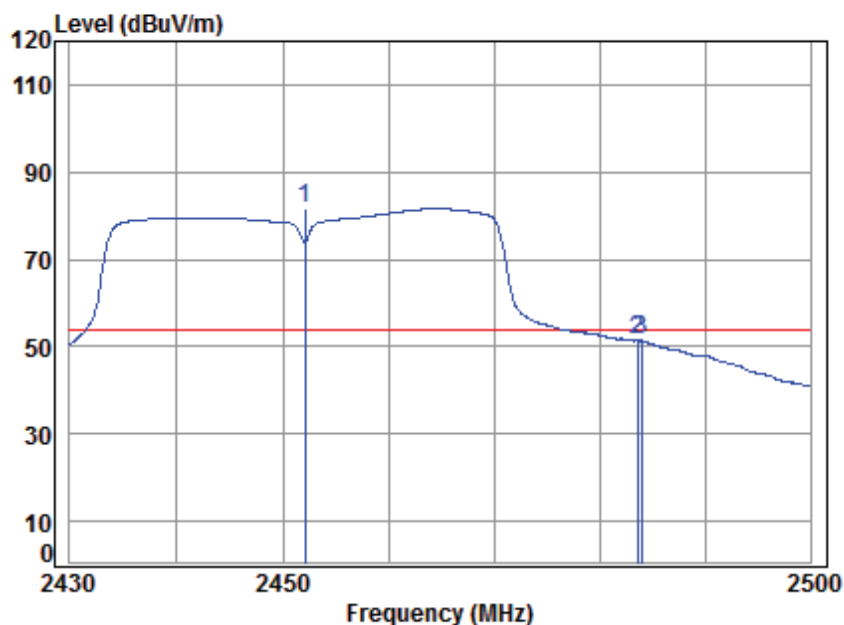

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2452 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 16

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2452.000	5.56	28.62	41.90	89.38	81.66	54.00	27.66	Average
2	2483.500	5.60	28.67	41.91	58.98	51.34	54.00	-2.66	Average
3	2483.865	5.60	28.67	41.91	59.01	51.37	54.00	-2.63	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 149 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:High

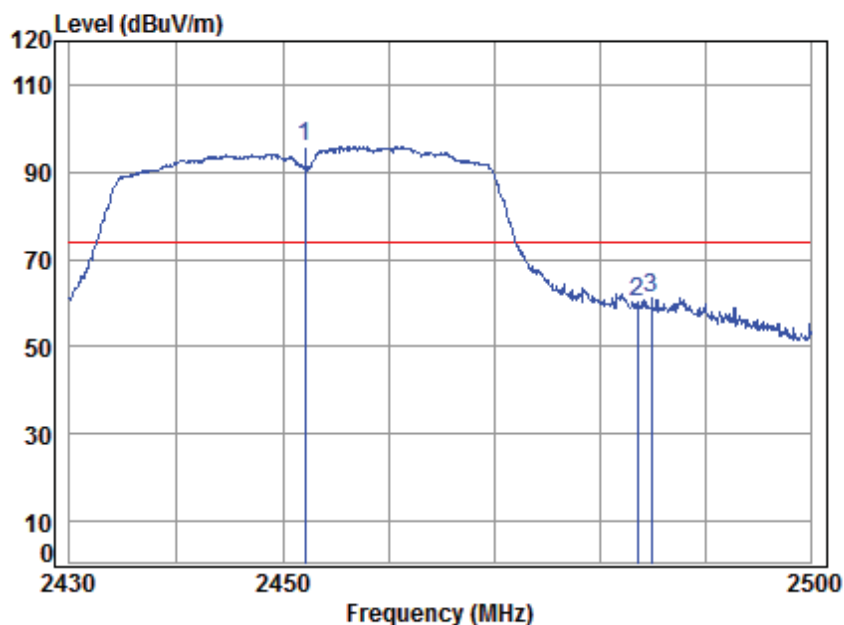

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2452 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 14.5

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2452.000	5.56	28.62	41.90	103.64	95.92	74.00	21.92 peak
2	2483.500	5.60	28.67	41.91	67.92	60.28	74.00	-13.72 peak
3	2484.852	5.60	28.68	41.91	68.78	61.15	74.00	-12.85 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 150 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:High

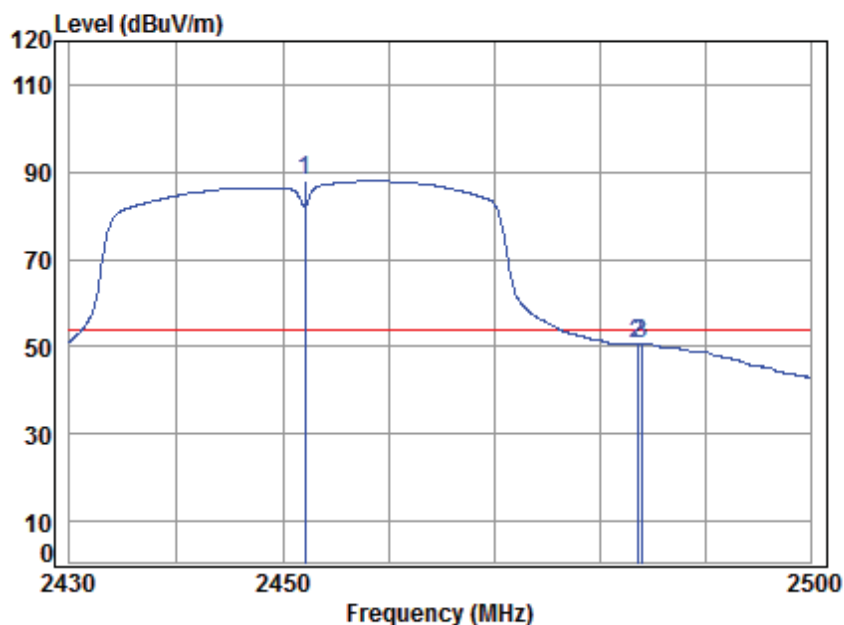

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2452 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 14.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2452.000	5.56	28.62	41.90	95.66	87.94	54.00	33.94	Average
2	2483.500	5.60	28.67	41.91	58.35	50.71	54.00	-3.29	Average
3	2483.865	5.60	28.67	41.91	58.36	50.72	54.00	-3.28	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 151 of 346

Test data for Antenna5:

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:Low

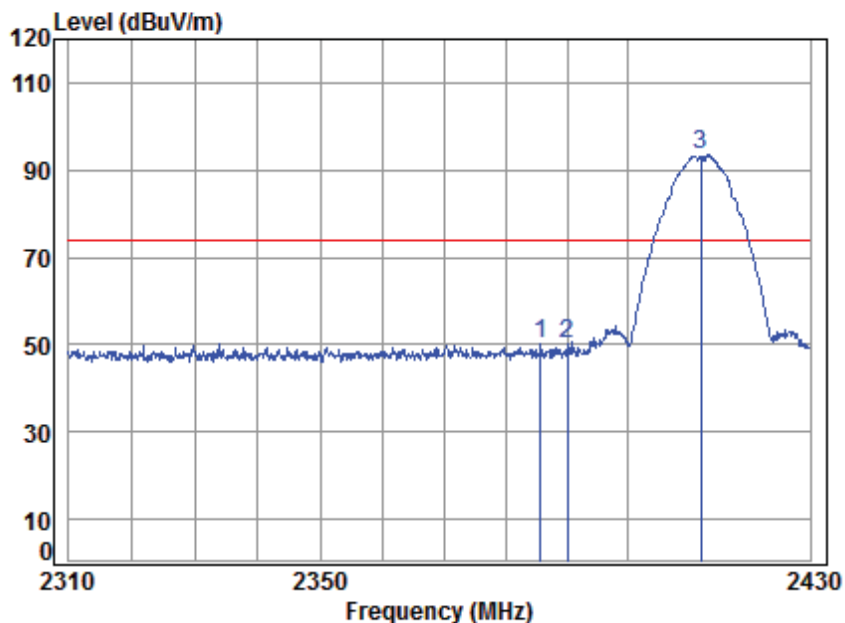

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2385.736	5.47	28.51	41.87	58.30	50.41	74.00	-23.59	peak
2	2390.000	5.47	28.52	41.87	58.08	50.20	74.00	-23.80	peak
3 *	2412.000	5.50	28.56	41.88	101.19	93.37	74.00	19.37	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 152 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:Low

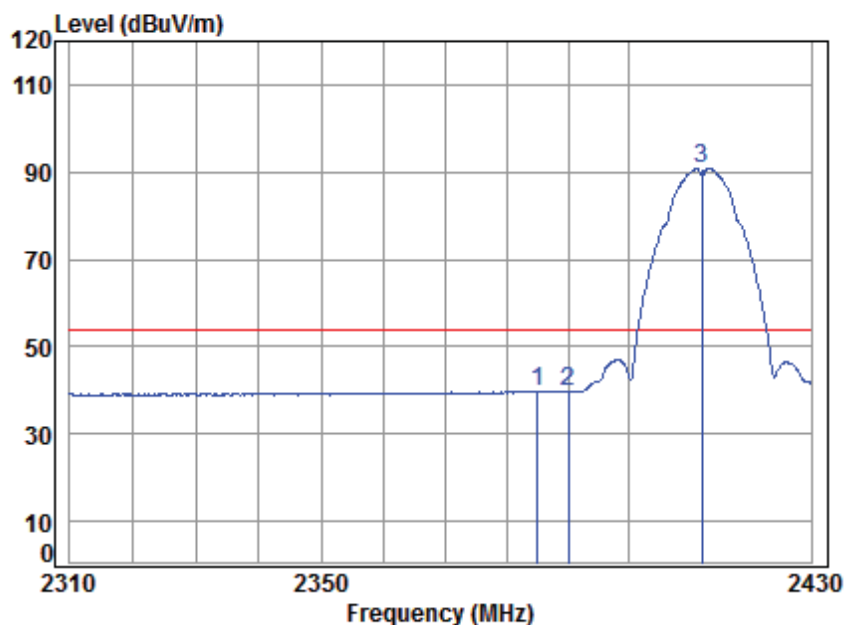

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2385.011	5.47	28.51	41.87	47.78	39.89	54.00	-14.11	Average
2	2390.000	5.47	28.52	41.87	47.66	39.78	54.00	-14.22	Average
3 *	2412.000	5.50	28.56	41.88	98.66	90.84	54.00	36.84	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 153 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:Low

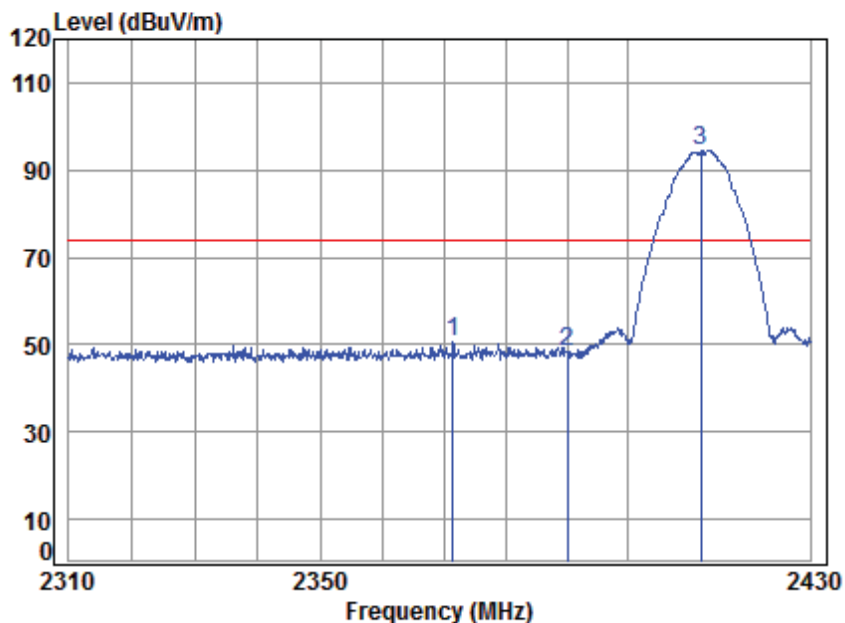

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2371.401	5.45	28.49	41.86	58.63	50.71	74.00	-23.29	peak
2	2390.000	5.47	28.52	41.87	56.13	48.25	74.00	-25.75	peak
3 *	2412.000	5.50	28.56	41.88	102.42	94.60	74.00	20.60	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 154 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:Low

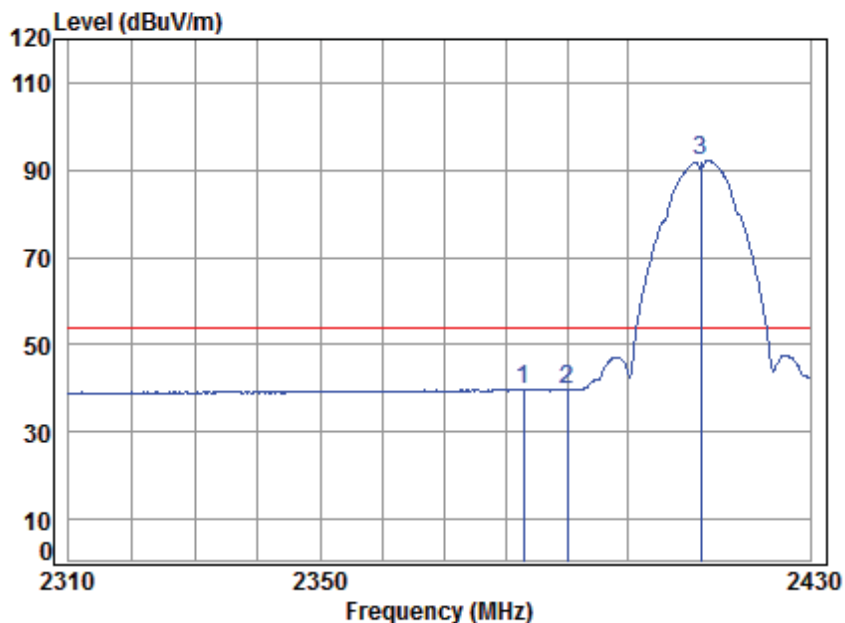

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2382.958	5.47	28.51	41.87	47.70	39.81	54.00	-14.19	Average
2	2390.000	5.47	28.52	41.87	47.53	39.65	54.00	-14.35	Average
3 *	2412.000	5.50	28.56	41.88	99.94	92.12	54.00	38.12	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 155 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:High

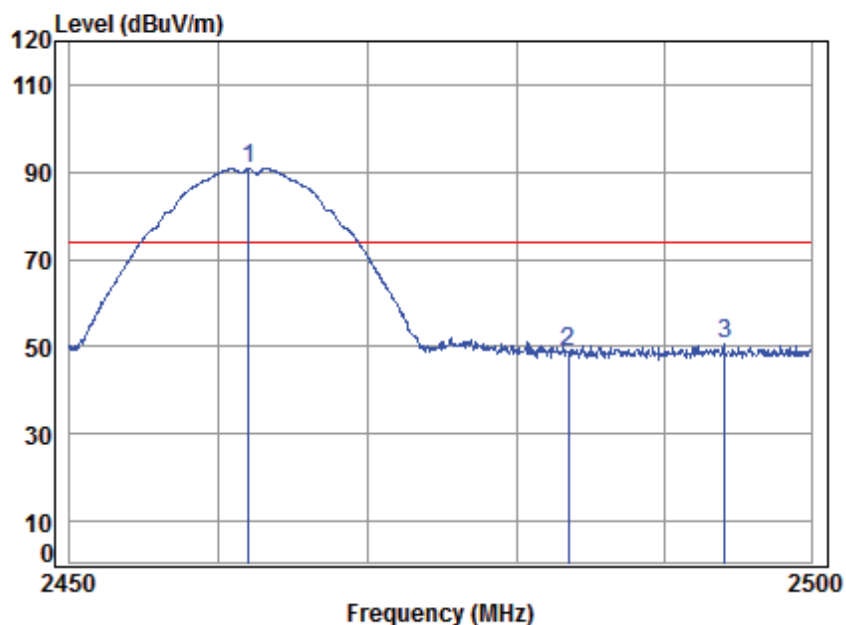

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	98.43	90.74	74.00	16.74	peak
2	2483.500	5.60	28.67	41.91	56.63	48.99	74.00	-25.01	peak
3	2494.098	5.61	28.69	41.92	58.32	50.70	74.00	-23.30	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 156 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:High

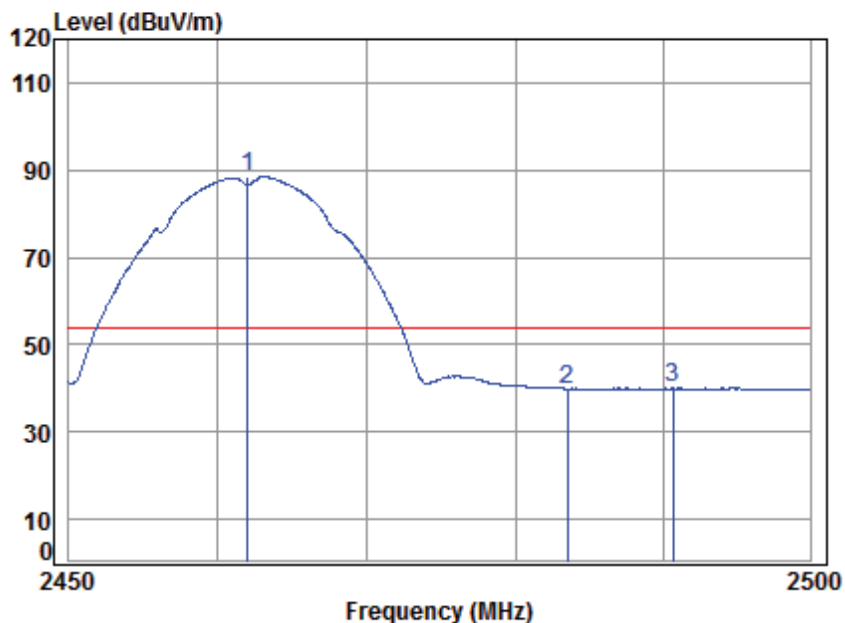

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	96.08	88.39	54.00	34.39 Average
2	2483.500	5.60	28.67	41.91	47.55	39.91	54.00	-14.09 Average
3	2490.674	5.61	28.68	41.91	47.67	40.05	54.00	-13.95 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 157 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:High

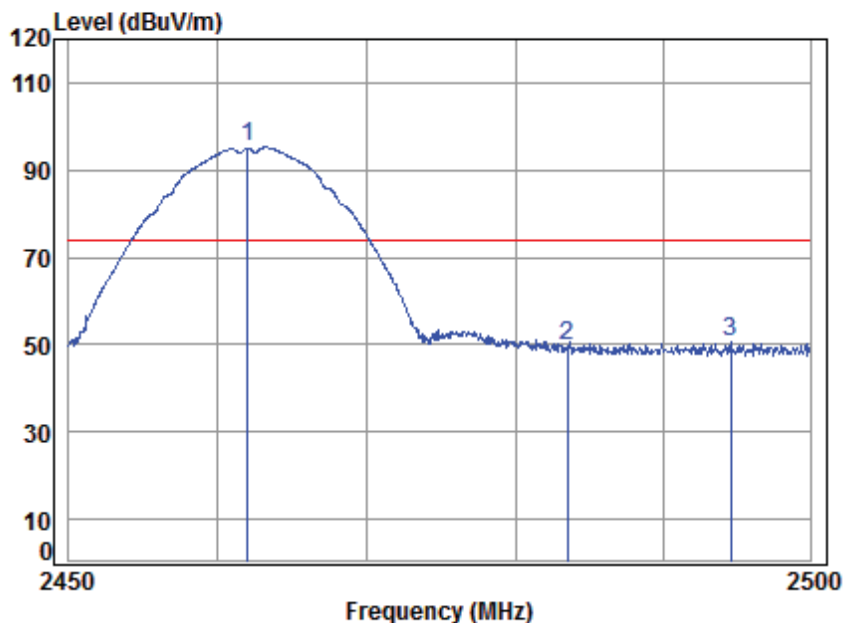

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	102.90	95.21	74.00	21.21 peak
2	2483.500	5.60	28.67	41.91	57.15	49.51	74.00	-24.49 peak
3	2494.602	5.61	28.69	41.92	58.16	50.54	74.00	-23.46 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 158 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:High

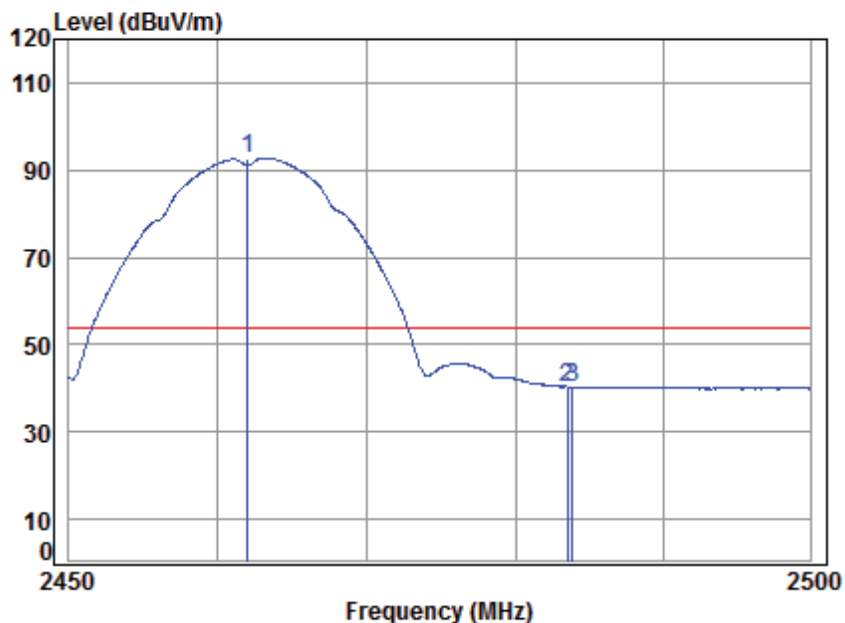

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11B
Power Setting: 18

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	100.52	92.83	54.00	38.83 Average
2	2483.500	5.60	28.67	41.91	48.01	40.37	54.00	-13.63 Average
3	2483.890	5.60	28.67	41.91	47.89	40.25	54.00	-13.75 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 159 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:Low

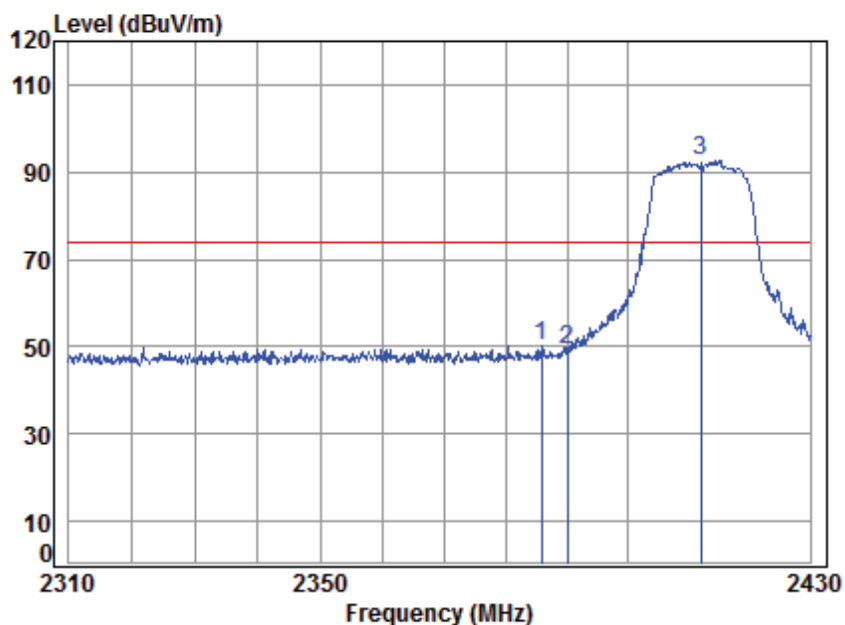

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2385.857	5.47	28.51	41.87	58.21	50.32	74.00	-23.68	peak
2	2390.000	5.47	28.52	41.87	57.28	49.40	74.00	-24.60	peak
3 *	2412.000	5.50	28.56	41.88	100.49	92.67	74.00	18.67	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 160 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:Low

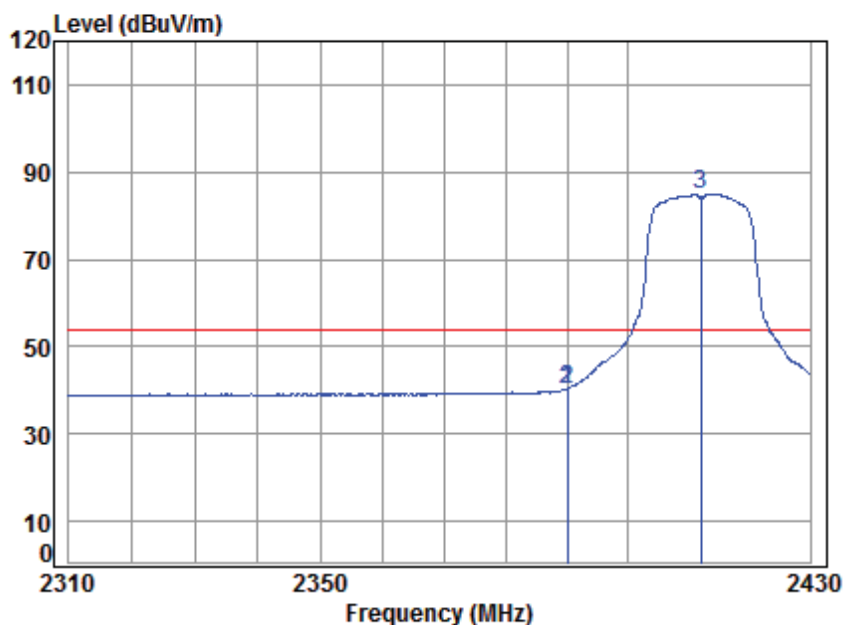

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	5.47	28.52	41.87	48.19	40.31	54.00	-13.69	Average
2	2390.000	5.47	28.52	41.87	48.19	40.31	54.00	-13.69	Average
3 *	2412.000	5.50	28.56	41.88	92.68	84.86	54.00	30.86	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 161 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:Low

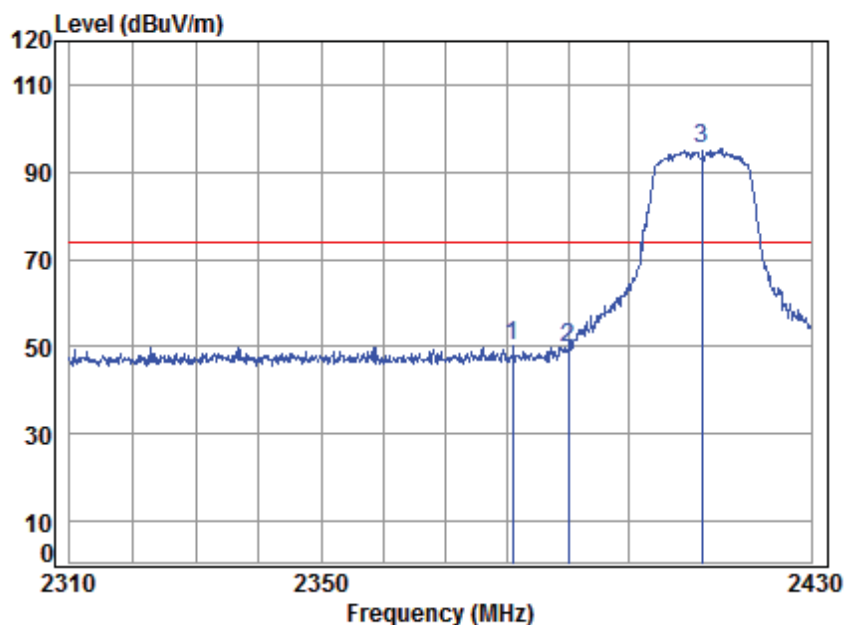

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2381.028	5.46	28.50	41.87	58.07	50.16	74.00	-23.84	peak
2	2390.000	5.47	28.52	41.87	57.39	49.51	74.00	-24.49	peak
3 *	2412.000	5.50	28.56	41.88	103.14	95.32	74.00	21.32	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 162 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:Low

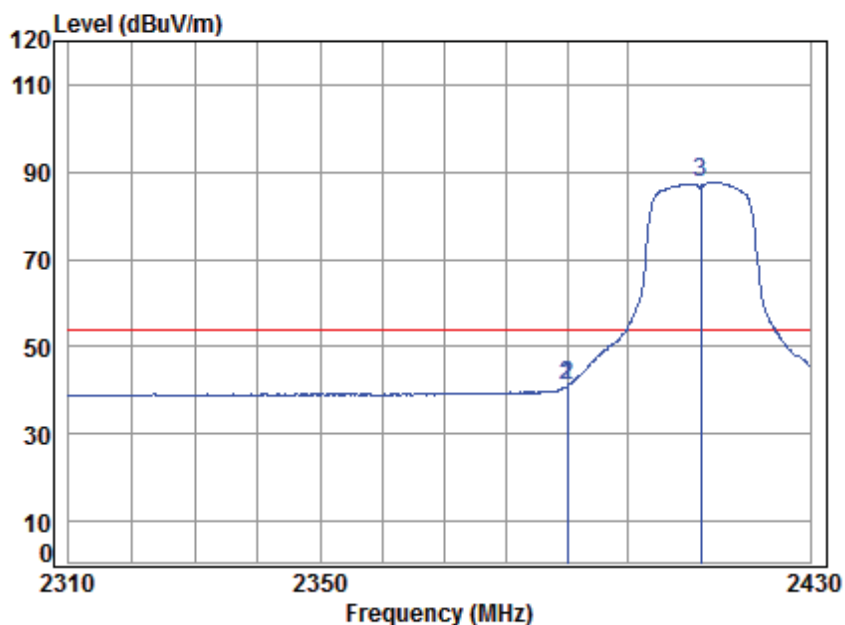

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	5.47	28.52	41.87	48.81	40.93	54.00	-13.07	Average
2	2390.000	5.47	28.52	41.87	48.81	40.93	54.00	-13.07	Average
3 *	2412.000	5.50	28.56	41.88	95.39	87.57	54.00	33.57	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 163 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:High

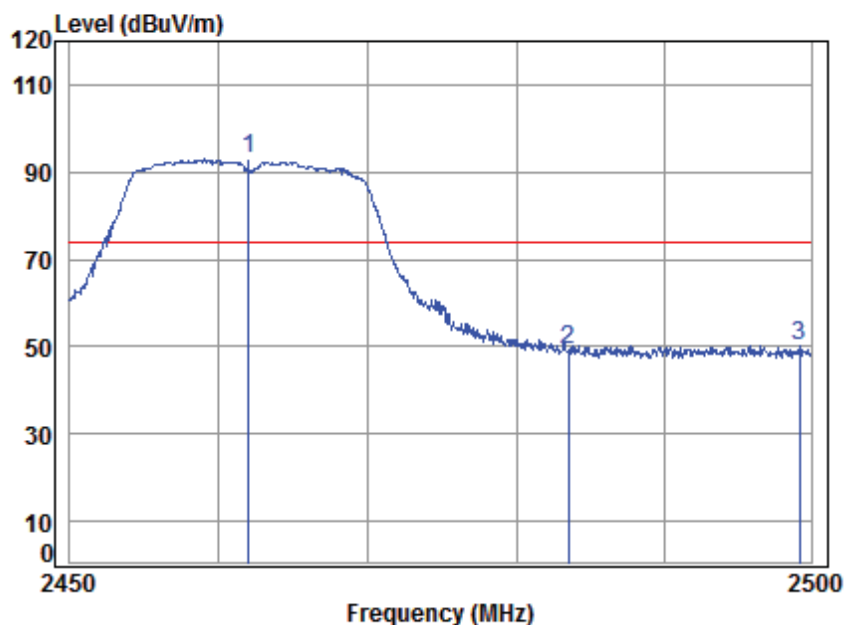

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	100.61	92.92	74.00	18.92 peak
2	2483.500	5.60	28.67	41.91	56.91	49.27	74.00	-24.73 peak
3	2499.242	5.62	28.70	41.92	57.89	50.29	74.00	-23.71 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 164 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:High

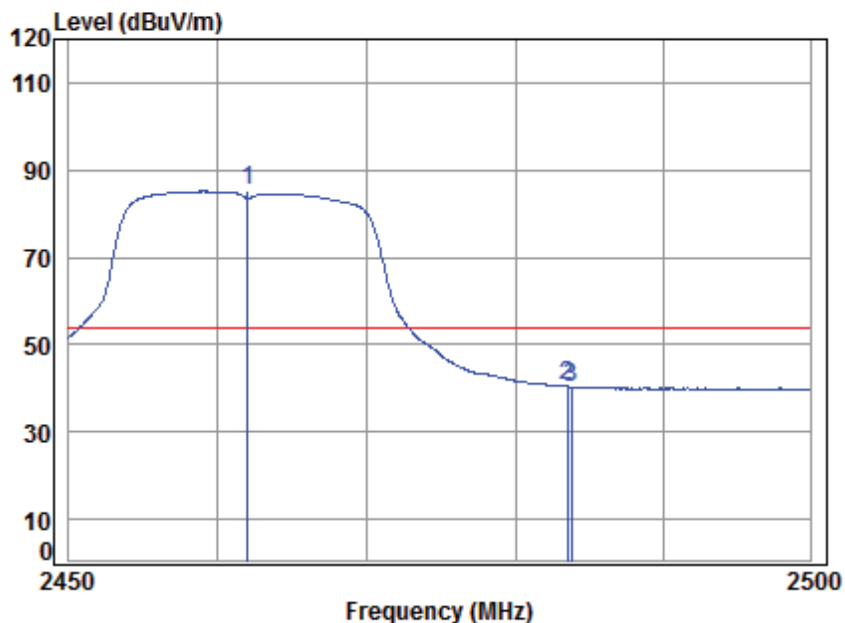

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	92.83	85.14	54.00	31.14 Average
2	2483.500	5.60	28.67	41.91	48.10	40.46	54.00	-13.54 Average
3	2483.790	5.60	28.67	41.91	48.01	40.37	54.00	-13.63 Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 165 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:High

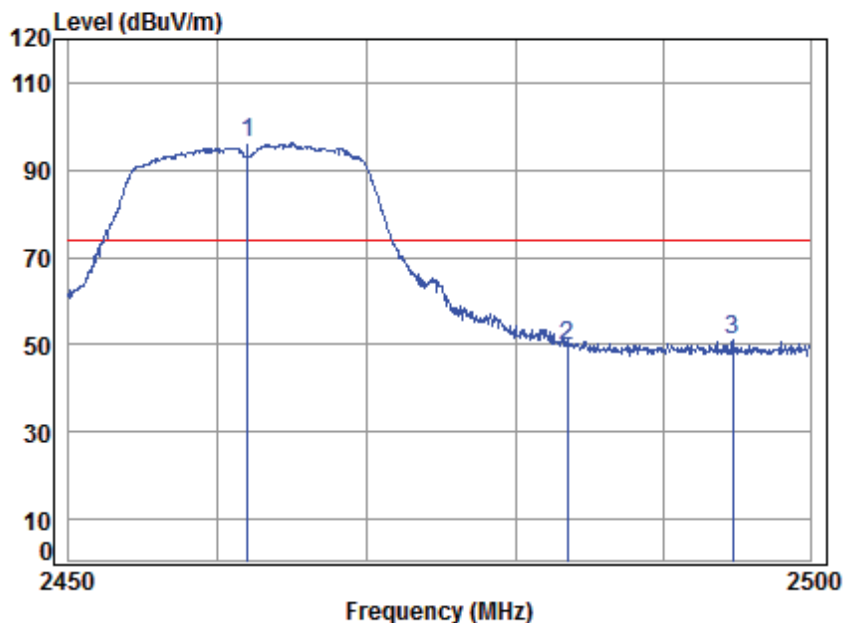

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.90	103.76	96.07	74.00	22.07 peak
2	2483.500	5.60	28.67	41.91	57.29	49.65	74.00	-24.35 peak
3	2494.753	5.61	28.69	41.92	58.50	50.88	74.00	-23.12 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 166 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:High

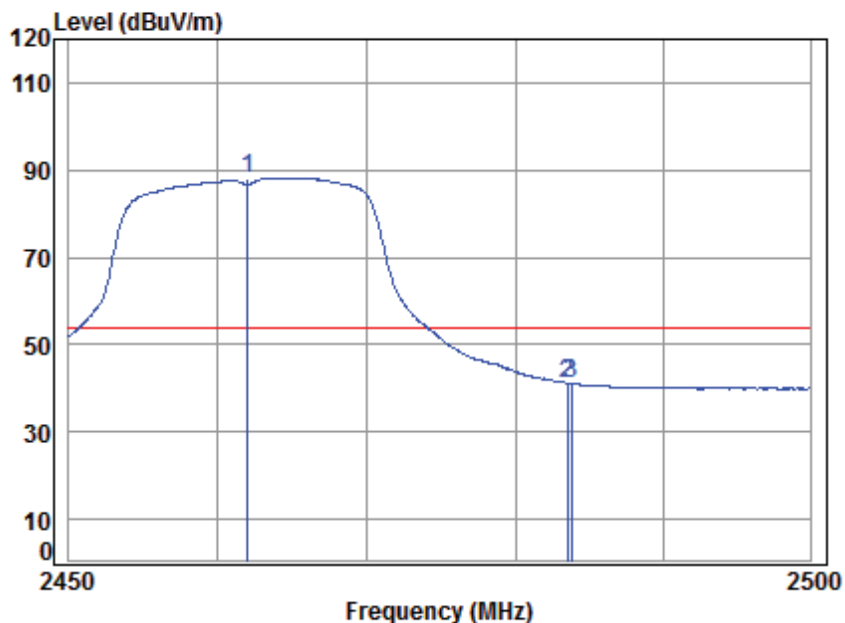

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11G
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	95.97	88.28	54.00	34.28	Average
2	2483.500	5.60	28.67	41.91	48.90	41.26	54.00	-12.74	Average
3	2483.790	5.60	28.67	41.91	48.73	41.09	54.00	-12.91	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 167 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:Low

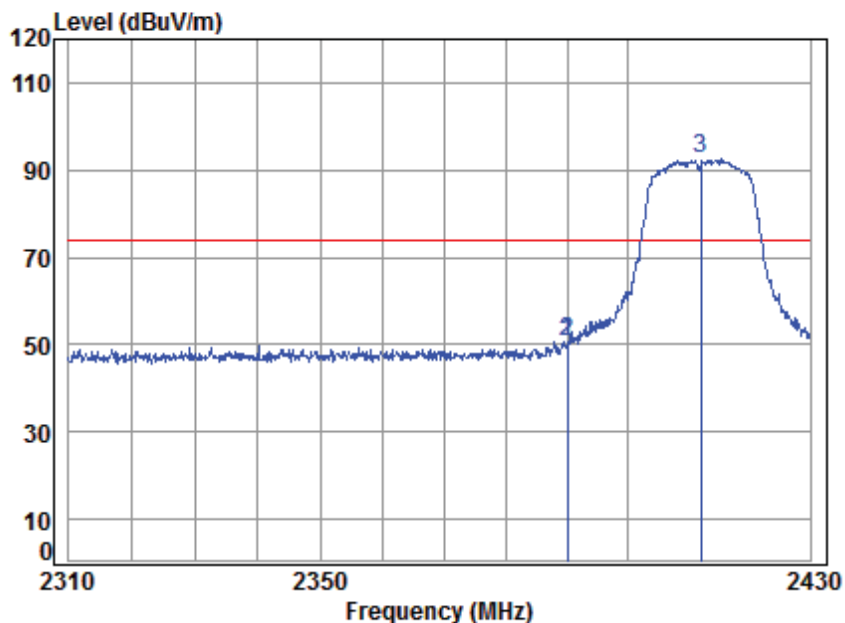

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	5.47	28.52	41.87	58.68	50.80	74.00	-23.20	peak
2	2390.000	5.47	28.52	41.87	58.68	50.80	74.00	-23.20	peak
3 *	2412.000	5.50	28.56	41.88	100.32	92.50	74.00	18.50	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 168 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:Low

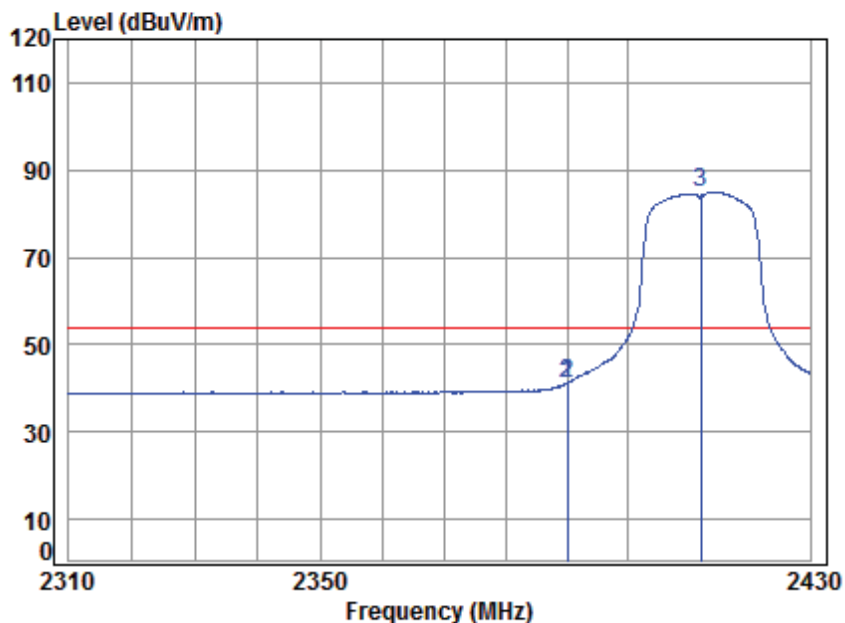

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	5.47	28.52	41.87	49.17	41.29	54.00	-12.71	Average
2	2390.000	5.47	28.52	41.87	49.17	41.29	54.00	-12.71	Average
3 *	2412.000	5.50	28.56	41.88	92.66	84.84	54.00	30.84	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 169 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:Low

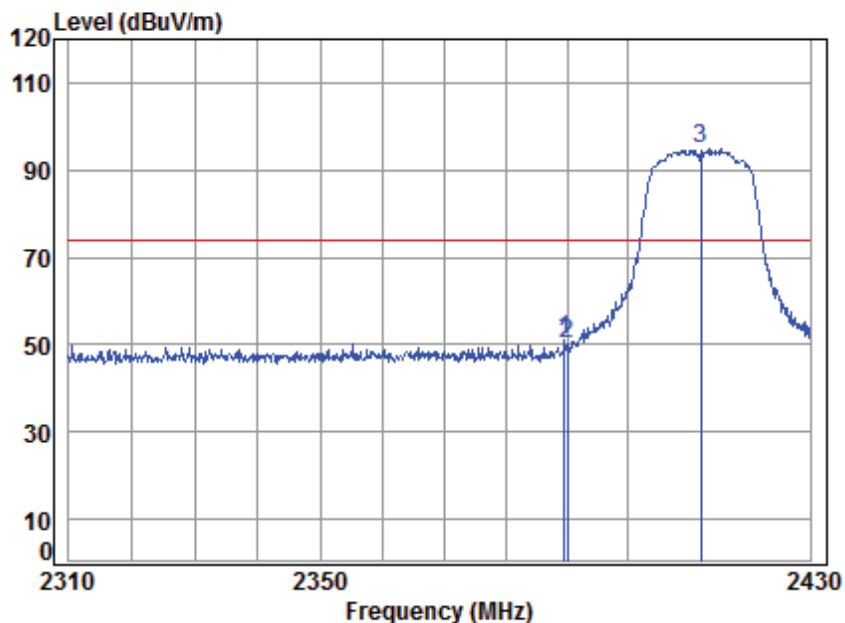

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.484	5.47	28.52	41.87	58.96	51.08	74.00	-22.92	peak
2	2390.000	5.47	28.52	41.87	58.25	50.37	74.00	-23.63	peak
3 *	2412.000	5.50	28.56	41.88	102.55	94.73	74.00	20.73	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 170 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:Low

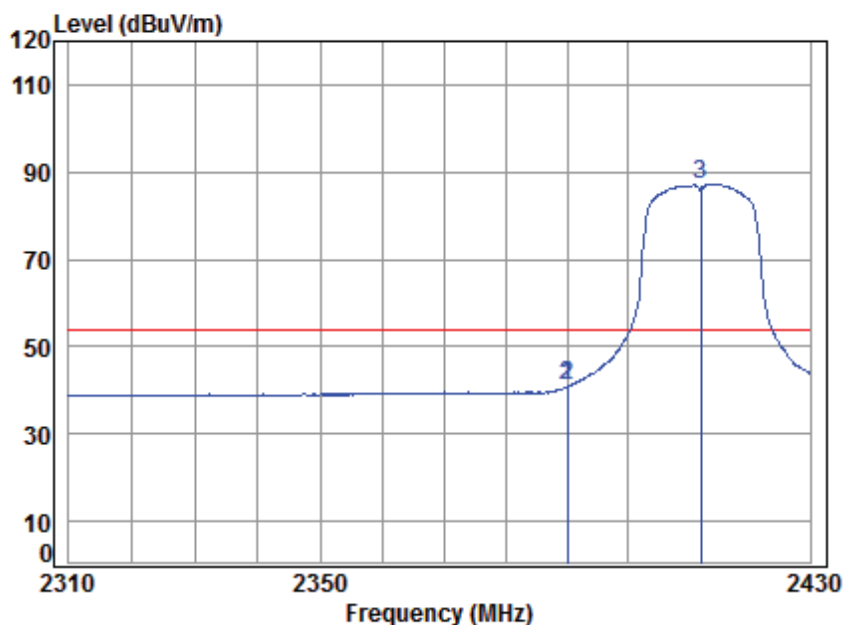

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.968	5.47	28.52	41.87	48.72	40.84	54.00	-13.16	Average
2	2390.000	5.47	28.52	41.87	48.72	40.84	54.00	-13.16	Average
3 *	2412.000	5.50	28.56	41.88	94.92	87.10	54.00	33.10	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 171 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:High

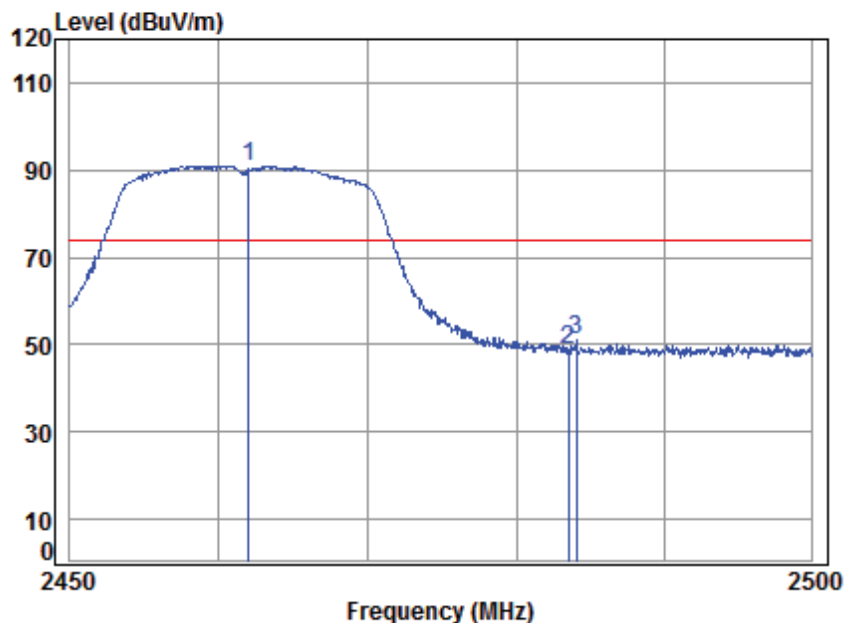

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	98.71	91.02	74.00	17.02	peak
2	2483.500	5.60	28.67	41.91	56.25	48.61	74.00	-25.39	peak
3	2484.091	5.60	28.67	41.91	58.80	51.16	74.00	-22.84	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 172 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:High

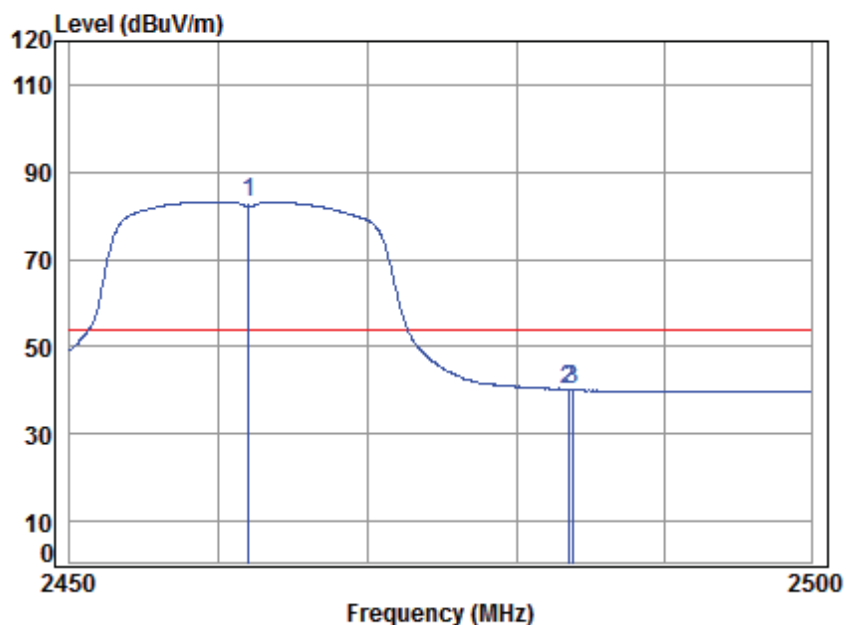

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	90.90	83.21	54.00	29.21	Average
2	2483.500	5.60	28.67	41.91	47.84	40.20	54.00	-13.80	Average
3	2483.790	5.60	28.67	41.91	47.91	40.27	54.00	-13.73	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 173 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:High

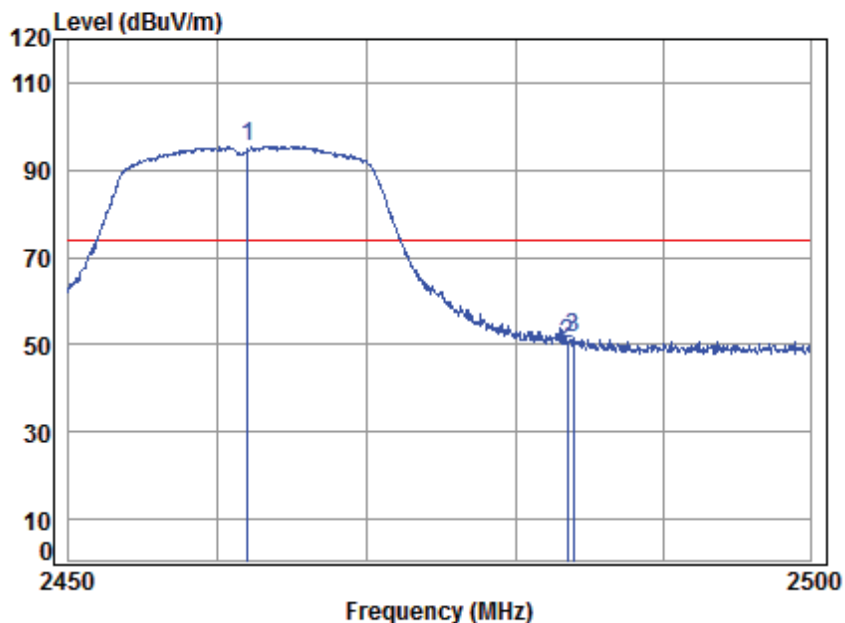

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	103.20	95.51	74.00	21.51	peak
2	2483.500	5.60	28.67	41.91	57.90	50.26	74.00	-23.74	peak
3	2483.940	5.60	28.67	41.91	58.99	51.35	74.00	-22.65	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 174 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:High

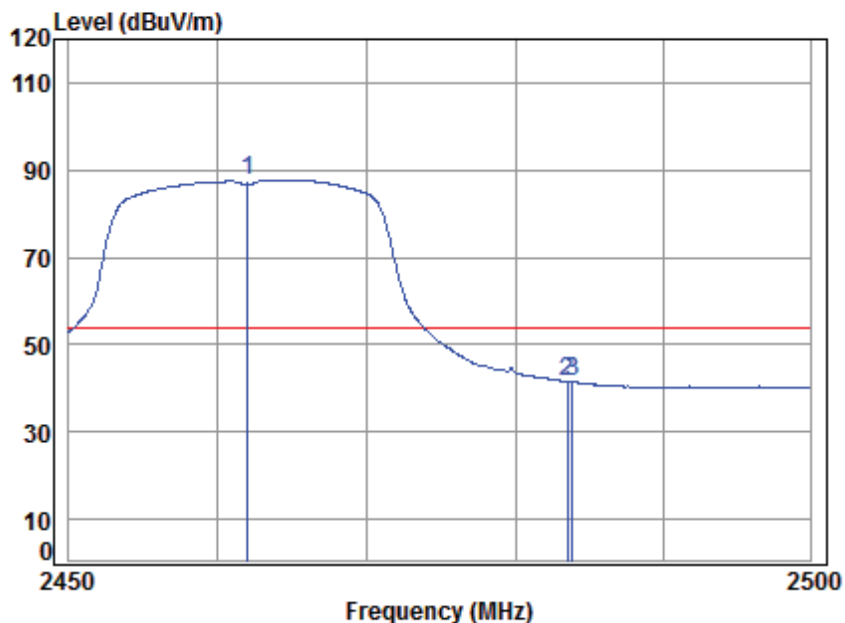

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 Band edge
Note : 2.4G WiFi 11N20
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.90	95.49	87.80	54.00	33.80	Average
2	2483.500	5.60	28.67	41.91	49.13	41.49	54.00	-12.51	Average
3	2483.890	5.60	28.67	41.91	49.09	41.45	54.00	-12.55	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 175 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:Low

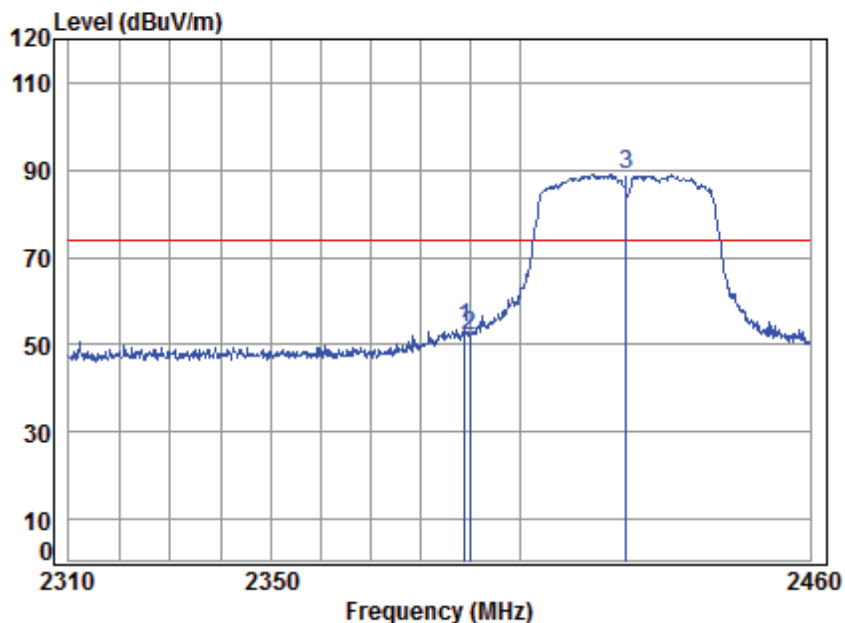

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2422 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2388.925	5.47	28.52	41.87	61.79	53.91	74.00	-20.09	peak
2	2390.000	5.47	28.52	41.87	59.94	52.06	74.00	-21.94	peak
3 *	2422.000	5.52	28.57	41.89	96.77	88.97	74.00	14.97	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 176 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:Low

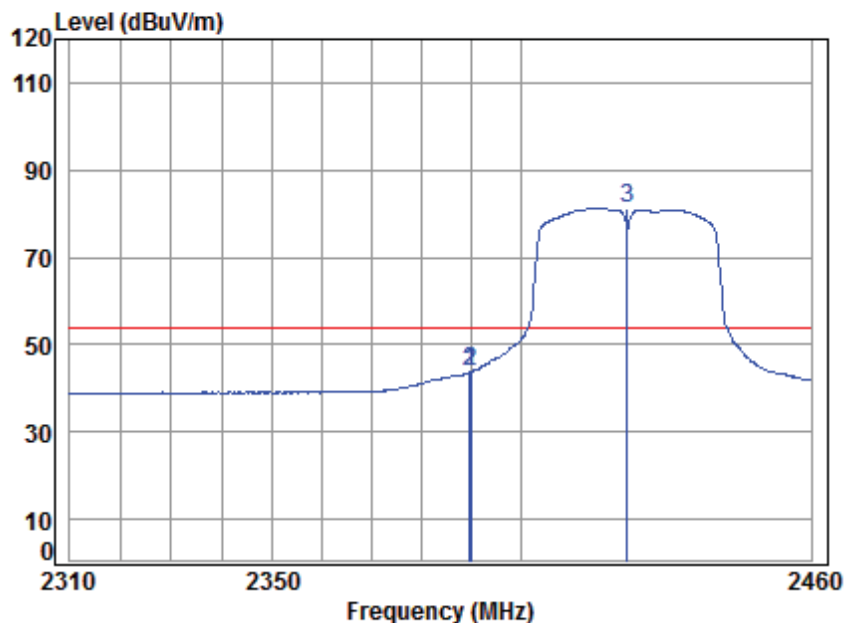

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2422 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.677	5.47	28.52	41.87	51.49	43.61	54.00	-10.39	Average
2	2390.000	5.47	28.52	41.87	51.64	43.76	54.00	-10.24	Average
3 *	2422.000	5.52	28.57	41.89	88.94	81.14	54.00	27.14	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 177 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:Low

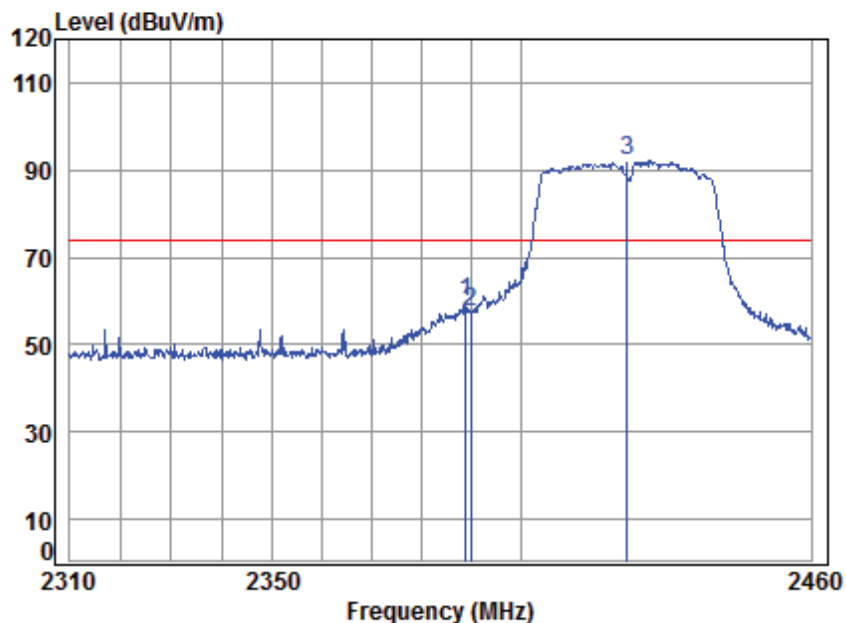

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2422 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2388.925	5.47	28.52	41.87	67.59	59.71	74.00	-14.29	peak
2	2390.000	5.47	28.52	41.87	65.22	57.34	74.00	-16.66	peak
3 *	2422.000	5.52	28.57	41.89	99.82	92.02	74.00	18.02	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 178 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:Low

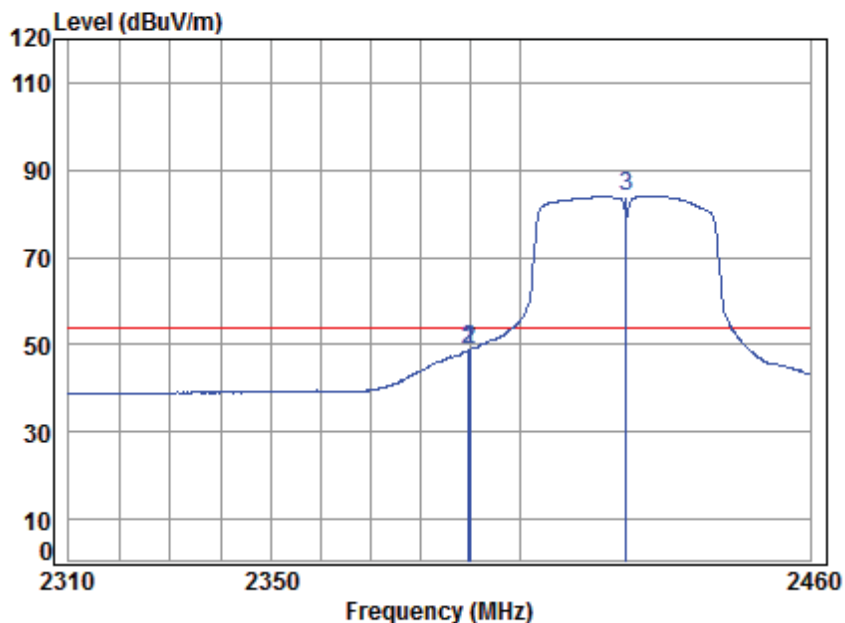

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2422 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2389.827	5.47	28.52	41.87	56.70	48.82	54.00	-5.18	Average
2	2390.000	5.47	28.52	41.87	56.78	48.90	54.00	-5.10	Average
3 *	2422.000	5.52	28.57	41.89	91.79	83.99	54.00	29.99	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 179 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:High

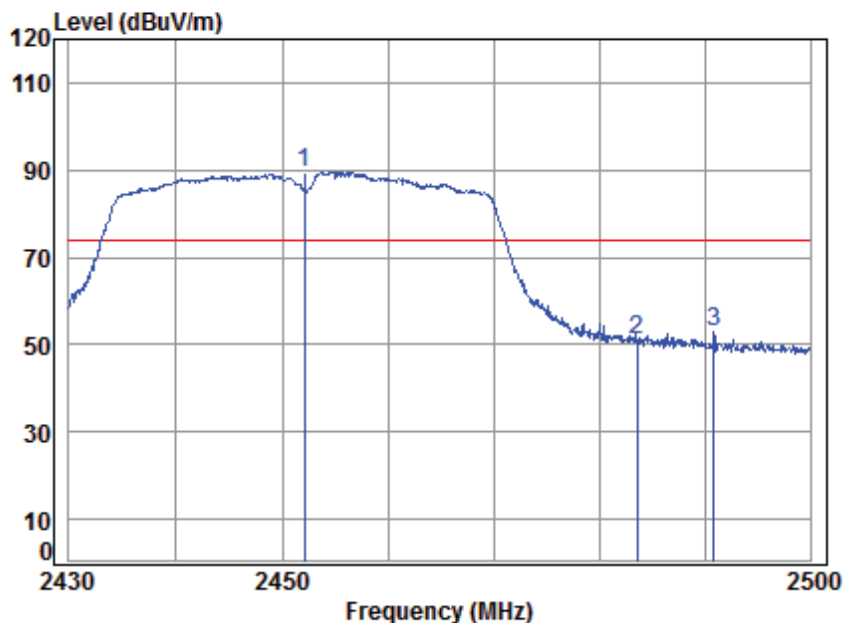

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2452 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 16.5

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2452.000	5.56	28.62	41.90	97.31	89.59	74.00	15.59 peak
2	2483.500	5.60	28.67	41.91	58.61	50.97	74.00	-23.03 peak
3	2490.787	5.61	28.69	41.91	60.47	52.86	74.00	-21.14 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 180 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:High

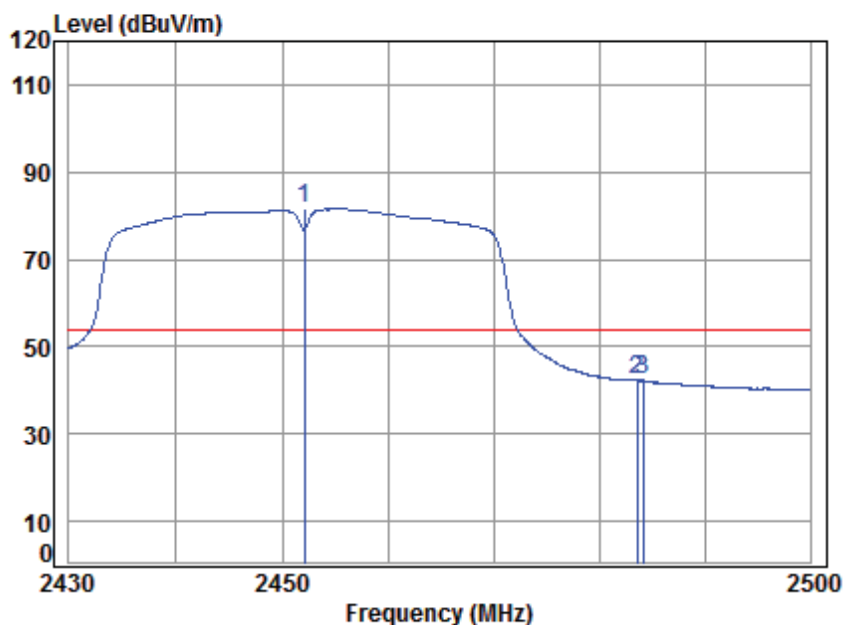

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2452 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2452.000	5.56	28.62	41.90	89.27	81.55	54.00	27.55	Average
2	2483.500	5.60	28.67	41.91	50.03	42.39	54.00	-11.61	Average
3	2484.076	5.60	28.67	41.91	49.94	42.30	54.00	-11.70	Average




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 181 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:High

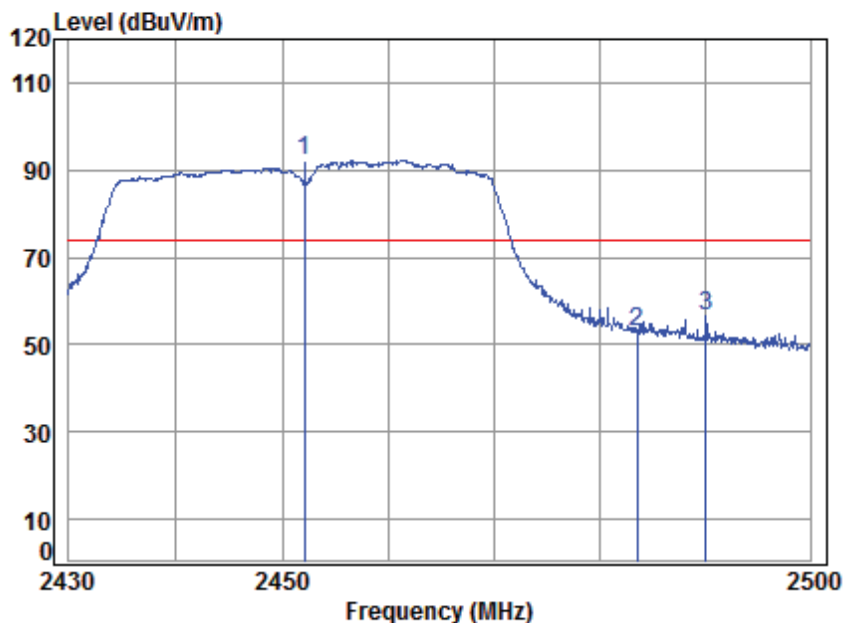

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2452 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2452.000	5.56	28.62	41.90	99.83	92.11	74.00	18.11	peak
2	2483.500	5.60	28.67	41.91	60.61	52.97	74.00	-21.03	peak
3	2490.080	5.61	28.68	41.91	64.39	56.77	74.00	-17.23	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 182 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:High

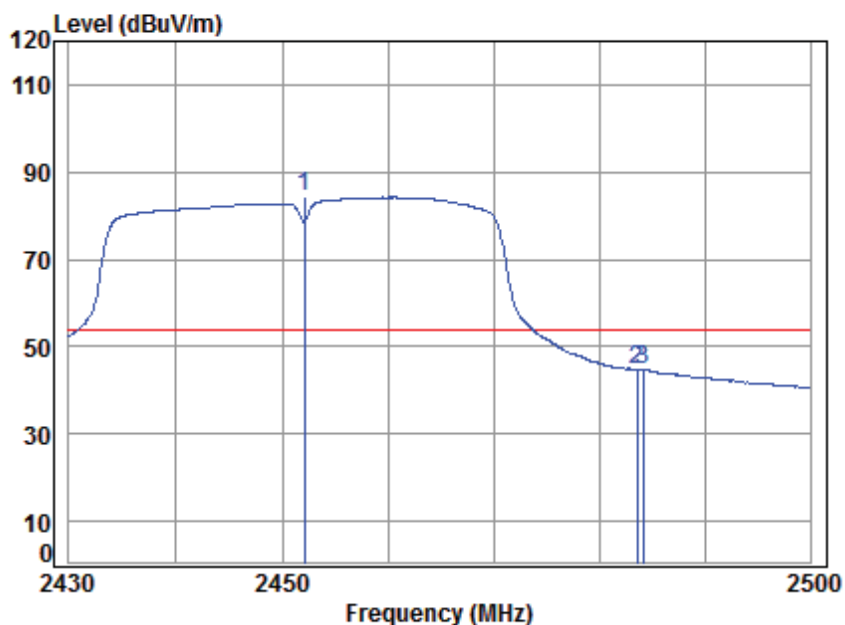

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2452 Band edge
Note : 2.4G WiFi 11N40
Power Setting: 16.5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2452.000	5.56	28.62	41.90	91.93	84.21	54.00	30.21	Average
2	2483.500	5.60	28.67	41.91	52.30	44.66	54.00	-9.34	Average
3	2484.076	5.60	28.67	41.91	52.34	44.70	54.00	-9.30	Average



7.8 Radiated Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.247(d)

Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.


7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 25.5 °C Humidity: 65.2 % RH Atmospheric Pressure: 1020 mbar

Test mode: a:TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.

7.8.2 Test Setup Diagram

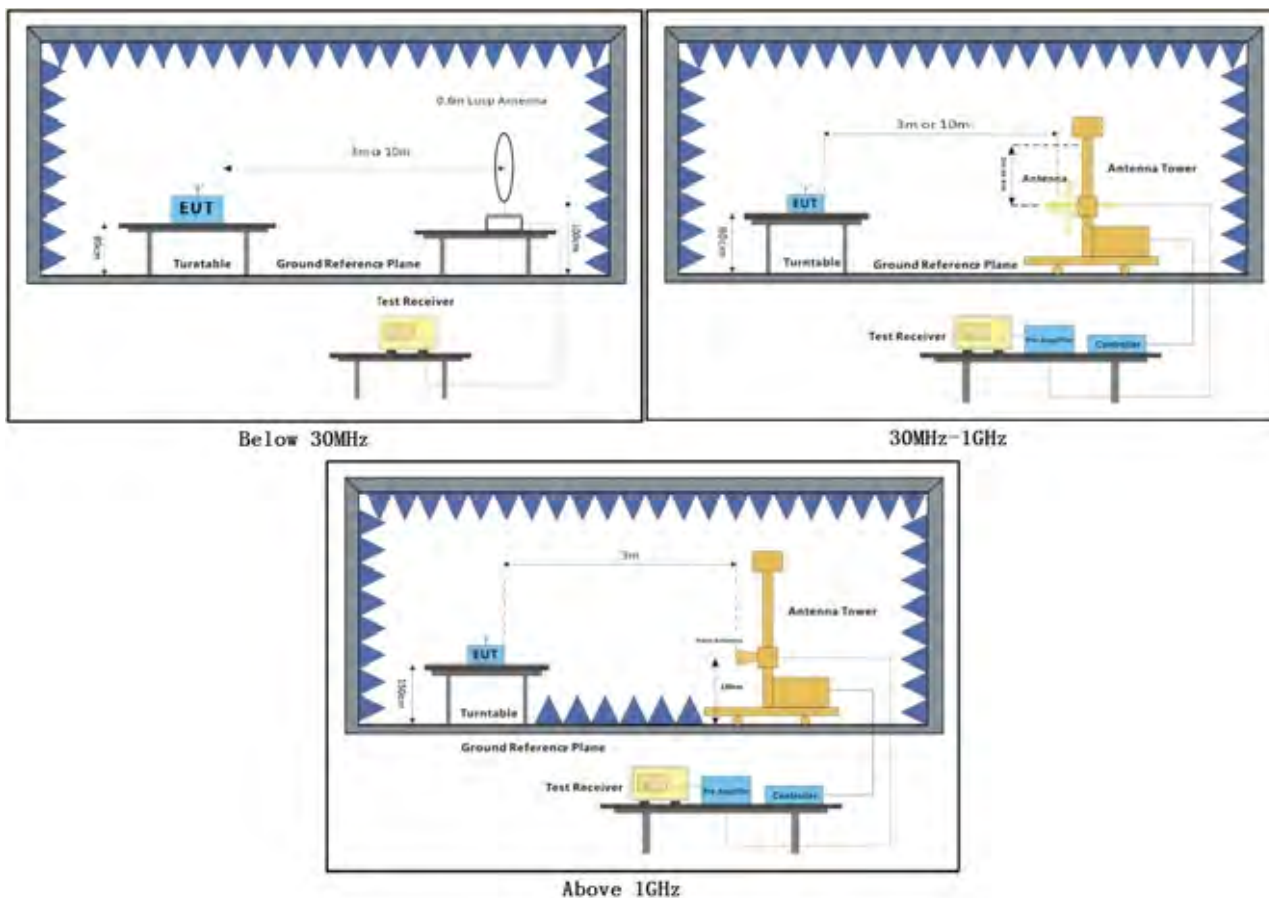



7.8.3 Measurement Procedure and Data


- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$
- 3) Scan from 9kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.



Mode:a; Polarization:Horizontal;

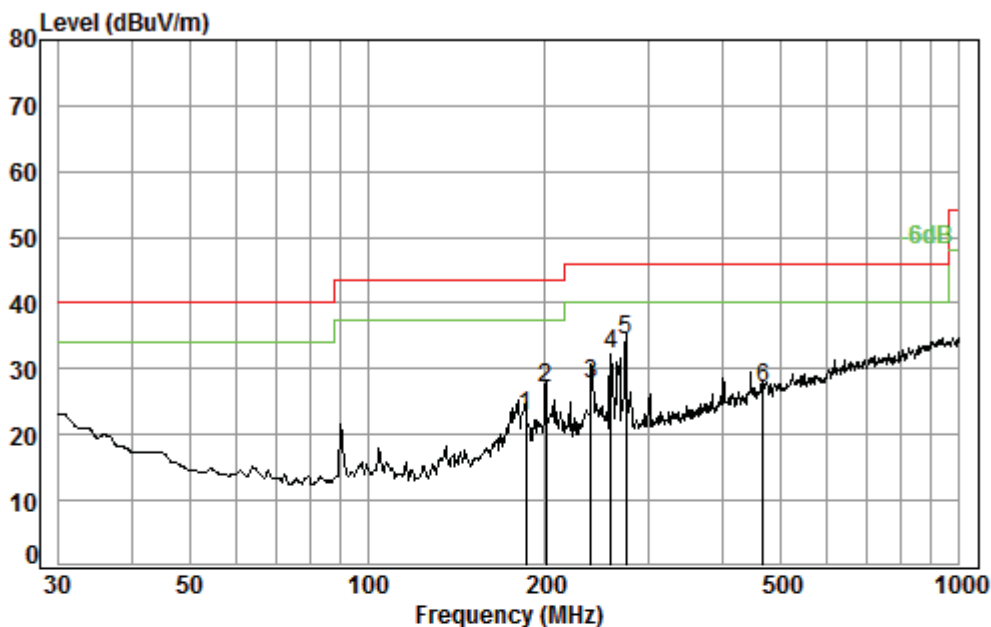

Condition: 3m HORIZONTAL


Job No. : 09244CR

Test Mode: a

	Freq	Cable	Ant	Preamp	Read		Limit	Over
	MHz	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	185.14	1.38	16.06	26.95	32.39	22.88	43.50	-20.62
2	200.69	1.40	16.53	26.90	36.04	27.07	43.50	-16.43
3	239.15	1.62	18.73	26.79	34.11	27.67	46.00	-18.33
4	258.33	1.71	19.08	26.74	38.29	32.34	46.00	-13.66
5 pp	273.23	1.78	18.90	26.70	40.25	34.23	46.00	-11.77
6	467.24	2.48	23.93	27.48	28.22	27.15	46.00	-18.85



Mode:a; Polarization:Vertical;

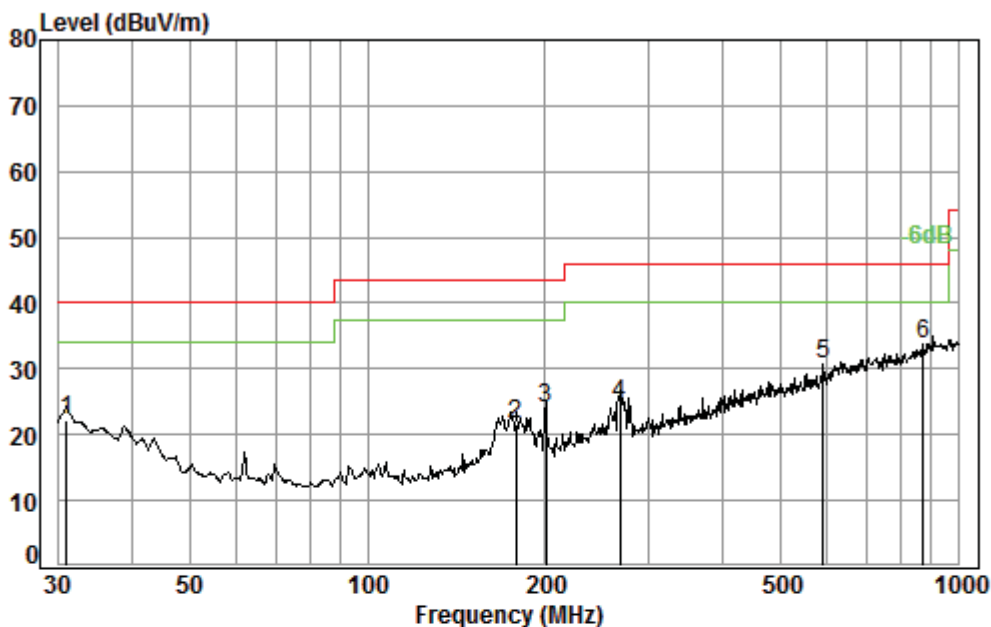

Condition: 3m VERTICAL

Job No. : 09244CR

Test Mode: a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	30.96	0.60	21.95	27.45	27.20	22.30	40.00	-17.70
2	178.13	1.37	15.86	26.98	31.32	21.57	43.50	-21.93
3	200.69	1.40	16.53	26.90	32.94	23.97	43.50	-19.53
4	267.55	1.76	18.98	26.71	30.66	24.69	46.00	-21.31
5	588.91	2.69	26.40	27.91	29.43	30.61	46.00	-15.39
6 pp	872.18	3.49	29.45	27.21	28.13	33.86	46.00	-12.14




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 188 of 346

Test data for Antenna1:

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:Low

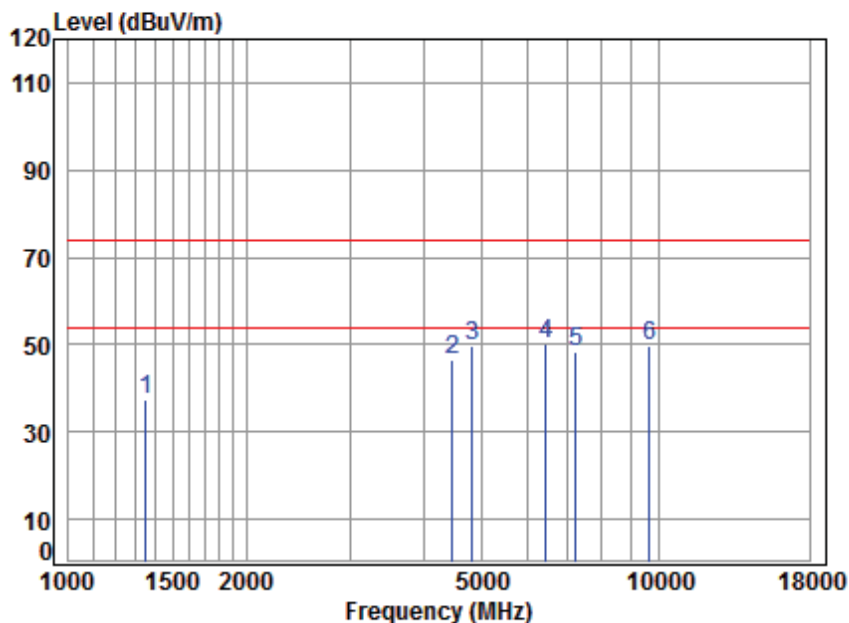

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 TX RSE
Note : 2.4G WIFI 11B
Power Setting:

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1350.667	4.98	25.23	41.30	48.47	37.38	74.00	-36.62	peak
2	4469.214	7.53	33.55	42.41	47.88	46.55	74.00	-27.45	peak
3	4824.000	7.91	34.00	42.47	50.42	49.86	74.00	-24.14	peak
4	6451.353	11.45	35.55	41.25	44.49	50.24	74.00	-23.76	peak
5	7236.000	10.07	36.09	40.69	42.99	48.46	74.00	-25.54	peak
6	9648.000	10.77	37.69	37.68	39.11	49.89	74.00	-24.11	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 189 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:Low

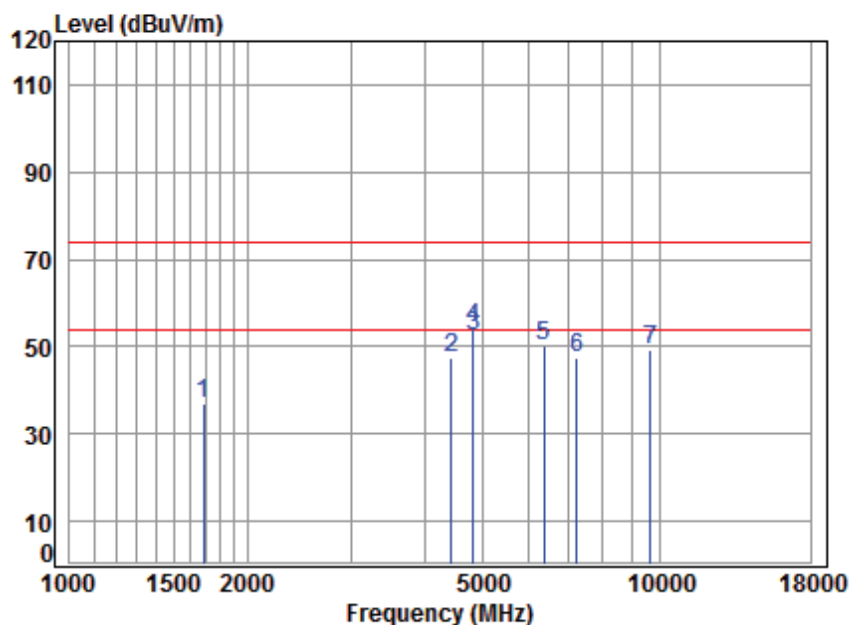

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 TX RSE
Note : 2.4G WIFI 11B
Power Setting:

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1687.347	5.24	26.62	41.52	46.83	37.17	74.00	-36.83	peak
2	4443.453	7.50	33.50	42.41	48.69	47.28	74.00	-26.72	peak
3	4824.000	7.90	33.99	42.47	53.04	52.46	54.00	-1.54	Average
4	4824.000	7.91	34.00	42.47	54.90	54.34	74.00	-19.66	peak
5	6377.195	11.31	35.48	41.31	44.73	50.21	74.00	-23.79	peak
6	7236.000	10.07	36.09	40.69	42.06	47.53	74.00	-26.47	peak
7	9648.000	10.77	37.69	37.68	38.63	49.41	74.00	-24.59	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 190 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:middle

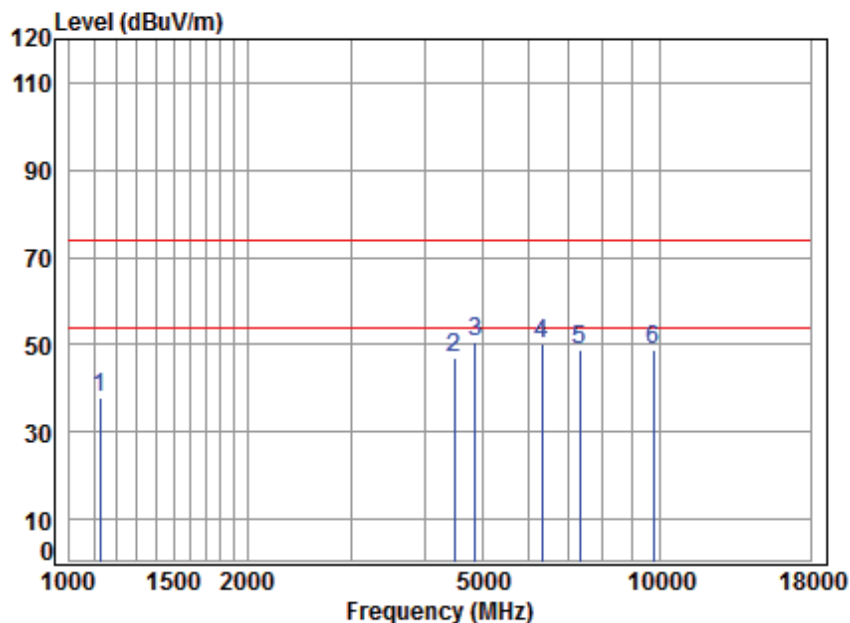

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11B
Power Setting:

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1125.813	4.11	24.24	41.12	50.73	37.96	74.00	-36.04	peak
2	4495.125	7.55	33.59	42.42	48.41	47.13	74.00	-26.87	peak
3	4874.000	7.96	34.05	42.48	51.10	50.63	74.00	-23.37	peak
4	6322.136	11.20	35.43	41.35	45.06	50.34	74.00	-23.66	peak
5	7311.000	10.05	36.15	40.64	43.41	48.97	74.00	-25.03	peak
6	9748.000	10.82	37.75	37.54	38.01	49.04	74.00	-24.96	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 191 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:middle

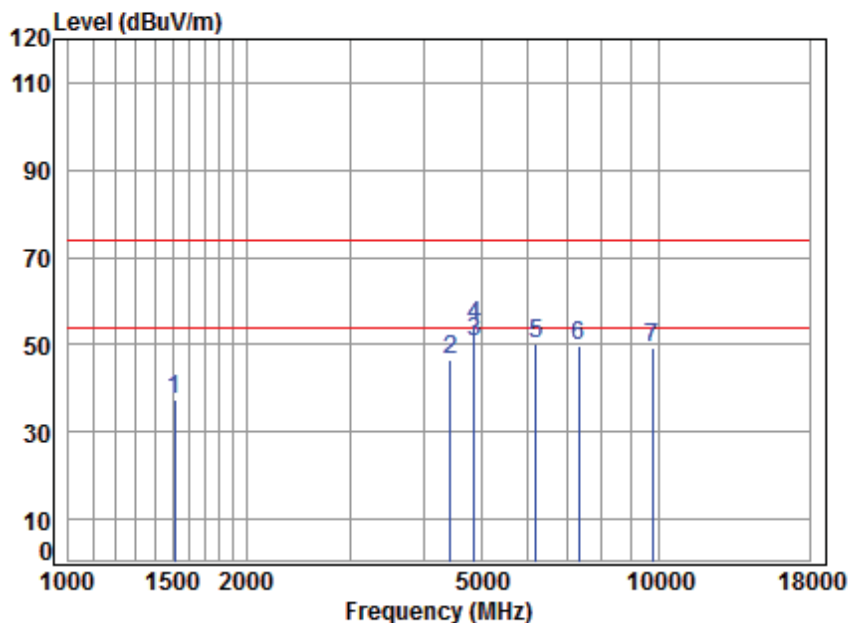

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11B
Power Setting:

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1511.833	5.46	25.85	41.41	47.72	37.62	74.00	-36.38	peak
2	4430.628	7.48	33.48	42.41	48.10	46.65	74.00	-27.35	peak
3	4874.000	7.96	34.05	42.48	51.11	50.64	54.00	-3.36	Average
4	4874.000	7.96	34.05	42.48	54.60	54.13	74.00	-19.87	peak
5	6195.508	10.96	35.30	41.45	45.26	50.07	74.00	-23.93	peak
6	7311.000	10.05	36.15	40.64	44.15	49.71	74.00	-24.29	peak
7	9748.000	10.82	37.75	37.54	38.16	49.19	74.00	-24.81	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 192 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:High

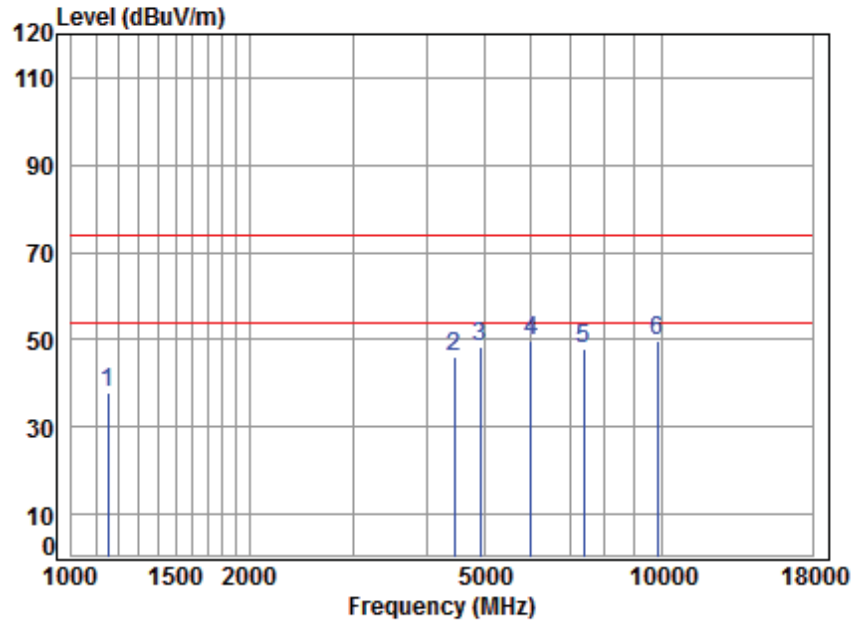

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 TX RSE
Note : 2.4G WIFI 11B
Power Setting:

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1152.148	4.22	24.37	41.14	50.24	37.69	74.00	-36.31	peak
2	4456.315	7.51	33.53	42.41	47.65	46.28	74.00	-27.72	peak
3	4924.000	8.01	34.11	42.49	48.91	48.54	74.00	-25.46	peak
4	6001.626	10.57	35.10	41.61	45.72	49.78	74.00	-24.22	peak
5	7386.000	10.03	36.21	40.59	42.10	47.75	74.00	-26.25	peak
6	9848.000	10.87	37.81	37.41	38.54	49.81	74.00	-24.19	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 193 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:High

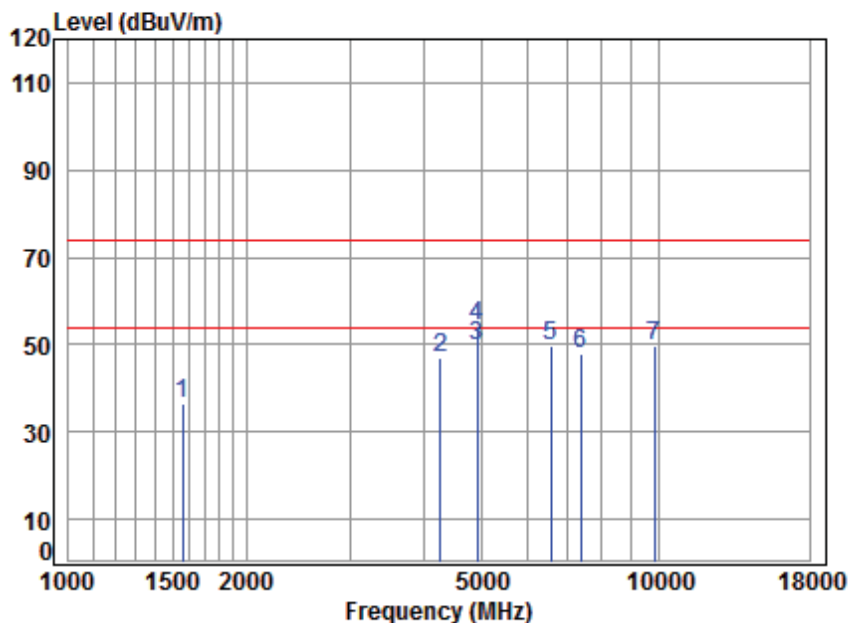

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 TX RSE
Note : 2.4G WIFI 11B
Power Setting:

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1560.673	5.40	26.08	41.45	46.62	36.65	74.00	-37.35	peak
2	4267.237	7.30	33.19	42.38	49.02	47.13	74.00	-26.87	peak
3	4924.000	8.02	34.12	42.49	50.18	49.83	54.00	-4.17	Average
4	4924.000	8.01	34.11	42.49	54.57	54.20	74.00	-19.80	peak
5	6564.209	11.35	35.64	41.17	44.02	49.84	74.00	-24.16	peak
6	7386.000	10.03	36.21	40.59	42.31	47.96	74.00	-26.04	peak
7	9848.000	10.87	37.81	37.41	38.67	49.94	74.00	-24.06	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 194 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:Low

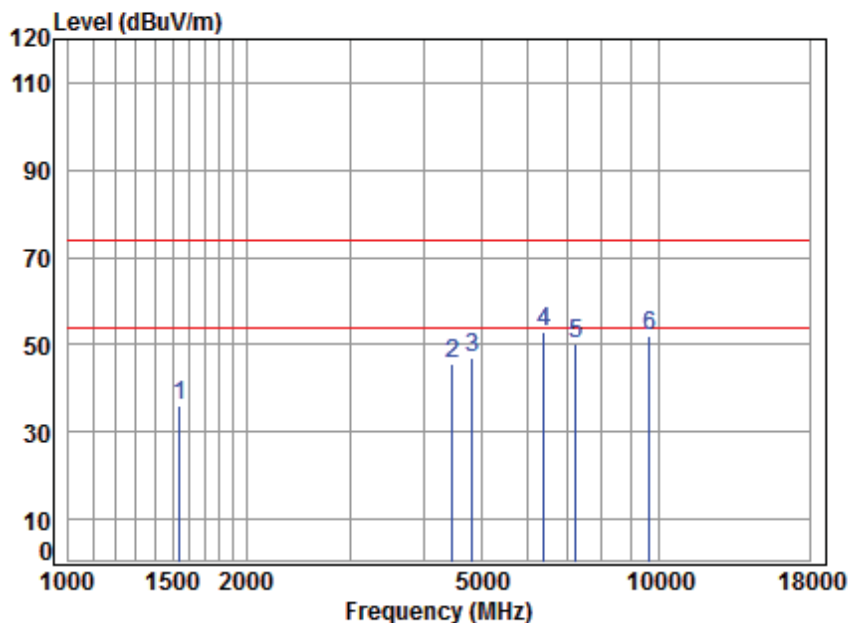

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 TX RSE
Note : 2.4G WIFI 11G
Power Setting:

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1542.733	5.42	26.00	41.43	46.28	36.27	74.00	-37.73	peak
2	4469.214	7.53	33.55	42.41	46.99	45.66	74.00	-28.34	peak
3	4824.000	7.91	34.00	42.47	47.40	46.84	74.00	-27.16	peak
4	6395.654	11.34	35.50	41.30	47.48	53.02	74.00	-20.98	peak
5	7236.000	10.07	36.09	40.69	44.69	50.16	74.00	-23.84	peak
6	9648.000	10.77	37.69	37.68	41.29	52.07	74.00	-21.93	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 195 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:Low

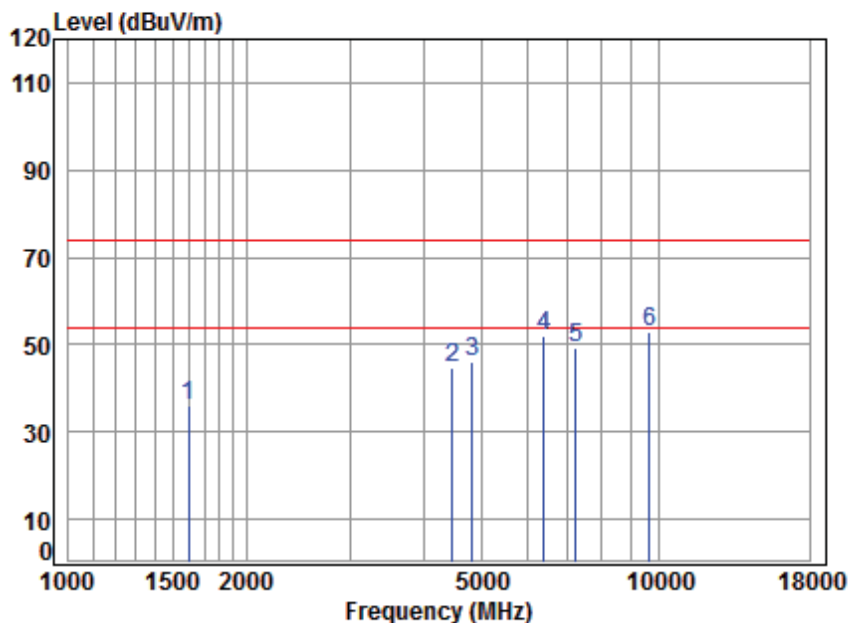

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 TX RSE
Note : 2.4G WIFI 11G
Power Setting:

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1597.181	5.35	26.24	41.47	45.71	35.83	74.00	-38.17	peak
2	4469.214	7.53	33.55	42.41	45.92	44.59	74.00	-29.41	peak
3	4824.000	7.91	34.00	42.47	46.44	45.88	74.00	-28.12	peak
4	6395.654	11.34	35.50	41.30	46.41	51.95	74.00	-22.05	peak
5	7236.000	10.07	36.09	40.69	44.01	49.48	74.00	-24.52	peak
6	9648.000	10.77	37.69	37.68	41.95	52.73	74.00	-21.27	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 196 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:middle

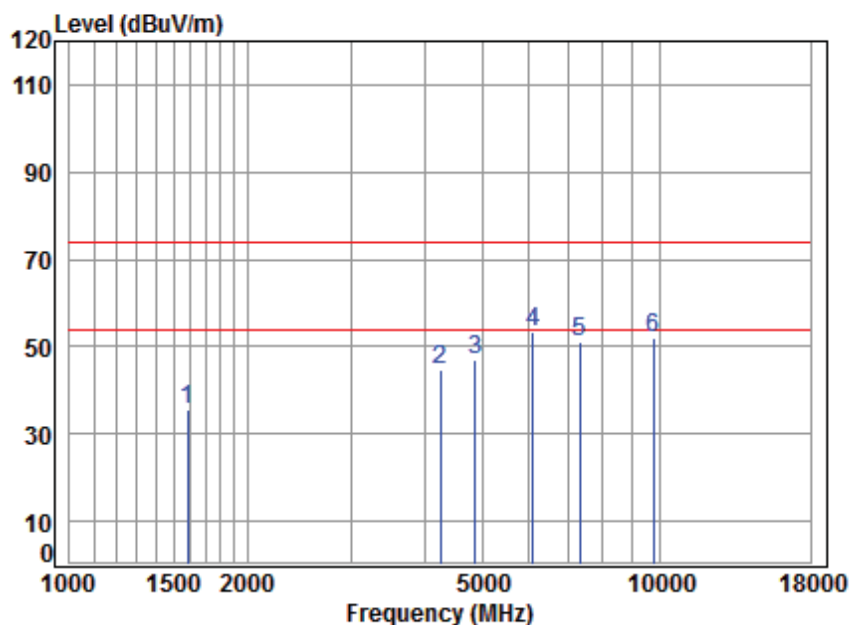

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11G
Power Setting:

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1583.392	5.37	26.18	41.46	45.49	35.58	74.00	-38.42	peak
2	4242.641	7.27	33.15	42.37	46.83	44.88	74.00	-29.12	peak
3	4874.000	7.96	34.05	42.48	47.37	46.90	74.00	-27.10	peak
4	6106.616	10.78	35.21	41.52	48.75	53.22	74.00	-20.78	peak
5	7311.000	10.05	36.15	40.64	45.37	50.93	74.00	-23.07	peak
6	9748.000	10.82	37.75	37.54	41.13	52.16	74.00	-21.84	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 197 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:middle

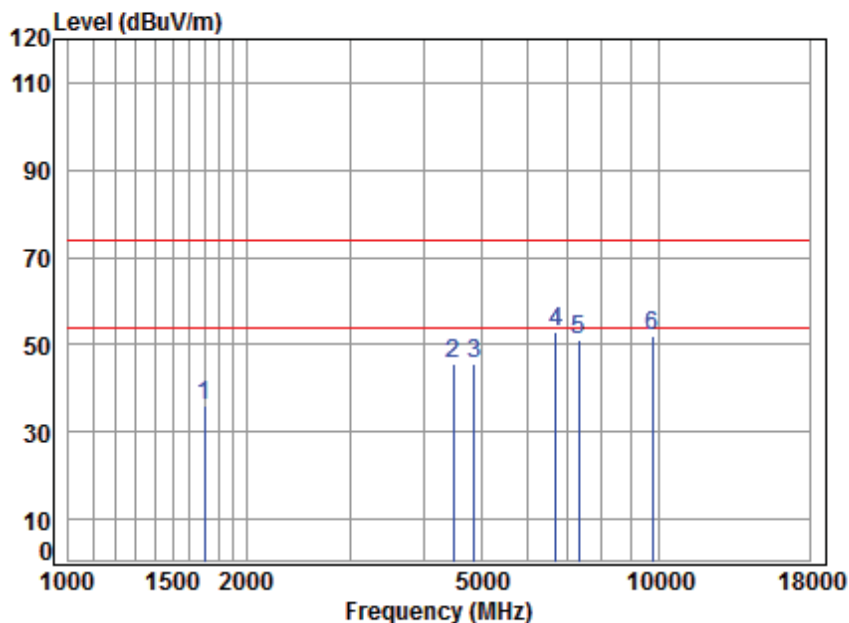

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11G
Power Setting:

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1702.042	5.23	26.68	41.53	45.52	35.90	74.00	-38.10	peak
2	4482.150	7.54	33.57	42.41	46.86	45.56	74.00	-28.44	peak
3	4874.000	7.96	34.05	42.48	46.30	45.83	74.00	-28.17	peak
4	6698.373	10.97	35.72	41.07	47.24	52.86	74.00	-21.14	peak
5	7311.000	10.05	36.15	40.64	45.58	51.14	74.00	-22.86	peak
6	9748.000	10.82	37.75	37.54	41.06	52.09	74.00	-21.91	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 198 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:High

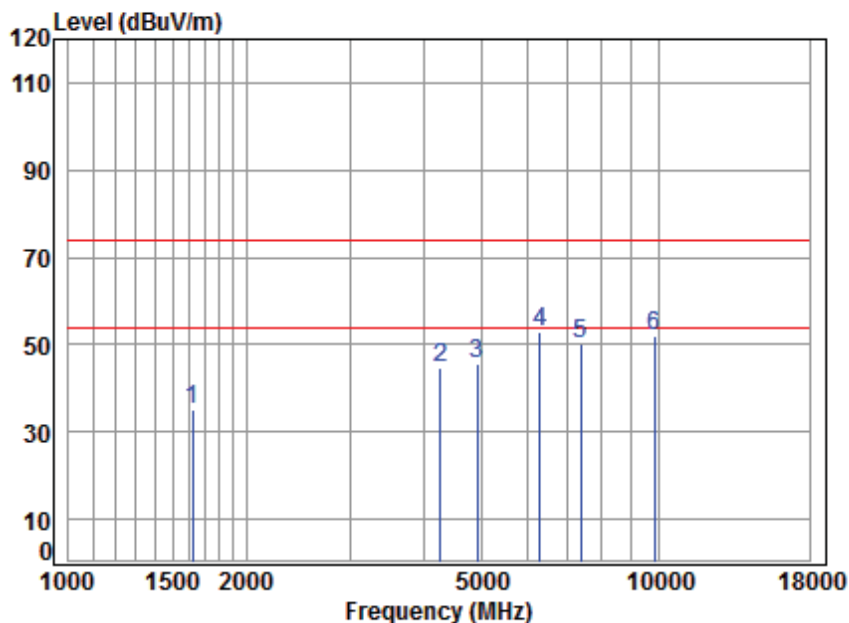

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 TX RSE
Note : 2.4G WIFI 11G
Power Setting:

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1625.121	5.32	26.36	41.49	44.91	35.10	74.00	-38.90	peak
2	4267.237	7.30	33.19	42.38	46.44	44.55	74.00	-29.45	peak
3	4924.000	8.01	34.11	42.49	45.89	45.52	74.00	-28.48	peak
4	6303.890	11.17	35.41	41.37	47.60	52.81	74.00	-21.19	peak
5	7386.000	10.03	36.21	40.59	44.39	50.04	74.00	-23.96	peak
6	9848.000	10.87	37.81	37.41	40.73	52.00	74.00	-22.00	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 199 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:High

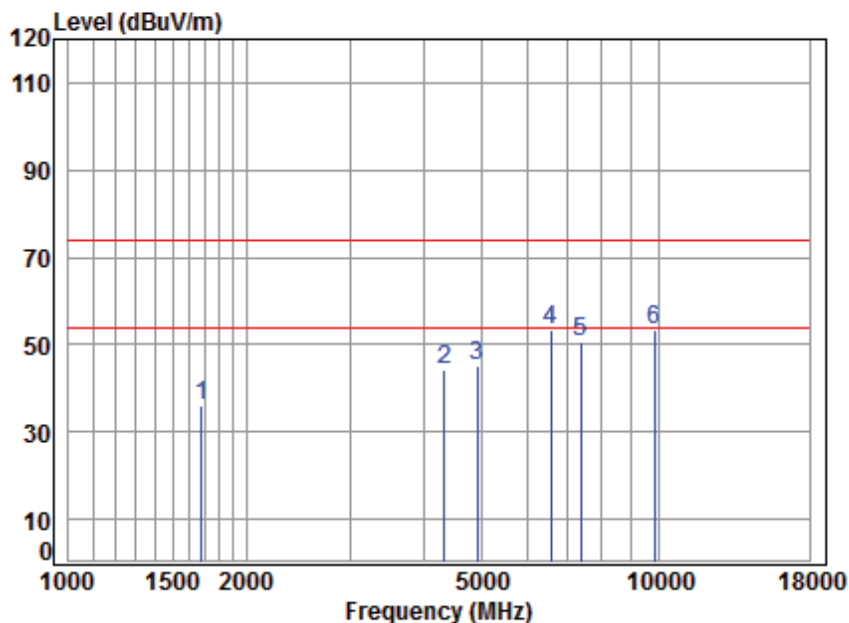

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 TX RSE
Note : 2.4G WIFI 11G
Power Setting:

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1682.477	5.25	26.60	41.52	45.62	35.95	74.00	-38.05	peak
2	4341.886	7.38	33.33	42.39	46.13	44.45	74.00	-29.55	peak
3	4924.000	8.01	34.11	42.49	45.45	45.08	74.00	-28.92	peak
4	6564.209	11.35	35.64	41.17	47.59	53.41	74.00	-20.59	peak
5	7386.000	10.03	36.21	40.59	44.89	50.54	74.00	-23.46	peak
6	9848.000	10.87	37.81	37.41	42.09	53.36	74.00	-20.64	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 200 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:Low

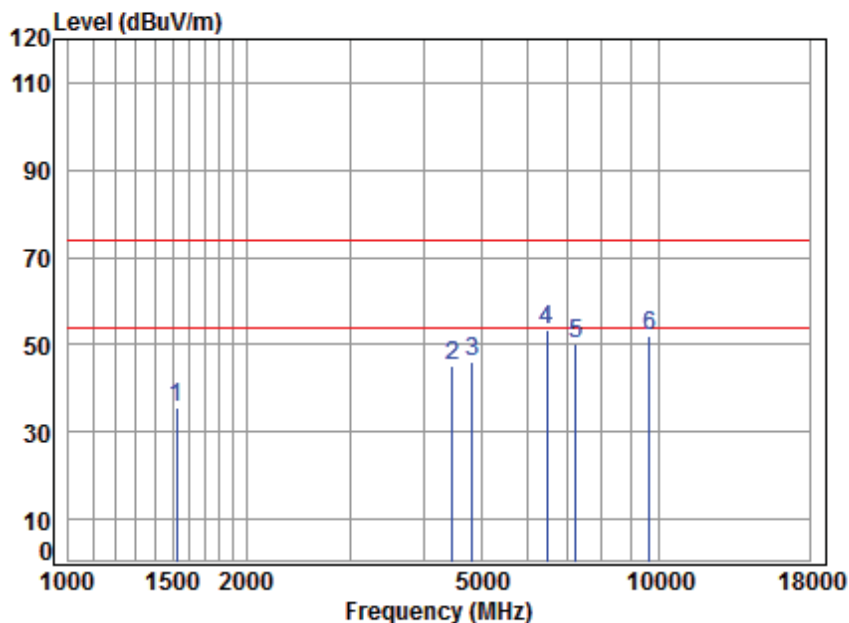

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 TX RSE
Note : 2.4G WIFI 11N 20
Power Setting:

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1525.000	5.45	25.91	41.42	45.74	35.68	74.00	-38.32	peak
2	4469.214	7.53	33.55	42.41	46.73	45.40	74.00	-28.60	peak
3	4824.000	7.91	34.00	42.47	46.68	46.12	74.00	-27.88	peak
4	6470.026	11.48	35.57	41.24	47.38	53.19	74.00	-20.81	peak
5	7236.000	10.07	36.09	40.69	44.78	50.25	74.00	-23.75	peak
6	9648.000	10.77	37.69	37.68	41.25	52.03	74.00	-21.97	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 201 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:Low

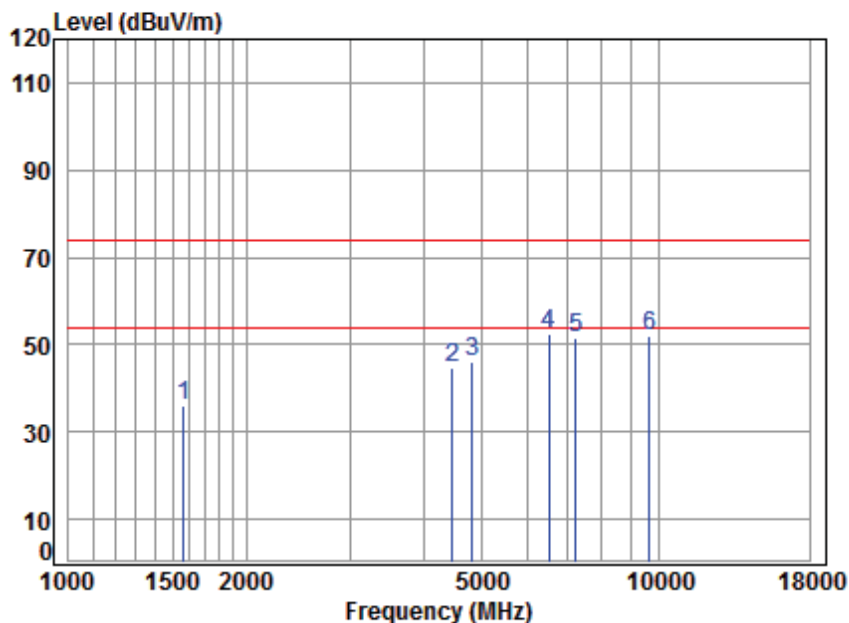

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 TX RSE
Note : 2.4G WIFI 11N 20
Power Setting:

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1569.721	5.39	26.12	41.45	46.09	36.15	74.00	-37.85	peak
2	4469.214	7.53	33.55	42.41	46.09	44.76	74.00	-29.24	peak
3	4824.000	7.91	34.00	42.47	46.63	46.07	74.00	-27.93	peak
4	6507.536	11.52	35.60	41.21	46.77	52.68	74.00	-21.32	peak
5	7236.000	10.07	36.09	40.69	45.90	51.37	74.00	-22.63	peak
6	9648.000	10.77	37.69	37.68	41.29	52.07	74.00	-21.93	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 202 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:middle

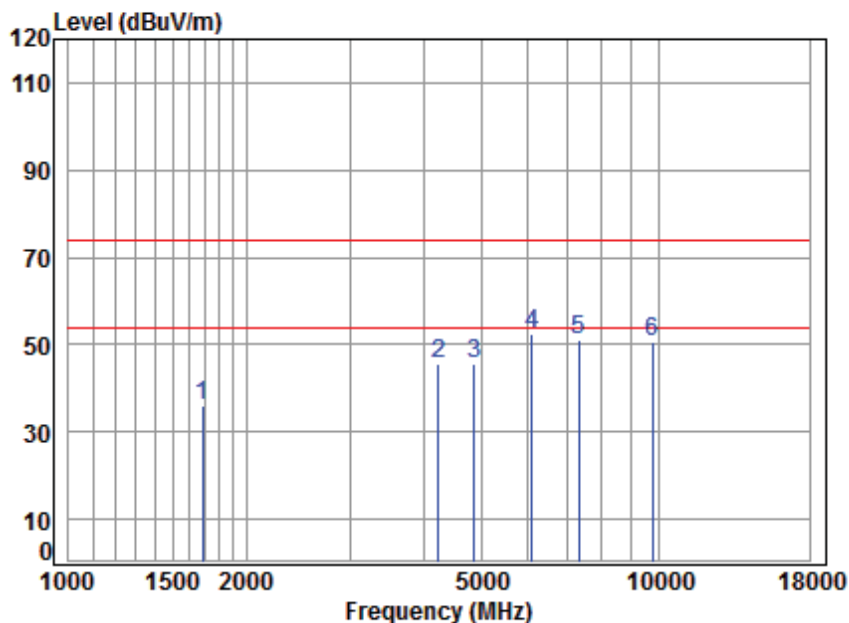

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11N 20
Power Setting:

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1687.347	5.24	26.62	41.52	45.71	36.05	74.00	-37.95	peak
2	4230.396	7.26	33.13	42.37	47.70	45.72	74.00	-28.28	peak
3	4874.000	7.96	34.05	42.48	45.88	45.41	74.00	-28.59	peak
4	6088.991	10.75	35.19	41.54	47.94	52.34	74.00	-21.66	peak
5	7311.000	10.05	36.15	40.64	45.71	51.27	74.00	-22.73	peak
6	9748.000	10.82	37.75	37.54	39.55	50.58	74.00	-23.42	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 203 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:middle

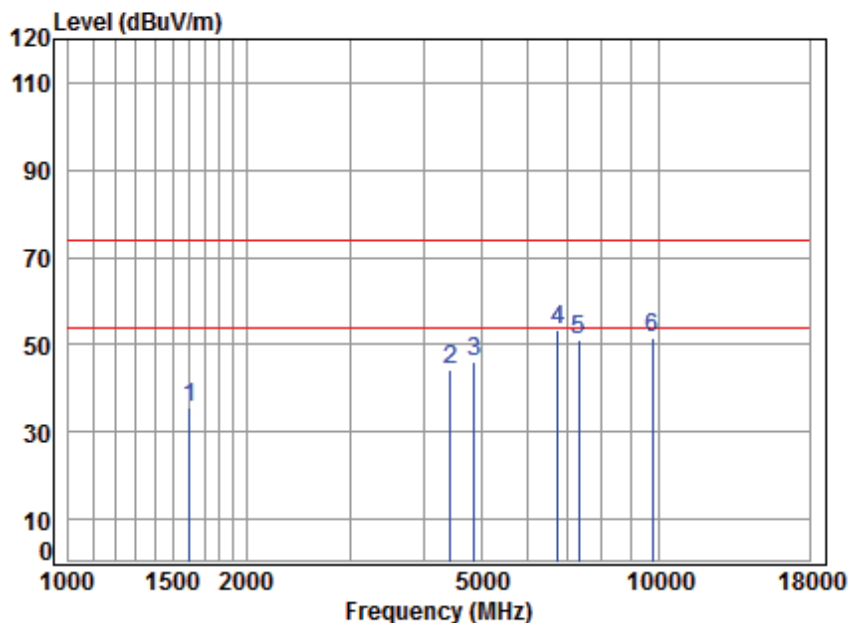

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11N 20
Power Setting:

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1606.441	5.34	26.28	41.47	45.42	35.57	74.00	-38.43	peak
2	4443.453	7.50	33.50	42.41	45.48	44.07	74.00	-29.93	peak
3	4874.000	7.96	34.05	42.48	46.38	45.91	74.00	-28.09	peak
4	6737.207	10.86	35.75	41.04	47.90	53.47	74.00	-20.53	peak
5	7311.000	10.05	36.15	40.64	45.37	50.93	74.00	-23.07	peak
6	9748.000	10.82	37.75	37.54	40.44	51.47	74.00	-22.53	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 204 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:High

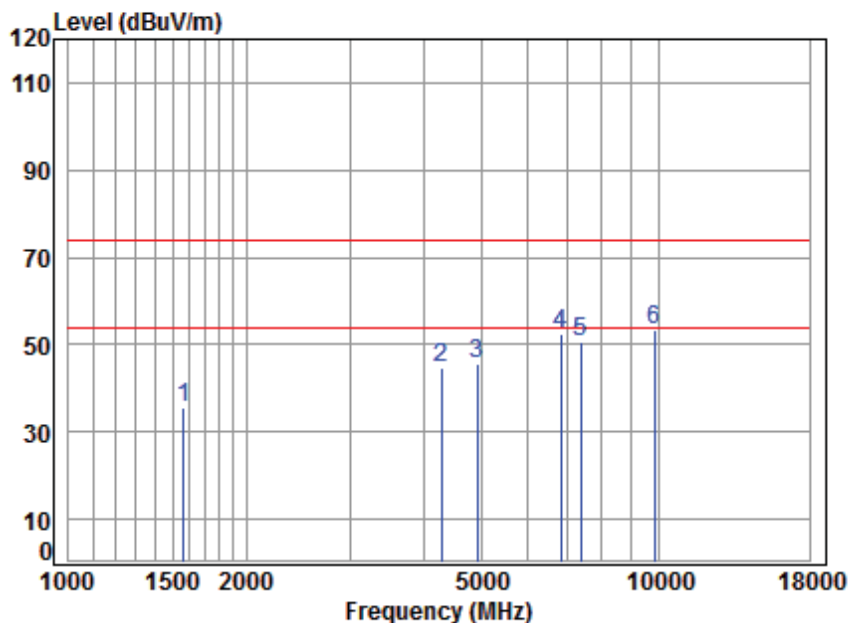

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 TX RSE
Note : 2.4G WIFI 11N 20
Power Setting:

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1569.721	5.39	26.12	41.45	45.64	35.70	74.00	-38.30	peak
2	4291.977	7.33	33.24	42.38	46.48	44.67	74.00	-29.33	peak
3	4924.000	8.01	34.11	42.49	45.78	45.41	74.00	-28.59	peak
4	6815.551	10.64	35.79	40.98	47.11	52.56	74.00	-21.44	peak
5	7386.000	10.03	36.21	40.59	44.87	50.52	74.00	-23.48	peak
6	9848.000	10.87	37.81	37.41	42.05	53.32	74.00	-20.68	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 205 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:High

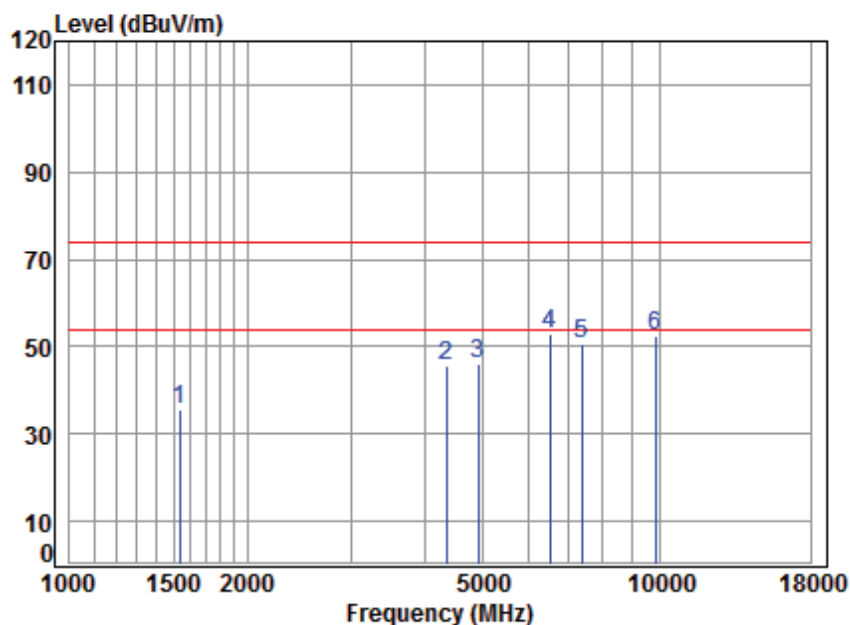

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 TX RSE
Note : 2.4G WIFI 11N 20
Power Setting:

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1538.281	5.43	25.98	41.43	45.54	35.52	74.00	-38.48	peak
2	4354.454	7.40	33.35	42.39	47.33	45.69	74.00	-28.31	peak
3	4924.000	8.01	34.11	42.49	46.31	45.94	74.00	-28.06	peak
4	6526.373	11.46	35.62	41.20	46.91	52.79	74.00	-21.21	peak
5	7386.000	10.03	36.21	40.59	44.85	50.50	74.00	-23.50	peak
6	9848.000	10.87	37.81	37.41	41.20	52.47	74.00	-21.53	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 206 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:Low

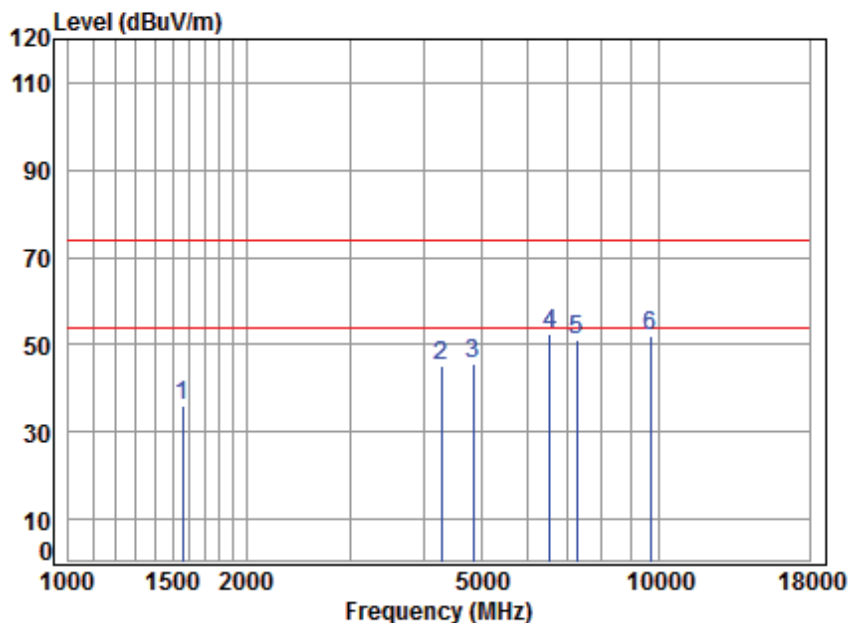

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2422 TX RSE
Note : 2.4G WIFI 11N 40
Power Setting:

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1560.673	5.40	26.08	41.45	45.86	35.89	74.00	-38.11	peak
2	4291.977	7.33	33.24	42.38	46.82	45.01	74.00	-28.99	peak
3	4844.000	7.93	34.02	42.48	46.17	45.64	74.00	-28.36	peak
4	6545.263	11.41	35.63	41.18	46.75	52.61	74.00	-21.39	peak
5	7266.000	10.06	36.12	40.67	45.46	50.97	74.00	-23.03	peak
6	9688.000	10.79	37.71	37.63	41.21	52.08	74.00	-21.92	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 207 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:Low

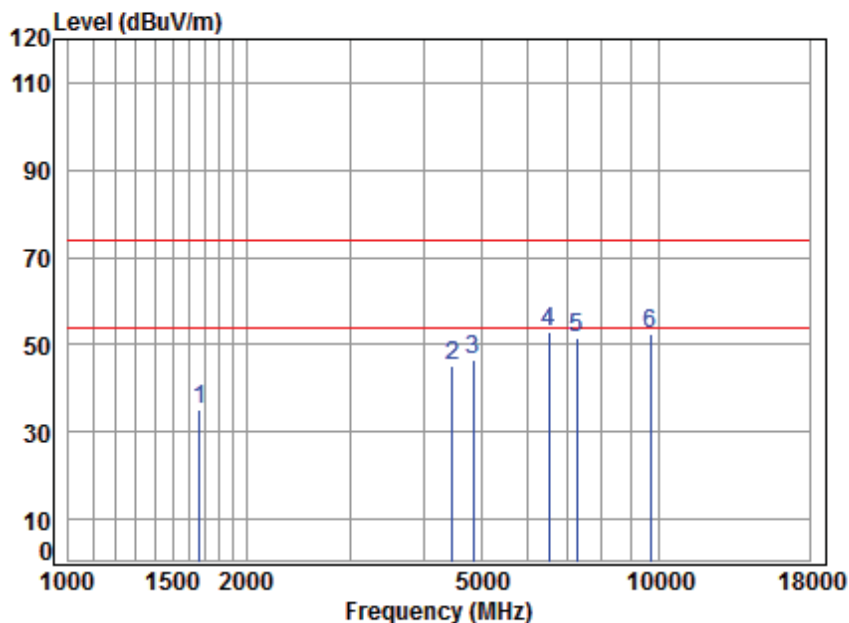

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2422 TX RSE
Note : 2.4G WIFI 11N 40
Power Setting:

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1667.951	5.27	26.54	41.51	44.62	34.92	74.00	-39.08	peak
2	4469.214	7.53	33.55	42.41	46.40	45.07	74.00	-28.93	peak
3	4844.000	7.93	34.02	42.48	47.10	46.57	74.00	-27.43	peak
4	6507.536	11.52	35.60	41.21	47.08	52.99	74.00	-21.01	peak
5	7266.000	10.06	36.12	40.67	46.23	51.74	74.00	-22.26	peak
6	9688.000	10.79	37.71	37.63	41.38	52.25	74.00	-21.75	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 208 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:middle

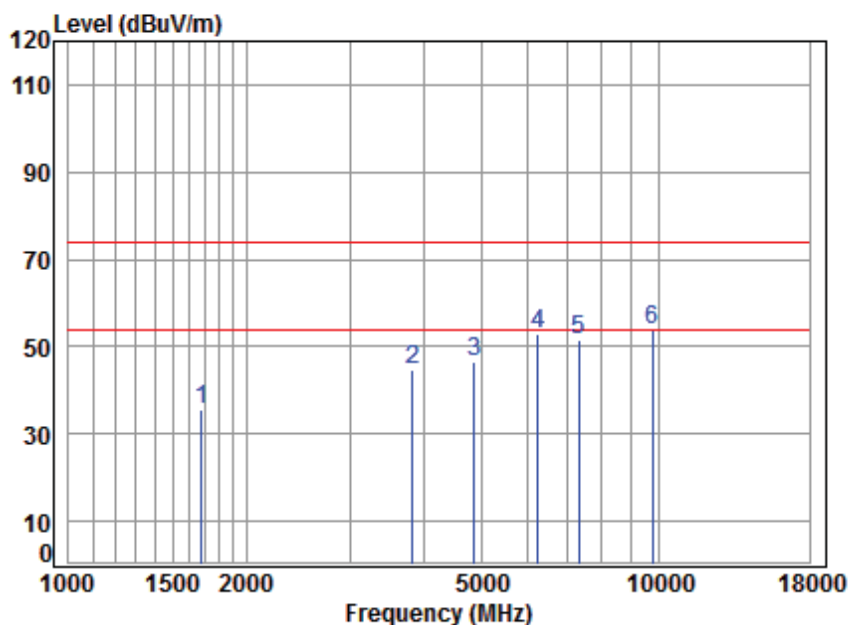

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11N 40
Power Setting:

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1677.621	5.25	26.58	41.52	45.31	35.62	74.00	-38.38	peak
2	3834.438	6.82	32.38	42.29	47.84	44.75	74.00	-29.25	peak
3	4874.000	7.96	34.05	42.48	47.02	46.55	74.00	-27.45	peak
4	6249.464	11.06	35.35	41.41	48.11	53.11	74.00	-20.89	peak
5	7311.000	10.05	36.15	40.64	45.85	51.41	74.00	-22.59	peak
6	9748.000	10.82	37.75	37.54	42.65	53.68	74.00	-20.32	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 209 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:middle

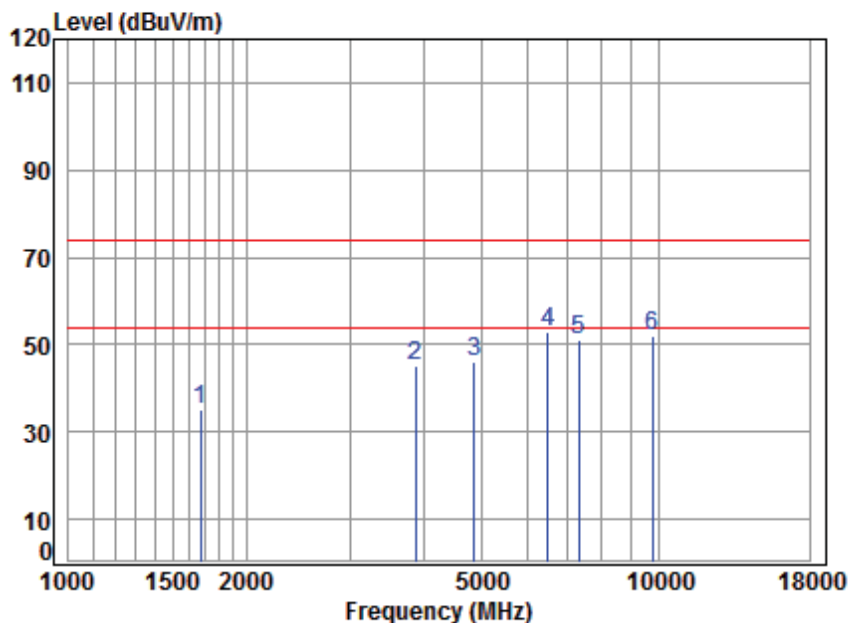

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11N 40
Power Setting:

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1672.779	5.26	26.56	41.52	44.98	35.28	74.00	-38.72	peak
2	3867.831	6.85	32.45	42.30	48.06	45.06	74.00	-28.94	peak
3	4874.000	7.96	34.05	42.48	46.72	46.25	74.00	-27.75	peak
4	6488.754	11.52	35.59	41.22	47.14	53.03	74.00	-20.97	peak
5	7311.000	10.05	36.15	40.64	45.63	51.19	74.00	-22.81	peak
6	9748.000	10.82	37.75	37.54	41.01	52.04	74.00	-21.96	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 210 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:High

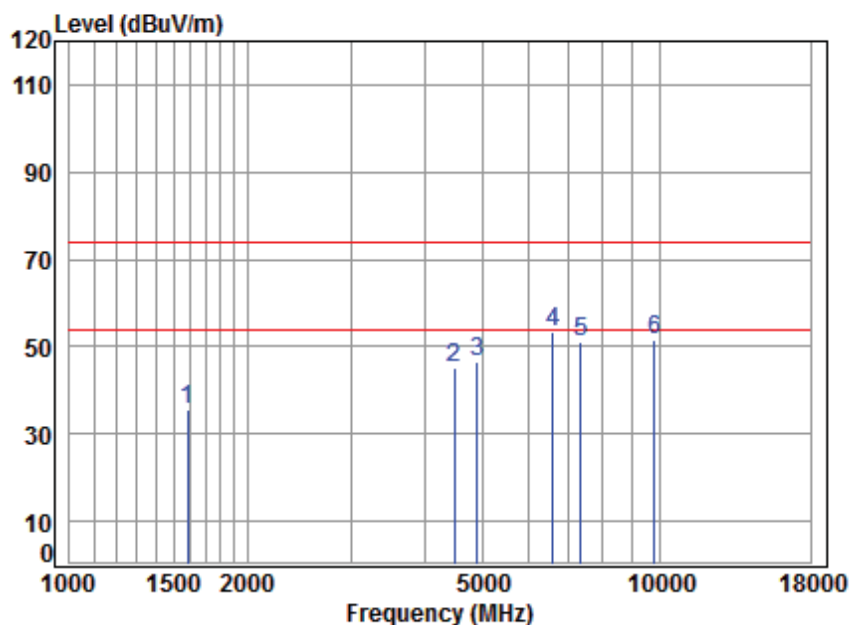

Site : chamber
Condition : 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2452 TX RSE
Note : 2.4G WIFI 11N 40
Power Setting:

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1583.392	5.37	26.18	41.46	45.55	35.64	74.00	-38.36	peak
2	4495.125	7.55	33.59	42.42	46.50	45.22	74.00	-28.78	peak
3	4904.000	7.99	34.09	42.48	46.89	46.49	74.00	-27.51	peak
4	6583.209	11.30	35.65	41.15	47.70	53.50	74.00	-20.50	peak
5	7356.000	10.04	36.19	40.61	45.57	51.19	74.00	-22.81	peak
6	9808.000	10.85	37.79	37.46	40.15	51.33	74.00	-22.67	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 211 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:High

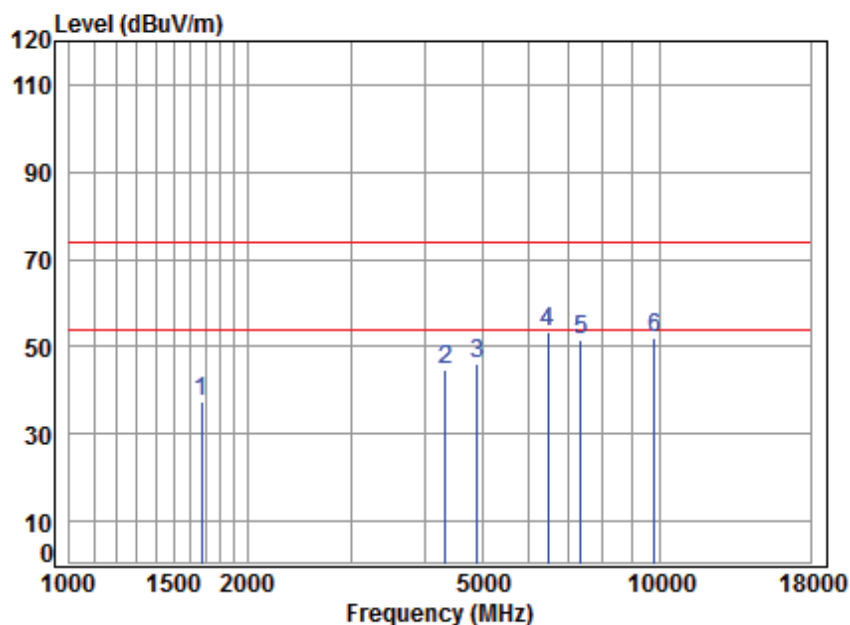

Site : chamber
Condition : 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2452 TX RSE
Note : 2.4G WIFI 11N 40
Power Setting:

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1672.779	5.26	26.56	41.52	47.18	37.48	74.00	-36.52	peak
2	4341.886	7.38	33.33	42.39	46.54	44.86	74.00	-29.14	peak
3	4904.000	7.99	34.09	42.48	46.47	46.07	74.00	-27.93	peak
4	6470.026	11.48	35.57	41.24	47.40	53.21	74.00	-20.79	peak
5	7356.000	10.04	36.19	40.61	45.77	51.39	74.00	-22.61	peak
6	9808.000	10.85	37.79	37.46	40.81	51.99	74.00	-22.01	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 212 of 346

Test data for Antenna2:

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:Low

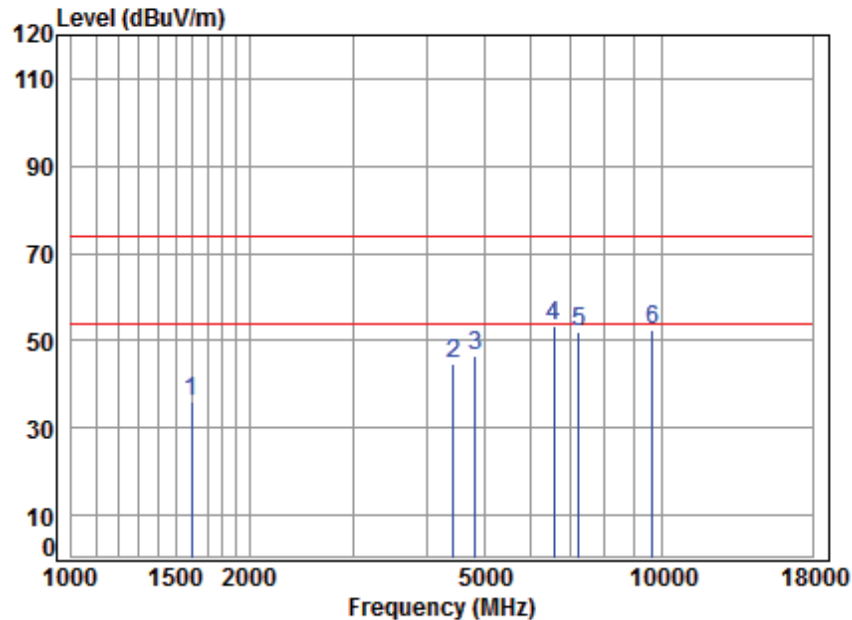

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 TX RSE
Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1597.181	5.35	26.24	41.47	45.77	35.89	74.00	-38.11	peak
2	4430.628	7.48	33.48	42.41	46.16	44.71	74.00	-29.29	peak
3	4824.000	7.91	34.00	42.47	47.01	46.45	74.00	-27.55	peak
4	6564.209	11.35	35.64	41.17	47.50	53.32	74.00	-20.68	peak
5	7236.000	10.07	36.09	40.69	46.43	51.90	74.00	-22.10	peak
6	9648.000	10.77	37.69	37.68	41.48	52.26	74.00	-21.74	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 213 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:Low

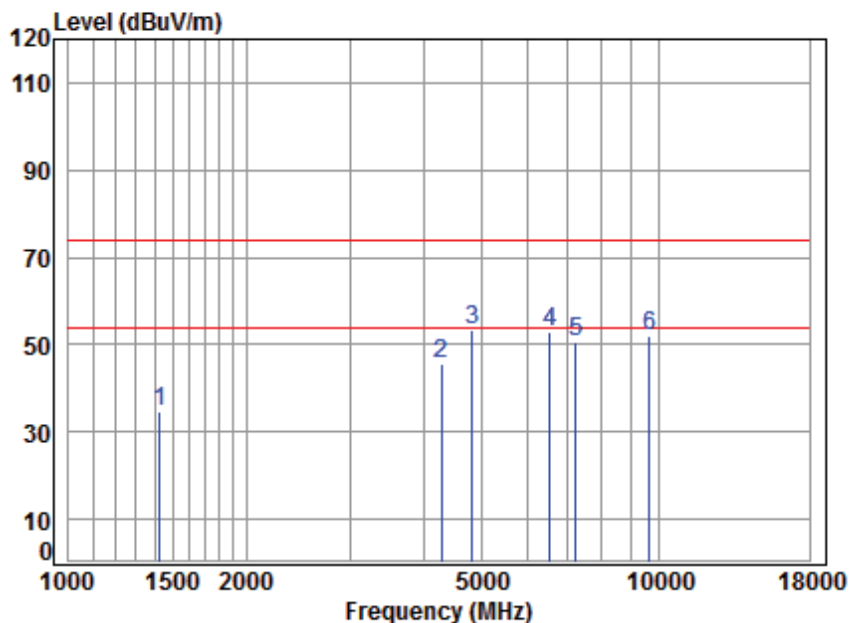

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 TX RSE
Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1426.916	5.24	25.53	41.36	45.20	34.61	74.00	-39.39	peak
2	4279.589	7.31	33.22	42.38	47.34	45.49	74.00	-28.51	peak
3	4824.000	7.91	34.00	42.47	54.01	53.45	74.00	-20.55	peak
4	6545.263	11.41	35.63	41.18	46.93	52.79	74.00	-21.21	peak
5	7236.000	10.07	36.09	40.69	45.22	50.69	74.00	-23.31	peak
6	9648.000	10.77	37.69	37.68	41.35	52.13	74.00	-21.87	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 214 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:middle

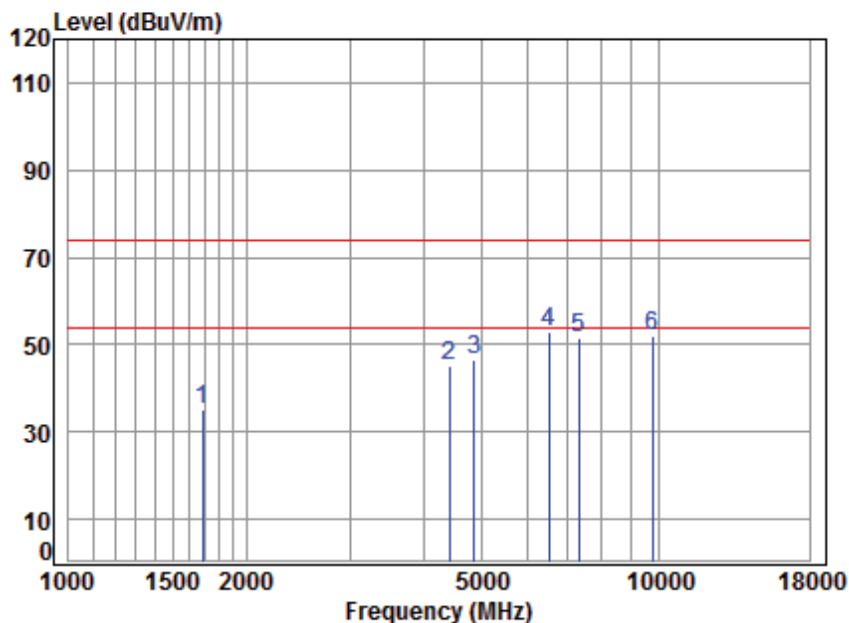

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11B

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1687.347	5.24	26.62	41.52	44.69	35.03	74.00	-38.97	peak
2	4417.841	7.47	33.46	42.40	46.63	45.16	74.00	-28.84	peak
3	4874.000	7.96	34.05	42.48	46.93	46.46	74.00	-27.54	peak
4	6507.536	11.52	35.60	41.21	46.81	52.72	74.00	-21.28	peak
5	7311.000	10.05	36.15	40.64	46.06	51.62	74.00	-22.38	peak
6	9748.000	10.82	37.75	37.54	41.15	52.18	74.00	-21.82	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 215 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:middle

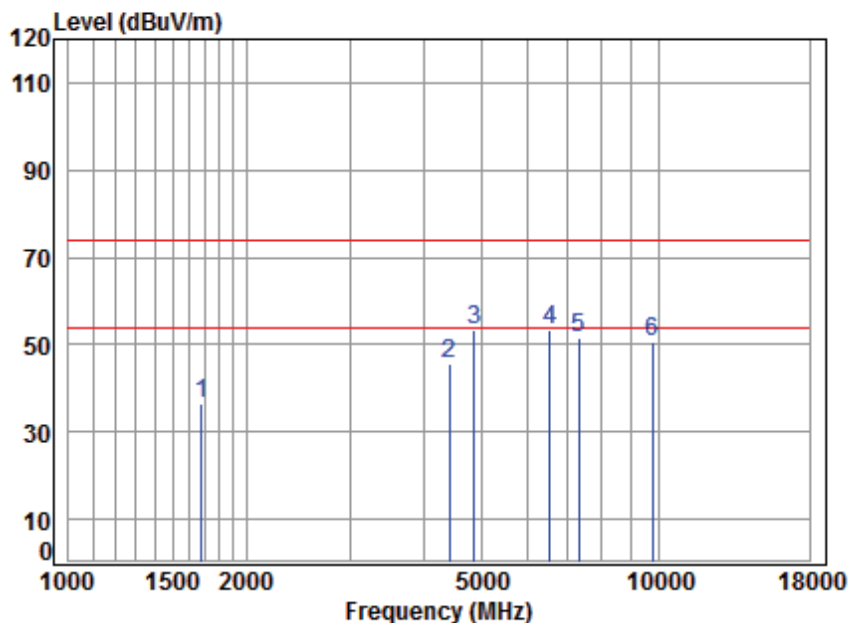

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1677.621	5.25	26.58	41.52	46.08	36.39	74.00	-37.61	peak
2	4417.841	7.47	33.46	42.40	47.05	45.58	74.00	-28.42	peak
3	4874.000	7.96	34.05	42.48	53.65	53.18	74.00	-20.82	peak
4	6545.263	11.41	35.63	41.18	47.62	53.48	74.00	-20.52	peak
5	7311.000	10.05	36.15	40.64	46.15	51.71	74.00	-22.29	peak
6	9748.000	10.82	37.75	37.54	39.74	50.77	74.00	-23.23	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 216 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:High

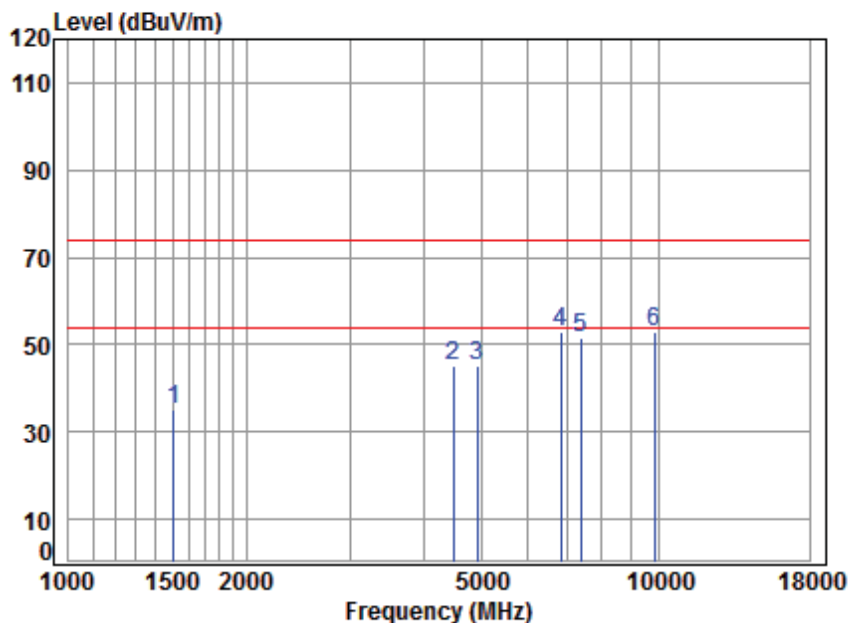

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 TX RSE
Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1507.470	5.47	25.83	41.41	45.25	35.14	74.00	-38.86	peak
2	4482.150	7.54	33.57	42.41	46.61	45.31	74.00	-28.69	peak
3	4924.000	8.01	34.11	42.49	45.57	45.20	74.00	-28.80	peak
4	6815.551	10.64	35.79	40.98	47.64	53.09	74.00	-20.91	peak
5	7386.000	10.03	36.21	40.59	45.94	51.59	74.00	-22.41	peak
6	9848.000	10.87	37.81	37.41	41.72	52.99	74.00	-21.01	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 217 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:High

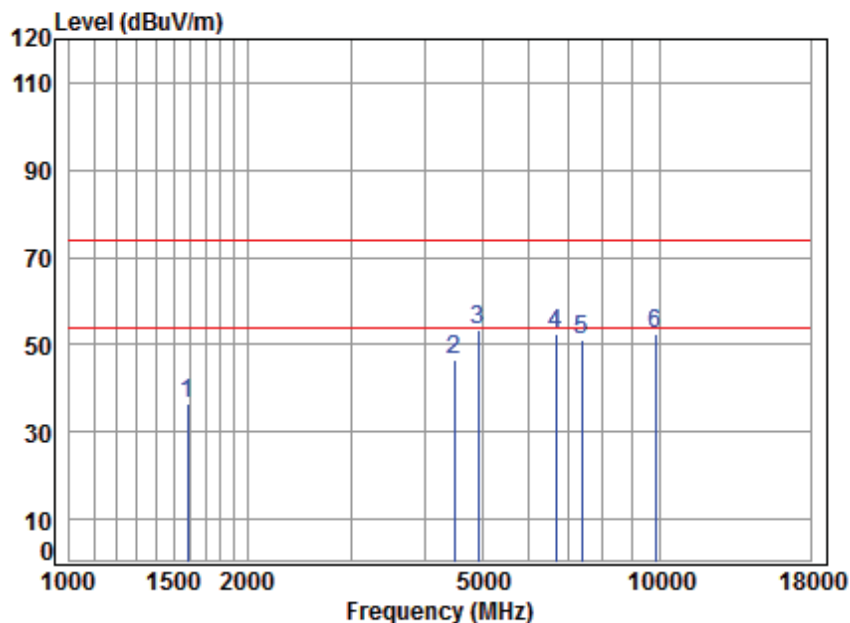

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 TX RSE
Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1587.975	5.37	26.20	41.46	46.49	36.60	74.00	-37.40	peak
2	4495.125	7.55	33.59	42.42	47.87	46.59	74.00	-27.41	peak
3	4924.000	8.01	34.11	42.49	53.96	53.59	74.00	-20.41	peak
4	6659.763	11.08	35.70	41.10	47.02	52.70	74.00	-21.30	peak
5	7386.000	10.03	36.21	40.59	45.56	51.21	74.00	-22.79	peak
6	9848.000	10.87	37.81	37.41	41.08	52.35	74.00	-21.65	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 218 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:Low

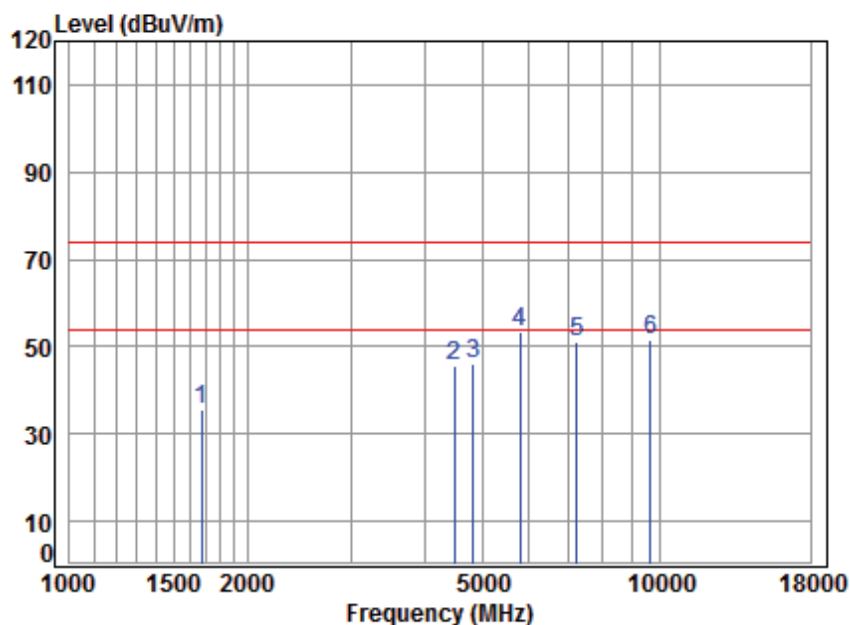

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 TX RSE
Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1672.779	5.26	26.56	41.52	45.12	35.42	74.00	-38.58	peak
2	4495.125	7.55	33.59	42.42	46.89	45.61	74.00	-28.39	peak
3	4824.000	7.91	34.00	42.47	46.48	45.92	74.00	-28.08	peak
4	5797.032	9.89	34.90	41.78	50.19	53.20	74.00	-20.80	peak
5	7236.000	10.07	36.09	40.69	45.81	51.28	74.00	-22.72	peak
6	9648.000	10.77	37.69	37.68	40.67	51.45	74.00	-22.55	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 219 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:Low

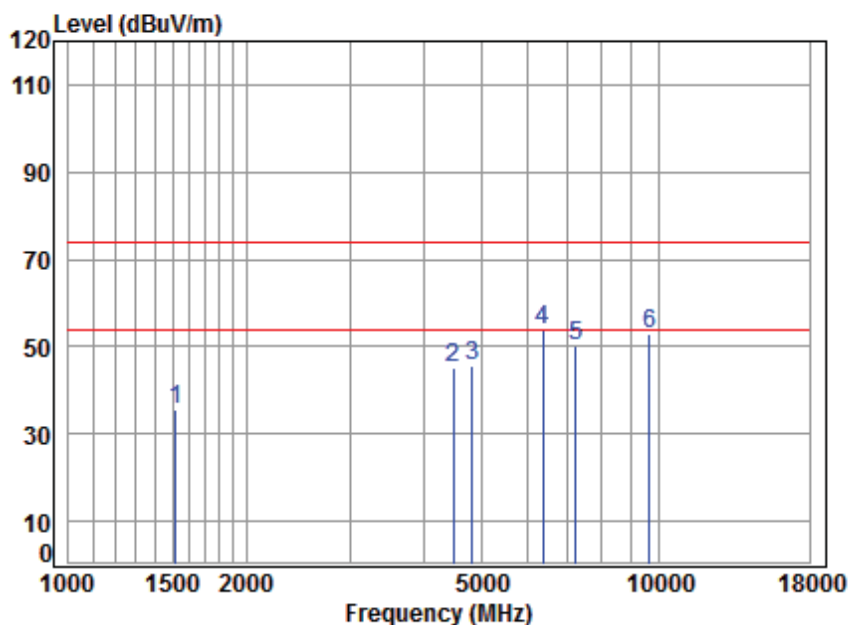

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 TX RSE
Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1520.598	5.45	25.89	41.42	45.69	35.61	74.00	-38.39	peak
2	4482.150	7.54	33.57	42.41	46.40	45.10	74.00	-28.90	peak
3	4824.000	7.91	34.00	42.47	46.15	45.59	74.00	-28.41	peak
4	6358.789	11.27	35.46	41.32	48.25	53.66	74.00	-20.34	peak
5	7236.000	10.07	36.09	40.69	44.84	50.31	74.00	-23.69	peak
6	9648.000	10.77	37.69	37.68	42.25	53.03	74.00	-20.97	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 220 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:middle

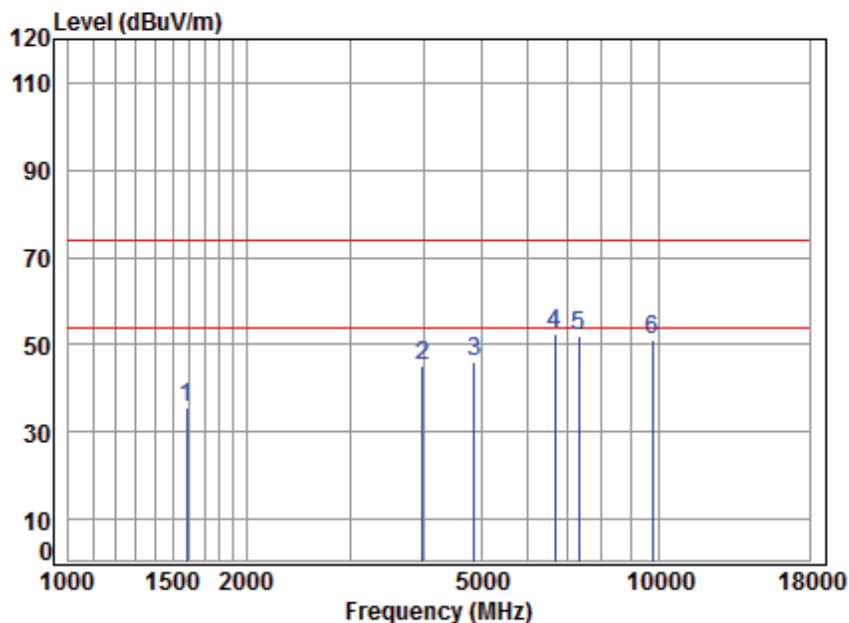

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1583.392	5.37	26.18	41.46	45.33	35.42	74.00	-38.58	peak
2	3981.257	6.96	32.66	42.32	48.08	45.38	74.00	-28.62	peak
3	4874.000	7.96	34.05	42.48	46.59	46.12	74.00	-27.88	peak
4	6659.763	11.08	35.70	41.10	46.96	52.64	74.00	-21.36	peak
5	7311.000	10.05	36.15	40.64	46.33	51.89	74.00	-22.11	peak
6	9748.000	10.82	37.75	37.54	40.21	51.24	74.00	-22.76	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 221 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:middle

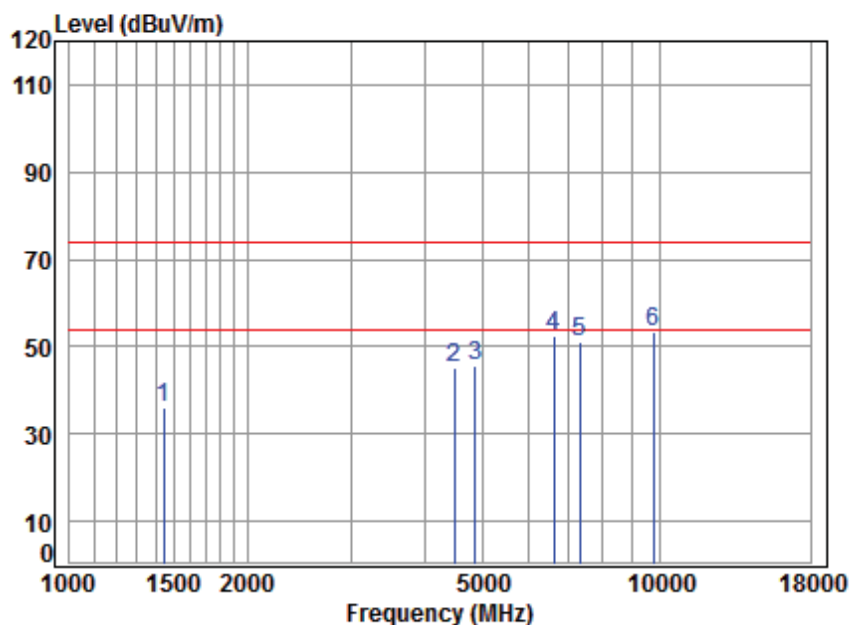

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1443.509	5.30	25.59	41.37	46.61	36.13	74.00	-37.87	peak
2	4482.150	7.54	33.57	42.41	46.48	45.18	74.00	-28.82	peak
3	4874.000	7.96	34.05	42.48	46.19	45.72	74.00	-28.28	peak
4	6621.375	11.19	35.67	41.13	46.55	52.28	74.00	-21.72	peak
5	7311.000	10.05	36.15	40.64	45.74	51.30	74.00	-22.70	peak
6	9748.000	10.82	37.75	37.54	42.22	53.25	74.00	-20.75	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 222 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:High

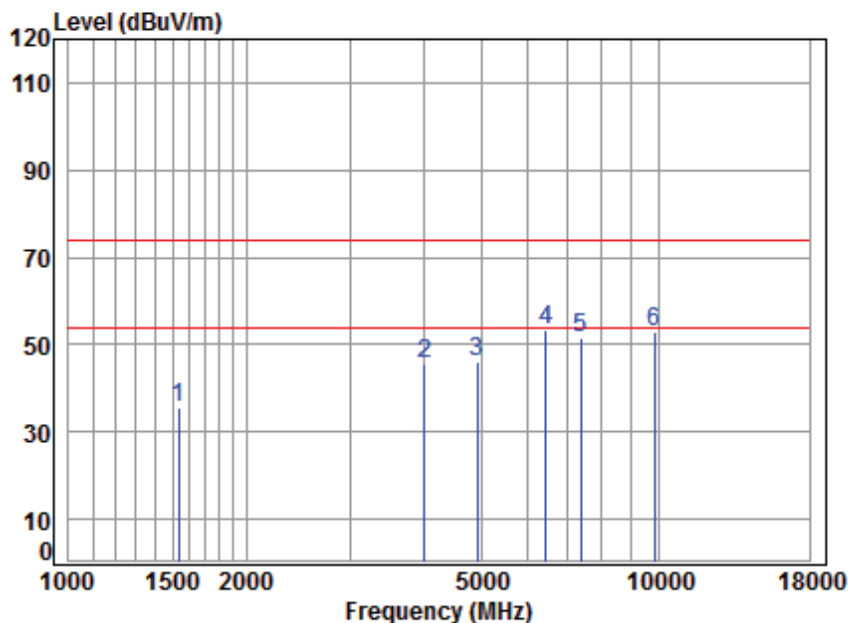

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 TX RSE
Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preampl Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1533.841	5.44	25.96	41.43	45.82	35.79	74.00	-38.21	peak
2	4004.339	6.99	32.71	42.33	48.04	45.41	74.00	-28.59	peak
3	4924.000	8.01	34.11	42.49	46.59	46.22	74.00	-27.78	peak
4	6451.353	11.45	35.55	41.25	47.83	53.58	74.00	-20.42	peak
5	7386.000	10.03	36.21	40.59	46.05	51.70	74.00	-22.30	peak
6	9848.000	10.87	37.81	37.41	41.69	52.96	74.00	-21.04	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 223 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:High

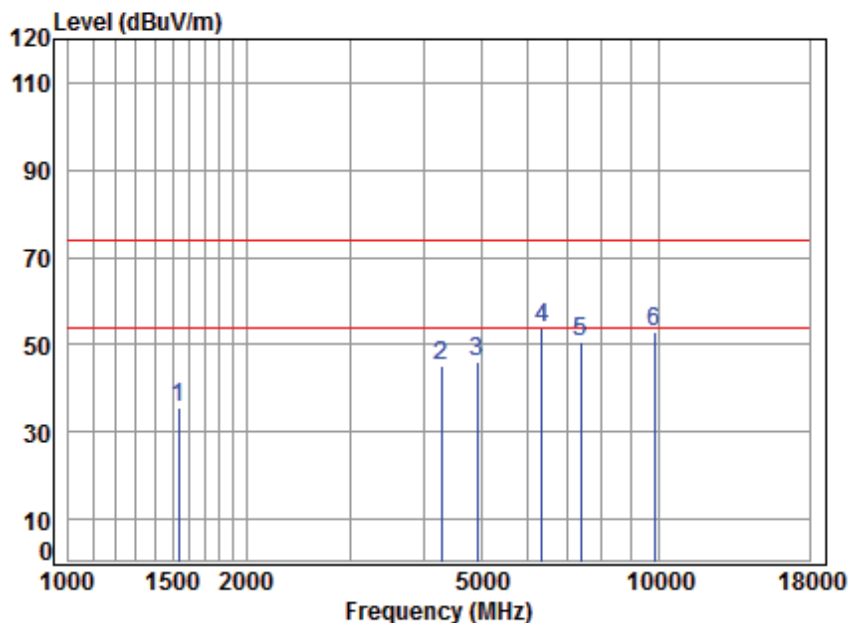

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 TX RSE
Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1538.281	5.43	25.98	41.43	45.72	35.70	74.00	-38.30	peak
2	4291.977	7.33	33.24	42.38	47.17	45.36	74.00	-28.64	peak
3	4924.000	8.01	34.11	42.49	46.29	45.92	74.00	-28.08	peak
4	6340.436	11.24	35.44	41.34	48.28	53.62	74.00	-20.38	peak
5	7386.000	10.03	36.21	40.59	45.09	50.74	74.00	-23.26	peak
6	9848.000	10.87	37.81	37.41	41.52	52.79	74.00	-21.21	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 224 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:Low

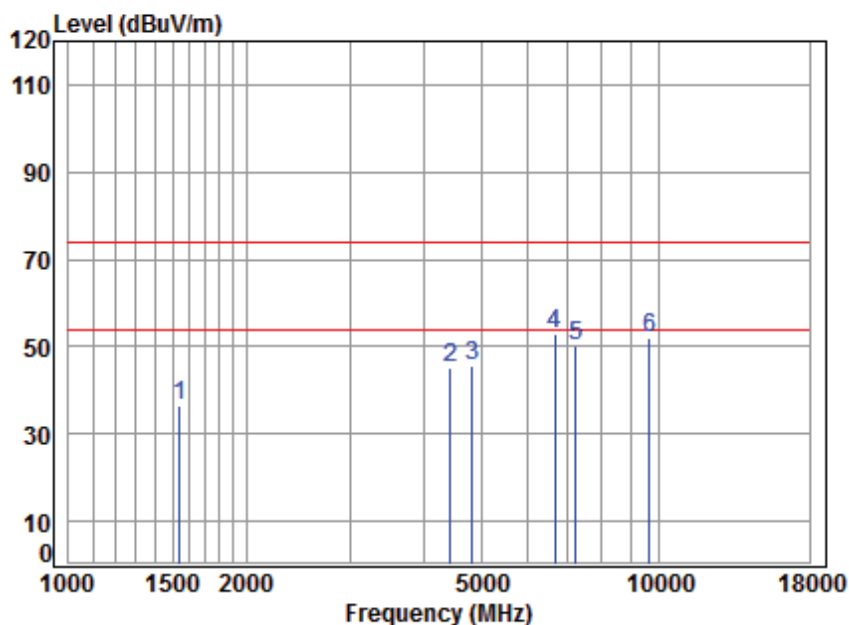

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 TX RSE
Note : 2.4G WIFI 11N 20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1542.733	5.42	26.00	41.43	46.47	36.46	74.00	-37.54	peak
2	4443.453	7.50	33.50	42.41	46.46	45.05	74.00	-28.95	peak
3	4824.000	7.91	34.00	42.47	46.15	45.59	74.00	-28.41	peak
4	6679.040	11.02	35.71	41.08	47.34	52.99	74.00	-21.01	peak
5	7236.000	10.07	36.09	40.69	44.78	50.25	74.00	-23.75	peak
6	9648.000	10.77	37.69	37.68	41.45	52.23	74.00	-21.77	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 225 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:Low

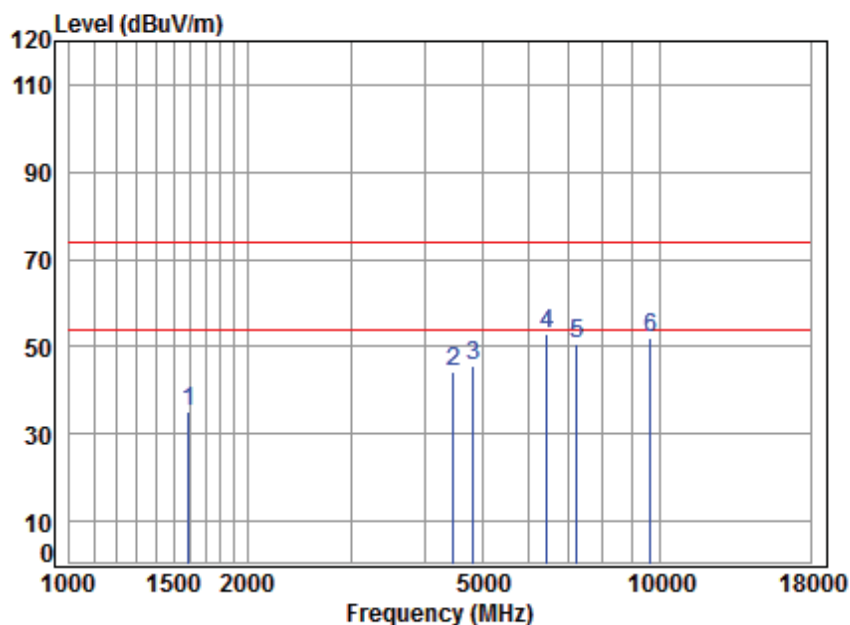

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 TX RSE
Note : 2.4G WIFI 11N 20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1592.571	5.36	26.22	41.47	45.19	35.30	74.00	-38.70	peak
2	4469.214	7.53	33.55	42.41	45.81	44.48	74.00	-29.52	peak
3	4824.000	7.91	34.00	42.47	46.11	45.55	74.00	-28.45	peak
4	6451.353	11.45	35.55	41.25	47.26	53.01	74.00	-20.99	peak
5	7236.000	10.07	36.09	40.69	45.18	50.65	74.00	-23.35	peak
6	9648.000	10.77	37.69	37.68	41.44	52.22	74.00	-21.78	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 226 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:middle

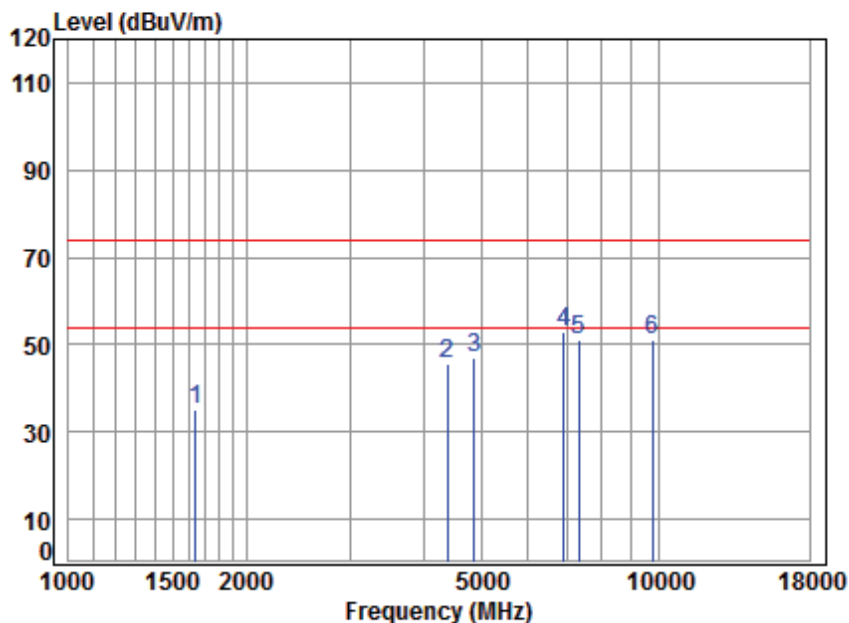

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11N 20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1639.274	5.30	26.42	41.49	44.89	35.12	74.00	-38.88	peak
2	4392.376	7.44	33.42	42.40	47.07	45.53	74.00	-28.47	peak
3	4874.000	7.96	34.05	42.48	47.66	47.19	74.00	-26.81	peak
4	6914.763	10.36	35.85	40.91	47.58	52.88	74.00	-21.12	peak
5	7311.000	10.05	36.15	40.64	45.41	50.97	74.00	-23.03	peak
6	9748.000	10.82	37.75	37.54	40.05	51.08	74.00	-22.92	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 227 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:middle

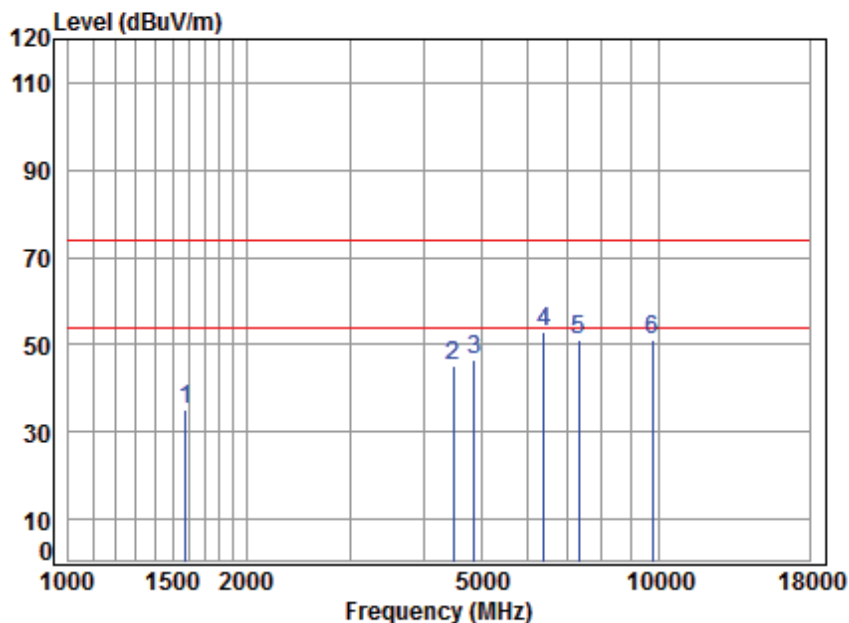

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11N 20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1578.822	5.38	26.16	41.46	44.96	35.04	74.00	-38.96	peak
2	4482.150	7.54	33.57	42.41	46.50	45.20	74.00	-28.80	peak
3	4874.000	7.96	34.05	42.48	47.03	46.56	74.00	-27.44	peak
4	6395.654	11.34	35.50	41.30	47.48	53.02	74.00	-20.98	peak
5	7311.000	10.05	36.15	40.64	45.43	50.99	74.00	-23.01	peak
6	9748.000	10.82	37.75	37.54	40.30	51.33	74.00	-22.67	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 228 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:High

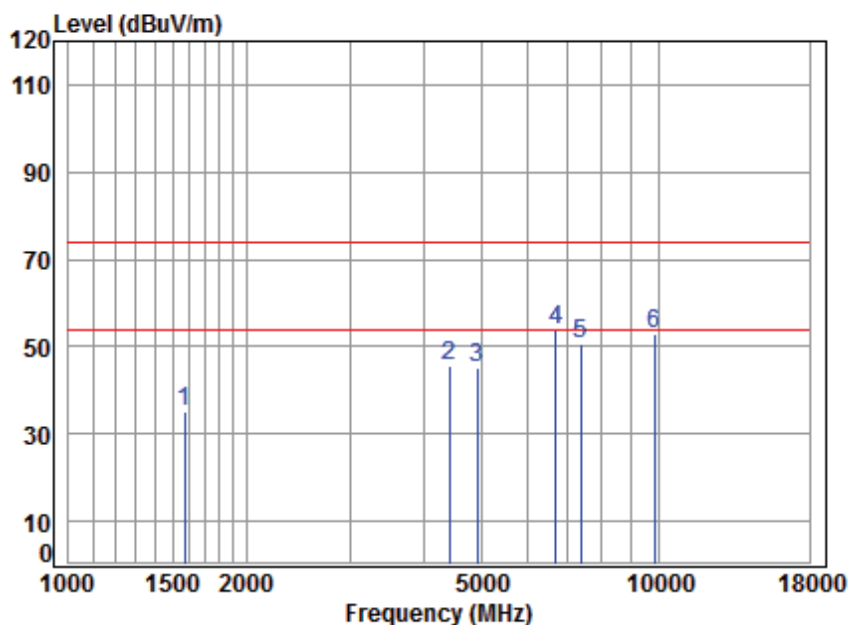

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 TX RSE
Note : 2.4G WIFI 11N 20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1574.265	5.38	26.14	41.45	45.08	35.15	74.00	-38.85	peak
2	4417.841	7.47	33.46	42.40	46.96	45.49	74.00	-28.51	peak
3	4924.000	8.01	34.11	42.49	45.76	45.39	74.00	-28.61	peak
4	6698.373	10.97	35.72	41.07	48.06	53.68	74.00	-20.32	peak
5	7386.000	10.03	36.21	40.59	45.03	50.68	74.00	-23.32	peak
6	9848.000	10.87	37.81	37.41	41.53	52.80	74.00	-21.20	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 229 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:High

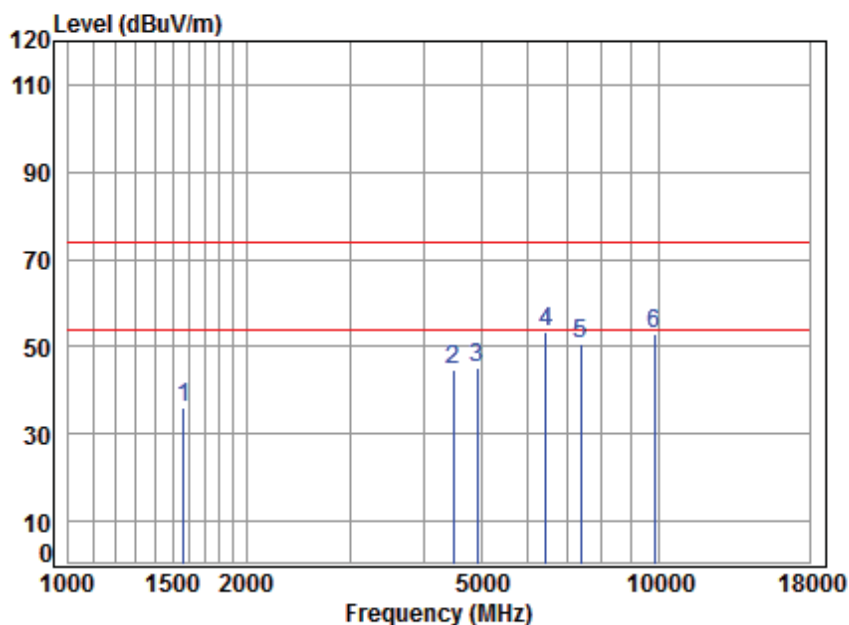

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 TX RSE
Note : 2.4G WIFI 11N 20

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1565.191	5.39	26.10	41.45	45.91	35.95	74.00	-38.05	peak
2	4495.125	7.55	33.59	42.42	46.04	44.76	74.00	-29.24	peak
3	4924.000	8.01	34.11	42.49	45.65	45.28	74.00	-28.72	peak
4	6451.353	11.45	35.55	41.25	47.67	53.42	74.00	-20.58	peak
5	7386.000	10.03	36.21	40.59	45.22	50.87	74.00	-23.13	peak
6	9848.000	10.87	37.81	37.41	41.67	52.94	74.00	-21.06	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 230 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:Low

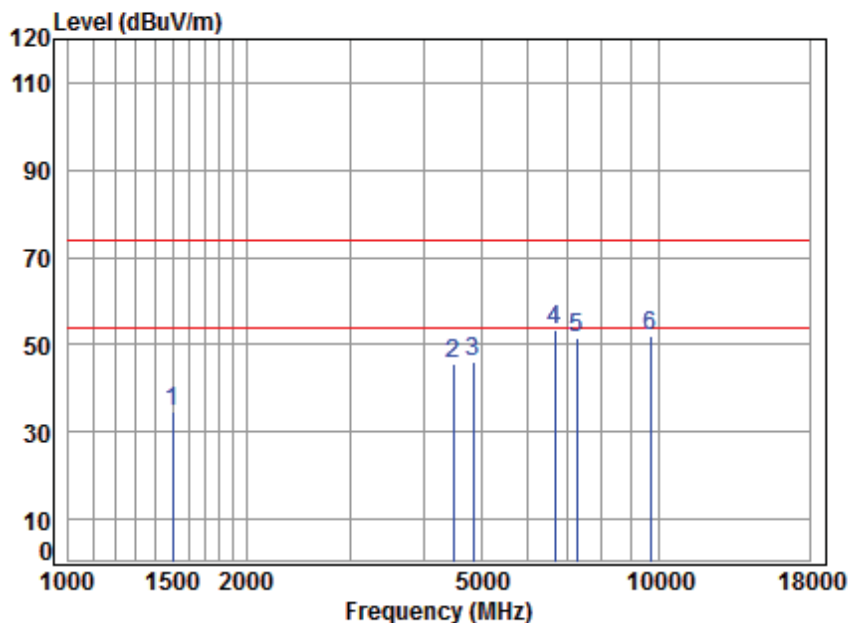

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2422 TX RSE
Note : 2.4G WIFI 11N 40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBUV/m	dBUV/m	dB	
1	1498.781	5.48	25.80	41.41	45.00	34.87	74.00	-39.13	peak
2	4495.125	7.55	33.59	42.42	46.78	45.50	74.00	-28.50	peak
3	4844.000	7.93	34.02	42.48	46.77	46.24	74.00	-27.76	peak
4	6659.763	11.08	35.70	41.10	47.56	53.24	74.00	-20.76	peak
5	7266.000	10.06	36.12	40.67	46.17	51.68	74.00	-22.32	peak
6	9688.000	10.79	37.71	37.63	41.03	51.90	74.00	-22.10	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 231 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:Low

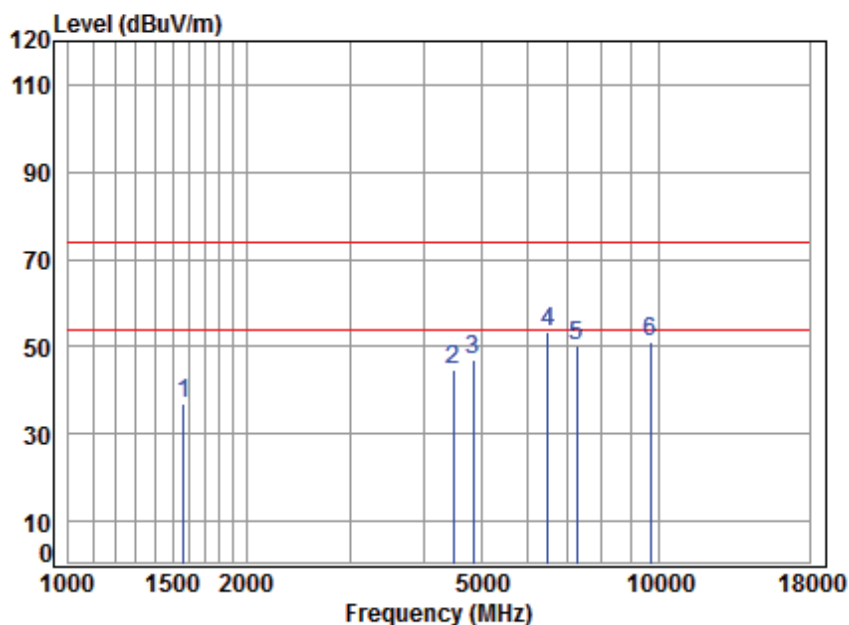

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2422 TX RSE
Note : 2.4G WIFI 11N 40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1565.191	5.39	26.10	41.45	46.80	36.84	74.00	-37.16	peak
2	4495.125	7.55	33.59	42.42	46.07	44.79	74.00	-29.21	peak
3	4844.000	7.93	34.02	42.48	47.71	47.18	74.00	-26.82	peak
4	6488.754	11.52	35.59	41.22	47.60	53.49	74.00	-20.51	peak
5	7266.000	10.06	36.12	40.67	44.49	50.00	74.00	-24.00	peak
6	9688.000	10.79	37.71	37.63	40.40	51.27	74.00	-22.73	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 232 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:middle

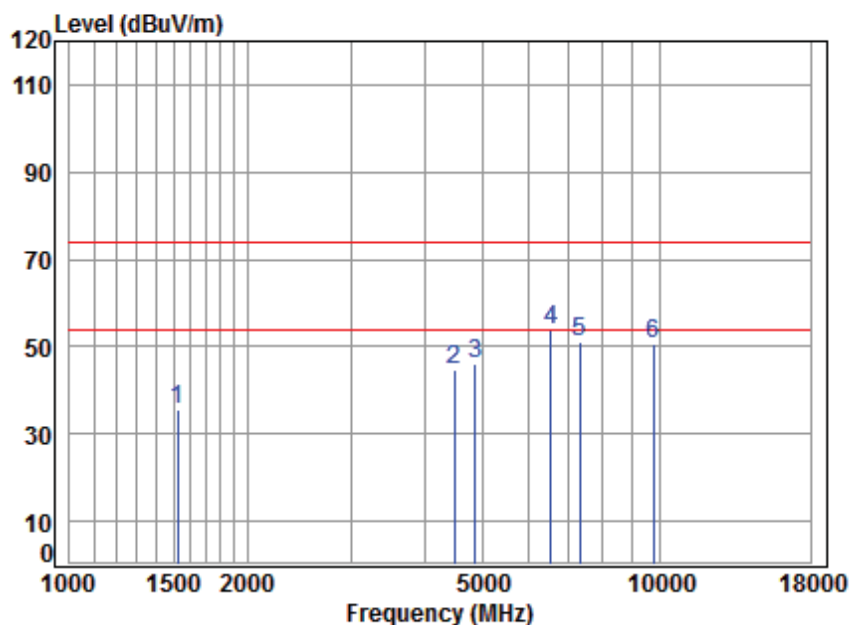

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11N 40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1525.000	5.45	25.91	41.42	45.80	35.74	74.00	-38.26	peak
2	4495.125	7.55	33.59	42.42	46.19	44.91	74.00	-29.09	peak
3	4874.000	7.96	34.05	42.48	46.38	45.91	74.00	-28.09	peak
4	6545.263	11.41	35.63	41.18	48.07	53.93	74.00	-20.07	peak
5	7311.000	10.05	36.15	40.64	45.36	50.92	74.00	-23.08	peak
6	9748.000	10.82	37.75	37.54	39.70	50.73	74.00	-23.27	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 233 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:middle

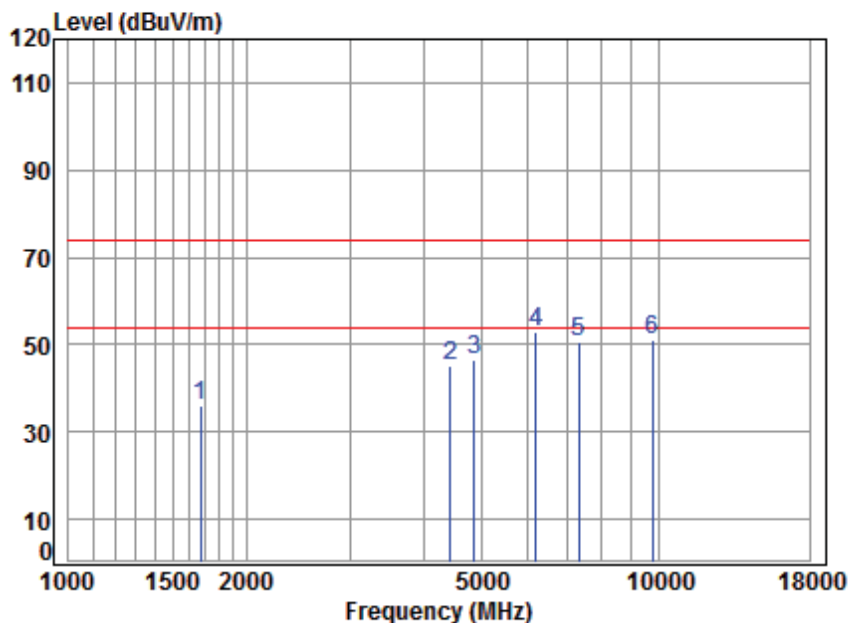

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11N 40

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1672.779	5.26	26.56	41.52	45.83	36.13	74.00	-37.87	peak
2	4430.628	7.48	33.48	42.41	46.74	45.29	74.00	-28.71	peak
3	4874.000	7.96	34.05	42.48	47.01	46.54	74.00	-27.46	peak
4	6195.508	10.96	35.30	41.45	48.33	53.14	74.00	-20.86	peak
5	7311.000	10.05	36.15	40.64	45.28	50.84	74.00	-23.16	peak
6	9748.000	10.82	37.75	37.54	40.12	51.15	74.00	-22.85	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 234 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:High

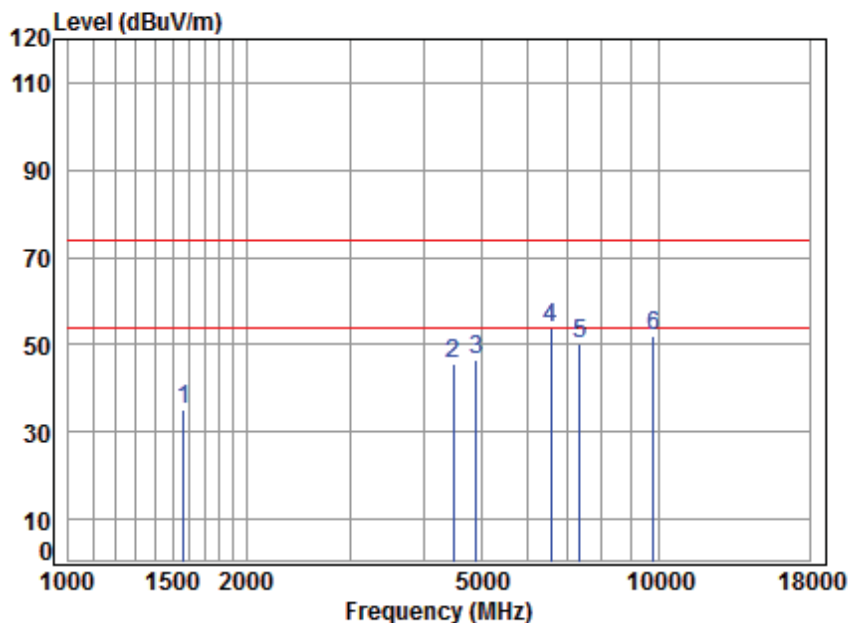

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2452 TX RSE
Note : 2.4G WIFI 11N 40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1565.191	5.39	26.10	41.45	45.26	35.30	74.00	-38.70	peak
2	4482.150	7.54	33.57	42.41	46.95	45.65	74.00	-28.35	peak
3	4904.000	7.99	34.09	42.48	47.08	46.68	74.00	-27.32	peak
4	6564.209	11.35	35.64	41.17	47.93	53.75	74.00	-20.25	peak
5	7356.000	10.04	36.19	40.61	44.80	50.42	74.00	-23.58	peak
6	9808.000	10.85	37.79	37.46	40.69	51.87	74.00	-22.13	peak



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401
Page: 235 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:High

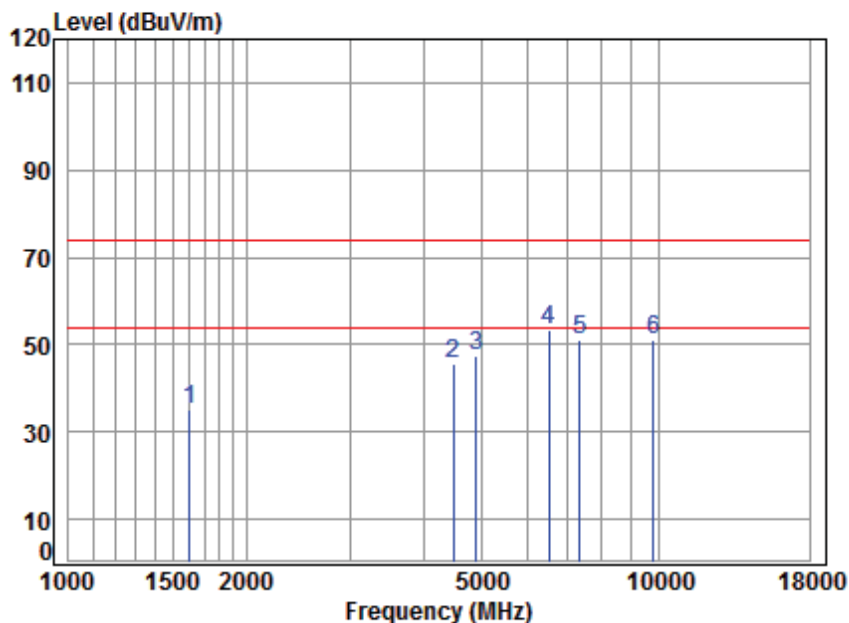

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2452 TX RSE
Note : 2.4G WIFI 11N 40

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1601.804	5.35	26.26	41.47	45.09	35.23	74.00	-38.77	peak
2	4482.150	7.54	33.57	42.41	47.06	45.76	74.00	-28.24	peak
3	4904.000	7.99	34.09	42.48	47.98	47.58	74.00	-26.42	peak
4	6526.373	11.46	35.62	41.20	47.66	53.54	74.00	-20.46	peak
5	7356.000	10.04	36.19	40.61	45.68	51.30	74.00	-22.70	peak
6	9808.000	10.85	37.79	37.46	39.95	51.13	74.00	-22.87	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 236 of 346

Test data for Antenna3:

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:Low

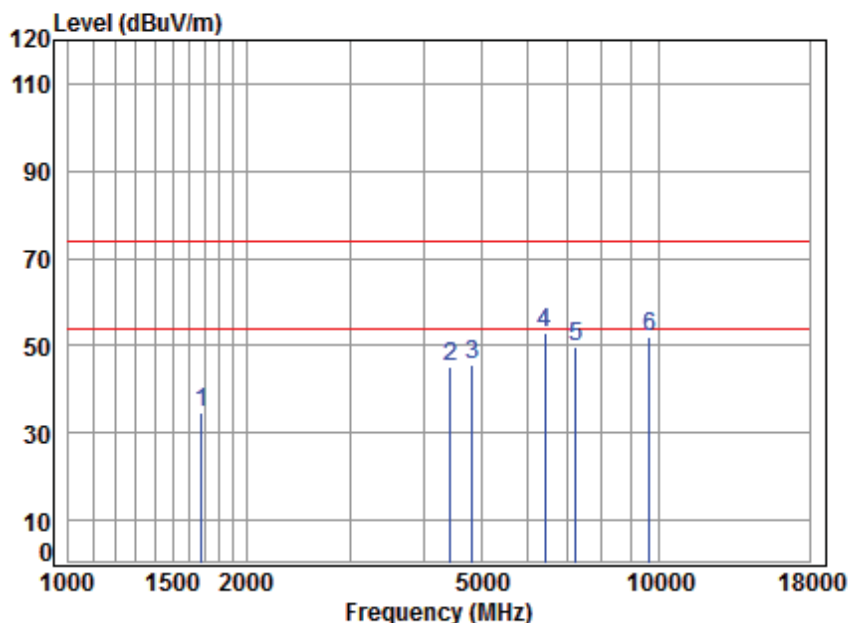

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 TX RSE
Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1682.477	5.25	26.60	41.52	44.57	34.90	74.00	-39.10	peak
2	4430.628	7.48	33.48	42.41	46.48	45.03	74.00	-28.97	peak
3	4824.000	7.91	34.00	42.47	46.40	45.84	74.00	-28.16	peak
4	6414.167	11.38	35.52	41.28	47.40	53.02	74.00	-20.98	peak
5	7236.000	10.07	36.09	40.69	44.49	49.96	74.00	-24.04	peak
6	9648.000	10.77	37.69	37.68	41.17	51.95	74.00	-22.05	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 237 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:Low

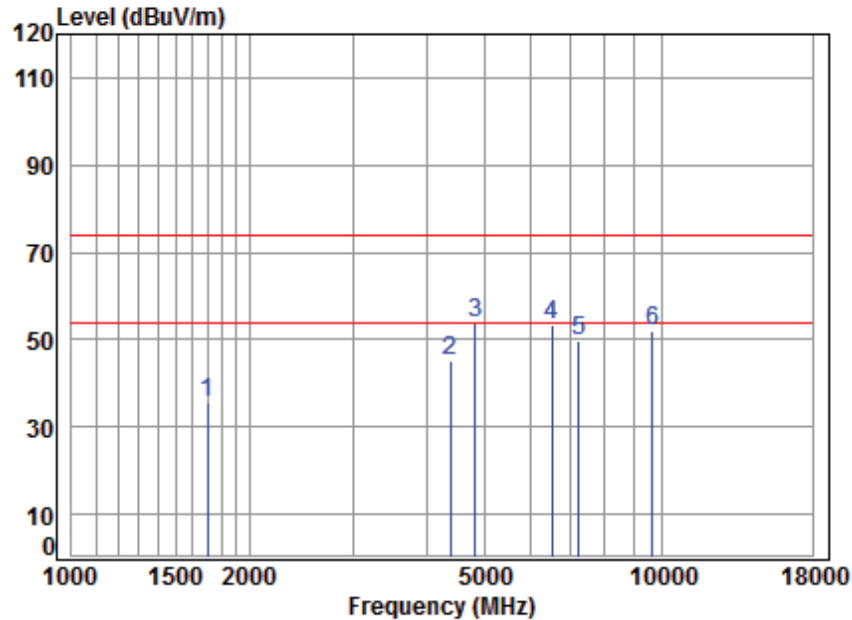

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 TX RSE
Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1697.129	5.23	26.66	41.53	45.21	35.57	74.00	-38.43	peak
2	4392.376	7.44	33.42	42.40	46.88	45.34	74.00	-28.66	peak
3	4824.000	7.91	34.00	42.47	54.28	53.72	74.00	-20.28	peak
4	6507.536	11.52	35.60	41.21	47.45	53.36	74.00	-20.64	peak
5	7236.000	10.07	36.09	40.69	44.16	49.63	74.00	-24.37	peak
6	9648.000	10.77	37.69	37.68	41.14	51.92	74.00	-22.08	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 238 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:middle

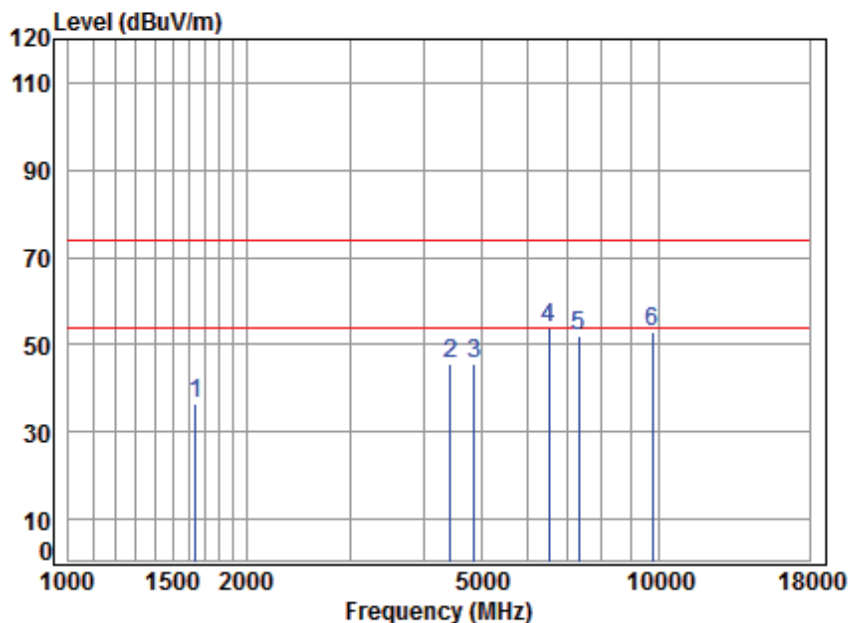

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1644.019	5.30	26.44	41.50	46.34	36.58	74.00	-37.42	peak
2	4443.453	7.50	33.50	42.41	47.06	45.65	74.00	-28.35	peak
3	4874.000	7.96	34.05	42.48	46.30	45.83	74.00	-28.17	peak
4	6526.373	11.46	35.62	41.20	47.99	53.87	74.00	-20.13	peak
5	7311.000	10.05	36.15	40.64	46.26	51.82	74.00	-22.18	peak
6	9748.000	10.82	37.75	37.54	41.91	52.94	74.00	-21.06	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 239 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:middle

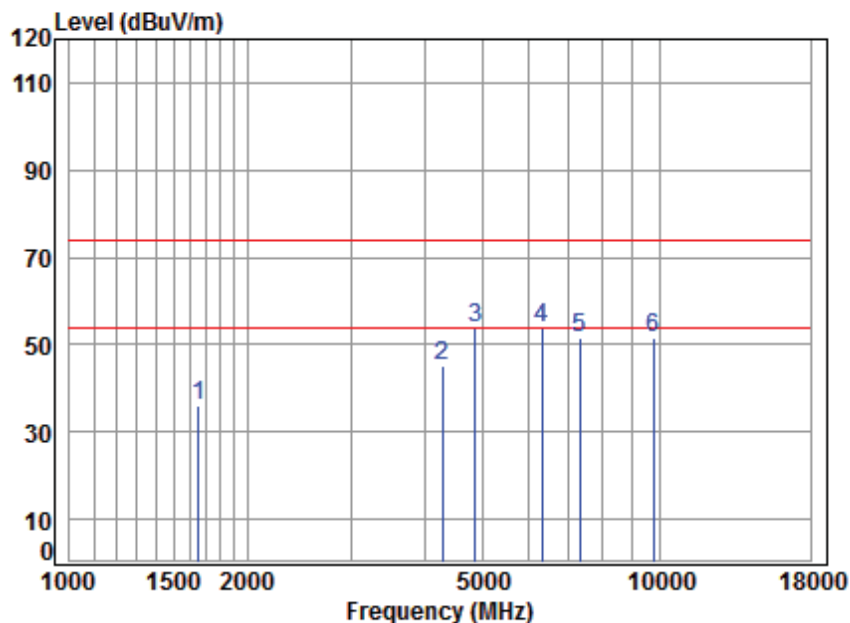

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1653.550	5.28	26.48	41.50	45.79	36.05	74.00	-37.95	peak
2	4291.977	7.33	33.24	42.38	46.91	45.10	74.00	-28.90	peak
3	4874.000	7.96	34.05	42.48	54.27	53.80	74.00	-20.20	peak
4	6322.136	11.20	35.43	41.35	48.38	53.66	74.00	-20.34	peak
5	7311.000	10.05	36.15	40.64	46.18	51.74	74.00	-22.26	peak
6	9748.000	10.82	37.75	37.54	40.64	51.67	74.00	-22.33	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 240 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:High

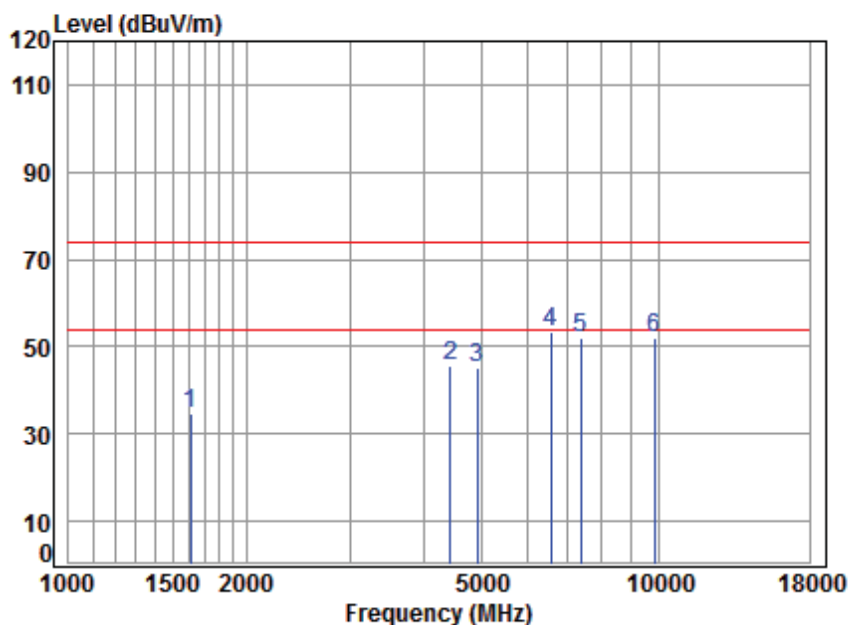

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 TX RSE
Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1611.091	5.34	26.30	41.48	44.53	34.69	74.00	-39.31	peak
2	4430.628	7.48	33.48	42.41	47.09	45.64	74.00	-28.36	peak
3	4924.000	8.01	34.11	42.49	45.59	45.22	74.00	-28.78	peak
4	6564.209	11.35	35.64	41.17	47.58	53.40	74.00	-20.60	peak
5	7386.000	10.03	36.21	40.59	46.45	52.10	74.00	-21.90	peak
6	9848.000	10.87	37.81	37.41	40.90	52.17	74.00	-21.83	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 241 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:High

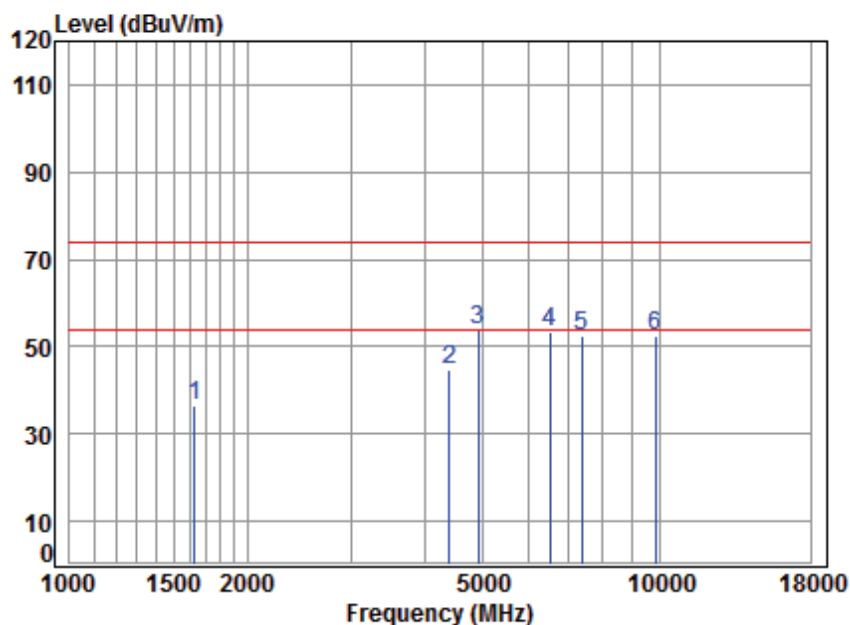

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 TX RSE
Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1629.825	5.31	26.38	41.49	46.30	36.50	74.00	-37.50	peak
2	4405.090	7.46	33.44	42.40	46.13	44.63	74.00	-29.37	peak
3	4924.000	8.01	34.11	42.49	54.14	53.77	74.00	-20.23	peak
4	6507.536	11.52	35.60	41.21	47.53	53.44	74.00	-20.56	peak
5	7386.000	10.03	36.21	40.59	46.70	52.35	74.00	-21.65	peak
6	9848.000	10.87	37.81	37.41	41.37	52.64	74.00	-21.36	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 242 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:Low

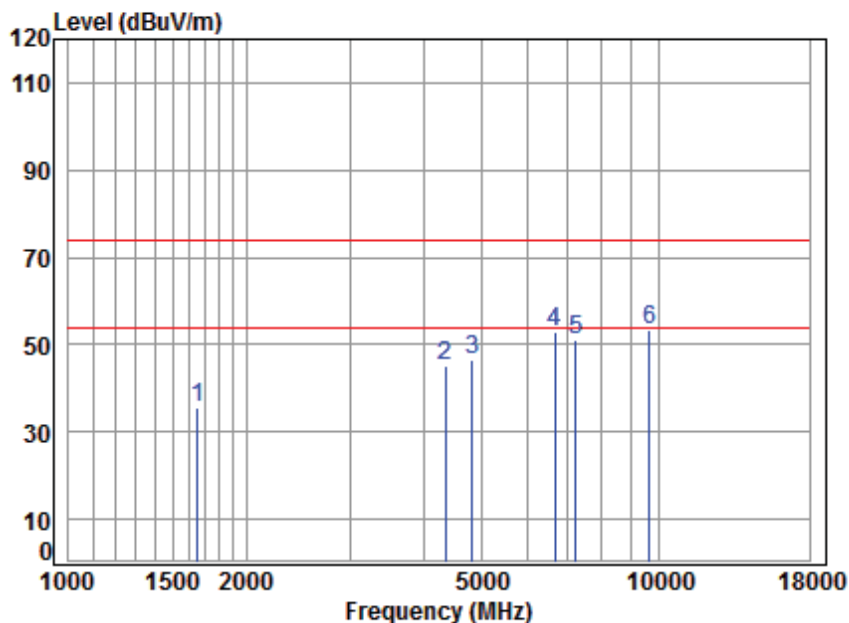

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 TX RSE
Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1653.550	5.28	26.48	41.50	45.12	35.38	74.00	-38.62	peak
2	4354.454	7.40	33.35	42.39	46.65	45.01	74.00	-28.99	peak
3	4824.000	7.91	34.00	42.47	47.15	46.59	74.00	-27.41	peak
4	6679.040	11.02	35.71	41.08	47.50	53.15	74.00	-20.85	peak
5	7236.000	10.07	36.09	40.69	45.78	51.25	74.00	-22.75	peak
6	9648.000	10.77	37.69	37.68	42.66	53.44	74.00	-20.56	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 243 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:Low

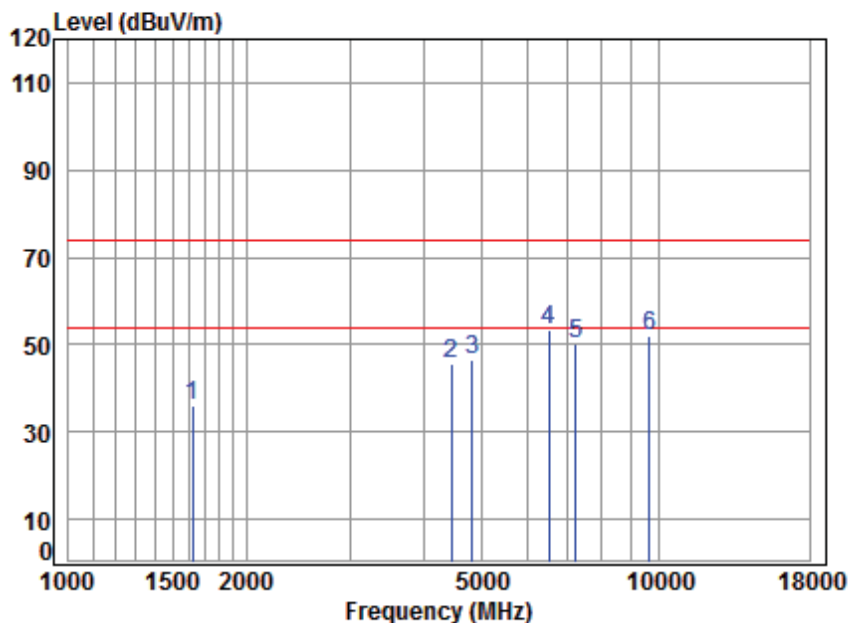

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 TX RSE
Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1620.431	5.32	26.34	41.48	46.07	36.25	74.00	-37.75	peak
2	4456.315	7.51	33.53	42.41	46.77	45.40	74.00	-28.60	peak
3	4824.000	7.91	34.00	42.47	47.31	46.75	74.00	-27.25	peak
4	6507.536	11.52	35.60	41.21	47.31	53.22	74.00	-20.78	peak
5	7236.000	10.07	36.09	40.69	44.54	50.01	74.00	-23.99	peak
6	9648.000	10.77	37.69	37.68	41.33	52.11	74.00	-21.89	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 244 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:middle

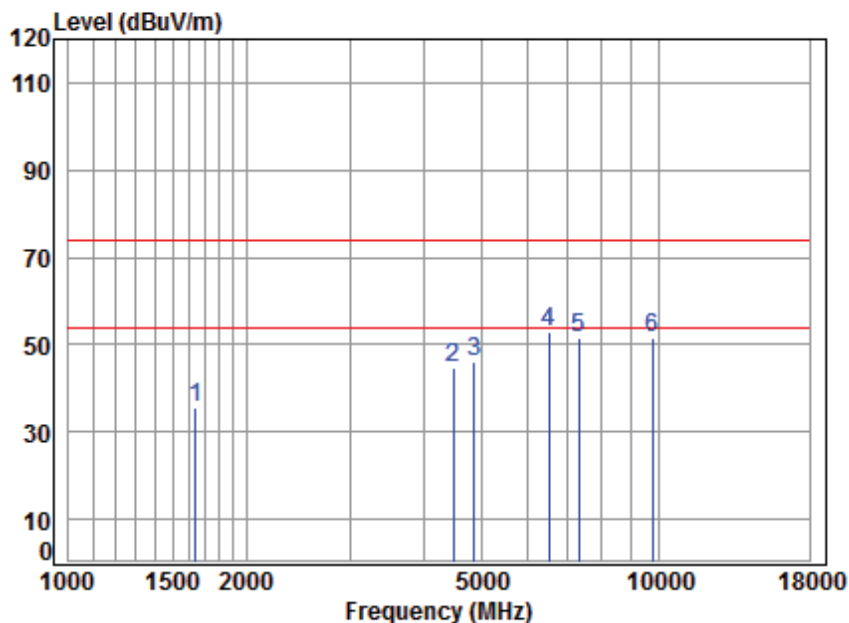

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1644.019	5.30	26.44	41.50	45.24	35.48	74.00	-38.52	peak
2	4482.150	7.54	33.57	42.41	46.16	44.86	74.00	-29.14	peak
3	4874.000	7.96	34.05	42.48	46.37	45.90	74.00	-28.10	peak
4	6507.536	11.52	35.60	41.21	47.16	53.07	74.00	-20.93	peak
5	7311.000	10.05	36.15	40.64	45.87	51.43	74.00	-22.57	peak
6	9748.000	10.82	37.75	37.54	40.69	51.72	74.00	-22.28	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 245 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:middle

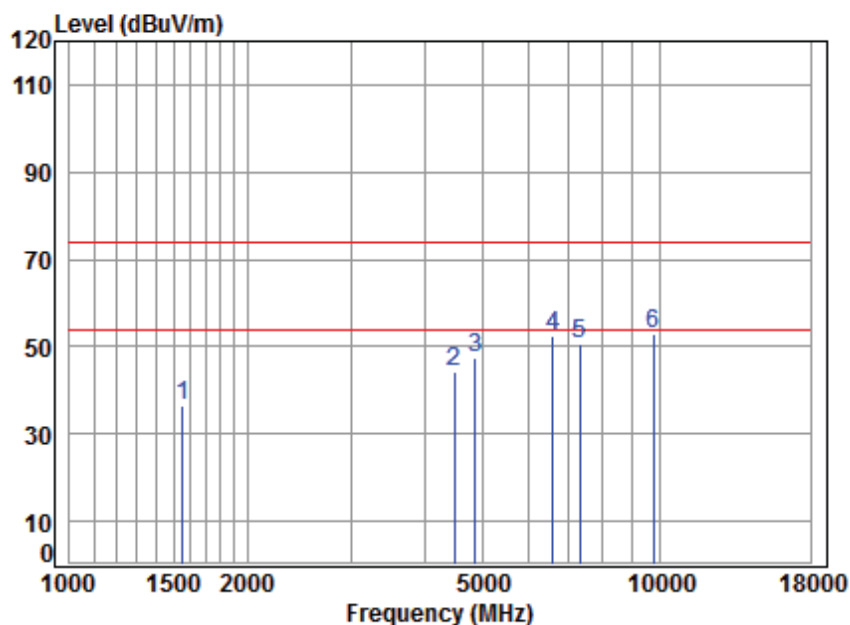

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1556.169	5.41	26.06	41.44	46.41	36.44	74.00	-37.56	peak
2	4482.150	7.54	33.57	42.41	45.65	44.35	74.00	-29.65	peak
3	4874.000	7.96	34.05	42.48	47.86	47.39	74.00	-26.61	peak
4	6583.209	11.30	35.65	41.15	46.85	52.65	74.00	-21.35	peak
5	7311.000	10.05	36.15	40.64	45.16	50.72	74.00	-23.28	peak
6	9748.000	10.82	37.75	37.54	42.06	53.09	74.00	-20.91	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 246 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:High

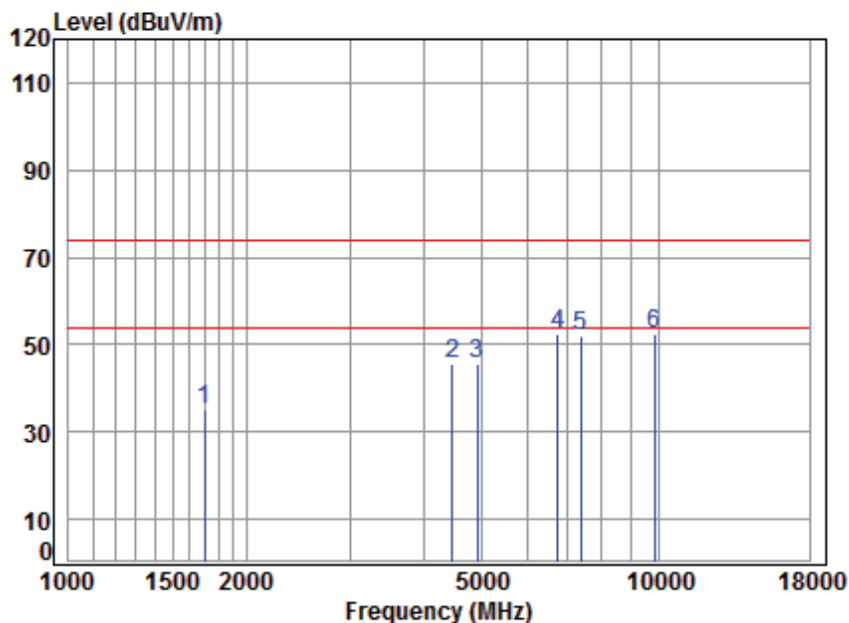

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 TX RSE
Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1702.042	5.23	26.68	41.53	44.54	34.92	74.00	-39.08	peak
2	4469.214	7.53	33.55	42.41	46.75	45.42	74.00	-28.58	peak
3	4924.000	8.01	34.11	42.49	45.90	45.53	74.00	-28.47	peak
4	6756.708	10.80	35.76	41.03	47.09	52.62	74.00	-21.38	peak
5	7386.000	10.03	36.21	40.59	46.35	52.00	74.00	-22.00	peak
6	9848.000	10.87	37.81	37.41	41.13	52.40	74.00	-21.60	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 247 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:High

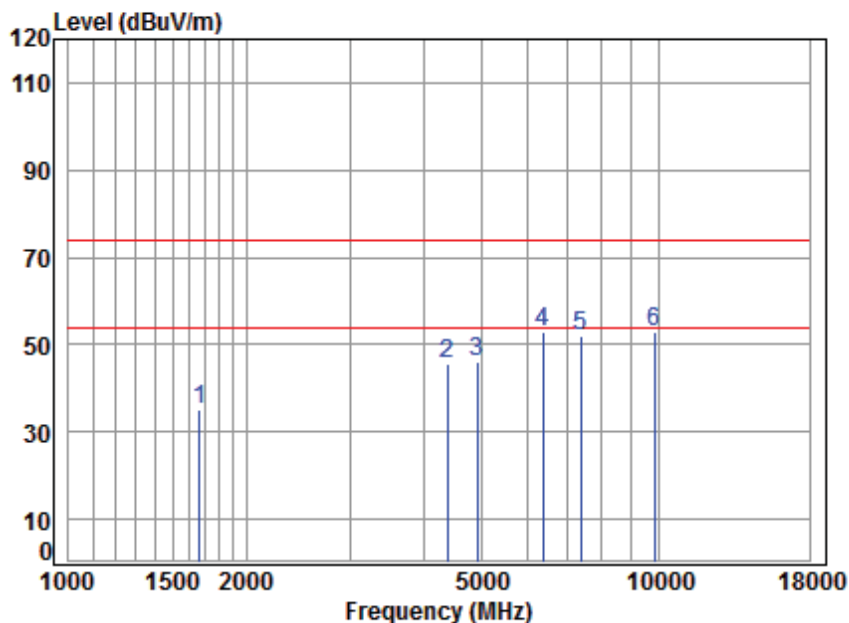

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 TX RSE
Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1667.951	5.27	26.54	41.51	45.06	35.36	74.00	-38.64	peak
2	4379.699	7.43	33.39	42.40	47.03	45.45	74.00	-28.55	peak
3	4924.000	8.01	34.11	42.49	46.40	46.03	74.00	-27.97	peak
4	6358.789	11.27	35.46	41.32	47.56	52.97	74.00	-21.03	peak
5	7386.000	10.03	36.21	40.59	46.19	51.84	74.00	-22.16	peak
6	9848.000	10.87	37.81	37.41	41.72	52.99	74.00	-21.01	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 248 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:Low

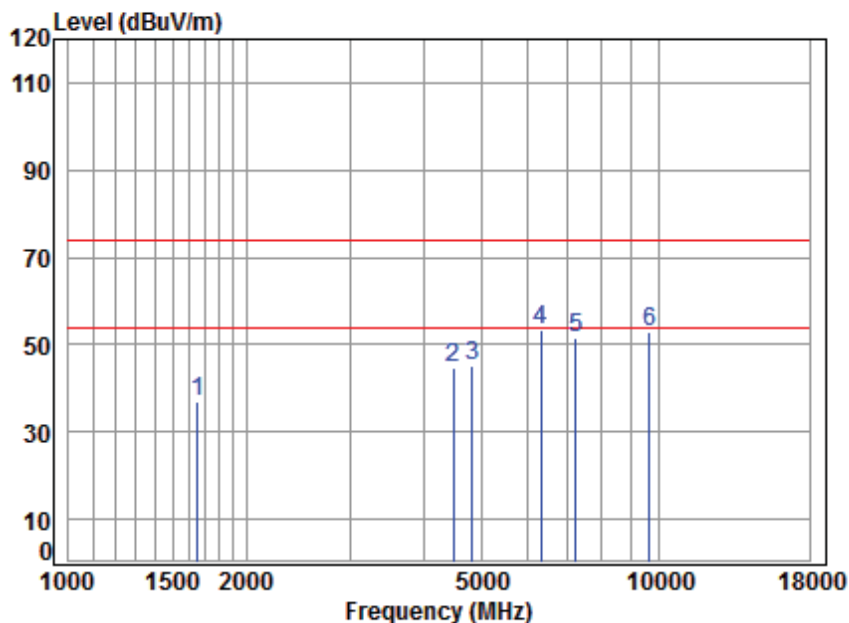

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 TX RSE
Note : 2.4G WIFI 11N 20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1653.550	5.28	26.48	41.50	46.81	37.07	74.00	-36.93	peak
2	4482.150	7.54	33.57	42.41	46.15	44.85	74.00	-29.15	peak
3	4824.000	7.91	34.00	42.47	45.86	45.30	74.00	-28.70	peak
4	6322.136	11.20	35.43	41.35	47.95	53.23	74.00	-20.77	peak
5	7236.000	10.07	36.09	40.69	46.01	51.48	74.00	-22.52	peak
6	9648.000	10.77	37.69	37.68	42.13	52.91	74.00	-21.09	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 249 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:Low

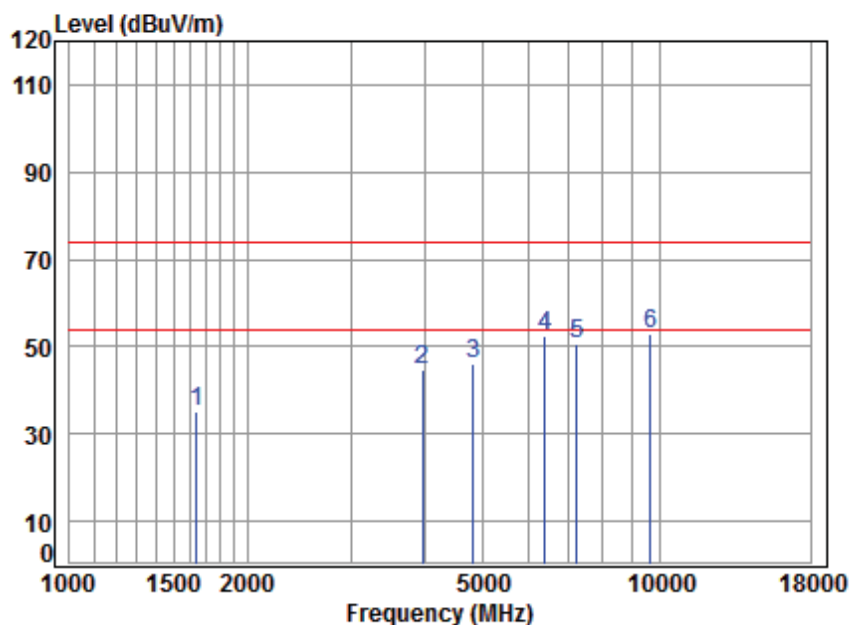

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 TX RSE
Note : 2.4G WIFI 11N 20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1639.274	5.30	26.42	41.49	44.96	35.19	74.00	-38.81	peak
2	3969.767	6.95	32.64	42.32	47.26	44.53	74.00	-29.47	peak
3	4824.000	7.91	34.00	42.47	46.68	46.12	74.00	-27.88	peak
4	6395.654	11.34	35.50	41.30	47.04	52.58	74.00	-21.42	peak
5	7236.000	10.07	36.09	40.69	45.40	50.87	74.00	-23.13	peak
6	9648.000	10.77	37.69	37.68	42.03	52.81	74.00	-21.19	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 250 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:middle

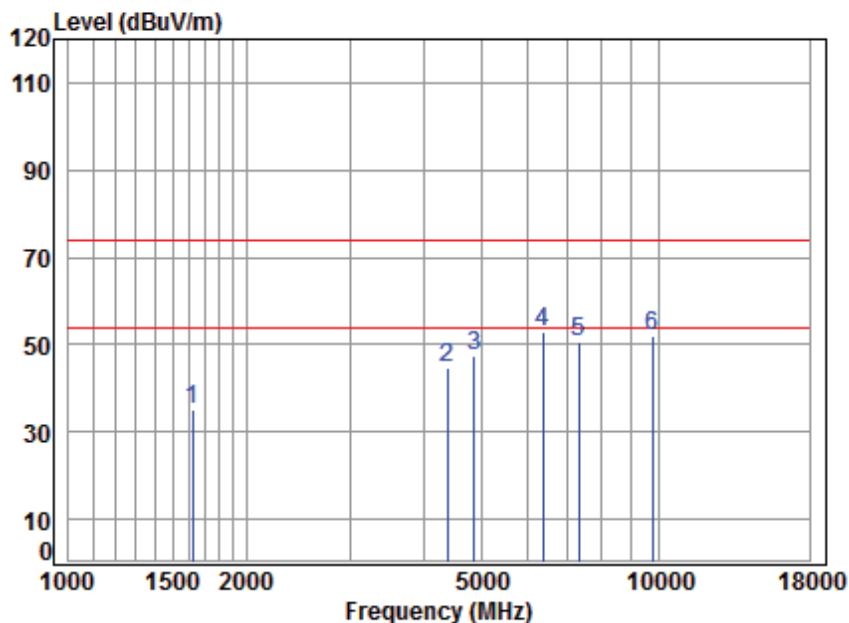

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11N 20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1625.121	5.32	26.36	41.49	45.12	35.31	74.00	-38.69	peak
2	4392.376	7.44	33.42	42.40	46.30	44.76	74.00	-29.24	peak
3	4874.000	7.96	34.05	42.48	48.04	47.57	74.00	-26.43	peak
4	6358.789	11.27	35.46	41.32	47.41	52.82	74.00	-21.18	peak
5	7311.000	10.05	36.15	40.64	45.31	50.87	74.00	-23.13	peak
6	9748.000	10.82	37.75	37.54	40.87	51.90	74.00	-22.10	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 251 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:middle

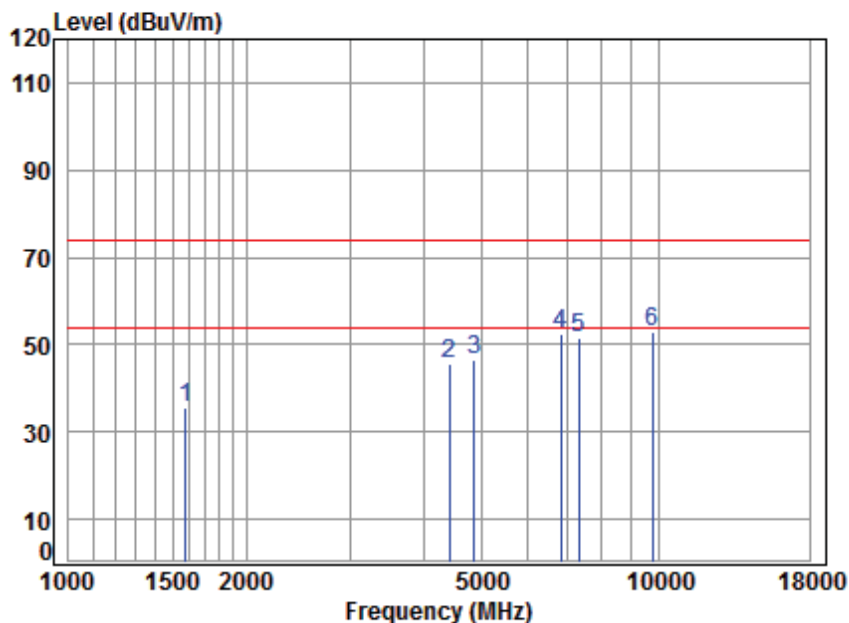

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11N 20

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1578.822	5.38	26.16	41.46	45.63	35.71	74.00	-38.29	peak
2	4417.841	7.47	33.46	42.40	46.97	45.50	74.00	-28.50	peak
3	4874.000	7.96	34.05	42.48	47.08	46.61	74.00	-27.39	peak
4	6815.551	10.64	35.79	40.98	47.14	52.59	74.00	-21.41	peak
5	7311.000	10.05	36.15	40.64	46.17	51.73	74.00	-22.27	peak
6	9748.000	10.82	37.75	37.54	41.79	52.82	74.00	-21.18	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 252 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:High

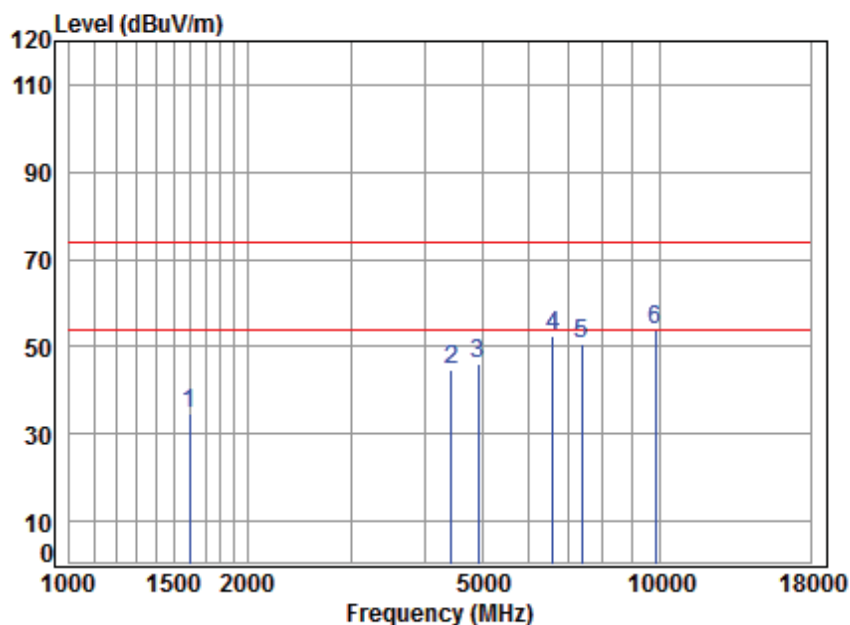

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 TX RSE
Note : 2.4G WIFI 11N 20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1597.181	5.35	26.24	41.47	44.72	34.84	74.00	-39.16	peak
2	4430.628	7.48	33.48	42.41	46.06	44.61	74.00	-29.39	peak
3	4924.000	8.01	34.11	42.49	46.41	46.04	74.00	-27.96	peak
4	6583.209	11.30	35.65	41.15	46.87	52.67	74.00	-21.33	peak
5	7386.000	10.03	36.21	40.59	44.77	50.42	74.00	-23.58	peak
6	9848.000	10.87	37.81	37.41	42.71	53.98	74.00	-20.02	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 253 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:High

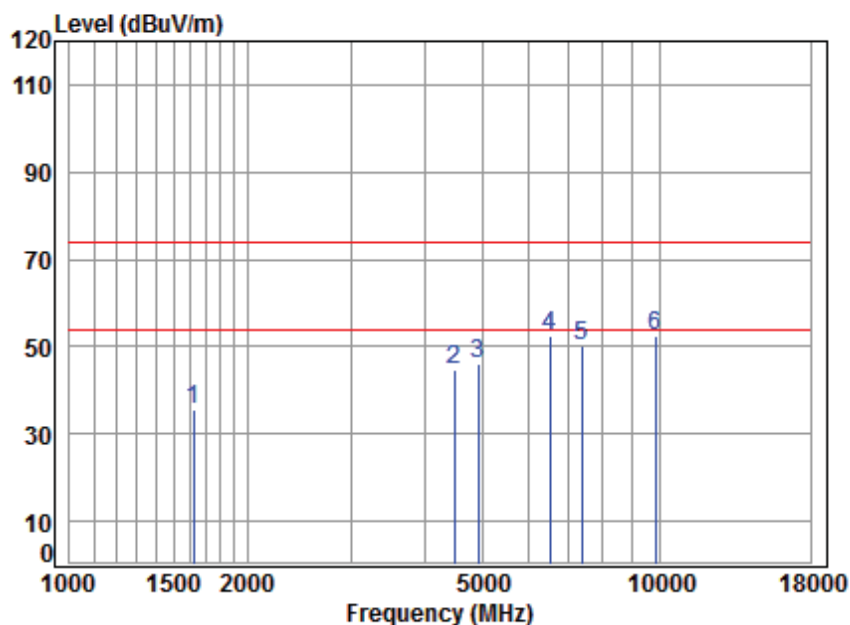

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 TX RSE
Note : 2.4G WIFI 11N 20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1625.121	5.32	26.36	41.49	45.42	35.61	74.00	-38.39	peak
2	4482.150	7.54	33.57	42.41	45.95	44.65	74.00	-29.35	peak
3	4924.000	8.01	34.11	42.49	46.27	45.90	74.00	-28.10	peak
4	6526.373	11.46	35.62	41.20	46.76	52.64	74.00	-21.36	peak
5	7386.000	10.03	36.21	40.59	44.68	50.33	74.00	-23.67	peak
6	9848.000	10.87	37.81	37.41	41.40	52.67	74.00	-21.33	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 254 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:Low

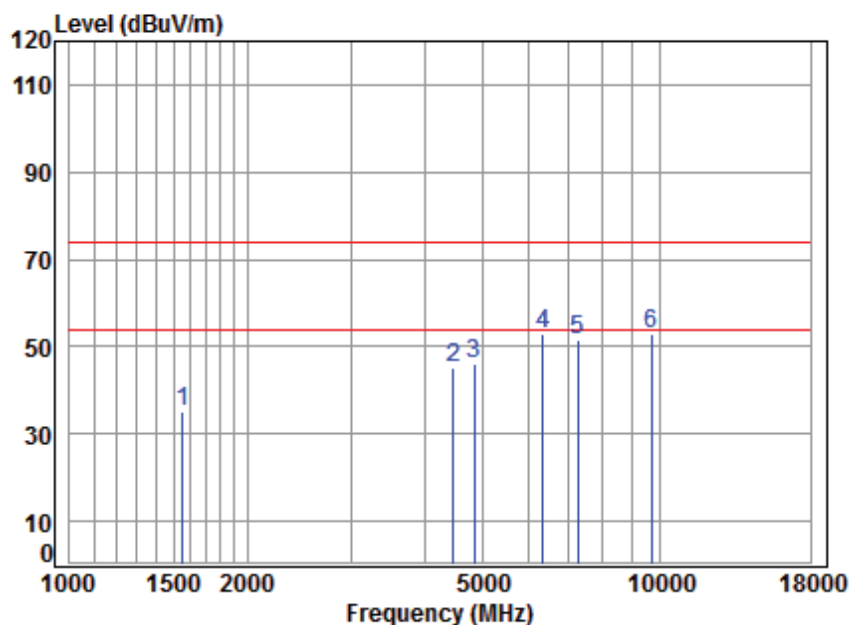

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2422 TX RSE
Note : 2.4G WIFI 11N 40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1551.677	5.41	26.04	41.44	45.01	35.02	74.00	-38.98	peak
2	4469.214	7.53	33.55	42.41	46.55	45.22	74.00	-28.78	peak
3	4844.000	7.93	34.02	42.48	46.46	45.93	74.00	-28.07	peak
4	6340.436	11.24	35.44	41.34	47.72	53.06	74.00	-20.94	peak
5	7266.000	10.06	36.12	40.67	45.97	51.48	74.00	-22.52	peak
6	9688.000	10.79	37.71	37.63	42.09	52.96	74.00	-21.04	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 255 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:Low

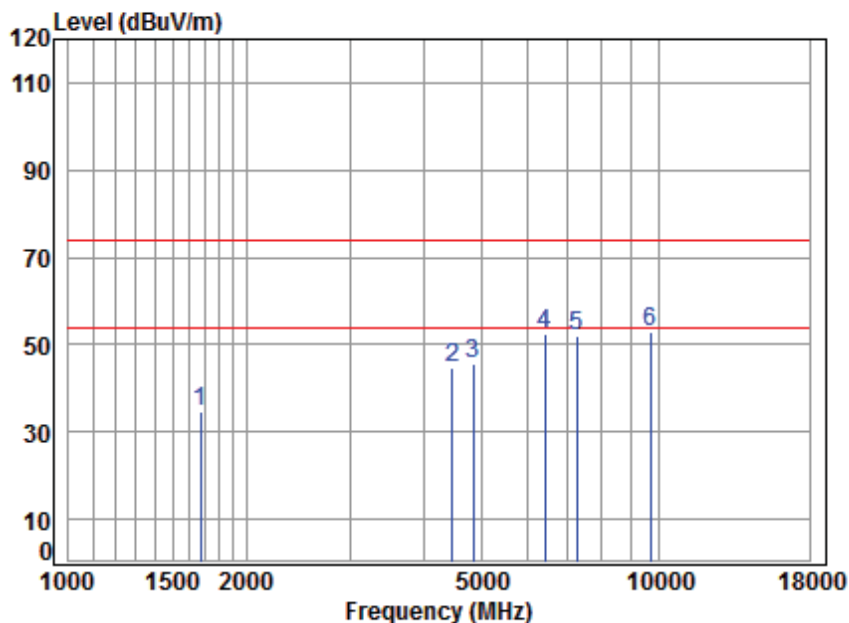

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2422 TX RSE
Note : 2.4G WIFI 11N 40

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1672.779	5.26	26.56	41.52	44.57	34.87	74.00	-39.13	peak
2	4469.214	7.53	33.55	42.41	45.89	44.56	74.00	-29.44	peak
3	4844.000	7.93	34.02	42.48	46.37	45.84	74.00	-28.16	peak
4	6414.167	11.38	35.52	41.28	46.80	52.42	74.00	-21.58	peak
5	7266.000	10.06	36.12	40.67	46.48	51.99	74.00	-22.01	peak
6	9688.000	10.79	37.71	37.63	41.88	52.75	74.00	-21.25	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 256 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:middle

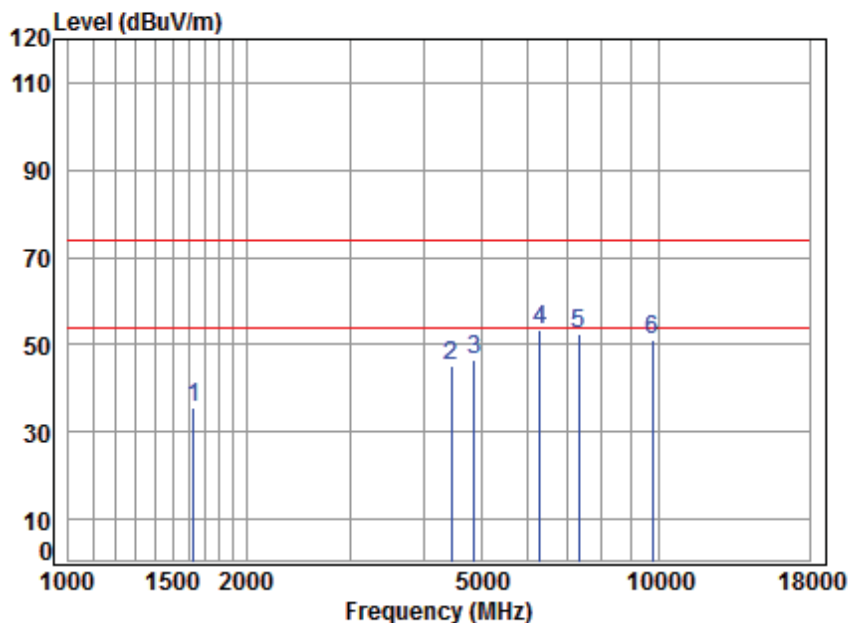

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11N 40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1629.825	5.31	26.38	41.49	45.23	35.43	74.00	-38.57	peak
2	4456.315	7.51	33.53	42.41	46.68	45.31	74.00	-28.69	peak
3	4874.000	7.96	34.05	42.48	47.06	46.59	74.00	-27.41	peak
4	6303.890	11.17	35.41	41.37	48.34	53.55	74.00	-20.45	peak
5	7311.000	10.05	36.15	40.64	47.03	52.59	74.00	-21.41	peak
6	9748.000	10.82	37.75	37.54	40.25	51.28	74.00	-22.72	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 257 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:middle

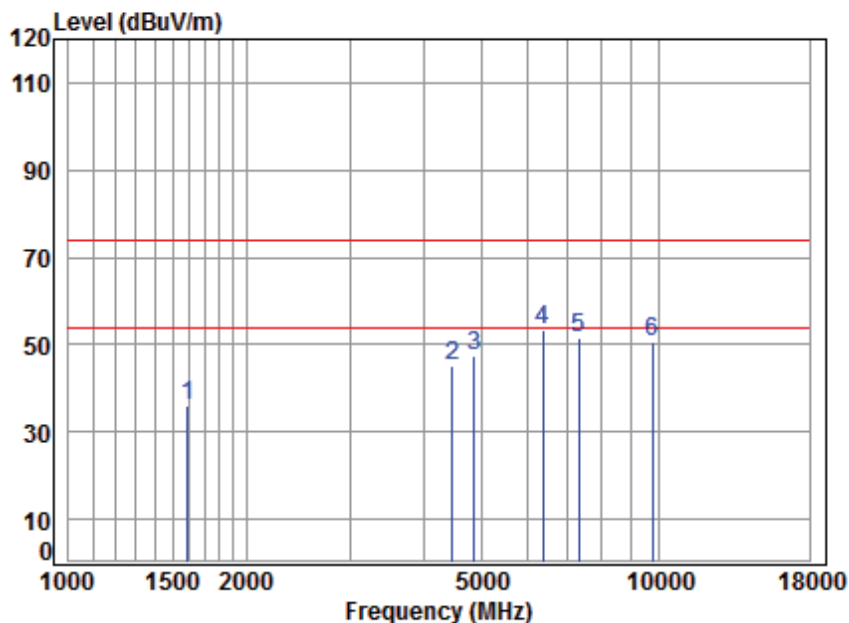

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11N 40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1592.571	5.36	26.22	41.47	45.78	35.89	74.00	-38.11	peak
2	4469.214	7.53	33.55	42.41	46.73	45.40	74.00	-28.60	peak
3	4874.000	7.96	34.05	42.48	47.98	47.51	74.00	-26.49	peak
4	6358.789	11.27	35.46	41.32	47.83	53.24	74.00	-20.76	peak
5	7311.000	10.05	36.15	40.64	45.95	51.51	74.00	-22.49	peak
6	9748.000	10.82	37.75	37.54	39.75	50.78	74.00	-23.22	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 258 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:High

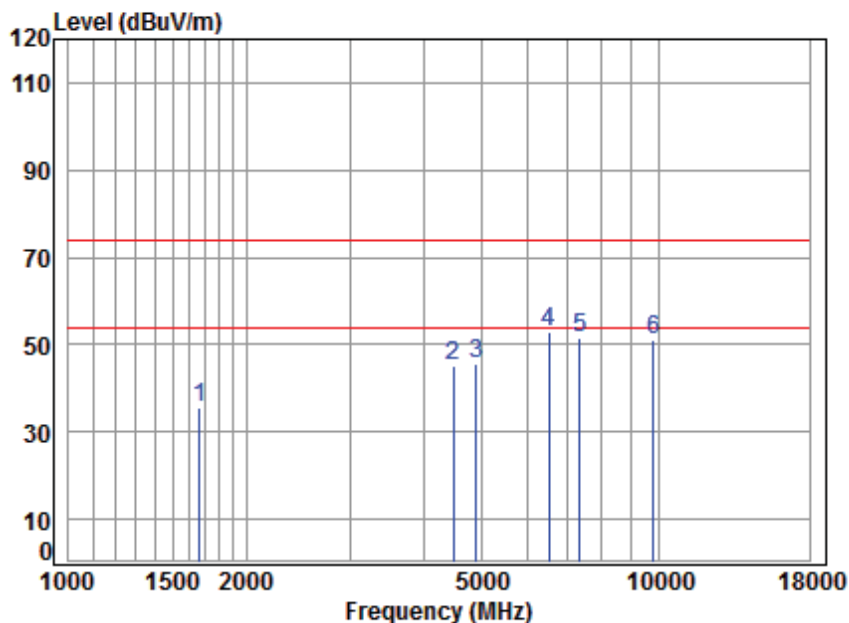

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2452 TX RSE
Note : 2.4G WIFI 11N 40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1667.951	5.27	26.54	41.51	45.22	35.52	74.00	-38.48 peak
2	4482.150	7.54	33.57	42.41	46.69	45.39	74.00	-28.61 peak
3	4904.000	7.99	34.09	42.48	45.96	45.56	74.00	-28.44 peak
4	6507.536	11.52	35.60	41.21	47.20	53.11	74.00	-20.89 peak
5	7356.000	10.04	36.19	40.61	45.78	51.40	74.00	-22.60 peak
6	9808.000	10.85	37.79	37.46	39.91	51.09	74.00	-22.91 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 259 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:High

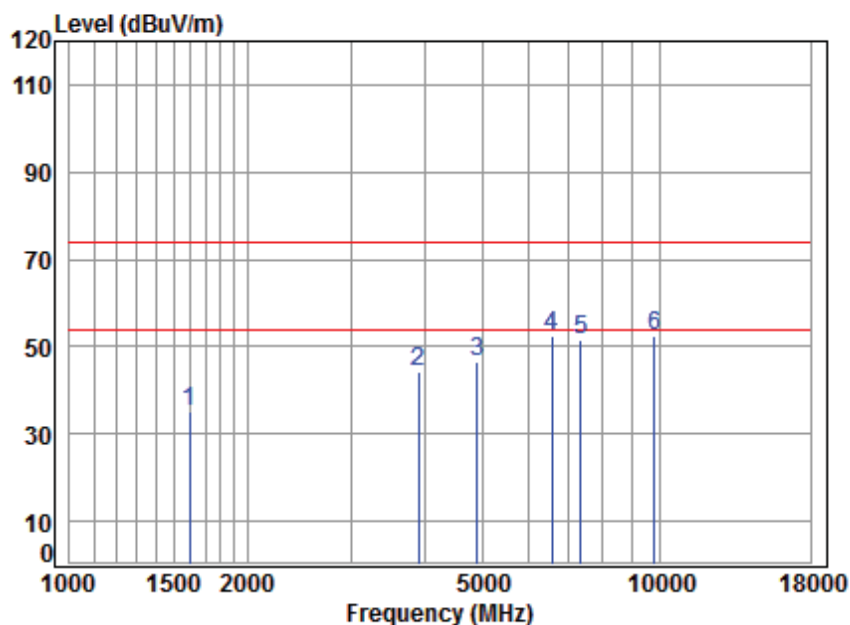

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2452 TX RSE
Note : 2.4G WIFI 11N 40

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1597.181	5.35	26.24	41.47	44.84	34.96	74.00	-39.04	peak
2	3901.516	6.88	32.51	42.31	47.19	44.27	74.00	-29.73	peak
3	4904.000	7.99	34.09	42.48	46.81	46.41	74.00	-27.59	peak
4	6564.209	11.35	35.64	41.17	46.63	52.45	74.00	-21.55	peak
5	7356.000	10.04	36.19	40.61	45.88	51.50	74.00	-22.50	peak
6	9808.000	10.85	37.79	37.46	41.36	52.54	74.00	-21.46	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 260 of 346

Test data for Antenna4:

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:Low

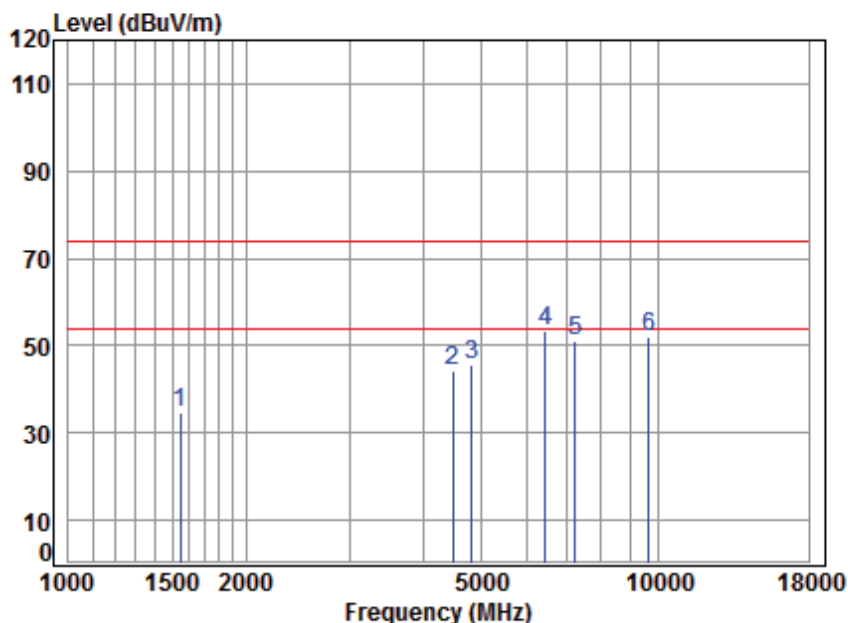

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 TX RSE
Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1547.199	5.42	26.02	41.44	44.81	34.81	74.00	-39.19	peak
2	4495.125	7.55	33.59	42.42	45.34	44.06	74.00	-29.94	peak
3	4824.000	7.91	34.00	42.47	46.14	45.58	74.00	-28.42	peak
4	6451.353	11.45	35.55	41.25	47.79	53.54	74.00	-20.46	peak
5	7236.000	10.07	36.09	40.69	45.42	50.89	74.00	-23.11	peak
6	9648.000	10.77	37.69	37.68	41.44	52.22	74.00	-21.78	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 261 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:Low

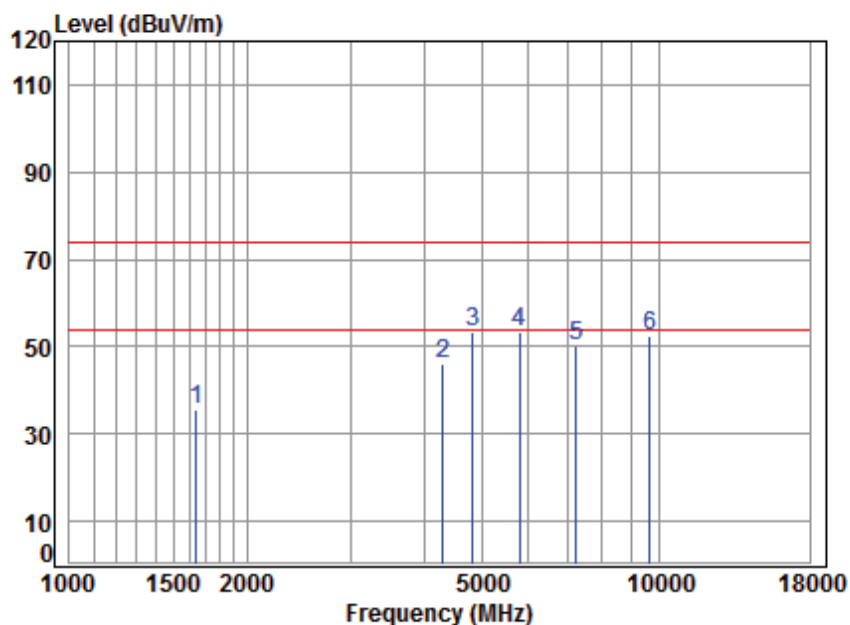

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 TX RSE
Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1644.019	5.30	26.44	41.50	45.19	35.43	74.00	-38.57	peak
2	4304.400	7.34	33.26	42.38	47.79	46.01	74.00	-27.99	peak
3	4824.000	7.91	34.00	42.47	53.75	53.19	74.00	-20.81	peak
4	5797.032	9.89	34.90	41.78	50.59	53.60	74.00	-20.40	peak
5	7236.000	10.07	36.09	40.69	44.62	50.09	74.00	-23.91	peak
6	9648.000	10.77	37.69	37.68	41.67	52.45	74.00	-21.55	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 262 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:middle

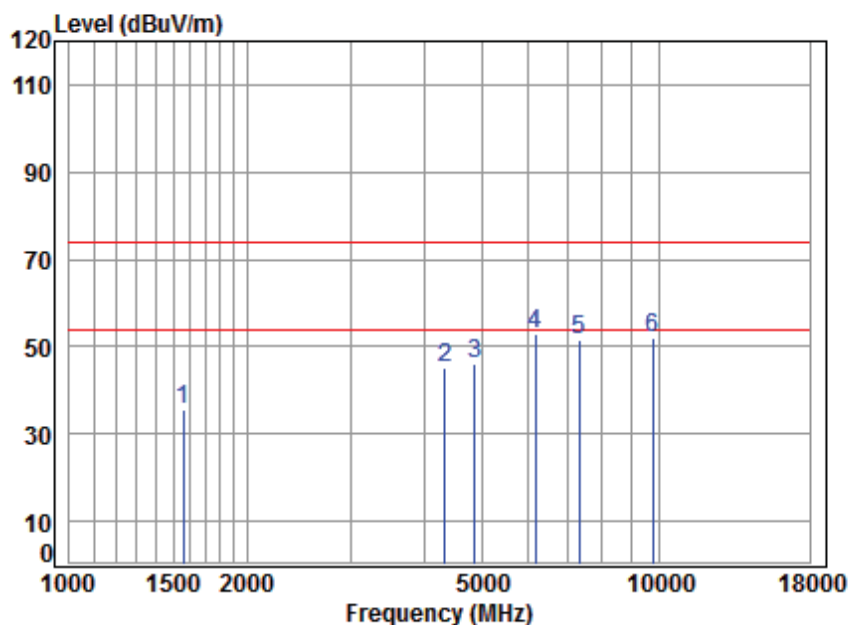

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1560.673	5.40	26.08	41.45	45.69	35.72	74.00	-38.28	peak
2	4341.886	7.38	33.33	42.39	46.88	45.20	74.00	-28.80	peak
3	4874.000	7.96	34.05	42.48	46.33	45.86	74.00	-28.14	peak
4	6177.627	10.92	35.28	41.47	48.05	52.78	74.00	-21.22	peak
5	7311.000	10.05	36.15	40.64	46.22	51.78	74.00	-22.22	peak
6	9748.000	10.82	37.75	37.54	40.83	51.86	74.00	-22.14	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 263 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:middle

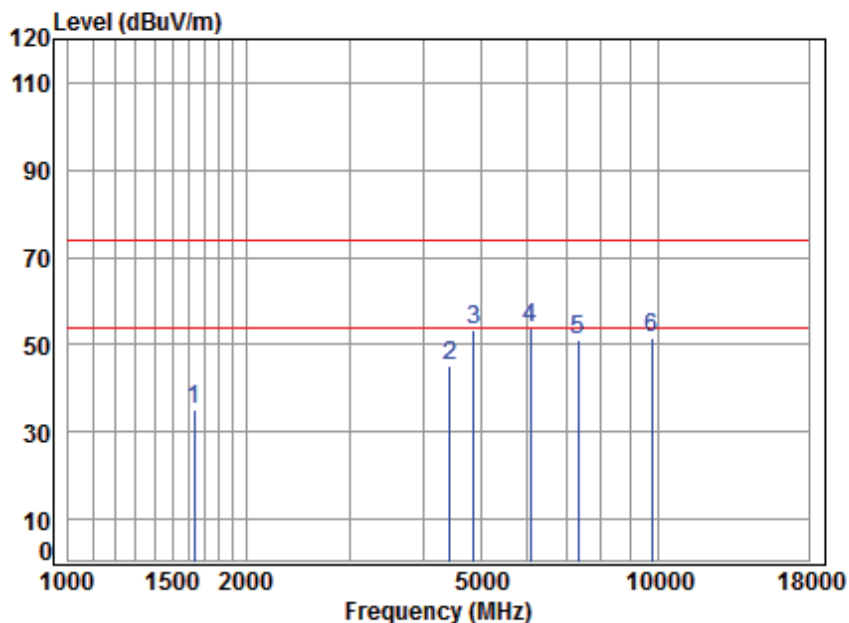

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1634.543	5.31	26.40	41.49	44.74	34.96	74.00	-39.04	peak
2	4430.628	7.48	33.48	42.41	46.44	44.99	74.00	-29.01	peak
3	4874.000	7.96	34.05	42.48	53.69	53.22	74.00	-20.78	peak
4	6071.417	10.71	35.17	41.55	49.35	53.68	74.00	-20.32	peak
5	7311.000	10.05	36.15	40.64	45.37	50.93	74.00	-23.07	peak
6	9748.000	10.82	37.75	37.54	40.33	51.36	74.00	-22.64	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 264 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:High

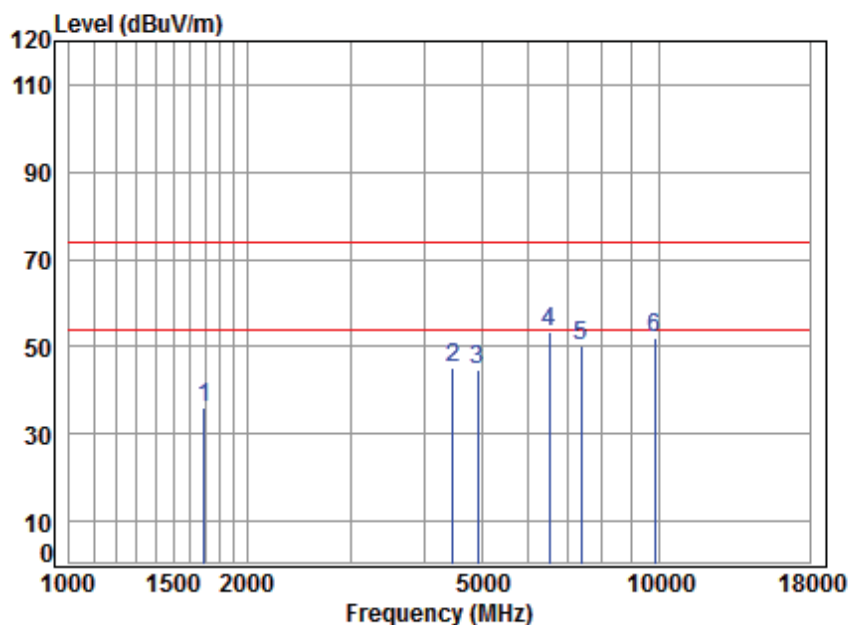

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 TX RSE
Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1692.231	5.24	26.64	41.53	45.87	36.22	74.00	-37.78	peak
2	4469.214	7.53	33.55	42.41	46.43	45.10	74.00	-28.90	peak
3	4924.000	8.01	34.11	42.49	45.15	44.78	74.00	-29.22	peak
4	6507.536	11.52	35.60	41.21	47.25	53.16	74.00	-20.84	peak
5	7386.000	10.03	36.21	40.59	44.50	50.15	74.00	-23.85	peak
6	9848.000	10.87	37.81	37.41	40.83	52.10	74.00	-21.90	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 265 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:High

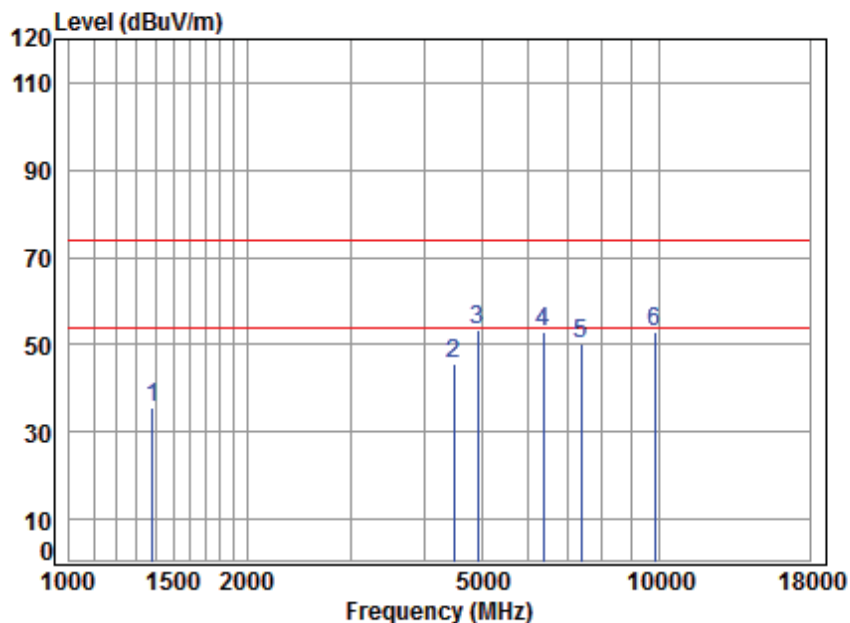

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 TX RSE
Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1382.262	5.09	25.36	41.32	46.24	35.37	74.00	-38.63	peak
2	4482.150	7.54	33.57	42.41	46.75	45.45	74.00	-28.55	peak
3	4924.000	8.01	34.11	42.49	53.93	53.56	74.00	-20.44	peak
4	6377.195	11.31	35.48	41.31	47.31	52.79	74.00	-21.21	peak
5	7386.000	10.03	36.21	40.59	44.40	50.05	74.00	-23.95	peak
6	9848.000	10.87	37.81	37.41	41.80	53.07	74.00	-20.93	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 266 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:Low

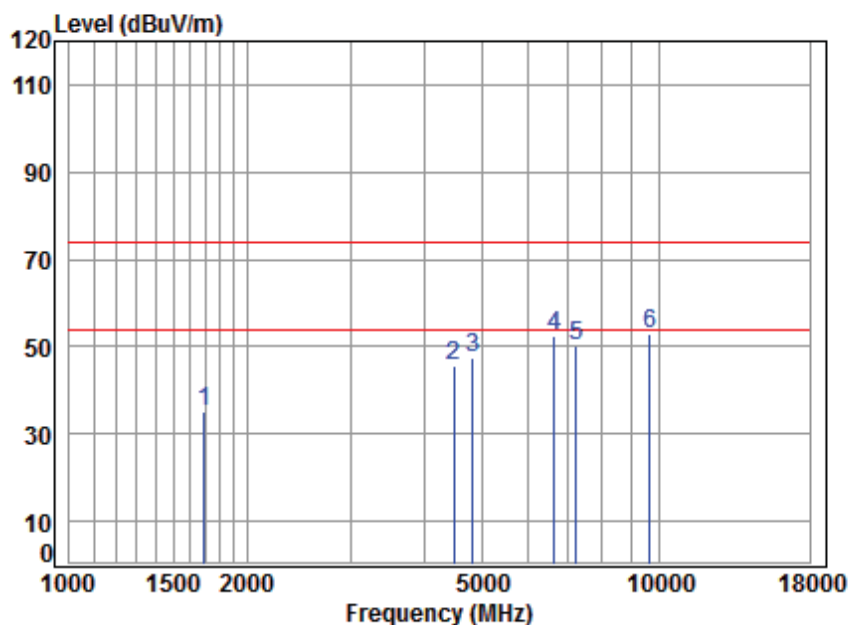

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 TX RSE
Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1692.231	5.24	26.64	41.53	44.82	35.17	74.00	-38.83	peak
2	4482.150	7.54	33.57	42.41	46.78	45.48	74.00	-28.52	peak
3	4824.000	7.91	34.00	42.47	47.94	47.38	74.00	-26.62	peak
4	6640.542	11.13	35.69	41.11	46.85	52.56	74.00	-21.44	peak
5	7236.000	10.07	36.09	40.69	44.73	50.20	74.00	-23.80	peak
6	9648.000	10.77	37.69	37.68	42.24	53.02	74.00	-20.98	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 267 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:Low

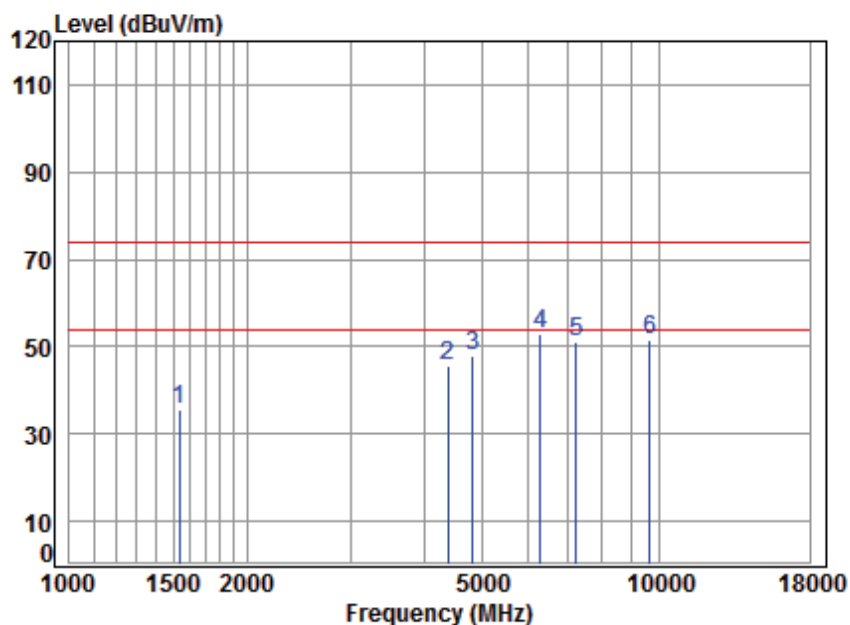

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 TX RSE
Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1533.841	5.44	25.96	41.43	45.50	35.47	74.00	-38.53	peak
2	4379.699	7.43	33.39	42.40	47.31	45.73	74.00	-28.27	peak
3	4824.000	7.91	34.00	42.47	48.32	47.76	74.00	-26.24	peak
4	6303.890	11.17	35.41	41.37	47.51	52.72	74.00	-21.28	peak
5	7236.000	10.07	36.09	40.69	45.49	50.96	74.00	-23.04	peak
6	9648.000	10.77	37.69	37.68	40.78	51.56	74.00	-22.44	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 268 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:middle

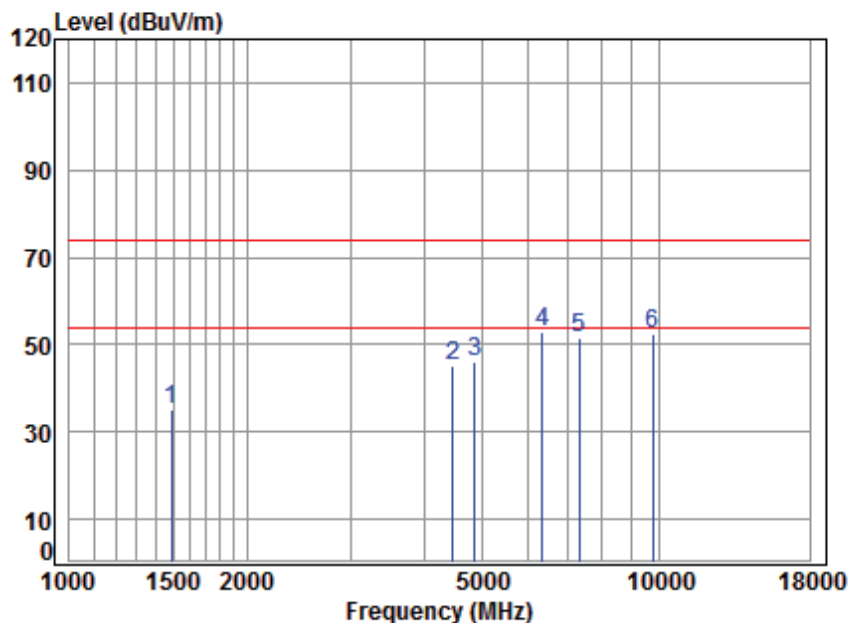

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1490.142	5.45	25.76	41.40	45.44	35.25	74.00	-38.75	peak
2	4469.214	7.53	33.55	42.41	46.54	45.21	74.00	-28.79	peak
3	4874.000	7.96	34.05	42.48	46.41	45.94	74.00	-28.06	peak
4	6340.436	11.24	35.44	41.34	47.48	52.82	74.00	-21.18	peak
5	7311.000	10.05	36.15	40.64	46.09	51.65	74.00	-22.35	peak
6	9748.000	10.82	37.75	37.54	41.39	52.42	74.00	-21.58	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 269 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:middle

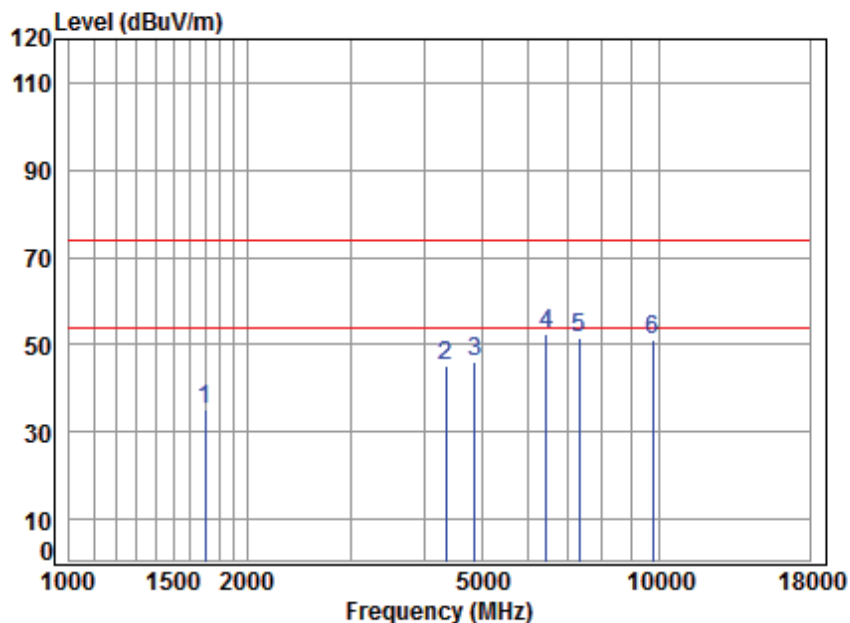

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1702.042	5.23	26.68	41.53	44.80	35.18	74.00	-38.82	peak
2	4354.454	7.40	33.35	42.39	46.63	44.99	74.00	-29.01	peak
3	4874.000	7.96	34.05	42.48	46.49	46.02	74.00	-27.98	peak
4	6432.732	11.41	35.54	41.27	47.00	52.68	74.00	-21.32	peak
5	7311.000	10.05	36.15	40.64	45.83	51.39	74.00	-22.61	peak
6	9748.000	10.82	37.75	37.54	40.18	51.21	74.00	-22.79	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 270 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:High

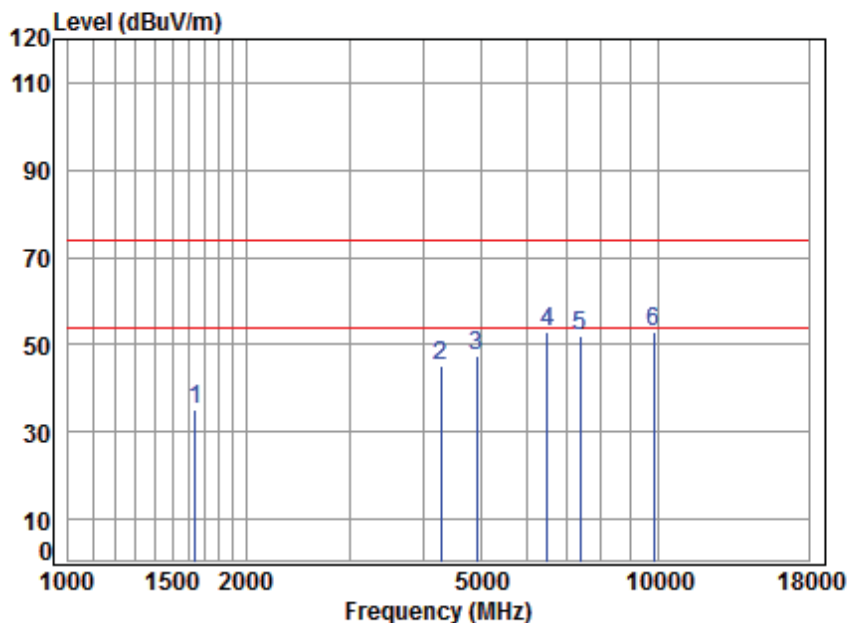

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 TX RSE
Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1639.274	5.30	26.42	41.49	45.10	35.33	74.00	-38.67	peak
2	4291.977	7.33	33.24	42.38	46.87	45.06	74.00	-28.94	peak
3	4924.000	8.01	34.11	42.49	47.74	47.37	74.00	-26.63	peak
4	6488.754	11.52	35.59	41.22	46.99	52.88	74.00	-21.12	peak
5	7386.000	10.03	36.21	40.59	46.24	51.89	74.00	-22.11	peak
6	9848.000	10.87	37.81	37.41	41.85	53.12	74.00	-20.88	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 271 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:High

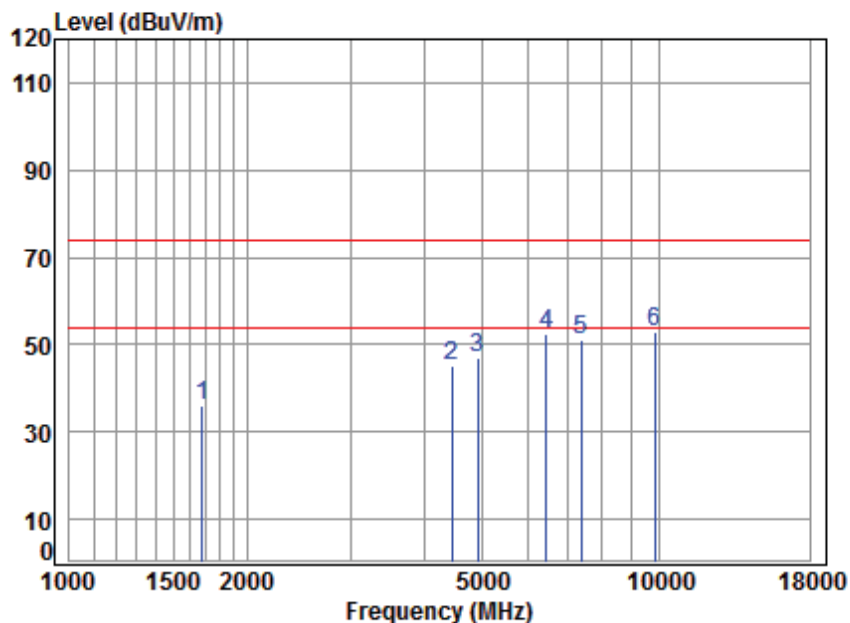

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 TX RSE
Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1677.621	5.25	26.58	41.52	45.69	36.00	74.00	-38.00	peak
2	4456.315	7.51	33.53	42.41	46.44	45.07	74.00	-28.93	peak
3	4924.000	8.01	34.11	42.49	47.24	46.87	74.00	-27.13	peak
4	6432.732	11.41	35.54	41.27	46.71	52.39	74.00	-21.61	peak
5	7386.000	10.03	36.21	40.59	45.61	51.26	74.00	-22.74	peak
6	9848.000	10.87	37.81	37.41	41.81	53.08	74.00	-20.92	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 272 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:Low

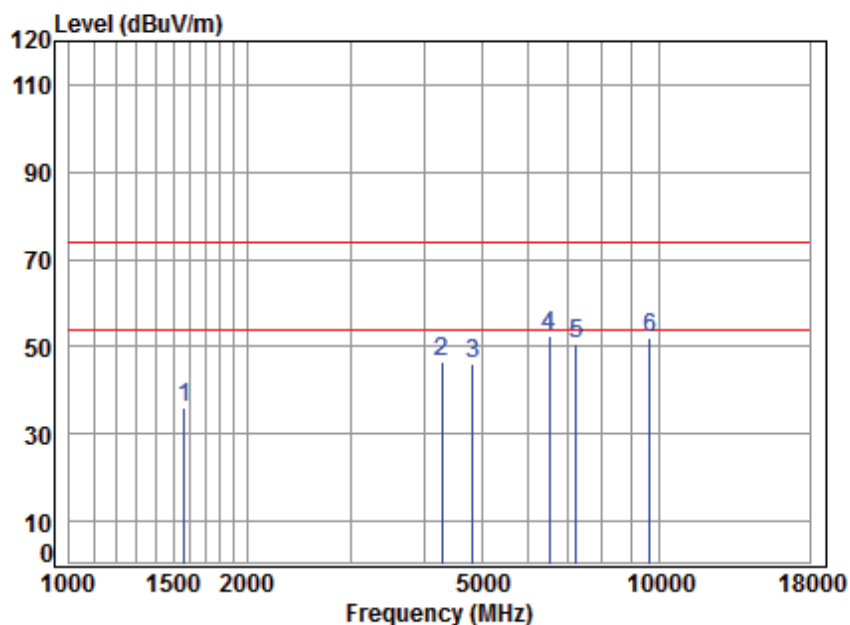

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 TX RSE
Note : 2.4G WIFI 11N 20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1569.721	5.39	26.12	41.45	45.85	35.91	74.00	-38.09	peak
2	4279.589	7.31	33.22	42.38	48.31	46.46	74.00	-27.54	peak
3	4824.000	7.91	34.00	42.47	46.64	46.08	74.00	-27.92	peak
4	6526.373	11.46	35.62	41.20	46.39	52.27	74.00	-21.73	peak
5	7236.000	10.07	36.09	40.69	44.97	50.44	74.00	-23.56	peak
6	9648.000	10.77	37.69	37.68	41.17	51.95	74.00	-22.05	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 273 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:Low

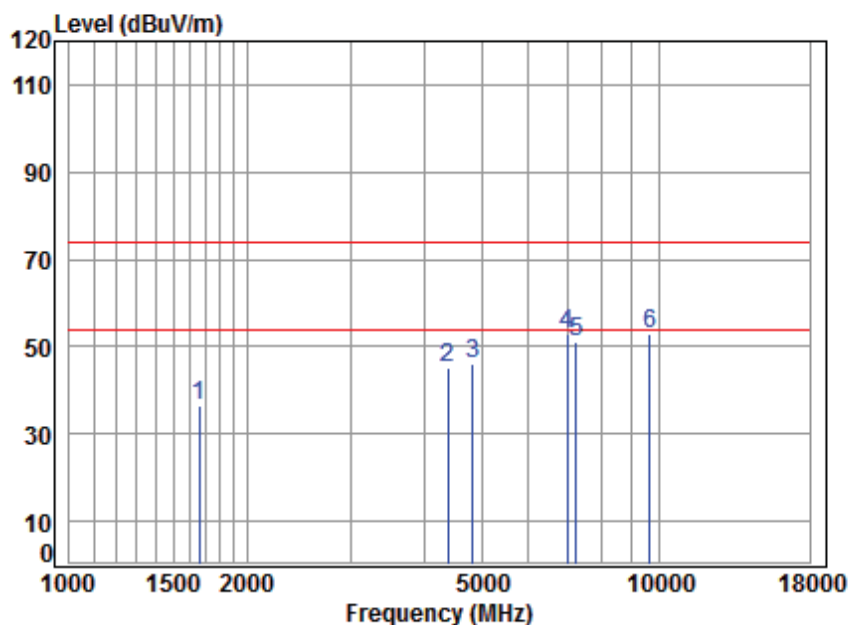

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 TX RSE
Note : 2.4G WIFI 11N 20

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1663.137	5.27	26.52	41.51	46.08	36.36	74.00	-37.64	peak
2	4392.376	7.44	33.42	42.40	46.87	45.33	74.00	-28.67	peak
3	4824.000	7.91	34.00	42.47	46.70	46.14	74.00	-27.86	peak
4	6995.172	10.14	35.90	40.86	47.82	53.00	74.00	-21.00	peak
5	7236.000	10.07	36.09	40.69	45.60	51.07	74.00	-22.93	peak
6	9648.000	10.77	37.69	37.68	42.29	53.07	74.00	-20.93	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 274 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:middle

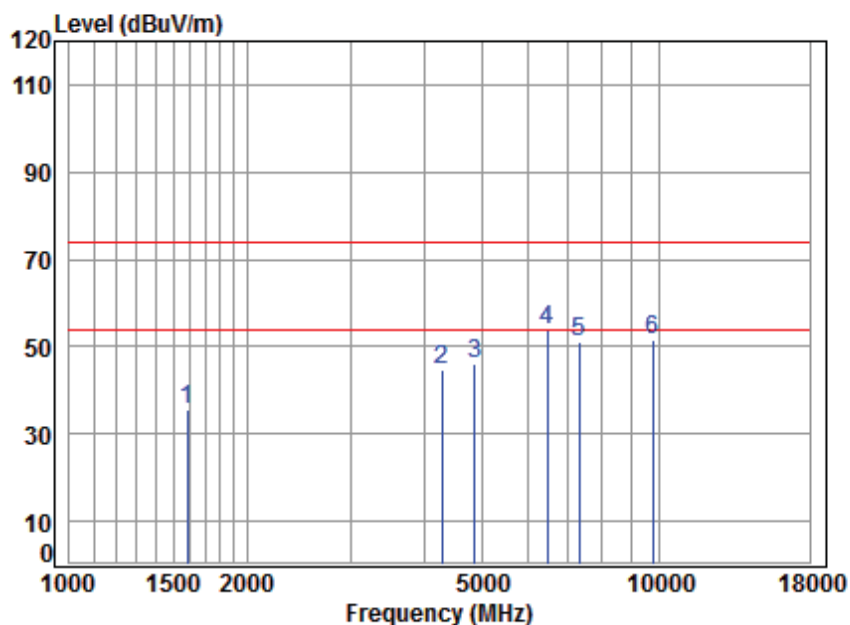

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11N 20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1583.392	5.37	26.18	41.46	45.39	35.48	74.00	-38.52	peak
2	4279.589	7.31	33.22	42.38	46.77	44.92	74.00	-29.08	peak
3	4874.000	7.96	34.05	42.48	46.35	45.88	74.00	-28.12	peak
4	6470.026	11.48	35.57	41.24	47.95	53.76	74.00	-20.24	peak
5	7311.000	10.05	36.15	40.64	45.73	51.29	74.00	-22.71	peak
6	9748.000	10.82	37.75	37.54	40.37	51.40	74.00	-22.60	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 275 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:middle

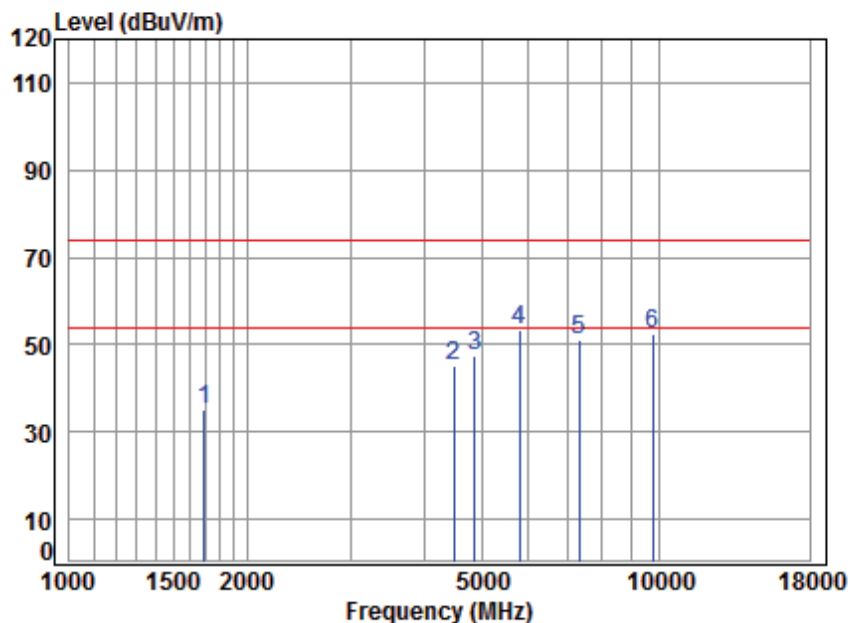

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11N 20

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1692.231	5.24	26.64	41.53	44.90	35.25	74.00	-38.75	peak
2	4482.150	7.54	33.57	42.41	46.48	45.18	74.00	-28.82	peak
3	4874.000	7.96	34.05	42.48	47.73	47.26	74.00	-26.74	peak
4	5797.032	9.89	34.90	41.78	50.43	53.44	74.00	-20.56	peak
5	7311.000	10.05	36.15	40.64	45.65	51.21	74.00	-22.79	peak
6	9748.000	10.82	37.75	37.54	41.48	52.51	74.00	-21.49	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 276 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:High

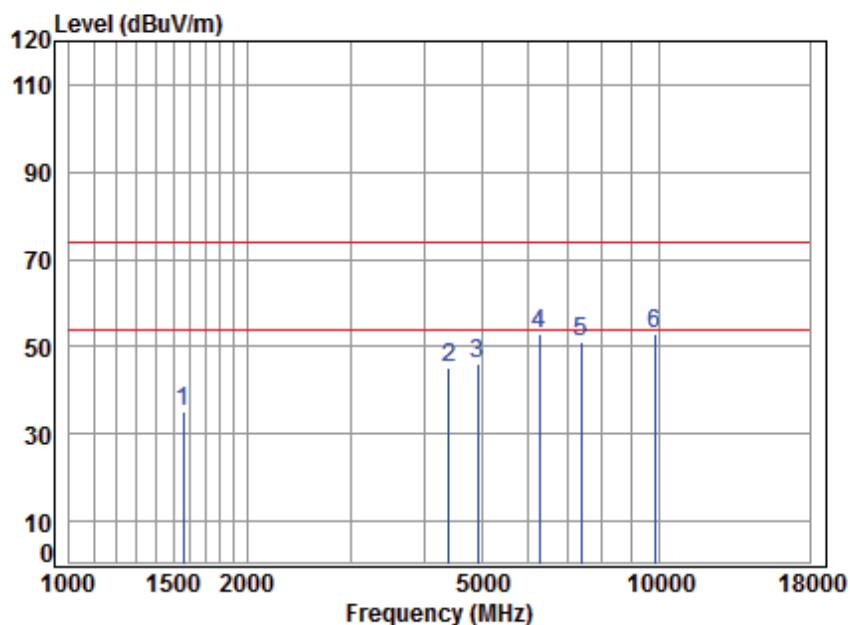

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 TX RSE
Note : 2.4G WIFI 11N 20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1560.673	5.40	26.08	41.45	45.26	35.29	74.00	-38.71	peak
2	4405.090	7.46	33.44	42.40	46.67	45.17	74.00	-28.83	peak
3	4924.000	8.01	34.11	42.49	46.33	45.96	74.00	-28.04	peak
4	6267.553	11.10	35.37	41.39	47.99	53.07	74.00	-20.93	peak
5	7386.000	10.03	36.21	40.59	45.44	51.09	74.00	-22.91	peak
6	9848.000	10.87	37.81	37.41	41.87	53.14	74.00	-20.86	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 277 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:High

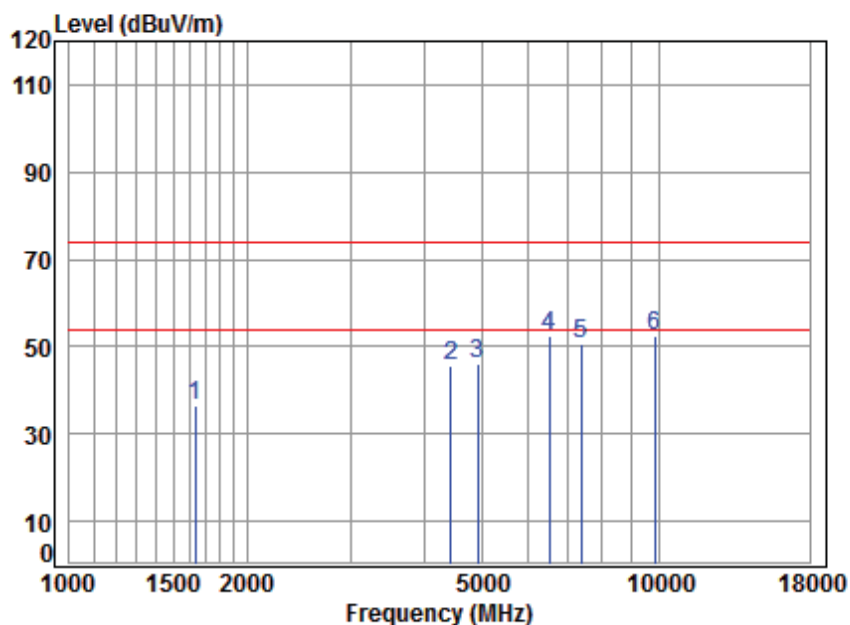

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 TX RSE
Note : 2.4G WIFI 11N 20

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1634.543	5.31	26.40	41.49	46.10	36.32	74.00	-37.68	peak
2	4430.628	7.48	33.48	42.41	46.90	45.45	74.00	-28.55	peak
3	4924.000	8.01	34.11	42.49	46.27	45.90	74.00	-28.10	peak
4	6507.536	11.52	35.60	41.21	46.47	52.38	74.00	-21.62	peak
5	7386.000	10.03	36.21	40.59	44.84	50.49	74.00	-23.51	peak
6	9848.000	10.87	37.81	37.41	41.10	52.37	74.00	-21.63	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 278 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:Low

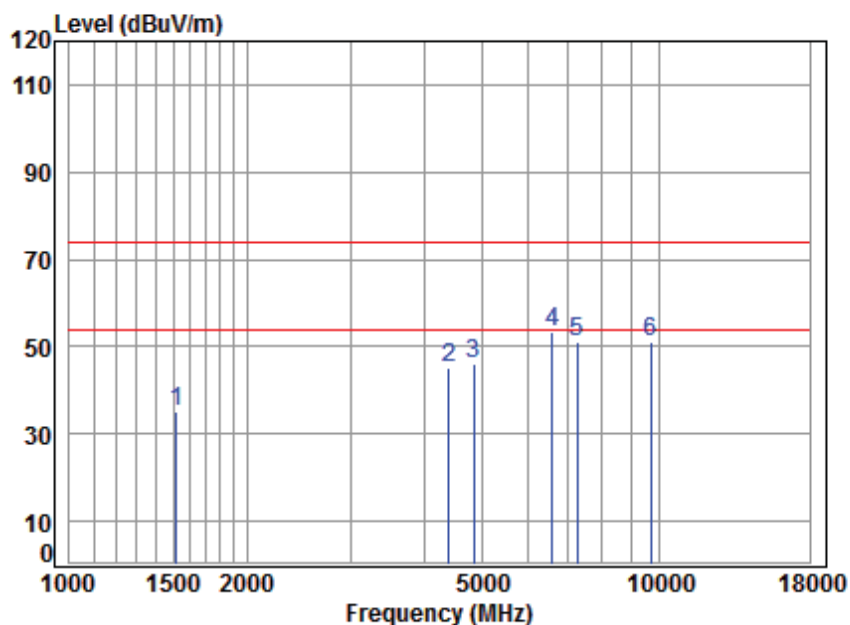

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2422 TX RSE
Note : 2.4G WIFI 11N 40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1520.598	5.45	25.89	41.42	45.13	35.05	74.00	-38.95	peak
2	4405.090	7.46	33.44	42.40	46.68	45.18	74.00	-28.82	peak
3	4844.000	7.93	34.02	42.48	46.54	46.01	74.00	-27.99	peak
4	6602.265	11.24	35.66	41.14	47.42	53.18	74.00	-20.82	peak
5	7266.000	10.06	36.12	40.67	45.50	51.01	74.00	-22.99	peak
6	9688.000	10.79	37.71	37.63	40.45	51.32	74.00	-22.68	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 279 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:Low

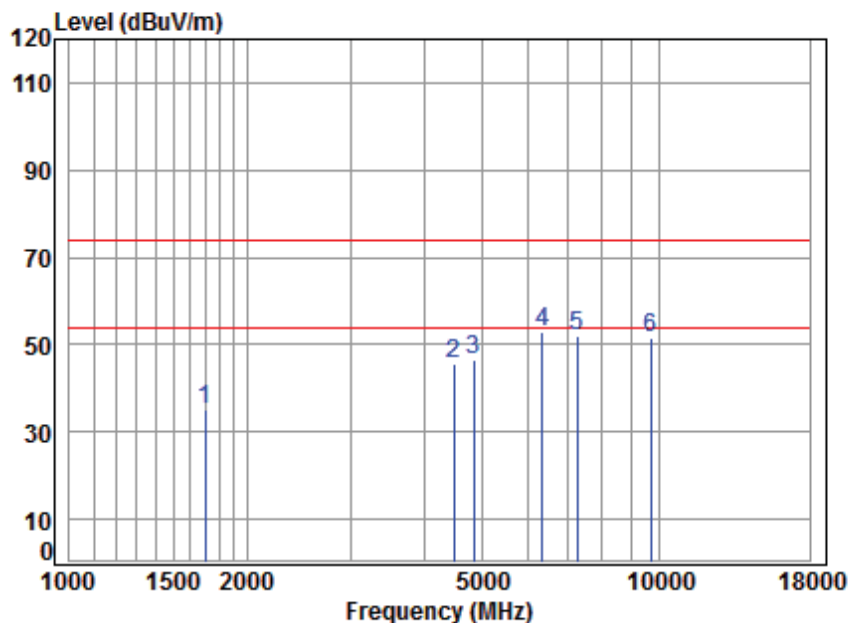

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2422 TX RSE
Note : 2.4G WIFI 11N 40

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1697.129	5.23	26.66	41.53	44.83	35.19	74.00	-38.81	peak
2	4495.125	7.55	33.59	42.42	46.72	45.44	74.00	-28.56	peak
3	4844.000	7.93	34.02	42.48	46.84	46.31	74.00	-27.69	peak
4	6340.436	11.24	35.44	41.34	47.71	53.05	74.00	-20.95	peak
5	7266.000	10.06	36.12	40.67	46.29	51.80	74.00	-22.20	peak
6	9688.000	10.79	37.71	37.63	40.52	51.39	74.00	-22.61	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 280 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:middle

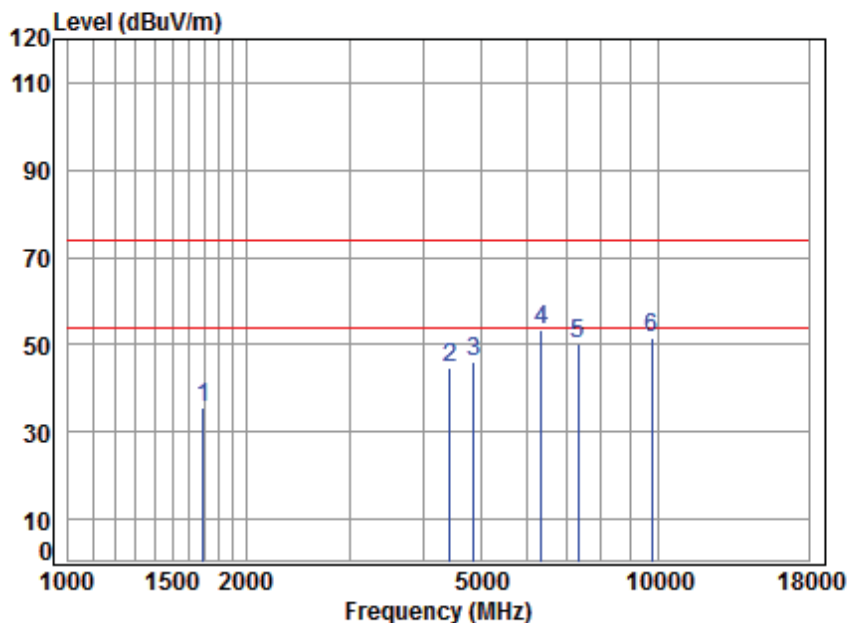

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11N 40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1692.231	5.24	26.64	41.53	45.38	35.73	74.00	-38.27	peak
2	4430.628	7.48	33.48	42.41	46.04	44.59	74.00	-29.41	peak
3	4874.000	7.96	34.05	42.48	46.57	46.10	74.00	-27.90	peak
4	6340.436	11.24	35.44	41.34	47.99	53.33	74.00	-20.67	peak
5	7311.000	10.05	36.15	40.64	44.77	50.33	74.00	-23.67	peak
6	9748.000	10.82	37.75	37.54	40.34	51.37	74.00	-22.63	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 281 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:middle

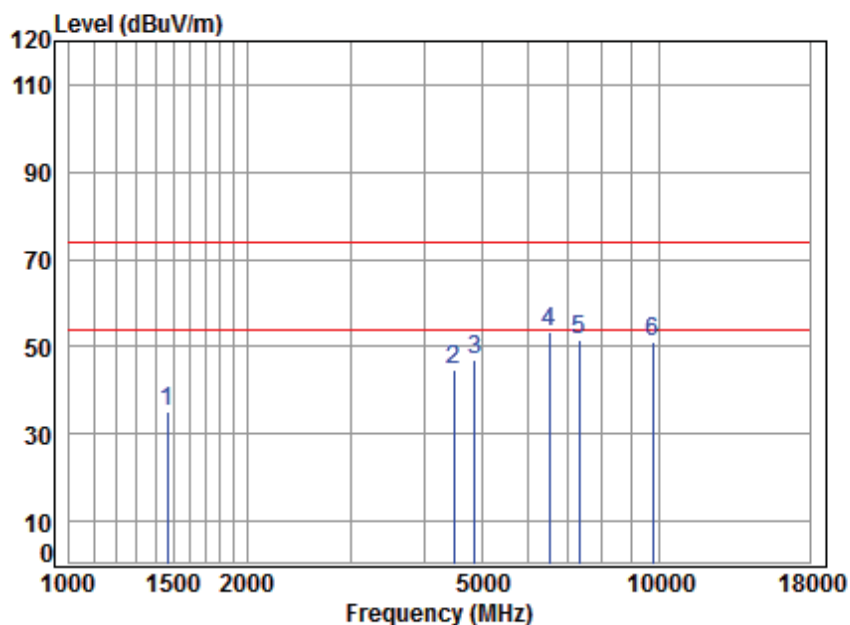

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11N 40

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1464.522	5.37	25.67	41.38	45.57	35.23	74.00	-38.77	peak
2	4495.125	7.55	33.59	42.42	46.18	44.90	74.00	-29.10	peak
3	4874.000	7.96	34.05	42.48	47.36	46.89	74.00	-27.11	peak
4	6507.536	11.52	35.60	41.21	47.40	53.31	74.00	-20.69	peak
5	7311.000	10.05	36.15	40.64	45.83	51.39	74.00	-22.61	peak
6	9748.000	10.82	37.75	37.54	40.01	51.04	74.00	-22.96	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 282 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:High

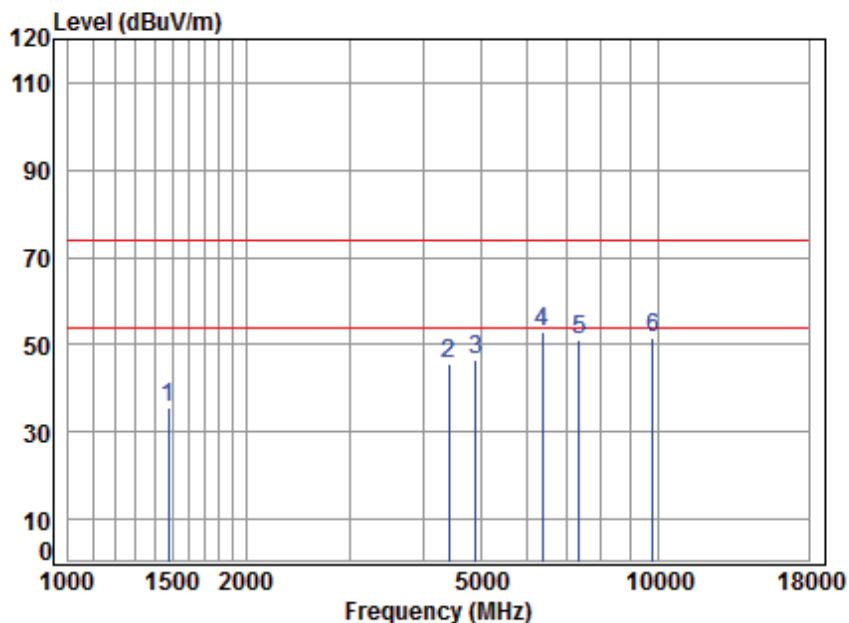

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2452 TX RSE
Note : 2.4G WIFI 11N 40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1477.276	5.41	25.72	41.39	46.05	35.79	74.00	-38.21	peak
2	4417.841	7.47	33.46	42.40	46.89	45.42	74.00	-28.58	peak
3	4904.000	7.99	34.09	42.48	46.80	46.40	74.00	-27.60	peak
4	6358.789	11.27	35.46	41.32	47.65	53.06	74.00	-20.94	peak
5	7356.000	10.04	36.19	40.61	45.43	51.05	74.00	-22.95	peak
6	9808.000	10.85	37.79	37.46	40.22	51.40	74.00	-22.60	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 283 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:High

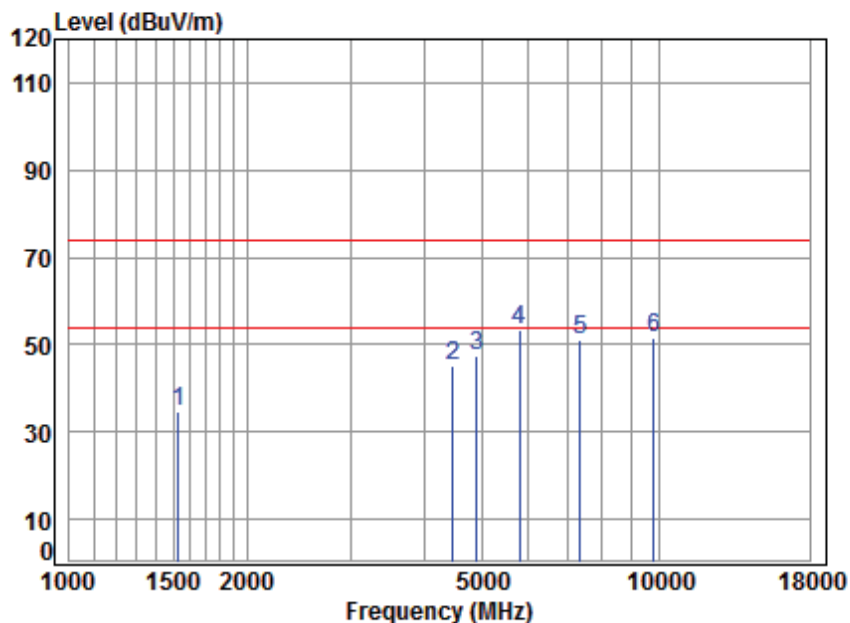

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2452 TX RSE
Note : 2.4G WIFI 11N 40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1529.414	5.44	25.94	41.43	44.84	34.79	74.00	-39.21	peak
2	4469.214	7.53	33.55	42.41	46.63	45.30	74.00	-28.70	peak
3	4904.000	7.99	34.09	42.48	47.70	47.30	74.00	-26.70	peak
4	5797.032	9.89	34.90	41.78	50.39	53.40	74.00	-20.60	peak
5	7356.000	10.04	36.19	40.61	45.68	51.30	74.00	-22.70	peak
6	9808.000	10.85	37.79	37.46	40.32	51.50	74.00	-22.50	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 284 of 346

Test data for Antenna5:

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:Low

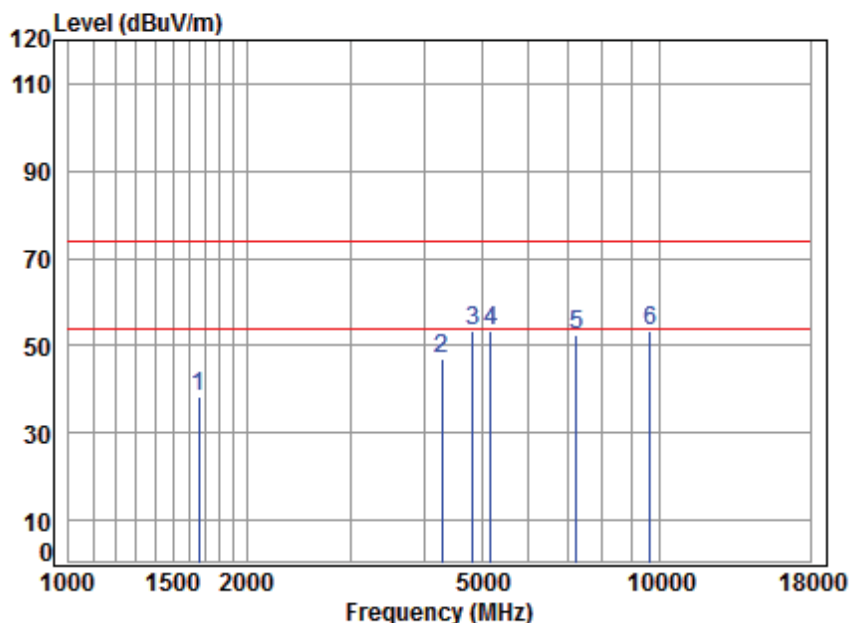

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 TX RSE
Note : 2.4G WIFI 11B

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1663.137	5.27	26.52	41.51	47.82	38.10	74.00	-35.90	peak
2	4291.977	7.33	33.24	42.38	48.73	46.92	74.00	-27.08	peak
3	4824.000	7.91	34.00	42.47	53.91	53.35	74.00	-20.65	peak
4	5179.049	8.37	34.35	42.33	52.78	53.17	74.00	-20.83	peak
5	7236.000	10.07	36.09	40.69	47.16	52.63	74.00	-21.37	peak
6	9648.000	10.77	37.69	37.68	42.58	53.36	74.00	-20.64	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 285 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:Low

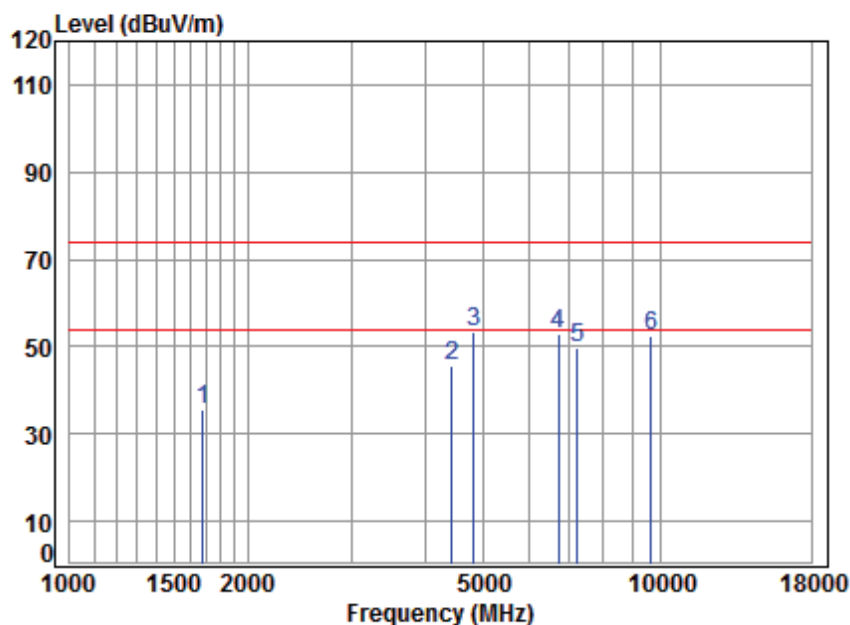

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 TX RSE
Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1677.621	5.25	26.58	41.52	45.12	35.43	74.00	-38.57	peak
2	4443.453	7.50	33.50	42.41	47.25	45.84	74.00	-28.16	peak
3	4824.000	7.91	34.00	42.47	53.75	53.19	74.00	-20.81	peak
4	6717.762	10.91	35.73	41.05	47.50	53.09	74.00	-20.91	peak
5	7236.000	10.07	36.09	40.69	44.47	49.94	74.00	-24.06	peak
6	9648.000	10.77	37.69	37.68	41.60	52.38	74.00	-21.62	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 286 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:middle

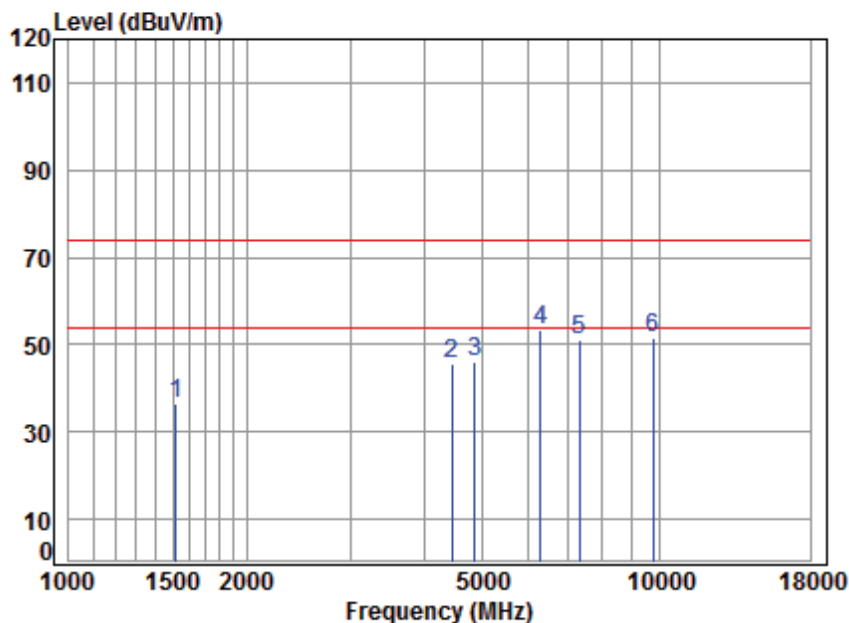

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBUV/m	dBUV/m	dB	
1	1520.598	5.45	25.89	41.42	46.79	36.71	74.00	-37.29	peak
2	4456.315	7.51	33.53	42.41	46.81	45.44	74.00	-28.56	peak
3	4874.000	7.96	34.05	42.48	46.47	46.00	74.00	-28.00	peak
4	6285.695	11.13	35.39	41.38	48.13	53.27	74.00	-20.73	peak
5	7311.000	10.05	36.15	40.64	45.40	50.96	74.00	-23.04	peak
6	9748.000	10.82	37.75	37.54	40.74	51.77	74.00	-22.23	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 287 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:middle

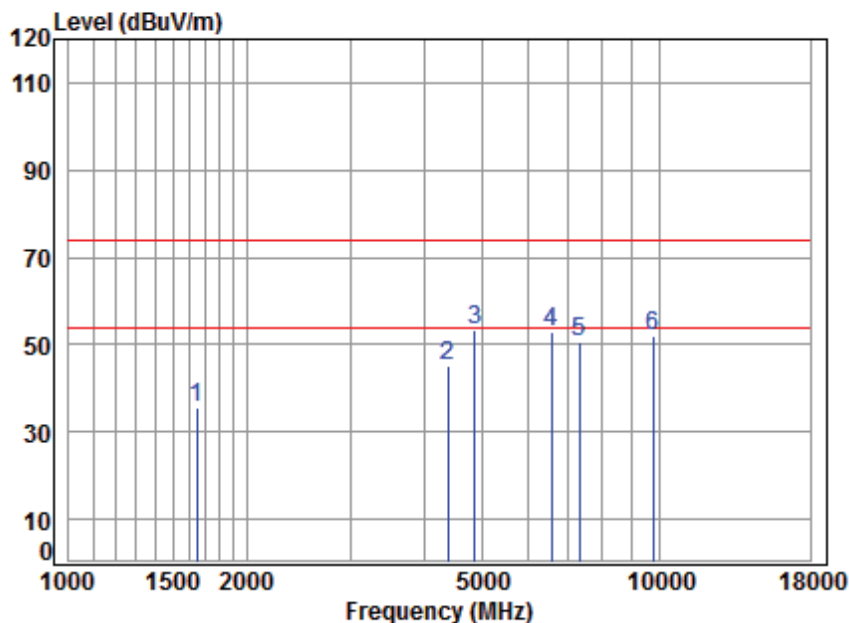

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1648.778	5.29	26.46	41.50	45.20	35.45	74.00	-38.55	peak
2	4392.376	7.44	33.42	42.40	46.63	45.09	74.00	-28.91	peak
3	4874.000	7.96	34.05	42.48	53.66	53.19	74.00	-20.81	peak
4	6564.209	11.35	35.64	41.17	47.22	53.04	74.00	-20.96	peak
5	7311.000	10.05	36.15	40.64	45.15	50.71	74.00	-23.29	peak
6	9748.000	10.82	37.75	37.54	41.00	52.03	74.00	-21.97	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 288 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11b; bandwidth:20MHz; Channel:High

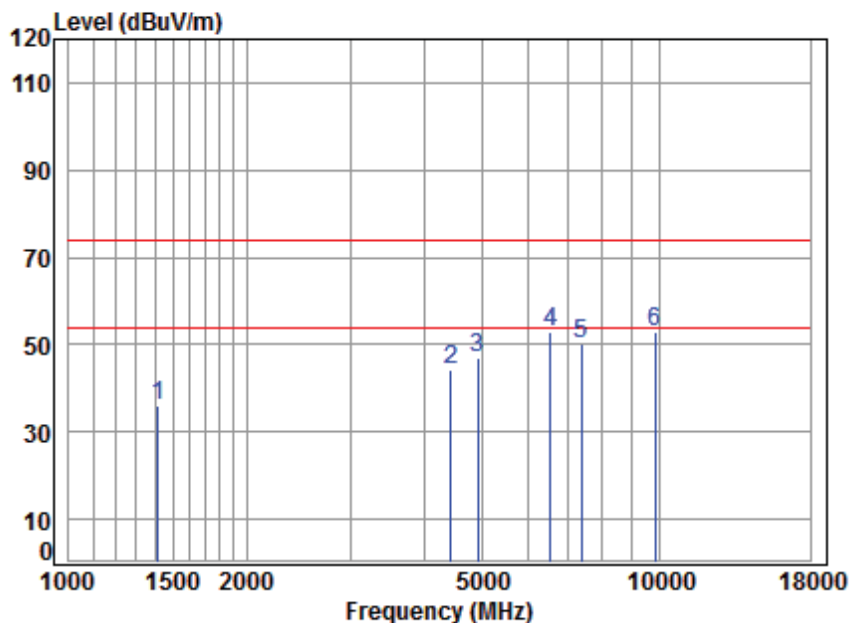

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 TX RSE
Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1414.597	5.20	25.48	41.35	46.76	36.09	74.00	-37.91	peak
2	4430.628	7.48	33.48	42.41	45.59	44.14	74.00	-29.86	peak
3	4924.000	8.01	34.11	42.49	47.48	47.11	74.00	-26.89	peak
4	6545.263	11.41	35.63	41.18	47.01	52.87	74.00	-21.13	peak
5	7386.000	10.03	36.21	40.59	44.72	50.37	74.00	-23.63	peak
6	9848.000	10.87	37.81	37.41	41.84	53.11	74.00	-20.89	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 289 of 346

Mode:a; Polarization:Vertical; Modulation:802.11b; bandwidth:20MHz; Channel:High

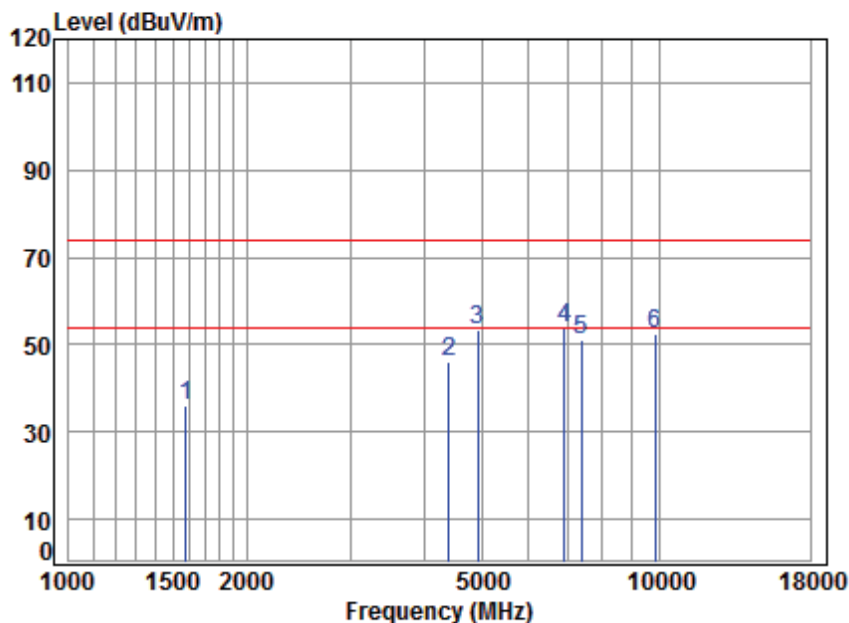

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 TX RSE
Note : 2.4G WIFI 11B

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1578.822	5.38	26.16	41.46	45.95	36.03	74.00	-37.97	peak
2	4405.090	7.46	33.44	42.40	47.65	46.15	74.00	-27.85	peak
3	4924.000	8.01	34.11	42.49	53.87	53.50	74.00	-20.50	peak
4	6914.763	10.36	35.85	40.91	48.50	53.80	74.00	-20.20	peak
5	7386.000	10.03	36.21	40.59	45.41	51.06	74.00	-22.94	peak
6	9848.000	10.87	37.81	37.41	41.39	52.66	74.00	-21.34	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 290 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:Low

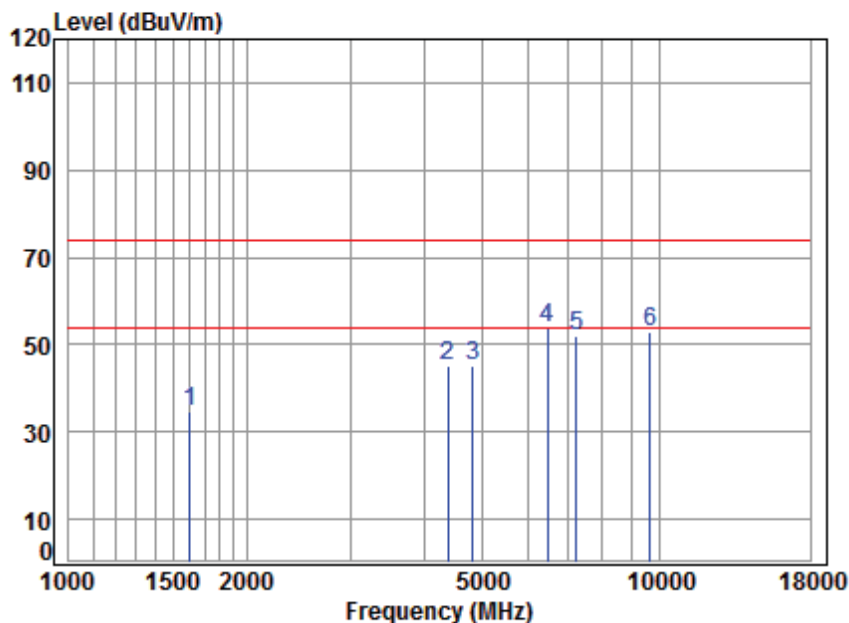

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 TX RSE
Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1601.804	5.35	26.26	41.47	44.51	34.65	74.00	-39.35	peak
2	4392.376	7.44	33.42	42.40	46.62	45.08	74.00	-28.92	peak
3	4824.000	7.91	34.00	42.47	45.94	45.38	74.00	-28.62	peak
4	6470.026	11.48	35.57	41.24	48.02	53.83	74.00	-20.17	peak
5	7236.000	10.07	36.09	40.69	46.33	51.80	74.00	-22.20	peak
6	9648.000	10.77	37.69	37.68	42.18	52.96	74.00	-21.04	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 291 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:Low

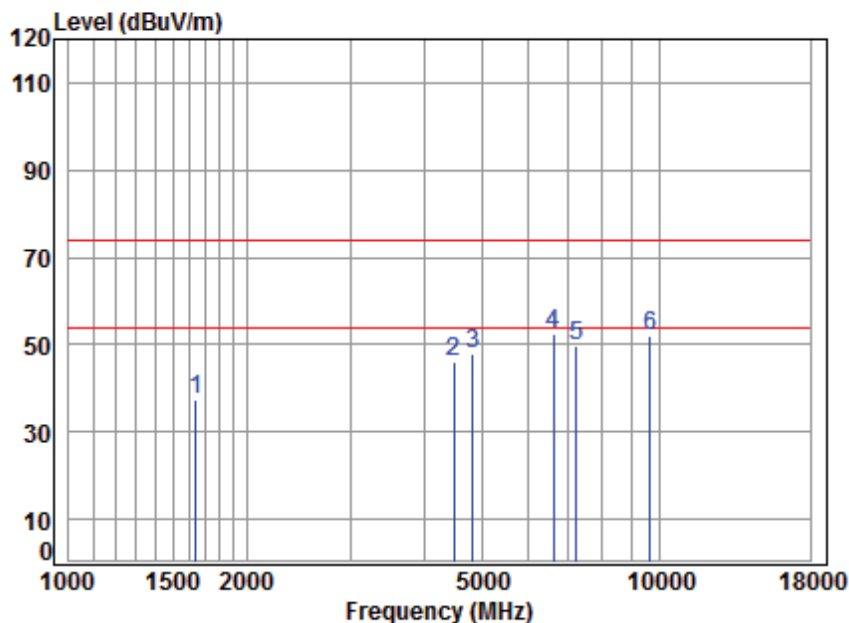

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 TX RSE
Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1644.019	5.30	26.44	41.50	46.97	37.21	74.00	-36.79	peak
2	4495.125	7.55	33.59	42.42	47.25	45.97	74.00	-28.03	peak
3	4824.000	7.91	34.00	42.47	48.29	47.73	74.00	-26.27	peak
4	6621.375	11.19	35.67	41.13	46.94	52.67	74.00	-21.33	peak
5	7236.000	10.07	36.09	40.69	44.41	49.88	74.00	-24.12	peak
6	9648.000	10.77	37.69	37.68	41.28	52.06	74.00	-21.94	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 292 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:middle

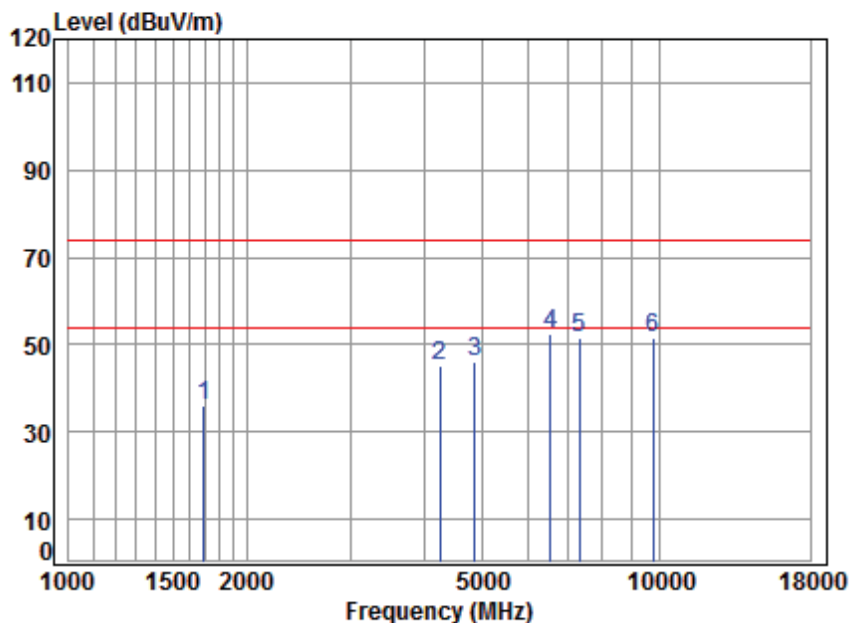

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1692.231	5.24	26.64	41.53	45.85	36.20	74.00	-37.80	peak
2	4242.641	7.27	33.15	42.37	47.25	45.30	74.00	-28.70	peak
3	4874.000	7.96	34.05	42.48	46.62	46.15	74.00	-27.85	peak
4	6545.263	11.41	35.63	41.18	46.62	52.48	74.00	-21.52	peak
5	7311.000	10.05	36.15	40.64	45.85	51.41	74.00	-22.59	peak
6	9748.000	10.82	37.75	37.54	40.62	51.65	74.00	-22.35	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 293 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:middle

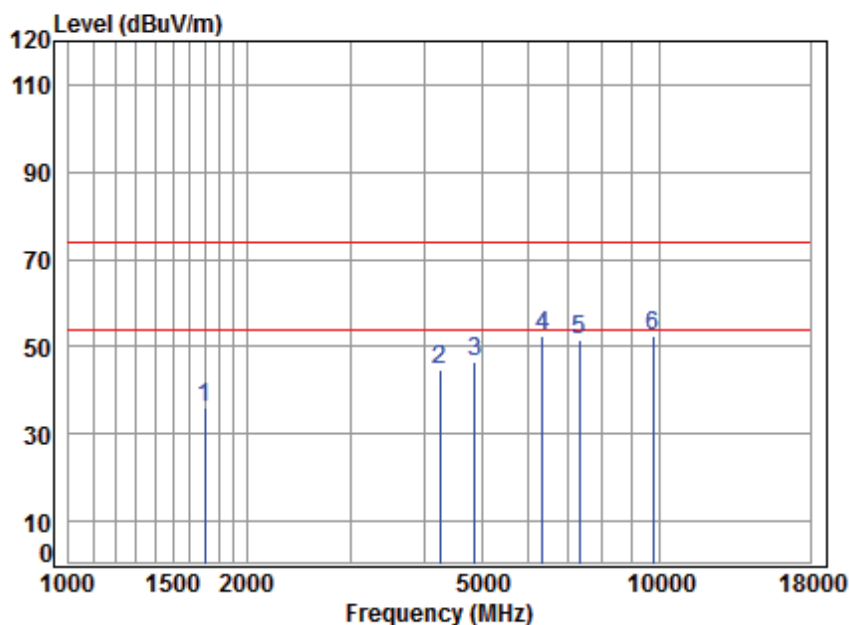

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11G

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1697.129	5.23	26.66	41.53	45.47	35.83	74.00	-38.17 peak
2	4254.921	7.28	33.17	42.37	46.81	44.89	74.00	-29.11 peak
3	4874.000	7.96	34.05	42.48	47.20	46.73	74.00	-27.27 peak
4	6340.436	11.24	35.44	41.34	46.99	52.33	74.00	-21.67 peak
5	7311.000	10.05	36.15	40.64	46.01	51.57	74.00	-22.43 peak
6	9748.000	10.82	37.75	37.54	41.22	52.25	74.00	-21.75 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 294 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11g; bandwidth:20MHz; Channel:High

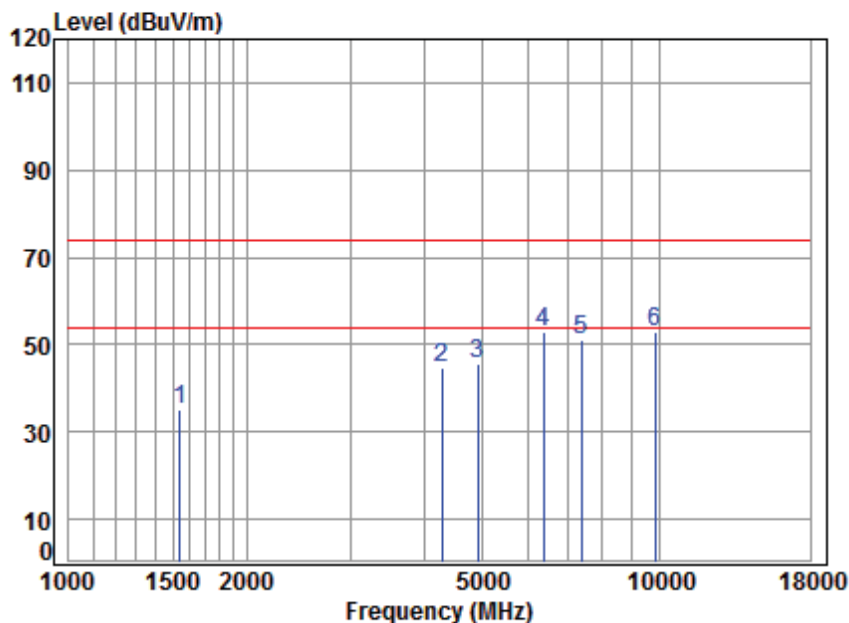

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 TX RSE
Note : 2.4G WIFI 11G

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1542.733	5.42	26.00	41.43	45.04	35.03	74.00	-38.97	peak
2	4291.977	7.33	33.24	42.38	46.73	44.92	74.00	-29.08	peak
3	4924.000	8.01	34.11	42.49	46.06	45.69	74.00	-28.31	peak
4	6377.195	11.31	35.48	41.31	47.64	53.12	74.00	-20.88	peak
5	7386.000	10.03	36.21	40.59	45.23	50.88	74.00	-23.12	peak
6	9848.000	10.87	37.81	37.41	41.81	53.08	74.00	-20.92	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 295 of 346

Mode:a; Polarization:Vertical; Modulation:802.11g; bandwidth:20MHz; Channel:High

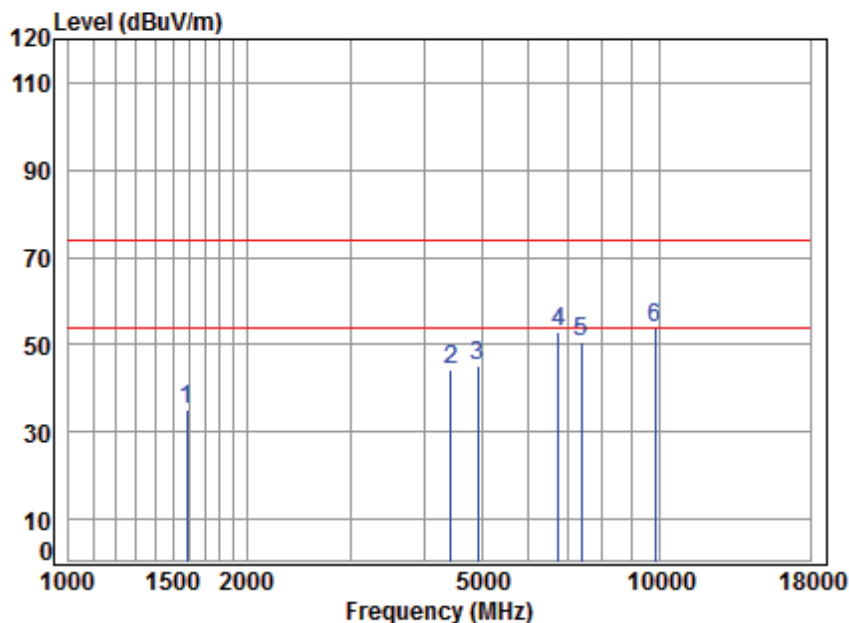

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 TX RSE
Note : 2.4G WIFI 11G


	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1583.392	5.37	26.18	41.46	45.14	35.23	74.00	-38.77	peak
2	4430.628	7.48	33.48	42.41	45.86	44.41	74.00	-29.59	peak
3	4924.000	8.01	34.11	42.49	45.67	45.30	74.00	-28.70	peak
4	6737.207	10.86	35.75	41.04	47.39	52.96	74.00	-21.04	peak
5	7386.000	10.03	36.21	40.59	44.88	50.53	74.00	-23.47	peak
6	9848.000	10.87	37.81	37.41	42.58	53.85	74.00	-20.15	peak



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401
Page: 296 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:Low

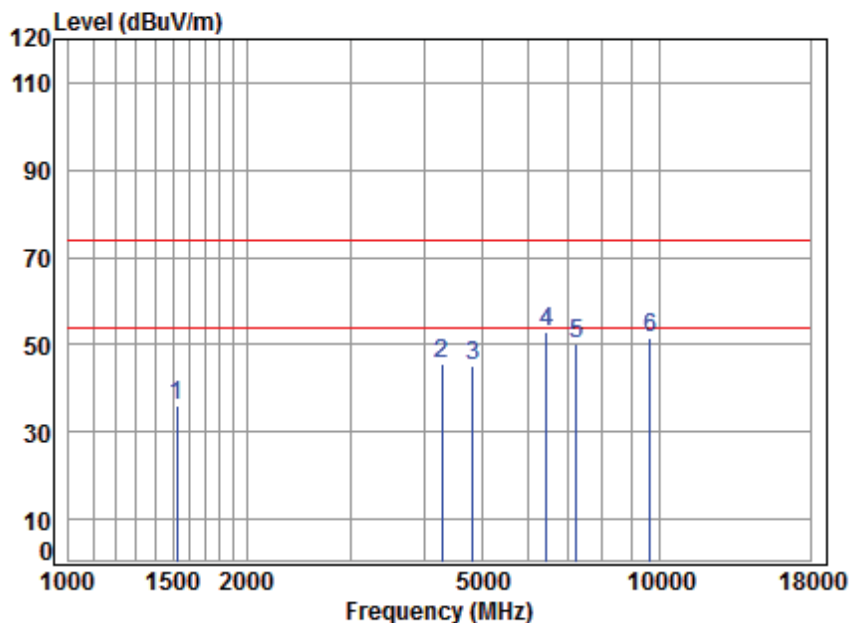

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2412 TX RSE
Note : 2.4G WIFI 11N 20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1525.000	5.45	25.91	41.42	46.22	36.16	74.00	-37.84	peak
2	4291.977	7.33	33.24	42.38	47.53	45.72	74.00	-28.28	peak
3	4824.000	7.91	34.00	42.47	45.88	45.32	74.00	-28.68	peak
4	6451.353	11.45	35.55	41.25	46.97	52.72	74.00	-21.28	peak
5	7236.000	10.07	36.09	40.69	44.84	50.31	74.00	-23.69	peak
6	9648.000	10.77	37.69	37.68	40.78	51.56	74.00	-22.44	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 297 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:Low

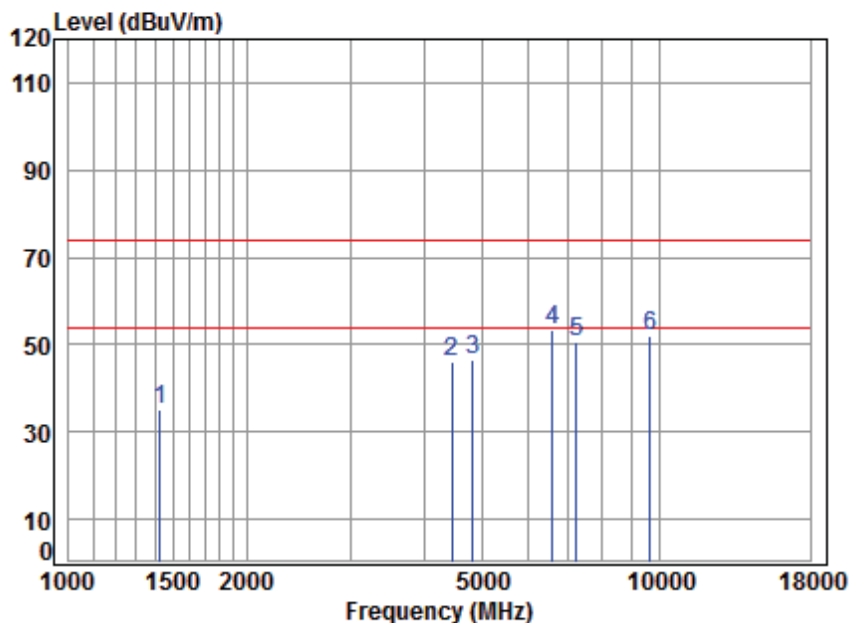

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2412 TX RSE
Note : 2.4G WIFI 11N 20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBUV/m	dBUV/m	dB	
1	1426.916	5.24	25.53	41.36	45.69	35.10	74.00	-38.90	peak
2	4456.315	7.51	33.53	42.41	47.54	46.17	74.00	-27.83	peak
3	4824.000	7.91	34.00	42.47	46.93	46.37	74.00	-27.63	peak
4	6602.265	11.24	35.66	41.14	47.52	53.28	74.00	-20.72	peak
5	7236.000	10.07	36.09	40.69	45.32	50.79	74.00	-23.21	peak
6	9648.000	10.77	37.69	37.68	41.46	52.24	74.00	-21.76	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 298 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:middle

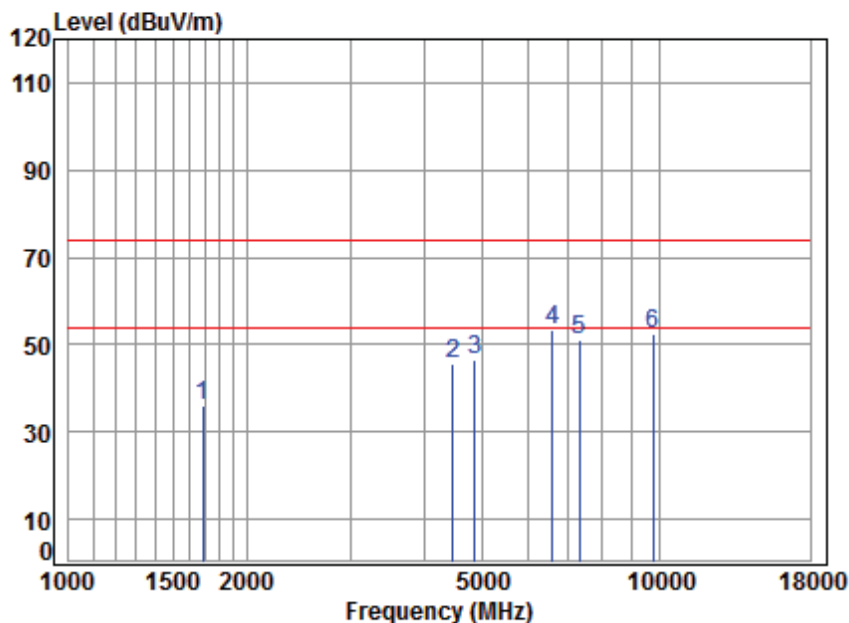

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11N 20


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1687.347	5.24	26.62	41.52	45.60	35.94	74.00	-38.06	peak
2	4469.214	7.53	33.55	42.41	46.88	45.55	74.00	-28.45	peak
3	4874.000	7.96	34.05	42.48	47.01	46.54	74.00	-27.46	peak
4	6602.265	11.24	35.66	41.14	47.78	53.54	74.00	-20.46	peak
5	7311.000	10.05	36.15	40.64	45.74	51.30	74.00	-22.70	peak
6	9748.000	10.82	37.75	37.54	41.53	52.56	74.00	-21.44	peak



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401
Page: 299 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:middle

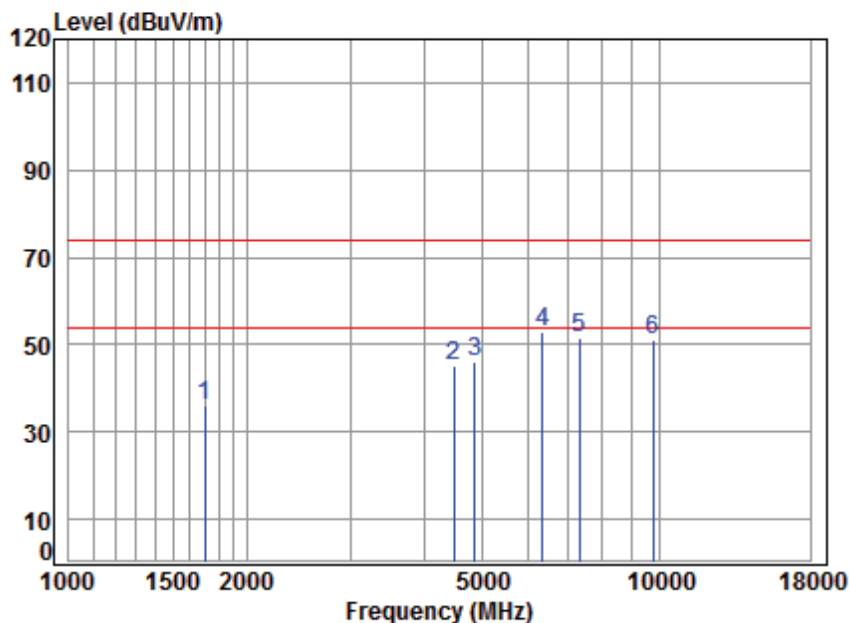

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11N 20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1697.129	5.23	26.66	41.53	45.48	35.84	74.00	-38.16	peak
2	4495.125	7.55	33.59	42.42	46.52	45.24	74.00	-28.76	peak
3	4874.000	7.96	34.05	42.48	46.68	46.21	74.00	-27.79	peak
4	6340.436	11.24	35.44	41.34	47.48	52.82	74.00	-21.18	peak
5	7311.000	10.05	36.15	40.64	45.95	51.51	74.00	-22.49	peak
6	9748.000	10.82	37.75	37.54	40.01	51.04	74.00	-22.96	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 300 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:20MHz; Channel:High

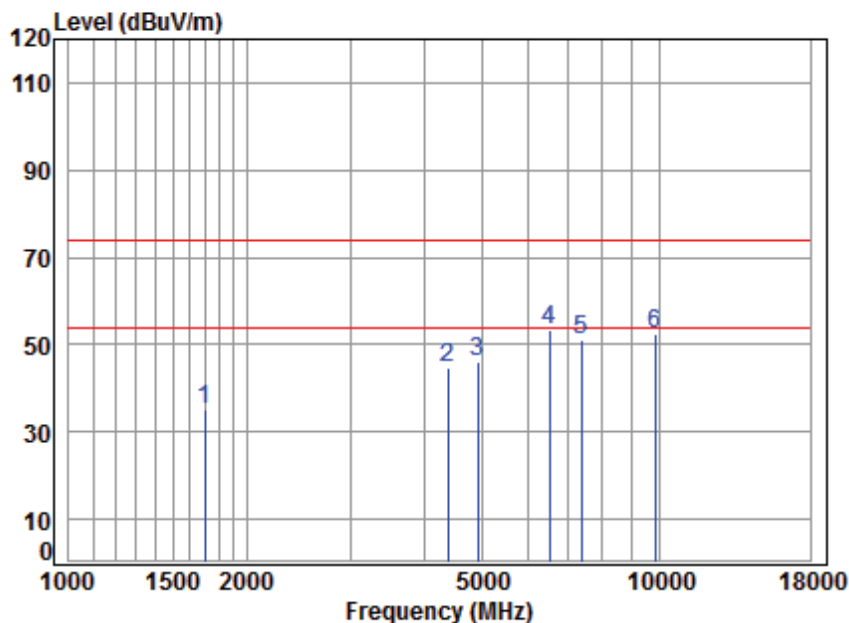

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2462 TX RSE
Note : 2.4G WIFI 11N 20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1697.129	5.23	26.66	41.53	44.89	35.25	74.00	-38.75	peak
2	4392.376	7.44	33.42	42.40	46.31	44.77	74.00	-29.23	peak
3	4924.000	8.01	34.11	42.49	46.49	46.12	74.00	-27.88	peak
4	6526.373	11.46	35.62	41.20	47.73	53.61	74.00	-20.39	peak
5	7386.000	10.03	36.21	40.59	45.37	51.02	74.00	-22.98	peak
6	9848.000	10.87	37.81	37.41	41.36	52.63	74.00	-21.37	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 301 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:20MHz; Channel:High

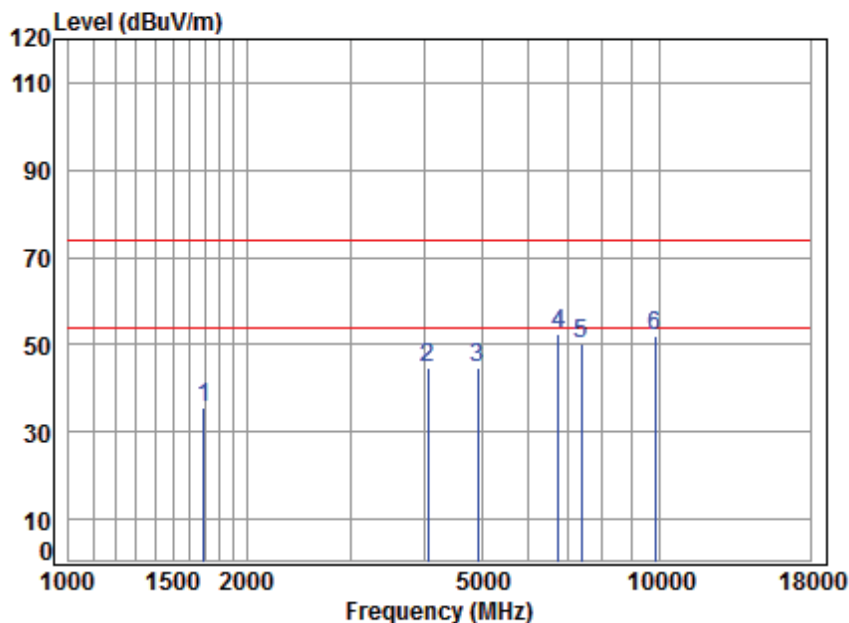

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2462 TX RSE
Note : 2.4G WIFI 11N 20


	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1692.231	5.24	26.64	41.53	45.08	35.43	74.00	-38.57	peak
2	4062.629	7.06	32.82	42.34	47.15	44.69	74.00	-29.31	peak
3	4924.000	8.01	34.11	42.49	45.31	44.94	74.00	-29.06	peak
4	6737.207	10.86	35.75	41.04	46.96	52.53	74.00	-21.47	peak
5	7386.000	10.03	36.21	40.59	44.70	50.35	74.00	-23.65	peak
6	9848.000	10.87	37.81	37.41	40.70	51.97	74.00	-22.03	peak



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401
Page: 302 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:Low

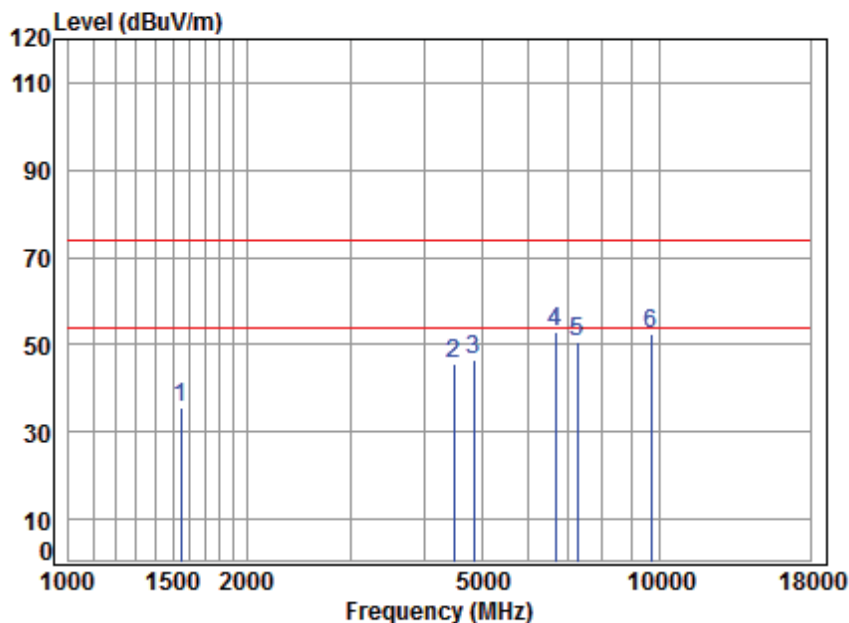

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2422 TX RSE
Note : 2.4G WIFI 11N 40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1547.199	5.42	26.02	41.44	45.45	35.45	74.00	-38.55	peak
2	4495.125	7.55	33.59	42.42	46.82	45.54	74.00	-28.46	peak
3	4844.000	7.93	34.02	42.48	46.86	46.33	74.00	-27.67	peak
4	6679.040	11.02	35.71	41.08	47.19	52.84	74.00	-21.16	peak
5	7266.000	10.06	36.12	40.67	45.26	50.77	74.00	-23.23	peak
6	9688.000	10.79	37.71	37.63	41.51	52.38	74.00	-21.62	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 303 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:Low

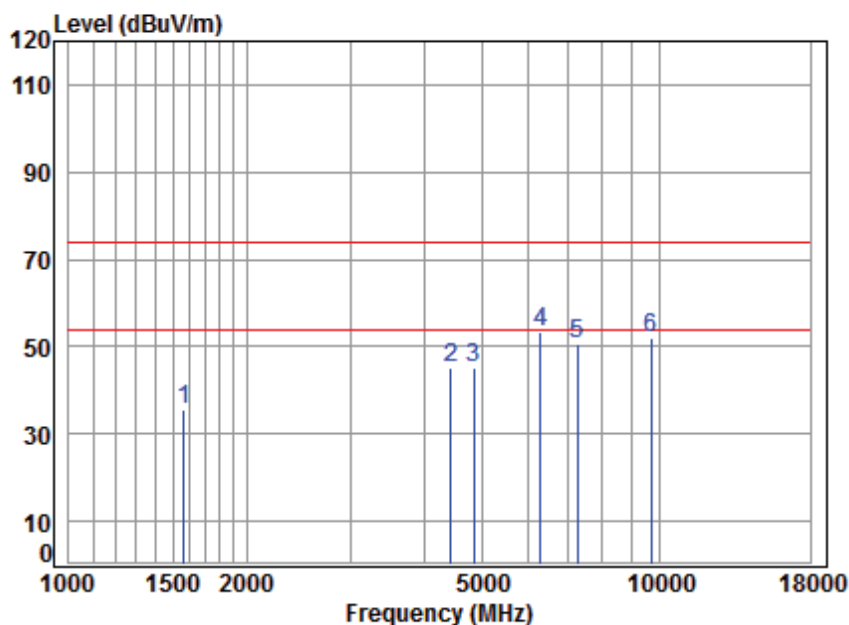

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2422 TX RSE
Note : 2.4G WIFI 11N 40


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1565.191	5.39	26.10	41.45	45.37	35.41	74.00	-38.59	peak
2	4430.628	7.48	33.48	42.41	46.41	44.96	74.00	-29.04	peak
3	4844.000	7.93	34.02	42.48	45.52	44.99	74.00	-29.01	peak
4	6303.890	11.17	35.41	41.37	47.97	53.18	74.00	-20.82	peak
5	7266.000	10.06	36.12	40.67	45.25	50.76	74.00	-23.24	peak
6	9688.000	10.79	37.71	37.63	41.10	51.97	74.00	-22.03	peak



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401
Page: 304 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:middle

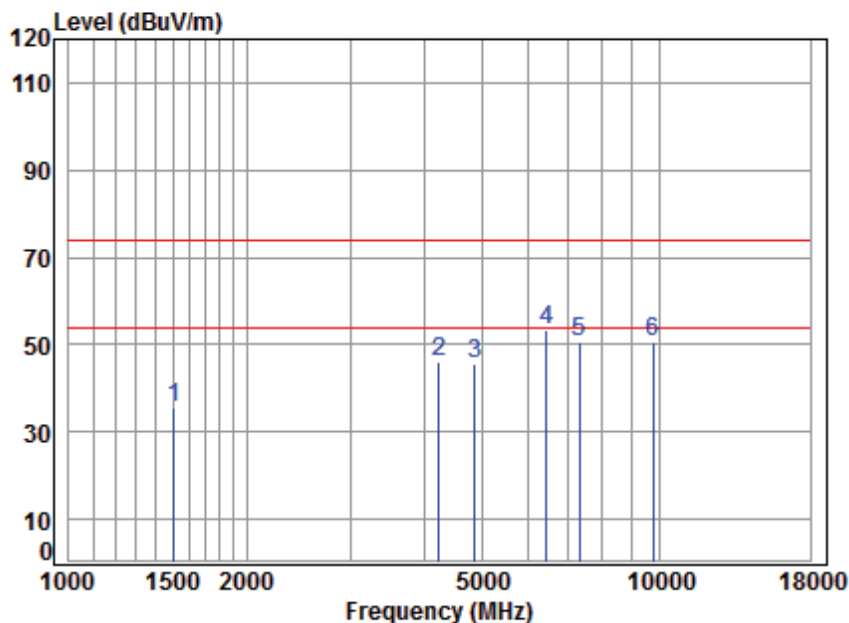

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11N 40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1507.470	5.47	25.83	41.41	45.64	35.53	74.00	-38.47	peak
2	4230.396	7.26	33.13	42.37	48.28	46.30	74.00	-27.70	peak
3	4874.000	7.96	34.05	42.48	45.92	45.45	74.00	-28.55	peak
4	6451.353	11.45	35.55	41.25	47.52	53.27	74.00	-20.73	peak
5	7311.000	10.05	36.15	40.64	44.99	50.55	74.00	-23.45	peak
6	9748.000	10.82	37.75	37.54	39.82	50.85	74.00	-23.15	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 305 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:middle

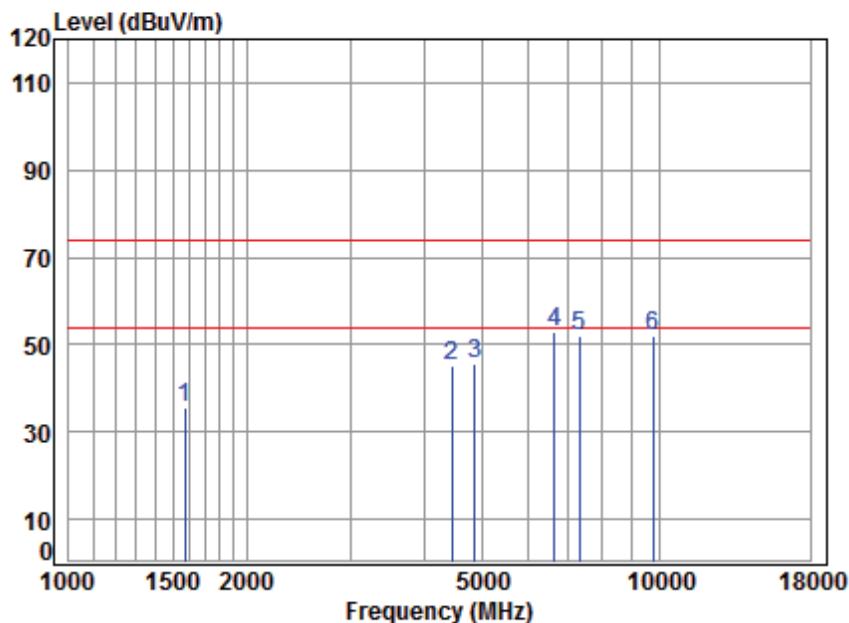

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2437 TX RSE
Note : 2.4G WIFI 11N 40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1574.265	5.38	26.14	41.45	45.39	35.46	74.00	-38.54	peak
2	4456.315	7.51	33.53	42.41	46.45	45.08	74.00	-28.92	peak
3	4874.000	7.96	34.05	42.48	45.99	45.52	74.00	-28.48	peak
4	6640.542	11.13	35.69	41.11	47.44	53.15	74.00	-20.85	peak
5	7311.000	10.05	36.15	40.64	46.60	52.16	74.00	-21.84	peak
6	9748.000	10.82	37.75	37.54	41.03	52.06	74.00	-21.94	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 306 of 346

Mode:a; Polarization:Horizontal; Modulation:802.11n; bandwidth:40MHz; Channel:High

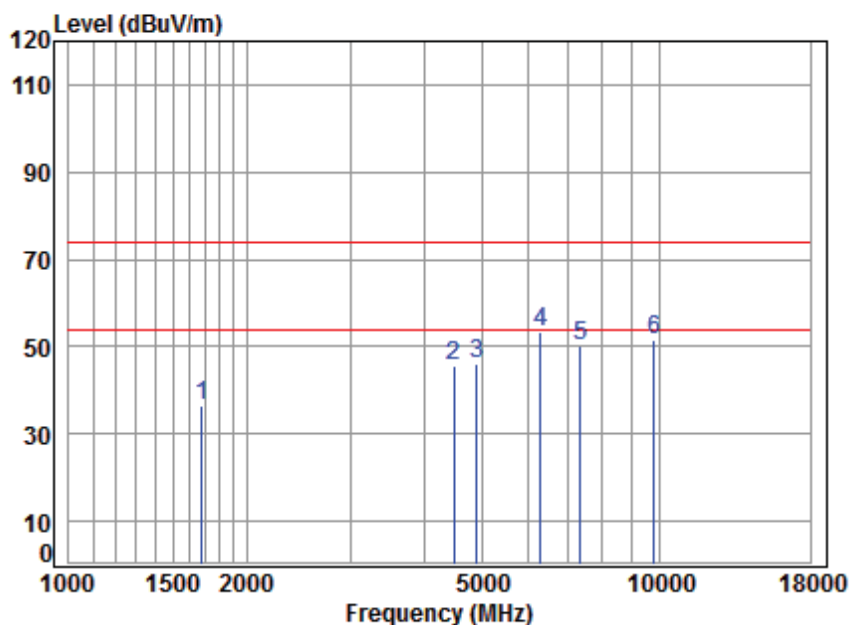

Site : chamber
Condition: 3m VERTICAL
Job No : 09244CR/09245CR
Mode : 2452 TX RSE
Note : 2.4G WIFI 11N 40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1677.621	5.25	26.58	41.52	46.04	36.35	74.00	-37.65	peak
2	4482.150	7.54	33.57	42.41	46.98	45.68	74.00	-28.32	peak
3	4904.000	7.99	34.09	42.48	46.55	46.15	74.00	-27.85	peak
4	6285.695	11.13	35.39	41.38	48.22	53.36	74.00	-20.64	peak
5	7356.000	10.04	36.19	40.61	44.39	50.01	74.00	-23.99	peak
6	9808.000	10.85	37.79	37.46	40.53	51.71	74.00	-22.29	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM181000924401

Page: 307 of 346

Mode:a; Polarization:Vertical; Modulation:802.11n; bandwidth:40MHz; Channel:High

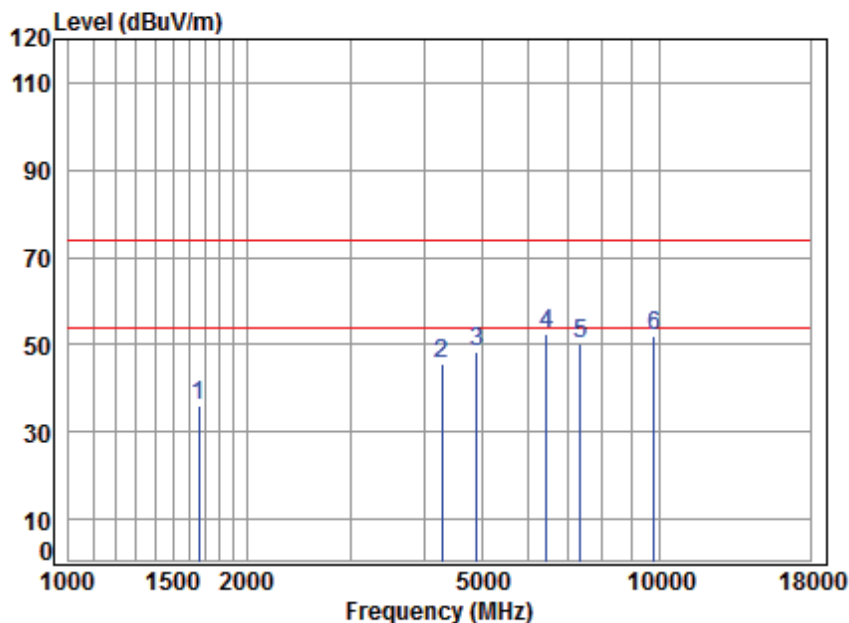

Site : chamber
Condition: 3m HORIZONTAL
Job No : 09244CR/09245CR
Mode : 2452 TX RSE
Note : 2.4G WIFI 11N 40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1663.137	5.27	26.52	41.51	45.98	36.26	74.00	-37.74	peak
2	4291.977	7.33	33.24	42.38	47.43	45.62	74.00	-28.38	peak
3	4904.000	7.99	34.09	42.48	48.58	48.18	74.00	-25.82	peak
4	6432.732	11.41	35.54	41.27	46.59	52.27	74.00	-21.73	peak
5	7356.000	10.04	36.19	40.61	44.45	50.07	74.00	-23.93	peak
6	9808.000	10.85	37.79	37.46	40.85	52.03	74.00	-21.97	peak



8 Photographs

8.1 EUT Constructional Details (EUT Photos)

Please Refer to external and internal photos for details.



9 Appendix

9.1 Appendix 15.247


1.6dB Bandwidth

Test mode:	Test Channel	Ant	EBW[MHz]	Limit[MHz]	Verdict
11B	2412	Ant1	8.100	≥ 0.5	PASS
11B	2437	Ant1	8.100	≥ 0.5	PASS
11B	2462	Ant1	8.070	≥ 0.5	PASS
11G	2412	Ant1	15.210	≥ 0.5	PASS
11G	2437	Ant1	15.210	≥ 0.5	PASS
11G	2462	Ant1	15.150	≥ 0.5	PASS
11N20SISO	2412	Ant1	15.180	≥ 0.5	PASS
11N20SISO	2437	Ant1	15.210	≥ 0.5	PASS
11N20SISO	2462	Ant1	15.210	≥ 0.5	PASS
11N40SISO	2422	Ant1	35.220	≥ 0.5	PASS
11N40SISO	2437	Ant1	35.220	≥ 0.5	PASS
11N40SISO	2452	Ant1	35.280	≥ 0.5	PASS



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM181000924401
Page: 310 of 346

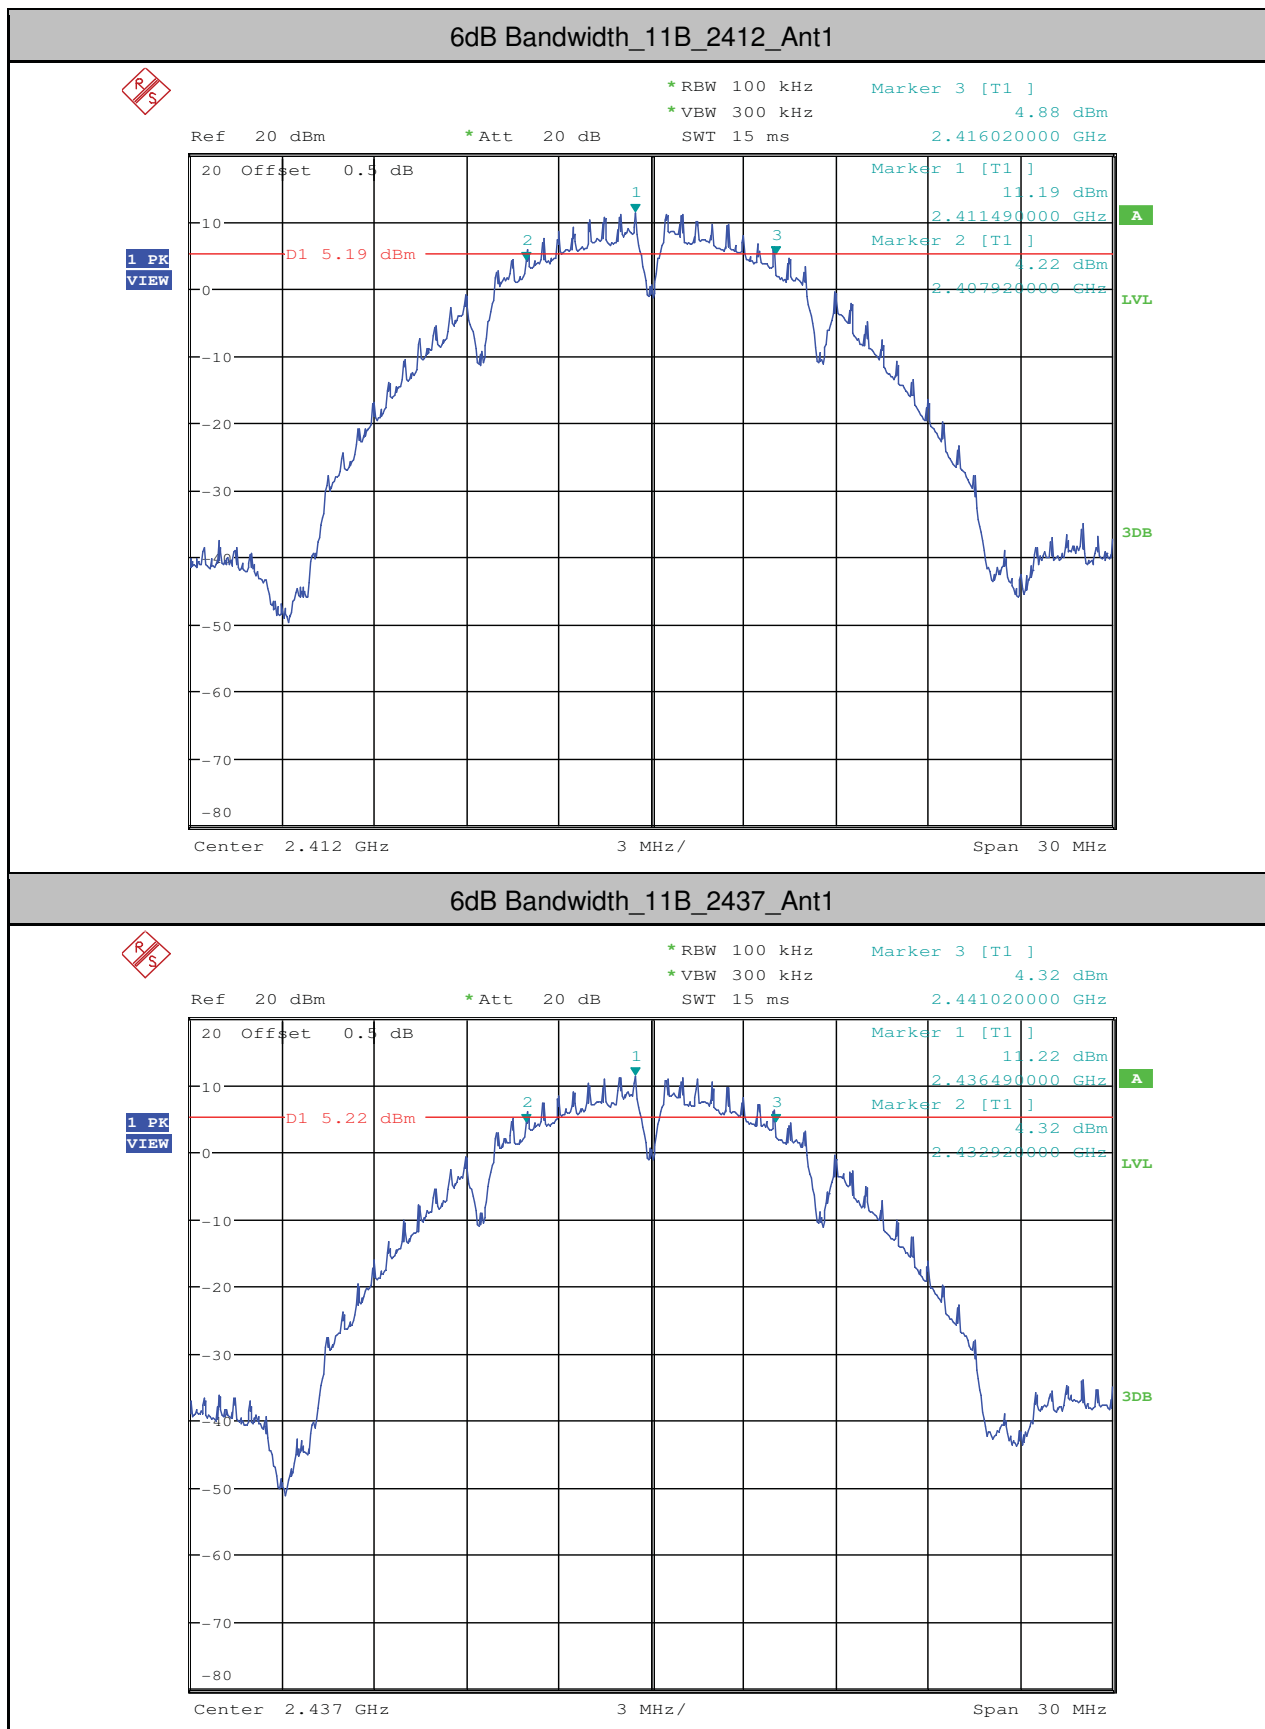





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM181000924401

Page: 311 of 346

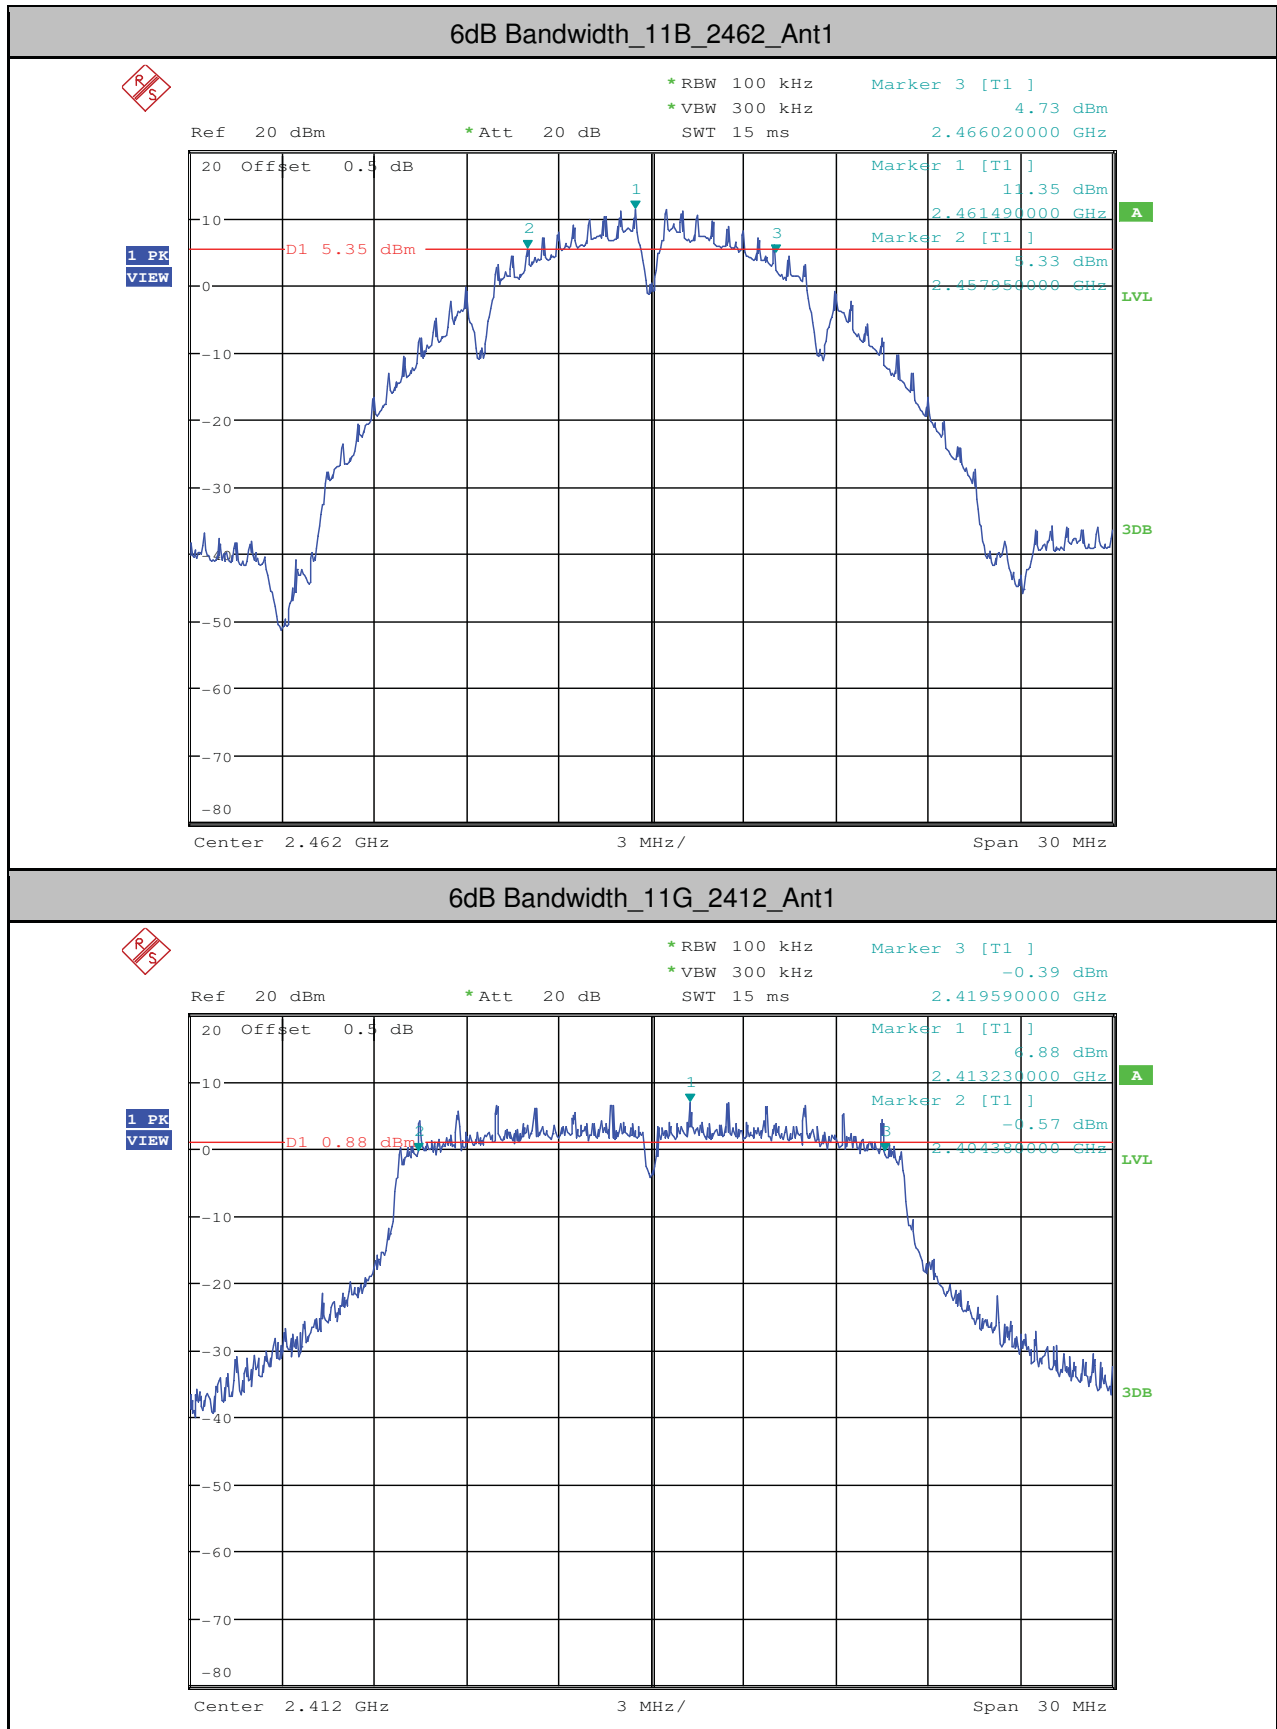


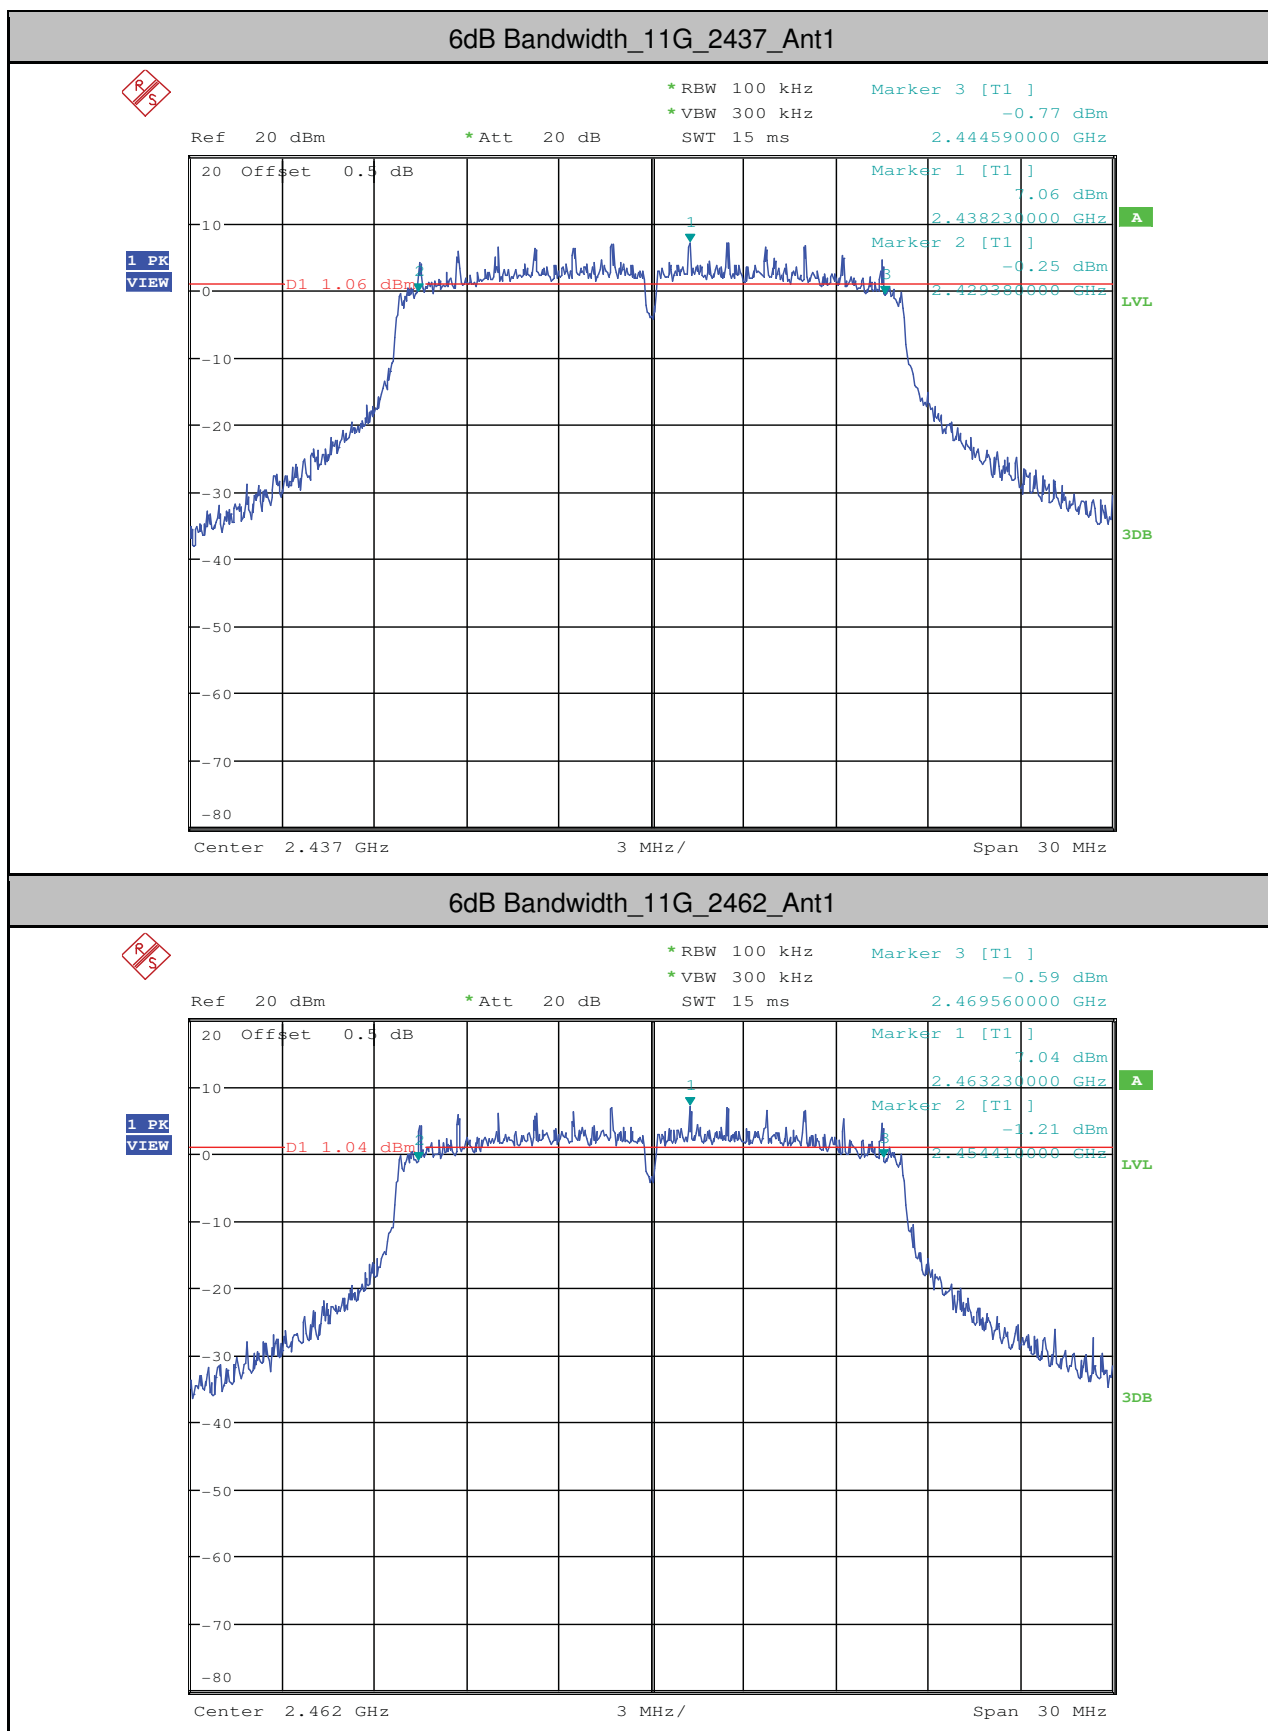






SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM181000924401

Page: 313 of 346

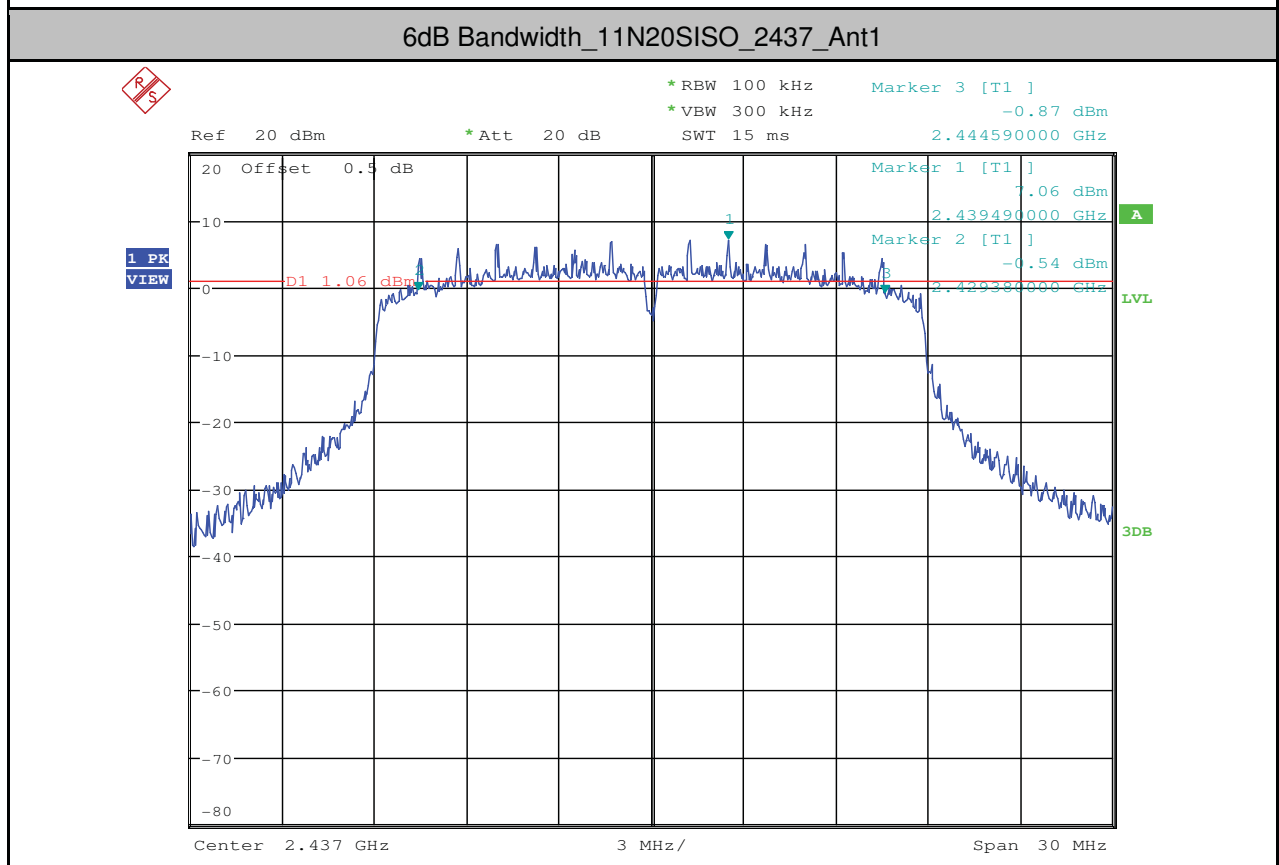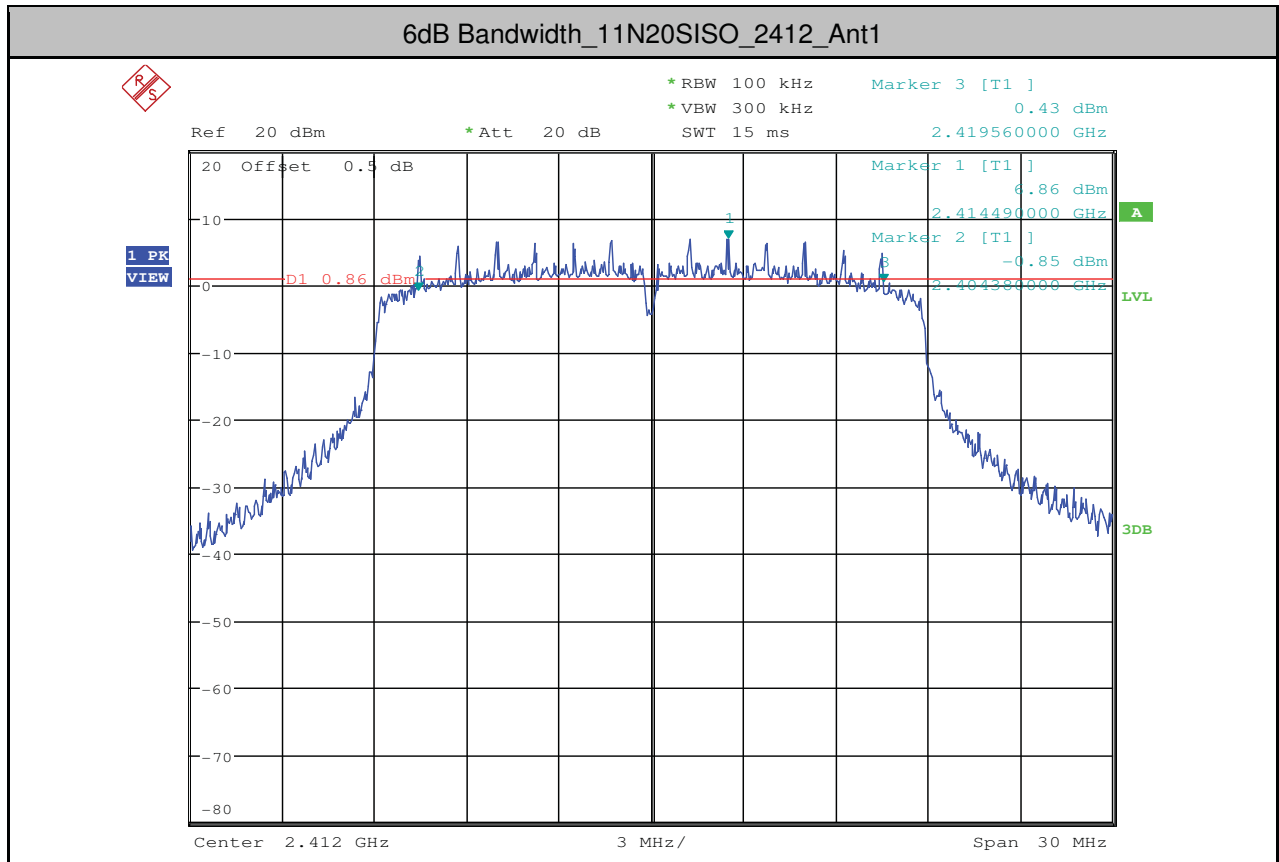

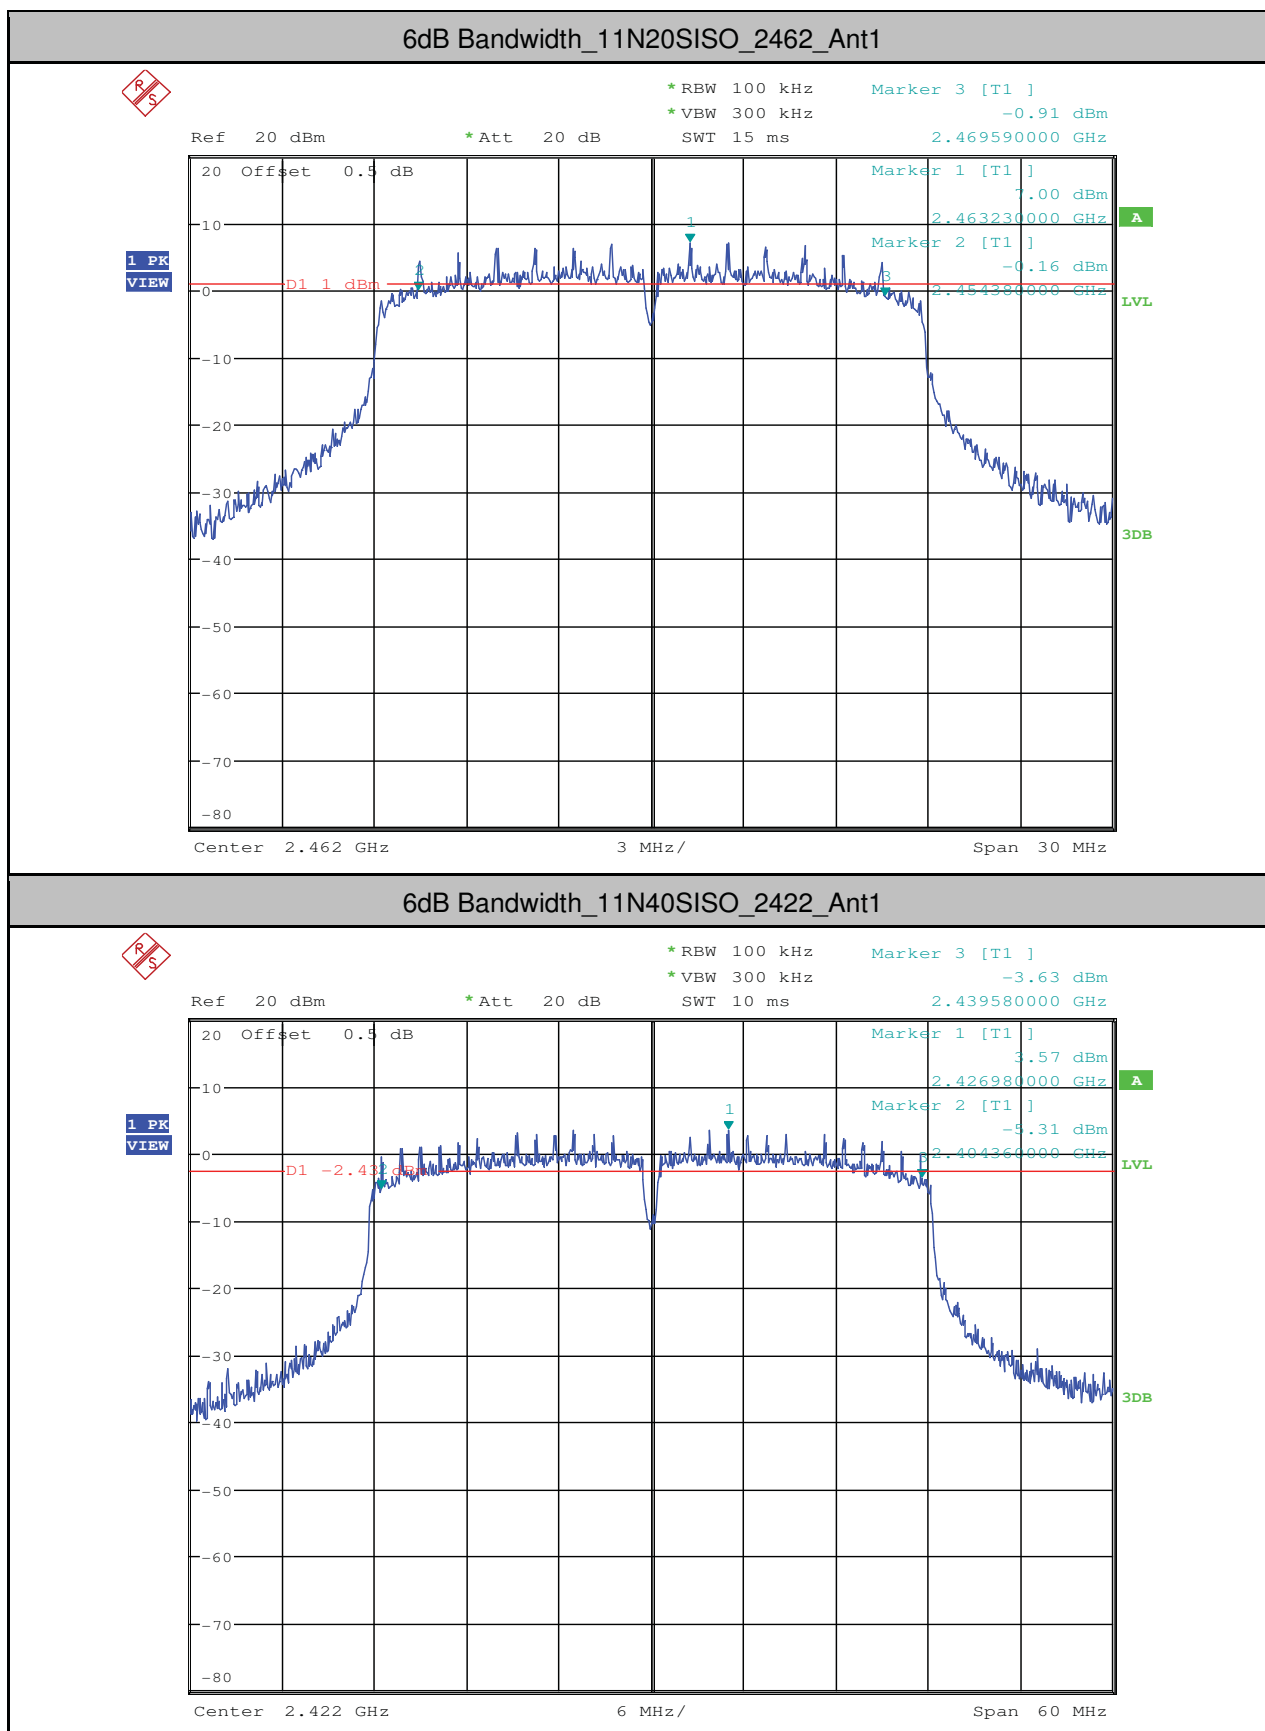

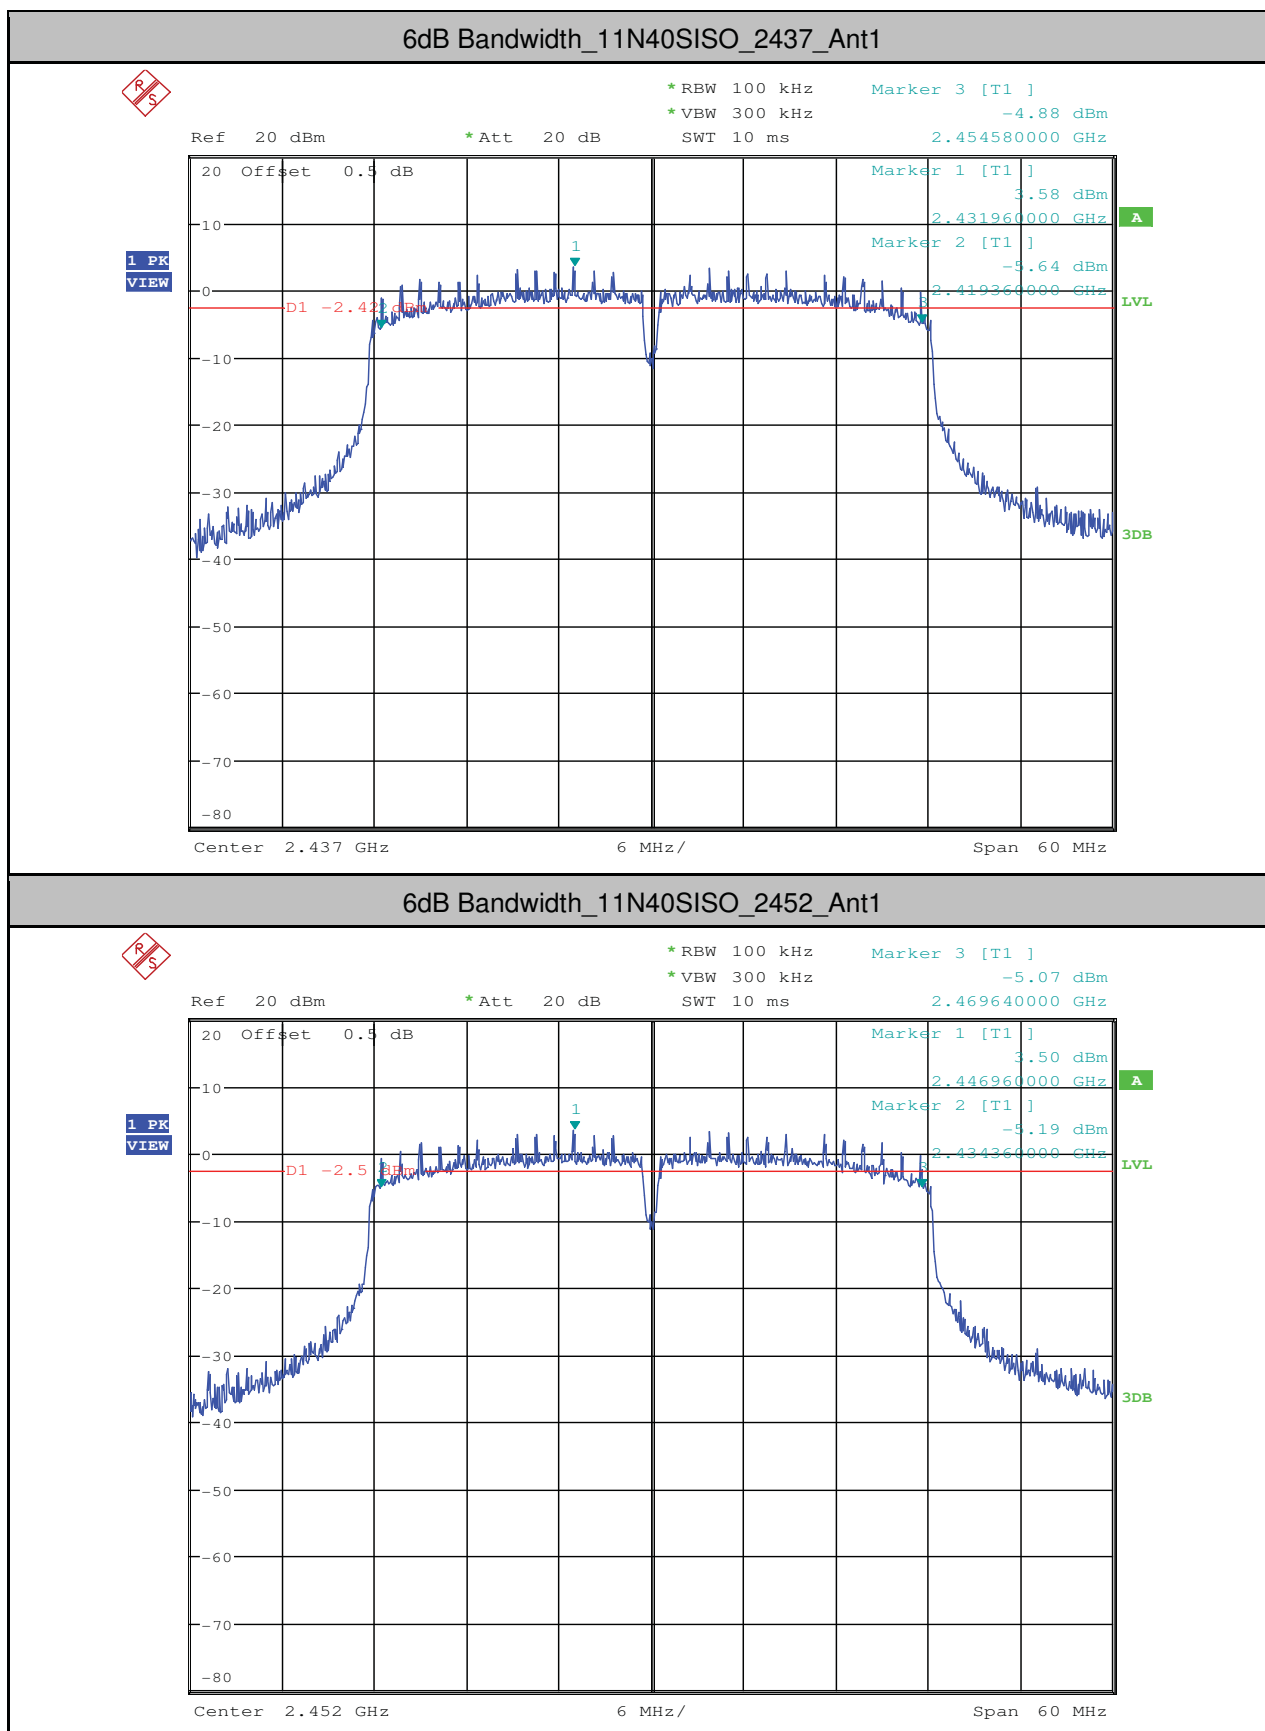



2.Maximum peak conducted output power

Test mode:	Test Channel	Ant	Power[dBm]	Limit[dBm]	Verdict
11B	2412	Ant1	22.99	<30	PASS
11B	2437	Ant1	23.28	<30	PASS
11B	2462	Ant1	23.23	<30	PASS
11G	2412	Ant1	26.38	<30	PASS
11G	2437	Ant1	26.56	<30	PASS
11G	2462	Ant1	26.54	<30	PASS
11N20SISO	2412	Ant1	26.29	<30	PASS
11N20SISO	2437	Ant1	26.33	<30	PASS
11N20SISO	2462	Ant1	26.28	<30	PASS
11N40SISO	2422	Ant1	26.49	<30	PASS
11N40SISO	2437	Ant1	26.42	<30	PASS
11N40SISO	2452	Ant1	26.38	<30	PASS

3.Maximum Peak power spectral density

Test mode:	Test Channel	Ant	PSD[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	2412	Ant1	-2.55	<8.00	PASS
11B	2437	Ant1	-1.28	<8.00	PASS
11B	2462	Ant1	-3.61	<8.00	PASS
11G	2412	Ant1	-6.78	<8.00	PASS
11G	2437	Ant1	-7.16	<8.00	PASS
11G	2462	Ant1	-7.57	<8.00	PASS
11N20SISO	2412	Ant1	-7.46	<8.00	PASS
11N20SISO	2437	Ant1	-8.34	<8.00	PASS
11N20SISO	2462	Ant1	-8.25	<8.00	PASS
11N40SISO	2422	Ant1	-10.36	<8.00	PASS
11N40SISO	2437	Ant1	-11.15	<8.00	PASS
11N40SISO	2452	Ant1	-10.91	<8.00	PASS




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM181000924401


Page: 317 of 346


Maximum Peak power spectral density_11B_2412_Ant1

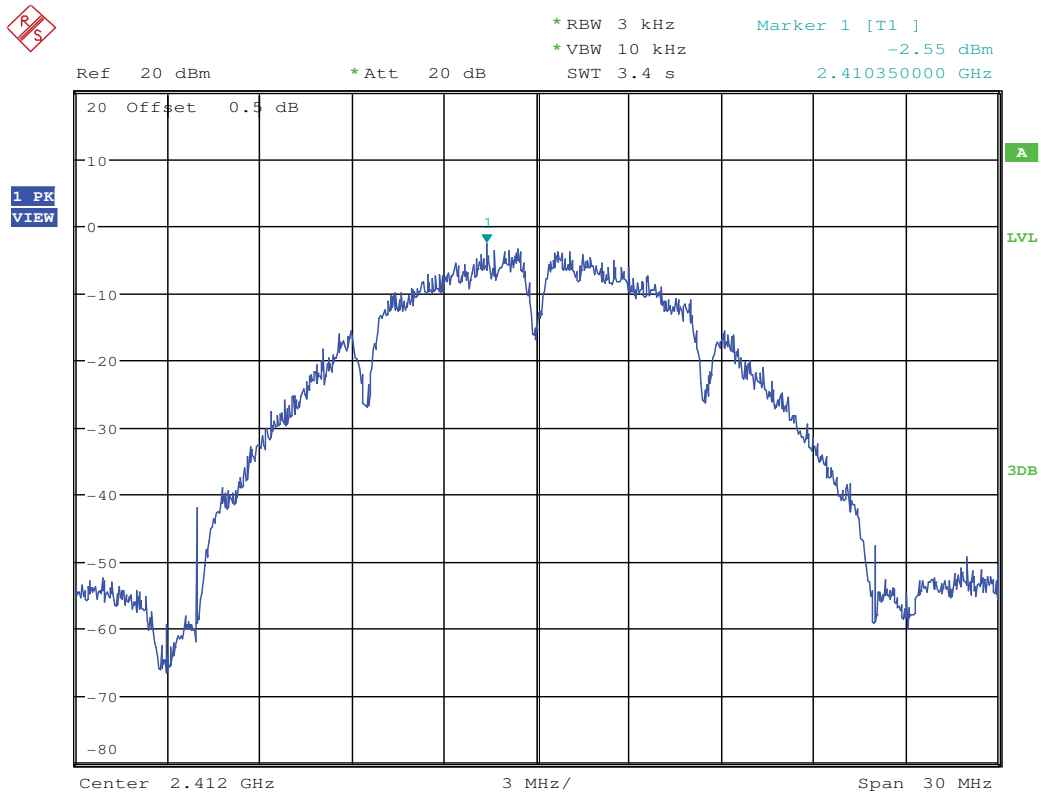



Maximum Peak power spectral density_11B_2437_Ant1

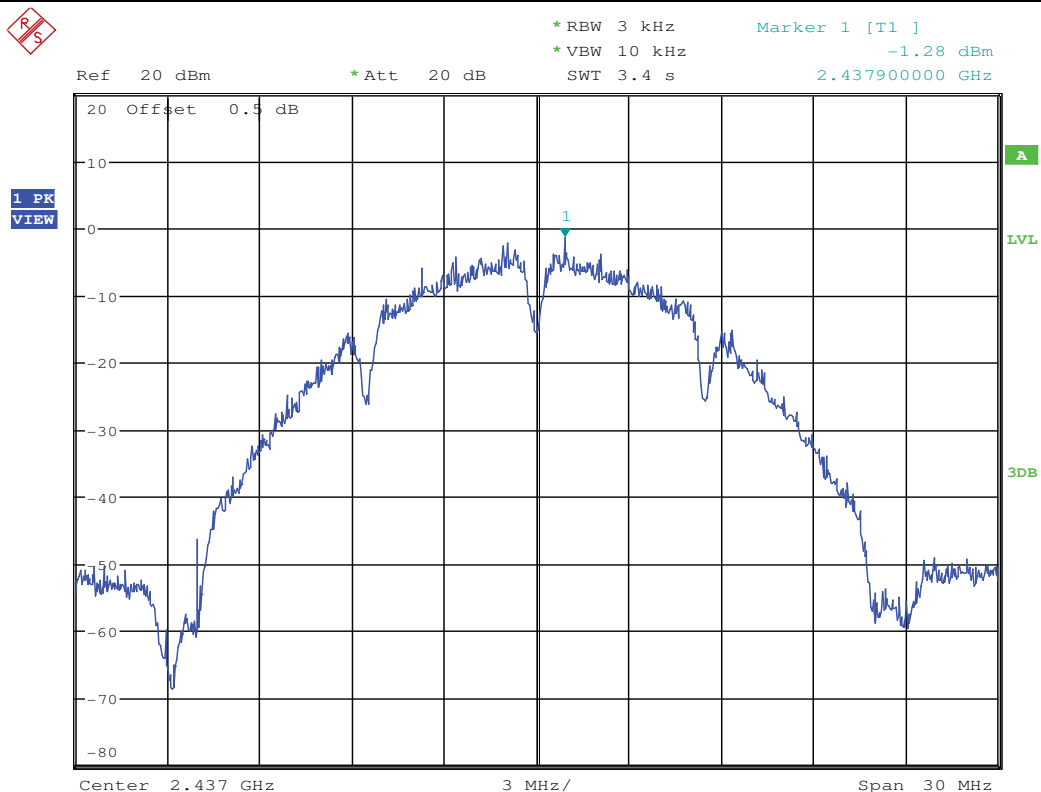

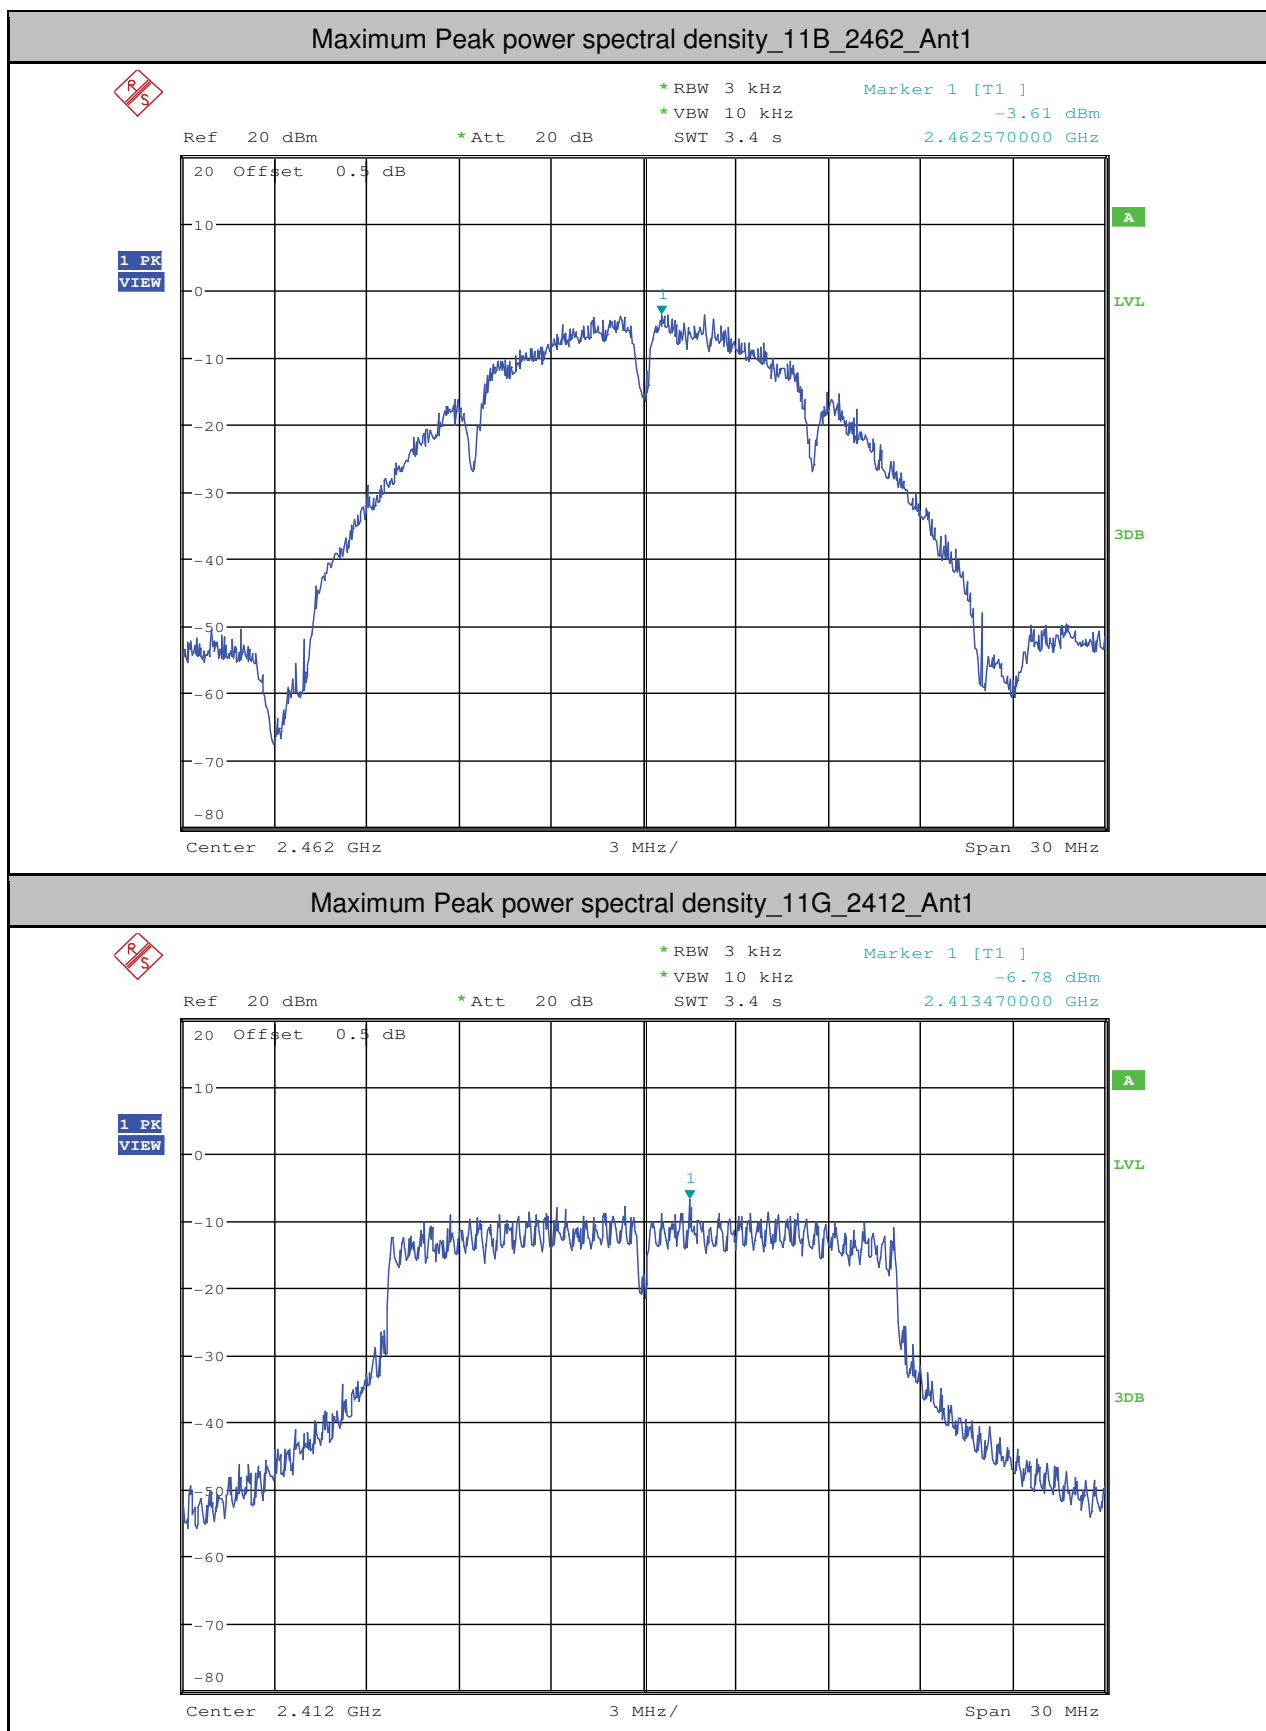

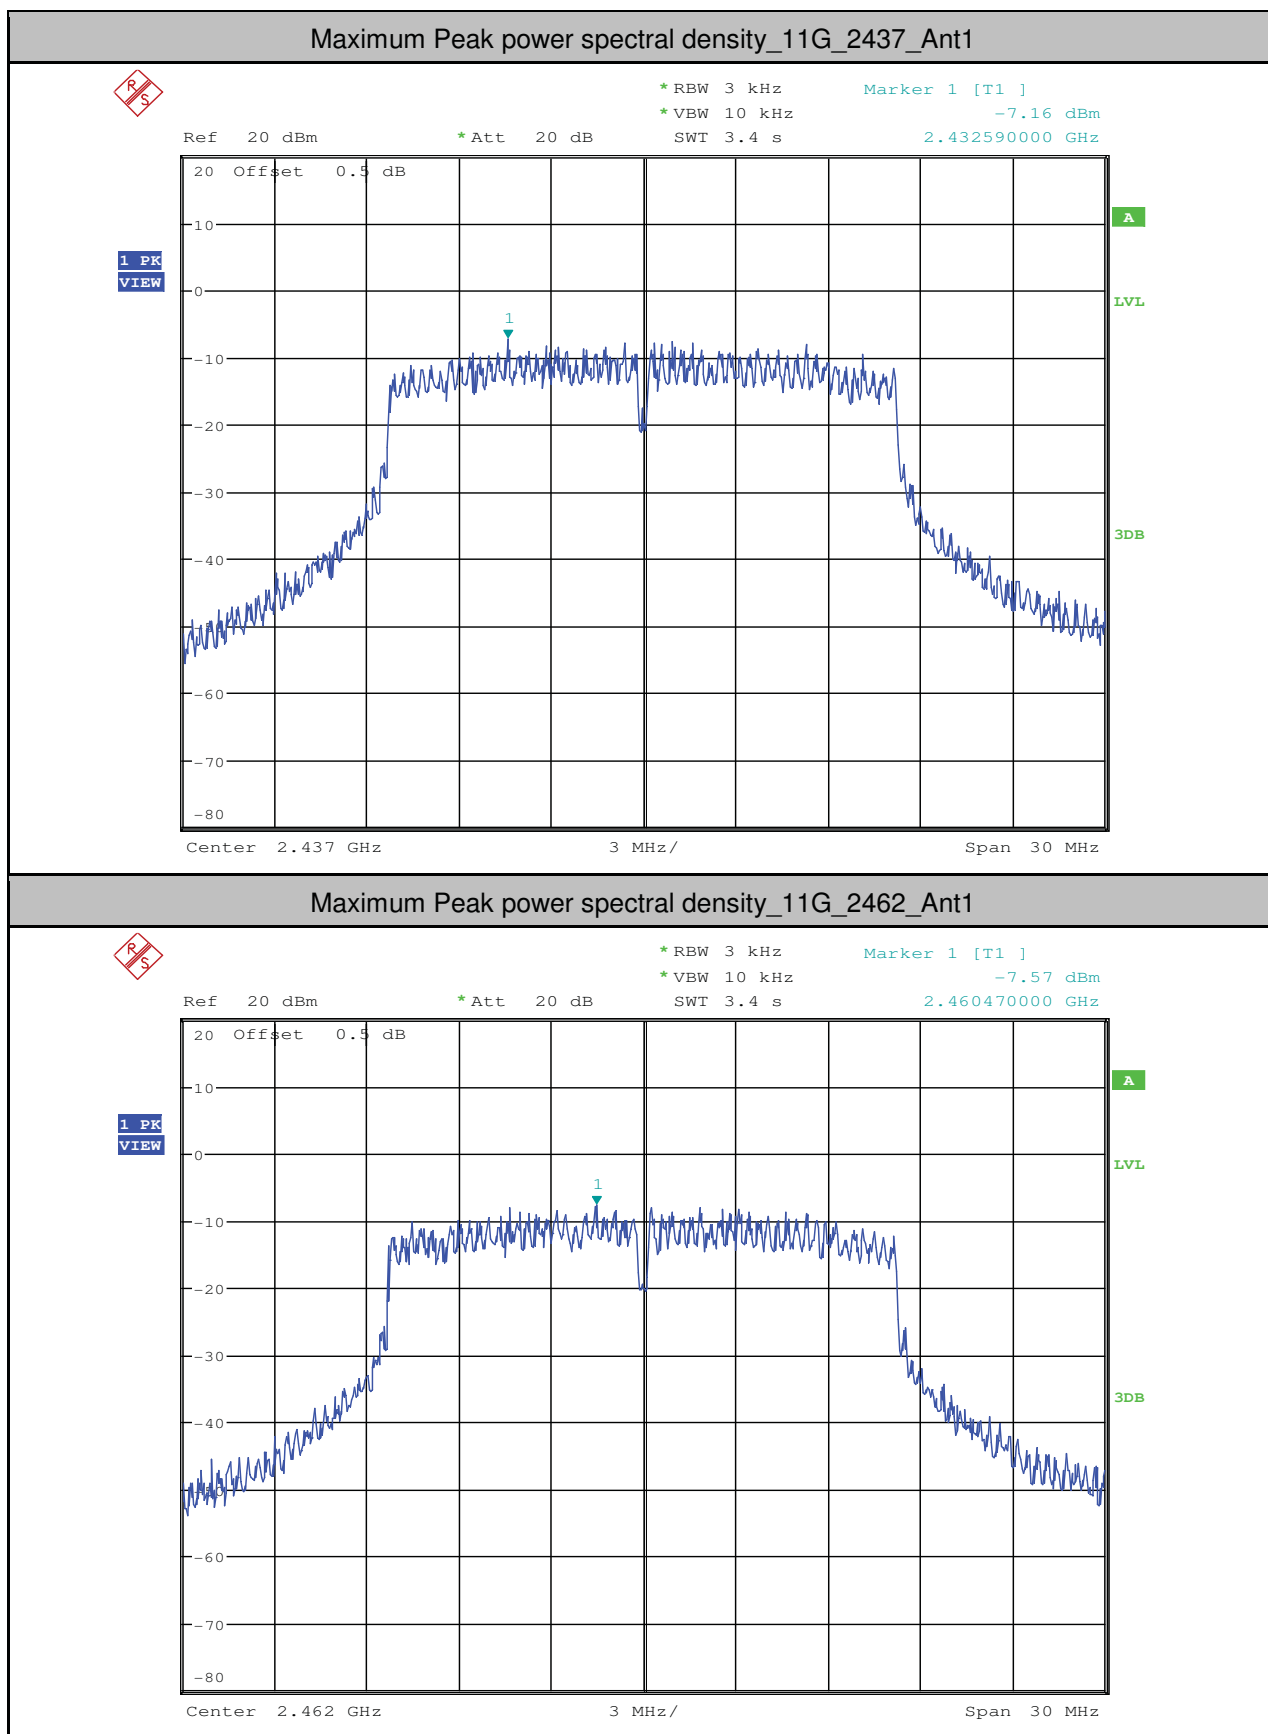


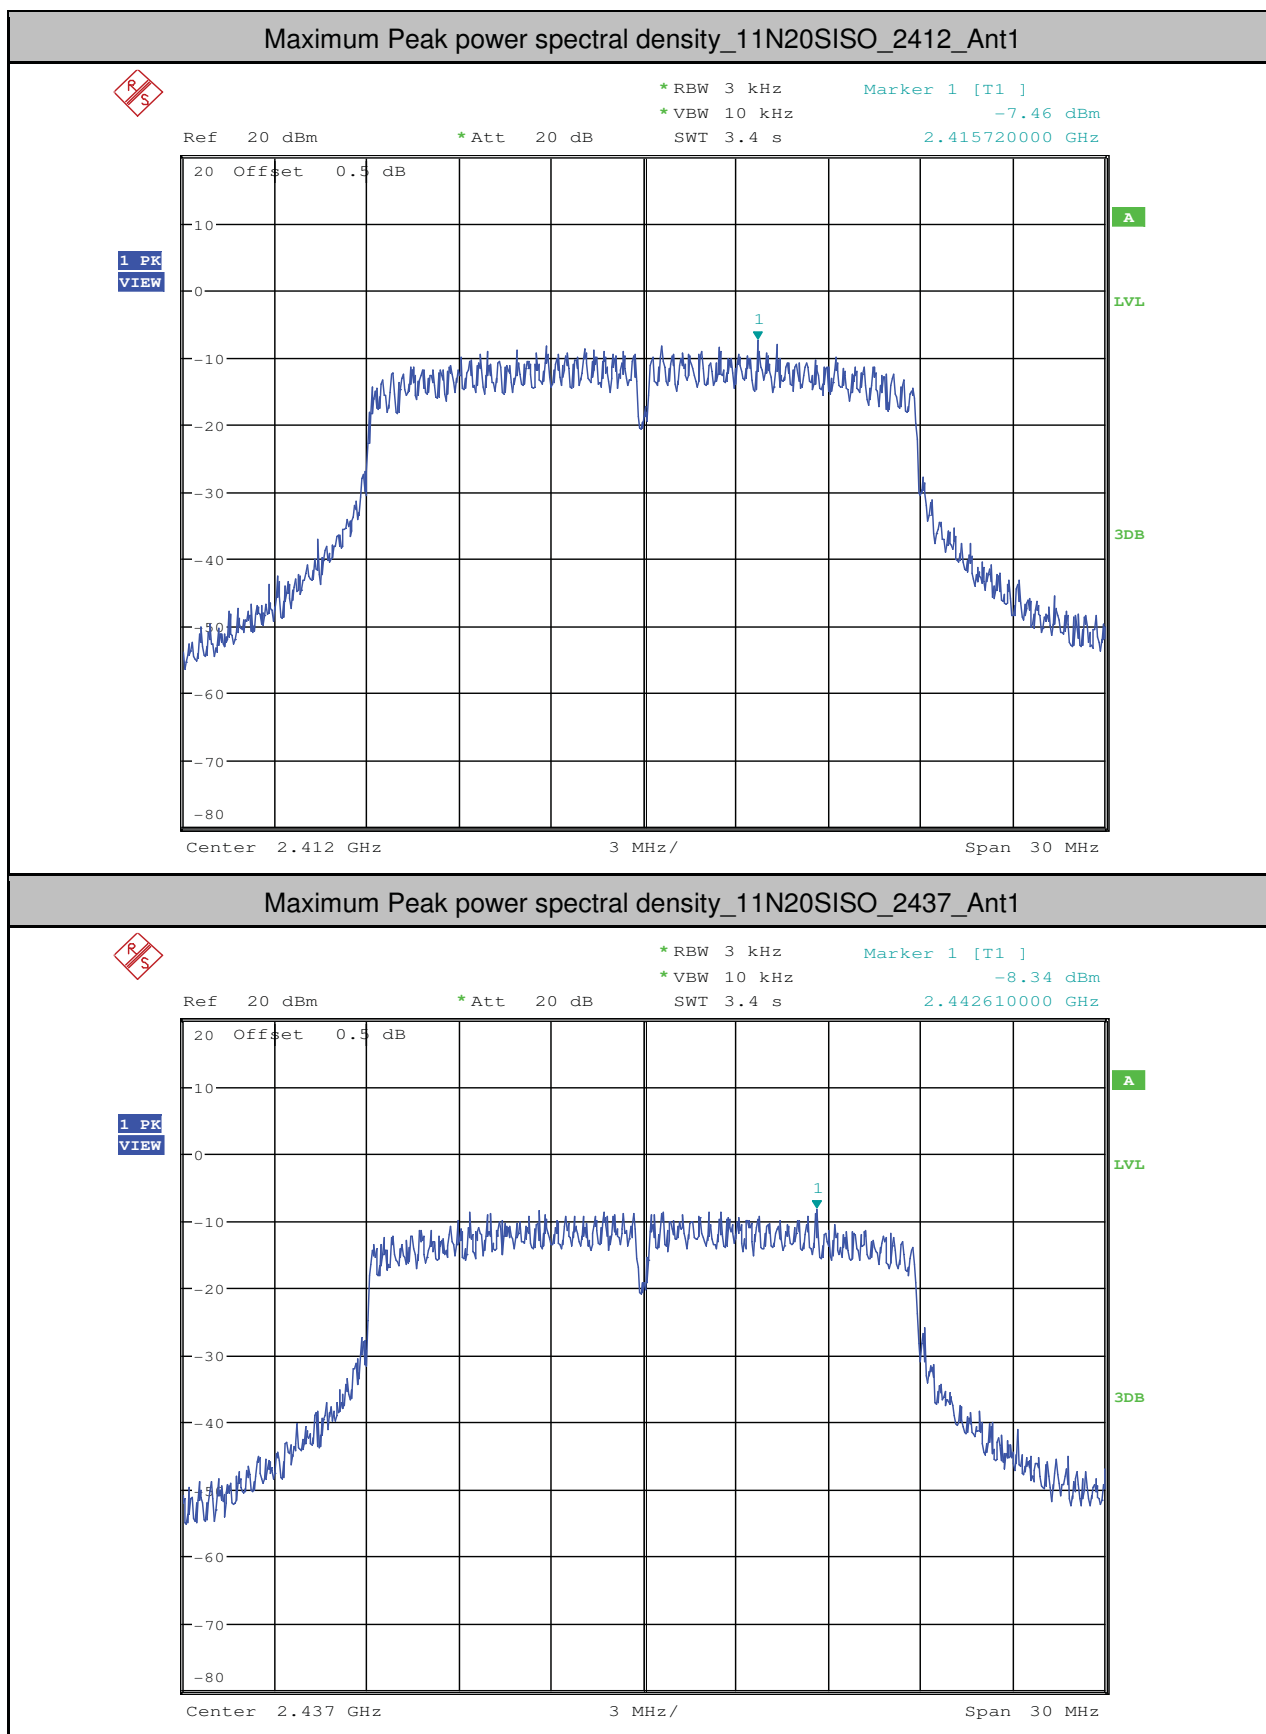

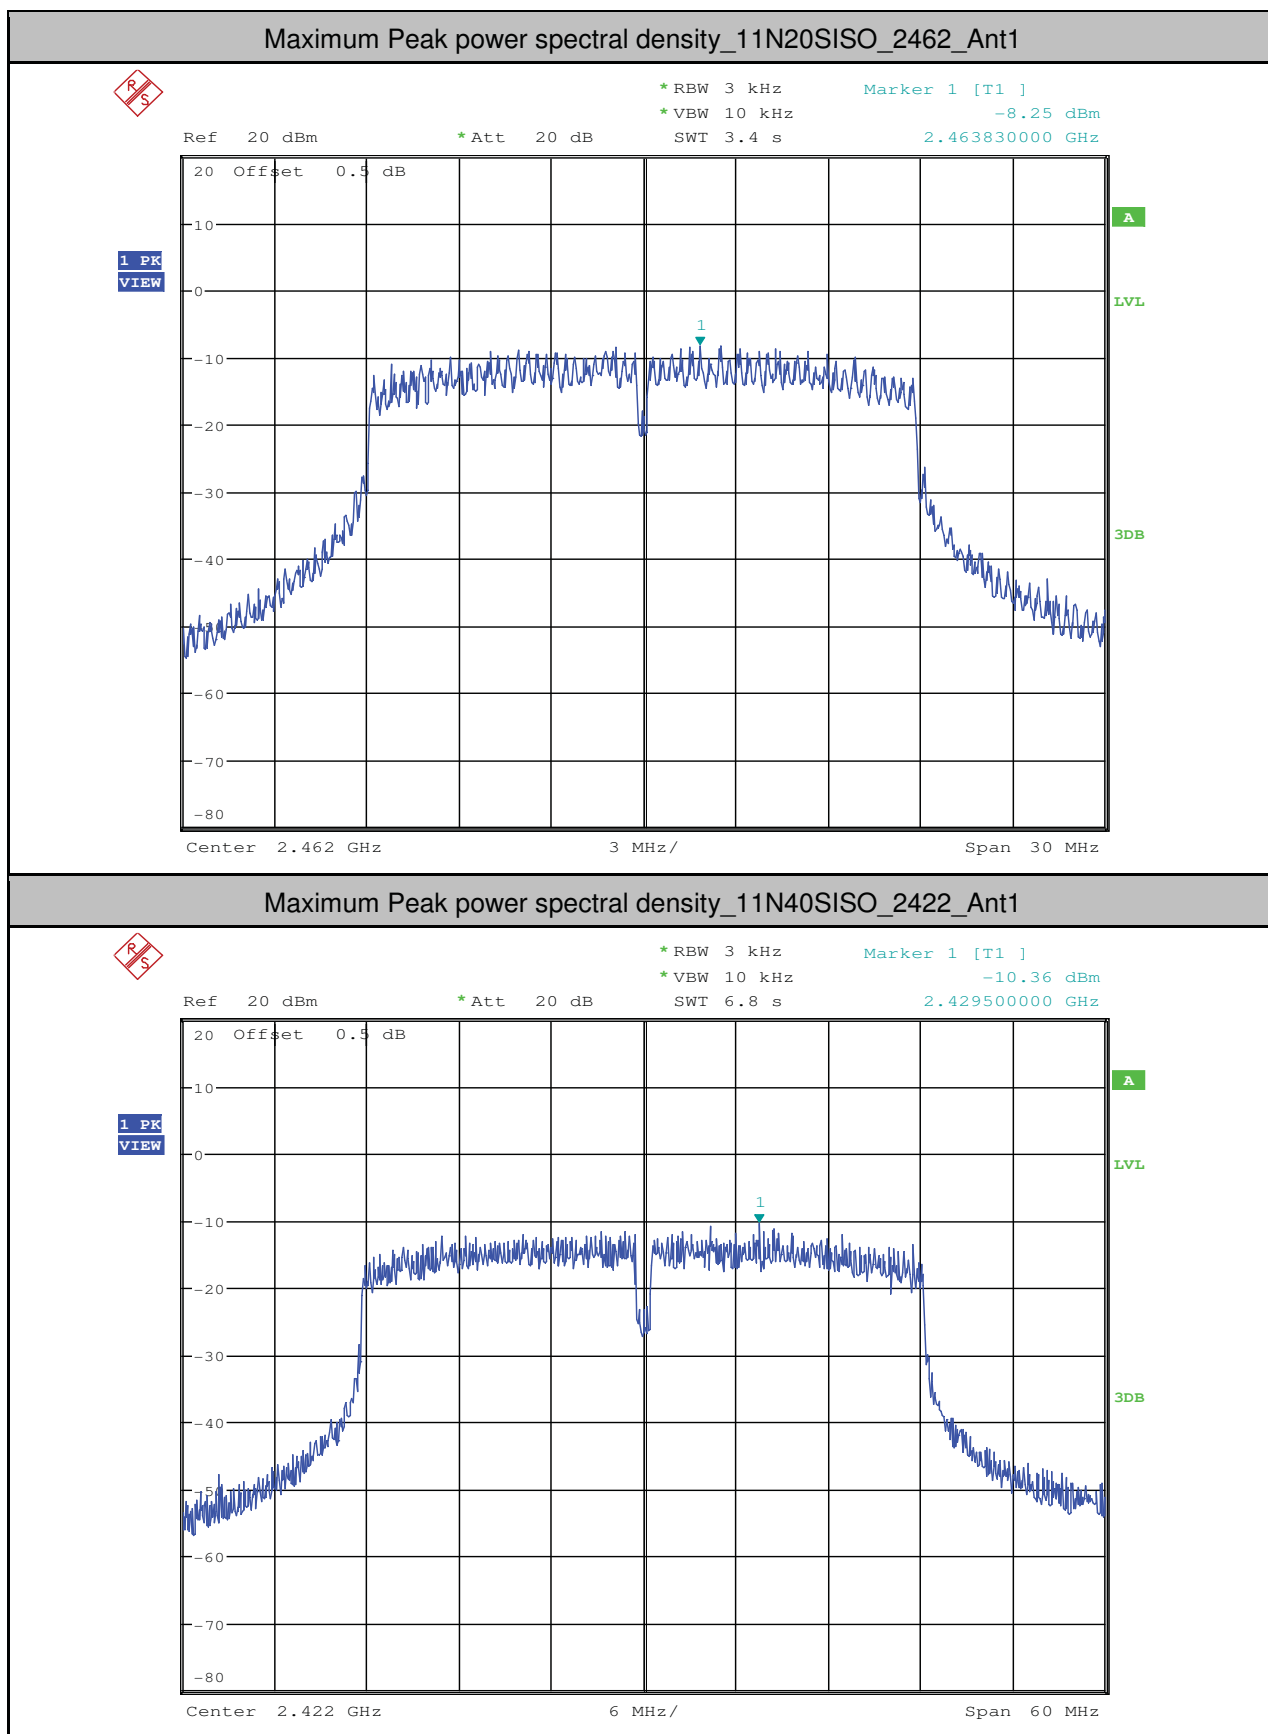




Maximum Peak power spectral density_11N40SISO_2437_Ant1

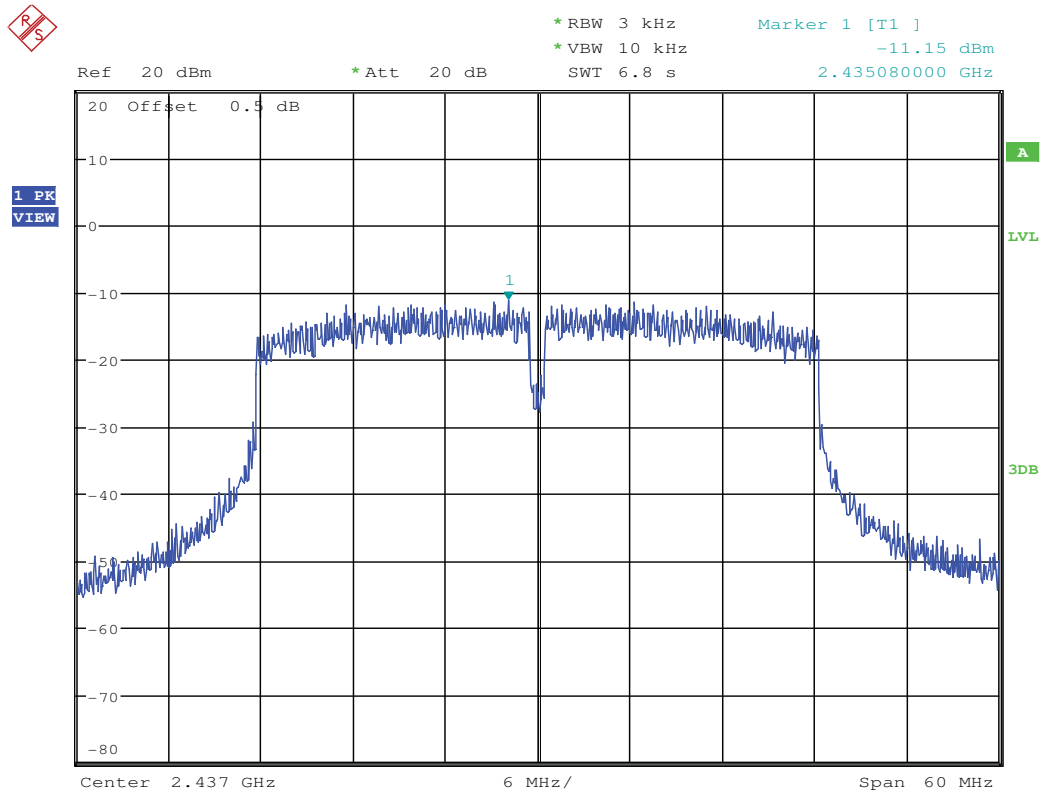

Maximum Peak power spectral density_11N40SISO_2452_Ant1

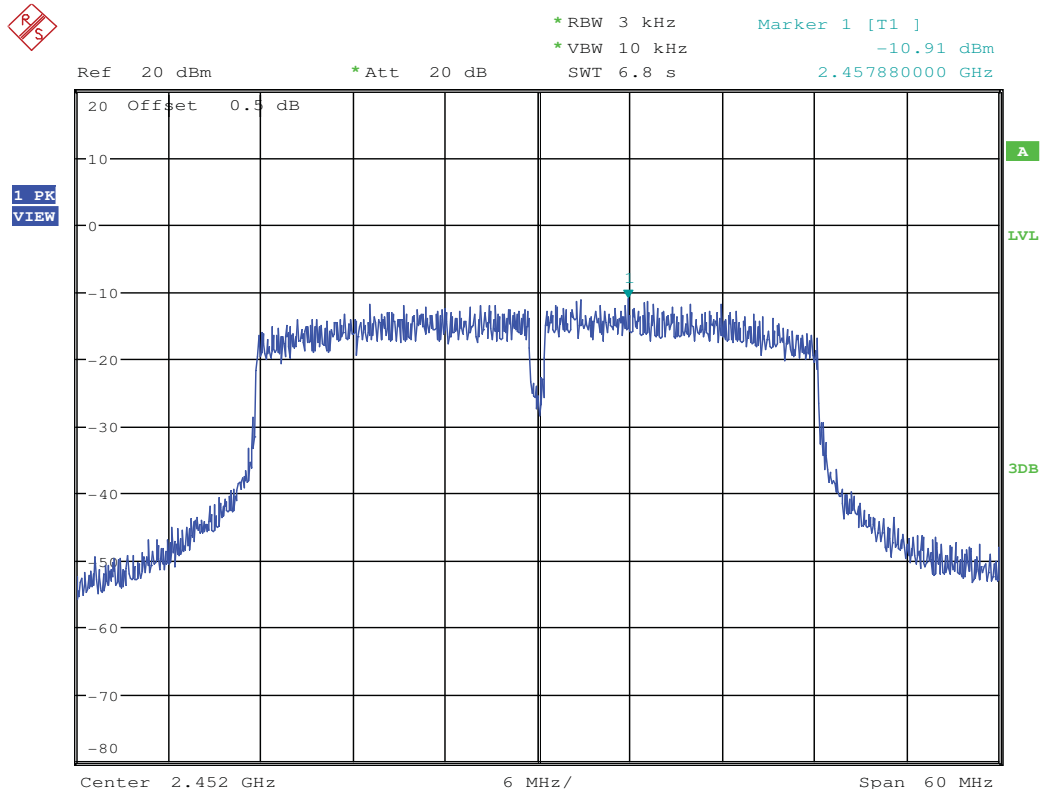




4.Band-edge for RF Conducted Emissions


Test Mode	Test Channel	Ant	Carrier Power[dBm]	Max. Spurious Level [dBm]	Limit [dBm]	Verdict
11B	2412	Ant1	11.030	-48.542	<-8.97	PASS
11B	2462	Ant1	11.340	-48.166	<-8.66	PASS
11G	2412	Ant1	6.900	-45.933	<-13.1	PASS
11G	2462	Ant1	6.950	-43.044	<-13.05	PASS
11N20SISO	2412	Ant1	6.450	-45.063	<-13.55	PASS
11N20SISO	2462	Ant1	6.960	-41.252	<-13.04	PASS
11N40SISO	2422	Ant1	3.570	-34.458	<-16.43	PASS
11N40SISO	2452	Ant1	3.550	-32.132	<-16.45	PASS



Band-edge for RF Conducted Emissions_11B_2412_Ant1

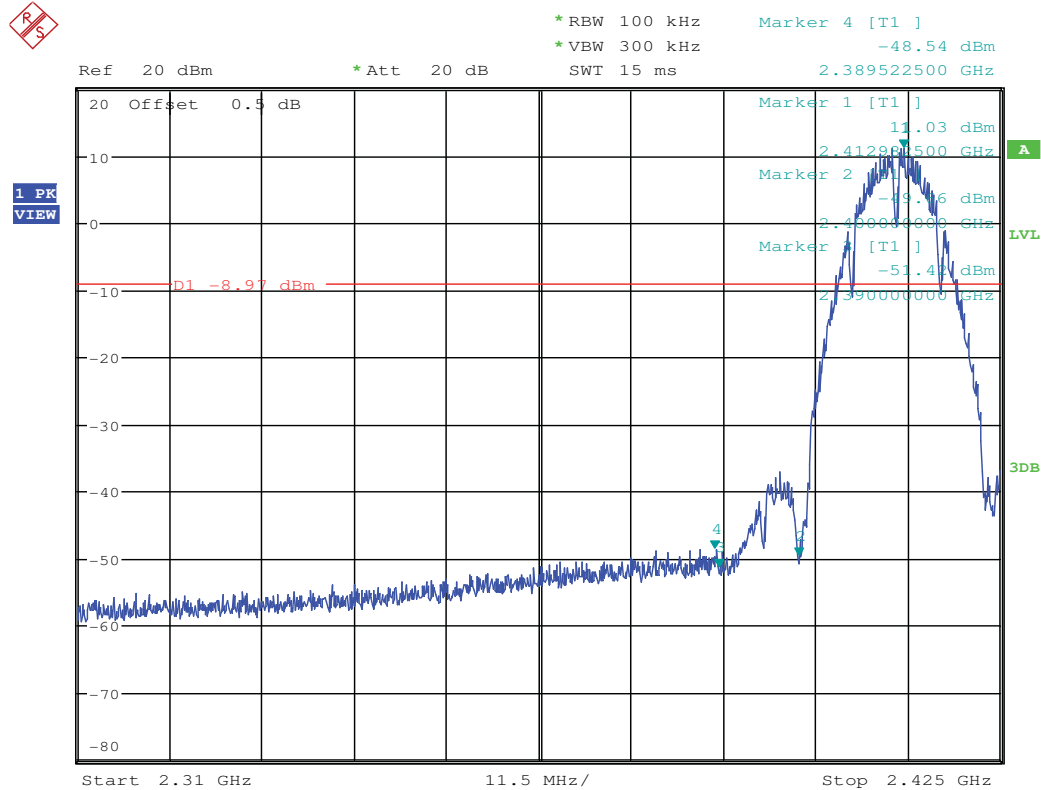


Band-edge for RF Conducted Emissions_11B_2462_Ant1

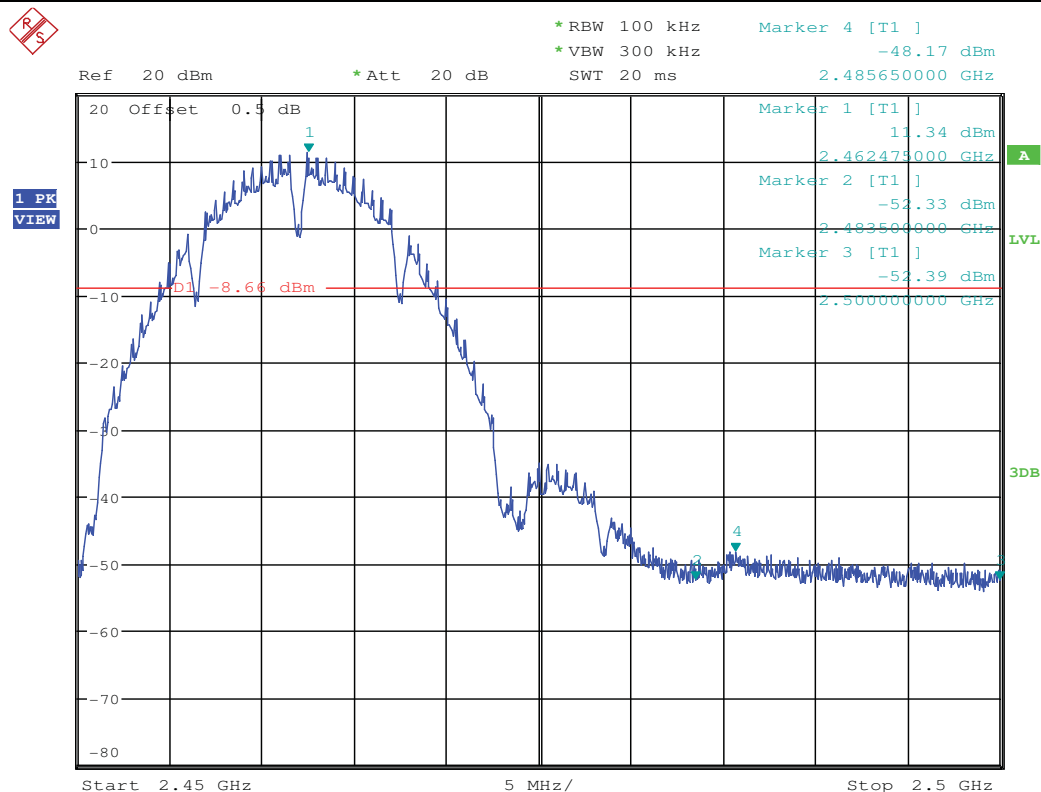






Band-edge for RF Conducted Emissions_11G_2412_Ant1

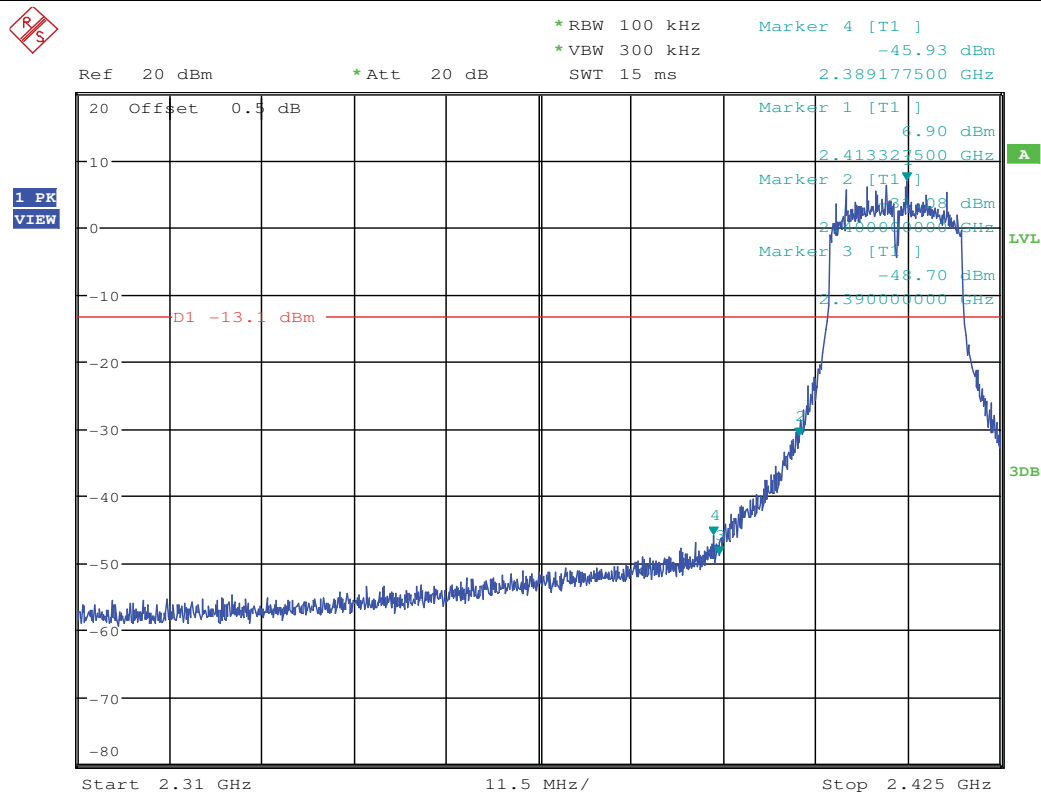

Band-edge for RF Conducted Emissions_11G_2462_Ant1

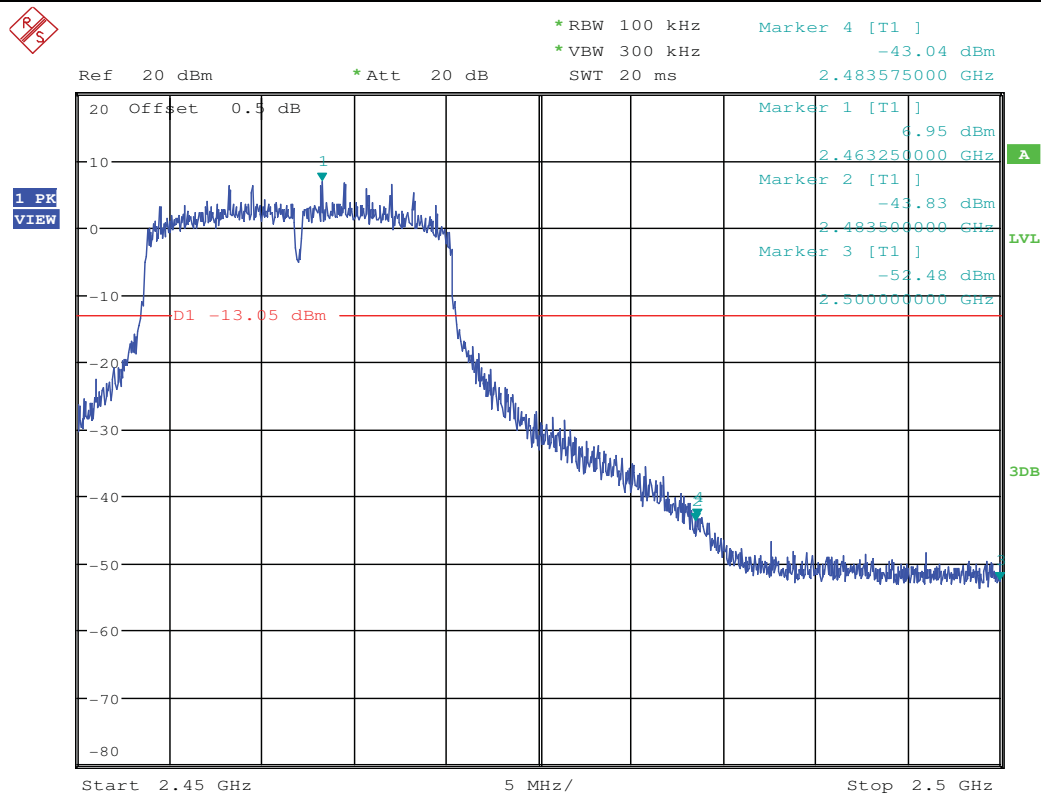

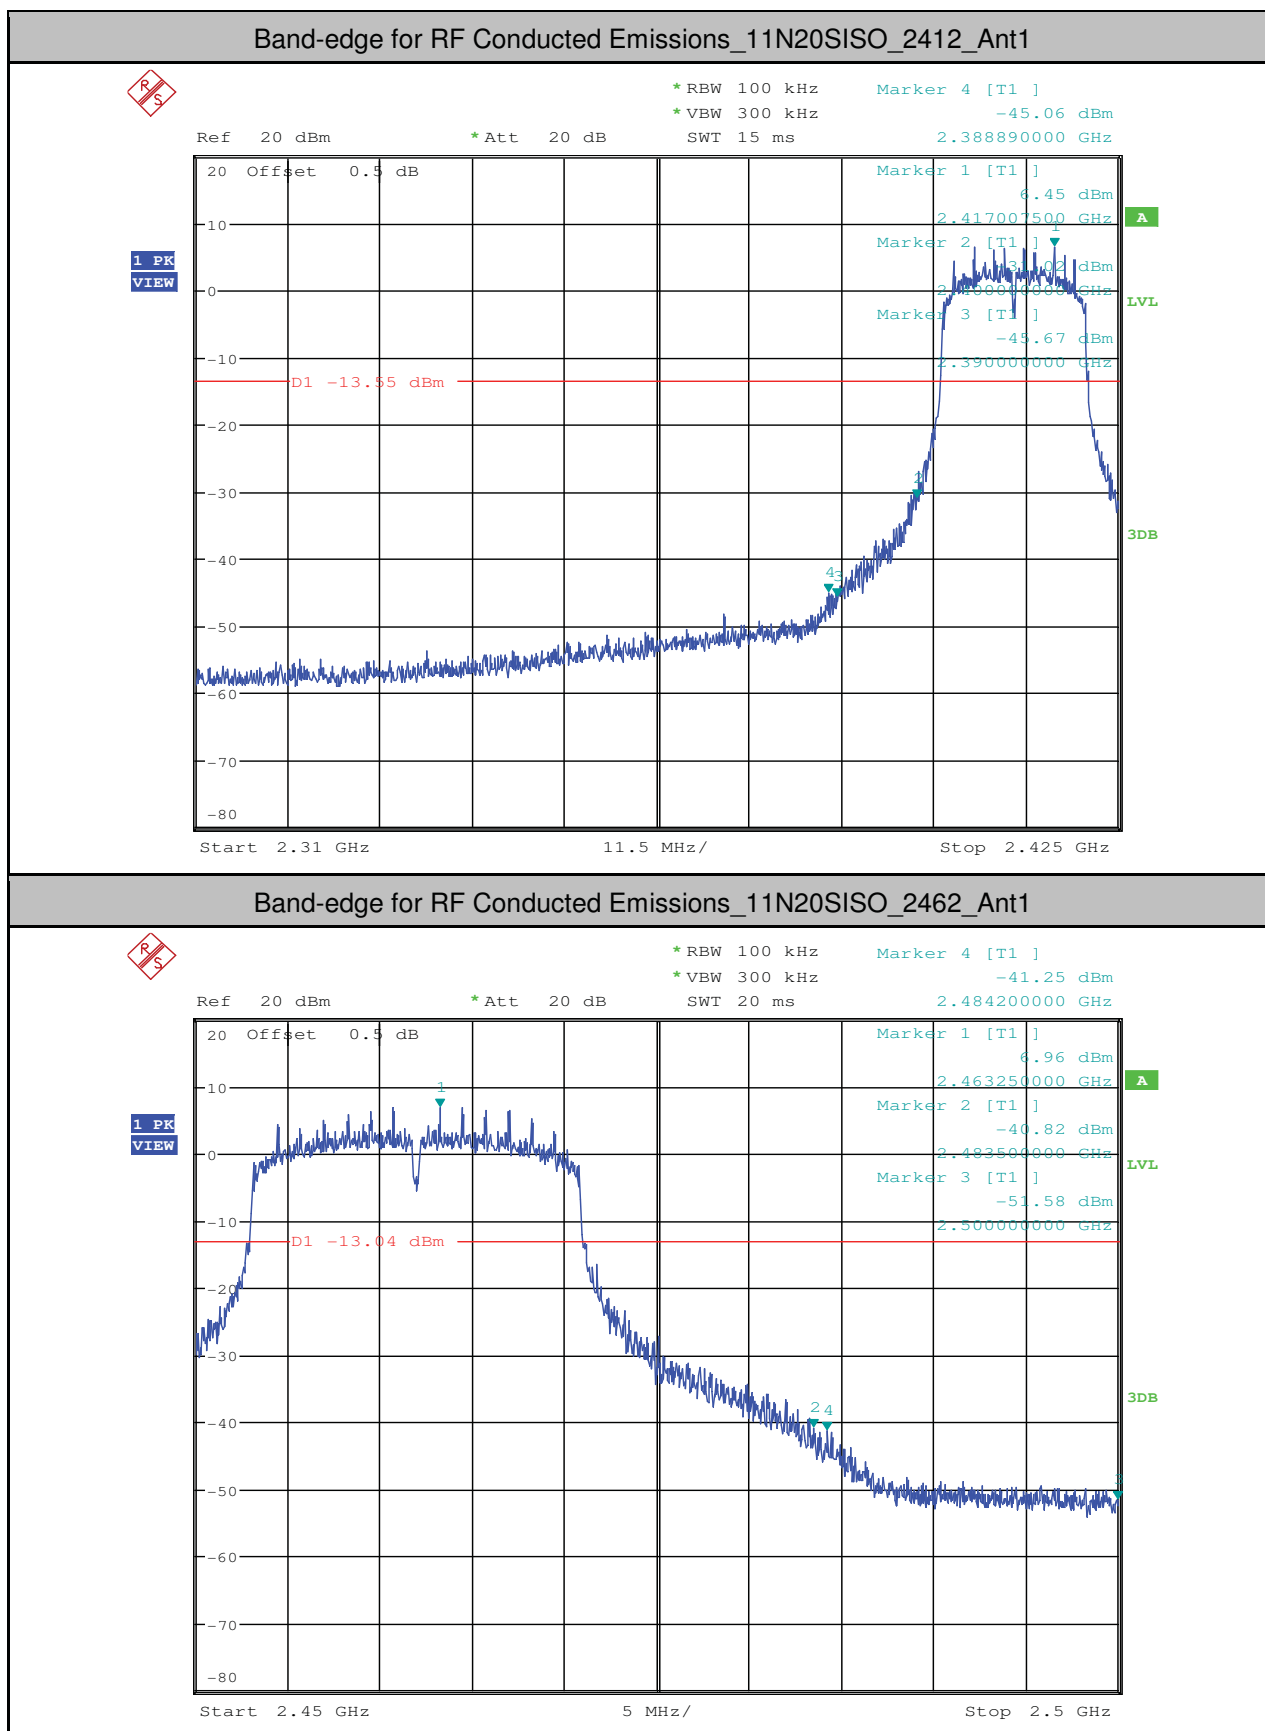

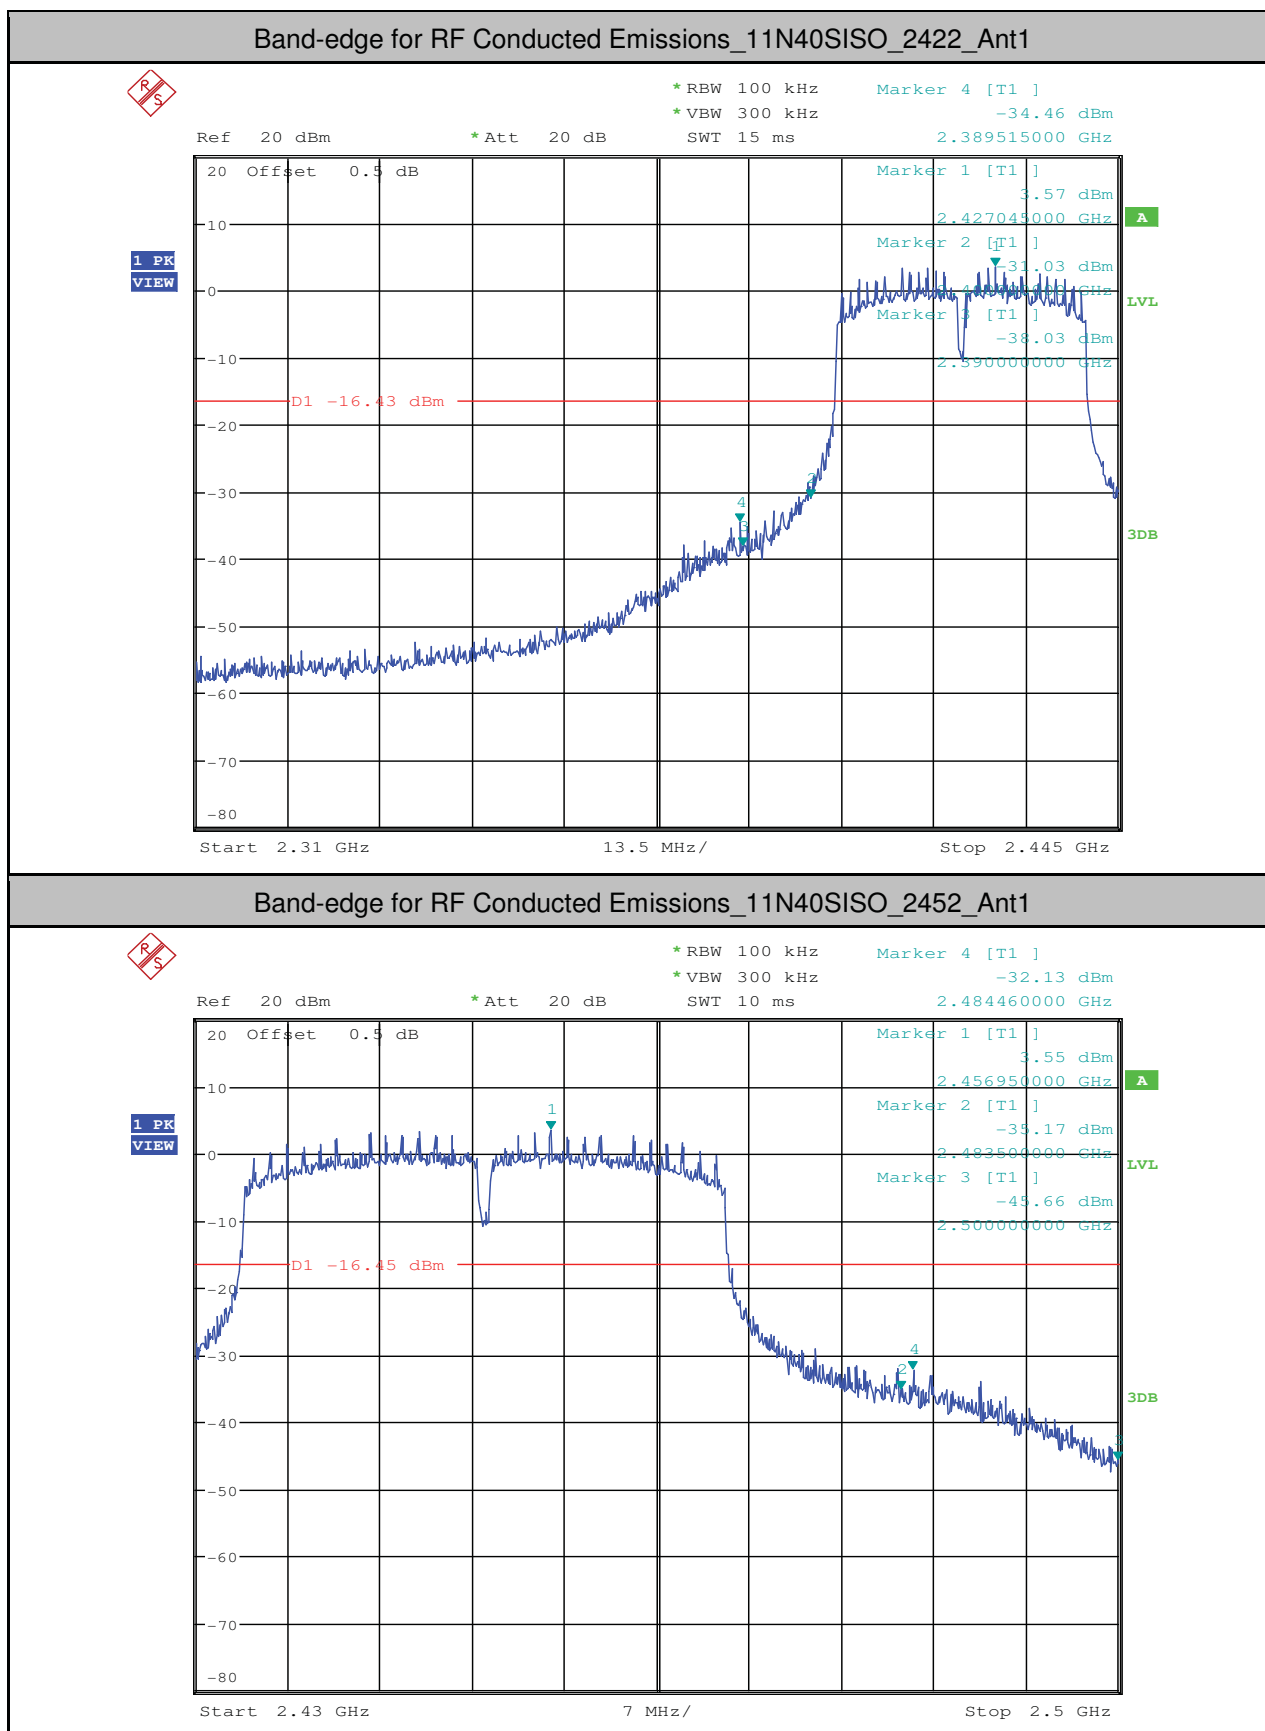




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM181000924401


Page: 328 of 346

5.RF Conducted Spurious Emissions

Test mode:	Test Channel	StartFre [MHz]	StopFre [MHz]	RBW [kHz]	VBW [kHz]	Pref[dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
11B	2412	30	10000	1000	3000	10.55	-21.190	<-9.45	PASS
11B	2412	10000	25000	1000	3000	10.55	-55.580	<-9.45	PASS
11B	2437	30	10000	1000	3000	11.31	-21.730	<-8.69	PASS
11B	2437	10000	25000	1000	3000	11.31	-55.740	<-8.69	PASS
11B	2462	30	10000	1000	3000	11.13	-21.870	<-8.87	PASS
11B	2462	10000	25000	1000	3000	11.13	-55.360	<-8.87	PASS
11G	2412	30	10000	1000	3000	6.53	-26.210	<-13.47	PASS
11G	2412	10000	25000	1000	3000	6.53	-55.780	<-13.47	PASS
11G	2437	30	10000	1000	3000	6.69	-27.560	<-13.31	PASS
11G	2437	10000	25000	1000	3000	6.69	-55.640	<-13.31	PASS
11G	2462	30	10000	1000	3000	7.33	-26.550	<-12.67	PASS
11G	2462	10000	25000	1000	3000	7.33	-54.420	<-12.67	PASS
11N20SISO	2412	30	10000	1000	3000	6.64	-28.220	<-13.36	PASS
11N20SISO	2412	10000	25000	1000	3000	6.64	-55.540	<-13.36	PASS
11N20SISO	2437	30	10000	1000	3000	6.94	-28.150	<-13.06	PASS
11N20SISO	2437	10000	25000	1000	3000	6.94	-55.100	<-13.06	PASS
11N20SISO	2462	30	10000	1000	3000	6.51	-25.710	<-13.49	PASS
11N20SISO	2462	10000	25000	1000	3000	6.51	-55.300	<-13.49	PASS
11N40SISO	2422	30	10000	1000	3000	3.09	-31.250	<-16.91	PASS
11N40SISO	2422	10000	25000	1000	3000	3.09	-55.550	<-16.91	PASS
11N40SISO	2437	30	10000	1000	3000	3.54	-30.960	<-16.46	PASS
11N40SISO	2437	10000	25000	1000	3000	3.54	-55.550	<-16.46	PASS
11N40SISO	2452	30	10000	1000	3000	3.41	-31.410	<-16.59	PASS
11N40SISO	2452	10000	25000	1000	3000	3.41	-54.290	<-16.59	PASS

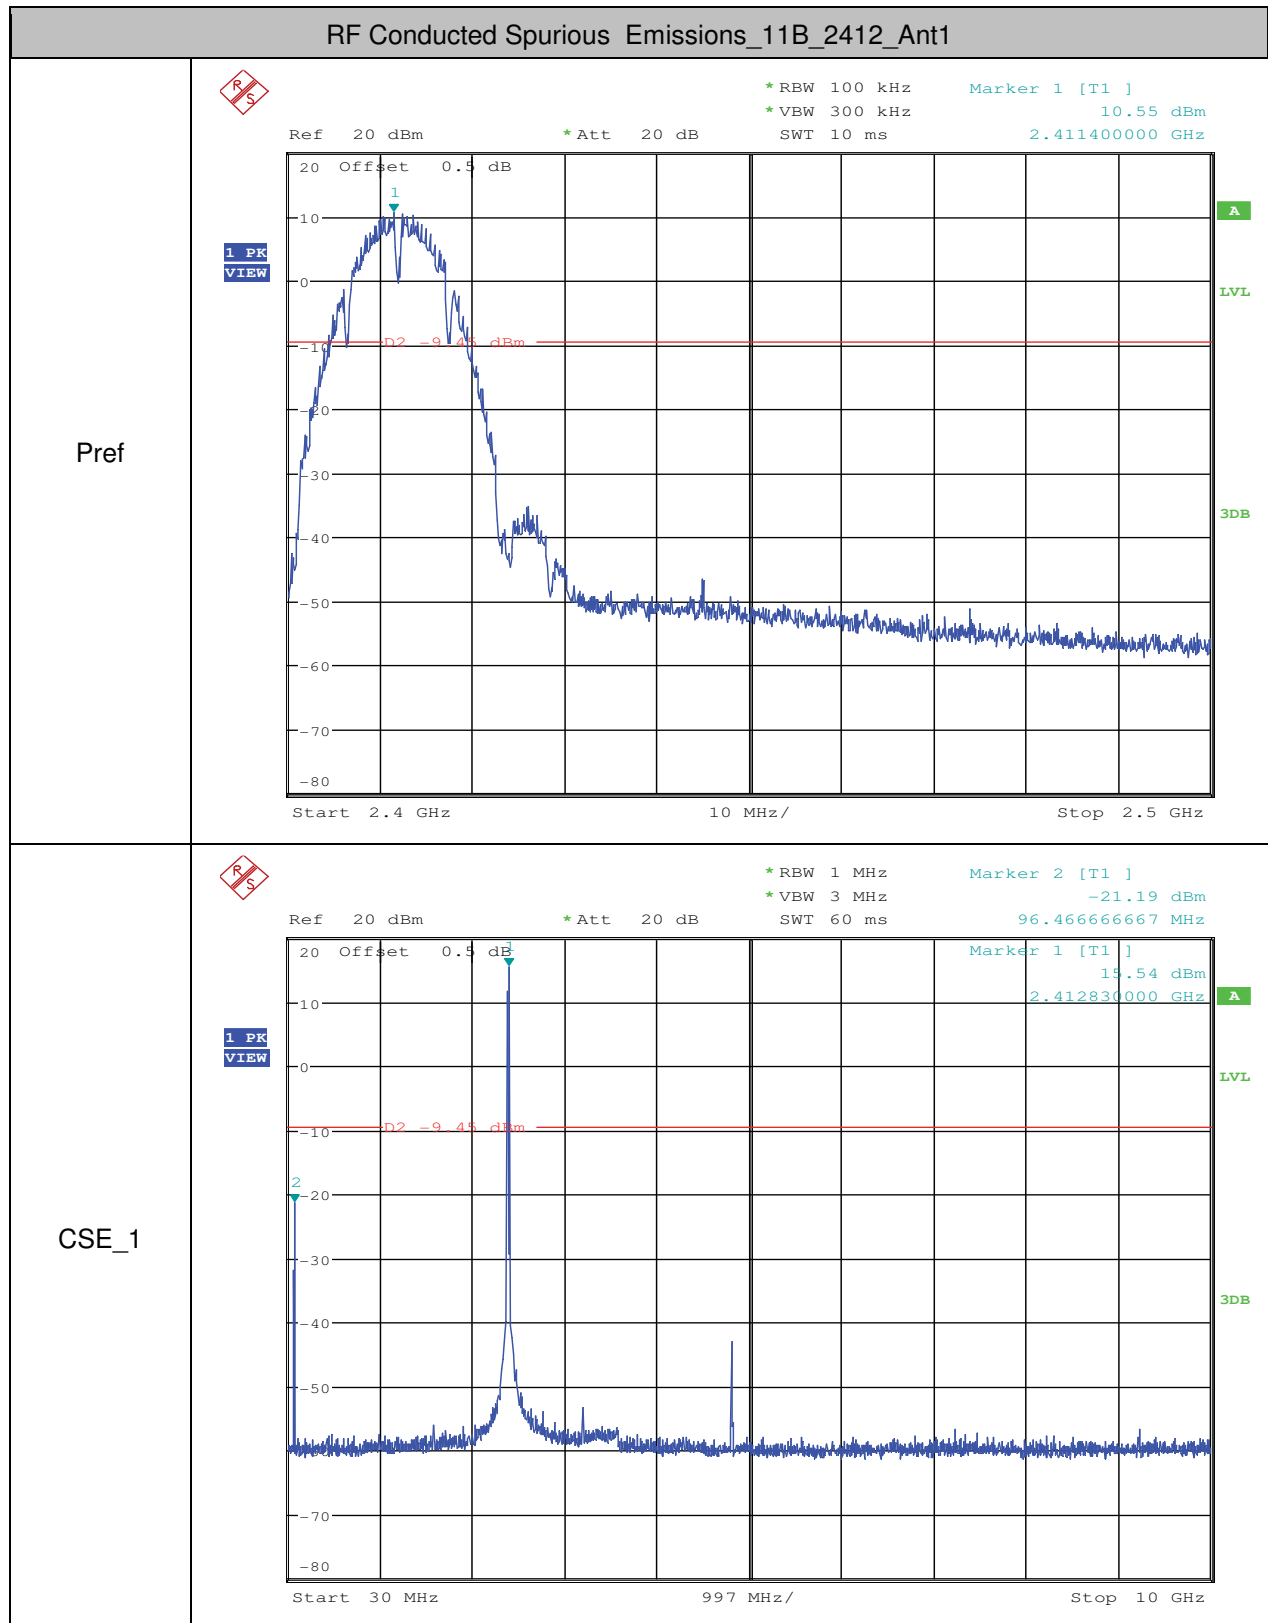

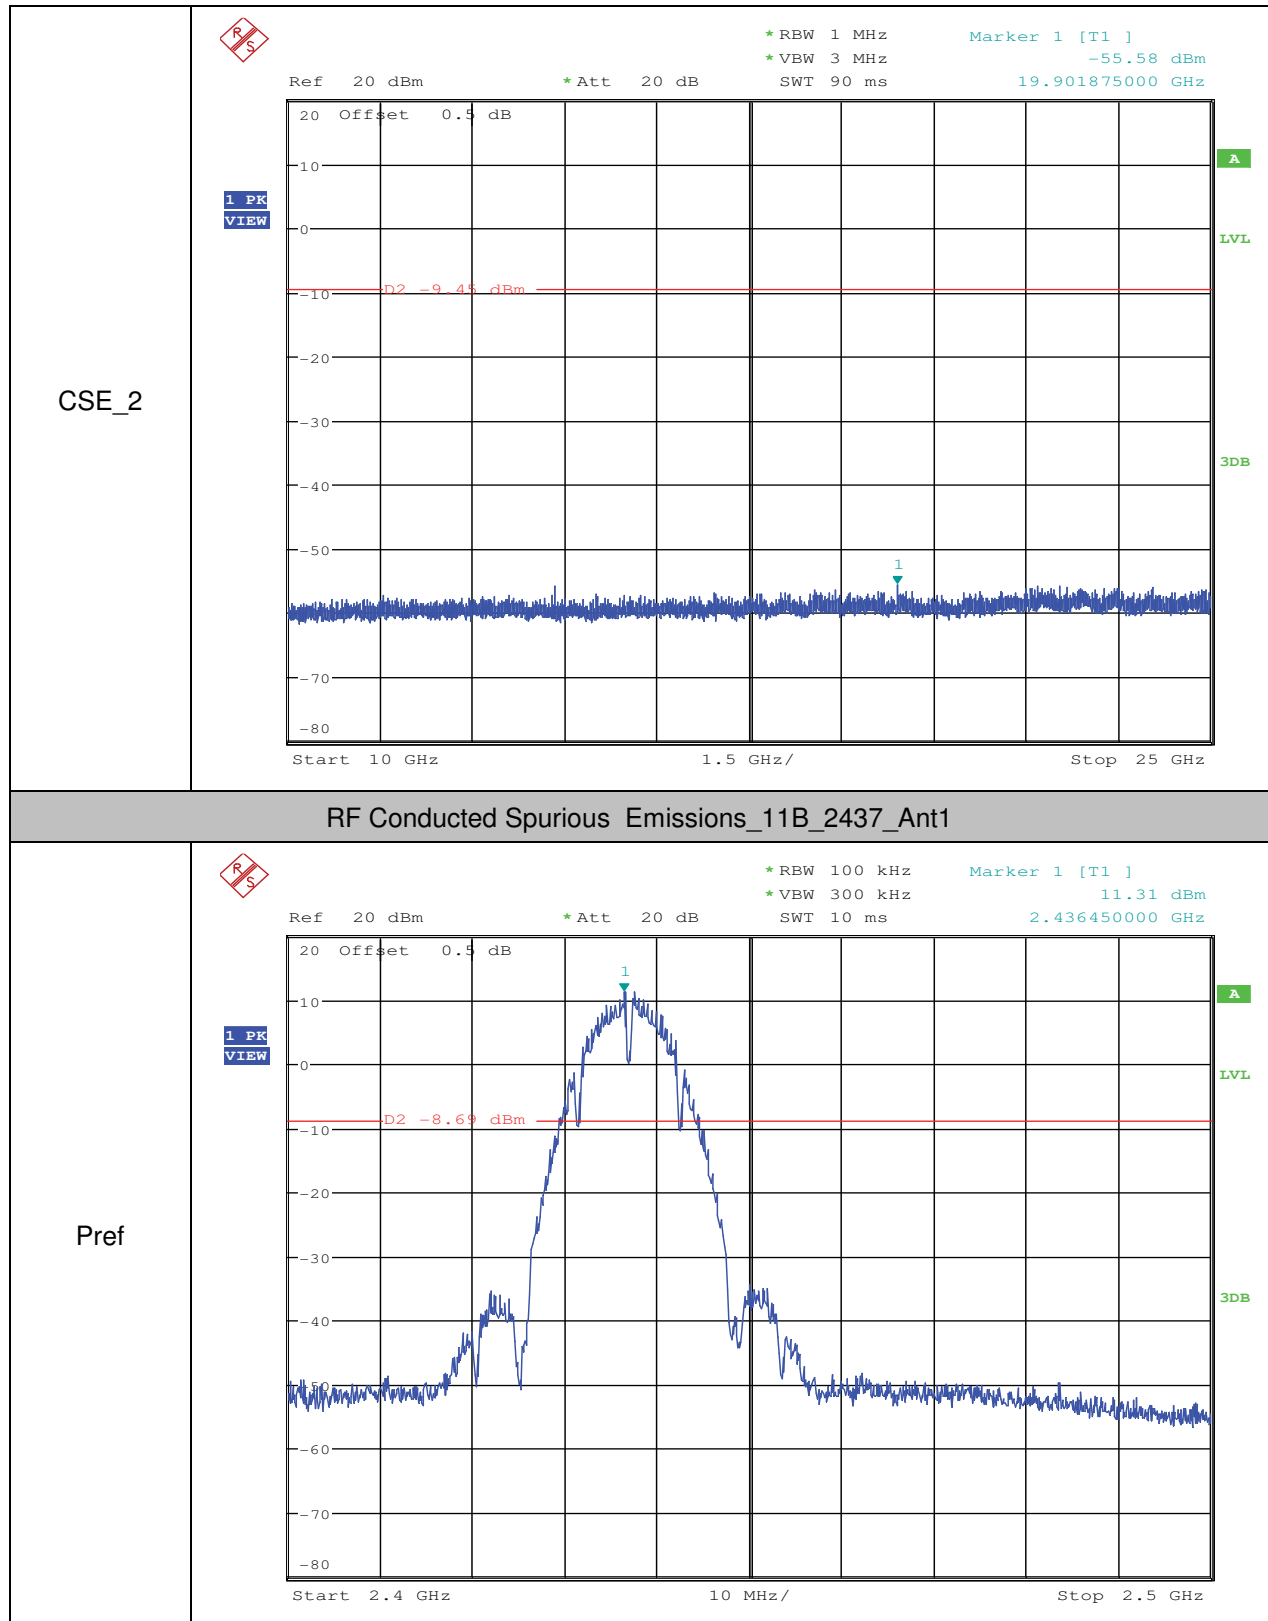

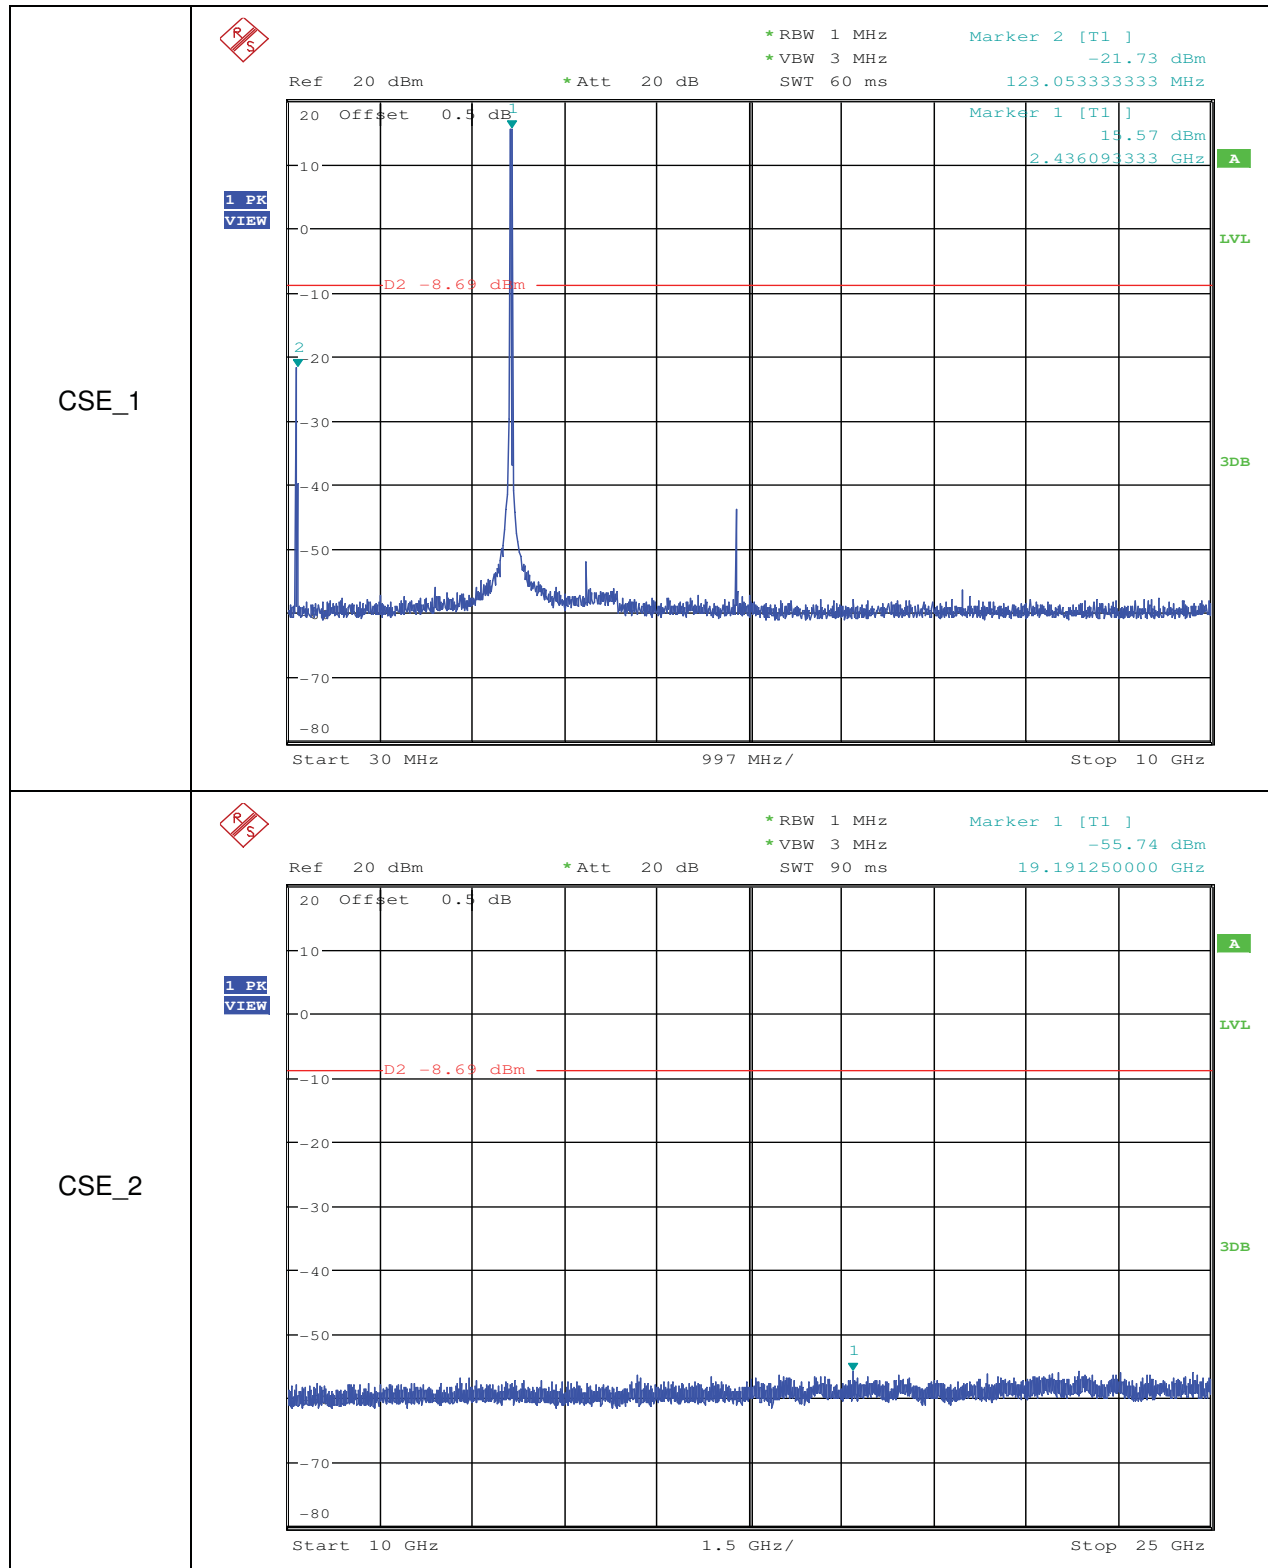





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM181000924401

Page: 332 of 346

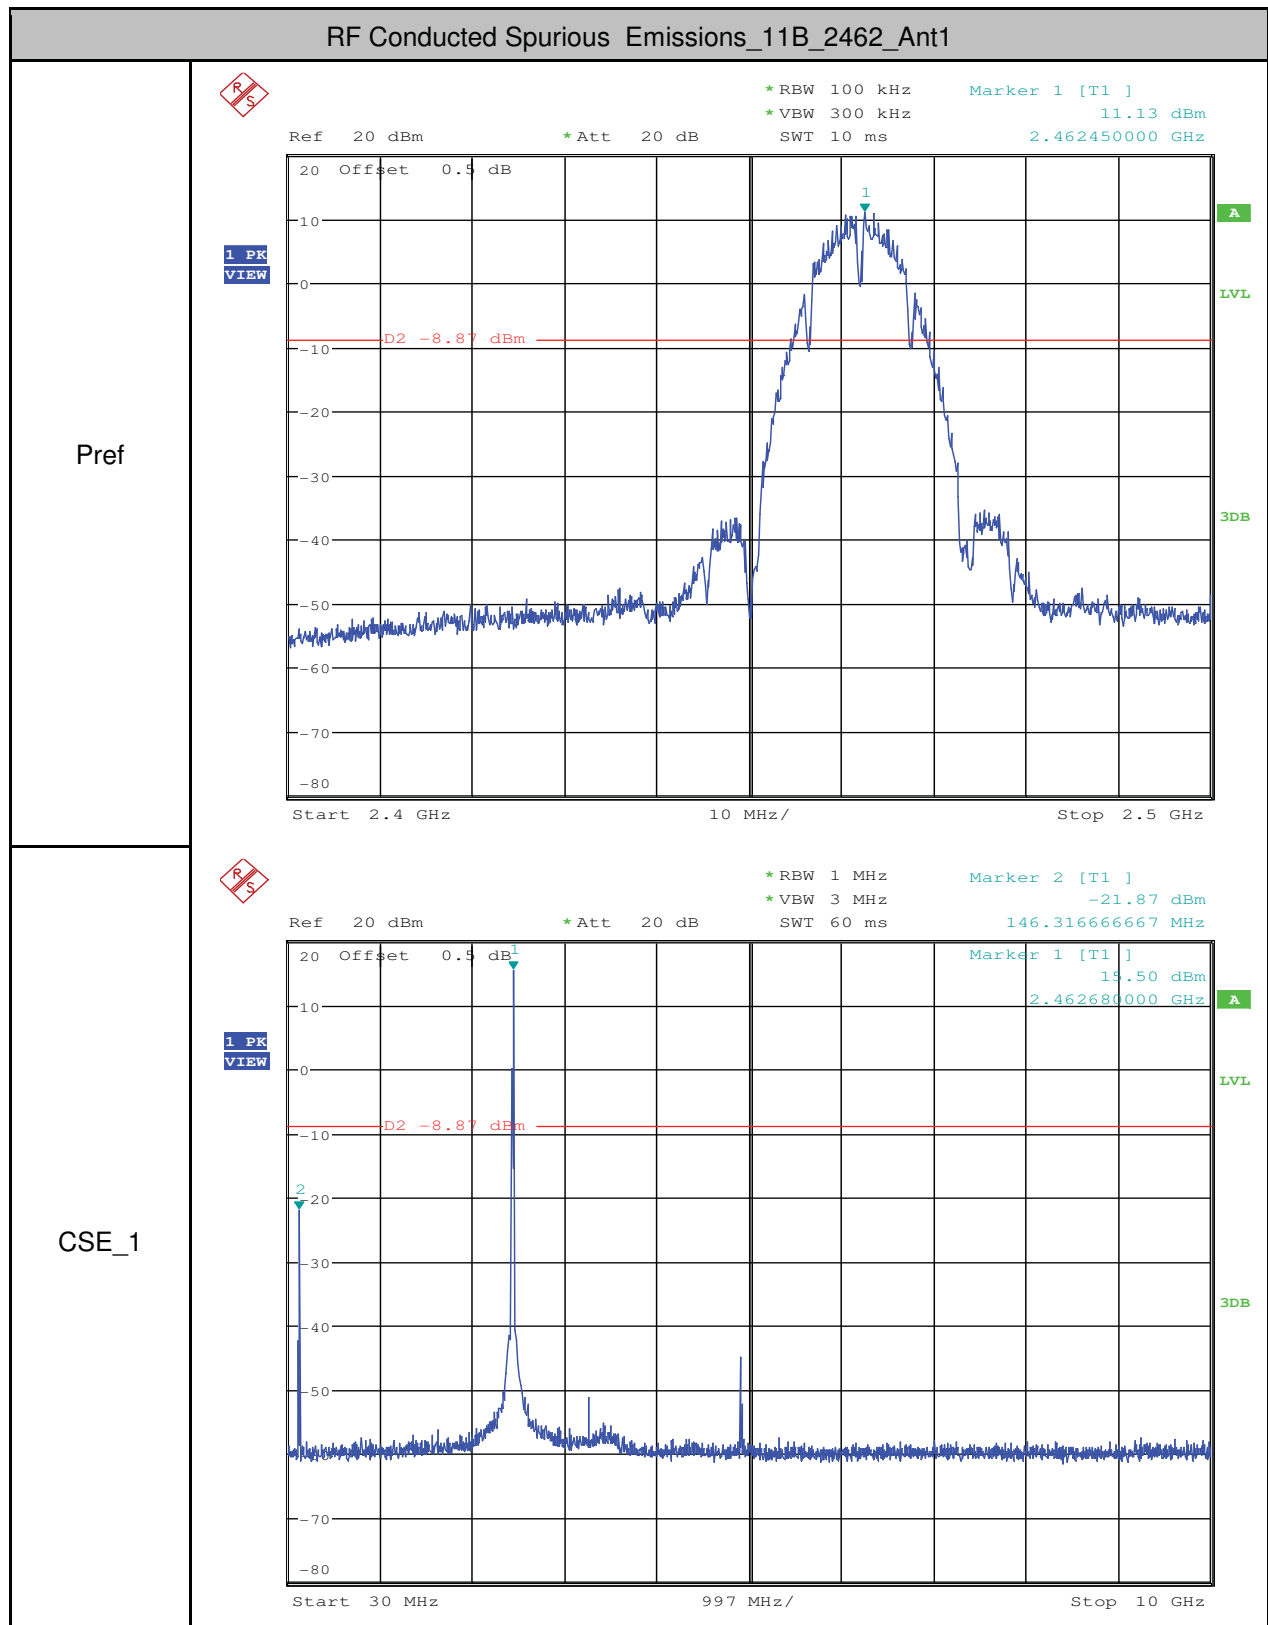

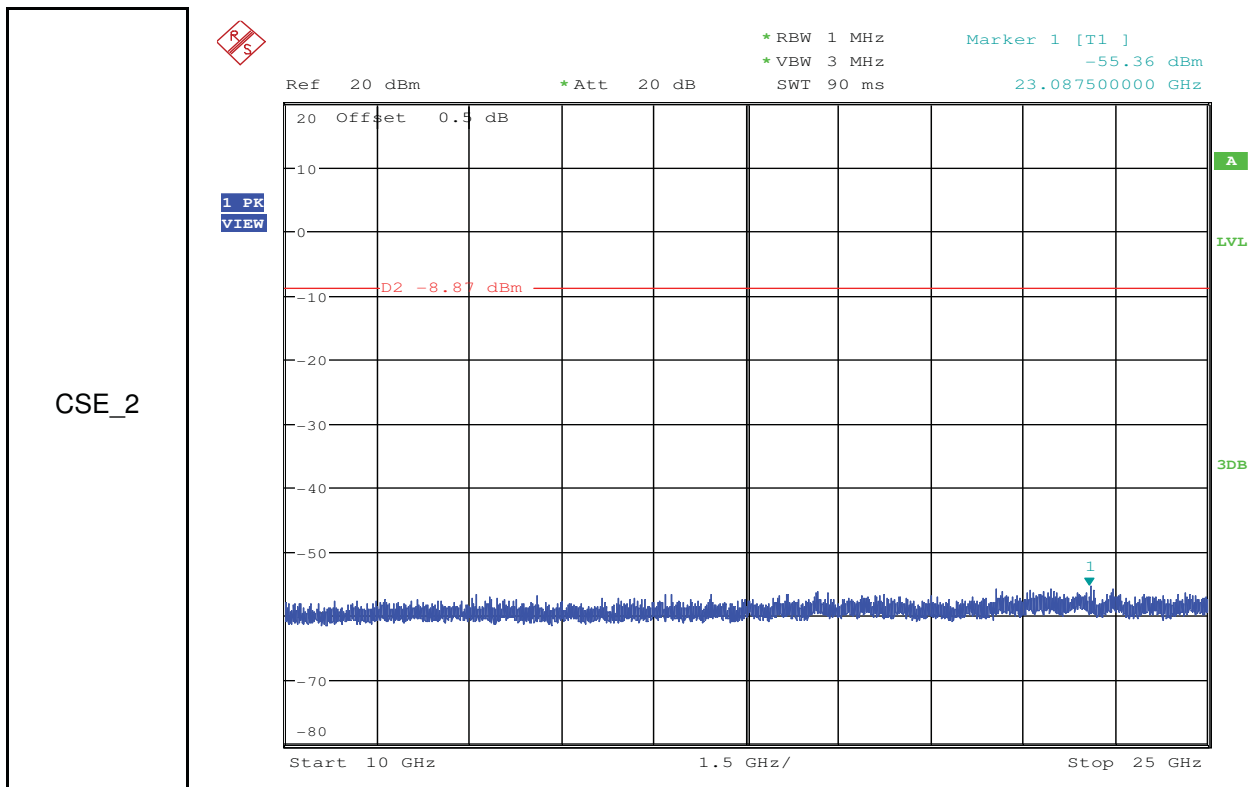

RF Conducted Spurious Emissions_11G_2412_Ant1

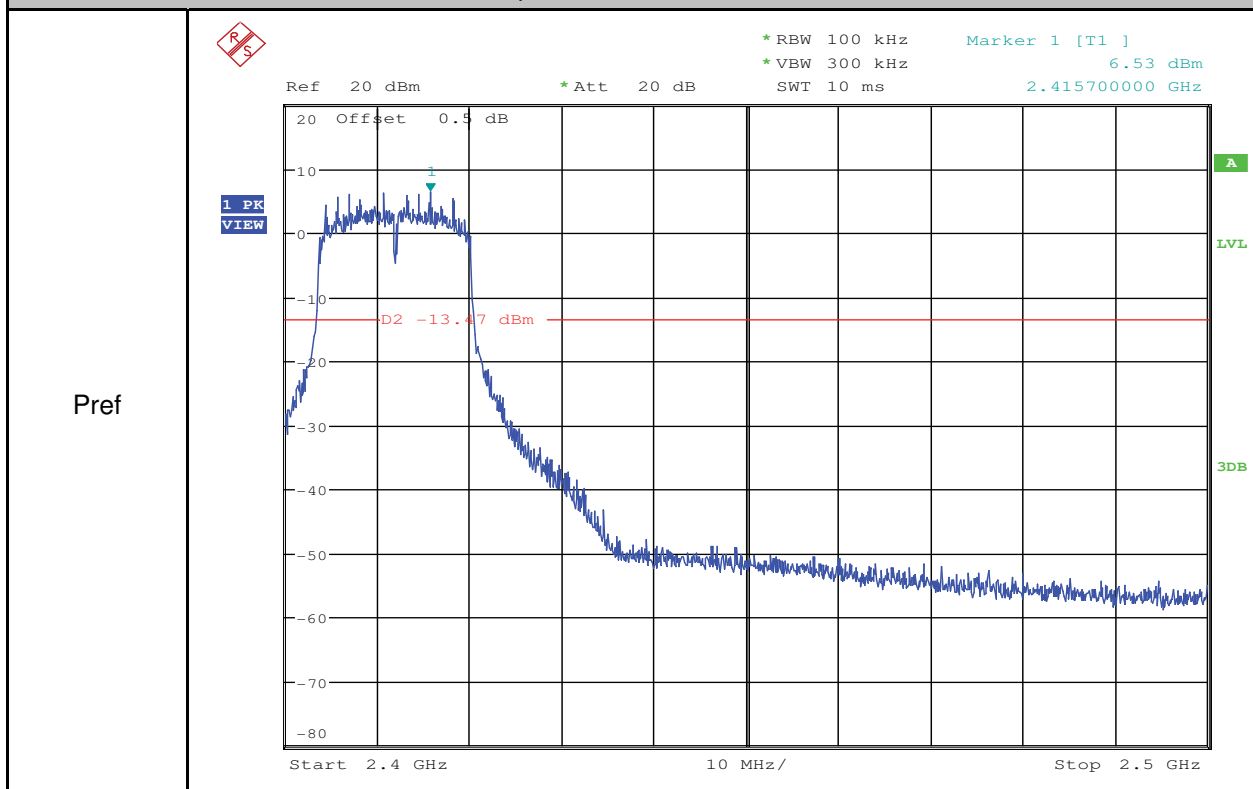




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM181000924401


Page: 334 of 346


CSE_1

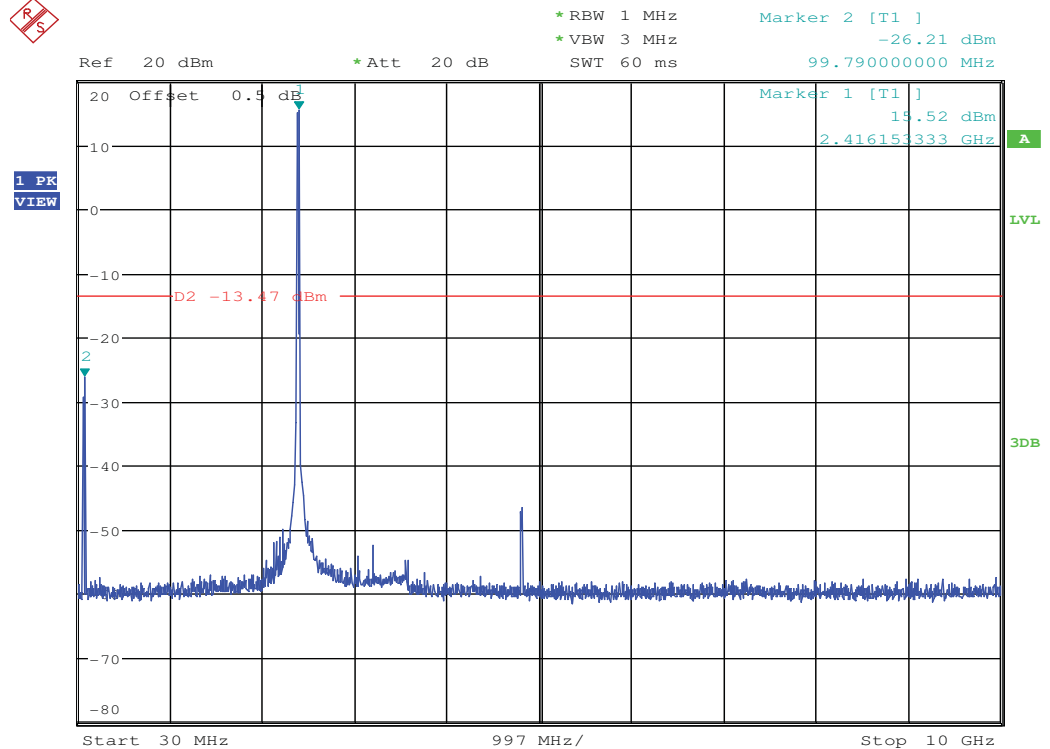


CSE_2

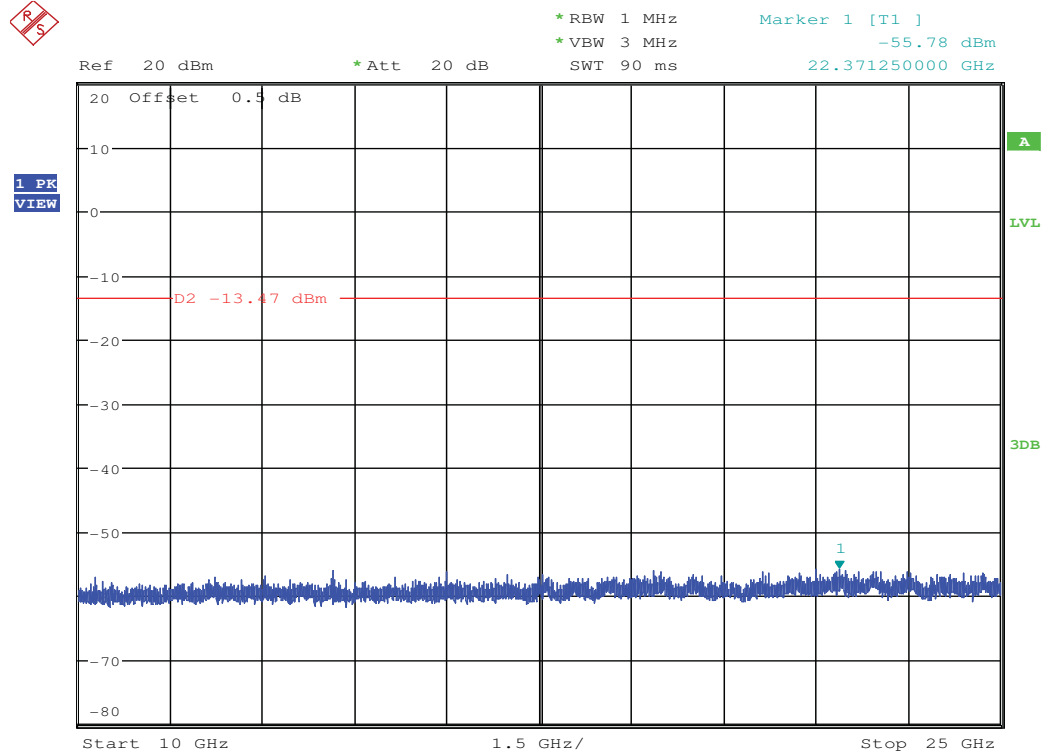

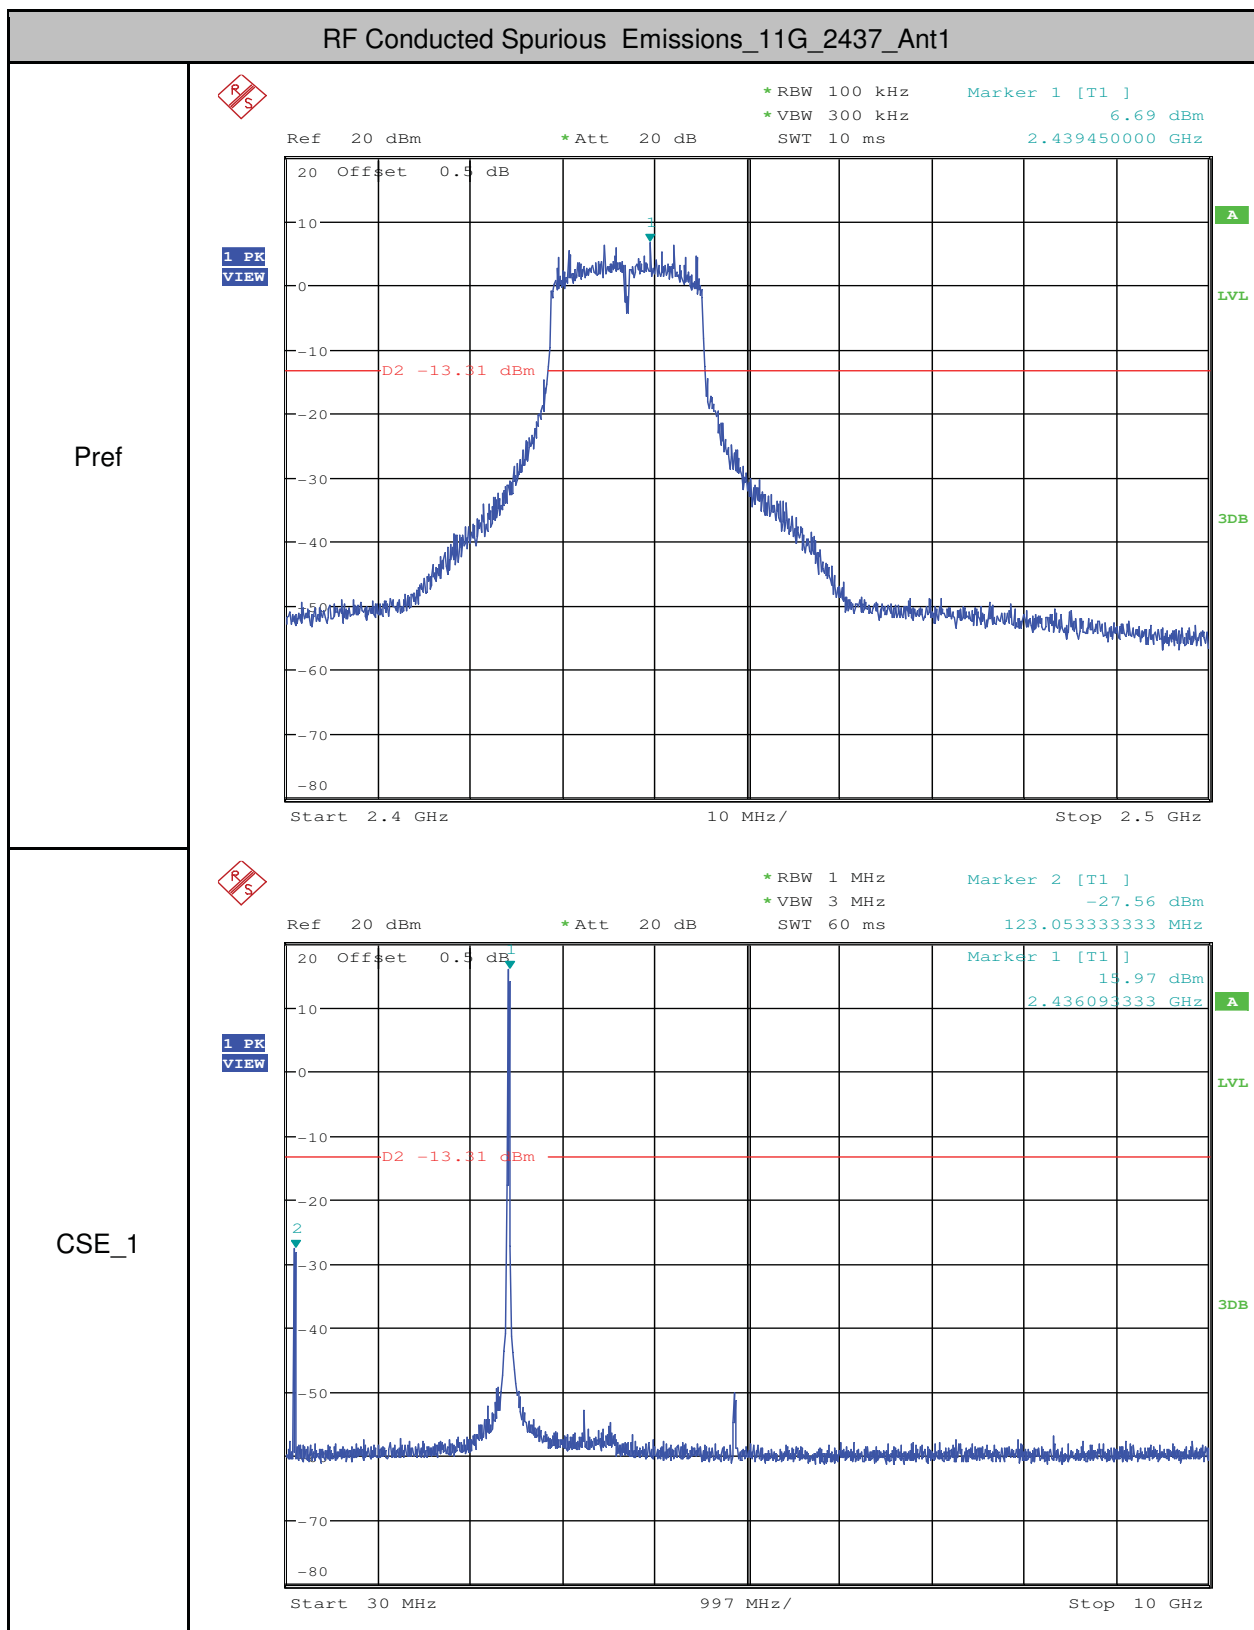

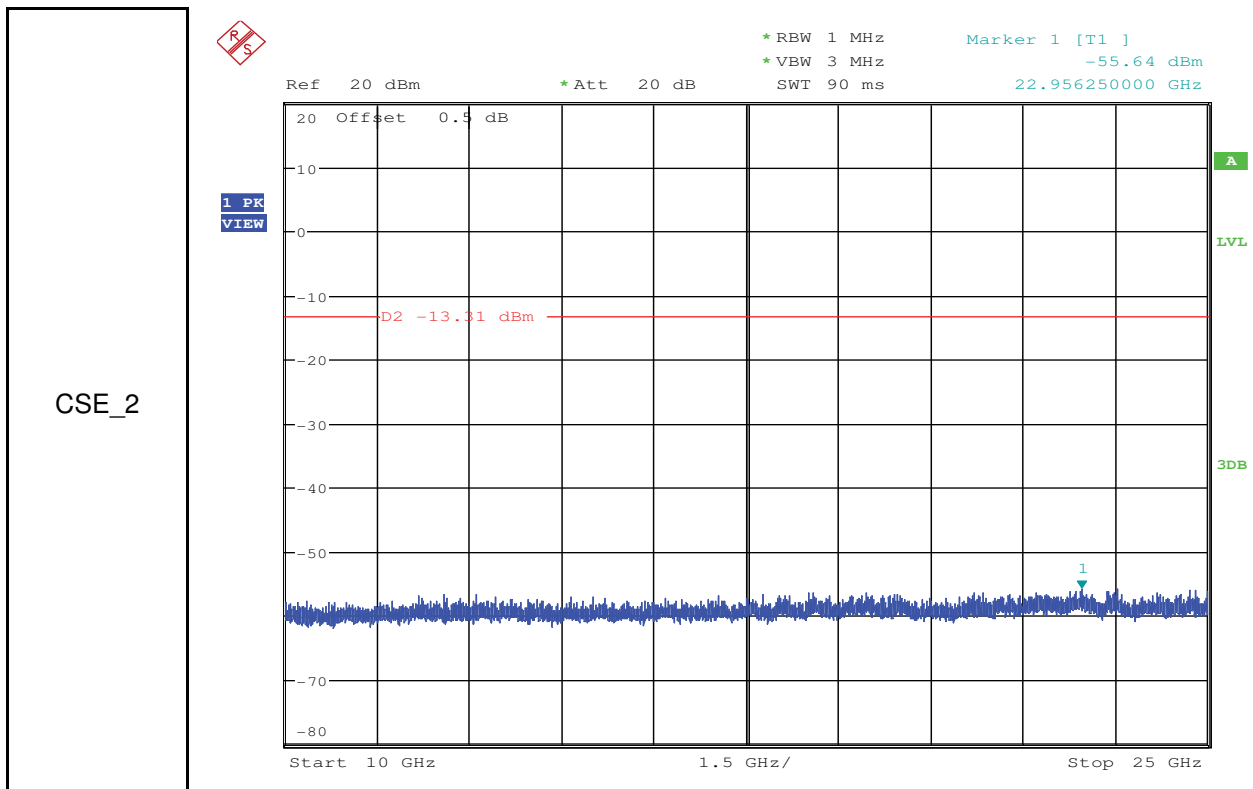


RF Conducted Spurious Emissions_11G_2462_Ant1

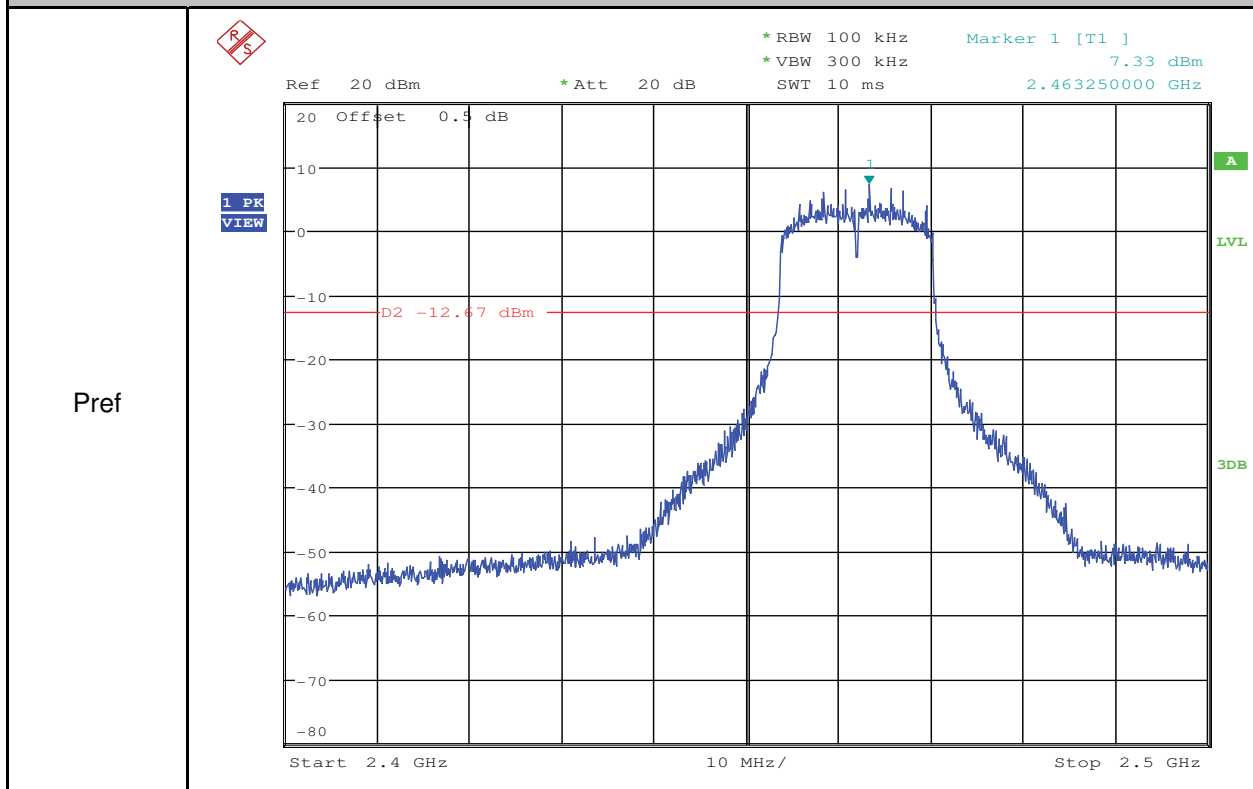





CSE_1

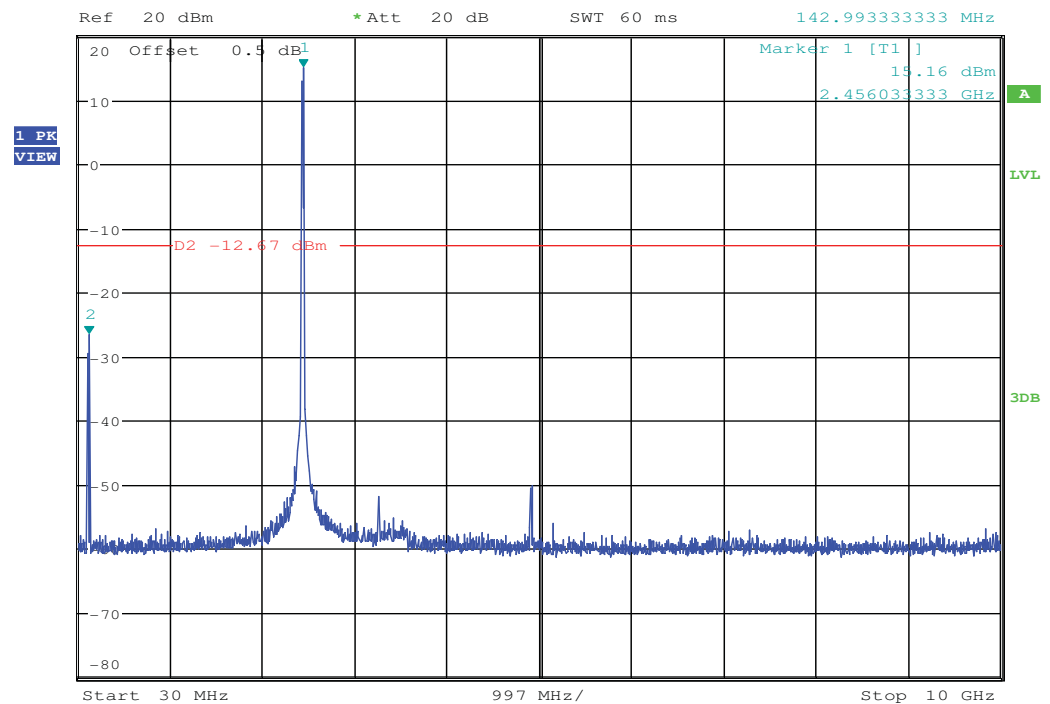

CSE_2

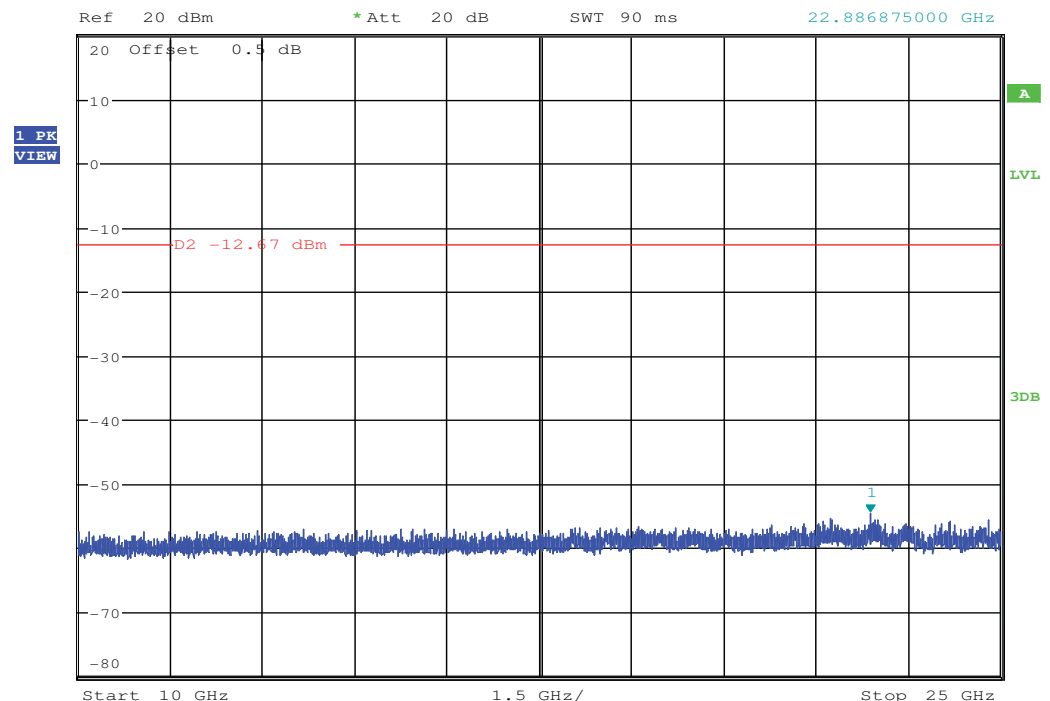

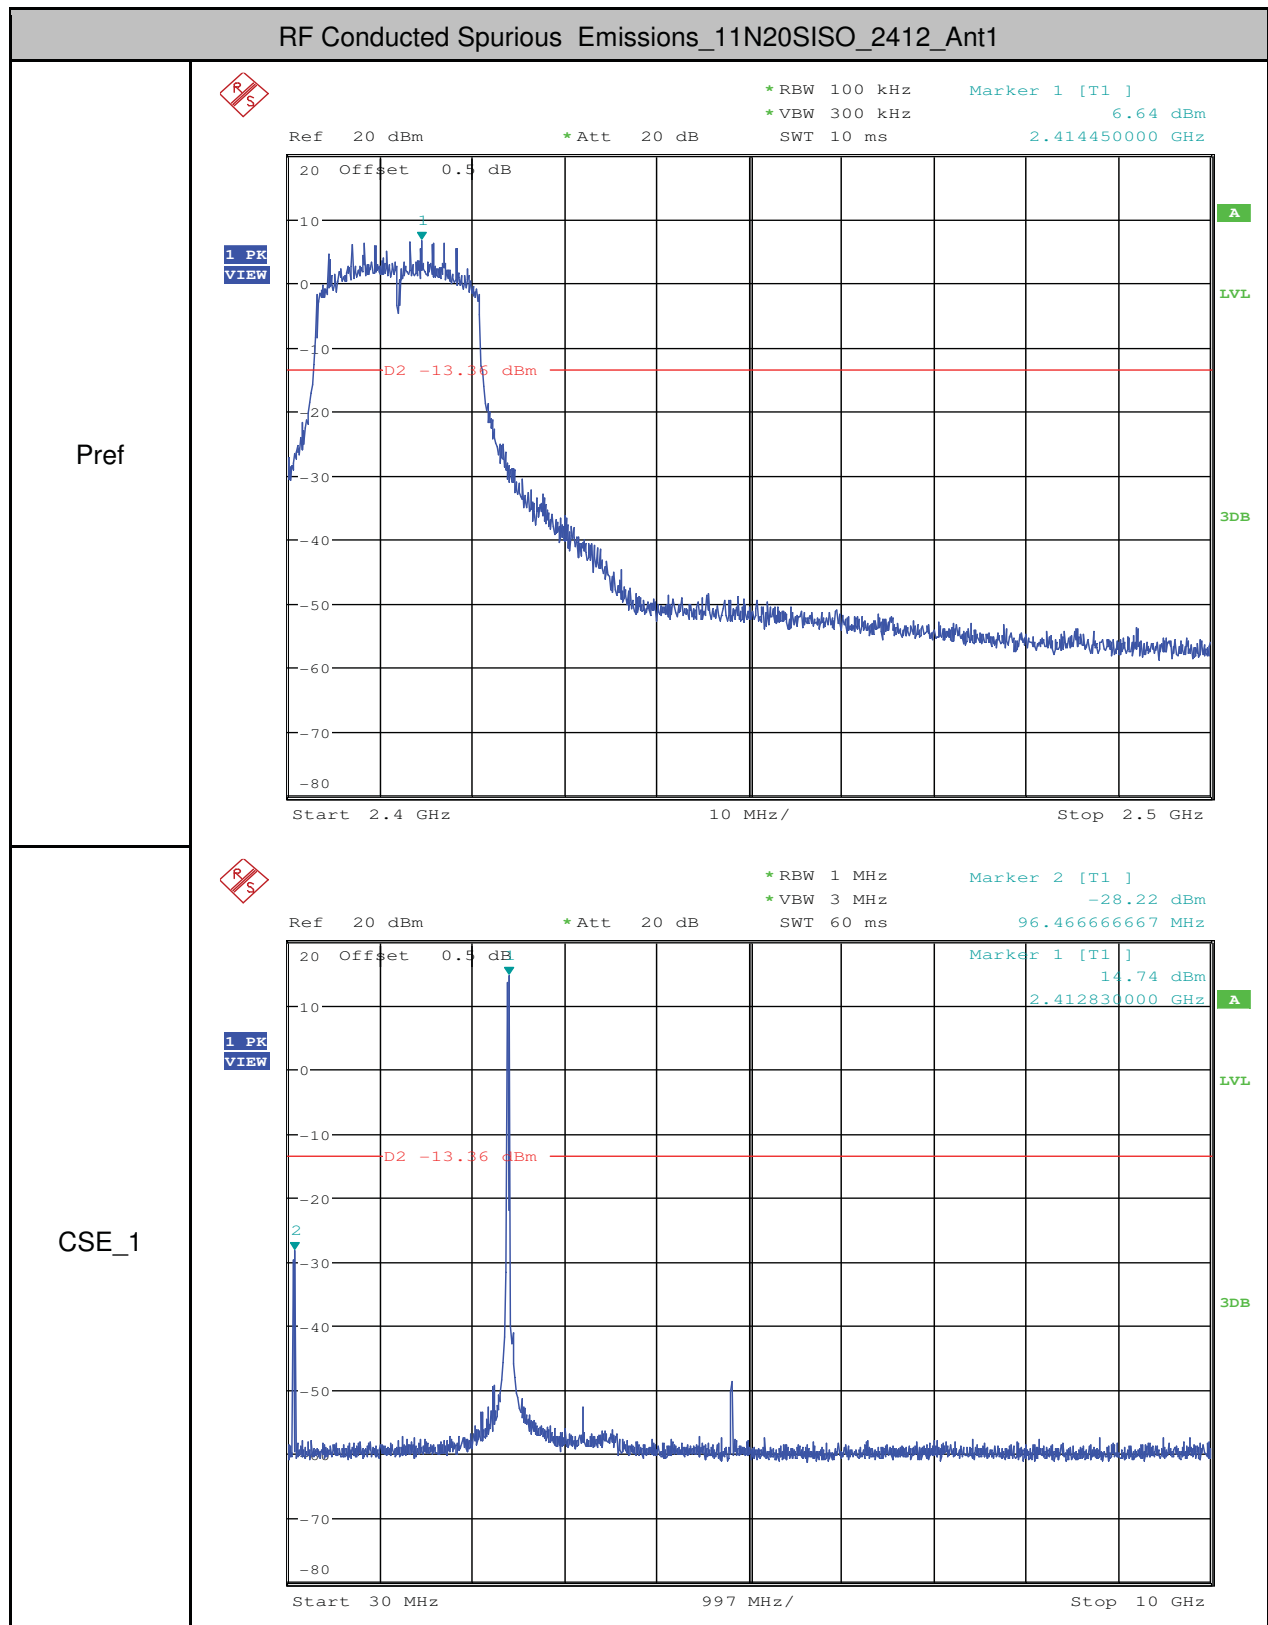




CSE_2



1 PK
VIEW

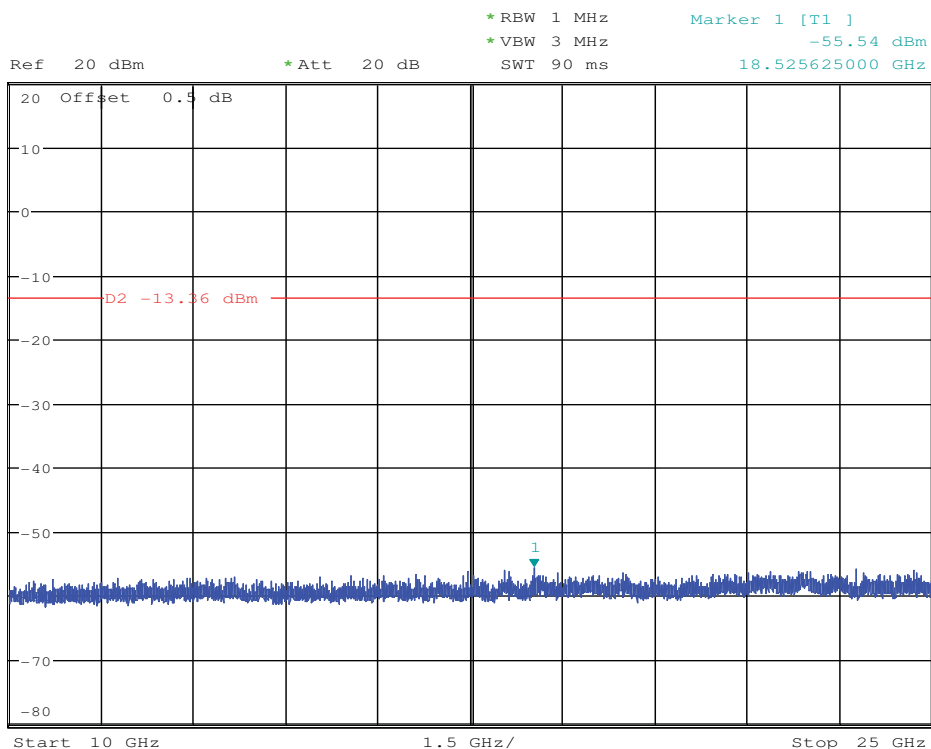


RF Conducted Spurious Emissions_11N20SISO_2437_Ant1

Pref





1 PK
VIEW

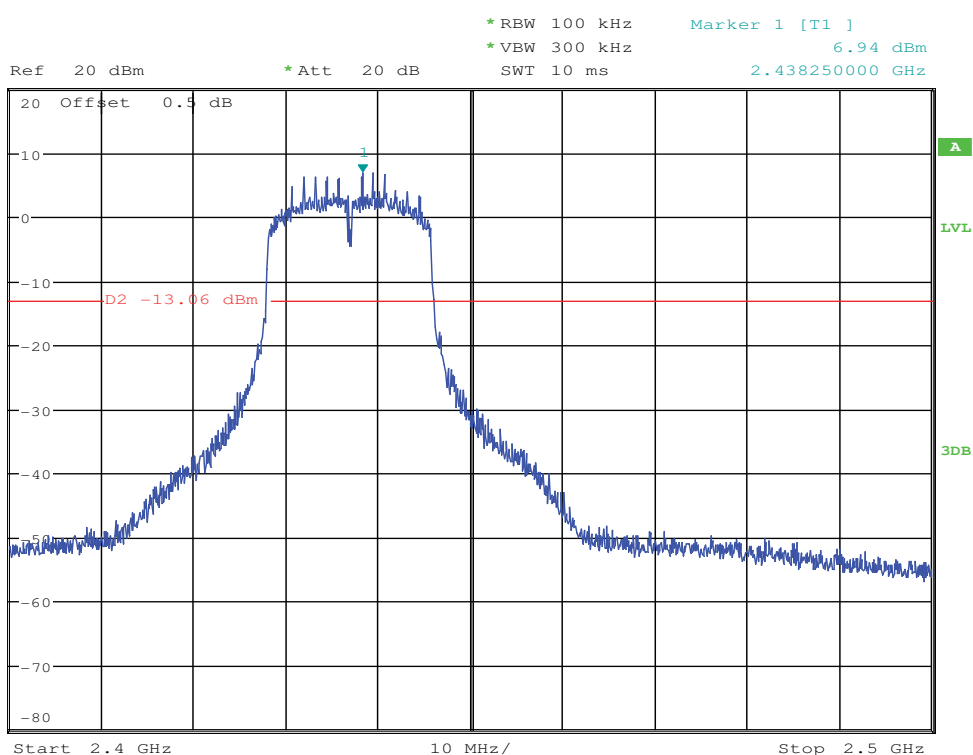




CSE_1

CSE_2

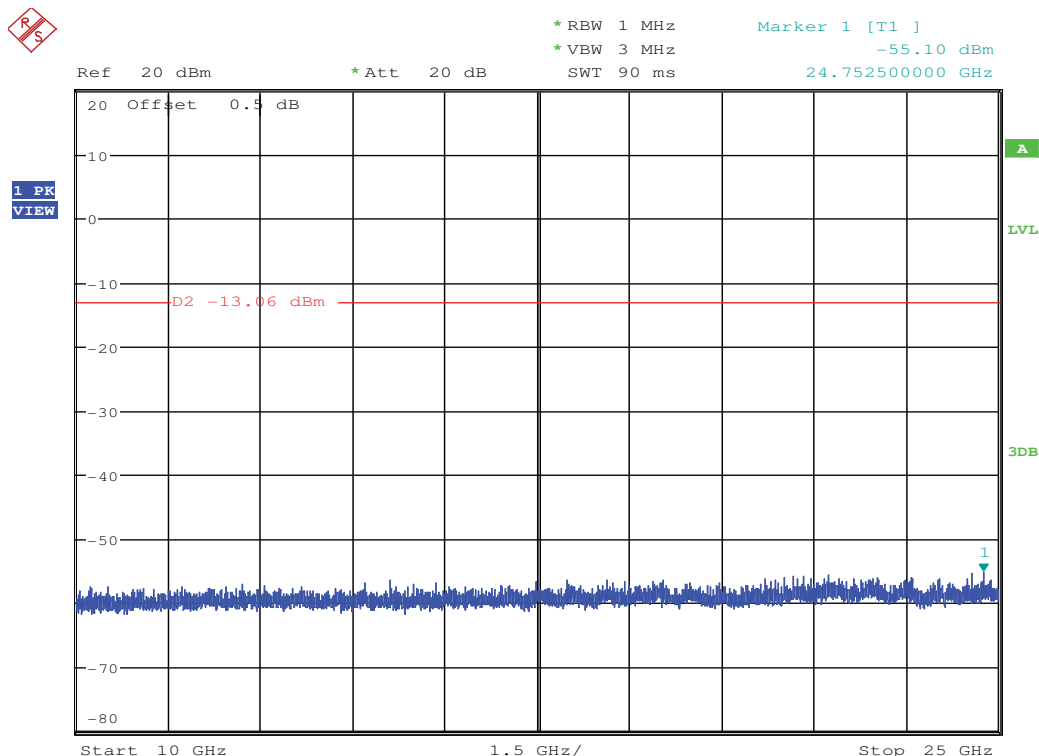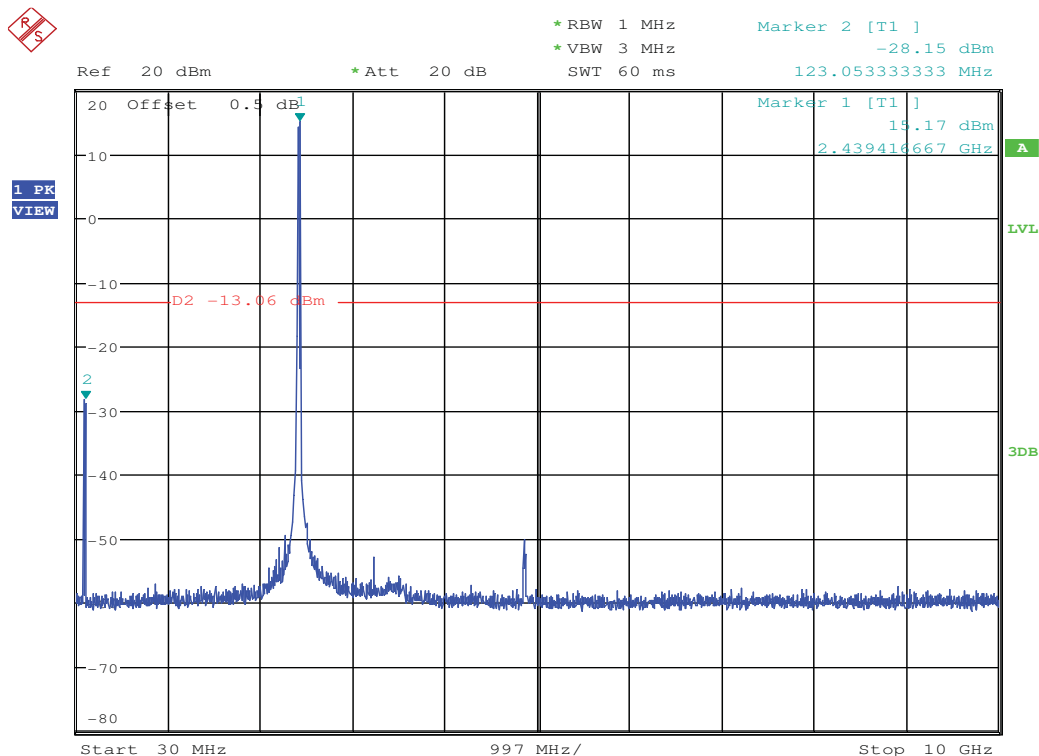

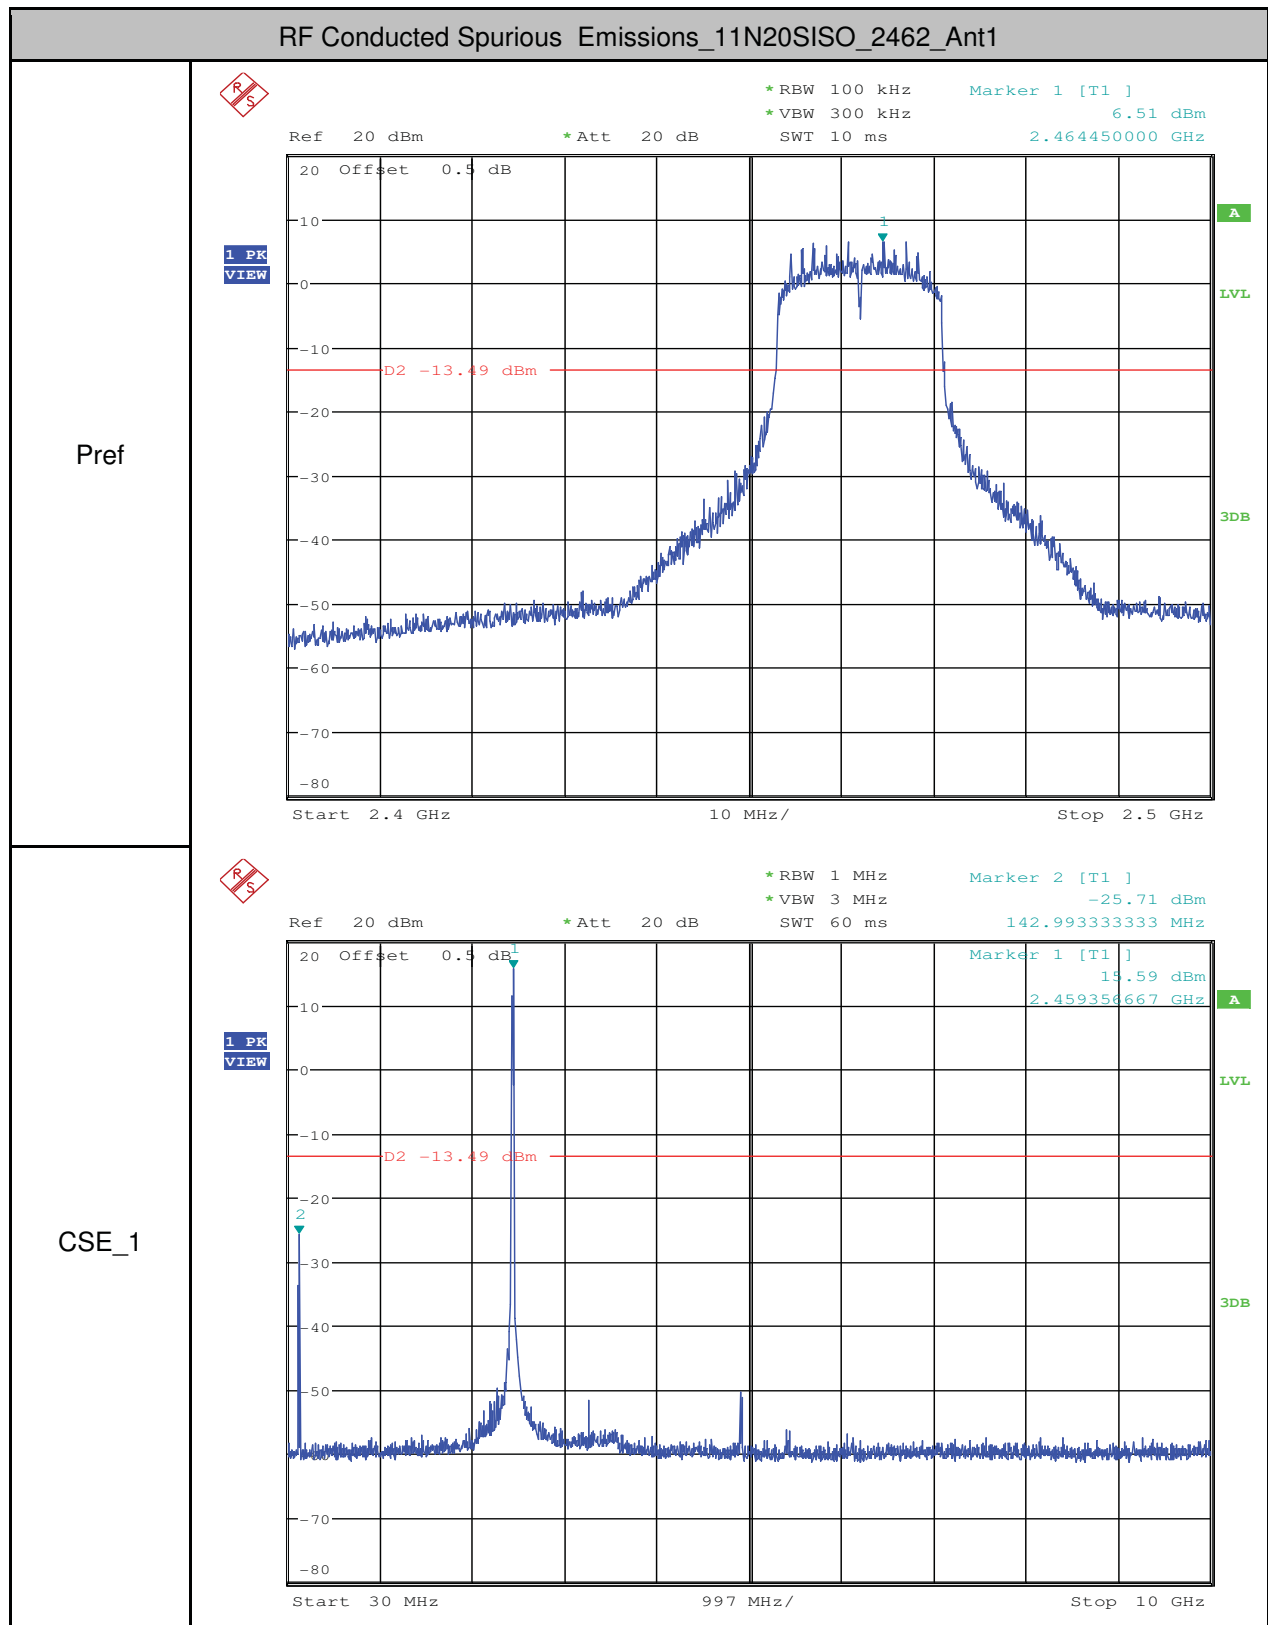




CSE_2



1 PK
VIEW

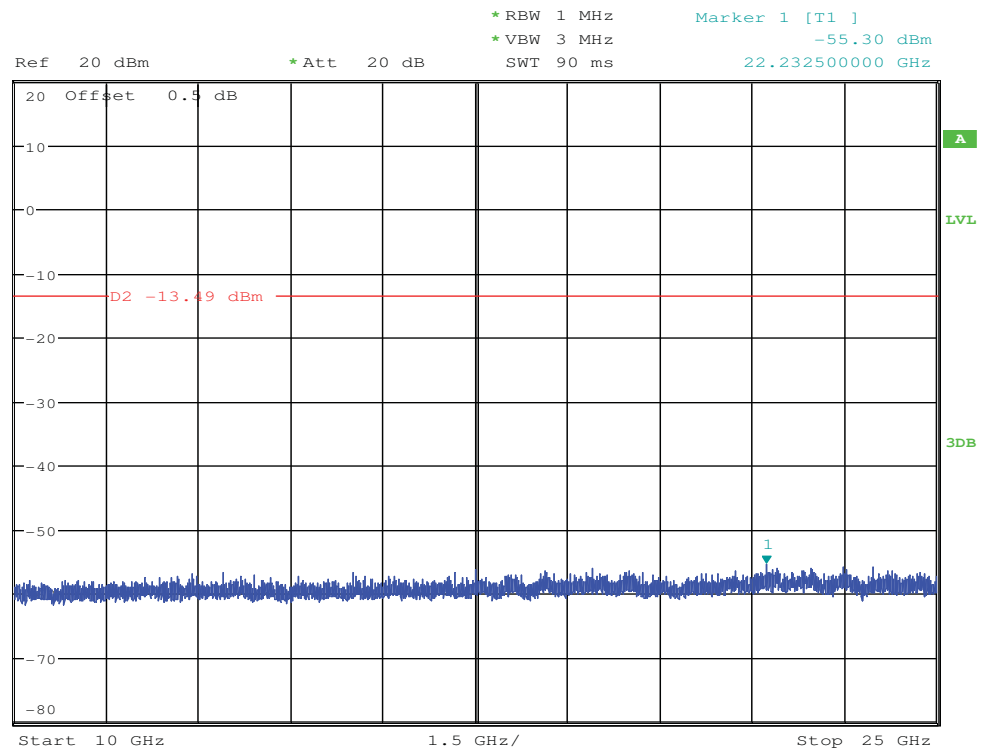


RF Conducted Spurious Emissions_11N40SISO_2422_Ant1

Pref




1 PK
VIEW

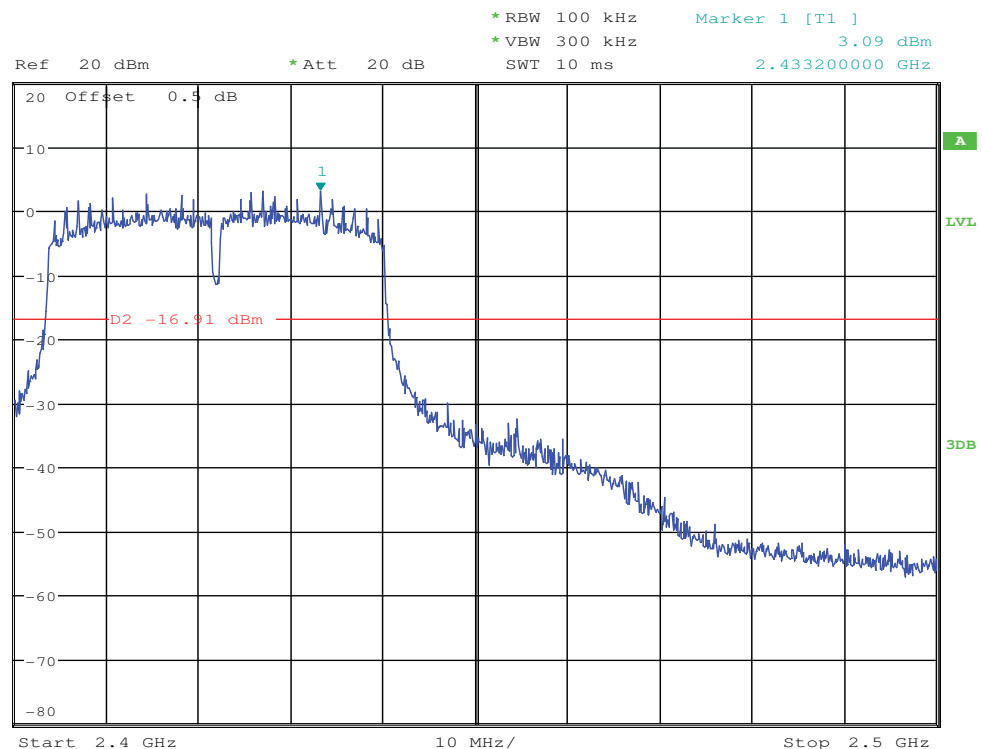






CSE_1

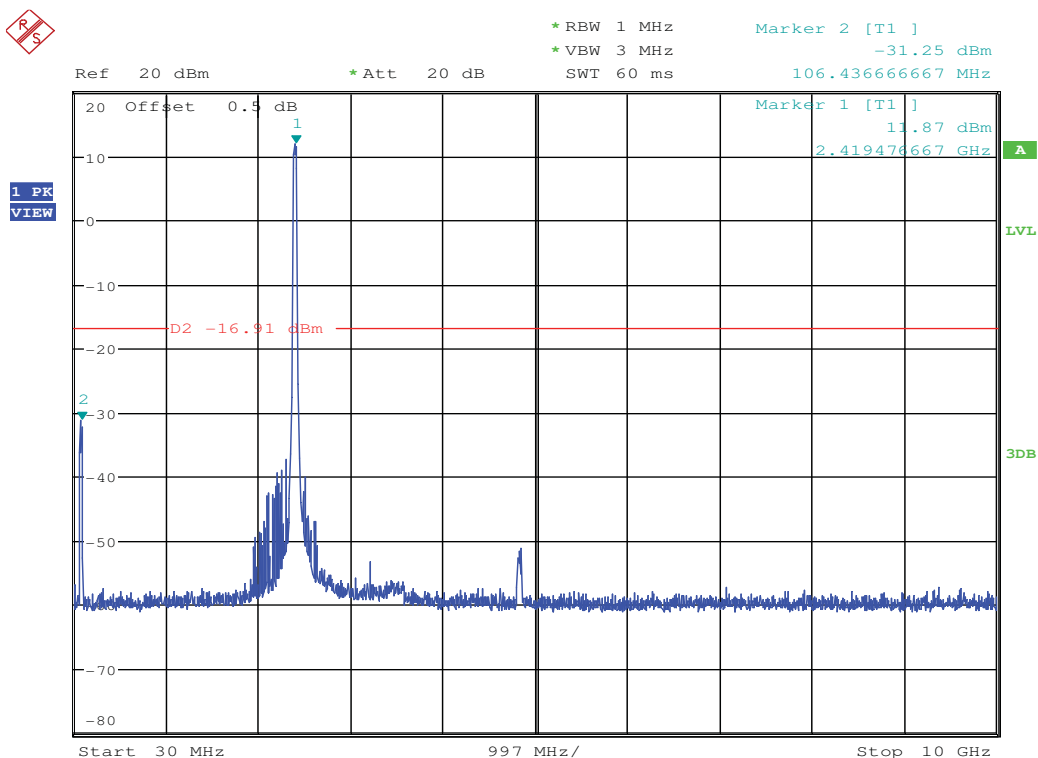


CSE_2

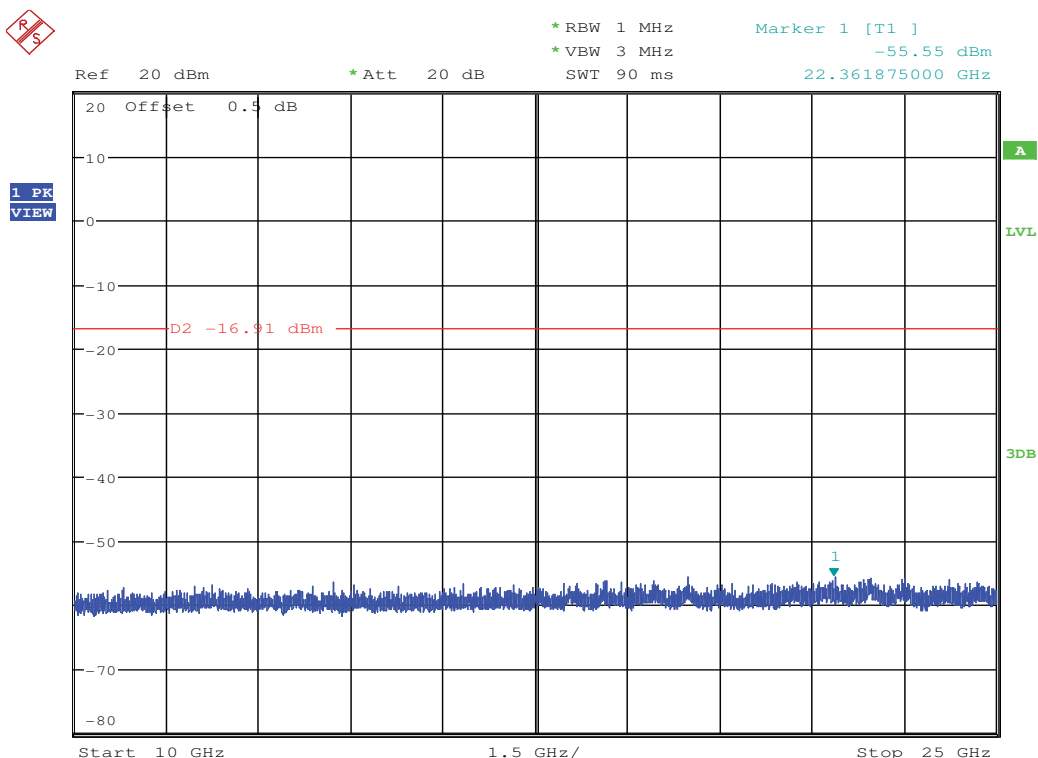


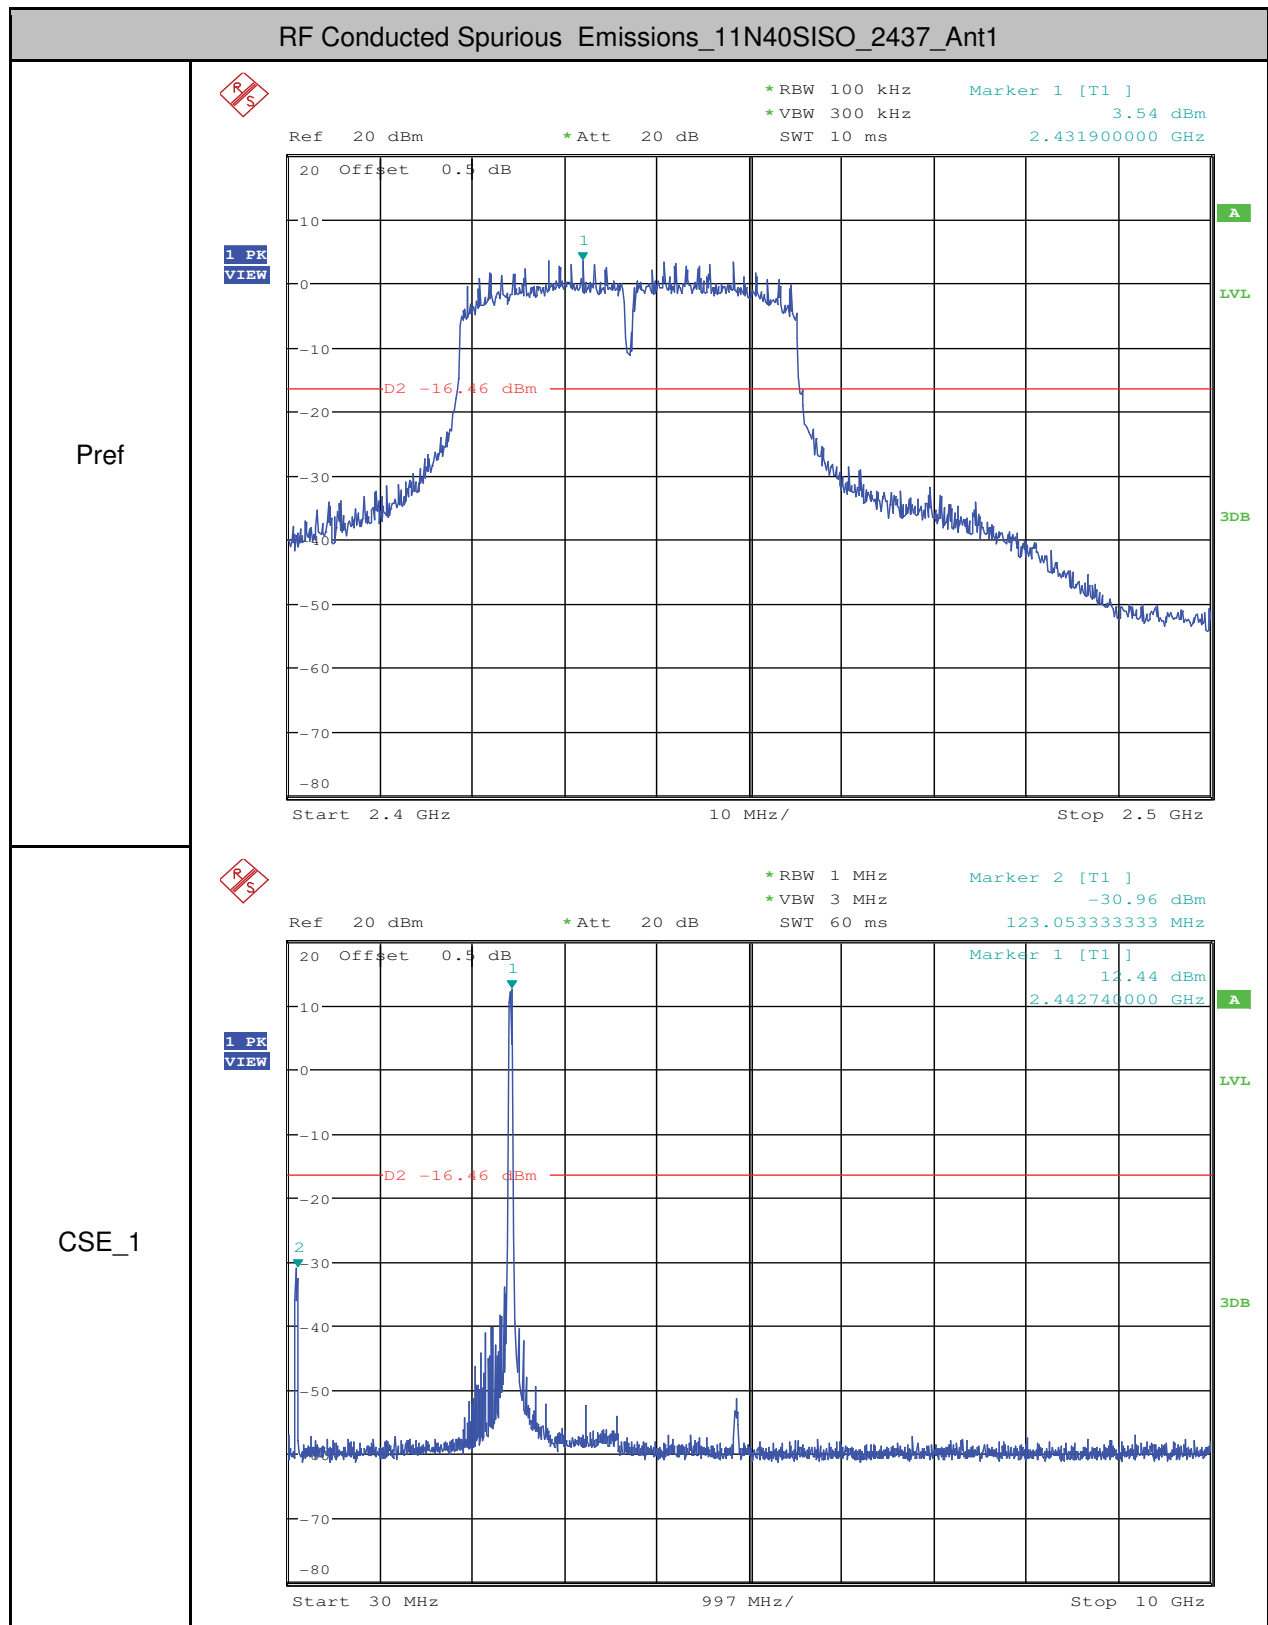

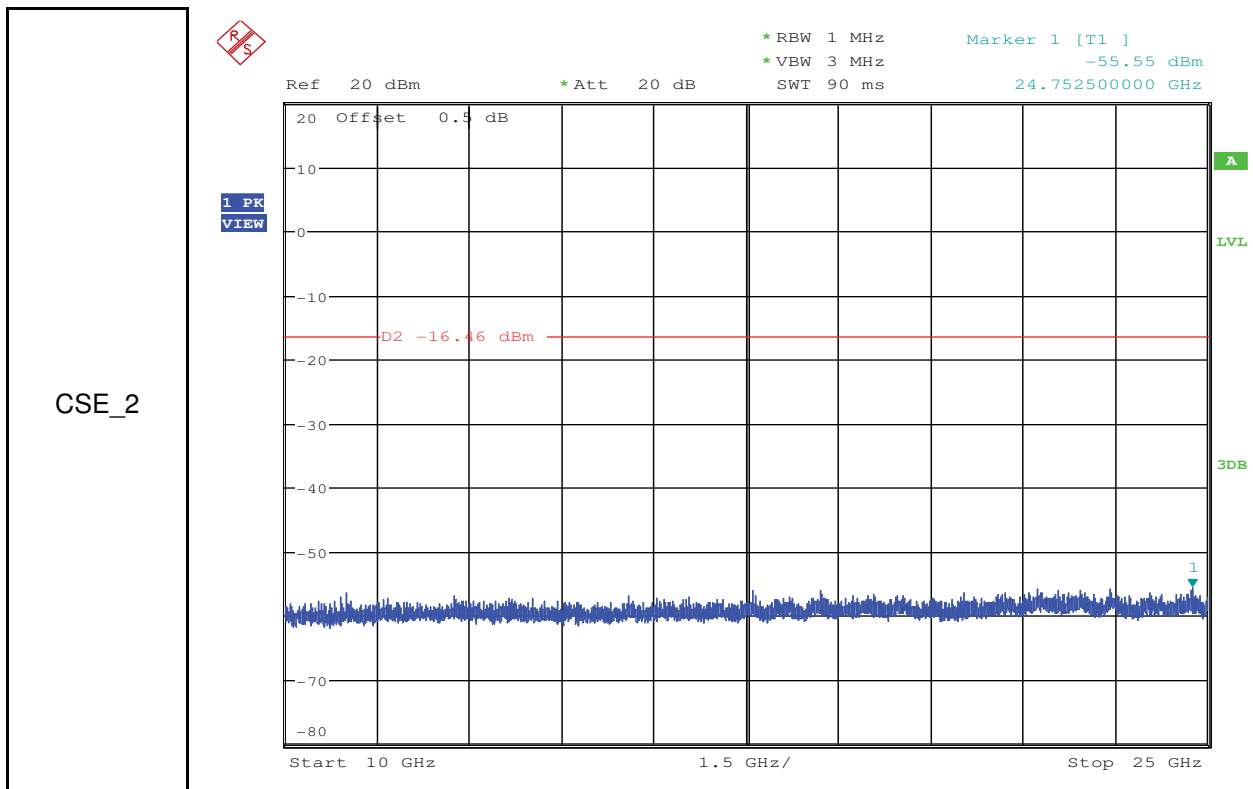

RF Conducted Spurious Emissions_11N40SISO_2452_Ant1

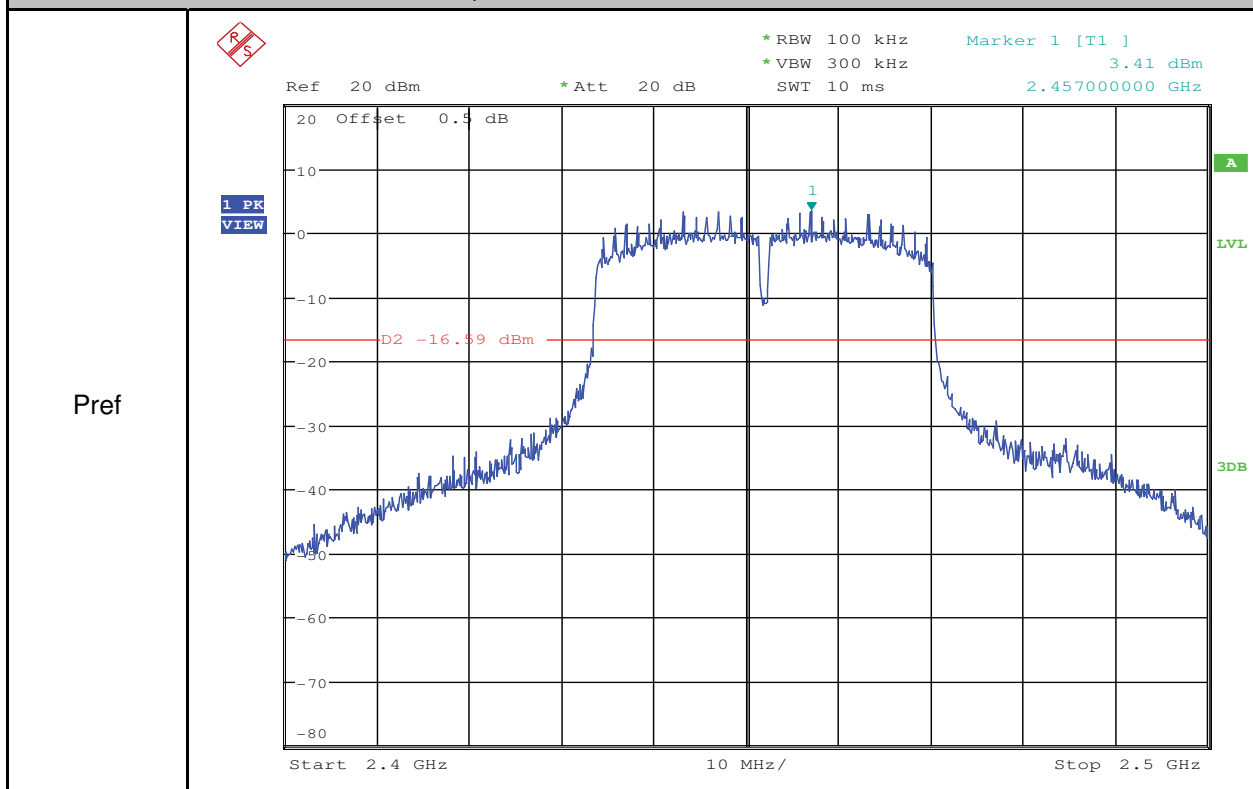

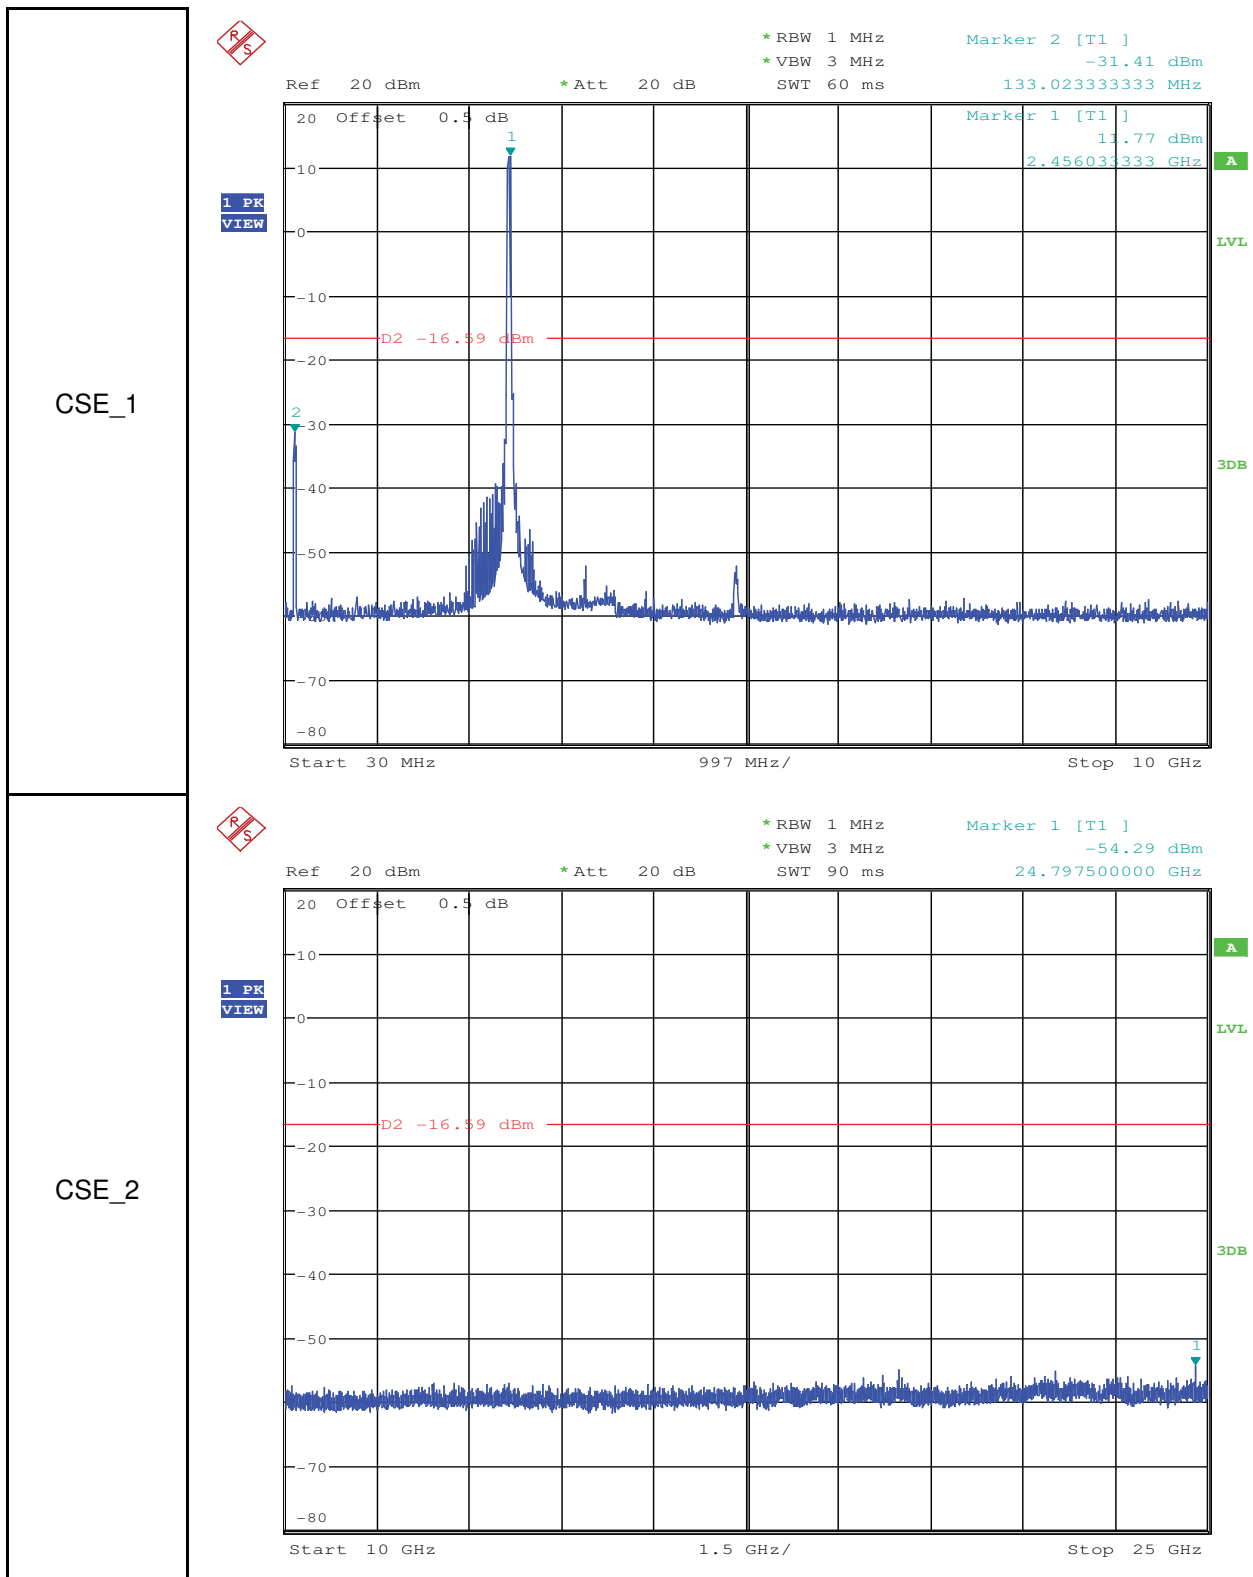

- End of the Report -