



深圳市博格斯通信技术有限公司

shenzhen bogesi communication technology co.,ltd

Use range:

Applicable to Shenzhen Fibocom Wireless Co., Ltd. 5G antenna solution.

Electrical Specifications:

Electrical Specifications	600-1000MHz;1400-6000MHz	Material	ABS
input resistance	50 Ω	Plastic material	Rubber cap: ABS
Standing wave ratio	≤ 3.0		Adapter 1: ABS
Polarization mode	Linear polarization		Adapter 2: ABS
Operating temperature	- 40 $^{\circ}\text{C}$ ~ + 65 $^{\circ}\text{C}$	RF cable specifications	RG-178
Storage temperature	- 40 $^{\circ}\text{C}$ ~ + 80 $^{\circ}\text{C}$	Connector specifications	SMA Male J
Connector torque test	200 ~ 1000 g.cm	Joint tension test	SMA ≥ 3 Kg
Gain	600-1000MHz:9.44dBi	Connector torque test	200 ~ 1000 g.cm
	1400-1690MHz:9.51dBi		
	1700-2090MHz:7.5dBi		
	2100-2690MHz:7.5dBi		
	3350-3570MHz:2.56dBi		
	3580-3990MHz:-0.13dBi		
	4000-4990MHz:-4.21dBi		
	5000-5490MHz:-0.71dBi		
	5500-6000MHz:3.32dBi		

Test conditions and methods:

Test conditions and instruments	Test Methods	Test Results
---------------------------------	--------------	--------------



深圳市博格斯通信技术有限公司
shenzhen bogesi communication technology co.,ltd

Test data:

Summary	Frequency (MHz)	Directivity (dBi)	Avg Gain(dBi)	Efficiency (%)	Peak Gain(dBi)
BGS-036(700-1000)_30du	600	3.15	-4.48	35.61	7.63
	610	3.17	-4.48	35.64	7.65
	620	3.31	-4.24	37.70	7.55
	630	3.32	-4.31	37.10	7.63
	640	3.70	-4.27	37.40	7.97
	650	3.35	-4.53	35.20	7.88
	660	3.35	-4.46	35.80	7.81
	670	3.46	-4.19	38.10	7.65
	680	3.41	-4.15	38.50	7.56
	690	3.68	-4.29	37.20	7.97
	700	3.76	-4.12	38.75	6.88
	710	3.91	-4.08	39.04	6.99
	720	4.33	-3.87	41.02	7.2
	730	4.49	-3.71	42.52	7.2
	740	4.44	-3.75	42.14	7.19
	750	4.27	-3.91	40.62	7.18
	760	4.23	-3.93	40.44	7.16
	770	4.42	-3.90	40.76	7.12
	780	5.01	-3.65	43.11	6.66
	790	5.32	-3.34	46.32	8.66
	800	5.60	-3.12	48.71	8.72
	810	5.83	-2.97	50.49	8.91
	820	6.09	-2.82	52.19	7.31
	830	6.21	-2.65	54.28	7.26
	840	6.56	-2.35	58.15	7.41
	850	6.95	-1.91	64.47	7.91
	860	6.40	-1.46	71.43	7.36
	870	7.73	-1.13	77.15	8.86
	880	7.89	-1.02	79.03	7.91
	890	7.69	-1.21	75.66	7.9

Summary	Frequency (MHz)	Directivity (dBi)	Avg Gain(dBi)	Efficiency (%)	Peak Gain(dBi)
	900	7.35	-1.58	69.49	7.93
	910	7.05	-1.83	65.60	7.88
	920	6.84	-2.10	61.70	7.94
	930	6.66	-2.33	58.51	7.99
	940	6.47	-2.63	54.60	9.1
	950	5.95	-3.17	48.21	9.12
	960	5.11	-4.02	39.59	9.13
	970	4.03	-5.11	30.86	9.14
	980	3.07	-6.14	24.34	9.21
	990	2.26	-7.09	19.55	9.35
	1000	1.89	-7.55	17.57	9.44
BGS-036(1400-1690)_30du	1400	8.62	-0.82	82.77	9.44
	1410	8.62	-0.88	81.60	9.5
	1420	8.40	-0.92	80.85	9.32
	1430	8.36	-0.76	83.95	9.12
	1440	8.94	-0.57	87.70	9.51
	1450	8.89	-0.49	89.24	9.38
	1460	8.61	-0.51	88.83	9.12
	1470	7.82	-0.74	84.33	8.56
	1480	7.35	-0.89	81.41	8.24
	1490	7.35	-0.98	79.86	8.33
	1500	7.27	-0.85	82.17	8.12
	1510	6.80	-0.76	84.04	7.56
	1520	6.70	-0.73	84.47	7.43
	1530	6.51	-0.71	84.83	7.22
	1540	6.22	-1.01	79.19	7.23
	1550	5.67	-1.21	75.68	6.88
	1560	5.19	-1.33	73.68	6.52
	1570	5.06	-1.28	74.45	6.34
	1580	5.12	-1.10	77.67	6.22
	1590	5.27	-0.96	80.24	6.23
	1600	5.55	-0.99	79.62	6.54
	1610	4.64	-1.14	76.92	5.78
	1620	4.67	-1.32	73.76	5.99

Summary	Frequency (MHz)	Directivity (dBi)	Avg Gain(dBi)	Efficiency (%)	Peak Gain(dBi)
	1630	4.25	-1.53	70.25	5.78
	1640	4.20	-1.56	69.82	5.76
	1650	3.67	-1.43	71.93	5.1
	1660	3.86	-1.27	74.63	5.13
	1670	3.88	-1.10	77.58	4.98
	1680	3.47	-1.09	77.74	4.56
	1690	3.39	-1.16	76.54	4.55
BGS-036(1700-2090)_30du	1700	3.52	-0.98	79.71	5.5
	1710	3.18	-1.13	77.05	5.31
	1720	3.19	-1.03	78.81	5.22
	1730	3.32	-1.00	79.47	5.32
	1740	3.63	-0.92	80.92	5.55
	1750	3.25	-0.98	79.75	5.23
	1760	3.24	-1.12	77.25	5.36
	1770	3.03	-1.35	73.33	5.38
	1780	2.87	-1.48	71.12	5.35
	1790	3.20	-1.48	71.06	6.68
	1800	3.00	-1.52	70.55	6.52
	1810	3.39	-1.50	70.86	6.89
	1820	3.71	-1.61	68.98	6.32
	1830	4.44	-1.78	66.43	7.22
	1840	4.95	-1.92	64.24	7.87
	1850	5.43	-2.07	62.06	7
	1860	5.34	-2.09	61.82	7.43
	1870	5.40	-2.03	62.66	7.43
	1880	5.43	-1.89	64.75	7.32
	1890	5.33	-1.79	66.19	7.12
	1900	5.48	-1.84	65.45	7.32
	1910	5.30	-1.92	64.22	7.22
	1920	4.99	-2.13	61.20	7.12
	1930	5.07	-2.25	59.50	7.32
	1940	4.74	-2.36	58.01	7.1
	1950	4.65	-2.23	59.88	6.88
	1960	4.51	-2.27	59.32	6.78

Summary	Frequency (MHz)	Directivity (dBi)	Avg Gain(dBi)	Efficiency (%)	Peak Gain(dBi)
	1970	4.55	-2.35	58.17	6.9
	1980	4.31	-2.49	56.35	6.8
	1990	3.80	-2.70	53.71	6.5
	2000	3.48	-2.82	52.24	6.3
	2010	3.38	-2.82	52.22	6.2
	2020	3.41	-2.69	53.82	6.1
	2030	3.67	-2.53	55.84	6.2
	2040	3.65	-2.45	56.95	6.1
	2050	3.50	-2.46	56.74	5.96
	2060	3.28	-2.49	56.37	5.77
	2070	3.06	-2.60	54.96	5.66
	2080	2.65	-2.67	54.13	5.32
	2090	2.36	-2.74	53.26	5.1
	2100	2.22	-2.68	53.90	5.3
BGS-036(2100-2690)_30du	2110	1.67	-2.83	52.08	5.5
	2120	1.40	-3.00	50.09	5.4
	2130	1.04	-3.16	48.29	5.2
	2140	0.98	-3.32	46.54	5.3
	2150	1.17	-3.33	46.42	5.5
	2160	1.00	-3.30	46.80	5.3
	2170	1.04	-3.16	48.33	6.2
	2180	1.12	-2.98	50.40	6.1
	2190	1.38	-2.84	52.00	6.22
	2200	1.43	-2.70	53.68	6.13
	2210	1.33	-2.66	54.21	6.99
	2220	1.38	-2.50	56.17	6.88
	2230	1.43	-2.22	60.04	6.65
	2240	1.60	-1.81	65.86	7.41
	2250	1.59	-1.39	72.60	6.98
	2260	1.48	-1.17	76.43	7.65
	2270	1.04	-1.06	78.36	6.1
	2280	0.36	-1.18	76.19	6.54
	2290	-0.33	-1.23	75.29	6.9
	2300	6.92	-5.40	28.83	6.92

Summary	Frequency (MHz)	Directivity (dBi)	Avg Gain(dBi)	Efficiency (%)	Peak Gain(dBi)
	2310	-7.08	-5.48	28.33	6.6
	2320	-6.62	-4.92	32.18	6.7
	2330	-6.20	-4.60	34.67	6.6
	2340	-7.11	-5.50	28.19	6.61
	2350	-3.28	-1.76	66.70	6.52
	2360	-3.48	-1.87	65.07	6.61
	2370	-2.99	-1.89	64.71	6.1
	2380	-2.69	-1.89	64.65	6.8
	2390	-2.34	-1.84	65.49	6.5
	2400	-0.97	-1.87	65.04	6.9
	2410	-0.97	-1.87	65.08	6.9
	2420	-1.05	-1.96	63.67	6.91
	2430	-1.18	-2.10	61.64	6.92
	2440	-1.16	-2.08	61.89	6.92
	2450	-1.11	-2.03	62.62	6.92
	2460	-0.96	-1.86	65.23	6.9
	2470	-0.76	-1.66	68.19	6.9
	2480	-0.52	-1.43	71.97	6.91
	2490	-0.05	-1.18	76.19	7.13
	2500	-0.20	-1.23	75.29	7.03
	2510	-0.33	-1.38	72.78	7.05
	2520	-0.39	-1.45	71.54	7.06
	2530	0.03	-1.47	71.23	7.5
	2540	-0.22	-1.55	69.94	7.33
	2550	-0.39	-1.59	69.41	7.2
	2560	-0.45	-1.76	66.70	7.31
	2570	-0.38	-1.87	65.07	7.49
	2580	-0.45	-1.89	64.71	7.44
	2590	-0.57	-1.89	64.65	7.32
	2600	-0.63	-1.84	65.49	7.21
	2610	-0.97	-1.87	65.04	6.9
	2620	-0.97	-1.87	65.08	6.9
	2630	-1.05	-1.96	63.67	6.91
	2640	-1.18	-2.10	61.64	6.92

Summary	Frequency (MHz)	Directivity (dBi)	Avg Gain(dBi)	Efficiency (%)	Peak Gain(dBi)
	2650	-1.16	-2.08	61.89	6.92
	2660	-1.11	-2.03	62.62	6.92
	2670	-0.96	-1.86	65.23	6.9
	2680	-1.23	-1.45	71.54	6.22
	2690	-1.26	-1.47	71.23	6.21
BGS- 036(3580- 3990)_30du	3580	-22.87	-13.37	4.60	-0.18
	3590	-21.95	-12.73	5.34	-0.16
	3600	-21.97	-12.82	5.23	-0.13
	3610	-22.50	-12.86	5.18	-0.2
	3620	-21.89	-12.77	5.28	-0.26
	3630	-21.99	-12.66	5.42	-0.58
	3640	-21.41	-12.43	5.71	-0.13
	3650	-20.70	-12.14	6.11	-0.13
	3660	-20.14	-11.64	6.85	-0.13
	3670	-22.91	-13.03	4.98	-0.22
	3680	-22.99	-13.38	4.59	-0.14
	3690	-21.02	-12.41	5.74	-0.15
	3700	-20.33	-11.82	6.57	-0.18
	3710	-20.46	-11.79	6.62	-0.22
	3720	-22.15	-12.93	5.10	-0.2
	3730	-20.90	-12.26	5.94	-0.18
	3740	-22.41	-13.19	4.80	-0.22
	3750	-22.11	-12.96	5.06	-0.2
	3760	-22.63	-13.30	4.68	-0.22
	3770	-21.00	-12.02	6.28	-0.2
	3780	-20.30	-11.74	6.70	-0.18
	3790	-23.10	-13.22	4.76	-0.22
	3800	-20.85	-12.19	6.04	-0.2
	3810	-20.35	-11.74	6.70	-0.18
	3820	-20.30	-11.79	6.62	-0.22
	3830	-20.52	-11.85	6.52	-0.22
	3840	-21.01	-12.34	5.83	-0.2
	3850	-22.02	-12.80	5.25	-0.18
	3860	-20.34	-11.70	6.76	-0.22

Summary	Frequency (MHz)	Directivity (dBi)	Avg Gain(dBi)	Efficiency (%)	Peak Gain(dBi)
	3870	-21.77	-12.55	5.56	-0.2
	3880	-21.55	-12.57	5.53	-0.22
	3890	-20.22	-11.66	6.83	-0.2
	3900	-23.35	-13.47	4.50	-0.18
	3910	-20.89	-12.23	5.99	-0.22
	3920	-20.31	-11.70	6.77	-0.2
	3930	-20.77	-12.26	5.94	-0.18
	3940	-20.81	-12.14	6.11	-0.22
	3950	-20.16	-11.65	6.85	-0.37
	3960	-21.08	-12.10	6.16	-0.13
	3970	-20.42	-11.86	6.52	-0.18
	3980	-22.87	-12.99	5.02	-0.14
	3990	-20.66	-12.00	6.32	-0.37
	4000	-20.88	-12.37	5.80	-8.51
BGS- 036(4000- 4490)_30du	4010	-20.84	-12.17	6.07	-8.67
	4020	-21.36	-12.69	5.38	-8.67
	4030	-21.54	-12.32	5.86	-9.22
	4040	-21.15	-12.51	5.61	-8.64
	4050	-22.00	-12.78	5.27	-9.22
	4060	-22.14	-13.01	5.00	-9.13
	4070	-22.23	-13.01	5.00	-9.22
	4080	-21.26	-12.28	5.91	-8.98
	4090	-20.29	-11.73	6.71	-8.56
	4100	-23.49	-13.61	4.36	-9.88
	4110	-20.29	-11.65	6.84	-8.64
	4120	-21.87	-12.65	5.43	-9.22
	4130	-21.30	-12.17	6.07	-9.13
	4140	-20.15	-11.64	6.86	-8.51
	4150	-21.34	-12.67	5.41	-8.67
	4160	-20.88	-12.21	6.01	-8.67
	4170	-20.35	-11.84	6.55	-8.51
	4180	-20.63	-11.96	6.37	-8.67
	4190	-21.05	-12.38	5.78	-8.67
	4200	-21.87	-12.89	5.14	-8.98

Summary	Frequency (MHz)	Directivity (dBi)	Avg Gain(dBi)	Efficiency (%)	Peak Gain(dBi)
	4210	-20.93	-12.37	5.79	-8.56
	4220	-22.91	-13.03	4.98	-9.88
	4230	-21.06	-12.40	5.76	-8.66
	4240	-20.29	-11.68	6.79	-8.61
	4250	-20.53	-12.02	6.29	-8.51
	4260	-20.46	-11.79	6.63	-8.67
	4270	-20.33	-11.82	6.58	-8.51
	4280	-21.51	-12.53	5.59	-8.98
	4290	-20.22	-11.66	6.83	-8.56
	4300	-22.98	-13.10	4.90	-9.88
	4310	-17.02	-10.04	9.91	-6.98
	4320	-17.04	-10.48	8.96	-6.56
	4330	-19.66	-11.78	6.64	-7.88
	4340	-16.75	-10.09	9.79	-6.66
	4350	-16.60	-9.99	10.01	-6.61
	4360	-17.01	-10.50	8.91	-6.51
	4370	-17.30	-10.63	8.65	-6.67
	4380	-16.46	-9.95	10.13	-6.51
	4390	-17.83	-10.85	8.23	-6.98
	4400	-17.03	-10.47	8.98	-6.56
	4410	-19.40	-11.52	7.04	-7.88
	4420	-12.78	-8.10	15.50	-4.68
	4430	-11.96	-7.70	16.97	-4.26
	4440	-15.11	-9.53	11.14	-5.58
	4450	-12.59	-8.23	15.02	-4.36
	4460	-11.99	-7.68	17.07	-4.31
	4470	-12.00	-7.79	16.62	-4.21
	4480	-12.30	-7.93	16.09	-4.37
	4490	-12.25	-7.88	16.28	-4.37
BGS-036(4500-4990)_30du	4500	-8.57	-5.99	25.20	-2.58
	4510	-7.51	-5.35	29.19	-2.16
	4520	-10.45	-6.97	20.08	-3.48
	4530	-8.34	-6.08	24.67	-2.26
	4540	-8.41	-6.20	23.97	-2.21

Summary	Frequency (MHz)	Directivity (dBi)	Avg Gain(dBi)	Efficiency (%)	Peak Gain(dBi)
	4550	-7.74	-5.63	27.33	-2.11
	4560	-8.43	-6.16	24.19	-2.27
	4570	-7.34	-5.23	29.99	-2.11
	4580	-8.85	-6.27	23.61	-2.58
	4590	-7.97	-5.81	26.23	-2.16
	4600	-10.60	-7.12	19.43	-3.48
	4610	-8.31	-6.05	24.83	-2.26
	4620	-7.76	-5.55	27.83	-2.21
	4630	-7.93	-5.82	26.17	-2.11
	4640	-8.39	-6.12	24.43	-2.27
	4650	-8.12	-6.01	25.09	-2.11
	4660	-8.87	-6.29	23.49	-2.58
	4670	-2.88	-1.70	67.68	-1.18
	4680	-2.43	-1.67	68.15	-0.76
	4690	-7.74	-5.66	27.17	-2.08
	4700	-2.57	-1.71	67.53	-0.86
	4710	-2.40	-1.59	69.31	-0.81
	4720	-2.32	-1.61	69.07	-0.71
	4730	-2.57	-1.70	67.61	-0.87
	4740	-2.40	-1.69	67.72	-0.71
	4750	-2.90	-1.72	67.30	-1.18
	4760	-2.77	-2.01	62.88	-0.76
	4770	-2.88	-1.70	67.58	-1.18
	4780	-2.16	-1.40	72.47	-0.76
	4790	-7.33	-5.25	29.86	-2.08
	4800	-2.31	-1.45	71.69	-0.86
	4810	-2.32	-1.51	70.57	-0.81
	4820	-2.31	-1.60	69.23	-0.71
	4830	-2.51	-1.64	68.51	-0.87
	4840	-2.51	-1.80	66.04	-0.71
	4850	-2.84	-1.66	68.18	-1.18
	4860	-2.36	-1.60	69.21	-0.76
	4870	-7.51	-5.43	28.61	-2.08
	4880	-2.47	-1.61	69.07	-0.86

Summary	Frequency (MHz)	Directivity (dBi)	Avg Gain(dBi)	Efficiency (%)	Peak Gain(dBi)
	4890	-2.45	-1.64	68.51	-0.81
	4900	-2.41	-1.70	67.68	-0.71
	4910	-2.46	-1.59	69.31	-0.87
	4920	-2.20	-1.49	70.98	-0.71
	4930	-2.56	-1.38	72.70	-1.18
	4940	-2.04	-1.28	74.45	-0.76
	4950	-6.26	-5.08	31.01	-1.18
	4960	-6.32	-5.56	27.83	-0.76
	4970	-7.69	-5.61	27.48	-2.08
	4980	-1.63	-0.87	81.91	-0.76
	4990	-7.69	-5.61	27.48	-2.08
BGS-036(5500-6000)_30du	5500	0.35	-2.97	50.41	3.32
	5510	0.10	-3.07	49.35	3.17
	5520	-0.13	-3.15	48.37	3.02
	5530	-0.28	-3.17	48.14	2.89
	5540	-0.41	-3.19	48.00	2.78
	5550	-0.53	-3.18	48.05	2.65
	5560	-0.62	-3.18	48.05	2.56
	5570	-0.89	-3.25	47.30	2.36
	5580	-0.96	-3.26	47.21	2.3
	5590	-1.18	-3.30	46.82	2.12
	5600	-1.38	-3.32	46.61	1.94
	5620	-1.53	-3.19	47.96	1.66
	5630	-1.74	-3.19	47.94	1.45
	5640	-1.86	-3.20	47.84	1.34
	5650	-2.06	-3.27	47.15	1.21
	5660	-2.09	-3.21	47.72	1.12
	5670	-1.95	-3.10	48.94	1.15
	5680	-1.99	-2.98	50.33	0.99
	5690	-1.95	-2.93	50.99	0.98
	5700	-1.88	-2.89	51.42	1.01
	5710	-1.77	-2.94	50.81	1.17
	5720	-1.84	-2.97	50.42	1.13
	5730	-1.99	-3.00	50.08	1.01


Summary	Frequency (MHz)	Directivity (dBi)	Avg Gain(dBi)	Efficiency (%)	Peak Gain(dBi)
	5740	-1.75	-2.89	51.42	1.14
	5750	-1.69	-2.86	51.74	1.17
	5760	-1.52	-2.83	52.08	1.31
	5770	-1.65	-2.84	52.04	1.19
	5780	-1.75	-2.88	51.54	1.13
	5790	-1.78	-2.92	51.07	1.14
	5800	-1.73	-2.92	51.01	1.19
	5810	-1.77	-2.93	50.94	1.16
	5820	-1.68	-2.90	51.27	1.22
	5830	-1.62	-2.90	51.32	1.28
	5840	-1.61	-2.83	52.12	1.22
	5850	-1.24	-2.71	53.63	1.47
	5860	-1.34	-2.78	52.69	1.44
	5870	-1.34	-2.80	52.43	1.46
	5880	-1.49	-2.83	52.15	1.34
	5890	-1.46	-2.76	52.93	1.3
	5900	-1.37	-2.70	53.67	1.33
	5910	-1.34	-2.65	54.27	1.31
	5920	-1.50	-2.71	53.52	1.21
	5930	-1.77	-2.85	51.93	1.08
	5940	-1.99	-2.91	51.14	0.92
	5950	-2.19	-2.95	50.66	0.76
	5960	-2.00	-2.90	51.24	0.9
	5970	-1.79	-2.81	52.36	1.02
	5980	-1.74	-2.78	52.76	1.04
	5990	-1.85	-2.81	52.31	0.96
	6000	-1.87	-2.83	52.07	0.96




深圳市博格斯通信技术有限公司


shenzhen bogesi communication technology co.,ltd

Direction map:

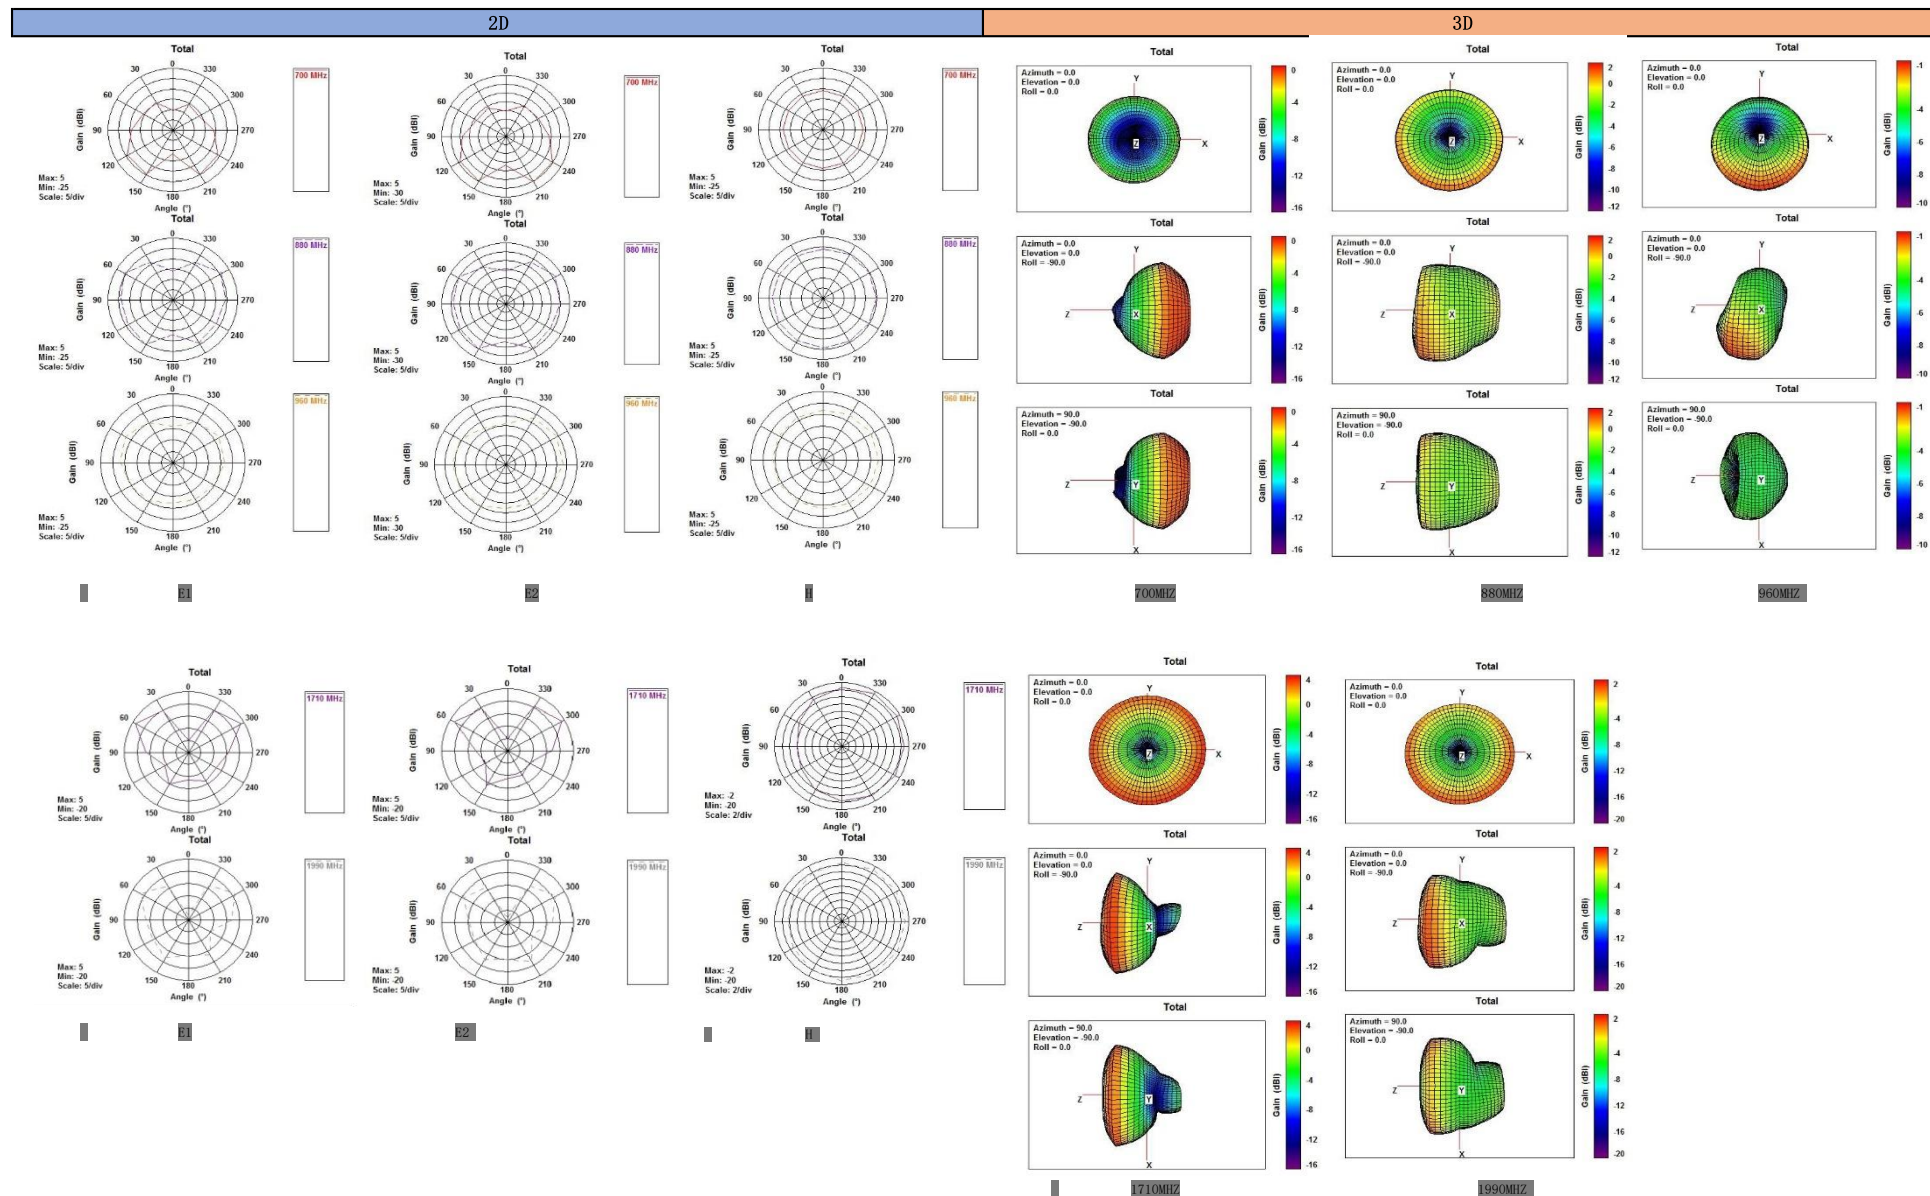







2170 MHz




2170 MHz




2170 MHz




2170MHz






2690 MHz






2690 MHz




2690 MHz




2690MHz




2690MHz






3350 MHz






3350 MHz







3350 MHz







3350MHz




3350MHz

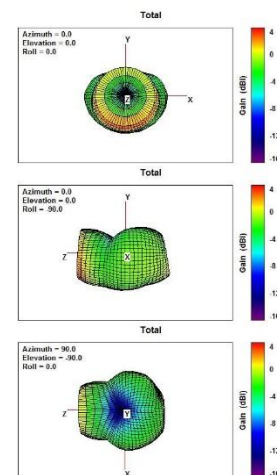


3000MHz

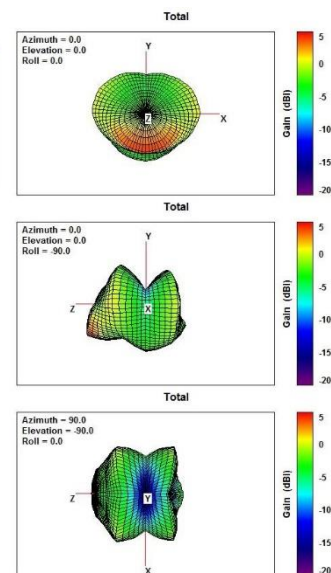

5370MHz




6000 MHz



■

P2


6000 MHz



■

■

6000 MHz

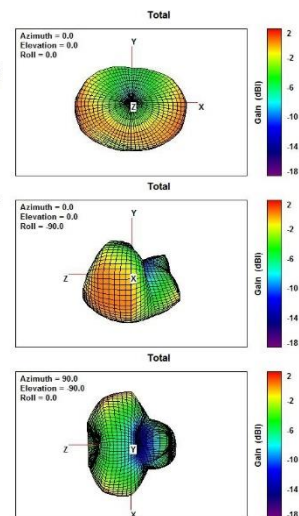

■

6000MHz






深圳市博格斯通信技术有限公司




shenzhen bogesi communication technology co.,ltd

Direction map:




700

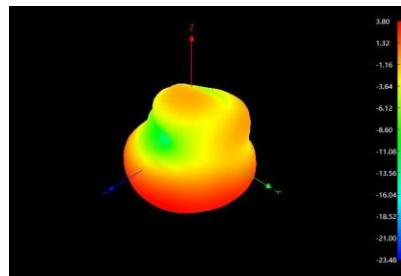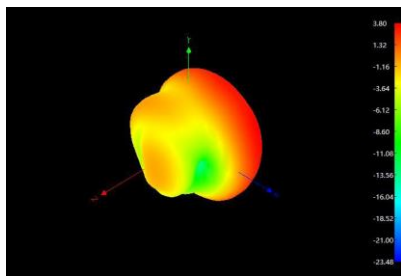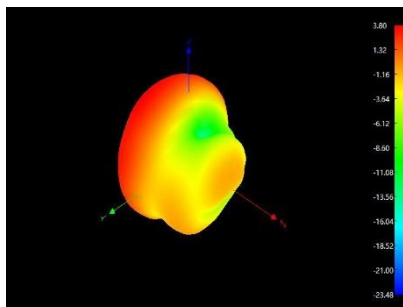




750

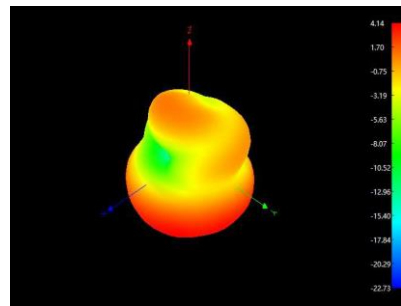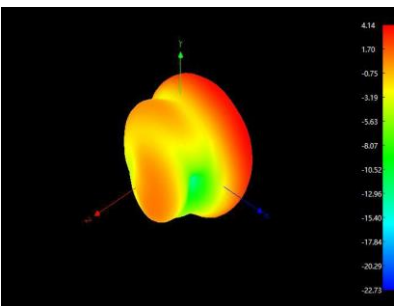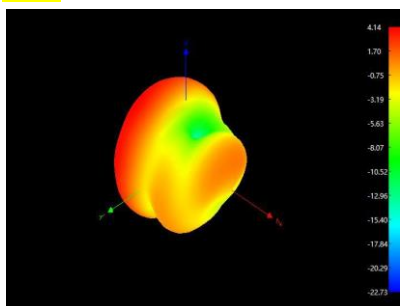




800









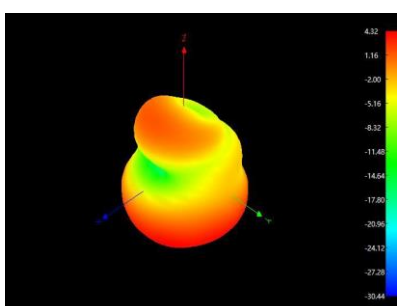
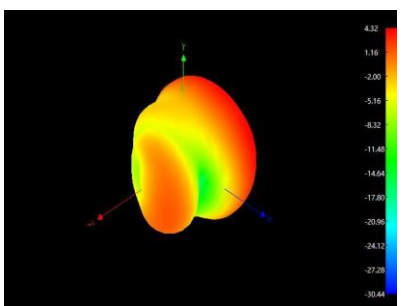
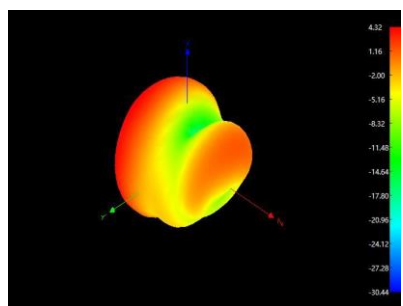


850

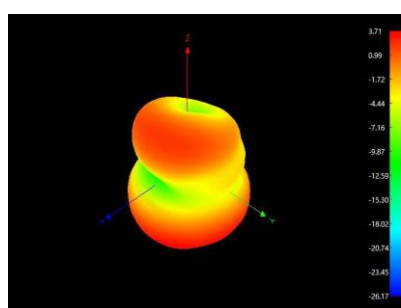
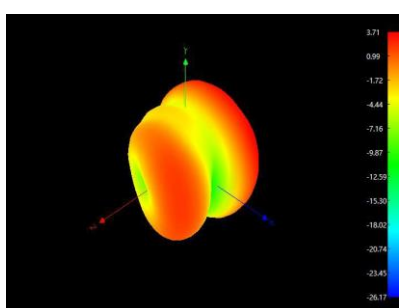
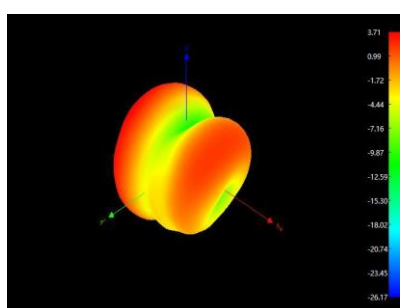


1570

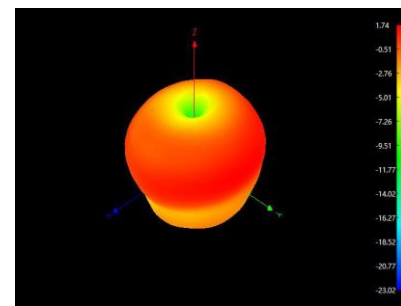
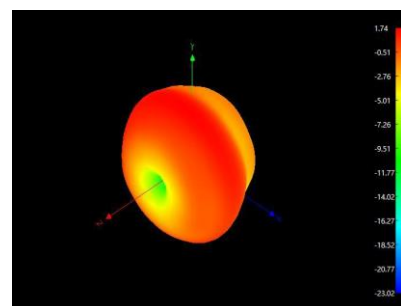
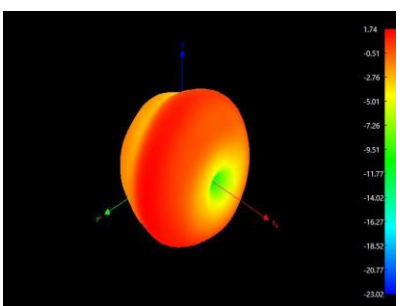


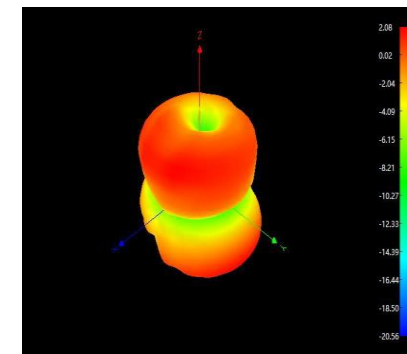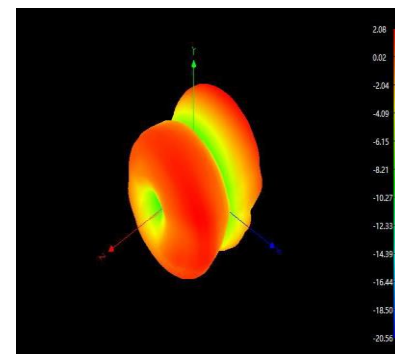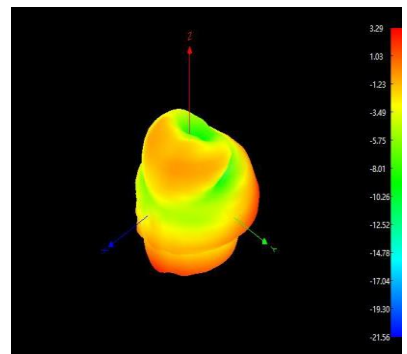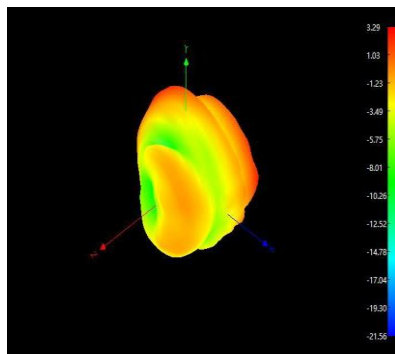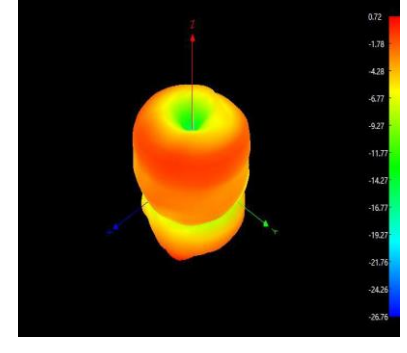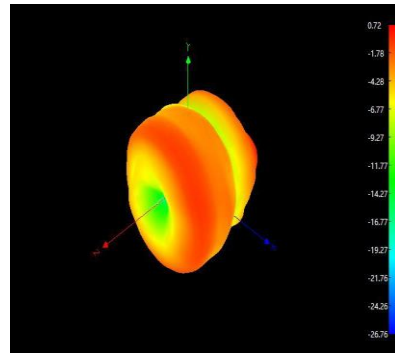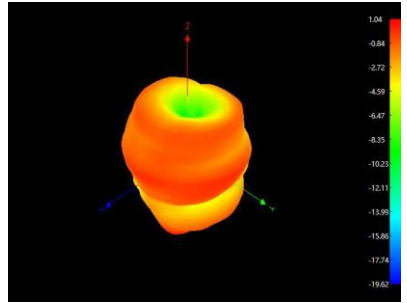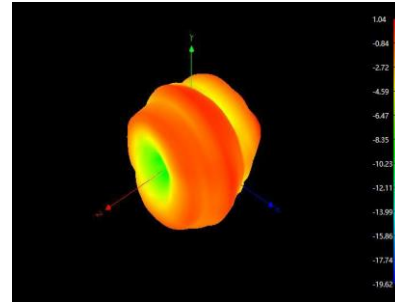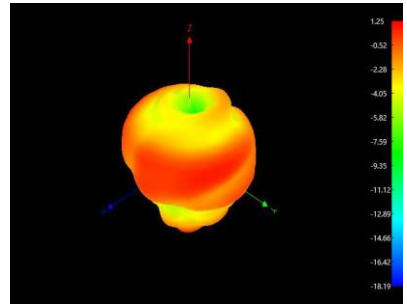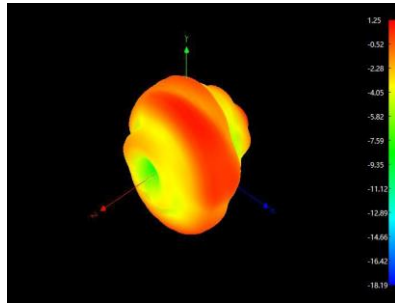




4000

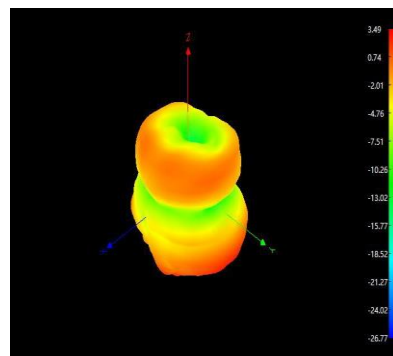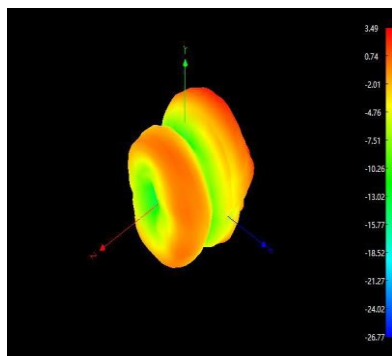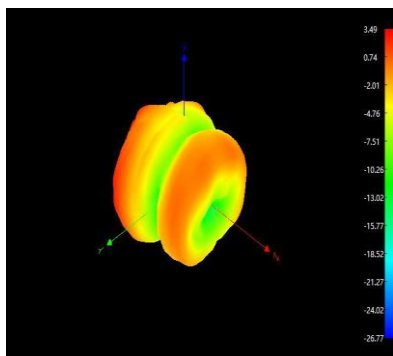




4500

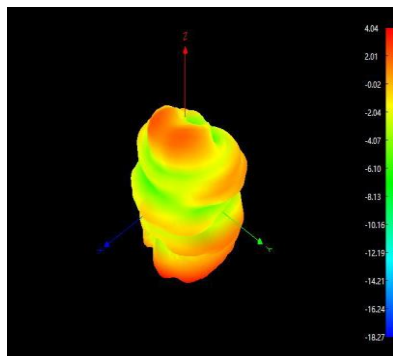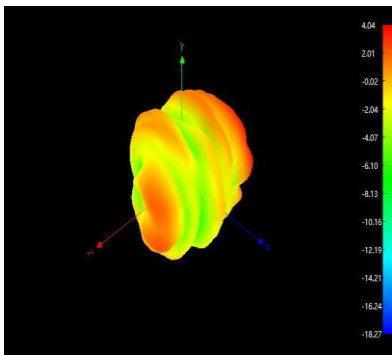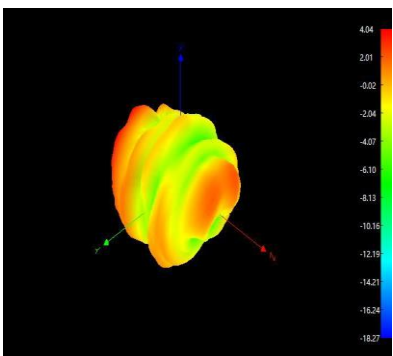




5000

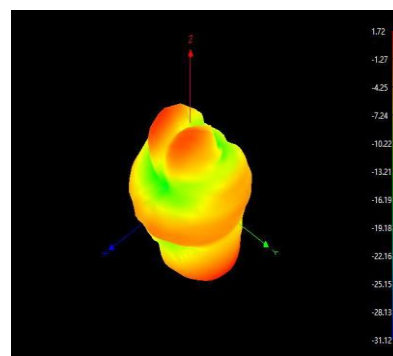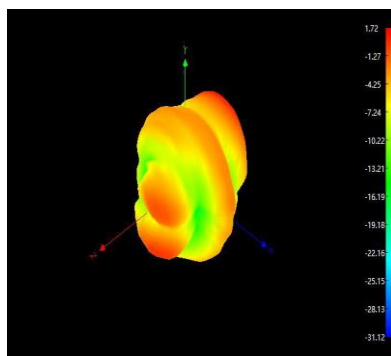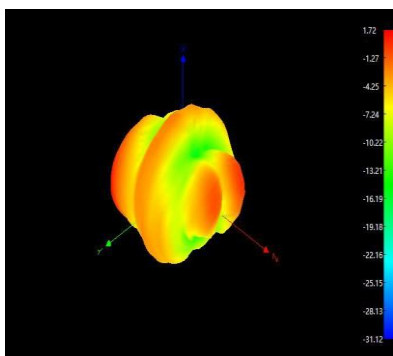

5500

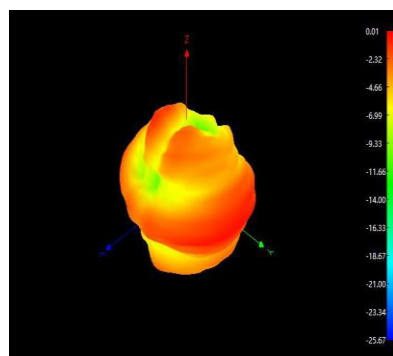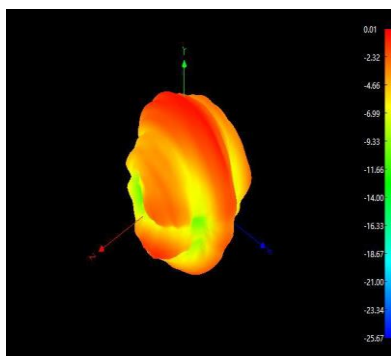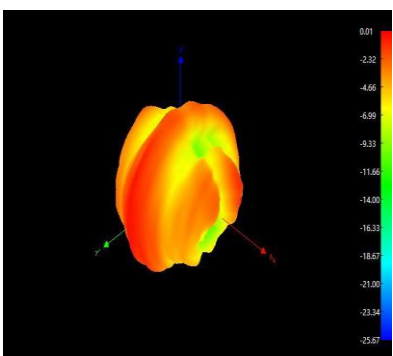


6000

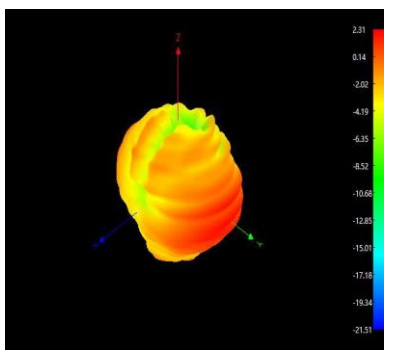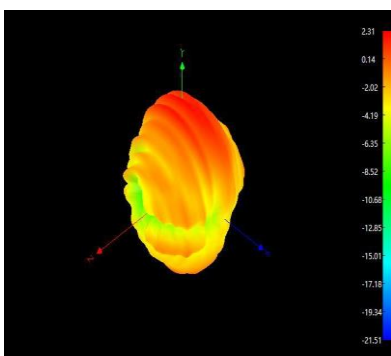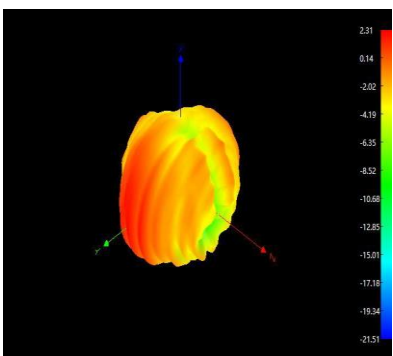



Antenna Dimension-mm

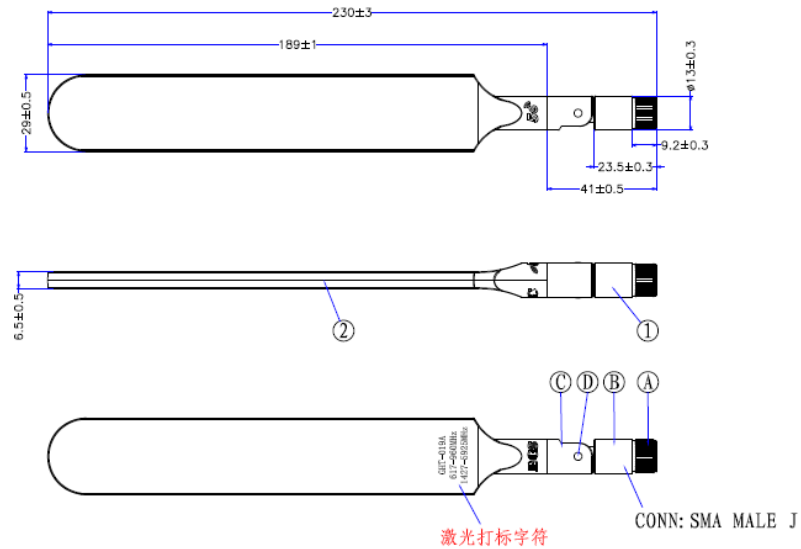



深圳市博格斯通信技术有限公司
shenzhen bogesi communication technology co.,ltd

Antenna packaging instructions

1. Outer packaging: carton packaging

Front view:



side view:



2. Inner packaging (1PCS/PE ziplock bag, 50PCS/bag, the size of the bag depends on the product size)

