

FCC RADIO TEST REPORT

Applicant..... : Fibocom Wireless Inc.

Address..... : 1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi
1st Rd, Nanshan ShenZhen China

Manufacturer..... : Fibocom Wireless Inc.

Address..... : 1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi
1st Rd, Nanshan ShenZhen China

Factory..... : Huizhou HYE Technology Co., Ltd.

Address..... : No. 237, Sanhe group, Sanhe village, Tonghu Town, Zhongkai hi tech
Zone, Huizhou

Product Name..... : LTE Module

Brand Name..... : Fibocom

Model No. : SC138-NA

FCC ID..... : ZMOSC138NA

Measurement Standard..... : 47 CFR FCC Part 2 / Part 22(H) / Part 24(E) / Part 27 (L), (M), (N), (H), (F) / Part
90(R),(S)

Receipt Date of Samples..... : November 28, 2025

Date of Tested..... : November 25, 2025 to December 16, 2025

Date of Report..... : January 13, 2026

This report shows that above equipment is technically compliant with the requirements of the standards above. All test results in this report apply only to the tested sample(s). Without prior written approval of Dongguan Nore Testing Center Co., Ltd, this report shall not be reproduced except in full.



Prepared by

Alina Guo / Project Engineer



Approved by

Iori Fan / Authorized Signatory

Table of Contents

1. Summary of Test Result.....	4
2. General Description of EUT	6
3. Test Channels and Modes Detail	9
4. Configuration of EUT	18
5. Modification of EUT	18
6. Description of Support Device.....	18
7. Test Facility and Location	19
8. Applicable Standards and References.....	20
9. Deviations and Abnormalities from Standard Conditions	20
10. Test Conditions	21
11. Sample Calculations	22
12. Measurement Uncertainty	22
13. Test Items and Results	23
13.1 Conducted Output Power and ERP/EIRP Measurement	23
13.2 Field Strength of Spurious Radiation Measurement.....	25
14. Test Equipment List.....	28

Revision History

[illegible]

1. Summary of Test Result

FCC Rules	Description of Test	Result	Remarks
§2.1046	Conducted Output Power	PASS	Reporting Only
§22.913 (a) (5) §27.50 (b) (10) §27.50 (c) (10) §27.50 (d) (4) §27.50 (h) (2) §90.635 (b) §90.542 (a) (7)	Effective Radiated Power (ERP) (Band 5 / 12 / 13 / 14 / 17 / 25 / 26)	PASS	---
§24.232 (c) §27.50 (h) (2) §27.50 (d) (4)	Equivalent Isotropic Radiated Power (EIRP) (Band 2 / 4 / 7 / 41 / 66 / 71)	PASS	---
§24.232 (d) §27.50 (d) (5)	Peak-to-Average Ratio	N/A	---
§2.1049 §90.209	Occupied Bandwidth	N/A	---
§2.1051 §22.917 (a) §24.238 (a) §27.53 (c) (2) (4) §27.53 (g) §27.53 (h) §27.53 (m) (4) §90.691 (a) §90.543 (e) (2) (3)	Band Edge (Band 2 / 4 / 5 / 7 / 12 / 13 / 14 / 17 / 25 / 26 / 41 / 66 / 71)	N/A	---
Note: N/A means not applicable.			

FCC Rules	Description of Test	Result	Remarks
§2.1051 §22.917 (a) §24.238 (a) §27.53 (c) (2) (f) §27.53 (g) §27.53 (h) §27.53 (m) (4) & (m) (6) §90.669 §90.543 (e) (3) & (f)	Spurious Emission at Antenna Terminal (Band 2 / 4 / 5 / 7 / 12 / 13 / 14 / 17 / 25 / 26 / 41 / 66 / 71)	N/A	---
§2.1053 §22.917 (a) §24.238 (a) §27.53 (c) (2) §27.53 (f) §27.53 (g) §27.53 (h) §27.53 (m) (4) §90.691 (a)	Field Strength of Spurious Radiation (Band 2 / 4 / 5 / 7 / 12 / 13 / 14 / 17 / 25 / 26 / 41 / 66 / 71)	PASS	---
§2.1055 §22.355 §24.235 §27.54 §90.213 §90.539 (e)	Frequency Stability (Band 2 / 4 / 5 / 7 / 12 / 13 / 14 / 17 / 25 / 26 / 41 / 66 / 71)	N/A	---
Note: N/A means not applicable.			

2. General Description of EUT

Product Information	
Product Name:	LTE Module
Main Model Name:	SC138-NA
Additional Model Name:	N/A
Model Difference:	N/A
S/N:	N/A
Brand Name:	Fibocom
Hardware version:	SC138-NA
Software version:	SC138-NA-Q62.00.104
Rating:	DC 3.5V ~ 4.2V (DC Voltage supplied from external power supply)
Test Voltage:	DC 3.8V (Normal Voltage)
I/O Port:	Refer to the user's manual
Accessories Information	
Adapter:	N/A
Cable:	N/A
Other:	N/A
Additional Information	
Note:	N/A
Remark:	All the information above are provided by the manufacturer. More detailed feature of the EUT please refers to the user manual.

Technical Specification

Frequency Range:	TX: LTE Band 2: 1850 ~ 1910 MHz LTE Band 4: 1710 ~ 1755 MHz LTE Band 5: 824 ~ 849 MHz LTE Band 7: 2500 ~ 2570 MHz LTE Band 12: 699 ~ 716 MHz LTE Band 13: 777 ~ 787 MHz LTE Band 14: 790.5 ~ 795.5 MHz LTE Band 17: 704 ~ 716 MHz LTE Band 25: 1850 ~ 1915 MHz LTE Band 26: 814 ~ 849 MHz LTE Band 41: 2496 ~ 2690 MHz LTE Band 66: 1710 ~ 1780 MHz LTE Band 71: 665.5 ~ 695.5 MHz RX: LTE Band 2: 1930 ~ 1990 MHz LTE Band 4: 2110 ~ 2155 MHz LTE Band 5: 869 ~ 894 MHz LTE Band 7: 2620 ~ 2690 MHz LTE Band 12: 729 ~ 746 MHz LTE Band 13: 746 ~ 756 MHz LTE Band 14: 760.5 ~ 763.5 MHz LTE Band 17: 734 ~ 746 MHz LTE Band 25: 1930 ~ 1995 MHz LTE Band 26: 859 ~ 894 MHz LTE Band 41: 2496 ~ 2690 MHz LTE Band 66: 2110 ~ 2200 MHz LTE Band 71: 619.5 ~ 649.5 MHz
Modulation Type:	QPSK / 16QAM / 64QAM
Antenna Type:	Integrated antenna

Antenna Gain:	LTE Band 2: 2.65 dBi, LTE Band 4: 2.65 dBi LTE Band 5: 4.21 dBi, LTE Band 7: 0.12 dBi LTE Band 12: 2.58 dBi, LTE Band 13: 3.00 dBi LTE Band 14: 3.00 dBi, LTE Band 17: 2.58 dBi LTE Band 25: 2.65 dBi, LTE Band 26: 3.94 dBi LTE Band 41: 0.12 dBi, LTE Band 66: 2.65 dBi LTE Band 71: 2.05 dBi
Bandwidth	LTE Band 2: 1.4 MHz / 3 MHz / 5 MHz / 10 MHz / 15 MHz / 20 MHz LTE Band 4: 1.4 MHz / 3 MHz / 5 MHz / 10 MHz / 15 MHz / 20 MHz LTE Band 5: 1.4 MHz / 3 MHz / 5 MHz / 10 MHz LTE Band 7: 5 MHz / 10 MHz / 15 MHz / 20 MHz LTE Band 12: 1.4 MHz / 3 MHz / 5 MHz / 10 MHz LTE Band 13: 5 MHz / 10 MHz LTE Band 14: 5 MHz / 10 MHz LTE Band 17: 5 MHz / 10 MHz LTE Band 25: 1.4 MHz / 3 MHz / 5 MHz / 10 MHz / 15 MHz / 20 MHz LTE Band 26: 1.4 MHz / 3 MHz / 5 MHz / 10 MHz / 15 MHz LTE Band 41: 5 MHz / 10 MHz / 15 MHz / 20 MHz LTE Band 66: 1.4 MHz / 3 MHz / 5 MHz / 10 MHz / 15 MHz / 20 MHz LTE Band 71: 5 MHz / 10 MHz / 15 MHz / 20 MHz
Max. Conducted Power:	LTE Band 2: 22.83 dBm LTE Band 4: 22.72 dBm LTE Band 5: 20.39 dBm LTE Band 7: 22.46 dBm LTE Band 12: 20.63 dBm LTE Band 13: 20.55 dBm LTE Band 14: 22.63 dBm LTE Band 17: 20.53 dBm LTE Band 25: 22.65 dBm LTE Band 26 (814-824 MHz): 22.67 dBm LTE Band 26 (824-849 MHz): 20.52 dBm LTE Band 41: 22.85 dBm LTE Band 66: 23.24 dBm LTE Band 71: 20.63 dBm
Remark:	N/A

3. Test Channels and Modes Detail

LTE Bands	Bandwidth	Channel		Frequency (MHz)	Modulation	Remark
Band 2	1.4 MHz	Low	18607	1850.7	QPSK 16QAM	---
		Mid	18900	1880.0		
		High	19193	1909.3		
	3.0 MHz	Low	18615	1851.5		
		Mid	18900	1880.0		
		High	19185	1908.5		
	5 MHz	Low	18625	1852.5		
		Mid	18900	1880.0		
		High	19175	1907.5		
	10 MHz	Low	18650	1855.0		
		Mid	18900	1880.0		
		High	19150	1905.0		
	15 MHz	Low	18675	1857.5		
		Mid	18900	1880.0		
		High	19125	1902.5		
	20 MHz	Low	18700	1860.0		
		Mid	18900	1880.0		
		High	19100	1900.0		

LTE Bands	Bandwidth	Channel		Frequency (MHz)	Modulation	Remark
Band 4	1.4 MHz	Low	19957	1710.7	QPSK 16QAM	---
		Mid	20175	1732.5		
		High	20393	1754.3		
	3 MHz	Low	19965	1711.5		
		Mid	20175	1732.5		
		High	20385	1753.5		
	5 MHz	Low	19975	1712.5		
		Mid	20175	1732.5		
		High	20375	1752.5		
	10 MHz	Low	20000	1715.0		
		Mid	20175	1732.5		
		High	20350	1750.0		
	15 MHz	Low	20025	1717.5		
		Mid	20175	1732.5		
		High	20325	1747.5		
	20 MHz	Low	20050	1720.0		
		Mid	20175	1732.5		
		High	20300	1745.0		

LTE Bands	Bandwidth	Channel		Frequency (MHz)	Modulation	Remark
Band 5	1.4 MHz	Low	20407	824.7	QPSK 16QAM	---
		Mid	20525	836.5		
		High	20643	848.3		
	3.0 MHz	Low	20415	825.5		
		Mid	20525	836.5		
		High	20635	847.5		
	5 MHz	Low	20425	826.5		
		Mid	20525	836.5		
		High	20625	846.5		
	10 MHz	Low	20450	829.0		
		Mid	20525	836.5		
		High	20600	844.0		
Band 7	5 MHz	Low	20775	2502.5	QPSK 16QAM	---
		Mid	21100	2535.0		
		High	21425	2567.5		
	10 MHz	Low	20800	2505.0		
		Mid	21100	2535.0		
		High	21400	2565.0		
	15 MHz	Low	20825	2507.5		
		Mid	21100	2535.0		
		High	21375	2562.5		
	20 MHz	Low	20850	2510.0		
		Mid	21100	2535.0		
		High	21350	2560.0		

LTE Bands	Bandwidth	Channel		Frequency (MHz)	Modulation	Remark
Band 12	1.4 MHz	Low	23017	699.7	QPSK 16QAM	---
		Mid	23095	707.5		
		High	23173	715.3		
	3 MHz	Low	23025	700.5		
		Mid	23095	707.5		
		High	23165	714.5		
	5 MHz	Low	23035	701.5		
		Mid	23095	707.5		
		High	23155	713.5		
	10 MHz	Low	23060	704.0		
		Mid	23095	707.5		
		High	23130	711.0		
Band 13	5 MHz	Low	23205	779.5	QPSK 16QAM	---
		Mid	23230	782.0		
		High	23255	784.5		
	10 MHz	Low	---	---		
		Mid	23230	782.0		
		High	---	---		
Band 14	5 MHz	Low	23305	790.5	QPSK 16QAM	---
		Mid	23330	793		
		High	23355	795.5		
	10 MHz	Low	23330	793		
		Mid	23330	793		
		High	23330	793		

LTE Bands	Bandwidth	Channel		Frequency (MHz)	Modulation	Remark
Band 17	5 MHz	Low	23755	706.5	QPSK 16QAM	---
		Mid	23790	710.0		
		High	23825	713.5		
	10 MHz	Low	23780	709.0		
		Mid	23790	710.0		
		High	23800	711.0		
Band 25	1.4 MHz	Low	26047	1850.7	QPSK 16QAM	---
		Mid	26340	1880.0		
		High	26683	1914.3		
	3 MHz	Low	26055	1851.5		
		Mid	26340	1880.0		
		High	26675	1913.5		
	5 MHz	Low	26065	1852.5		
		Mid	26340	1880.0		
		High	26665	1912.5		
	10 MHz	Low	26090	1855.0		
		Mid	26340	1880.0		
		High	26640	1910.0		
	15 MHz	Low	26115	1857.5		
		Mid	26340	1880.0		
		High	26615	1907.5		
	20 MHz	Low	26140	1860.0		
		Mid	26340	1880.0		
		High	26590	1905.0		

LTE Bands	Bandwidth	Channel	Frequency (MHz)	Modulation	Remark	LTE Bands
Band 26 (814-824)	1.4 MHz	Low	26697	814.7	QPSK 16QAM	---
		Mid	26740	819.0		
		High	26783	823.3		
	3 MHz	Low	26705	815.5		
		Mid	26740	819.0		
		High	26775	822.5		
	5 MHz	Low	26715	816.5		
		Mid	26740	819.0		
		High	26765	821.5		
	10 MHz	Low	---	---		
		Mid	26740	819.0		
		High	---	---		
Band 26 (824-849)	1.4 MHz	Low	26797	824.7	QPSK 16QAM	---
		Mid	26915	836.5		
		High	27033	848.3		
	3 MHz	Low	26805	825.5		
		Mid	26915	836.5		
		High	27025	847.5		
	5 MHz	Low	26815	826.5		
		Mid	26915	836.5		
		High	27015	846.5		
	10 MHz	Low	26840	829.0		
		Mid	26915	836.5		
		High	26990	844.0		
	15 MHz	Low	26865	831.5		
		Mid	26915	836.5		
		High	26965	841.5		


LTE Bands	Bandwidth	Channel		Frequency (MHz)	Modulation	Remark
Band 41	5 MHz	Low	39675	2495.5	QPSK 16QAM	
		Mid	40620	2593.0		
		High	41565	2687.5		
	10 MHz	Low	39700	2501.0		
		Mid	40620	2593.0		
		High	41540	2685.0		
	15 MHz	Low	39725	2503.5		
		Mid	40620	2593.0		
		High	41515	2682.5		
	20 MHz	Low	39750	2506.0		
		Mid	40620	2593.0		
		High	41490	2680.0		

LTE Bands	Bandwidth	Channel		Frequency (MHz)	Modulation	Remark
Band 66	1.4 MHz	Low	131979	1710.7	QPSK 16QAM	---
		Mid	132322	1745.0		
		High	132665	1779.3		
	3 MHz	Low	13187	1711.5		
		Mid	132322	1745.0		
		High	132657	1778.5		
	5 MHz	Low	131997	1712.5		
		Mid	132322	1745.0		
		High	132647	1777.5		
	10 MHz	Low	132022	1715.0		
		Mid	132322	1745.0		
		High	132622	1775.0		
	15 MHz	Low	132047	1717.5		
		Mid	132322	1745.0		
		High	132597	1772.5		
	20 MHz	Low	132072	1720.0		
		Mid	132322	1745.0		
		High	132572	1770.0		

Note: All modes and data rates and positions were considered and investigated respectively by performing full tests, and only the worst data were recorded and reported.

LTE Bands	Bandwidth	Channel		Frequency (MHz)	Modulation	Remark
Band 71	5 MHz	Low	133147	665.5	QPSK 16QAM	
		Mid	133297	680.5		
		High	133447	695.5		
	10 MHz	Low	133172	668		
		Mid	133297	680.5		
		High	133422	693		
	15 MHz	Low	133197	670.5		
		Mid	133297	680.5		
		High	133397	690.5		
	20 MHz	Low	133222	673		
		Mid	133222	683		
		High	133372	688		

4. Configuration of EUT

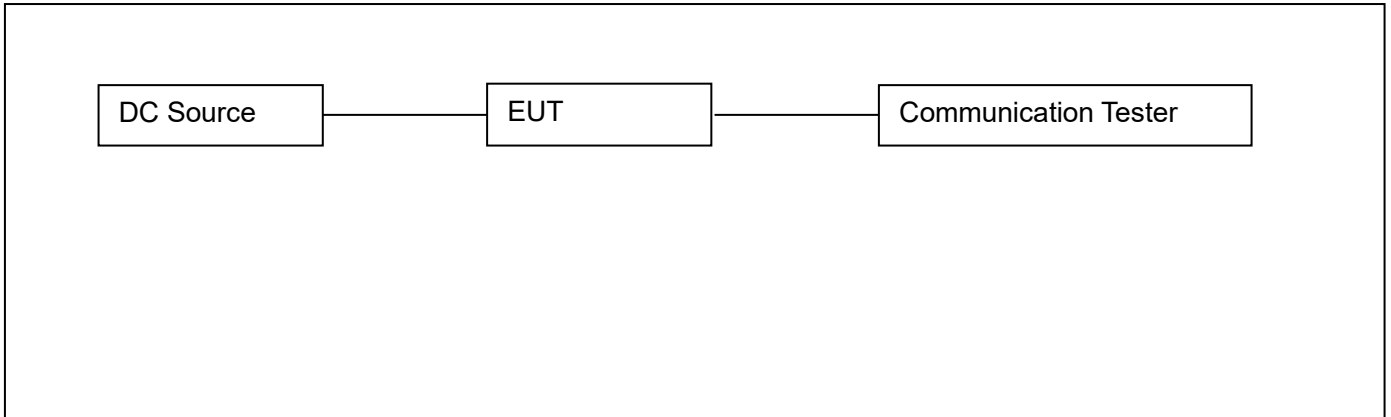

5. Modification of EUT

No modifications are made to the EUT during all test items.

6. Description of Support Device

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Brand	M/N	S/N	Cable Specification	Remarks
---	---	---	---	---	---	---

7. Test Facility and Location

Test Site	:	Dongguan Nore Testing Center Co., Ltd. (Dongguan NTC Co., Ltd.)
Accreditations and Authorizations	:	The Laboratory has been assessed and proved to be in compliance with CNAS/CL01 Listed by CNAS, August 13, 2018 The Certificate Registration Number is L5795. The Certificate is valid until August 13, 2030 The Laboratory has been assessed and proved to be in compliance with ISO17025 Listed by A2LA, November 01, 2017 The Certificate Registration Number is 4429.01 The Certificate is valid until December 31, 2027 Listed by FCC, November 06, 2017 Test Firm Registration Number: 907417 Listed by ISED, June 08, 2017 The Certificate Registration Number. Is 46405-9743A The CAB identifier number: CN0015
Test Site Location	:	Room 101, 1101, Building 2, No. 61, Hongmei Section, Wangsha Road, Hongmei Town, Dongguan, Guangdong, People's Republic of China

8. Applicable Standards and References

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

Test Standards:

47 CFR Part 2, 22(H), 24(E), 27(C), 90(I),90(S)

ANSI C63.26-2015

References Test Guidance:

FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01

FCC KDB 412172 D01 Determining ERP and EIRP v01r01

9. Deviations and Abnormalities from Standard Conditions

No additions, deviations and exclusions from the standard.

10. Test Conditions

No.	Test Item	Tested by	Remarks
1.	Conducted Output Power	Sean Yuan	See note 1
2.	Effective Radiated Power (ERP)	Sean Yuan	See note 1
3.	Equivalent Isotropic Radiated Power (EIRP)	Sean Yuan	See note 1
4.	Field Strength of Spurious Radiation	Sean Yuan	See note 1

Note:

1. The testing climatic conditions for temperature, humidity, and atmospheric pressure are within: 15~35℃, 30~70%, 86~106kPa.

11. Sample Calculations

For all conducted test items, the spectrum analyzer offset or transducer is derived from RF cable loss and attenuator factor. The offset or transducer is equal to the RF cable loss plus attenuator factor.

Offset = RF cable loss + attenuator factor

For example:

RF Cable loss = 3.0 dB

Attenuator factor = 24.0 dB

Offset = 3.0 + 24.0 dB = 27.0 dB

12. Measurement Uncertainty

No.	Test Item	Uncertainty	Remarks
1.	Radio Frequency	$\pm 0.72\%$	---
2.	Conducted RF Power	$\pm 1.06\text{dB}$	---
3.	Conducted Spurious emissions	$\pm 1.08\text{dB}$	---
5.	Radiated Emissions (30MHz- 1GHz)	$\pm 5.60\text{dB}$	---
6.	Radiated Emissions (1Hz - 18 GHz)	$\pm 5.22\text{dB}$	---
7.	Temperature	$\pm 0.8^{\circ}\text{C}$	---
8.	Humidity	$\pm 3.2\%$	---
9.	DC Voltages	$\pm 0.1\%$	---

Note:

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.
2. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

13. Test Items and Results


13.1 Conducted Output Power and ERP/EIRP Measurement

LIMIT

According to the requirements of FCC PART 22, 24, 27 and 90, the limits are as follows:

Rules	Items	Limits
§2.1046	Conducted Output Power	N/A
§22.913 (a) (5)	ERP	< 7 W
§27.50 (b) (10) §27.50 (c) (10)	ERP	< 3 W
§24.232 (c) §27.50 (h) (2)	EIRP	< 2 W
§27.50 (d) (4)	EIRP	< 1 W
§90.635 (b)	EIRP	< 100 W

BLOCK DIAGRAM OF TEST SETUP

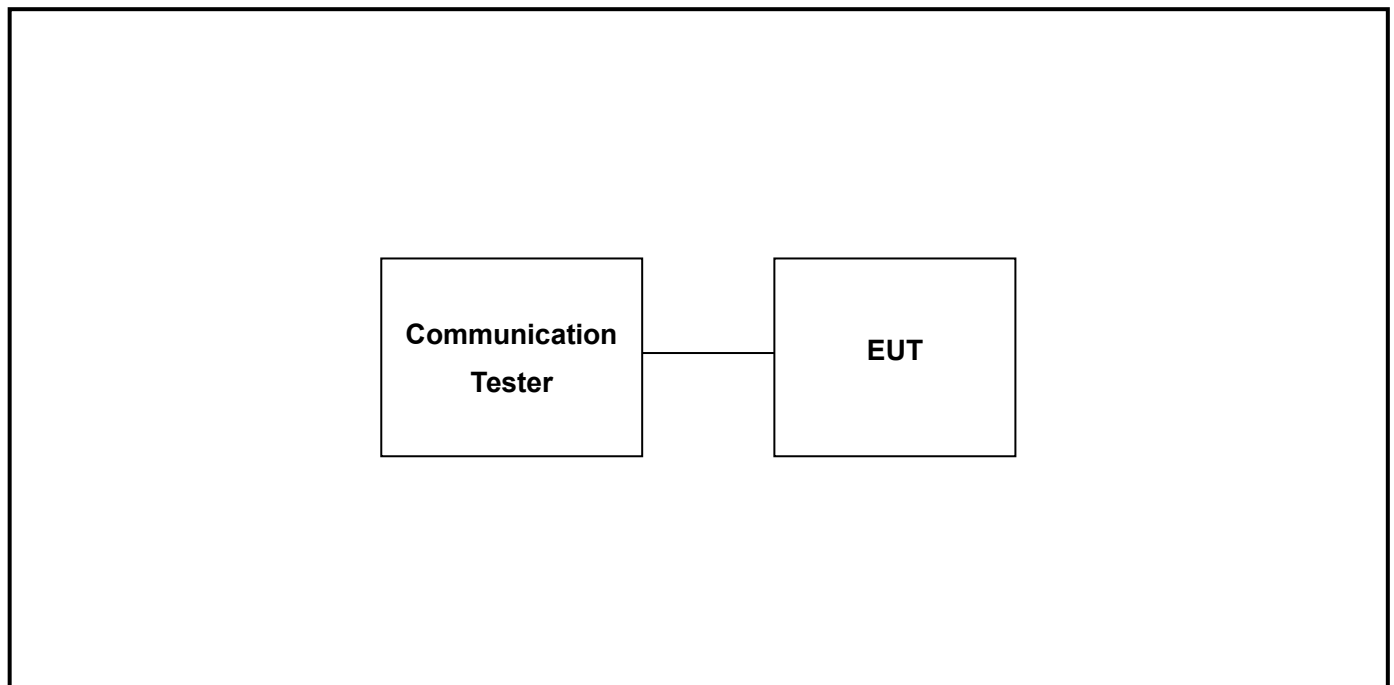

TEST PROCEDURES

- a. Follow ANSI C63.26 section 5.2.
- b. A base station simulator was used to establish communication with the EUT.
- c. Set the parameters to enforce EUT transmitting at the maximum power.
- d. Record the measured power in the radio frequency on the transmitter output terminals.

According to KDB 412172 D01 Power Approach,

$$\text{EIRP} = P_T + G_T - L_C, \text{ERP} = \text{EIRP} - 2.15$$

where,

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

TEST RESULTS

PASS

Please refer to the Appendix I (in separate documents) of the report.


13.2 Field Strength of Spurious Radiation Measurement

LIMIT


According to the requirements of §22.917 (a), §24.238 (a), §27.53 (c),(g),(h),(m)(4) and §90.691(a), the power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

BLOCK DIAGRAM OF TEST SETUP

For 30-1000MHz

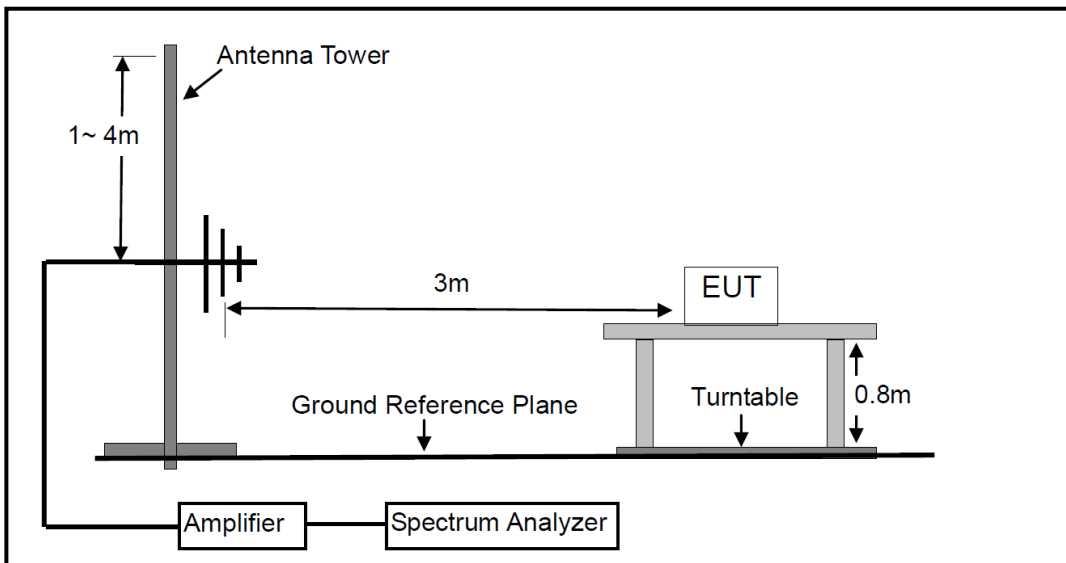

For Above 1GHz

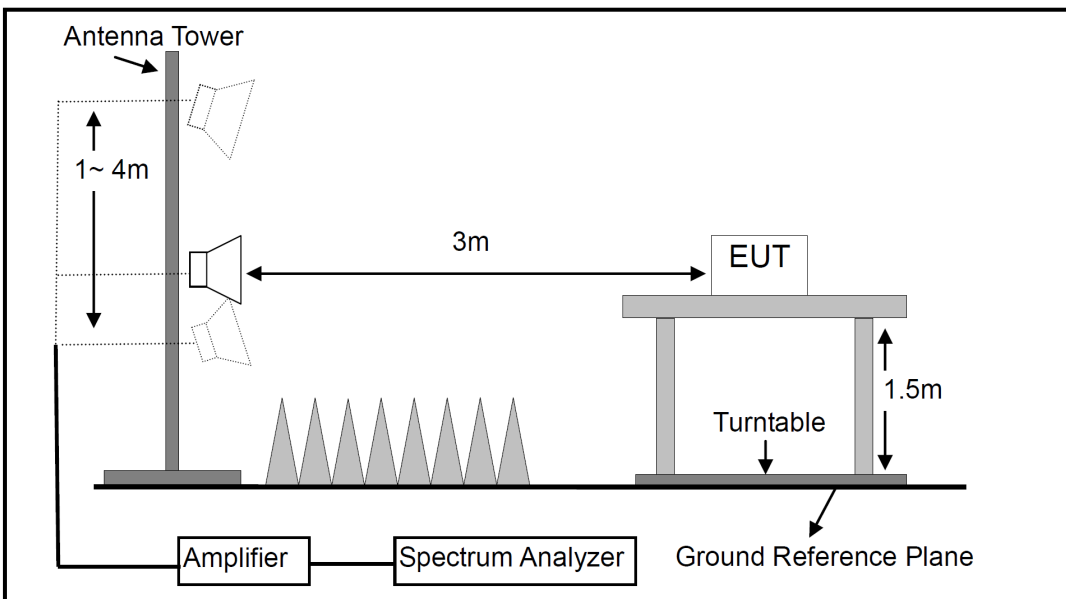

TEST PROCEDURES

- a. Follow ANSI C63.26 section 5.5.
- b. Below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room.
- c. For the radiated emission test above 1GHz:
- d. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- e. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- f. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- g. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.
- h. An antenna was substituted in place of the EUT and was driven by a signal generator.
- i. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- j. Record the output power at antenna port.

-
- k. Repeat above steps f and g for another polarization.
- l. Calculate power in dBm by the following formula:
- $$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
- $$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
- m. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- n. The radiation measurements are performed in X, Y, Z axis positioning, find out the worst axis positioning and record which it is worst case, and it was recorded in the report.
- o. Repeat above procedures until all frequencies measured was complete.

TEST RESULTS

PASS

Please refer to the Appendix I (in separate documents) of the report.

14. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI7	100837	Mar. 12, 2025	1 Year
2.	Antenna	Schwarzbeck	VULB9162	9162-010	Mar. 23, 2024	2 Year
3.	Spectrum Analyzer	Keysight	N9020A	MY54200831	Mar. 12, 2025	1 Year
4.	Spectrum Analyzer	Keysight	N9010B	MY62170254	Aug. 14, 2025	1 Year
5.	Signal generator	Agilent	E4421B	MY41000708	Mar. 12, 2025	1 Year
6.	Signal generator	Agilent	N5182A	MY48180739	Mar. 12, 2025	1 Year
7.	Power Sensor	DARE	RPR3006W	15I00041SNO 64	Mar. 12, 2025	1 Year
8.	Communication Tester	Rohde & Schwarz	CMW500	149004	Mar. 12, 2025	1 Year
9.	Horn Antenna	COM-Power	AH-118	071078	Mar. 23, 2024	1 Year
10.	Pre-Amplifier	HP	HP 8449B	3008A00964	Mar. 12, 2025	1 Year
11.	Pre-Amplifier	HP	HP 8447D	1145A00203	Mar. 12, 2025	1 Year
12.	Temperature & Humidity Chamber	Wanshun	SS-HWHS-80	N/A	Mar. 12, 2025	1 Year
13.	DC Source	Maynuo	MY8811	N/A	Mar. 13, 2025	1 Year
14.	Horn Antenna	COM-Power	AH-840	10100020	Mar. 23, 2024	2 Year
15.	Communication Tester	Rohde & Schwarz	CMU200	117060	Mar. 12, 2025	1 Year
16.	Test Software	EZ	EZ_EM NTC-3A1.1	N/A	N/A	N/A
17.	Test Software	MWRF	MTS 8310, V2.0.0.0	N/A	N/A	N/A

Note: For photographs of EUT and measurement, please refer to appendix in separate documents.

---End---