

Date: 2026/3/26

01_LTE Band 71_20M_QPSK_1RB_0Offset_Back_5mm_Ch133297


Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid
 AntennaCfg:SISO; Frequency: 680.5 MHz; Duty Cycle: 1:1
 Medium: Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.866$ S/m; $\epsilon_r = 45.3$
 Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.53, 10.34, 10.38); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
 SAR (1g) = 0.114 W/kg; SAR (10g) = 0.077 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
 Power Drift = -0.03 dB
 SAR (1g) = 0.112 W/kg; SAR (10g) = 0.074 W/kg
 Smallest distance from peaks to all points 3 dB below = 17.8 mm
 Ratio of SAR at M2 to SAR at M1 = 89.1 %

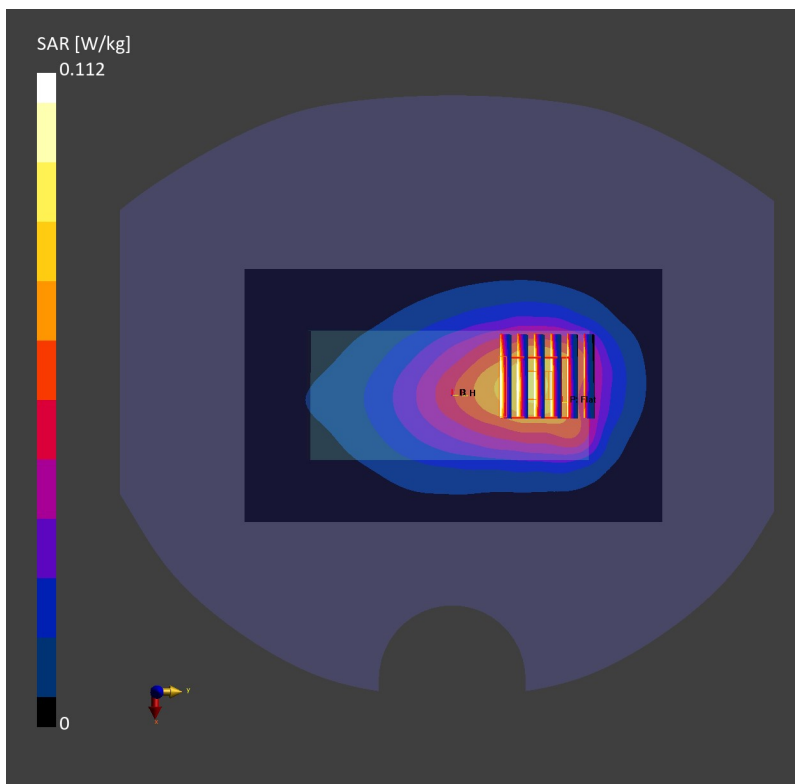

Date: 2026/3/26

02_LTE Band 12_10M_QPSK_1RB_0Offset_Back_5mm_Ch23095


Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Mid
 AntennaCfg:SISO; Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium: Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.875$ S/m; $\epsilon_r = 45.2$
 Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.53, 10.34, 10.38); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
 SAR (1g) = 0.204 W/kg; SAR (10g) = 0.132 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm
 Power Drift = -0.06 dB
 SAR (1g) = 0.214 W/kg; SAR (10g) = 0.135 W/kg
 Smallest distance from peaks to all points 3 dB below = 4.6 mm
 Ratio of SAR at M2 to SAR at M1 = 87.2 %

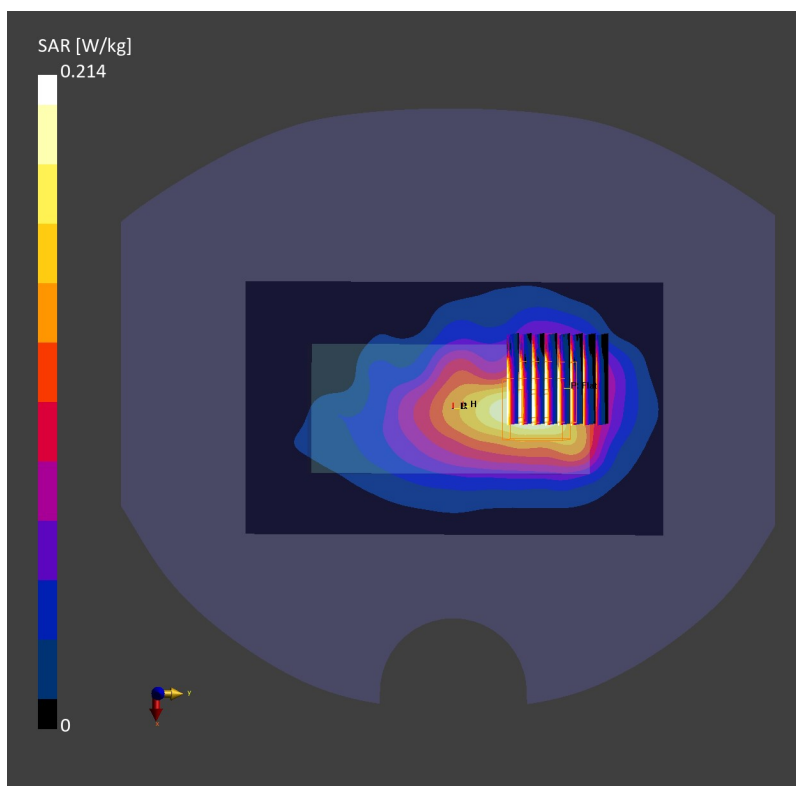

Date: 2026/3/26

03_LTE Band 13_10M_QPSK_1RB_0Offset_Back_5mm_Ch23230


Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Mid
 AntennaCfg:SISO; Frequency: 782.0 MHz; Duty Cycle: 1:1
 Medium: Medium parameters used: $f = 782.0$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 45.1$
 Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.53, 10.34, 10.38); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
 SAR (1g) = 0.384 W/kg; SAR (10g) = 0.238 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
 Power Drift = -0.01 dB
 SAR (1g) = 0.595 W/kg; SAR (10g) = 0.382 W/kg
 Smallest distance from peaks to all points 3 dB below = 17.2 mm
 Ratio of SAR at M2 to SAR at M1 = 87.1 %

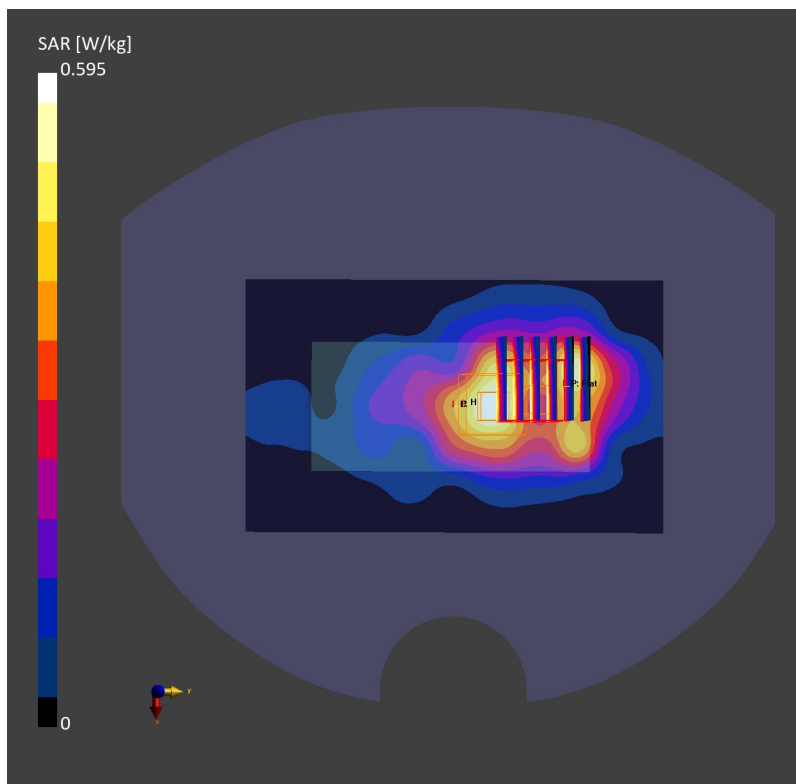

Date: 2026/3/26

04_LTE Band 14_10M_QPSK_1RB_0Offset_Back_5mm_Ch23330


Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Mid
AntennaCfg:SISO; Frequency: 793.0 MHz; Duty Cycle: 1:1
Medium: Medium parameters used: $f = 793.0$ MHz; $\sigma = 0.907$ S/m; $\epsilon_r = 45.0$
Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.53, 10.34, 10.38); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.430 W/kg; SAR (10g) = 0.276 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.16 dB
SAR (1g) = 0.415 W/kg; SAR (10g) = 0.231 W/kg
Smallest distance from peaks to all points 3 dB below = 6.8 mm
Ratio of SAR at M2 to SAR at M1 = 82.6 %

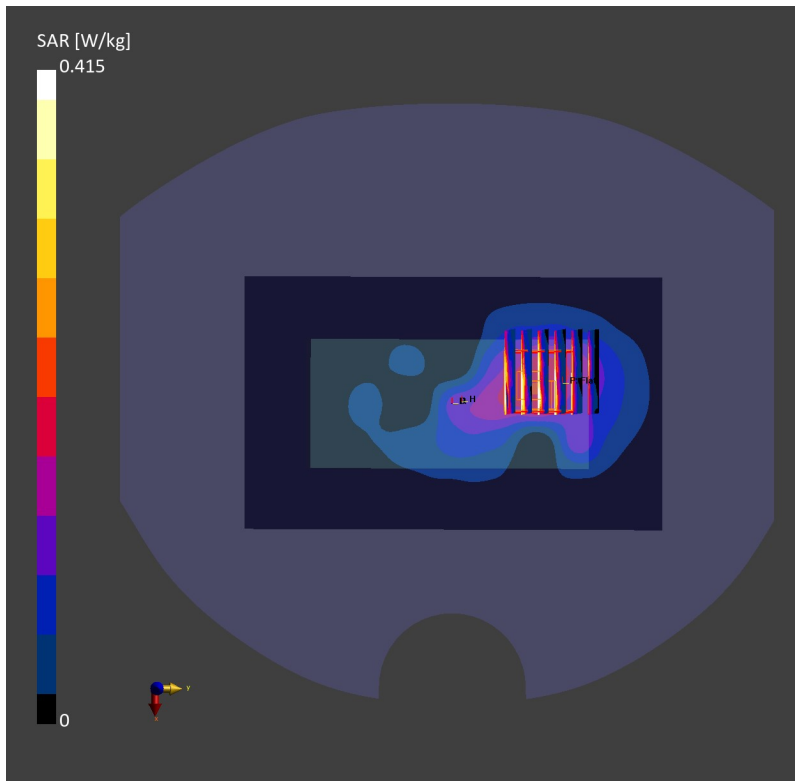

Date: 2026/3/26

05_FR1 n71_20M_QPSK_1RB_1Offset_DFT-15_Back_5mm_Ch136100


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)
 RBPosition:Mid AntennaCfg:SISO; Frequency: 680.5 MHz; Duty Cycle: 1:1
 Medium: Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.866$ S/m; $\epsilon_r = 45.3$
 Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.53, 10.34, 10.38); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
 SAR (1g) = 0.117 W/kg; SAR (10g) = 0.080 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
 Power Drift = -0.12 dB
 SAR (1g) = 0.117 W/kg; SAR (10g) = 0.077 W/kg
 Smallest distance from peaks to all points 3 dB below = 15.6 mm
 Ratio of SAR at M2 to SAR at M1 = 89.0 %

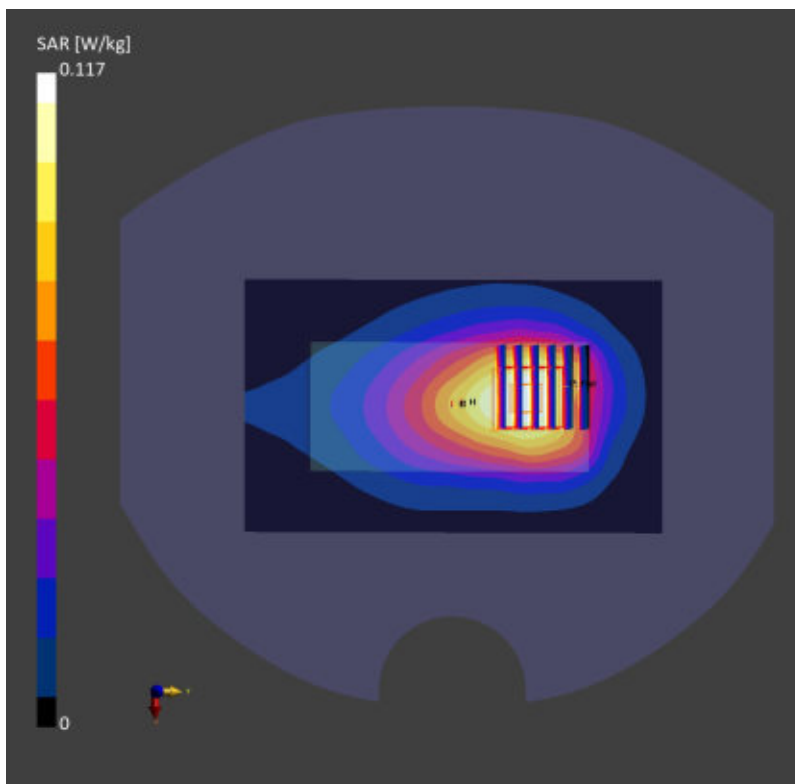

Date: 2026/3/26

06_FR1 n12_15M_QPSK_1RB_1Offset_DFT-15_Back_5mm_Ch141500


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)
 RBPosition:Mid AntennaCfg:SISO; Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium: Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.875$ S/m; $\epsilon_r = 45.2$
 Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.53, 10.34, 10.38); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 FDD, 10930-AAC

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
 SAR (1g) = 0.236 W/kg; SAR (10g) = 0.160 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
 Power Drift = 0.08 dB
 SAR (1g) = 0.239 W/kg; SAR (10g) = 0.159 W/kg
 Smallest distance from peaks to all points 3 dB below = 15.7 mm
 Ratio of SAR at M2 to SAR at M1 = 86.0 %

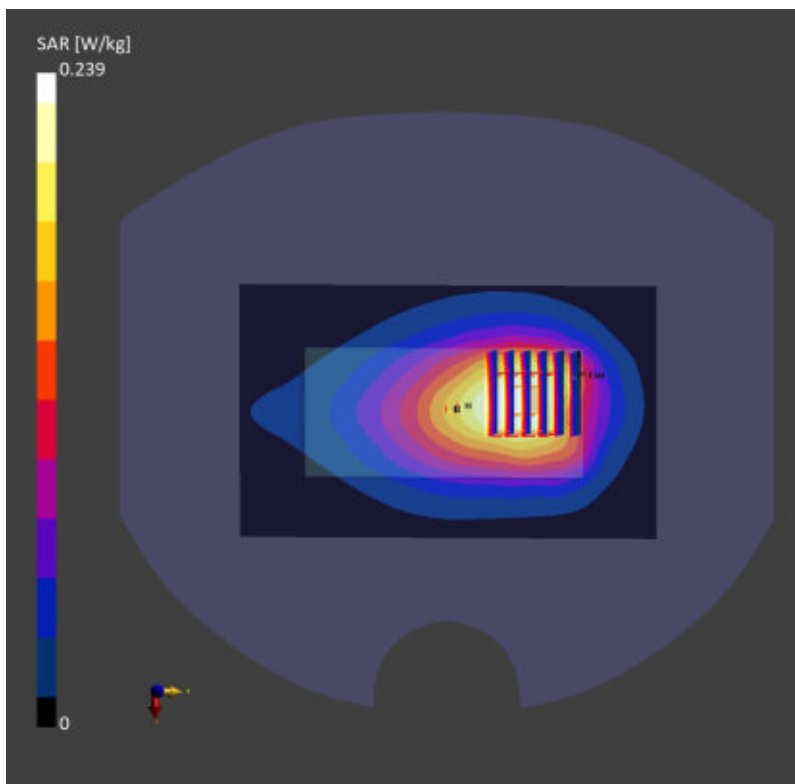

Date: 2026/3/26

07_FR1 n14_10M_QPSK_1RB_1Offset_DFT-15_Back_5mm_Ch158600


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)
 RBPosition:Mid AntennaCfg:SISO; Frequency: 793.0 MHz; Duty Cycle: 1:1
 Medium: Medium parameters used: $f = 793.0$ MHz; $\sigma = 0.907$ S/m; $\epsilon_r = 45.0$
 Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.53, 10.34, 10.38); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
 SAR (1g) = 0.369 W/kg; SAR (10g) = 0.248 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
 Power Drift = -0.08 dB
 SAR (1g) = 0.372 W/kg; SAR (10g) = 0.244 W/kg
 Smallest distance from peaks to all points 3 dB below = 14.4 mm
 Ratio of SAR at M2 to SAR at M1 = 85.4 %

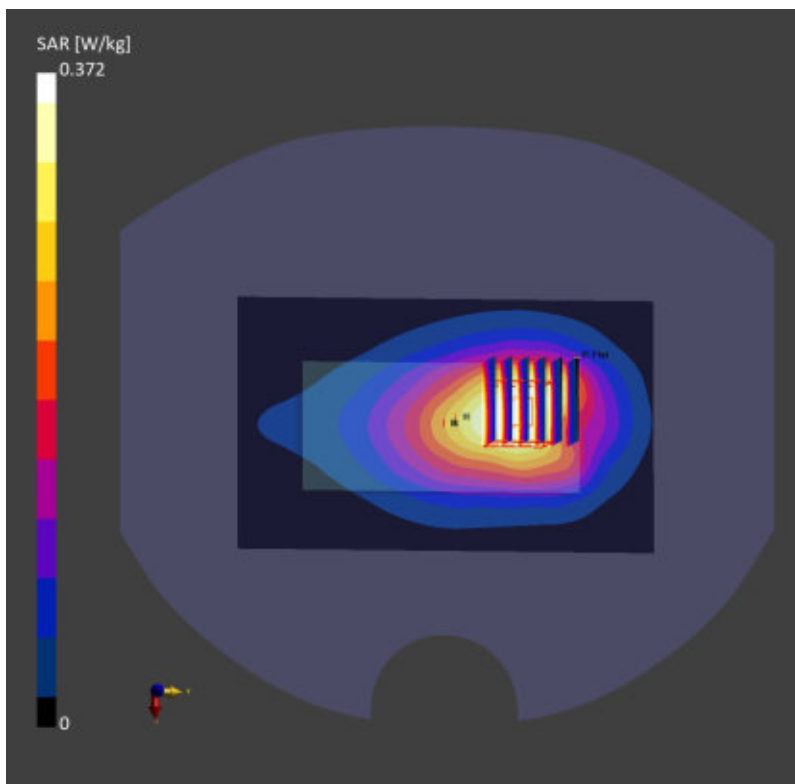

Date: 2026/3/24

08_LTE Band 26_15M_QPSK_1RB_0Offset_Back_5mm_Ch26865


Communication System: LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK) RBPosition:Mid
AntennaCfg:SISO; Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 44.9$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.23, 10.04, 10.08); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10181-CAF

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.238 W/kg; SAR (10g) = 0.147 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 2.6 mm x 2.6 mm x 1.2 mm
Power Drift = 0.02 dB
SAR (1g) = 0.205 W/kg; SAR (10g) = 0.124 W/kg
Smallest distance from peaks to all points 3 dB below = 8.6 mm
Ratio of SAR at M2 to SAR at M1 = 71.6 %

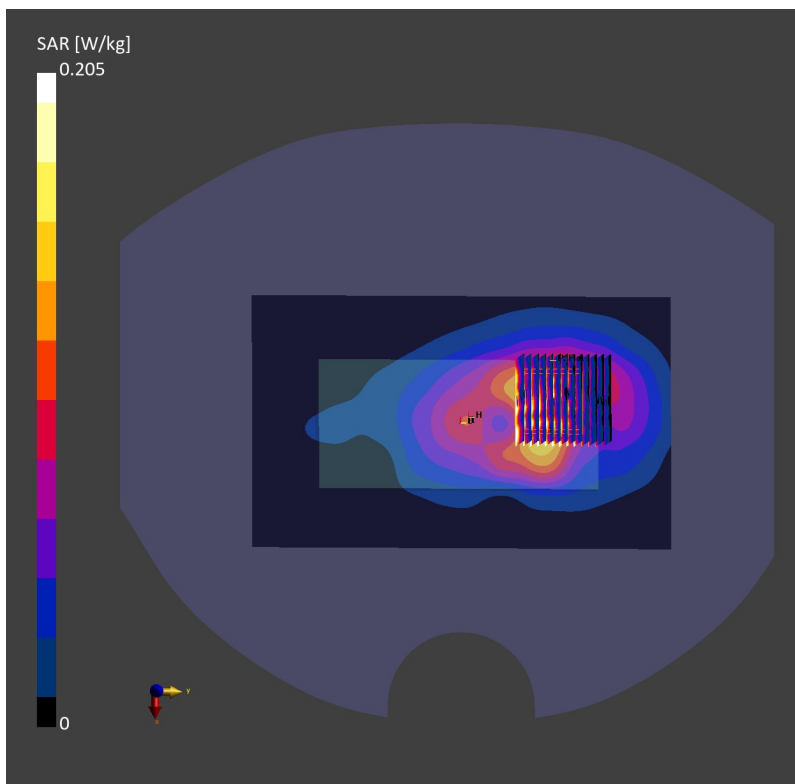

Date: 2026/3/24

09_FR1 n5_20M_QPSK_50RB_28Offset_DFT-15_Back_5mm_Ch167300


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)
RBPosition:Mid AntennaCfg:SISO; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 44.8$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.23, 10.04, 10.08); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.302 W/kg; SAR (10g) = 0.199 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.16 dB
SAR (1g) = 0.304 W/kg; SAR (10g) = 0.199 W/kg
Smallest distance from peaks to all points 3 dB below = 14.9 mm
Ratio of SAR at M2 to SAR at M1 = 84.3 %

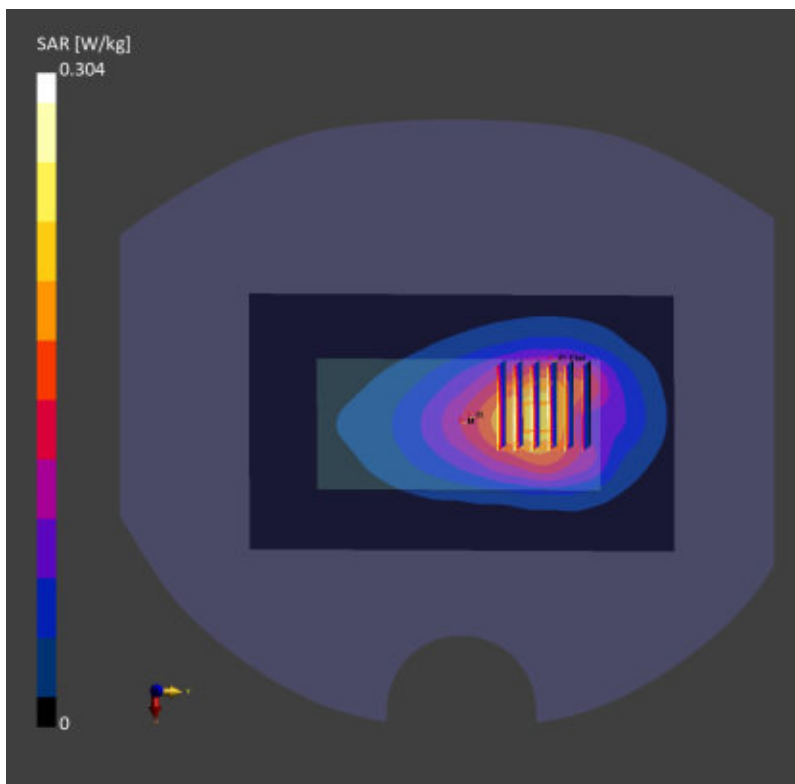

Date: 2026/3/23

10_LTE Band 66_20M_QPSK_1RB_0Offset_Back_5mm_Ch132322


Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid
 AntennaCfg:SISO; Frequency: 1745.0 MHz; Duty Cycle: 1:1
 Medium: Medium parameters used: $f = 1745.0$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 43.0$
 Ambient Temperature: 23.2°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.61, 8.45, 8.49); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
 SAR (1g) = 0.694 W/kg; SAR (10g) = 0.397 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
 Power Drift = -0.03 dB
 SAR (1g) = 0.713 W/kg; SAR (10g) = 0.410 W/kg
 Smallest distance from peaks to all points 3 dB below = 11.4 mm
 Ratio of SAR at M2 to SAR at M1 = 87.0 %

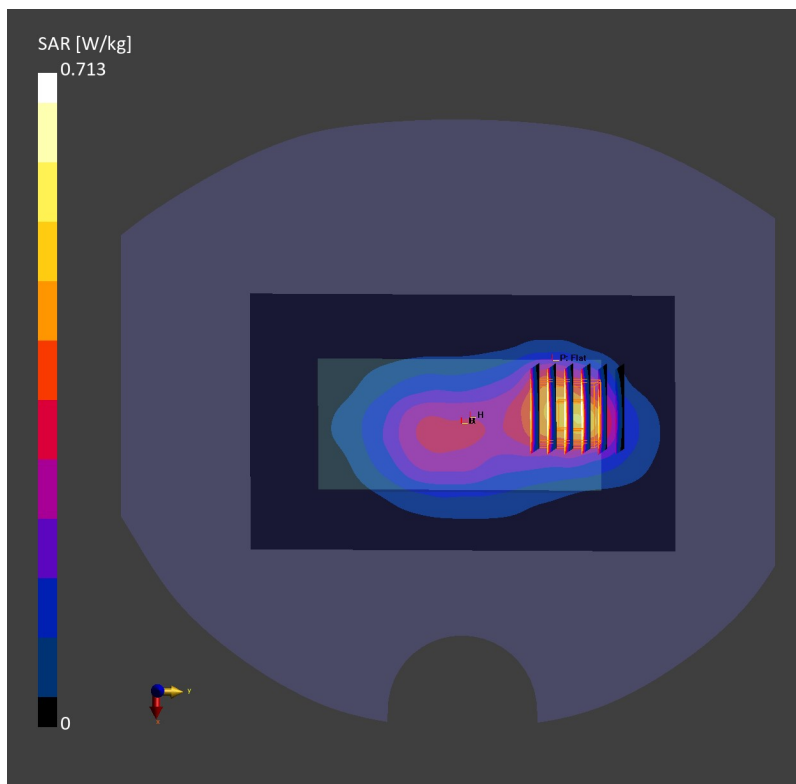

Date: 2026/3/23

11_FR1 n66_30M_QPSK_80RB_40Offset_DFT-15_Back_5mm_Ch349000

Communication System: 5G NR (DFT-s-OFDM, 1 RB, 30 MHz, QPSK, 15 kHz)

RBPosition:Mid AntennaCfg:SISO; Frequency: 1745.0 MHz; Duty Cycle: 1:1

Medium: Medium parameters used: $f = 1745.0$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 43.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.61, 8.45, 8.49); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 FDD, 10933-AAC

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.449 W/kg; SAR (10g) = 0.253 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.17 dB

SAR (1g) = 0.449 W/kg; SAR (10g) = 0.253 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 80.6 %

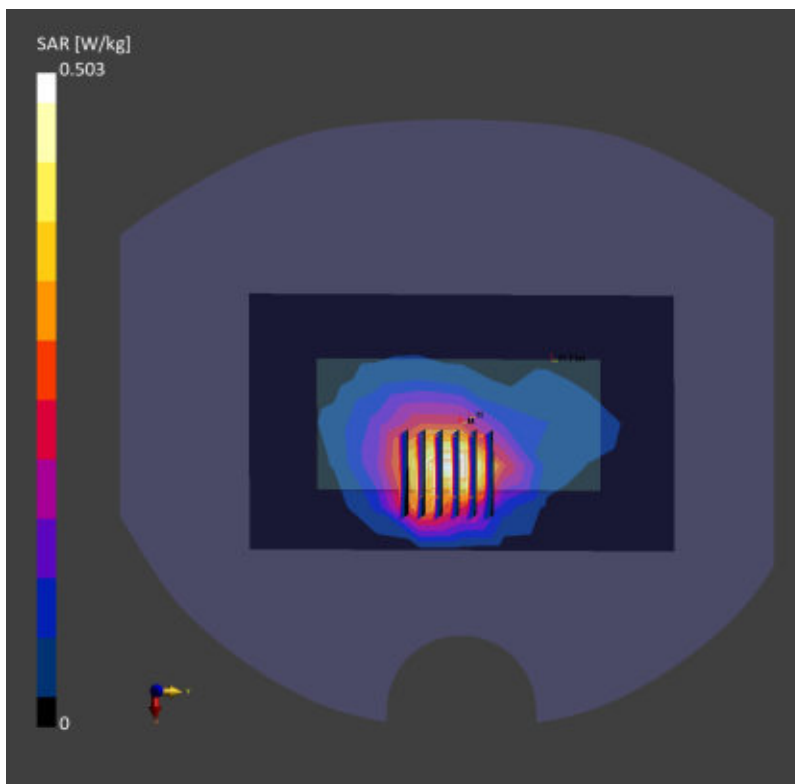

Date: 2026/4/8

12_LTE Band 25_20M_QPSK_1RB_0Offset_Back_5mm_Ch26340


Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid
AntennaCfg:SISO; Frequency: 1880.0 MHz; Duty Cycle: 1:1
Medium: Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.47$ S/m; $\epsilon_r = 42.7$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.33, 8.18, 8.21); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.261 W/kg; SAR (10g) = 0.139 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 2.9 mm x 2.9 mm x 1.2 mm
Power Drift = 0.12 dB
SAR (1g) = 0.273 W/kg; SAR (10g) = 0.150 W/kg
Smallest distance from peaks to all points 3 dB below = 8.7 mm
Ratio of SAR at M2 to SAR at M1 = 90.4 %

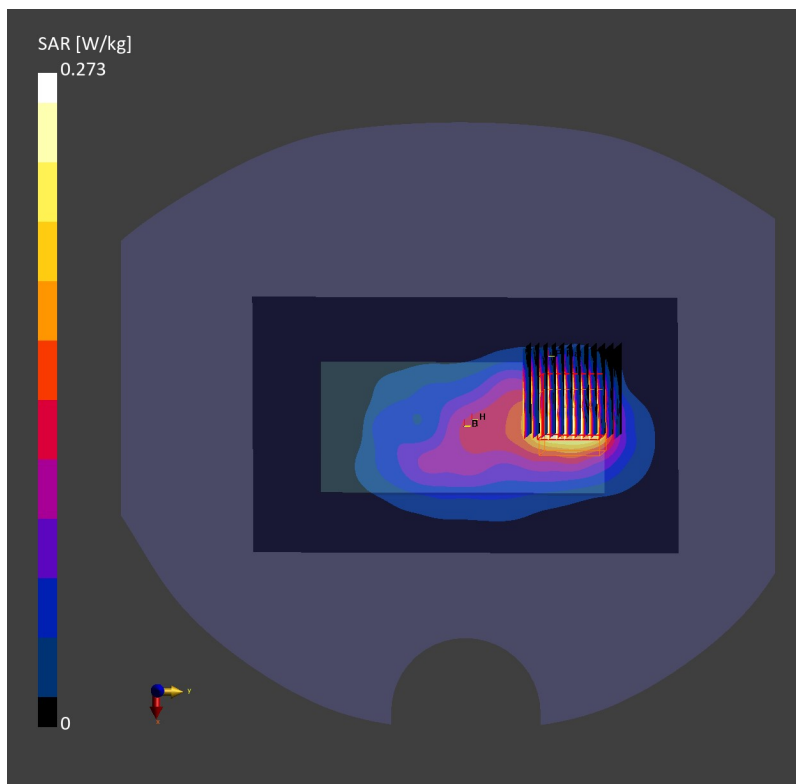

Date: 2026/4/8

13_LTE Band 2_20M_QPSK_1RB_0Offset_Back_5mm_Ch18900


Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid
 AntennaCfg:SISO; Frequency: 1880.0 MHz; Duty Cycle: 1:1
 Medium: Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.47$ S/m; $\epsilon_r = 42.7$
 Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.33, 8.18, 8.21); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
 SAR (1g) = 0.269 W/kg; SAR (10g) = 0.152 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
 Power Drift = -0.12 dB
 SAR (1g) = 0.279 W/kg; SAR (10g) = 0.160 W/kg
 Smallest distance from peaks to all points 3 dB below = 12.0 mm
 Ratio of SAR at M2 to SAR at M1 = 88.1 %

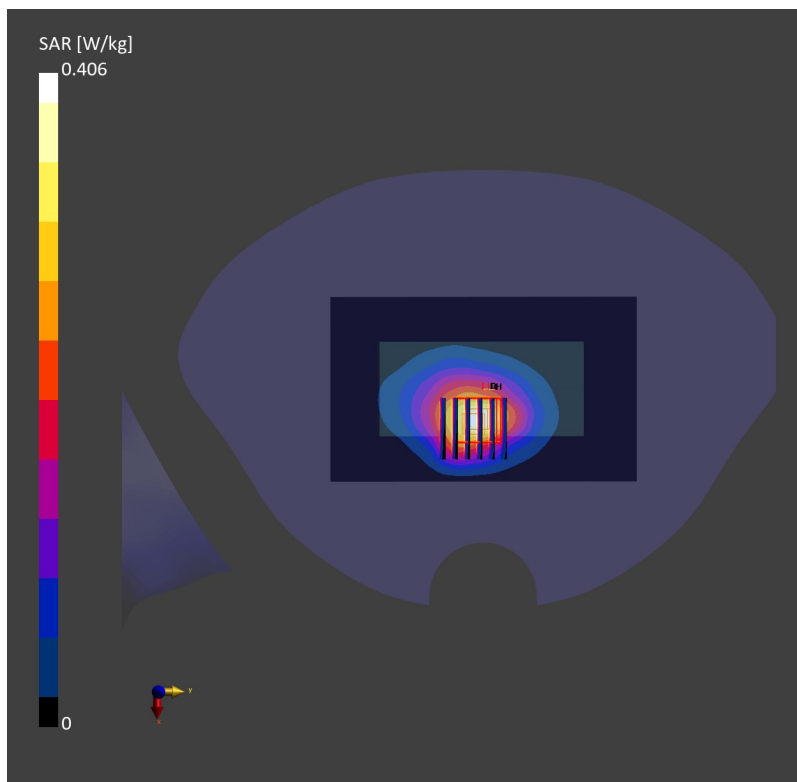

Date: 2026/4/8

14_FR1 n25_30M_QPSK_1RB_1Offset_DFT-15_Back_5mm_Ch376500


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 30 MHz, QPSK, 15 kHz)
RBPosition:Mid AntennaCfg:SISO; Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium: Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.47$ S/m; $\epsilon_r = 42.7$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.33, 8.18, 8.21); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 FDD, 10933-AAC

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.374 W/kg; SAR (10g) = 0.208 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.07 dB
SAR (1g) = 0.406 W/kg; SAR (10g) = 0.222 W/kg
Smallest distance from peaks to all points 3 dB below = 10.3 mm
Ratio of SAR at M2 to SAR at M1 = 83.2 %

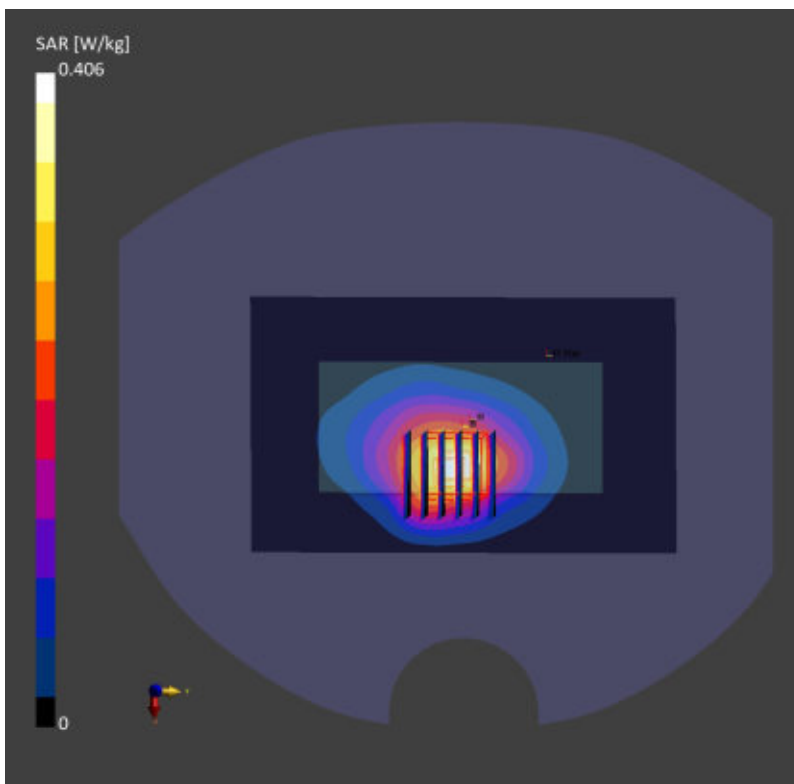

Date: 2026/4/6

15_LTE Band 30_10M_QPSK_1RB_0Offset_Back_5mm_Ch27710


Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Mid
 AntennaCfg:SISO; Frequency: 2310.0 MHz; Duty Cycle: 1:1
 Medium: Medium parameters used: $f = 2310.0$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 42.1$
 Ambient Temperature: 23.9°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.24, 8.09, 8.13); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (80.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
 SAR (1g) = 0.225 W/kg; SAR (10g) = 0.121 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
 Power Drift = 0.11 dB
 SAR (1g) = 0.209 W/kg; SAR (10g) = 0.105 W/kg
 Smallest distance from peaks to all points 3 dB below = 7.1 mm
 Ratio of SAR at M2 to SAR at M1 = 79.2 %

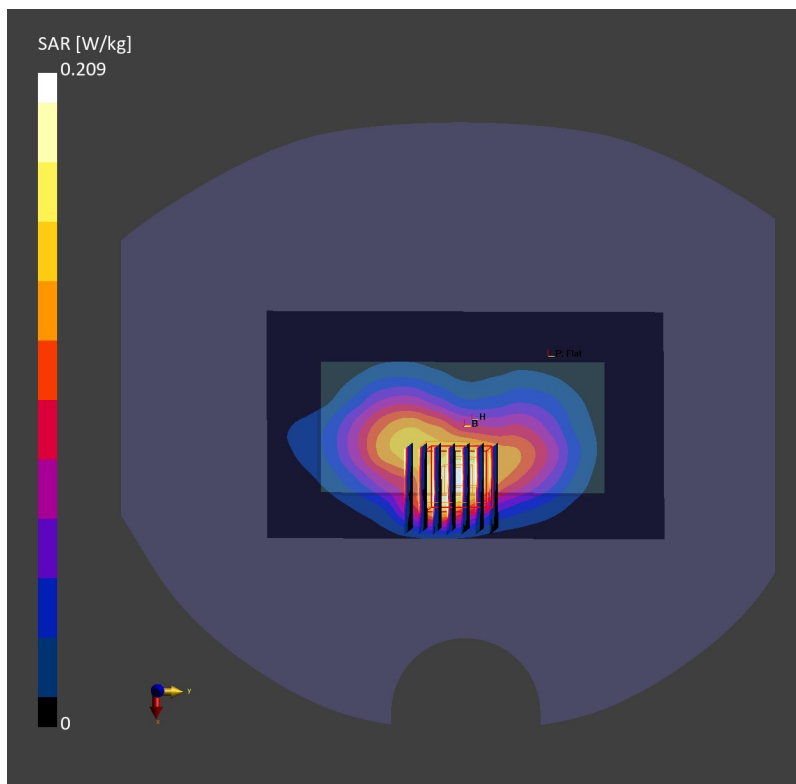

Date: 2026/4/6

16_FR1 n30_10M_QPSK_1RB_1Offset_DFT-15_Back_5mm_Ch462000


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)
RBPosition:Mid AntennaCfg:SISO; Frequency: 2310.0 MHz; Duty Cycle: 1:1
Medium: Medium parameters used: $f = 2310.0$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 42.1$
Ambient Temperature: 23.9°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.24, 8.09, 8.13); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (80.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.238 W/kg; SAR (10g) = 0.126 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.05 dB
SAR (1g) = 0.242 W/kg; SAR (10g) = 0.121 W/kg
Smallest distance from peaks to all points 3 dB below = 7.7 mm
Ratio of SAR at M2 to SAR at M1 = 78.7 %

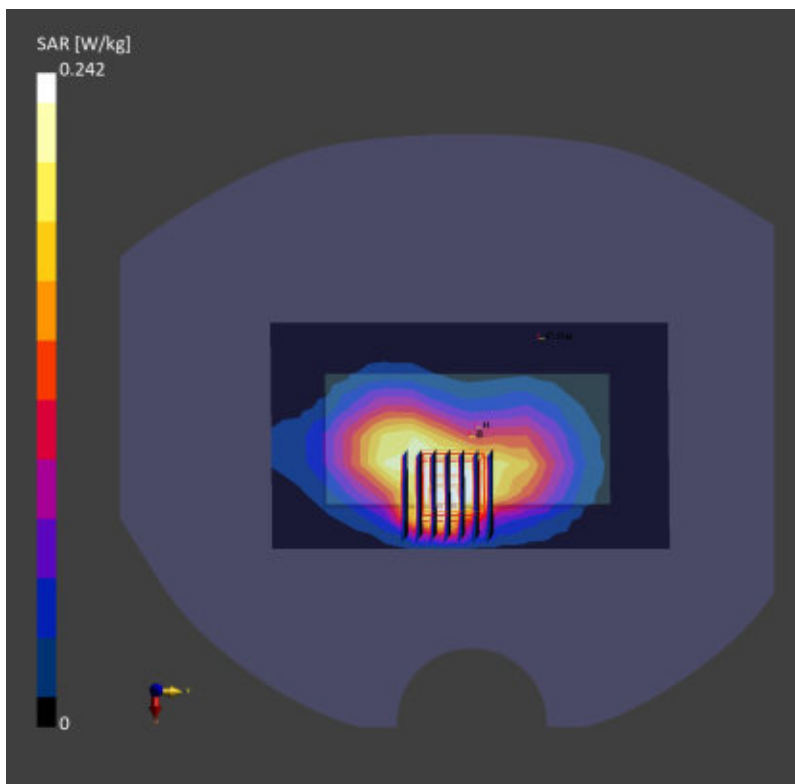

Date: 2026/4/14

17_LTE Band 7_20M_QPSK_1RB_0Offset_Back_5mm_Ch21100


Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid
 AntennaCfg:SISO; Frequency: 2535.0 MHz; Duty Cycle: 1:1
 Medium: Medium parameters used: $f = 2535.0$ MHz; $\sigma = 1.96$ S/m; $\epsilon_r = 41.7$
 Ambient Temperature: 23.7°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.9, 7.75, 7.79); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10169-CAF

Area Scan (80.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
 SAR (1g) = 0.457 W/kg; SAR (10g) = 0.214 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
 Power Drift = 0.05 dB
 SAR (1g) = 0.506 W/kg; SAR (10g) = 0.190 W/kg
 Smallest distance from peaks to all points 3 dB below = 5.3 mm
 Ratio of SAR at M2 to SAR at M1 = 79.8 %

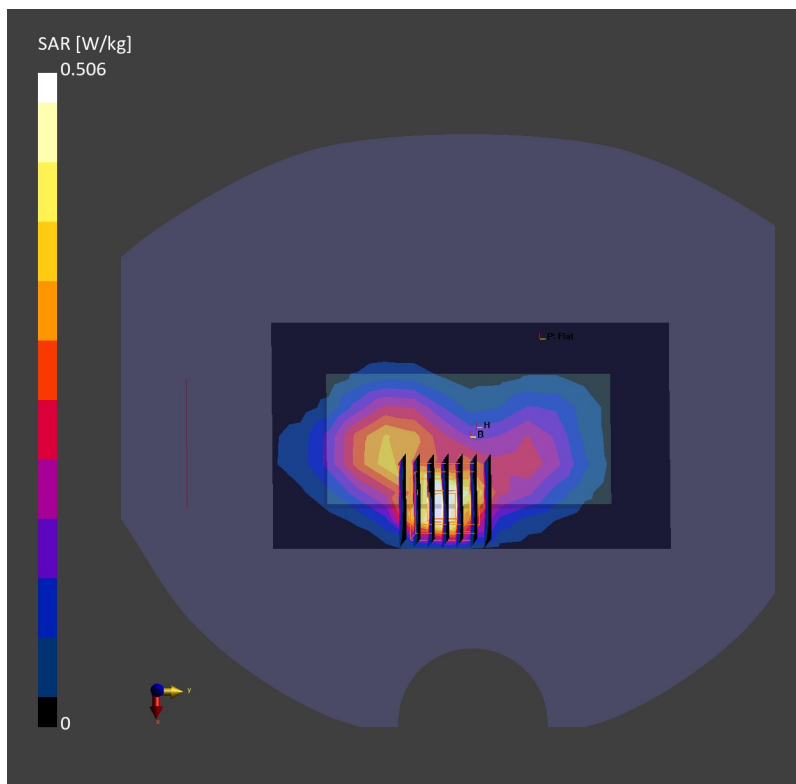

Date: 2026/4/14

18_LTE Band 41_20M_QPSK_1RB_0Offset_Front_5mm_Ch40185


Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid
 AntennaCfg:SISO; Frequency: 2549.5 MHz; Duty Cycle: 1:1.59
 Medium: Medium parameters used: $f = 2549.5$ MHz; $\sigma = 1.98$ S/m; $\epsilon_r = 41.6$
 Ambient Temperature: 23.7°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.9, 7.75, 7.79); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-TDD, 10172-CAH

Area Scan (80.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
 SAR (1g) = 0.017 W/kg; SAR (10g) = 0.009 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
 Power Drift = -0.06 dB
 SAR (1g) = 0.014 W/kg; SAR (10g) = 0.008 W/kg
 Smallest distance from peaks to all points 3 dB below = 5.0 mm
 Ratio of SAR at M2 to SAR at M1 = 58.9 %

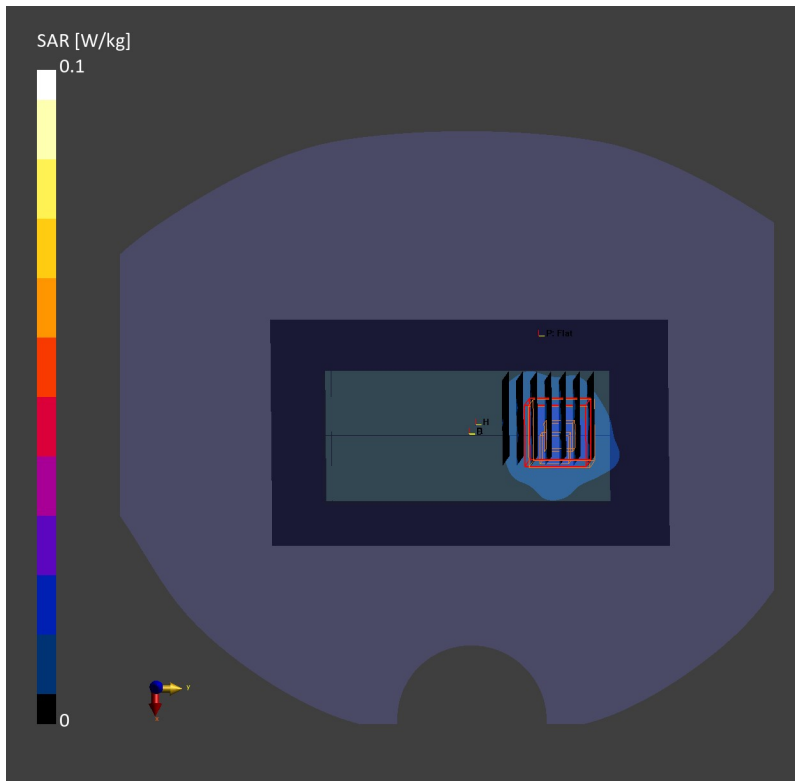

Date: 2026/4/14

19_FR1 n7_20M_QPSK_1RB_1Offset_DFT-15_Back_5mm_Ch507000


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)
RBPosition:Mid AntennaCfg:SISO; Frequency: 2535.0 MHz; Duty Cycle: 1:1
Medium: Medium parameters used: $f = 2535.0$ MHz; $\sigma = 1.96$ S/m; $\epsilon_r = 41.7$
Ambient Temperature: 23.7°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.9, 7.75, 7.79); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (80.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.499 W/kg; SAR (10g) = 0.235 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.16 dB
SAR (1g) = 0.557 W/kg; SAR (10g) = 0.229 W/kg
Smallest distance from peaks to all points 3 dB below = 6.8 mm
Ratio of SAR at M2 to SAR at M1 = 79.4 %

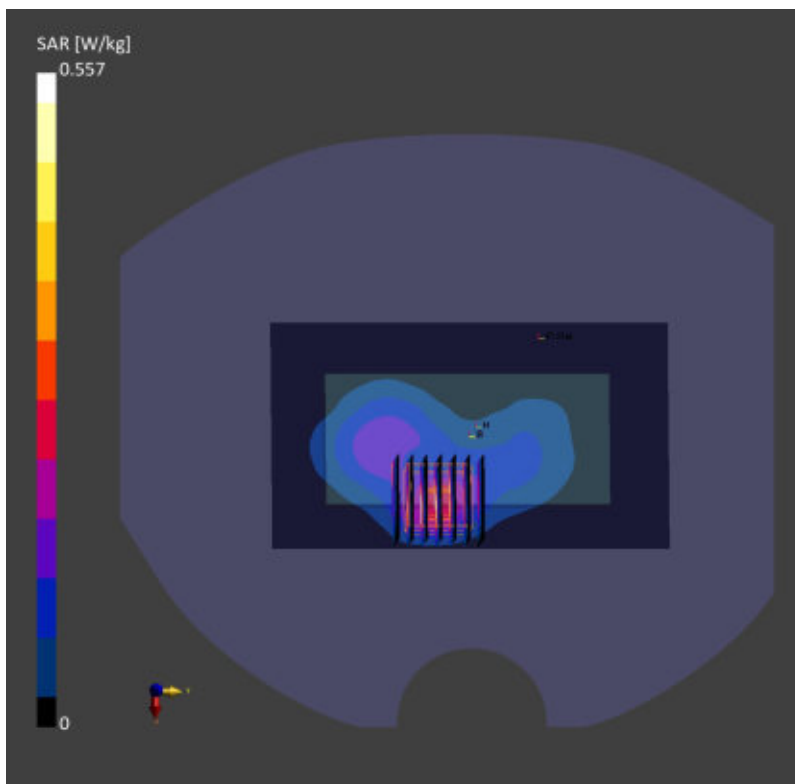

Date: 2026/4/14

20_FR1 n41_100M_QPSK_1RB_135Offset_DFT-30_Back_5mm_Ch518598


Communication System: 5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:Mid
 AntennaCfg:SISO; Frequency: 2593.0 MHz; Duty Cycle: 1:1
 Medium: Medium parameters used: $f = 2593.0$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 37.7$
 Ambient Temperature: 23.7°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.9, 7.75, 7.79); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 TDD, 10803-AAF

Area Scan (80.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
 SAR (1g) = 0.652 W/kg; SAR (10g) = 0.336 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
 Power Drift = 0.15 dB
 SAR (1g) = 0.712 W/kg; SAR (10g) = 0.357 W/kg
 Smallest distance from peaks to all points 3 dB below = 7.1 mm
 Ratio of SAR at M2 to SAR at M1 = 86.6 %

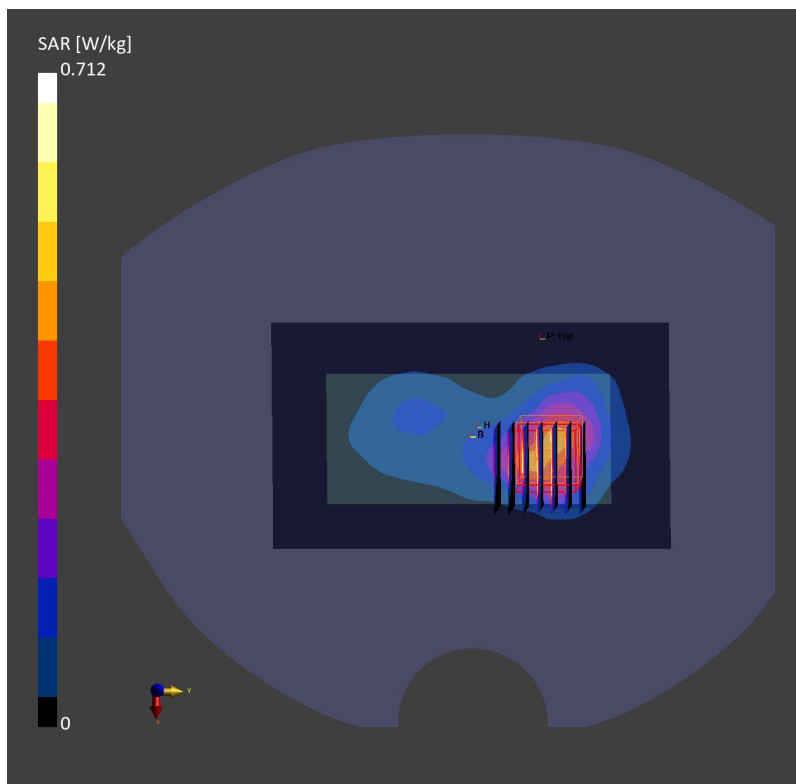

Date: 2026/4/13

21_LTE Band 42_20M_QPSK_1RB_0Offset_Top Side_5mm_Ch43340


Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid
AntennaCfg:SISO; Frequency: 3575.0 MHz; Duty Cycle: 1:1.59
Medium: Medium parameters used: $f = 3575.0$ MHz; $\sigma = 2.89$ S/m; $\epsilon_r = 39.7$
Ambient Temperature: 23.1°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.99, 6.86, 6.89); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-TDD, 10172-CAH

Area Scan (60.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.143 W/kg; SAR (10g) = 0.059 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm
Power Drift = -0.13 dB
SAR (1g) = 0.121 W/kg; SAR (10g) = 0.050 W/kg
Smallest distance from peaks to all points 3 dB below = 5.0 mm
Ratio of SAR at M2 to SAR at M1 = 34.0 %

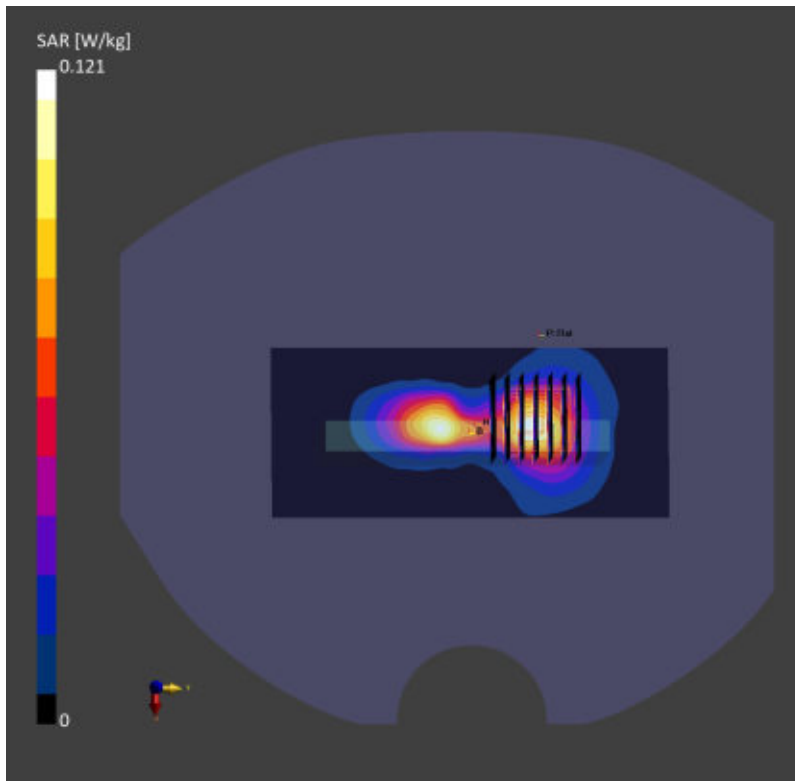

Date: 2026/4/12

22_LTE Band 43_20M_QPSK_1RB_0Offset_Top Side_5mm_Ch44090


Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid
 AntennaCfg:SISO; Frequency: 3650 MHz; Duty Cycle: 1:1.59
 Medium: Medium parameters used: $f = 3662.5$ MHz; $\sigma = 2.98$ S/m; $\epsilon_r = 39.6$
 Ambient Temperature: 23.9°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.85, 6.72, 6.76); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-TDD, 10172-CAH

Area Scan (60.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
 SAR (1g) = 0.221 W/kg; SAR (10g) = 0.091 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm
 Power Drift = -0.04 dB
 SAR (1g) = 0.236 W/kg; SAR (10g) = 0.099 W/kg
 Smallest distance from peaks to all points 3 dB below = 8.7 mm
 Ratio of SAR at M2 to SAR at M1 = 78.3 %

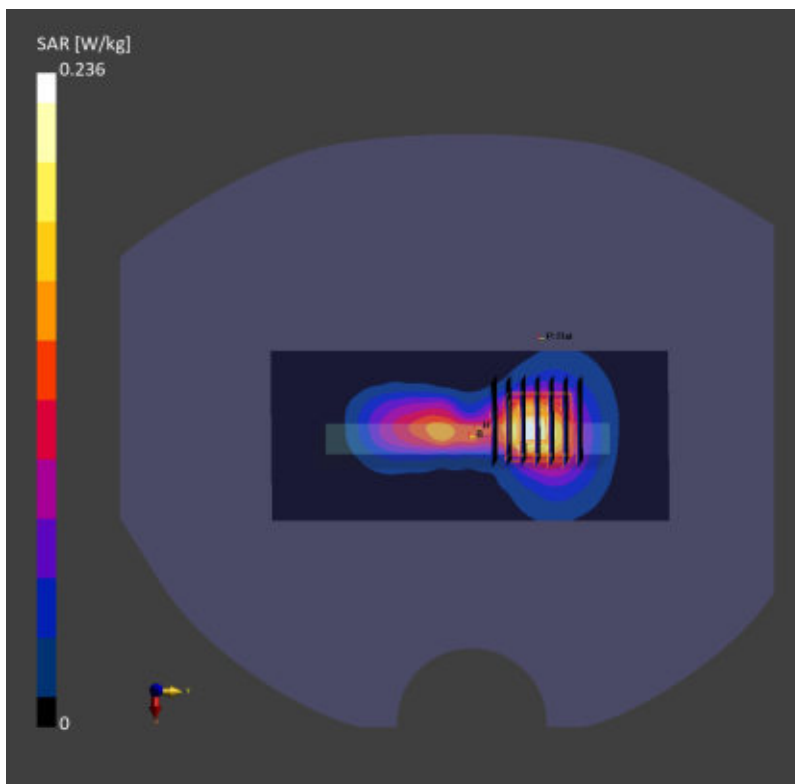

Date: 2026/4/12

23_LTE Band 48_20M_QPSK_1RB_0Offset_Top Side_5mm_Ch55830


Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid
AntennaCfg:SISO; Frequency: 3609.0 MHz; Duty Cycle: 1:1.59
Medium: Medium parameters used: $f = 3609.0$ MHz; $\sigma = 2.97$ S/m; $\epsilon_r = 36.7$
Ambient Temperature: 23.9°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.85, 6.72, 6.76); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025-11-28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-TDD, 10172-CAH

Area Scan (60.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.045 W/kg; SAR (10g) = 0.015 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.7 mm x 4.7 mm x 1.4 mm
Power Drift = -0.09 dB
SAR (1g) = 0.163 W/kg; SAR (10g) = 0.082 W/kg
Smallest distance from peaks to all points 3 dB below = 4.7 mm
Ratio of SAR at M2 to SAR at M1 = 78.2 %

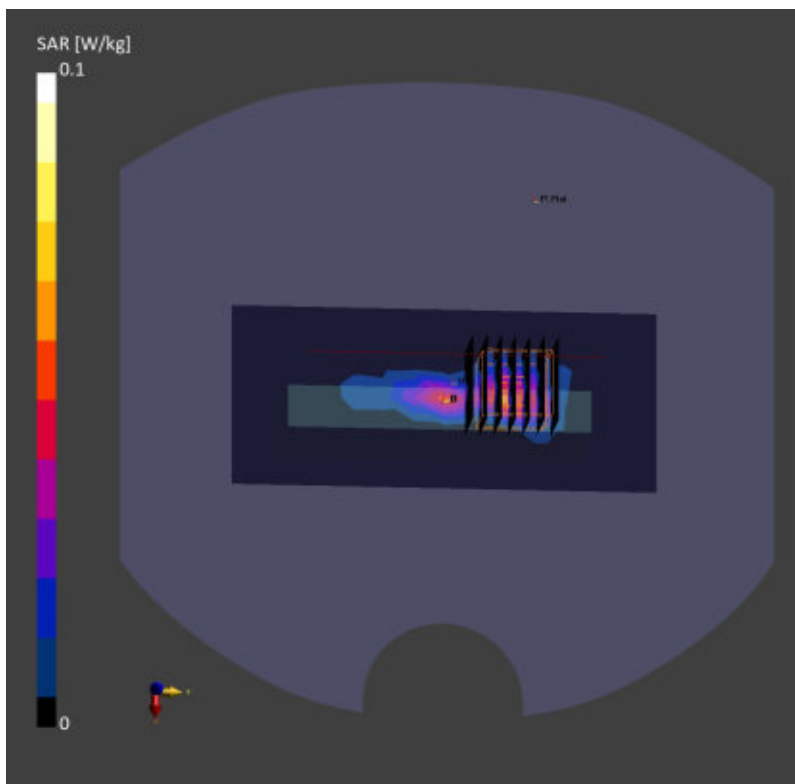

Date: 2026/4/12

24_FR1 n48_40M_QPSK_50RB_28Offset_DFT-30_Top Side_5mm_Ch641666


Communication System: 5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz) RBPosition:Mid
 AntennaCfg:SISO; Frequency: 3625.0 MHz; Duty Cycle: 1:1.59
 Medium: Medium parameters used: $f = 3625.0$ MHz; $\sigma = 2.94$ S/m; $\epsilon_r = 39.6$
 Ambient Temperature: 23.9°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.85, 6.72, 6.76); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 TDD, 10797-AAF

Area Scan (60.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
 SAR (1g) = 0.333 W/kg; SAR (10g) = 0.136 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm
 Power Drift = -0.12 dB
 SAR (1g) = 0.342 W/kg; SAR (10g) = 0.139 W/kg
 Smallest distance from peaks to all points 3 dB below = 8.6 mm
 Ratio of SAR at M2 to SAR at M1 = 77.7 %

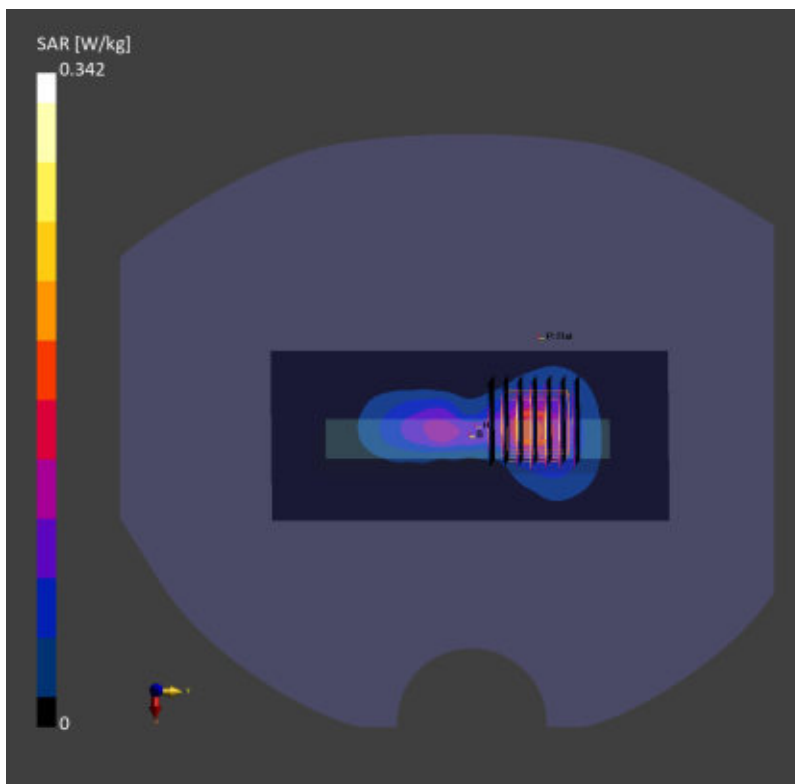

Date: 2026/4/13

25_FR1 n77_100M_QPSK_135RB_69Offset_DFT-30_BottomSide_5mm_Ch633332


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)RBPosition:Mid
AntennaCfg:SISO; Frequency: 3500.0 MHz; Duty Cycle: 1:1
Medium: Medium parameters used: $f = 3500.0$ MHz; $\sigma = 2.789$ S/m; $\epsilon_r = 38.07$
Ambient Temperature: 23.1°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.99, 6.86, 6.89); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (60.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.535 W/kg; SAR (10g) = 0.195 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm
Power Drift = -0.01 dB
SAR (1g) = 0.601 W/kg; SAR (10g) = 0.214 W/kg
Smallest distance from peaks to all points 3 dB below = 6.1 mm
Ratio of SAR at M2 to SAR at M1 = 77.1 %

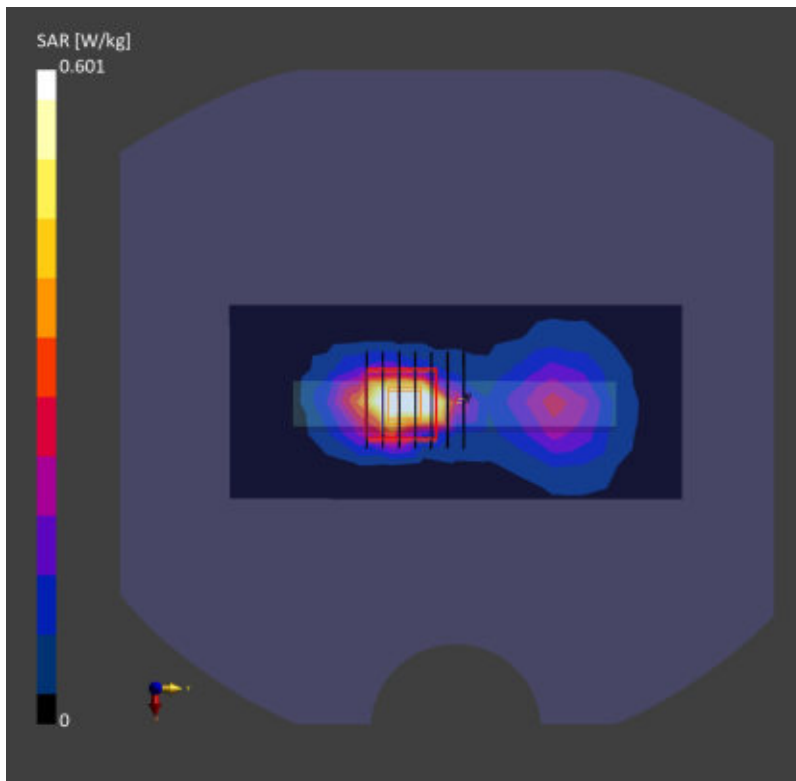

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/4/11

26_WLAN2.4GHz_802.11b 1Mbps_Back_5mm_Ch11

Communication System: UID 0, WIFI (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL_2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.754$ S/m; $\epsilon_r = 39.55$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(6.85, 6.59, 6.84); Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2025/9/15
- Phantom: Twin-SAM V5.0 (Front); Type: QD 000 P40 CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x111x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0441 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.609 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 0.0780 W/kg

SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.00726 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 37.9%

Maximum value of SAR (measured) = 0.0325 W/kg

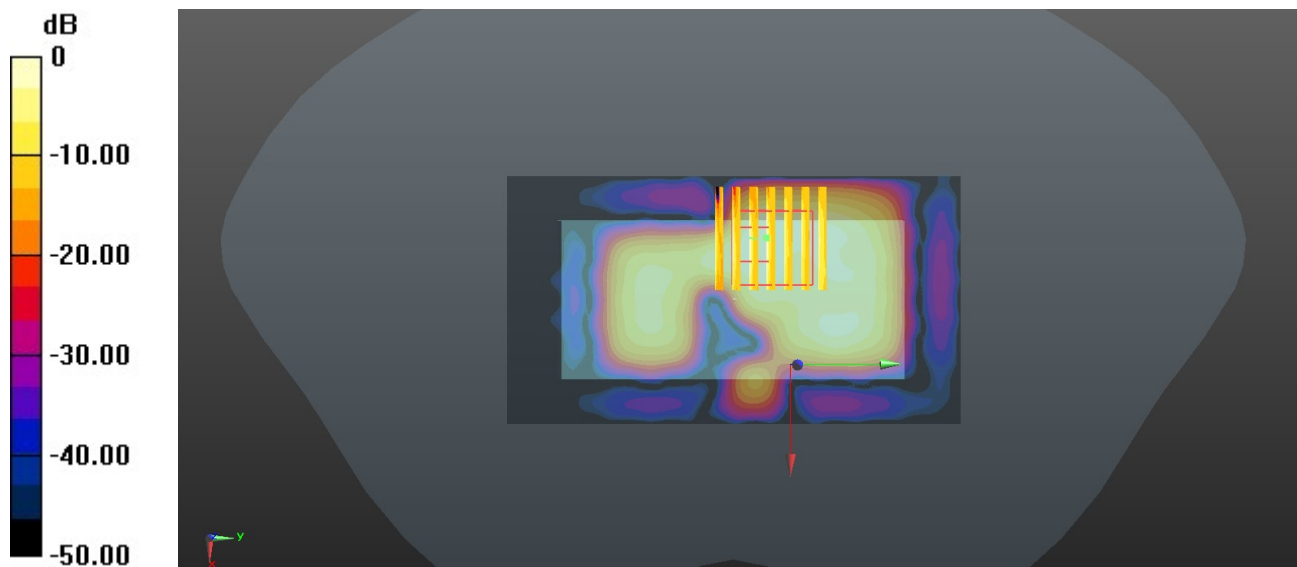

0 dB = 0.0325 W/kg = -14.88 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/4/11

27_WLAN5GHz_802.11a 6Mbps_Bottom Side_5mm_Ch36

Communication System: UID 0, WIFI (0); Frequency: 5180 MHz; Duty Cycle: 1:1.015

Medium: HSL_5250 Medium parameters used: $f = 5180$ MHz; $\sigma = 4.493$ S/m; $\epsilon_r = 37.078$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(5.16, 4.96, 5.15); Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2025/9/15
- Phantom: Twin-SAM V5.0 (Front); Type: QD 000 P40 CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x131x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.502 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 0.9590 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.712 W/kg

SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.048 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 64%

Maximum value of SAR (measured) = 0.411 W/kg

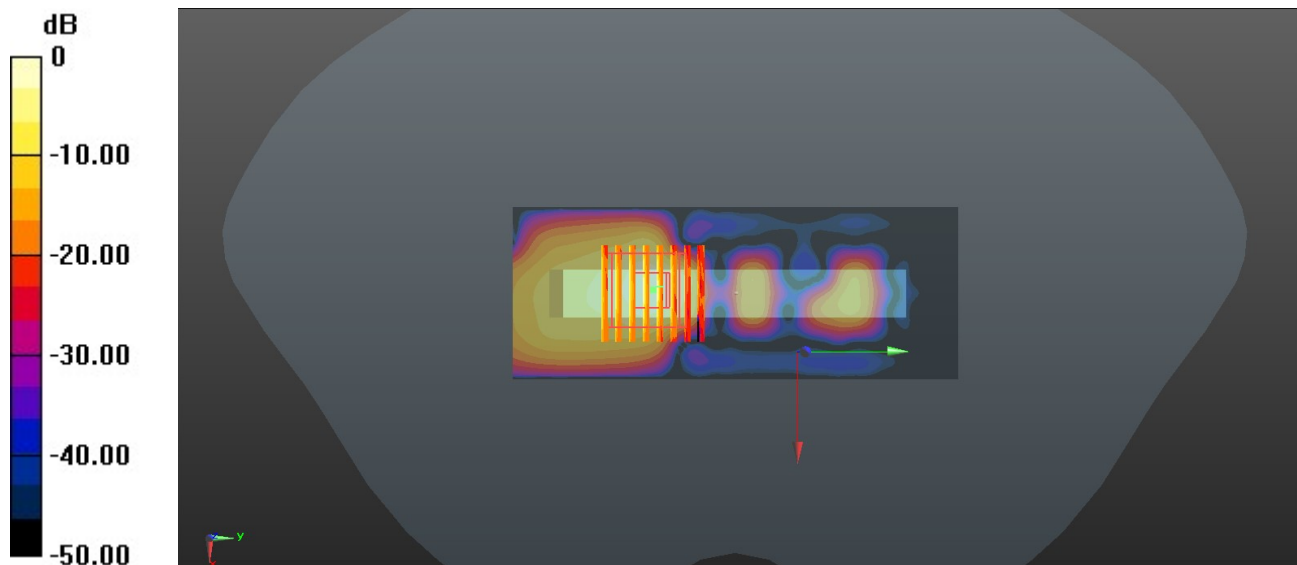

0 dB = 0.411 W/kg = -3.86 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/4/11

28_WLAN5GHz_802.11a 6Mbps_Bottom Side_5mm_Ch149

Communication System: UID 0, WIFI (0); Frequency: 5745 MHz; Duty Cycle: 1:1.015

Medium: HSL_5800 Medium parameters used: $f = 5745$ MHz; $\sigma = 5.033$ S/m; $\epsilon_r = 36.226$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(4.64, 4.47, 4.63); Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2025/9/15
- Phantom: Twin-SAM V5.0 (Front); Type: QD 000 P40 CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x131x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.17 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.9950 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 2.30 W/kg

SAR(1 g) = 0.482 W/kg; SAR(10 g) = 0.147 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 58.6%

Maximum value of SAR (measured) = 1.22 W/kg

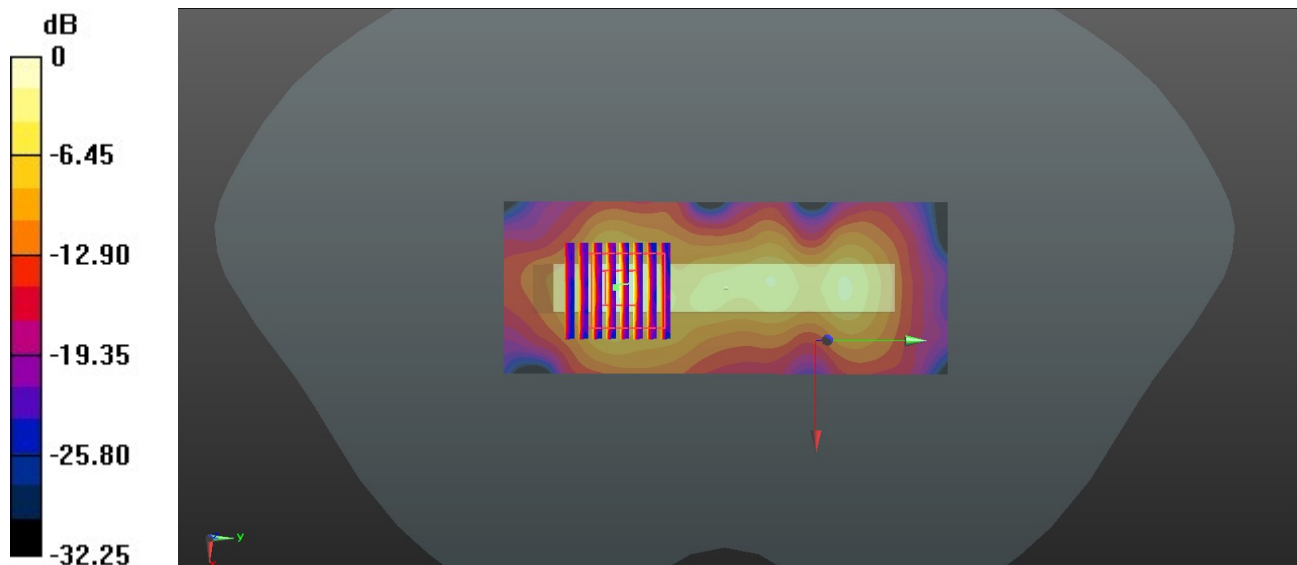

0 dB = 1.22 W/kg = 0.86 dBW/kg