

RF TEST REPORT

Test item : Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone
with Bluetooth and WLAN
Model No. : LG-D160g, LG-D160G, D160g, D160G, LGD160g, LG-D160G
Order No. : DEMC1401-00323
Date of receipt : 2014-01-28
Test duration : 2014-02-03 ~ 2014-02-09
Date of issue : 2014-02-12
Use of report : FCC Original Grant

Applicant : LG Electronics MobileComm U.S.A., Inc.
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Test laboratory : Digital EMC Co., Ltd.
42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 449-935

Test specification : §22(H), §24(E)
Test environment : See appended test report
Test result : ☒ Pass ☐ Fail

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DIGITAL EMC CO., LTD.

Tested by:



Engineer
JaeJin Lee

Witnessed by:

N/A

Reviewed by:



General Manager
Geunki Son

Test Report Version

Test Report No.	Date	Description
DRTFCC1402-0184	Feb. 12, 2014	Initial issue
DRTFCC1402-0184(1)	Feb. 17, 2014	Specify source reference of the test procedure, Revise ERP/EIRP test procedure.

Table of Contents

1. GENERAL INFORMATION	4
2. INTRODUCTION	5
2.1. EUT DESCRIPTION.....	5
2.2. MEASURING INSTRUMENT CALIBRATION	5
2.3. TEST FACILITY	5
3. DESCRIPTION OF TESTS.....	6
3.1 ERP&EIRP	6
3.2 PEAK TO AVERAGE RATIO	8
3.3 OCCUPIED BANDWIDTH.	10
3.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	11
3.5 RADIATED SPURIOUS EMISSIONS	12
3.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	13
4. LIST OF TEST EQUIPMENT.....	14
5. SUMMARY OF TEST RESULTS	15
6. SAMPLE CALCULATION	16
7. TEST DATA	17
7.1 CONDUCTED OUTPUT POWER	17
7.2 PEAK TO AVERAGE RATIO	18
7.3 OCCUPIED BANDWIDTH	18
7.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	18
7.5 BAND EDGE.....	18
7.6 EFFECTIVE RADIATED POWER.....	19
7.7 EQUIVALENT ISOTROPIC RADIATED POWER.....	20
7.8 RADIATED SPURIOUS EMISSIONS	21
7.8.1 RADIATED SPURIOUS EMISSIONS (GSM850)	21
7.8.2 RADIATED SPURIOUS EMISSIONS (WCDMA850)	22
7.8.3 RADIATED SPURIOUS EMISSIONS (HSUPA850)	23
7.8.4 RADIATED SPURIOUS EMISSIONS (GSM1900)	24
7.8.5 RADIATED SPURIOUS EMISSIONS (WCDMA1900)	25
7.8.6 RADIATED SPURIOUS EMISSIONS (HSUPA1900)	26
7.9 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	27
7.9.1 FREQUENCY STABILITY (GSM850)	27
7.9.2 FREQUENCY STABILITY (WCDMA850)	28
7.9.3 FREQUENCY STABILITY (HSUPA850)	29
7.9.4 FREQUENCY STABILITY (GSM1900)	30
7.9.5 FREQUENCY STABILITY (WCDMA1900)	31
7.9.6 FREQUENCY STABILITY (HSUPA1900)	32
8. TEST PLOTS.....	33
8.1 Peak to Average Ratio	33
8.2 Occupied Bandwidth 99 % Bandwidth	36
8.3 Spurious Emissions at Antenna Terminal	52
8.4 Band Edge	79

1. GENERAL INFORMATION

Applicant Name: LG Electronics MobileComm U.S.A., Inc.

Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632

FCC ID : ZNFD160G

FCC Classification : Licensed Portable Transmitter Held to Ear (PCE)

EUT : Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth and WLAN

Model Name : LG-D160g

Add Model Name : LG-D160g, LG-D160G, D160g, D160G, LGD160g, LG-D160G
 ※ 6 models are same mechanical, electrical and functional.
 ※ The only difference is the model name, which are changed for marketing purpose.

Supplying power : Standard Battery
 - Type: Li-ion Battery
 - M/N: BL-44JR
 - Rating: DC 3.7 V & 1540 mAh / 5.7 Wh

Antenna Information : Internal Antenna
 - Type: Built-In type

Tx Frequency : GSM850: 824.2 ~ 848.8 MHz
 GSM1900: 1850.2 ~ 1909.8 MHz
 EDGE850: 824.2 ~ 848.8 MHz
 EDGE1900: 1850.2 ~ 1909.8 MHz
 WCDMA850: 826.4 ~ 846.6 MHz
 WCDMA1900: 1852.4 ~ 1907.6 MHz
 HSUPA850: 826.4 ~ 846.6 MHz
 HSUPA1900: 1852.4 ~ 1907.6 MHz

Rx Frequency : GSM850: 869.2 ~ 893.8 MHz
 GSM1900: 1930.2 ~ 1989.8 MHz
 EDGE850: 869.2 ~ 893.8 MHz
 EDGE1900: 1930.2 ~ 1989.8 MHz
 WCDMA850: 871.4 ~ 891.6 MHz
 WCDMA1900: 1932.4 ~ 1987.6 MHz
 HSUPA850: 871.4 ~ 891.6 MHz
 HSUPA1900: 1932.4 ~ 1987.6 MHz

Max. RF Output Power : GSM850: 1.114 W ERP(30.47 dBm)
 GSM1900: 1.105 W EIRP(30.44 dBm)
 EDGE850: 0.347 W ERP(25.40 dBm)
 EDGE1900: 0.309 W EIRP(24.90 dBm)
 WCDMA850: 0.128 W ER (21.07 dBm)
 WCDMA1900: 0.214 W EIRP(23.31 dBm)
 HSUPA850: 0.108 W ERP(20.33 dBm)
 HSUPA1900: 0.185 W EIRP(22.68 dBm)

Emission Designator(s) : GSM850: 243KGXW
 GSM1900: 242KGXW
 EDGE850: 244KG7W
 EDGE1900: 247KG7W
 WCDMA850: 4M18F9W
 WCDMA1900: 4M19F9W
 HSUPA850: 4M17F9W
 HSUPA1900: 4M18F9W

2. INTRODUCTION

2.1. EUT DESCRIPTION

The Equipment Under Test (EUT) supports a dual band (Cellular/PCS) with GSM/GPRS/EDGE, WCDMA/HSPA, Bluetooth and WLAN.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The 3 & 10m test site and conducted measurement facility used to collect the radiated data are located at the 38, Yurim-ro, 154 beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 449-935. The site is constructed in conformance with the requirements.


- 3 & 10m test site registration Number: 678747

3. DESCRIPTION OF TESTS

3.1 ERP&EIRP

(Effective Radiated Power & Equivalent Isotropic Radiated Power)

Test Set-up

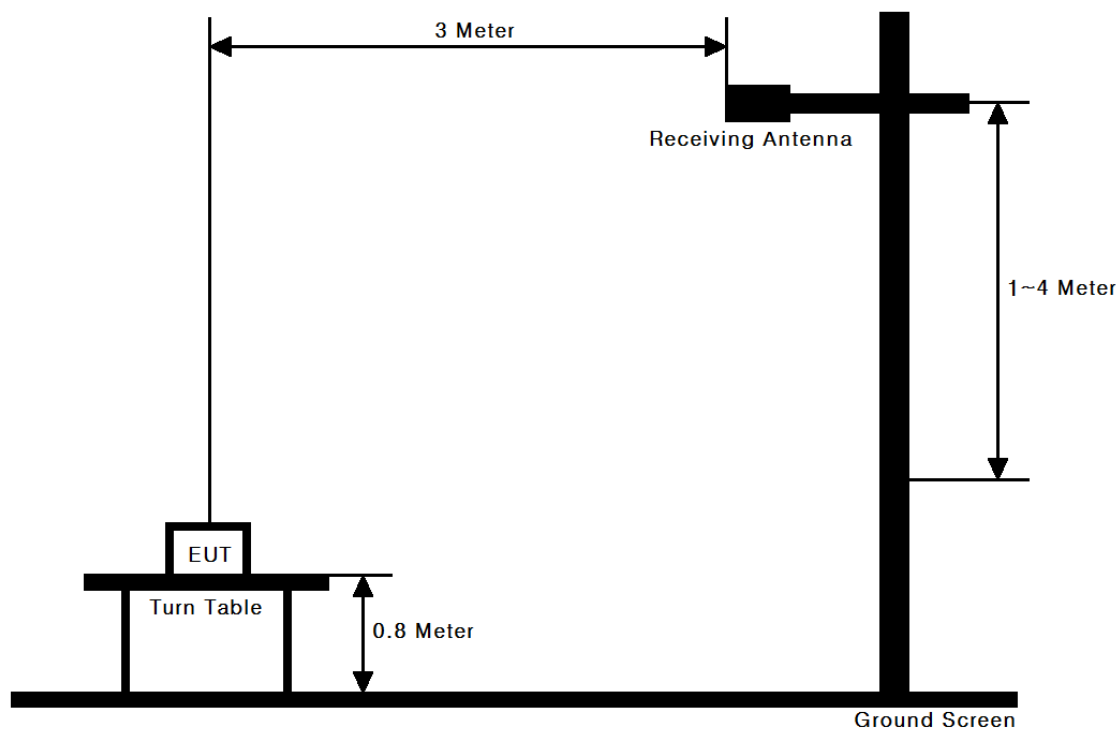

These measurements were performed at 3 & 10m test site. The equipment under test is placed on a wooden turntable 0.8-meters above the ground plane and 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading.

For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.


Test Procedure

- ANSI/TIA-603-C-2004 - Section 2.2.17
- KDB971168 v02r01- Section 5.2.1

1. Set span to at least 1.5 times the OBW.
2. Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time = auto-couple.
6. Detector = RMS (power averaging).
7. If the EUT can be configured to transmit continuously (i.e., burst duty cycle $\geq 98\%$), then set the trigger to free run.
8. If the EUT cannot be configured to transmit continuously (i.e., burst duty cycle $< 98\%$), then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Ensure that the sweep time is less than or equal to the transmission burst duration.
9. Trace average at least 100 traces in power averaging (i.e., RMS) mode.
10. Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with the band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

3.2 PEAK TO AVERAGE RATIO

Test set-up

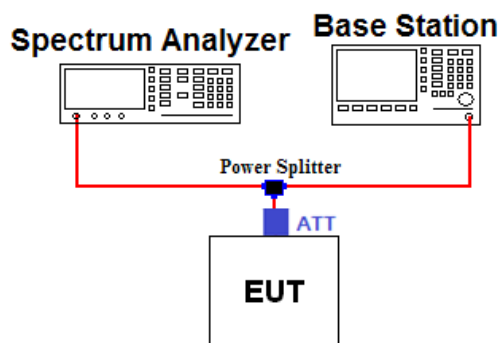

Test Procedure

A peak to average ratio measurement is performed using the following procedure.

■ CCDF Procedure

- KDB971168 v02r01-Section 5.7.1

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth
2. Set the number of counts to a value that stabilizes the measured CCDF curve
3. Set the measurement interval as follows:
 - 1) For continuous transmissions, set to 1 ms
 - 2) For burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1%

■ Alternate Procedure**- KDB971168 v02r01-Section 5.7.2**

Use one of the measurement procedures of the peak power and record as P_{PK} .

Use one of the measurement procedures of the average power and record as P_{Avg} .

Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$\text{PAPR (dB)} = P_{PK} \text{ (dBm)} - P_{Avg} \text{ (dBm)}.$$

- Peak Power Measurement


1. Set the RBW $\geq$ OBW
2. Set VBW $\geq 3 \times$ RBW
3. Set span $\geq 2 \times$ RBW
4. Sweep time = auto couple
5. Detector = peak
6. Ensure that the number of measurement points $\geq$ span/RBW.
7. Trace mode = max hold
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the peak amplitude level.

- Average Power Measurement

1. Set span to at least 1.5 times the OBW.
2. Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time = auto-couple.
6. Detector = RMS (power averaging).
7. If the EUT can be configured to transmit continuously (i.e., burst duty cycle $\geq 98\%$), then set the trigger to free run.
8. If the EUT cannot be configured to transmit continuously (i.e., burst duty cycle $< 98\%$), then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep.
Ensure that the sweep time is less than or equal to the transmission burst duration.
9. Trace average at least 100 traces in power averaging (i.e., RMS) mode.
10. Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with the band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

3.3 OCCUPIED BANDWIDTH.

Test set-up

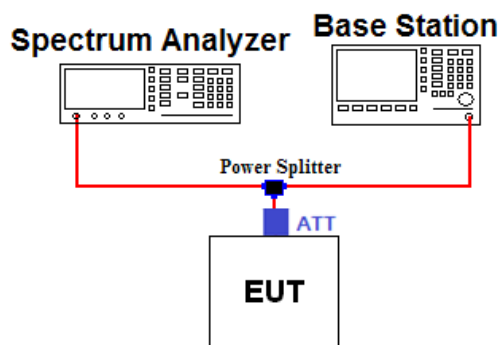

Offset value information

Frequency (MHz)	Offset Value (dB)	Frequency (MHz)	Offset Value (dB)
824.2	19.12	1850.2	19.77
826.4	19.11	1852.4	19.77
836.6	19.16	1880.0	19.84
846.6	19.18	1907.6	19.86
848.8	19.20	1909.8	19.86

Note. 1: The offset values from EUT to Spectrum analyzer were measured and used for test.
Offset value = Cable A + Splitter + ATT + Cable B

Test Procedure


- KDB971168 v02r01-Section 4.2

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power of a given emission.

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 ~ 5% of the expected OBW
3. VBW $\geq$ 3 X RBW
4. Detector = Peak
5. Trance mode = Max hold
6. Sweep = Auto couple
7. The trace was allowed to stabilize
8. If necessary, step 2 ~ 7 were repeated after changing the RBW such that it would be within 1 ~ 5% of the 99% occupied bandwidth observed in step 7.

3.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.

Test set-up

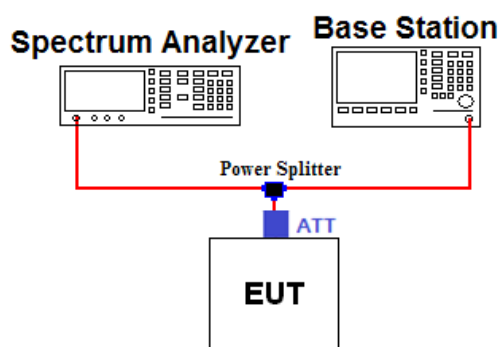

Offset value information

Frequency (MHz)	Offset Value (dB)	Frequency (MHz)	Offset Value (dB)	Frequency (MHz)	Offset Value (dB)
821.0	19.10	1847.0	19.74	5000.0	21.04
824.0	19.12	1850.0	19.76	10000.0	21.69
849.0	19.21	1910.0	19.86	15000.0	22.10
852.0	19.21	1913.0	19.87	20000.0	23.08

Note. 1: The offset value from EUT to Spectrum analyzer was measured and used for test.
Offset value = Cable A + Splitter + ATT + Cable B

Test Procedure

- KDB971168 v02r01 - Section 6.0

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.

The EUT was setup to maximum output power at its lowest channel. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.

1. RBW = 1MHz & VBW $\geq$ 3MHz
2. Detector = Positive peak
3. Trace mode = Max hold
4. Sweep time = Auto
5. The trace was allowed to stabilize

The highest, lowest and a middle channel were tested for out of band measurements.


The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

Note 1: In the 1MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter was employed to measure the out of band Emissions.

Note 2: Compliance with the applicable limits is based on the use of measurement instrumentation employing a RBW of 100 KHz or greater for Part 22 and 1 MHz or greater for Part 24.

3.5 RADIATED SPURIOUS EMISSIONS

Test Set-up

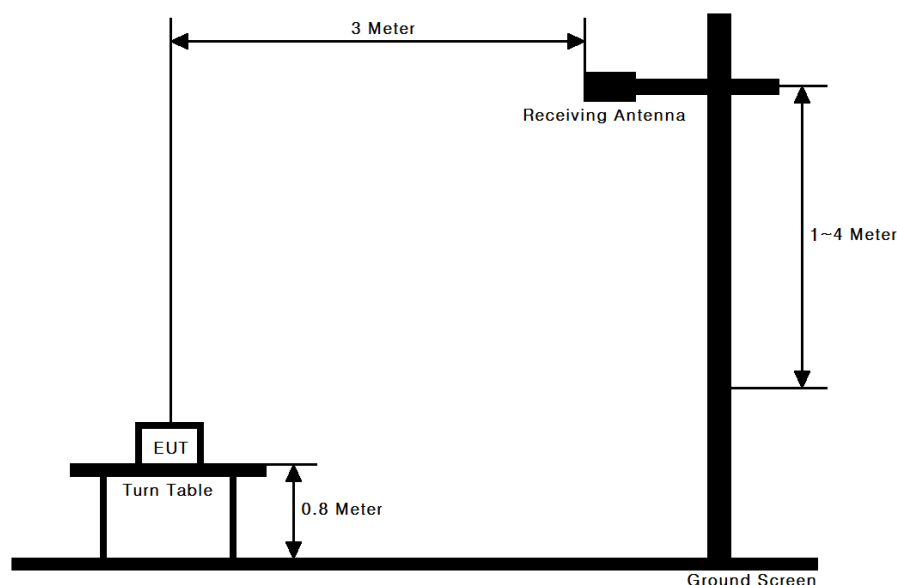

Test Procedure

- ANSI/TIA-603-C-2004 - Section 2.2.12
- KDB971168 v02r01 - Section 5.8

This measurement was performed at 3-meter test range. The equipment under test is placed on a wooden turntable 0.8-meters above the ground plane and 3-meters from the receive antenna.

The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer.


For radiated power measurements below 1GHz, a half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading.

For radiated power measurements above 1GHz, a Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. The difference between the gain of the horn and an isotropic antenna are taken into consideration.

This measurement was performed with the EUT oriented in 3 orthogonal axis.

3.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

Test Set-up

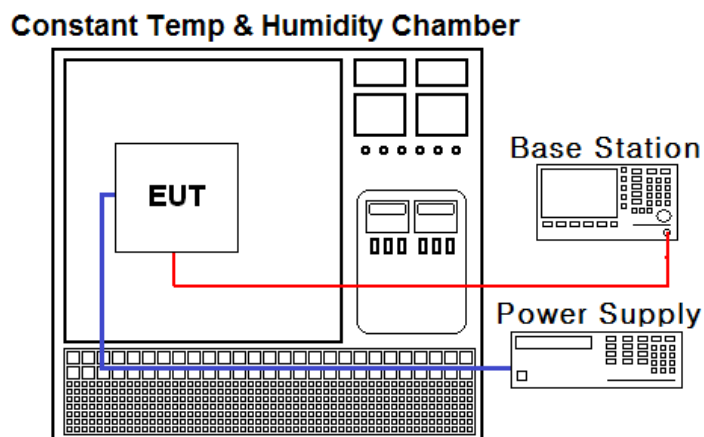

Test Procedure

- ANSI/TIA-603-C-2004

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from battery end point to 115 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification - the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.000\ 25\ \%$ ($\pm 2.5\ \text{ppm}$) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature. (25°C to provide a reference).
2. The equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

NOTE: The EUT is tested down to the battery endpoint.

4. LIST OF TEST EQUIPMENT

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal. Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent	N9030A	13/10/29	14/10/29	MY53310140
Spectrum Analyzer	Agilent	N9020A	13/03/28	14/03/28	MY50510026
Multimeter	H.P	34401A	13/02/27	14/02/27	3146A13475
DC Power Supply	H.P	6622A	13/02/27	14/02/27	3448A03760
Temp & Humi Test Chamber	SJ Science	TEMI2500	13/10/22	14/10/22	SJ-TH-S50-130930
Power Splitter	Anritsu	K241B	13/10/22	14/10/22	1701099
Attenuator(3dB)	SMAJK	SMAJK-2-3	13/10/22	14/10/22	3
Attenuator(10dB)	SMAJK	SMAJK-50-10	13/10/23	14/10/23	2-50-10
Thermo hygrometer	BODYCOM	BJ5478	13/06/01	14/06/01	120612-2
Dipole Antenna	Schwarzbeck	VHA9103	13/10/24	15/10/24	2116
Dipole Antenna	Schwarzbeck	VHA9103	12/03/22	14/03/22	2117
Dipole Antenna	Schwarzbeck	UHA9105	13/10/24	15/10/24	2261
Dipole Antenna	Schwarzbeck	UHA9105	12/03/22	14/03/22	2262
Bilog Antenna	SCHAFFNER	CBL6112B	12/11/06	14/11/06	2737
HORN ANT	ETS	3115	12/02/20	14/02/20	6419
HORN ANT	ETS	3115	13/02/28	15/02/28	00021097
HORN ANT	A.H.Systems	SAS-574	13/03/20	15/03/20	154
HORN ANT	A.H.Systems	SAS-574	13/05/27	15/05/27	155
Amplifier (22dB)	H.P	8447E	14/01/07	15/01/07	2945A02865
Amplifier (30dB)	Agilent	8449B	13/02/27	14/02/27	3008A00370
High-pass filter	Wainwright	WHKX1.0	13/09/12	14/09/12	9
High-Pass Filter	Wainwright	WHNX2.1	13/09/12	14/09/12	1
8960 Series 10 Wireless Comms Test Set	Agilent	E5515C	13/02/28	14/02/28	GB43461134
Universal Radio Communication Tester	Rohde Schwarz	CMU200	13/02/28	14/02/28	106760
Vector Signal Generator	Rohde Schwarz	SMJ100A	14/01/07	15/01/07	100148
Signal Generator	Rohde Schwarz	SMF100A	13/07/22	14/07/22	102341
Amplifier	EMPOWER	BBS3Q7ELU	13/09/12	14/09/12	1020

5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	RSS Section(s)	Parameter	Status Note 1
2.1046	RSS-132 (4.4) RSS-133 (4.1)	Conducted Output Power	C
22.913(a) 24.232(c)	RSS-132 (4.4) [SRSP-503(5.1.3)] RSS-133 (6.4) [SRSP-510(5.1.2)]	Effective Radiated Power Equivalent Isotropic Radiated Power	C
22.917(a) 24.238(a) 2.1049	RSS-Gen (4.6.1) RSS-133 (2.3)	Occupied Bandwidth	C
22.917(a) 24.238(a) 2.1051	RSS-132 (4.5.1) RSS-133 (6.5.1)	Band Edge Spurious and Harmonic Emissions at Antenna Terminal	C
24.232(d)	RSS-133 (6.4)	Peak to Average Ratio	C
22.917(a) 24.238(a) 2.1053	RSS-132 (4.5.1) RSS-133 (6.5.1)	Radiated Spurious and Harmonic Emissions	C
22.355 24.235 2.1055	RSS-132 (4.3) RSS-133 (6.3)	Frequency Stability	C
Note 1: C=Comply NC=Not Comply NT=Not Tested NA=Not Applicable			

The sample was tested according to the following specification:

ANSI/TIA/EIA-603-C-2004 and KDB 971168 D01 v02r01

6. SAMPLE CALCULATION

A. Emission Designator

GSM850 Emission Designator

Emission Designator = **243KGXW**

GSM OBW = 243.46 kHz

(Measured at the 99.75 % power bandwidth)

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

GSM1900 Emission Designator

Emission Designator = **242KGXW**

GSM OBW = 242.03 kHz

(Measured at the 99.75 % power bandwidth)

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE850 Emission Designator

Emission Designator = **244KG7W**

GSM OBW = 244.02 kHz

(Measured at the 99.75 % power bandwidth)

G = Phase Modulation

7 = Two or more channels containing
quantized or digital information

W = Combination (Audio/Data)

EDGE1900 Emission Designator

Emission Designator = **247KG7W**

GSM OBW = 247.31 kHz

(Measured at the 99.75 % power bandwidth)

G = Phase Modulation

7 = Two or more channels containing
quantized or digital information

W = Combination (Audio/Data)

WCDMA850 Emission Designator

Emission Designator = **4M18F9W**

WCDMA OBW = 4.1783 MHz

(Measured at the 99.75 % power bandwidth)

F = Frequency Modulation

9 = Composite Digital Information

W = Combination (Audio/Data)

WCDMA1900 Emission Designator

Emission Designator = **4M19F9W**

WCDMA OBW = 4.1864 MHz

(Measured at the 99.75 % power bandwidth)

F = Frequency Modulation

9 = Composite Digital Information

W = Combination (Audio/Data)

HSUPA850 Emission Designator

Emission Designator = **4M17F9W**

HSUPA OBW = 4.1660 MHz

(Measured at the 99.75 % power bandwidth)

F = Frequency Modulation

9 = Composite Digital Information

W = Combination (Audio/Data)

HSUPA1900 Emission Designator

Emission Designator = **4M18F9W**

HSUPA OBW = 4.1784 MHz

(Measured at the 99.75 % power bandwidth)

F = Frequency Modulation


9 = Composite Digital Information

W = Combination (Audio/Data)

7. TEST DATA

7.1 CONDUCTED OUTPUT POWER

A base station simulator was used to establish communication with the EUT. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported. Conducted Output Powers of EUT are reported below.

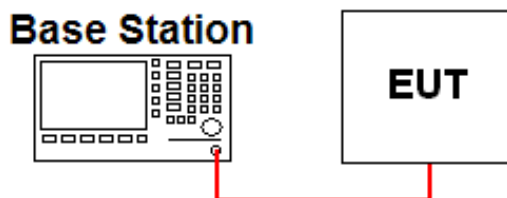

▪ GSM / GPRS / EDGE

Band	Channel	Test Result(dBm)								
		GSM	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot
Cellular	128	33.0	32.9	30.5	28.4	27.4	26.4	25.8	24.8	23.7
	190	33.0	33.0	30.5	28.5	27.4	26.5	25.9	24.9	23.8
	251	33.0	33.0	30.5	28.4	27.4	26.5	25.9	24.9	23.8
PCS	512	30.0	29.9	28.1	25.9	24.9	24.9	24.5	23.4	22.0
	661	30.0	30.0	28.2	26.0	24.8	25.0	24.5	23.5	22.1
	810	30.0	30.0	28.2	26.0	24.9	25.0	24.5	23.5	22.1

▪ WCDMA / HSDPA / HSUPA

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band (dBm)			PCS Band (dBm)			3GPP MPR (dB)
			4132	4183	4233	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	22.88	22.89	22.83	23.21	23.19	23.17	-
99		12.2 kbps AMR	22.84	22.81	22.78	23.19	23.15	23.14	-
5	HSDPA	Subtest 1	21.85	21.97	21.99	22.24	22.12	22.27	0
5		Subtest 2	21.74	21.92	21.94	22.22	22.1	22.26	0
5		Subtest 3	21.25	21.43	21.48	21.82	21.51	21.76	0.5
5		Subtest 4	21.24	21.32	21.46	21.80	21.40	21.76	0.5
6	HSUPA	Subtest 1	21.83	21.93	21.95	22.20	22.05	22.20	0
6		Subtest 2	20.04	20.13	20.15	20.53	20.39	20.56	2
6		Subtest 3	21.14	21.23	21.24	21.15	20.85	21.10	1
6		Subtest 4	20.00	20.08	20.10	20.50	20.38	20.54	2
6		Subtest 5	21.78	21.88	21.89	22.17	22.02	22.16	0

7.2 PEAK TO AVERAGE RATIO

- Plots of the EUT's Peak- to- Average Ratio are shown in Clause 8.1

7.3 OCCUPIED BANDWIDTH

Band	Channel	Frequency	Test Result (kHz)
GSM850	128	824.2	243.46
	190	836.6	242.54
	251	848.8	242.16
GSM1900	512	1850.2	241.19
	661	1880.0	241.84
	810	1909.8	242.03
EDGE850	128	824.2	244.02
	190	836.6	239.36
	251	848.8	238.49
EDGE1900	512	1850.2	242.93
	661	1880.0	247.31
	810	1909.8	240.52
WCDMA850	4132	826.4	4175.60
	4183	836.6	4172.20
	4233	846.6	4178.30
WCDMA1900	9262	1852.4	4186.40
	9400	1880.0	4186.40
	9538	1907.6	4178.40
HSUPA850	4132	826.4	4139.70
	4183	836.6	4160.40
	4233	846.6	4166.00
HSUPA1900	9262	1852.4	4178.40
	9400	1880.0	4165.70
	9538	1907.6	4155.30

- Plots of the EUT's Occupied Bandwidth are shown in Clause 8.2

7.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

- Plots of the EUT's Conducted Spurious Emissions are shown in Clause 8.3

7.5 BAND EDGE

- Plots of the EUT's Band Edge are shown in Clause 8.4

7.6 EFFECTIVE RADIATED POWER**- GSM850 data**

CH.	EUT Position (Axis)	Test Conditions(Power Step: 5)							
		Reading Value (dBm)	Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Power Supply	Note.
824.2 128 CH	Z	- 5.06	H	27.65	1.20	28.85	0.767	DC 3.7V	GSM
836.6 190 CH	X	- 4.94	H	29.06	1.15	30.21	1.050	DC 3.7V	GSM
848.8 251 CH	X	- 4.18	H	29.42	1.05	30.47	1.114	DC 3.7V	GSM
848.8 251 CH	X	- 9.25	H	24.35	1.05	25.40	0.347	DC 3.7V	EDGE

- WCDMA850 data

CH.	EUT Position (Axis)	Test Conditions(TPC bits all set to "1")							
		Reading Value (dBm)	Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Power Supply	Note.
826.4 4132	Y	- 17.65	V	18.65	1.19	19.84	0.096	DC 3.7V	-
836.6 4183	Z	- 14.34	H	19.92	1.15	21.07	0.128	DC 3.7V	-
846.6 4233	Y	- 14.50	V	19.74	1.10	20.84	0.121	DC 3.7V	-

- HSUPA850 data

CH.	EUT Position (Axis)	Test Conditions(TPC bits all set to "1")							
		Reading Value (dBm)	Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Power Supply	Note.
826.4 4132	Y	-17.77	V	18.53	1.19	19.72	0.094	DC 3.7V	-
836.6 4183	Z	-15.08	H	19.18	1.15	20.33	0.108	DC 3.7V	-
846.6 4233	Y	-15.03	V	19.21	1.10	20.31	0.107	DC 3.7V	-

NOTES:

This EUT was tested under all configurations and the highest power is reported in GSM mode and WCDMA mode with HSDPA inactive at 12.2 kbps RMC and TPC bits set to "1" and in GSM mode using a Power Control Level of "0" in PCS Band and "5" in the Cellular Band. This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna. The worst case data is reported.

7.7 EQUIVALENT ISOTROPIC RADIATED POWER**- GSM1900 data**

CH.	EUT Position (Axis)	TEST CONDITIONS(Power Step: 0)							
		Reading Value (dBm)	Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Power Supply	Note.
1850.2 512	Y	- 7.52	V	22.38	8.06	30.44	1.105	DC 3.7V	GSM
1880.0 661	Y	- 7.89	V	21.75	8.12	29.87	0.970	DC 3.7V	GSM
1909.8 810	X	- 5.84	H	21.91	8.18	30.09	1.021	DC 3.7V	GSM
1850.2 512	Y	-13.06	V	16.84	8.06	24.90	0.309	DC 3.7V	EDGE

- WCDMA1900 data

CH.	EUT Position (Axis)	Test Conditions(TPC bits all set to "1")							
		Reading Value (dBm)	Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Power Supply	Note.
1852.4 9262	Y	- 14.86	V	14.93	8.06	22.99	0.199	DC 3.7V	-
1880.0 9400	X	- 13.40	H	15.19	8.12	23.31	0.214	DC 3.7V	-
1907.6 9538	X	- 13.66	H	14.76	8.18	22.94	0.197	DC 3.7V	-

- HSUPA1900 data

CH.	EUT Position (Axis)	Test Conditions(TPC bits all set to "1")							
		Reading Value (dBm)	Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Power Supply	Note.
1852.4 9262	Y	-15.17	V	14.62	8.06	22.68	0.185	DC 3.7V	-
1880.0 9400	X	-14.11	H	14.48	8.12	22.60	0.182	DC 3.7V	-
1907.6 9538	X	-14.23	H	14.19	8.18	22.37	0.172	DC 3.7V	-

NOTES:

This EUT was tested under all configurations and the highest power is reported in GSM mode and WCDMA mode with HSDPA inactive at 12.2 kbps RMC and TPC bits set to "1" and in GSM mode using a Power Control Level of "0" in PCS Band and "5" in the Cellular Band. This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

7.8 RADIATED SPURIOUS EMISSIONS

7.8.1 RADIATED SPURIOUS EMISSIONS (GSM850)

Channel (ERP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	Level at Substitute Antenna Terminal (dBm)	Substitute Antenna Gain (dBd)	Correct Generator Level (dBm)	Result (dBc)	Limit (dBc)
128 (0.767 W)	1648.53	X	H	- 63.35	5.48	- 57.87	86.72	41.85
	3296.00	X	H	- 59.00	7.68	- 51.32	80.17	
	-	-	-	-	-	-	-	
190 (1.050 W)	1673.35	X	H	- 61.69	5.53	- 56.16	86.37	43.21
	3345.28	X	H	- 56.86	7.69	- 49.17	79.38	
	-	-	-	-	-	-	-	
251 (1.114 W)	1697.68	X	H	- 62.93	5.59	- 57.34	87.81	43.47
	3395.22	X	H	- 58.02	7.70	- 50.32	80.79	
	-	-	-	-	-	-	-	

- Limit Calculation= $43 + 10 \log_{10}(\text{ERP [W]})$ [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

This EUT was tested under all configurations and the highest power is reported in GSM mode and WCDMA mode with HSDPA inactive at 12.2 kbps RMC and TPC bits set to "1" and in GSM mode using a Power Control Level of "0" in PCS Band and "5" in the Cellular Band. This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

7.8.2 RADIATED SPURIOUS EMISSIONS (WCDMA850)

Channel (ERP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	Result (dBc)	Limit (dBc)
4132 (0.096 W)	1654.08	X	H	- 64.40	5.49	- 58.91	78.75	32.84
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
4183 (0.128 W)	1675.50	X	H	- 63.74	5.54	- 58.20	79.27	34.07
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
4233 (0.121 W)	1691.22	X	H	- 63.80	5.57	- 58.23	79.07	33.84
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	

- Limit Calculation = $43 + 10 \log_{10} (\text{ERP [W]})$ [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

This EUT was tested under all configurations and the highest power is reported in GSM mode and WCDMA mode with HSDPA inactive at 12.2 kbps RMC and TPC bits set to "1" and in GSM mode using a Power Control Level of "0" in PCS Band and "5" in the Cellular Band. This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

7.8.3 RADIATED SPURIOUS EMISSIONS (HSUPA850)

Channel (ERP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	Result (dBc)	Limit (dBc)
4132 (0.094 W)	1650.24	X	H	- 64.33	5.49	-58.84	78.56	32.72
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
4183 (0.108 W)	1675.42	X	H	- 63.40	5.54	-57.86	78.19	33.33
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
4233 (0.107 W)	1695.34	X	H	- 64.16	5.58	-58.58	78.89	33.31
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	

- Limit Calculation = $43 + 10 \log_{10} (\text{ERP [W]})$ [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

This EUT was tested under all configurations and the highest power is reported in GSM mode and WCDMA mode with HSDPA inactive at 12.2 kbps RMC and TPC bits set to "1" and in GSM mode using a Power Control Level of "0" in PCS Band and "5" in the Cellular Band. This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

7.8.4 RADIATED SPURIOUS EMISSIONS (GSM1900)

Channel (EIRP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	Level at Substitute Antenna Terminal (dBm)	Substitute Antenna Gain (dBi)	Correct Generator Level (dBm)	Result (dBc)	Limit (dBc)
512 (1.105 W)	7400.79	Z	H	- 47.26	11.64	- 35.62	66.06	43.44
	9251.20	Z	H	- 45.34	11.65	- 33.69	64.12	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
661 (0.970 W)	7519.78	Z	H	- 44.19	11.59	- 32.60	62.47	42.87
	9400.00	Z	H	- 47.24	11.75	- 35.49	65.36	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
810 (1.021 W)	7639.56	Z	H	- 50.82	11.54	- 39.28	69.37	43.09
	9548.77	Z	H	- 47.01	11.84	- 35.17	65.26	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	

- Limit Calculation = $43 + 10 \log_{10}(\text{EIRP [W]})$ [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

This EUT was tested under all configurations and the highest power is reported in GSM mode and WCDMA mode with HSDPA inactive at 12.2 kbps RMC and TPC bits set to "1" and in GSM mode using a Power Control Level of "0" in PCS Band and "5" in the Cellular Band. This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

7.8.5 RADIATED SPURIOUS EMISSIONS (WCDMA1900)

Channel (EIRP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	Result (dBc)	Limit (dBc)
9262 (0.199 W)	3702.64	Y	H	- 51.70	9.90	- 41.80	64.79	35.99
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
9400 (0.214 W)	3757.74	Y	H	- 53.89	9.90	- 43.99	67.29	36.31
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
9538 (0.197 W)	3813.49	Y	H	- 53.86	9.91	- 43.95	66.88	35.94
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	

- Limit Calculation = $43 + 10 \log_{10} (\text{EIRP [W]})$ [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

This EUT was tested under all configurations and the highest power is reported in GSM mode and WCDMA mode with HSDPA inactive at 12.2 kbps RMC and TPC bits set to "1" and in GSM mode using a Power Control Level of "0" in PCS Band and "5" in the Cellular Band. This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

7.8.6 RADIATED SPURIOUS EMISSIONS (HSUPA1900)

Channel (EIRP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	Result (dBc)	Limit (dBc)
9262 (0.185 W)	3702.55	Y	H	- 51.96	9.90	-42.06	64.74	35.68
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
9400 (0.182 W)	3758.10	Y	H	- 53.24	9.90	-43.34	65.93	35.60
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
9538 (0.172 W)	3817.32	Y	H	- 52.54	9.91	-42.63	64.99	35.37
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	

- Limit Calculation = $43 + 10 \log_{10} (\text{EIRP [W]})$ [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

This EUT was tested under all configurations and the highest power is reported in GSM mode and WCDMA mode with HSDPA inactive at 12.2 kbps RMC and TPC bits set to "1" and in GSM mode using a Power Control Level of "0" in PCS Band and "5" in the Cellular Band. This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.


The worst case data is reported.

7.9 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

7.9.1 FREQUENCY STABILITY (GSM850)

OPERATING FREQUENCY : 836,599,990 Hz
 CHANNEL : 190(Mid)
 REFERENCE VOLTAGE : 3.700 V DC
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm


VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100 %	3.700	+ 25(Ref)	836,599,990	0.000	0.00000000
100 %		- 30	836,599,986	- 0.005	- 0.00000048
100 %		- 20	836,599,983	- 0.008	- 0.00000084
100 %		- 10	836,599,987	- 0.004	- 0.00000036
100 %		0	836,599,982	- 0.010	- 0.00000096
100 %		+ 10	836,599,988	- 0.002	- 0.00000024
100 %		+ 20	836,599,986	- 0.005	- 0.00000048
100 %		+ 30	836,599,989	- 0.001	- 0.00000012
100 %		+ 40	836,599,993	0.004	0.00000036
100 %		+ 50	836,599,990	0.000	0.00000000
85 %	3.145	+ 25	836,599,987	- 0.004	- 0.00000036
115 %	4.255	+ 25	836,599,987	- 0.004	- 0.00000036
BATT.ENDPOINT	2.650	+ 25	836,599,993	0.004	0.00000036

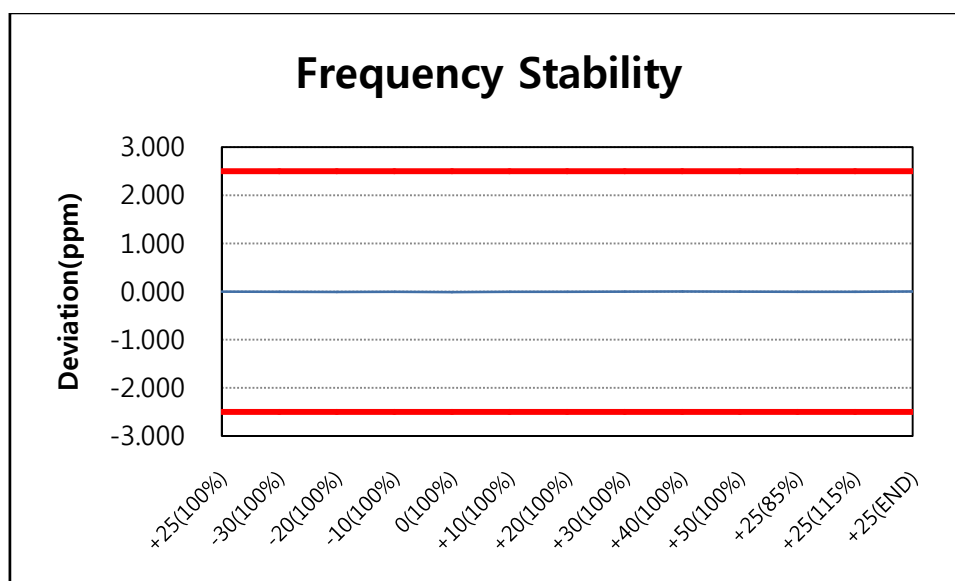

7.9.2 FREQUENCY STABILITY (WCDMA850)

OPERATING FREQUENCY : 836,599,995 Hz
 CHANNEL : 4183(Mid)
 REFERENCE VOLTAGE : 3.700 V DC
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm


VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100%	3.700	+ 25(Ref)	836,600,004	0.000	0.00000000
100%		- 30	836,600,005	0.001	0.00000012
100%		- 20	836,599,997	- 0.008	- 0.00000084
100%		- 10	836,600,005	0.001	0.00000012
100%		0	836,600,006	0.002	0.00000024
100%		+ 10	836,600,005	0.001	0.00000012
100%		+ 20	836,600,003	- 0.001	- 0.00000012
100%		+ 30	836,600,001	- 0.004	- 0.00000036
100%		+ 40	836,599,998	- 0.007	- 0.00000072
100%		+ 50	836,600,007	0.004	0.00000036
85%	3.145	+ 25	836,600,004	0.000	0.00000000
115%	4.255	+ 25	836,599,996	- 0.010	- 0.00000096
BATT.ENDPOINT	2.650	+ 25	836,600,001	- 0.004	- 0.00000036

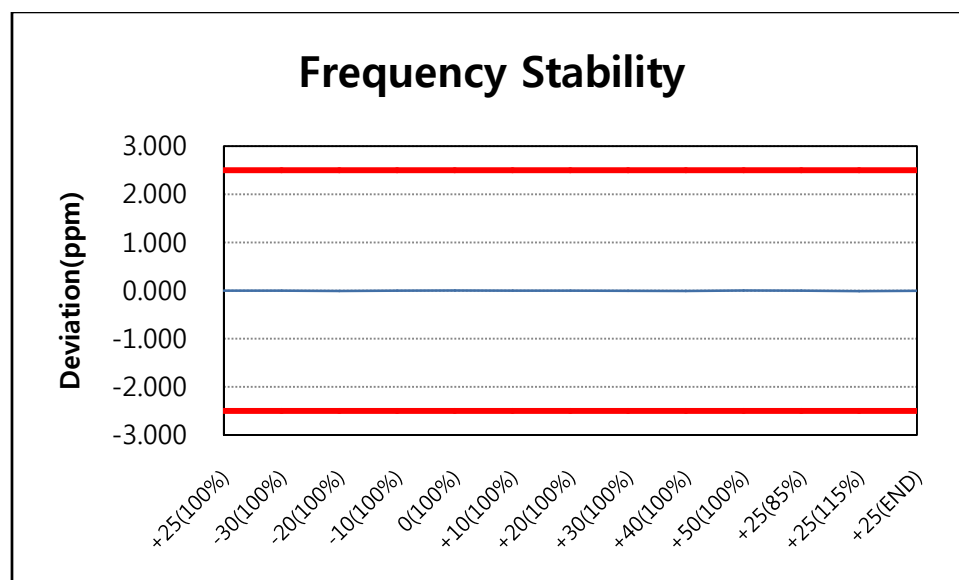

7.9.3 FREQUENCY STABILITY (HSUPA850)

OPERATING FREQUENCY : 836,600,003 Hz
 CHANNEL : 4183(Mid)
 REFERENCE VOLTAGE : 3.700 V DC
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm


VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100%	3.700	+ 25(Ref)	836,600,003	0.000	0.00000000
100%		- 30	836,600,004	0.001	0.00000012
100%		- 20	836,600,004	0.001	0.00000012
100%		- 10	836,600,003	0.000	0.00000000
100%		0	836,600,005	0.002	0.00000024
100%		+ 10	836,599,993	- 0.012	- 0.00000120
100%		+ 20	836,600,004	0.001	0.00000012
100%		+ 30	836,599,998	- 0.006	- 0.00000060
100%		+ 40	836,600,003	0.000	0.00000000
100%		+ 50	836,600,005	0.002	0.00000024
85%	3.145	+ 25	836,600,003	0.000	0.00000000
115%	4.255	+ 25	836,600,004	0.001	0.00000012
BATT.ENDPOINT	2.650	+ 25	836,599,996	- 0.008	- 0.00000084

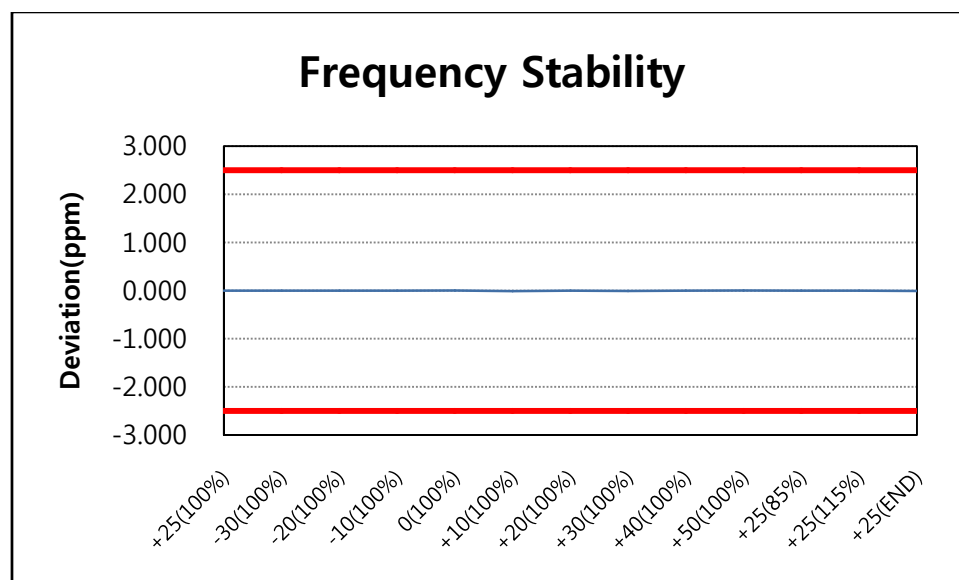

7.9.4 FREQUENCY STABILITY (GSM1900)

OPERATING FREQUENCY : 1,879,999,981 Hz
 CHANNEL : 661(Mid)
 REFERENCE VOLTAGE : 3.700 V DC
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm


VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100 %	3.700	+ 25(Ref)	1,879,999,981	0.000	0.00000000
100 %		- 30	1,879,999,985	0.002	0.00000021
100 %		- 20	1,879,999,983	0.001	0.00000011
100 %		- 10	1,879,999,989	0.004	0.00000043
100 %		0	1,879,999,987	0.003	0.00000032
100 %		+ 10	1,879,999,990	0.005	0.00000048
100 %		+ 20	1,879,999,984	0.002	0.00000016
100 %		+ 30	1,879,999,987	0.003	0.00000032
100 %		+ 40	1,879,999,988	0.004	0.00000037
100 %		+ 50	1,879,999,987	0.003	0.00000032
85 %	3.145	+ 25	1,879,999,983	0.001	0.00000011
115 %	4.255	+ 25	1,879,999,986	0.003	0.00000027
BATT.ENDPOINT	2.650	+ 25	1,879,999,984	0.002	0.00000016

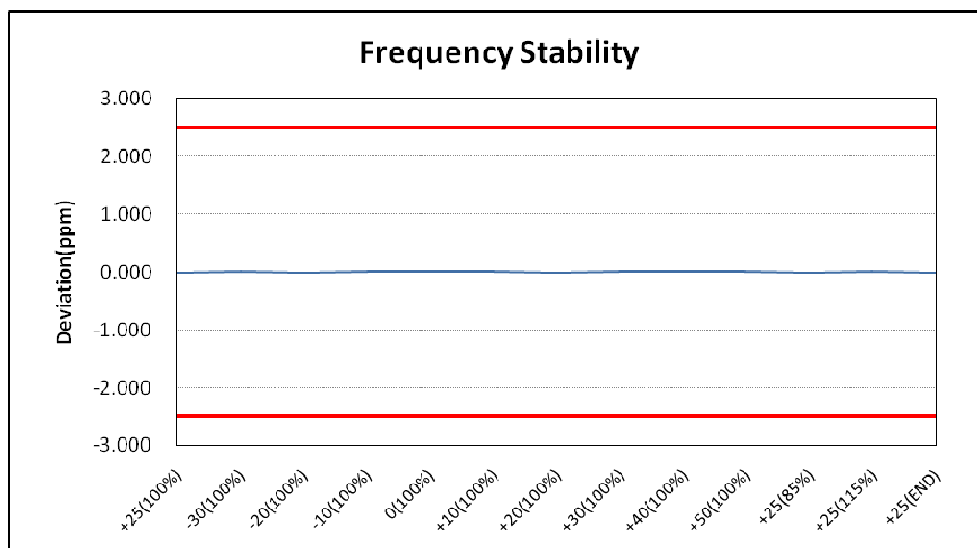

7.9.5 FREQUENCY STABILITY (WCDMA1900)

OPERATING FREQUENCY : 1,879,999,992 Hz
 CHANNEL : 9400(Mid)
 REFERENCE VOLTAGE : 3.700 V DC
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm


VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100%	3.700	+ 25(Ref)	1,879,999,992	0.000	0.00000000
100%		- 30	1,879,999,989	- 0.002	- 0.00000016
100%		- 20	1,879,999,990	- 0.001	- 0.00000011
100%		- 10	1,879,999,988	- 0.002	- 0.00000021
100%		0	1,879,999,993	0.001	0.00000005
100%		+ 10	1,879,999,986	- 0.003	- 0.00000032
100%		+ 20	1,879,999,991	- 0.001	- 0.00000005
100%		+ 30	1,879,999,990	- 0.001	- 0.00000011
100%		+ 40	1,879,999,989	- 0.002	- 0.00000016
100%		+ 50	1,879,999,991	- 0.001	- 0.00000005
85%	3.145	+ 25	1,879,999,993	0.001	0.00000005
115%	4.255	+ 25	1,879,999,988	- 0.002	- 0.00000021
BATT.ENDPOINT	2.650	+ 25	1,879,999,989	- 0.002	- 0.00000016

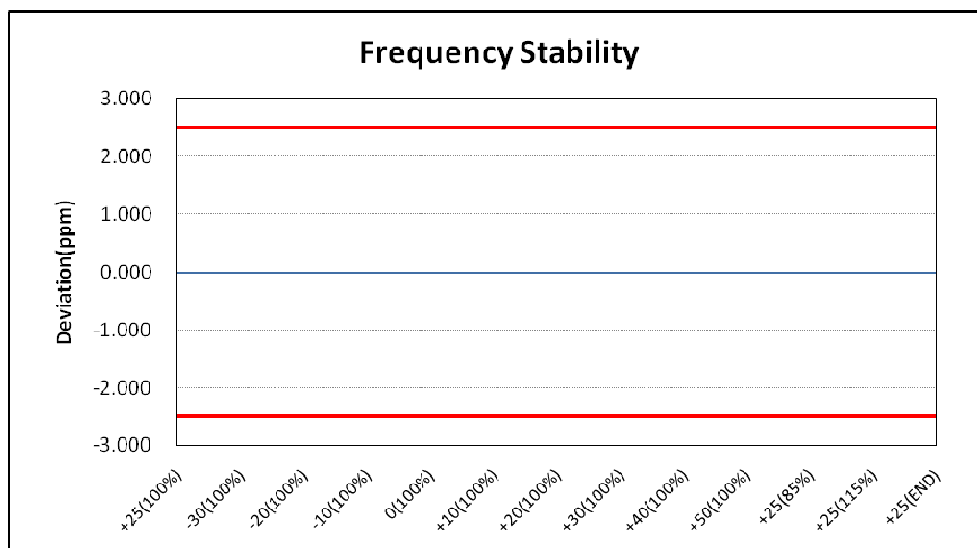

7.9.6 FREQUENCY STABILITY (HSUPA1900)

OPERATING FREQUENCY : 1,879,999,989 Hz
 CHANNEL : 9400(Mid)
 REFERENCE VOLTAGE : 3.700 V DC
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100%	3.700	+ 25(Ref)	1,879,999,989	0.000	0.00000000
100%		- 30	1,879,999,990	0.001	0.00000005
100%		- 20	1,879,999,989	0.000	0.00000000
100%		- 10	1,879,999,990	0.001	0.00000005
100%		0	1,879,999,988	- 0.001	- 0.00000005
100%		+ 10	1,879,999,993	0.002	0.00000021
100%		+ 20	1,879,999,989	0.000	0.00000000
100%		+ 30	1,879,999,992	0.002	0.00000016
100%		+ 40	1,879,999,991	0.001	0.00000011
100%		+ 50	1,879,999,988	- 0.001	- 0.00000005
85%	3.145	+ 25	1,879,999,990	0.001	0.00000005
115%	4.255	+ 25	1,879,999,987	- 0.001	- 0.00000011
BATT.ENDPOINT	2.650	+ 25	1,879,999,991	0.001	0.00000011

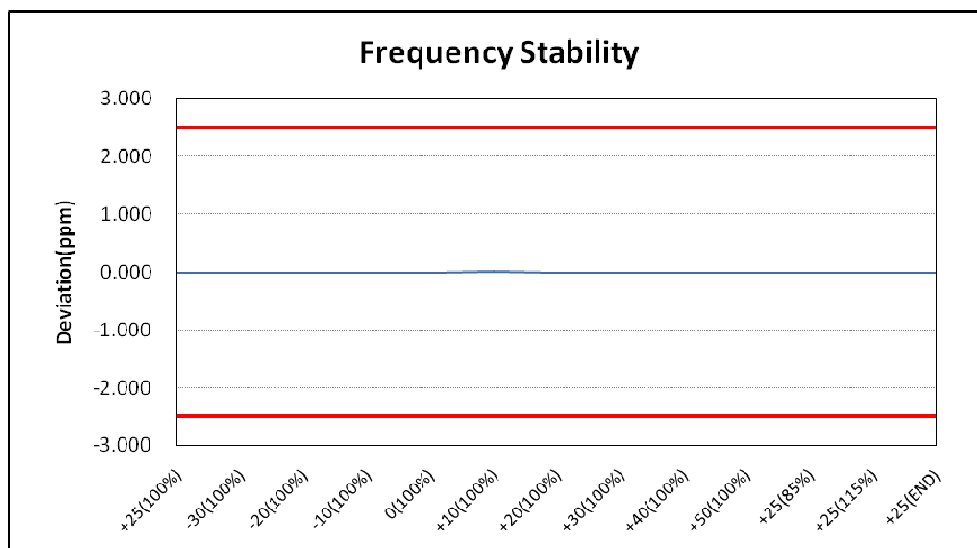


8. TEST PLOTS

8.1 Peak to Average Ratio


- P_{pk} (dBm)

GSM1900 & Channel: 661


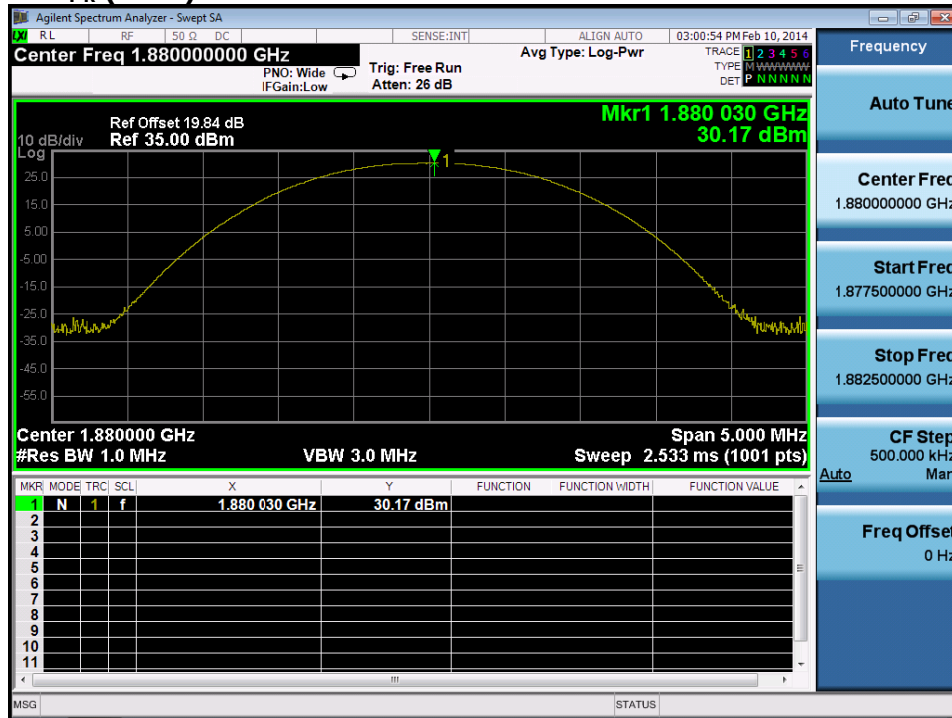


- P_{avg} (dBm)

GSM1900 & Channel: 661

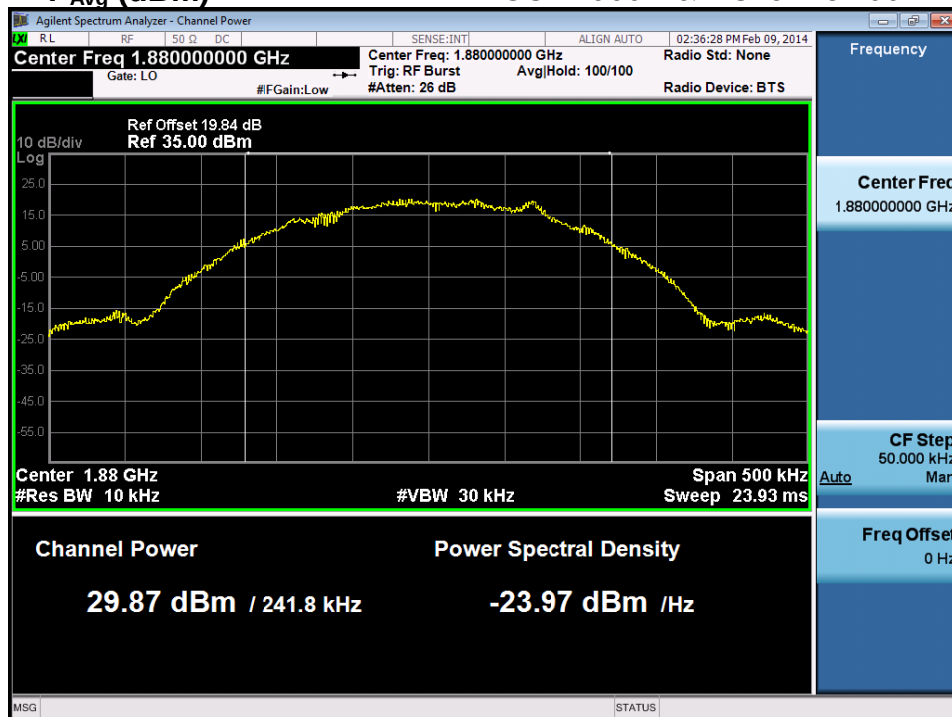


$$\text{PAPR (dB)} = P_{\text{pk}} \text{ (dBm)} - P_{\text{avg}} \text{ (dBm)} = 30.17 \text{ dBm} - 29.87 \text{ dBm} = 0.30 \text{ dB}$$

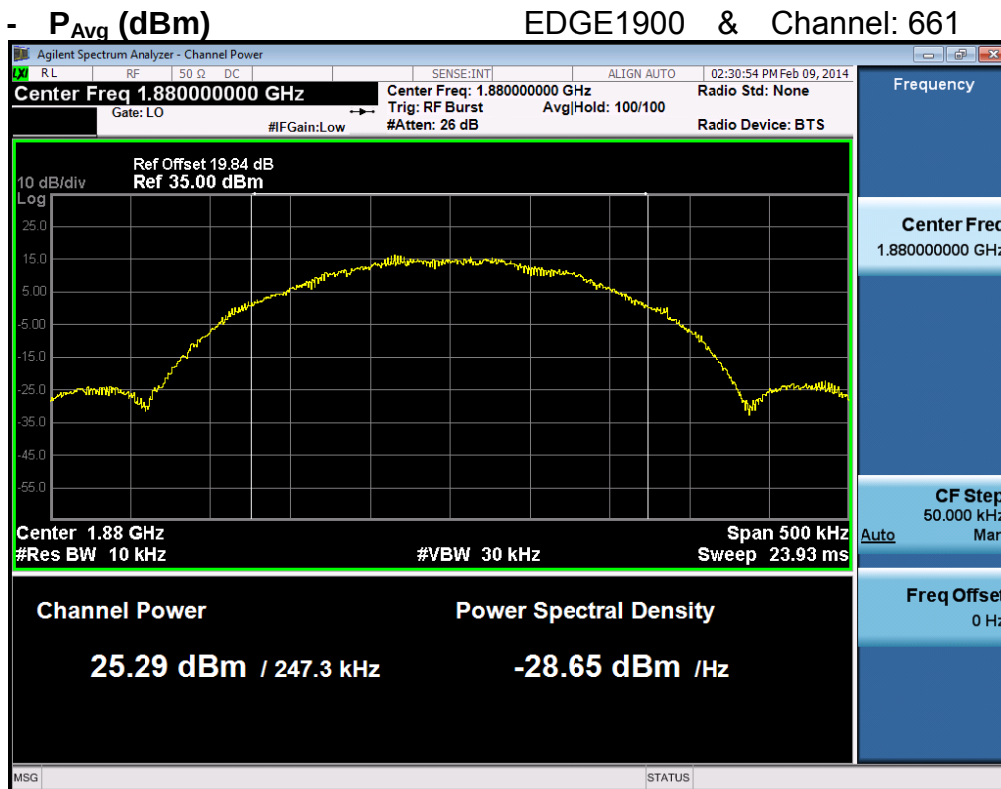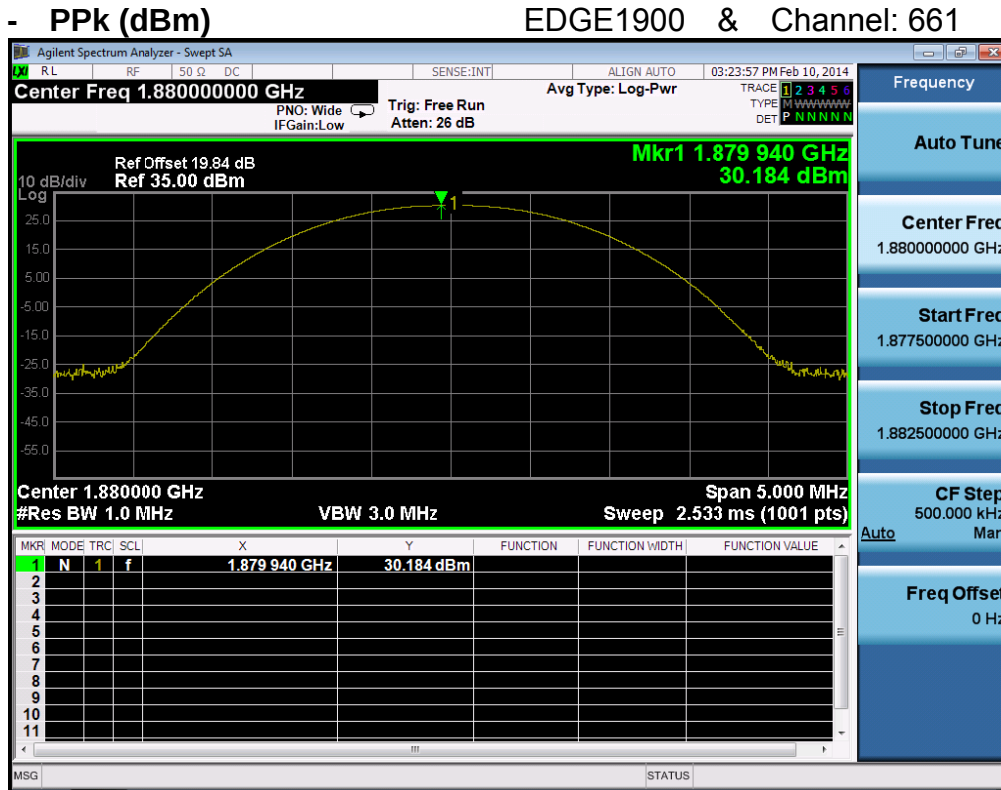


$$\text{PAPR (dB)} = P_{Pk} \text{ (dBm)} - P_{Avg} \text{ (dBm)} = 30.18 \text{ dBm} - 25.29 \text{ dBm} = 4.89 \text{ dB}$$

WCDMA1900 & Channel: 9400

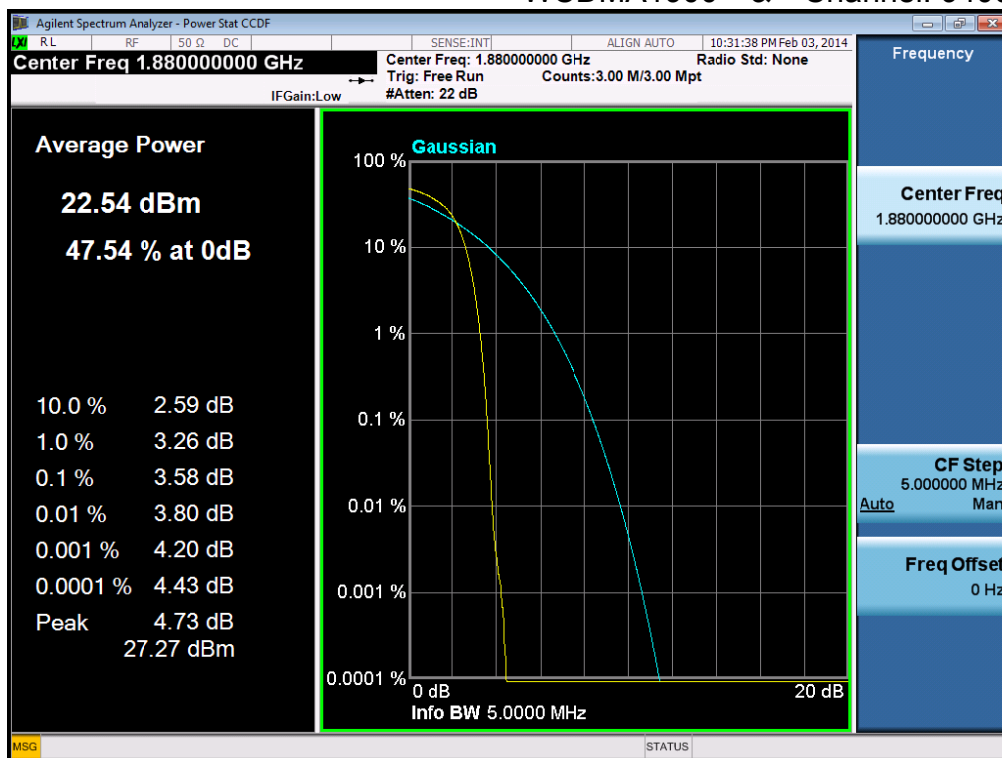


HSUPA1900 & Channel: 9400

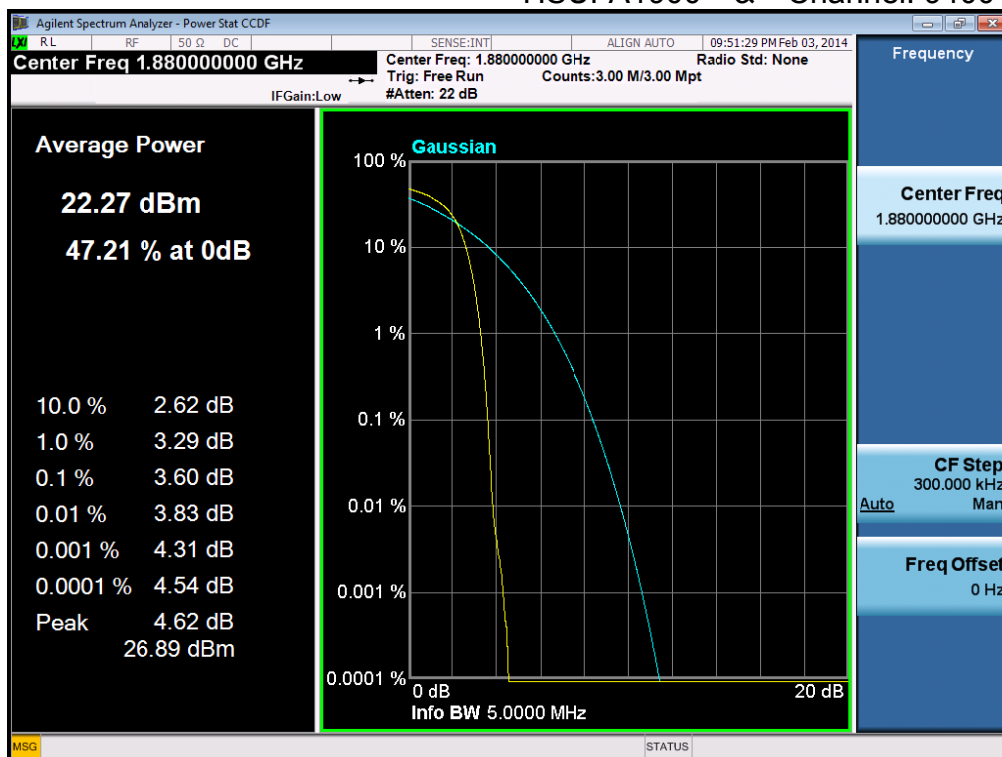


8.2 Occupied Bandwidth 99 % Bandwidth


GSM850 & Channel: 128

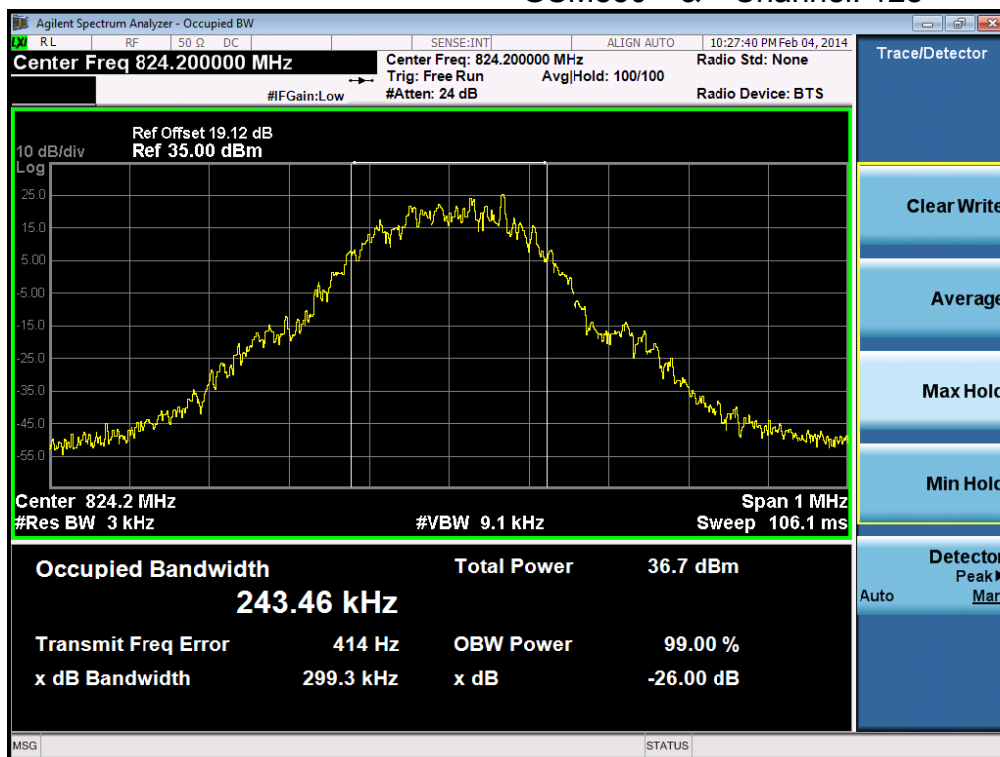


GSM850 & Channel: 190

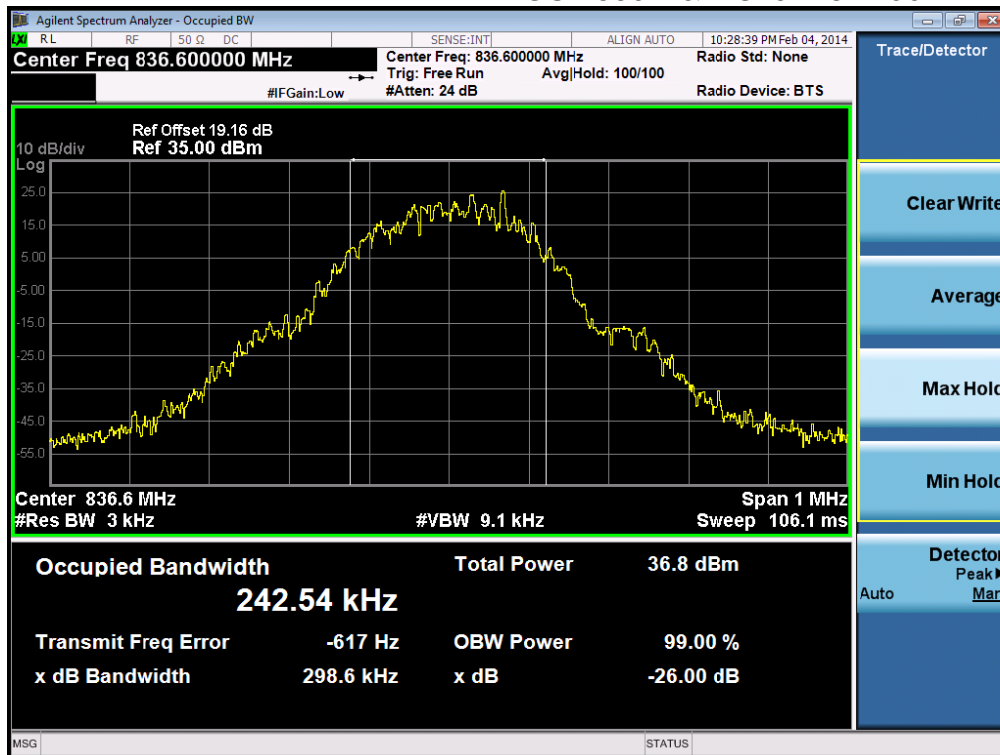


GSM850 & Channel: 251

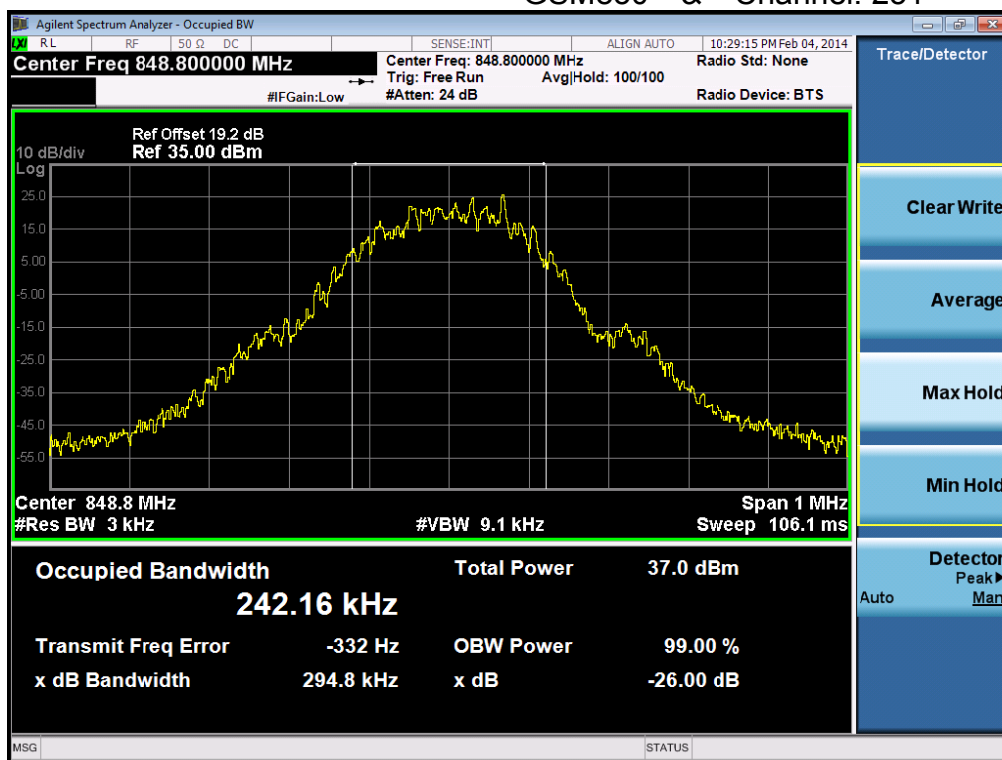


EDGE 850 & Channel: 128

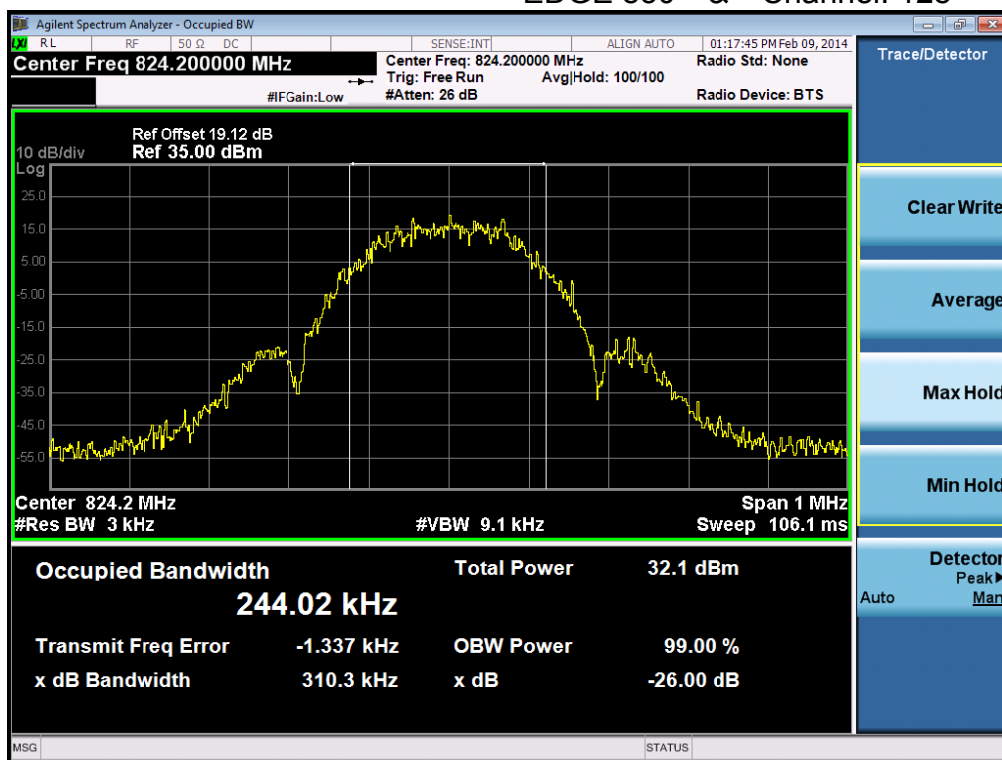


EDGE 850 & Channel: 190

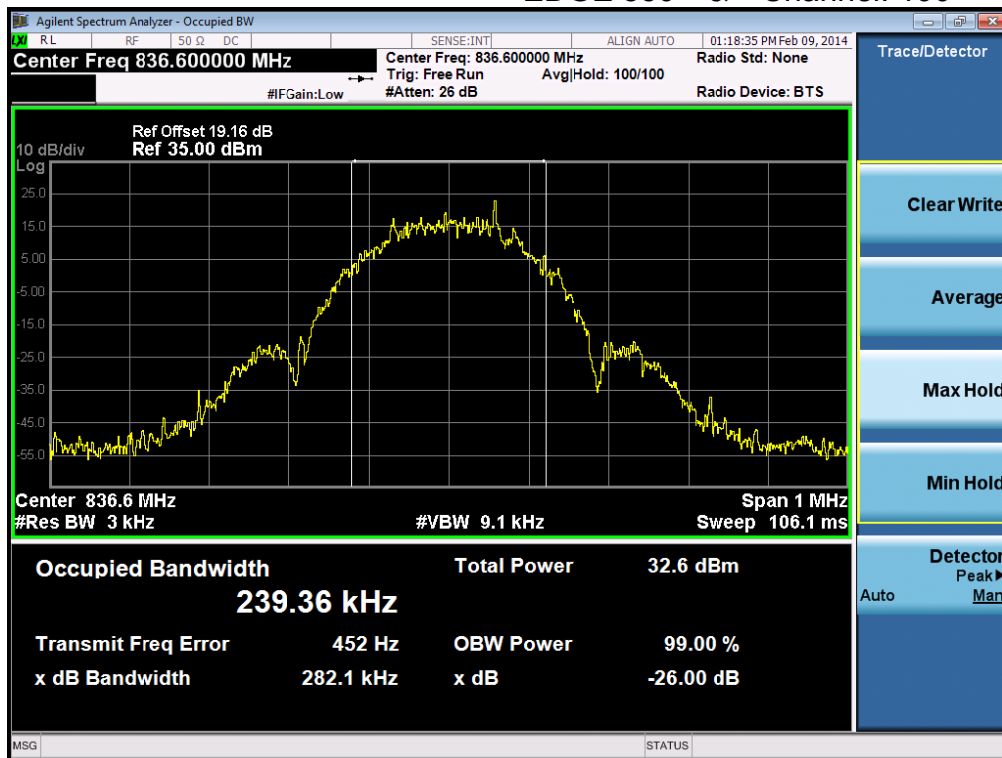


EDGE 850 & Channel: 251

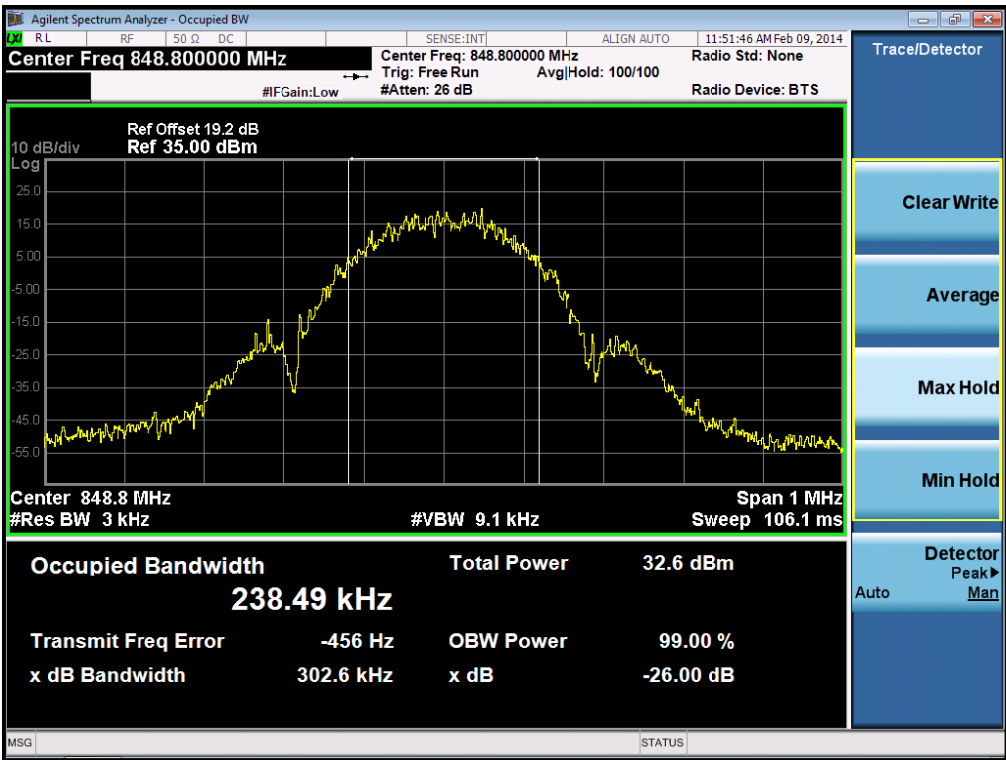


WCDMA850 & Channel: 4132

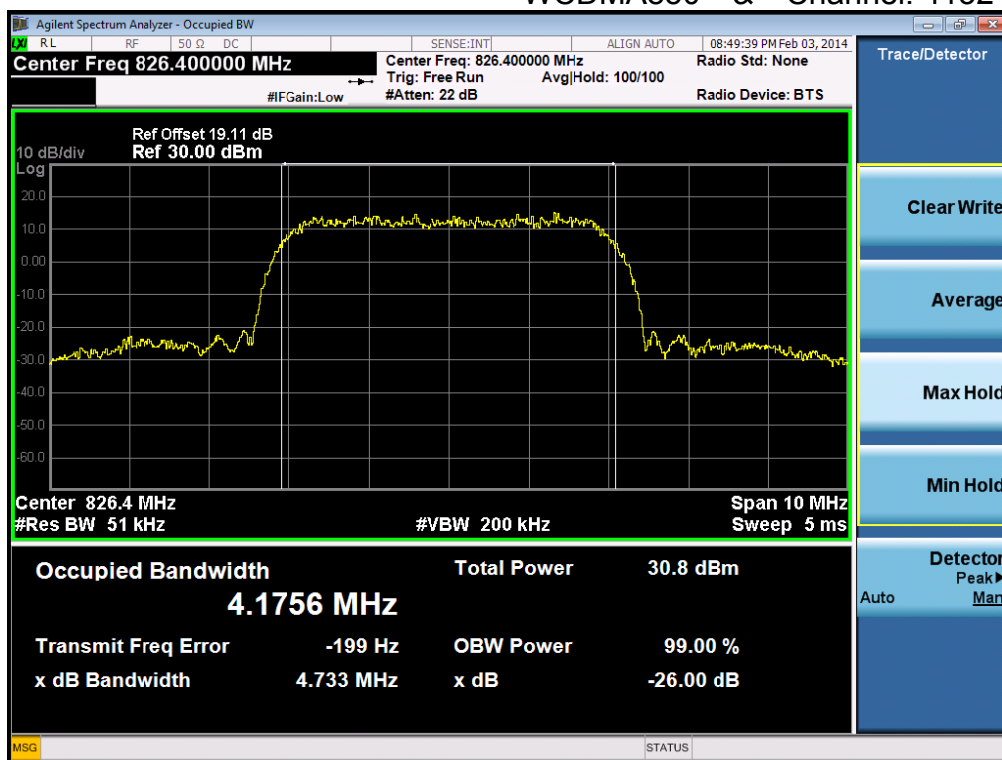


WCDMA850 & Channel: 4183

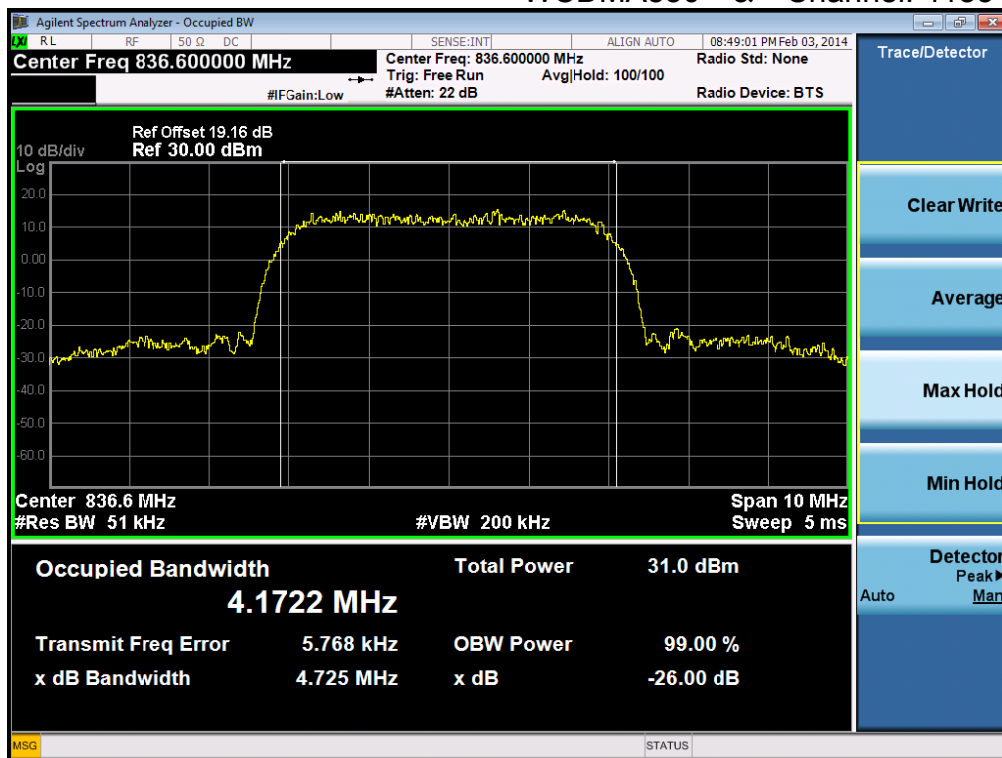


WCDMA850 & Channel: 4233

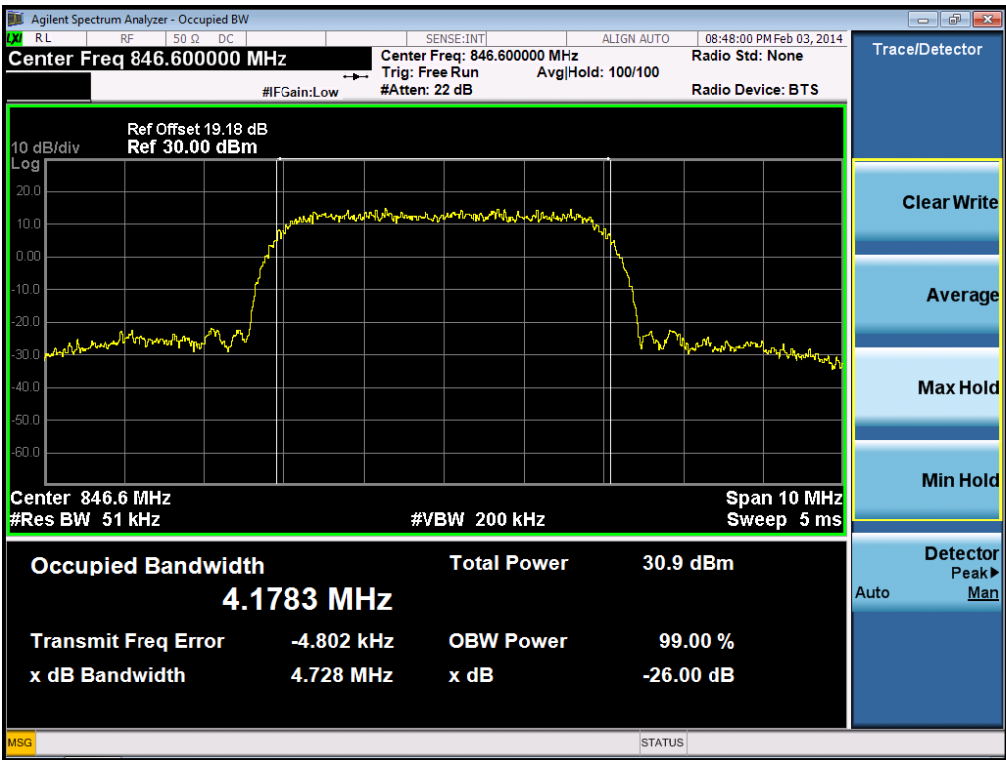


HSUPA850 & Channel: 4132

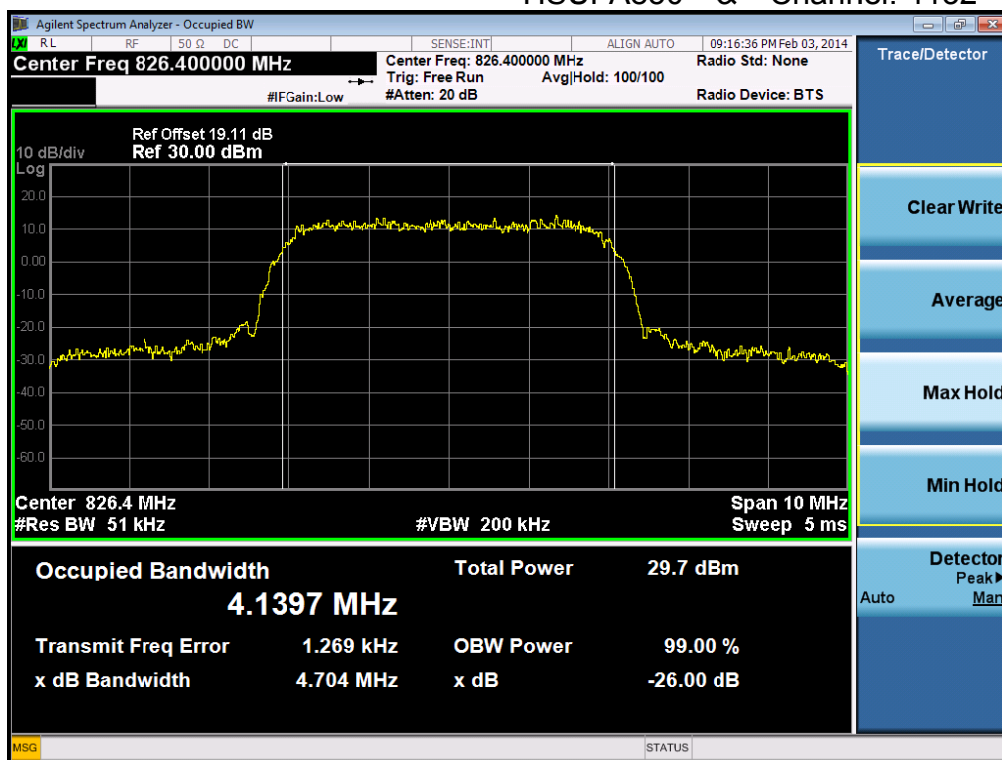


HSUPA850 & Channel: 4183

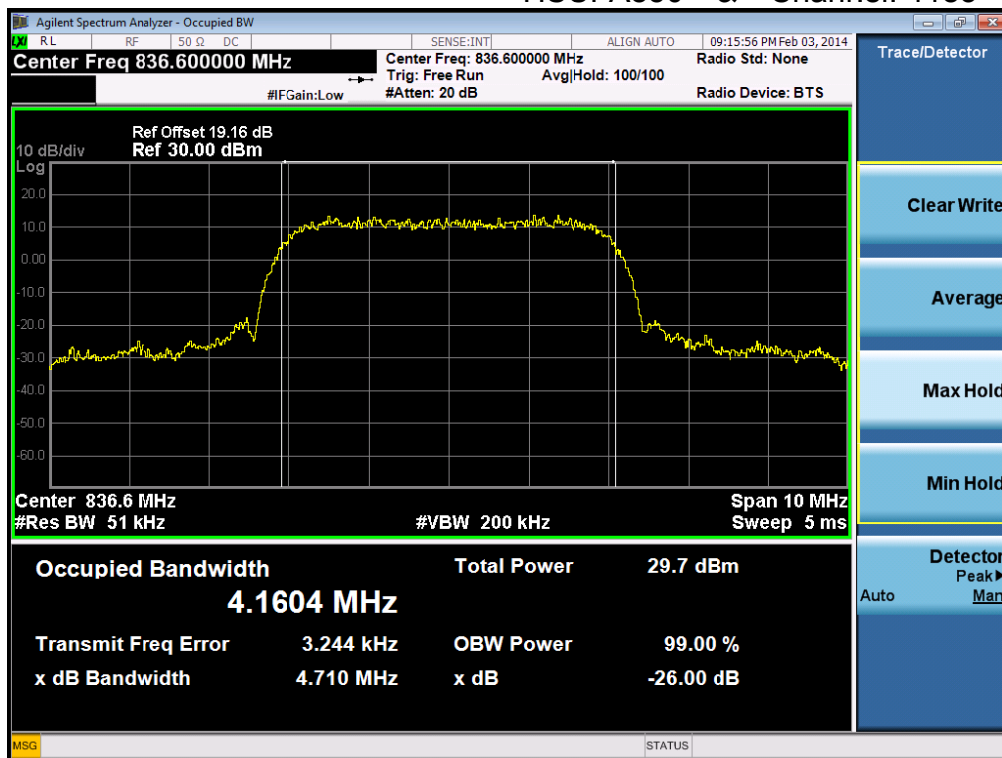


HSUPA850 & Channel: 4233

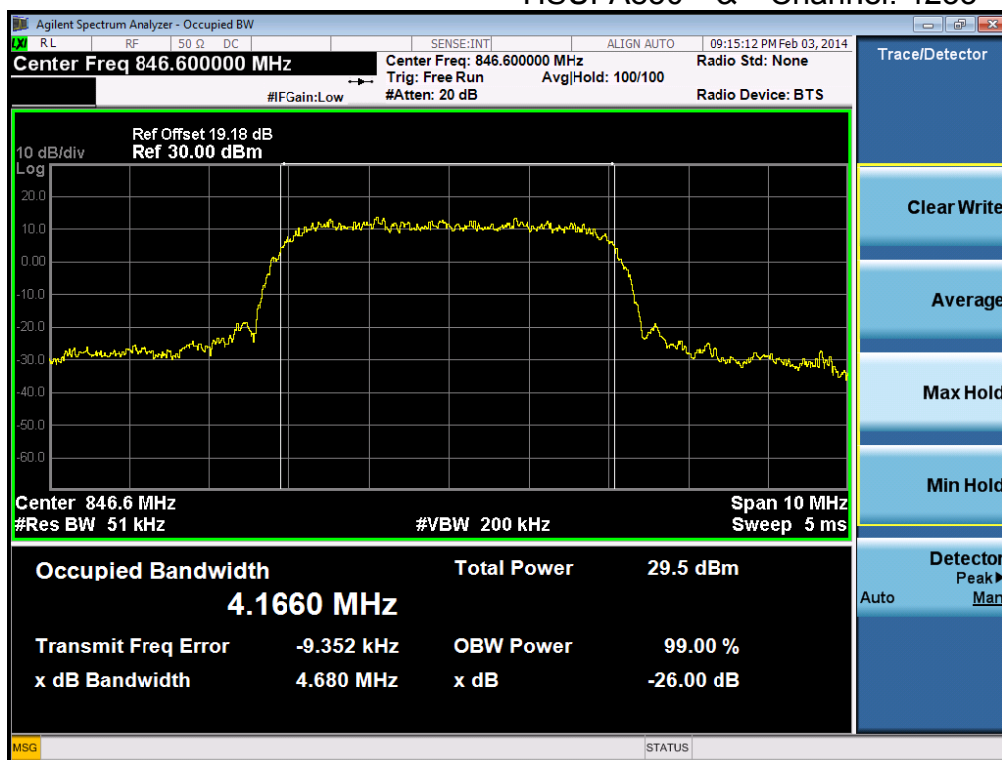


GSM 1900 & Channel: 512

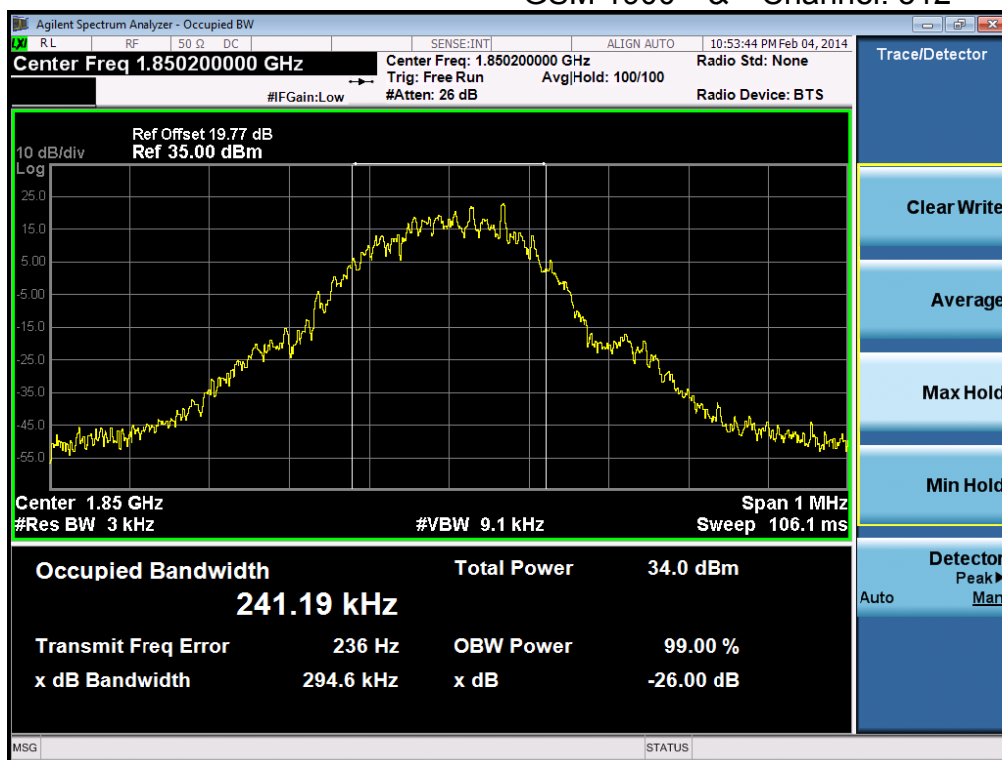


GSM 1900 & Channel: 661

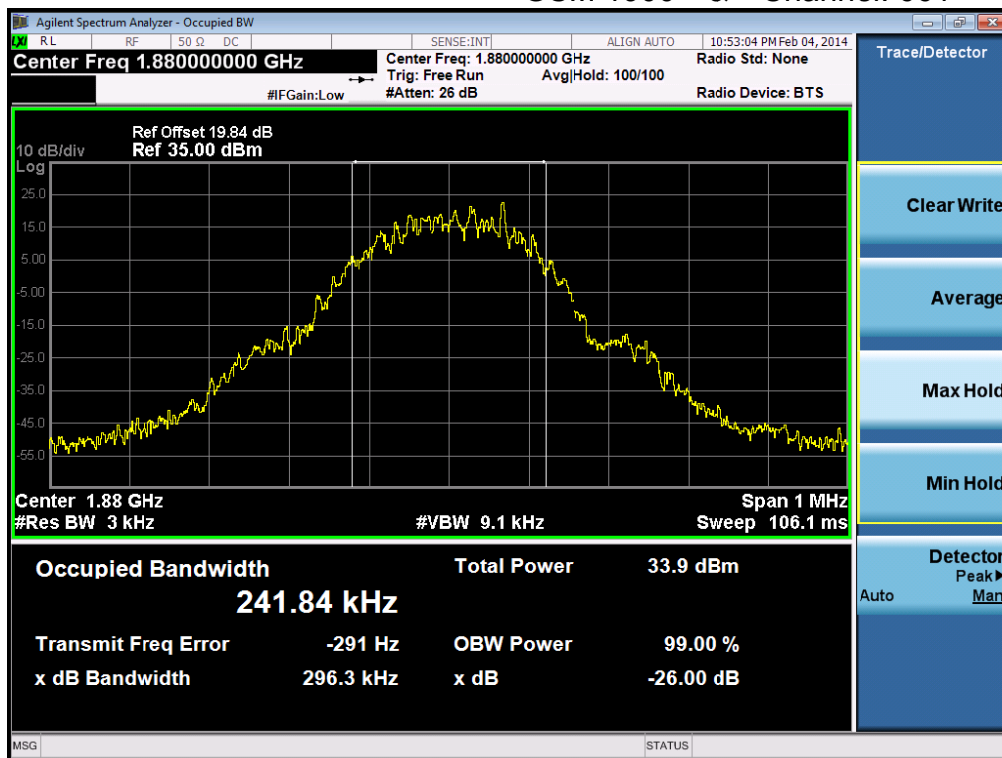


GSM 1900 & Channel: 810

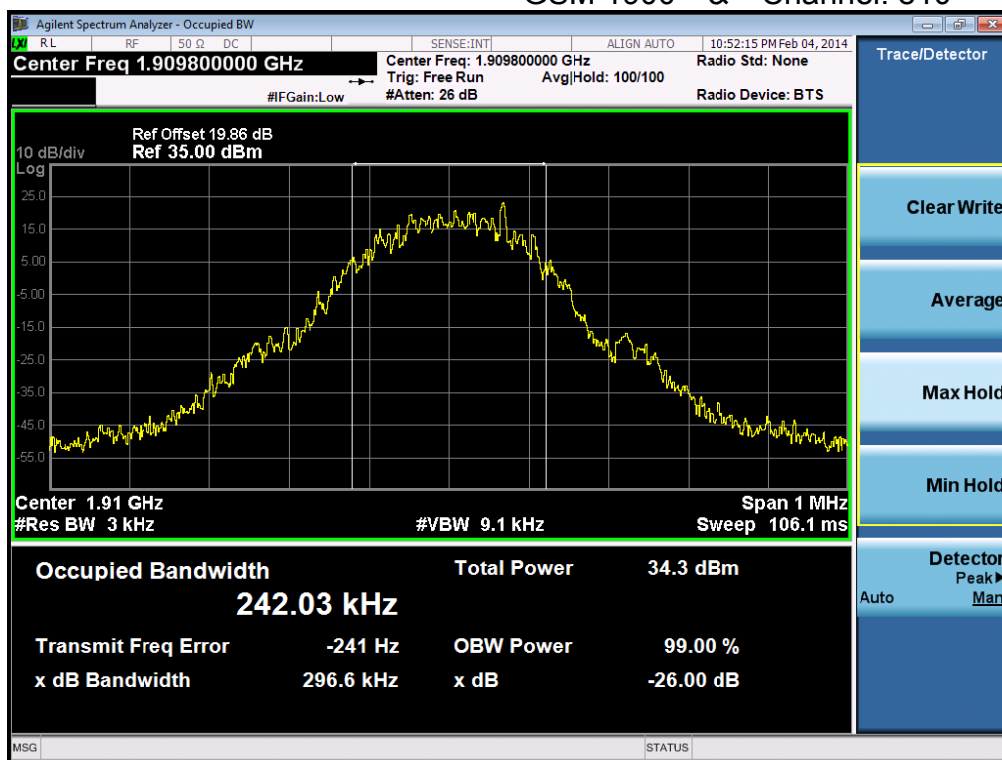


EDGE 1900 & Channel: 512

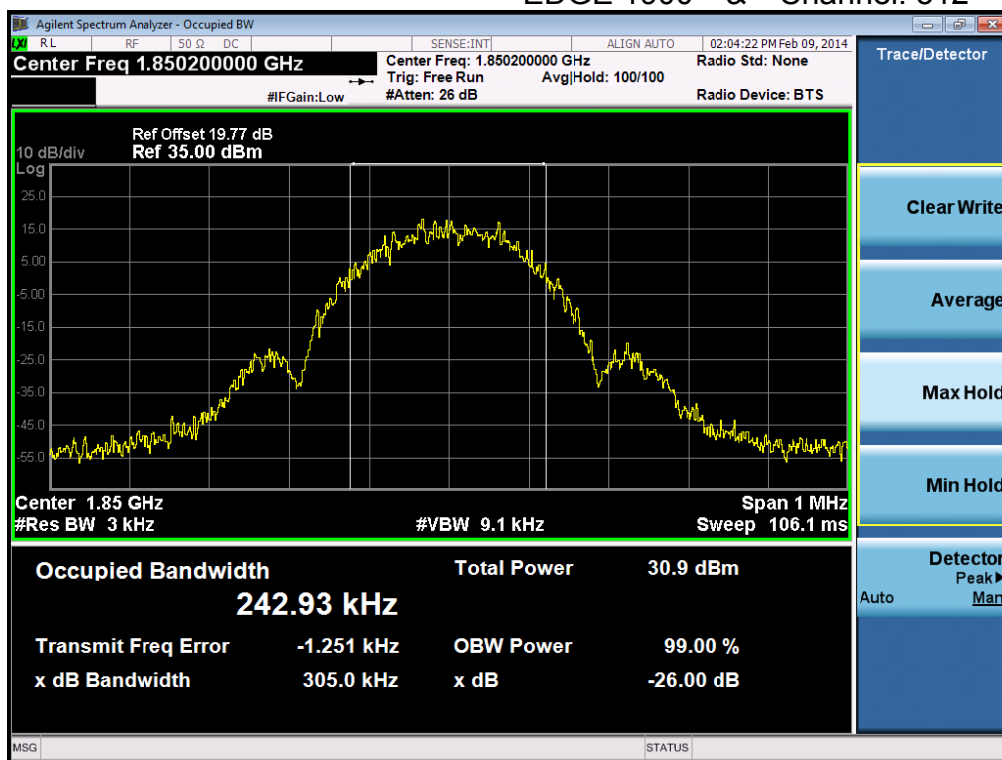


EDGE 1900 & Channel: 661

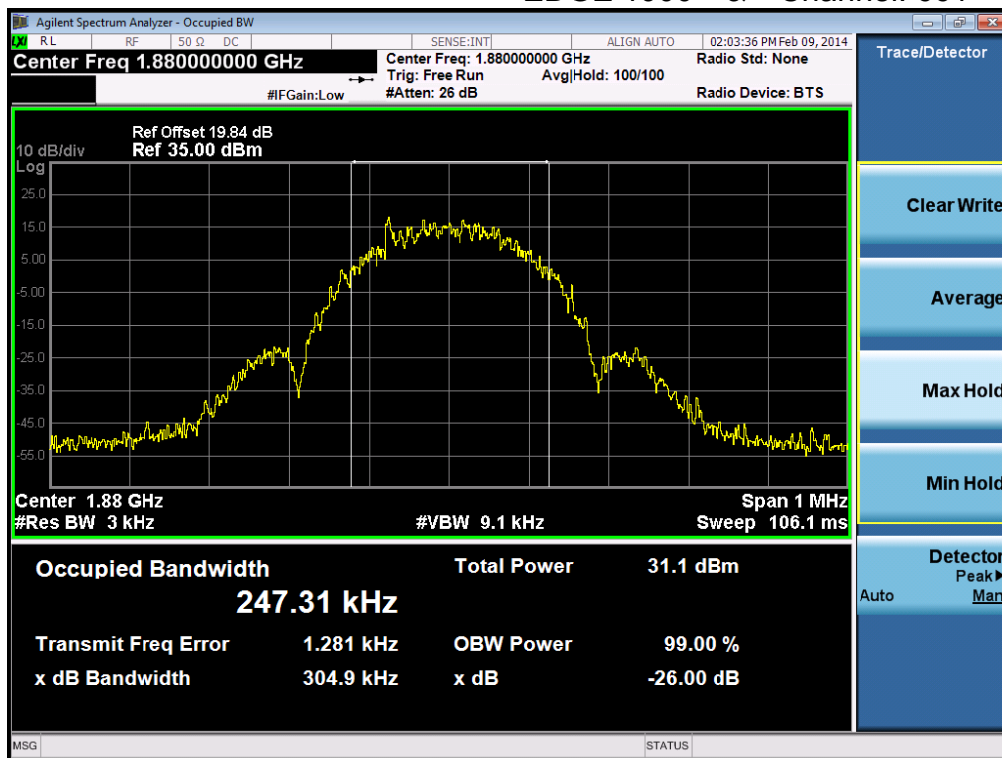


EDGE 1900 & Channel: 810

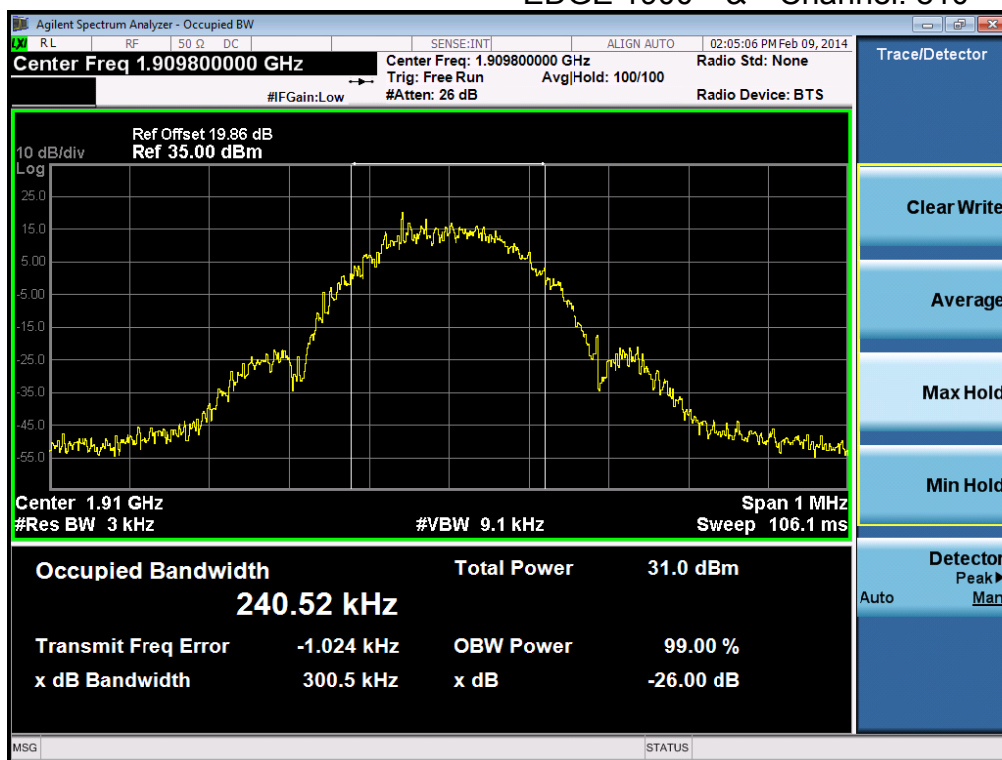


WCDMA1900 & Channel: 9262

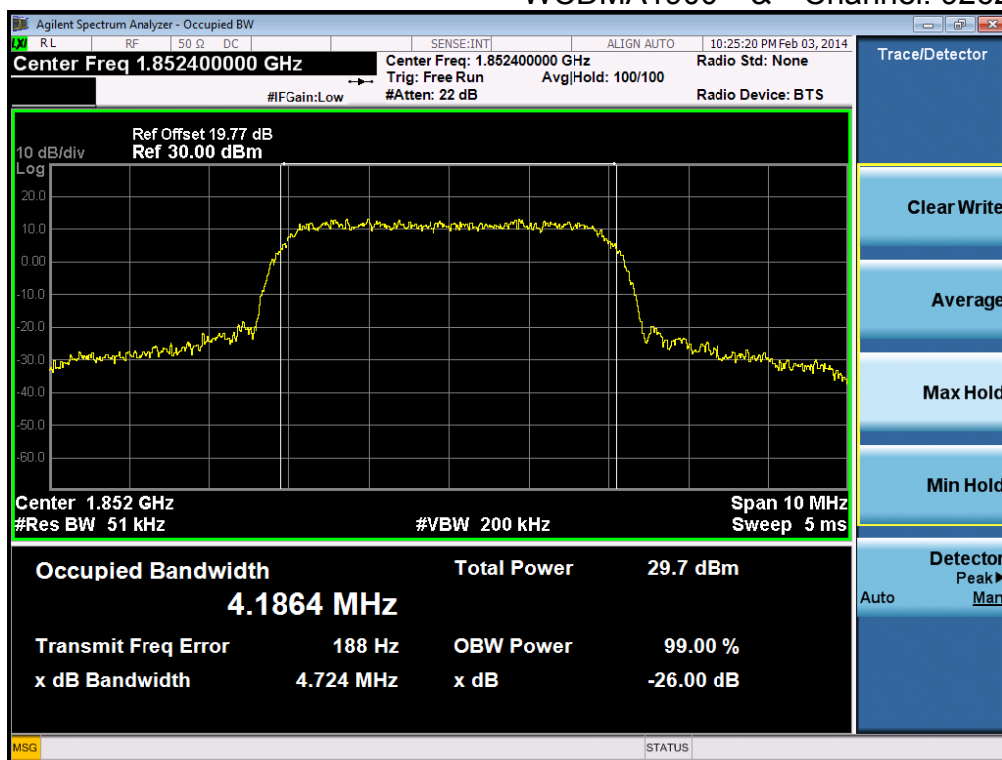


WCDMA1900 & Channel: 9400

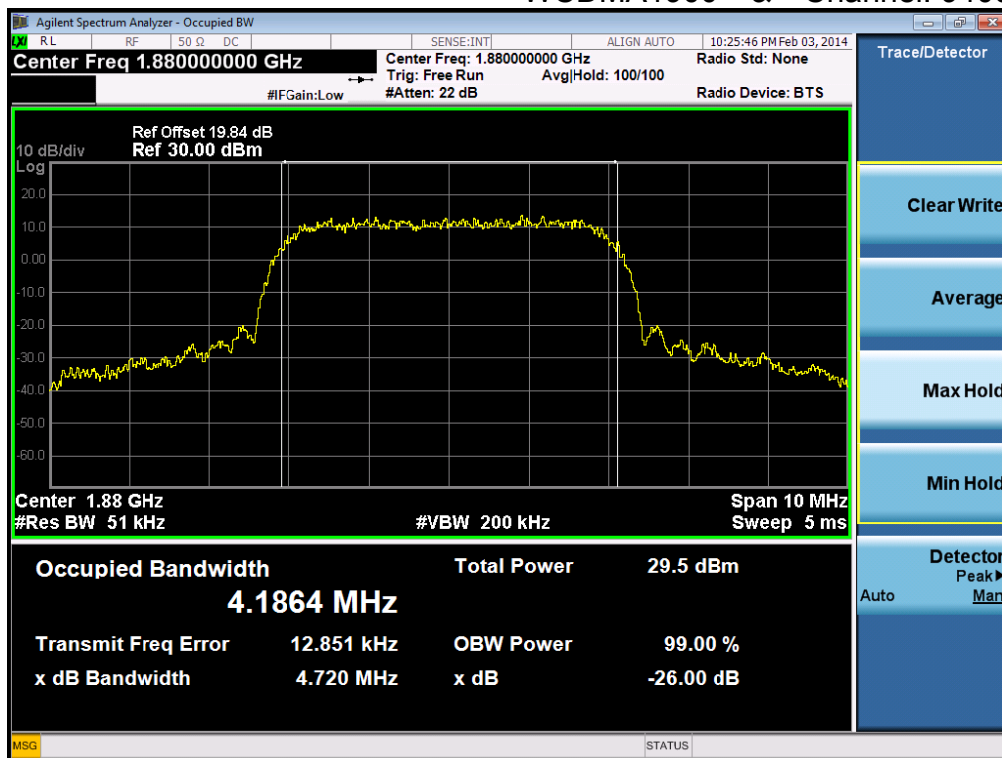


WCDMA1900 & Channel: 9538

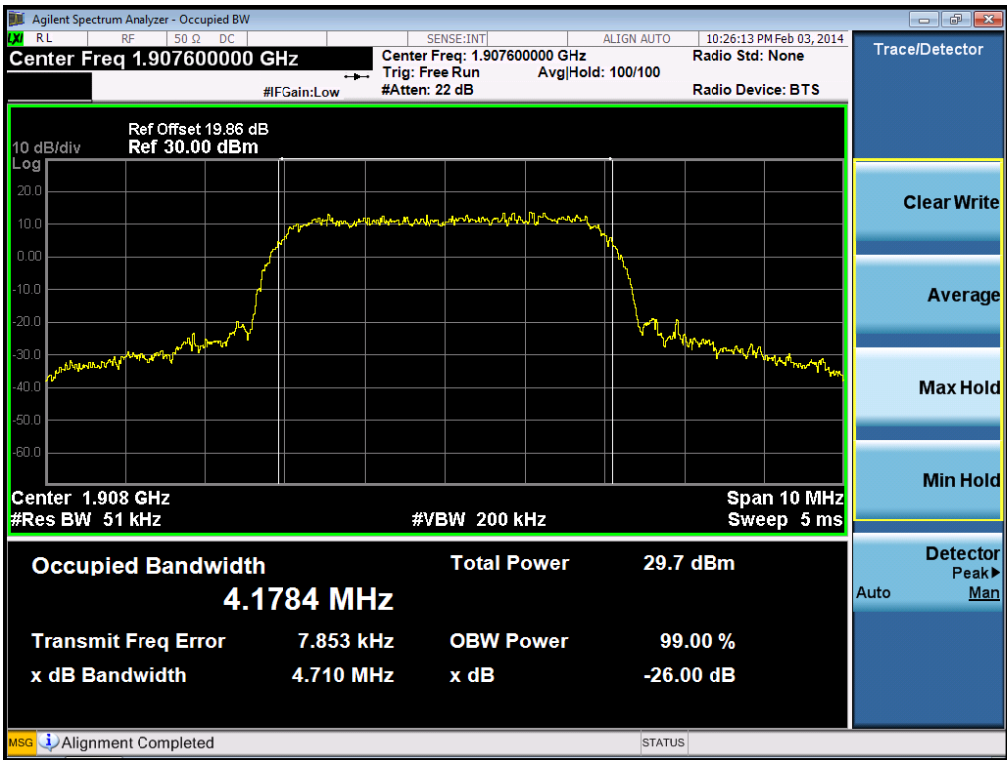


HSUPA1900 & Channel: 9262

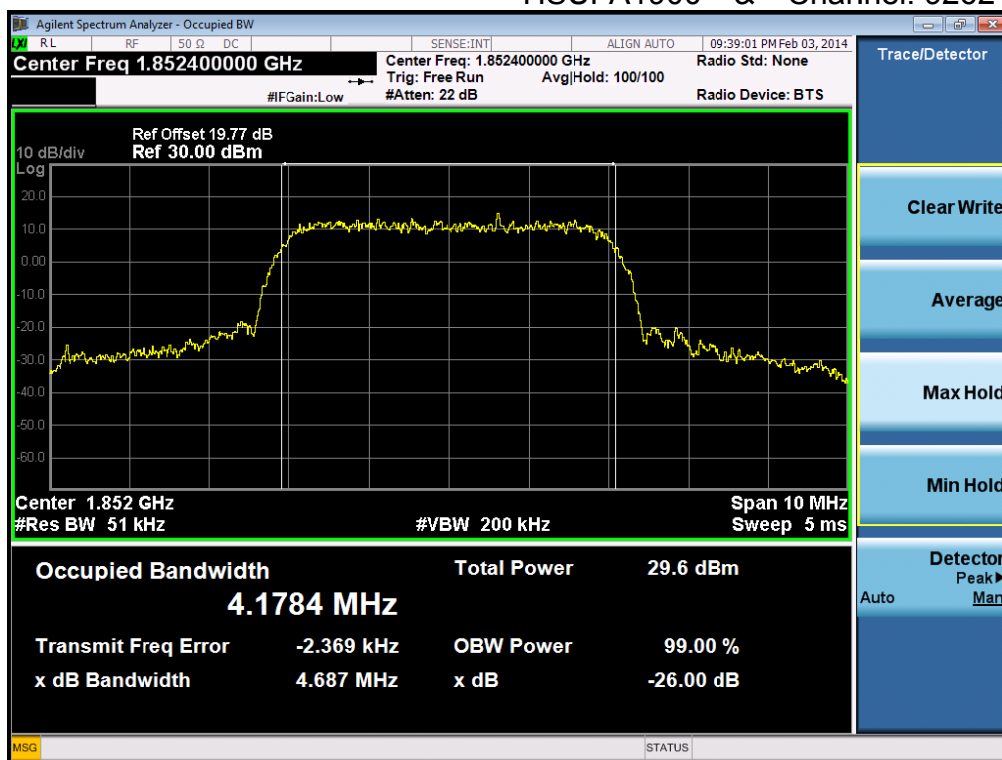

HSUPA1900 & Channel: 9400

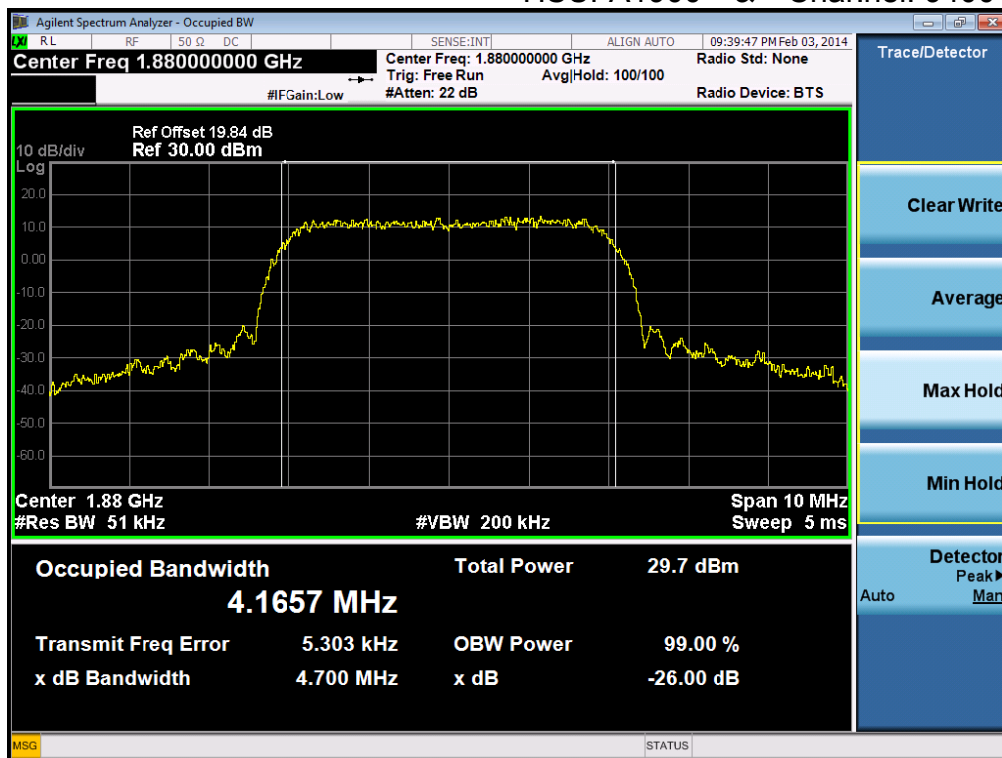


HSUPA1900 & Channel: 9538

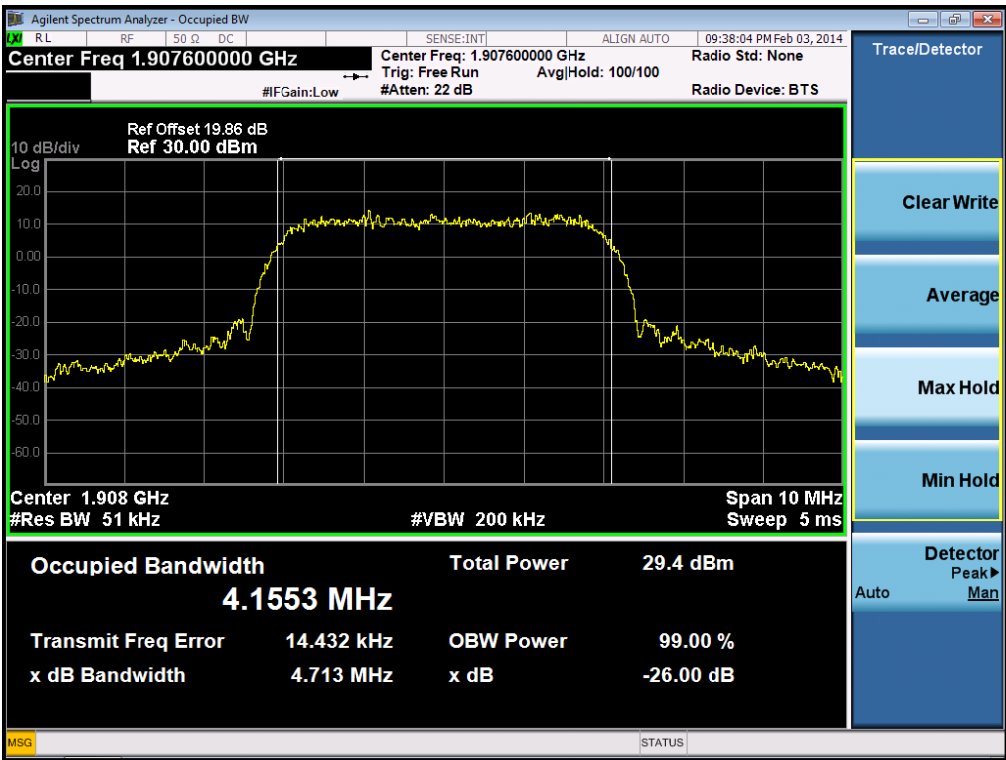


8.3 Spurious Emissions at Antenna Terminal


GSM850 & Channel: 128

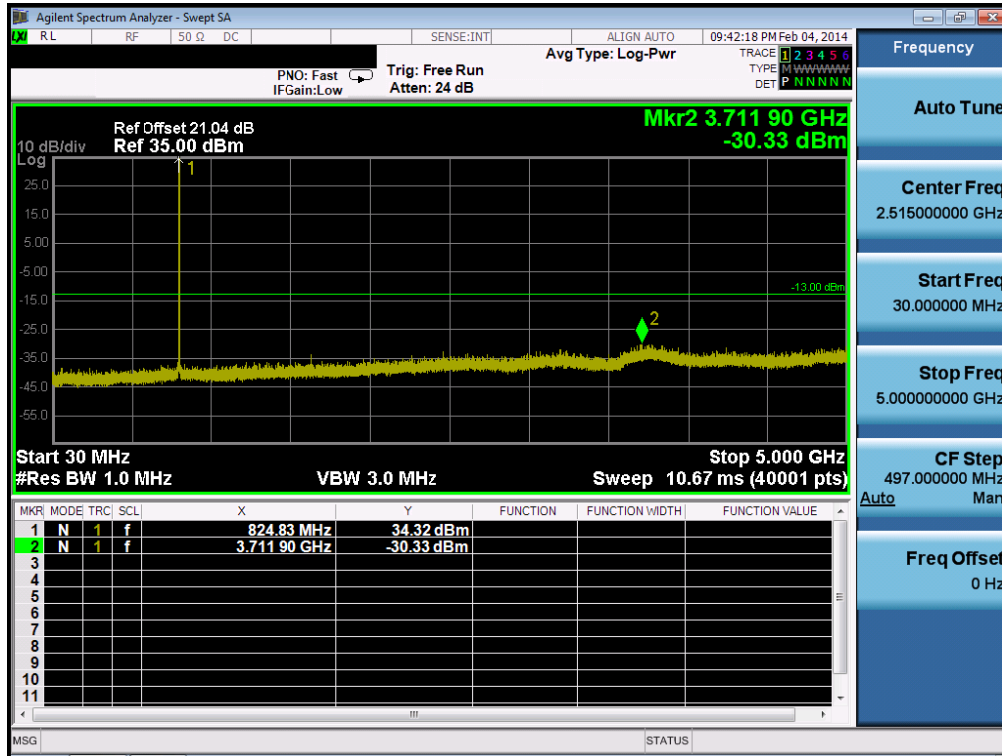


GSM850 & Channel: 128

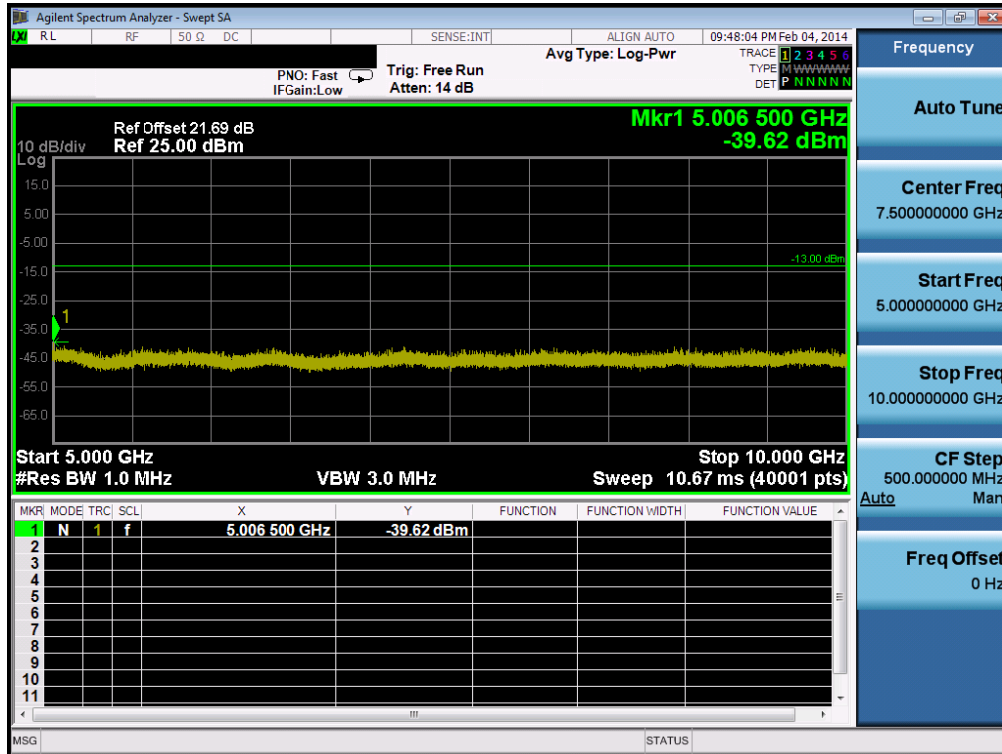


GSM850 & Channel: 190

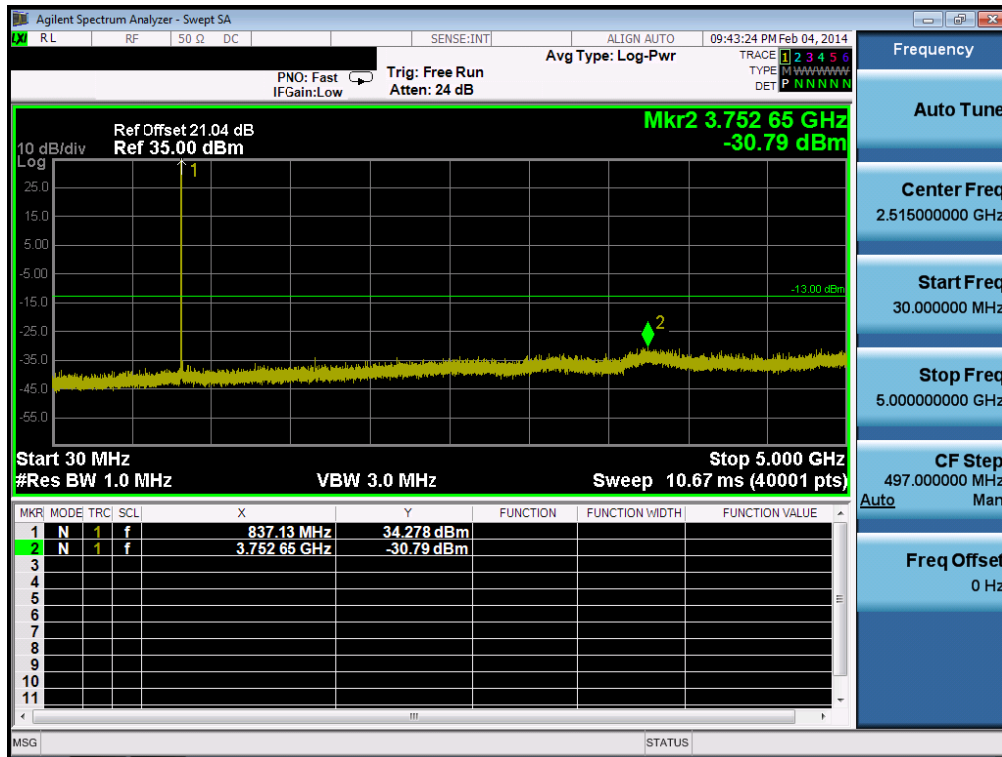


GSM850 & Channel: 190

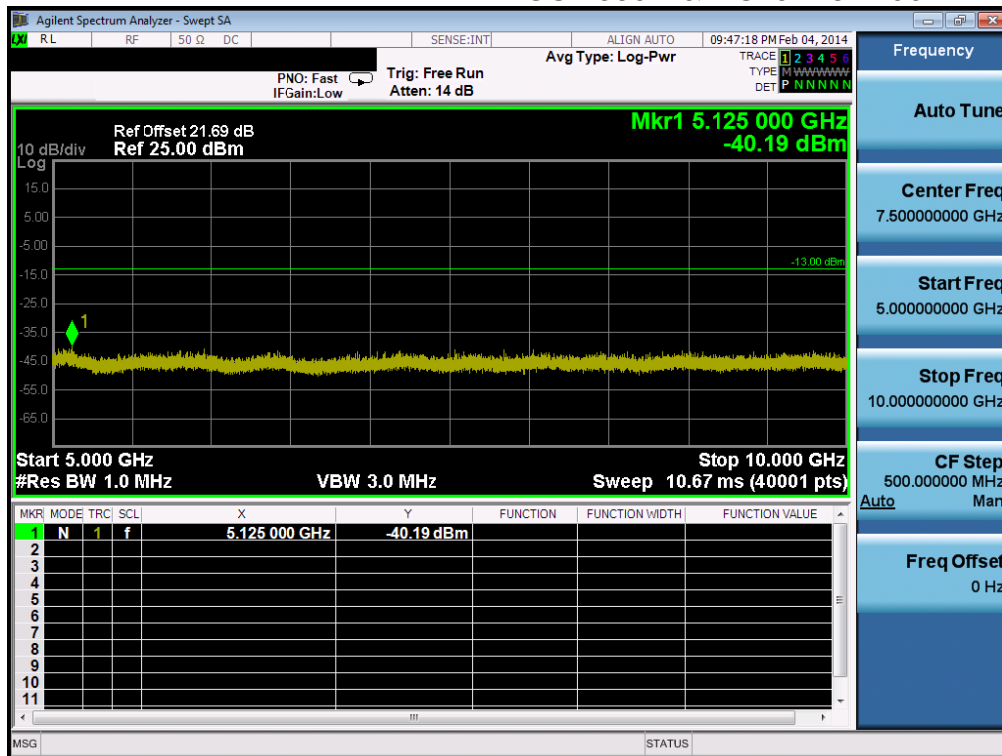


GSM850 & Channel: 251

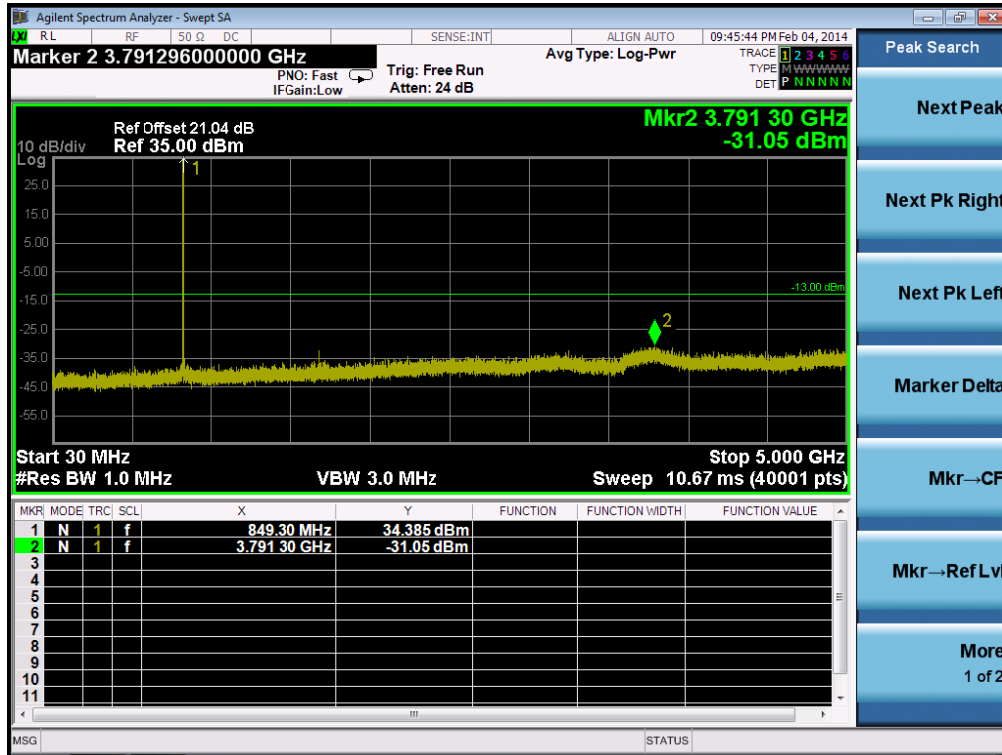


GSM850 & Channel: 251

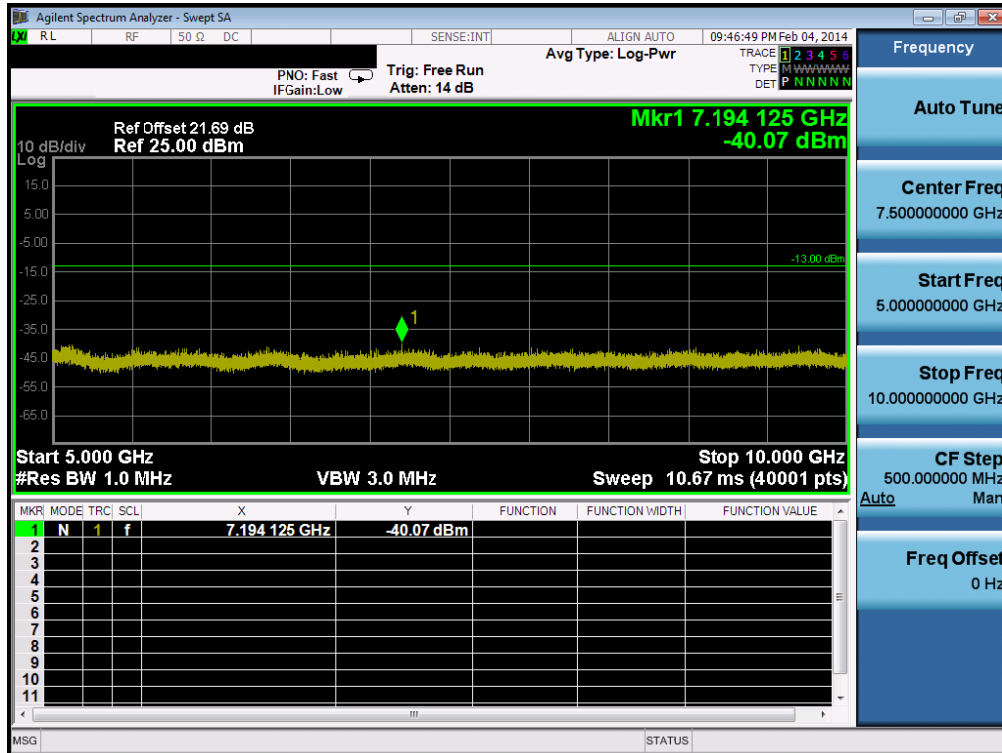


WCDMA850 & Channel: 4132

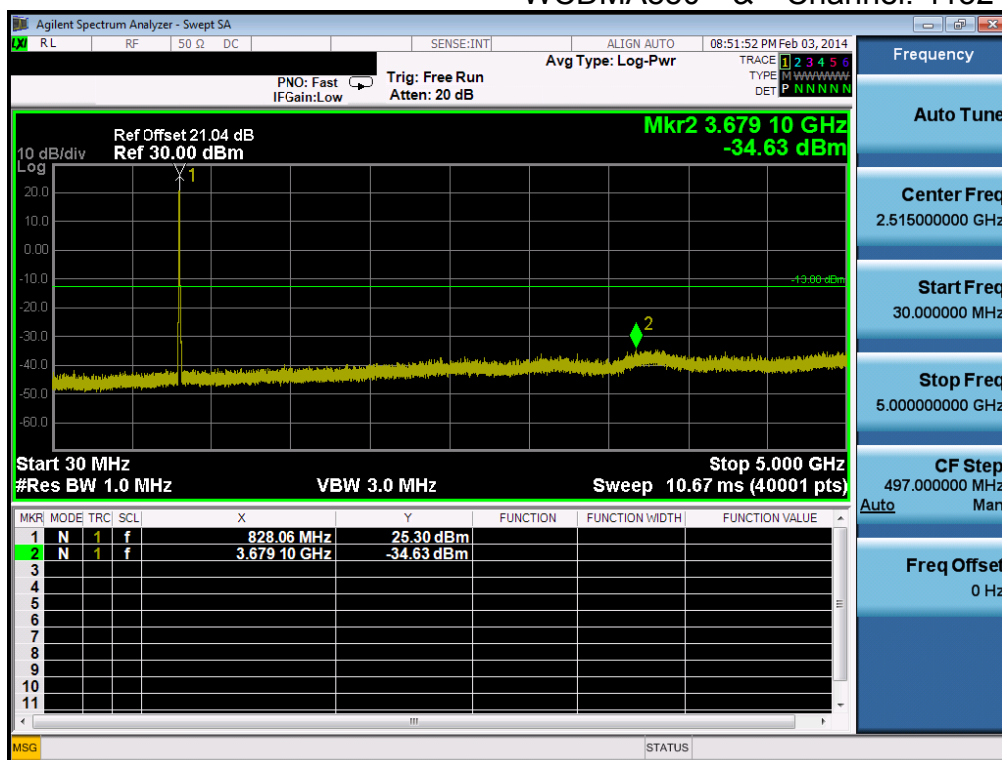


WCDMA850 & Channel: 4132

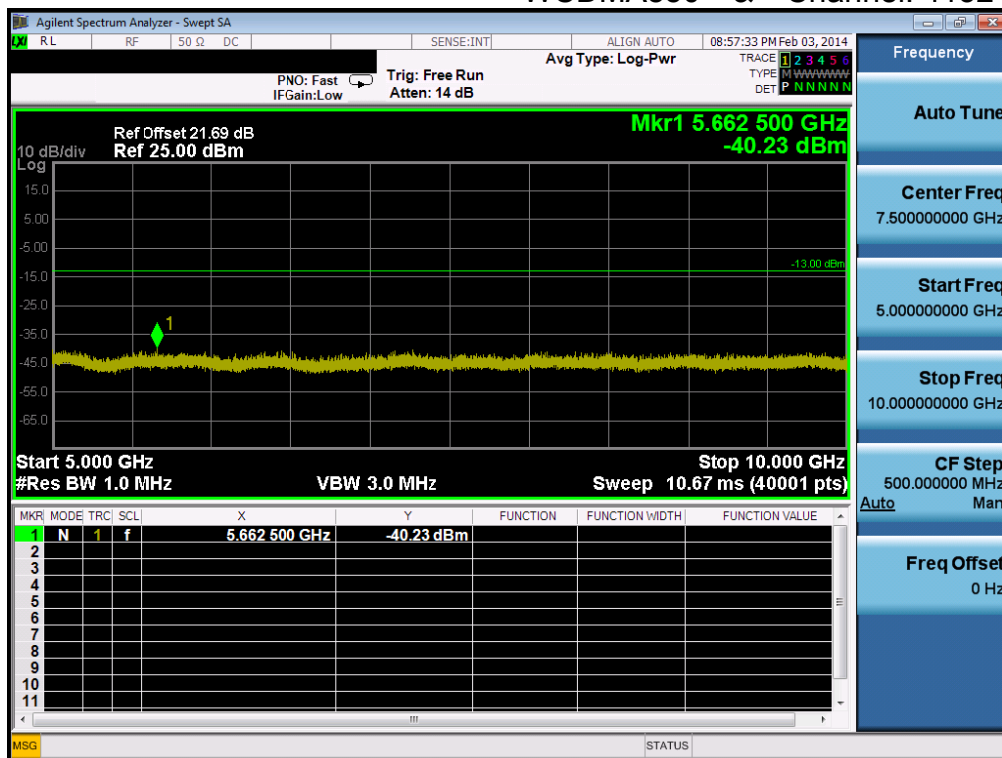


WCDMA850 & Channel: 4183

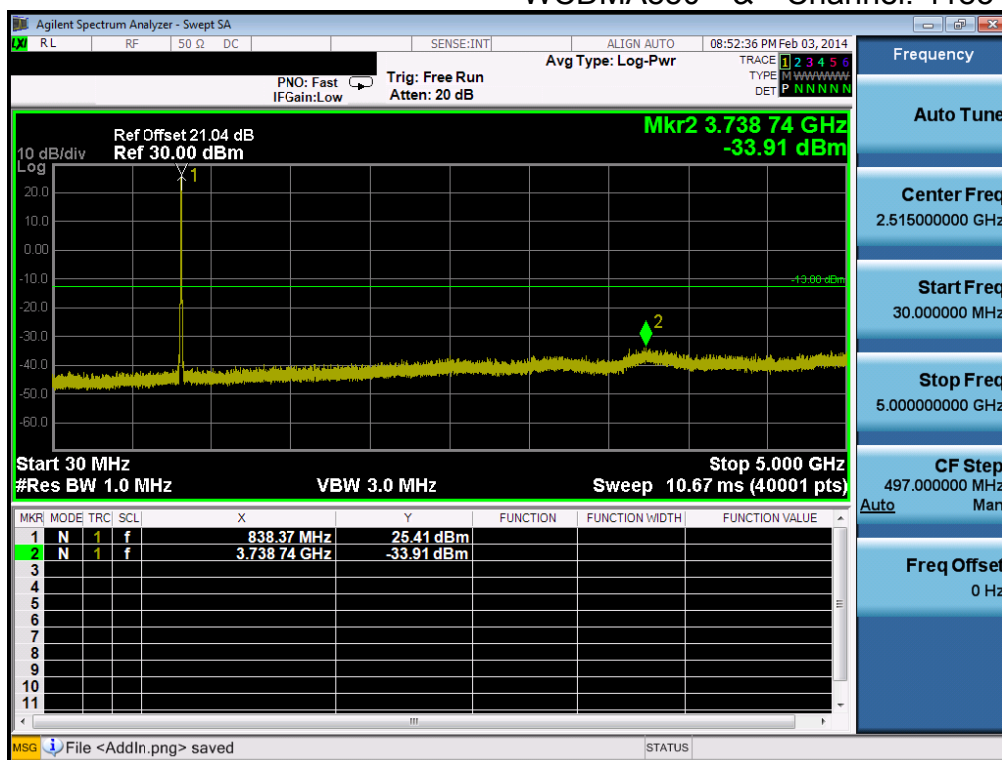


WCDMA850 & Channel: 4183

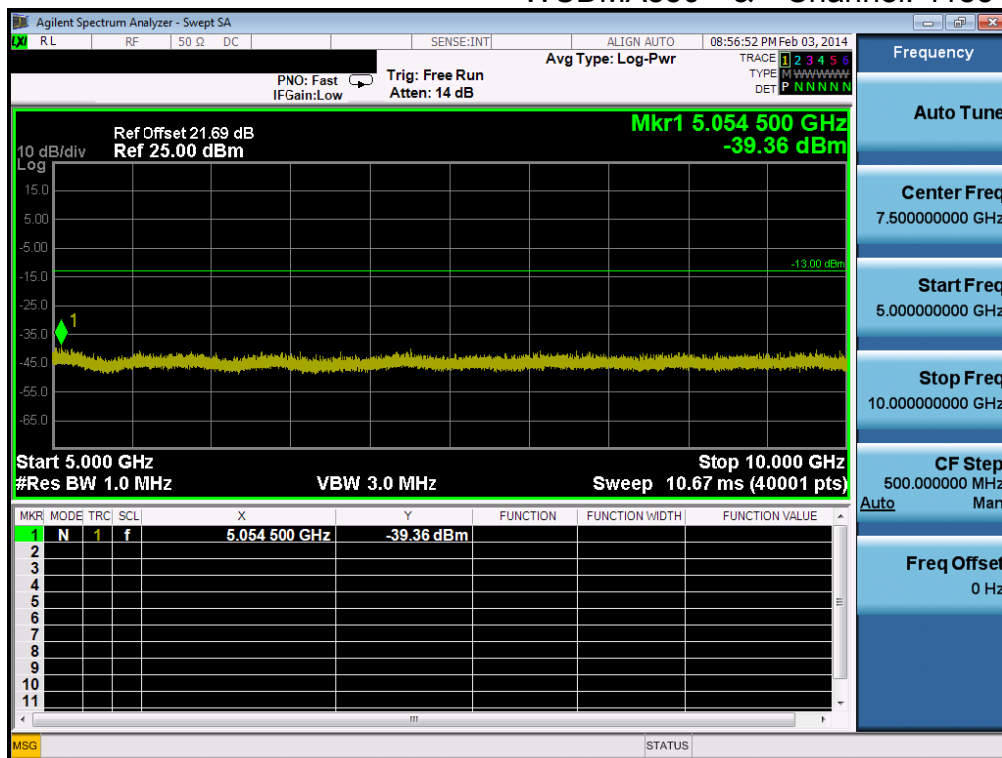


WCDMA850 & Channel: 4233

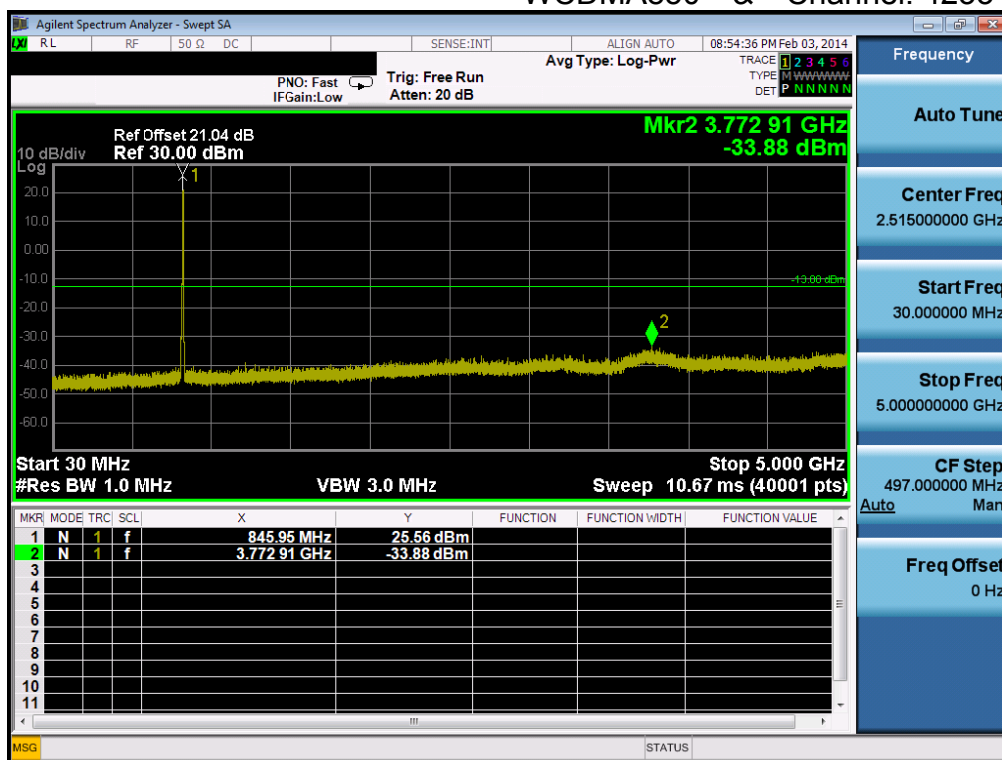


WCDMA850 & Channel: 4233

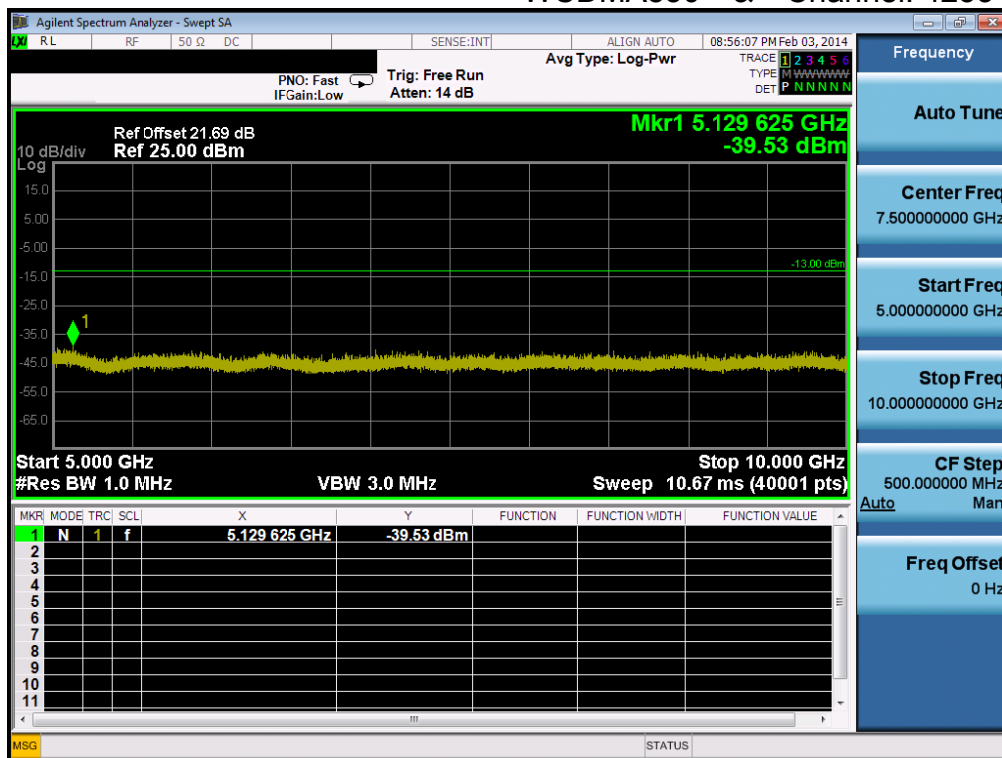


HSUPA850 & Channel: 4132

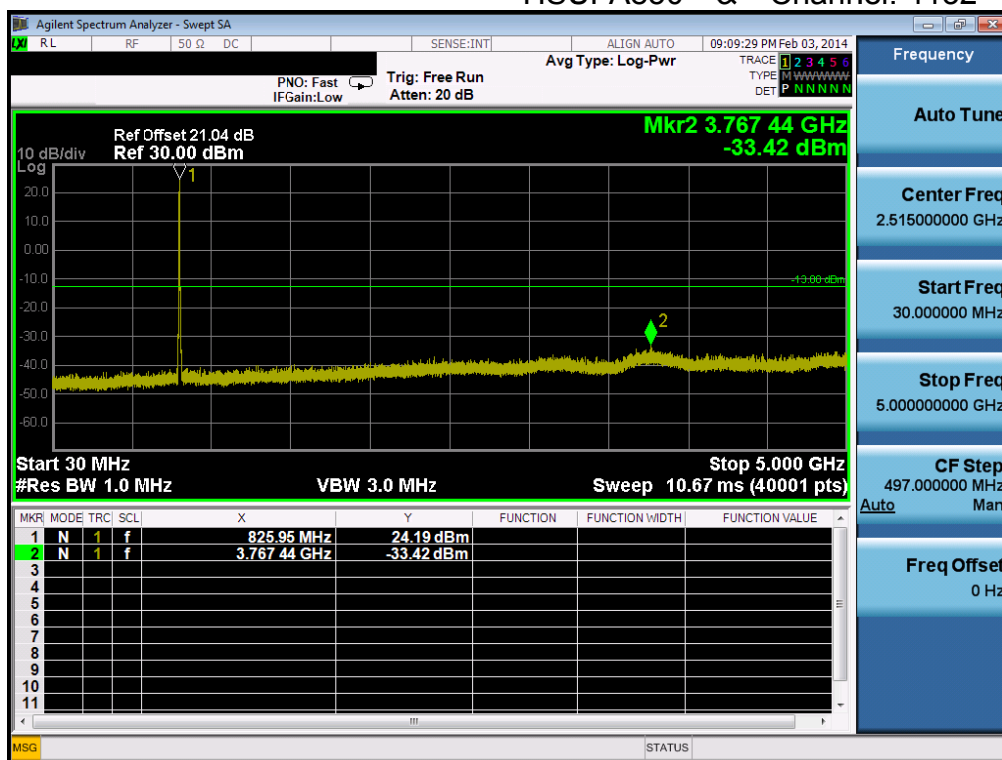


HSUPA850 & Channel: 4132

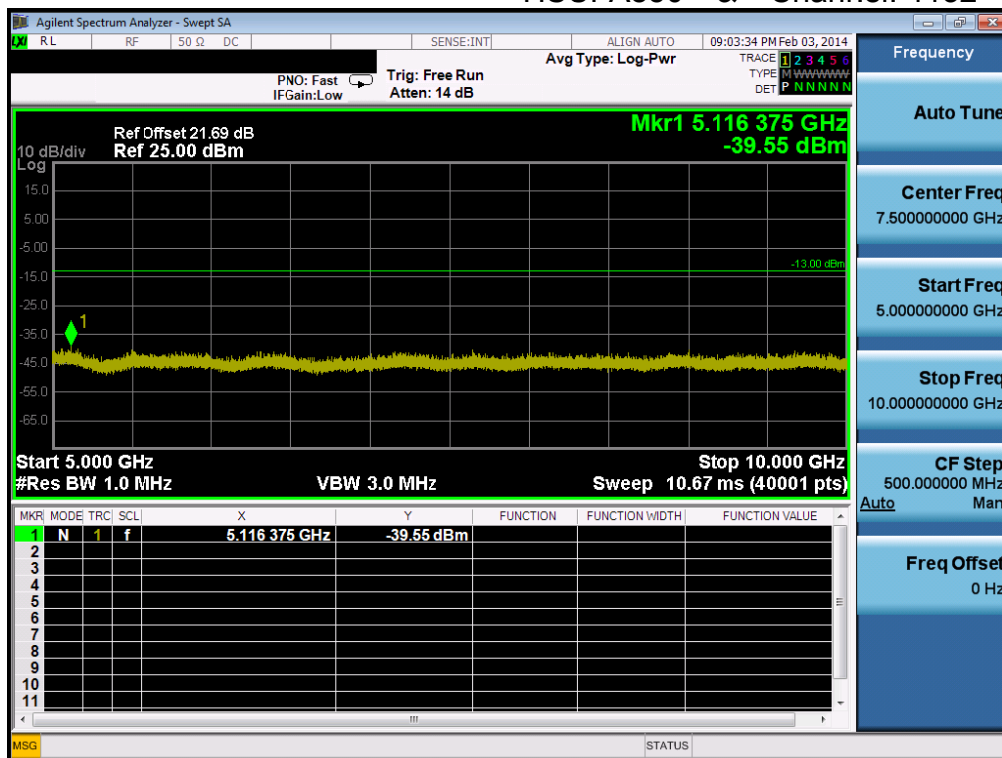


HSUPA850 & Channel: 4183

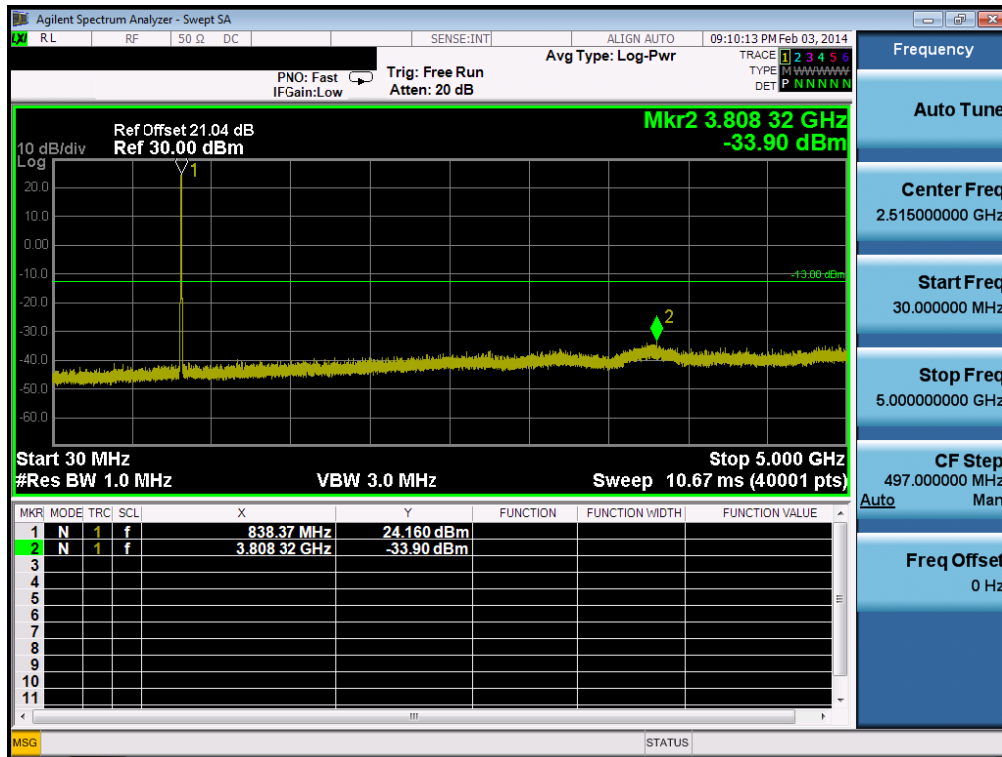

HSUPA850 & Channel: 4183

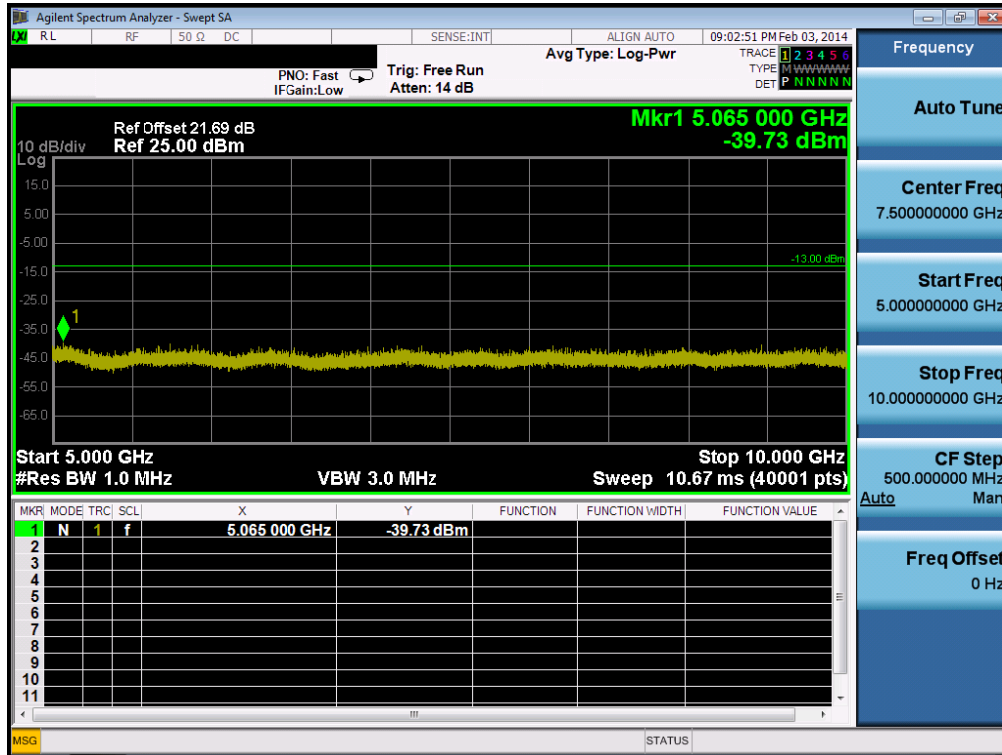

HSUPA850 & Channel: 4233

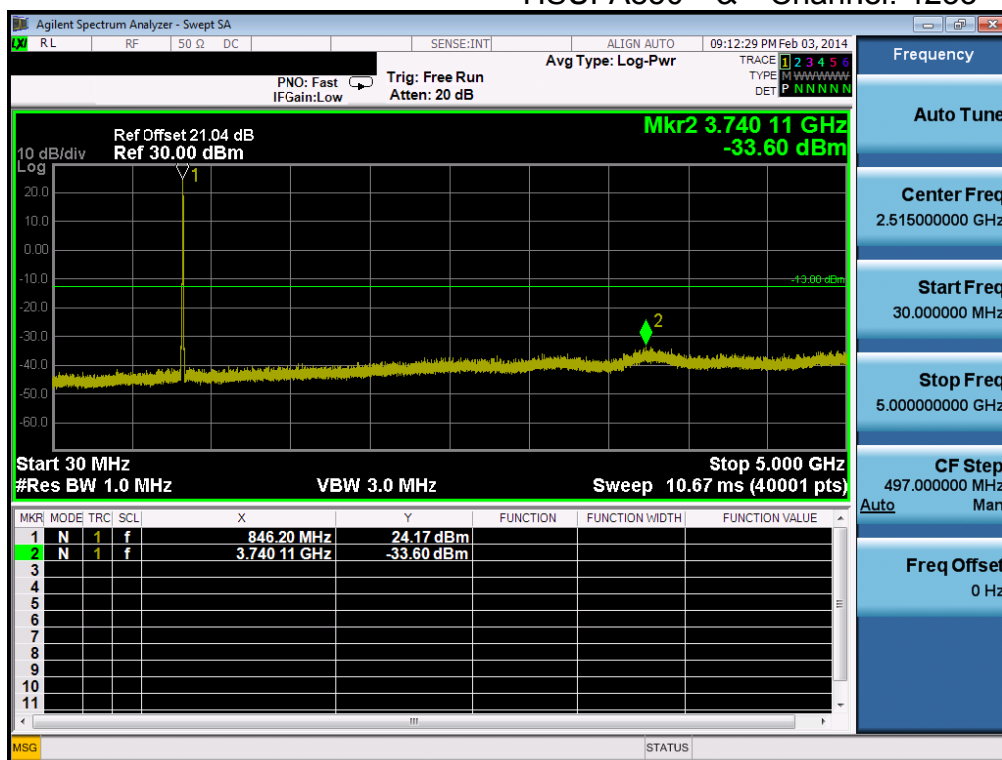

HSUPA850 & Channel: 4233

