



**HCT CO., LTD.**

CERTIFICATION DIVISION

74, SEOICHEON-RO, 578BEON-GIL, MAJANG-MYEON, ICHEON-SI, GYEONGGI-DO, KOREA  
TEL: +82 31 645 6300 FAX: +82 31 645 6401

## EMI CERTIFICATION REPORT

**Applicant:**

**LG Electronics MobileComm U.S.A., Inc.**

**1000 Sylvan Avenue, Englewood Cliffs NJ 07632**

**Date of Issue: July 19, 2013**

**Test Report No.: HCTE1307FE27**

**Test Site: HCT CO., LTD.**

**HCT FRN: 0005-8664-21**

**FCC ID:**

**ZNFD803**

Rule Part(s) / Standard(s) : FCC PART 15 Subpart B Class B  
Equipment Type : Cellular/PCS GSM/GPRS/EDGE, Cellular/PCS WCDMA/HSDPA/HSUPA/  
DC-HSDPA and LTE B4/B7/B17 Phone with Bluetooth, WLAN, NFC  
Model Name : LG-D803  
Additional Model Name : LGD803, D803  
Port / Connector(s) : USB / Earphone Port  
Date of Test : July 13, 2013 – July 15, 2013

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

  
Report prepared by  
: Gu-Cheol Yoon  
Test Engineer of EMC Team

  
Approved by  
: Kyoung-Hee Yoon  
Manager of EMC Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

## DOCUMENT HISTORY

---

The revision history for this document is shown in table.

| Version      | Date          | Description     |
|--------------|---------------|-----------------|
| HCTE1307FE27 | July 19, 2013 | Initial Release |

---

## TABLE OF CONTENTS

---

|                                                         | PAGE |
|---------------------------------------------------------|------|
| 1. GENERAL INFORMATION .....                            | 4    |
| 1.1 Product Description.....                            | 4    |
| 1.2 Related Submittal(s) / Grant(s).....                | 4    |
| 1.3 Tested System Details.....                          | 5    |
| 1.4 Cable Description .....                             | 6    |
| 1.5 Noise Suppression Parts on Cable. (I/O cable) ..... | 6    |
| 1.6 Test Methodology .....                              | 7    |
| 1.7 Test Facility .....                                 | 7    |
| 1.8 Frequency Range of Radiated Measurements .....      | 7    |
| 2. SYSTEM TEST CONFIGURATION.....                       | 8    |
| 2.1 Configuration of Test System.....                   | 8    |
| 3. PRELIMINARY TEST .....                               | 9    |
| 3.1 Conducted Emission Test .....                       | 9    |
| 3. 2 Radiated Emission Test .....                       | 9    |
| 4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY .....   | 10   |
| 4.1 Conducted Emission Test .....                       | 10   |
| 4.2 Radiated Emission Test .....                        | 15   |
| 5. FIELD STRENGTH CALCULATION .....                     | 24   |
| 6. TEST EQUIPMENT .....                                 | 25   |
| 7. CONCLUSION .....                                     | 26   |

### ATTACHMENT: TEST SETUP PHOTOGRAPHS

## 1. GENERAL INFORMATION

### 1.1 Product Description

Equipment Under Test is **EUT type: Cellular/PCS GSM/GPRS/EDGE, Cellular/PCS WCDMA/HSDPA/HSUPA/DC-HSDPA and LTE B4/B7/B17 Phone with Bluetooth, WLAN, NFC, Model: LG-D803** manufactured by **LG Electronics MobileComm U.S.A., Inc.** Its basic purpose is used for communications.

|                         |                                                                                                                                                                                                                                                            |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Model</b>            | LG-D803                                                                                                                                                                                                                                                    |
| <b>FCC ID</b>           | ZNFD803                                                                                                                                                                                                                                                    |
| <b>Additional Model</b> | LGD803, D803                                                                                                                                                                                                                                               |
| <b>EUT Type</b>         | Cellular/PCS GSM/GPRS/EDGE, Cellular/PCS WCDMA/HSDPA/HSUPA/DC-HSDPA and LTE B4/B7/B17 Phone with Bluetooth, WLAN, NFC                                                                                                                                      |
| <b>TX Frequency</b>     | 824.20 MHz to 848.80 MHz (GSM 850)<br>1 850.20 MHz to 1 909.80 MHz (GSM 1 900)<br>1 850 MHz to 1 910 MHz (WCDMA B2)<br>824 MHz to 849 MHz (WCDMA B5)<br>1 710 MHz to 1 755 MHz (LTE B4)<br>2 500 MHz to 2 570 MHz (LTE B7)<br>704 MHz to 716 MHz (LTE B17) |
| <b>RX Frequency</b>     | 869.20 MHz to 893.80 MHz (GSM 850)<br>1 930.20 MHz to 1 989.80 MHz (GSM 1 900)<br>1 930 MHz to 1 990 MHz (WCDMA B2)<br>869 MHz to 894 MHz (WCDMA B5)<br>2 110 MHz to 2 155 MHz (LTE B4)<br>2 620 MHz to 2 690 MHz (LTE B7)<br>734 MHz to 746 MHz (LTE B17) |

### 1.2 Related Submittal(s) / Grant(s)

Original submittal only.

### 1.3 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

| Device Type            | Model Name    | Manufacturer                      | FCC ID / DoC | Connected To             |
|------------------------|---------------|-----------------------------------|--------------|--------------------------|
| EUT                    | LG-D803       | LG                                | ZNFD803      | Notebook PC<br>Ear-phone |
| USB cable (2.0)        | EAD62329301   | IS                                | -            | E.U.T<br>Notebook PC     |
| USB cable (3.0)        | EAD62488701   | Ningbo                            | -            | E.U.T<br>Notebook PC     |
| Ear-phone              | HC-MYD-LG184  | I-sound                           | -            | E.U.T                    |
| Notebook PC            | ProBook 6570b | H.P                               | DoC          | Notebook PC<br>adaptor   |
| Notebook PC<br>adaptor | PPP012D-S     | DELTA Electronics<br>(JIANGSU)LTD | -            | Notebook PC              |
| Gateway                | MV440R        | Axesstel                          | -            | Notebook PC,<br>Adaptor  |
| Mouse                  | Serial mouse  | Radio shack                       | DoC          | Notebook PC              |
| Adaptor                | DA-60M12      | Yang Ming Industrial              | -            | Gateway                  |
| RJ45 cable             | -             | -                                 | -            | Notebook PC,<br>Gateway  |

## 1.4 Cable Description

| Product Name | Port                | Power Cord Shielded (Y/N) | I/O Cable Shielded (Y/N) | Length (m) |
|--------------|---------------------|---------------------------|--------------------------|------------|
| EUT          | Micro USB (USB 2.0) | Y                         | Y                        | (P,D)1.2   |
|              | Micro USB (USB 3.0) | Y                         | Y                        | (P,D)0.1   |
|              | Ear-phone           | N/A                       | Y                        | (D)1.2     |
| Notebook PC  | RJ 45               | N/A                       | N                        | (D)1.5     |
|              | Serial (Mouse)      | N/A                       | Y                        | (D)1.8     |
|              | DC in               | N                         | N/A                      | (P)1.8     |
| Gateway      | DC in               | N                         | N/A                      | (P)1.8     |

\* The marked "(D)" means the data cable and "(P)" means the power cable.

## 1.5 Noise Suppression Parts on Cable. (I/O cable)

| Product Name | Port                | Ferrite Bead (Y/N) | Location | Metal Hood (Y/N) | Location        |
|--------------|---------------------|--------------------|----------|------------------|-----------------|
| EUT          | Micro USB (USB 2.0) | N                  | N/A      | Y                | Both End        |
|              | Micro USB (USB 3.0) | N                  | N/A      | Y                | Both End        |
|              | Ear-phone           | N                  | N/A      | Y                | EUT End         |
| Notebook PC  | RJ 45               | N                  | N/A      | N                | N/A             |
|              | Serial (Mouse)      | N                  | N/A      | Y                | Notebook PC End |

## 1.6 Test Methodology

Both Conducted and Radiated testing was performed according to the procedures in ANSI C63.4/2003. Radiated testing was performed at an antenna to EUT distance of 3 m

## 1.7 Test Facility

Chamber used to collect the test data is located at the 74, SEOICHEON-RO, 578BEON-GIL, MAJANG-MYEON, ICHEON-SI, GYEONGGI-DO, KOREA. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4.

| Measurement Facilities                             | Reg. No.              |
|----------------------------------------------------|-----------------------|
| Radiated Field strength measurement facility (3m)  | 90661(Mar. 02, 2011)  |
| Radiated Field strength measurement facility (10m) | 90661 (Sep. 03, 2010) |

## 1.8 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

| Highest frequency generated or used in the device or on which the device operates or tunes<br>(MHz) | Upper frequency of measurement range<br>(MHz)                                      |
|-----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| Below 1.705                                                                                         | 30                                                                                 |
| 1.705 to 108                                                                                        | 1 000                                                                              |
| 108 to 500                                                                                          | 2 000                                                                              |
| 500 to 1 000                                                                                        | 5 000                                                                              |
| Above 1 000                                                                                         | 5 <sup>th</sup> harmonic of the highest frequency<br>or 40 GHz, whichever is lower |

## 2. SYSTEM TEST CONFIGURATION

### 2.1 Configuration of Test System


#### 2.1.1 Conducted Emission Test

EUT was connected to LISN via Notebook PC adaptor and Base Station. Preliminary Power Line Conducted Emission tests were performed by using the procedure in ANSI C63.4/2003 7.2.3 to determine the worst operating conditions.

#### 2.1.2 Radiated Emission Test

Preliminary Radiated Emission tests were performed by using the procedure in ANSI C63.4/2003 8.3.1.1 to determine the worst operating condition. Final Radiated Emission tests were performed at 10 m semi-anechoic chamber.

[Configuration of Tested System]

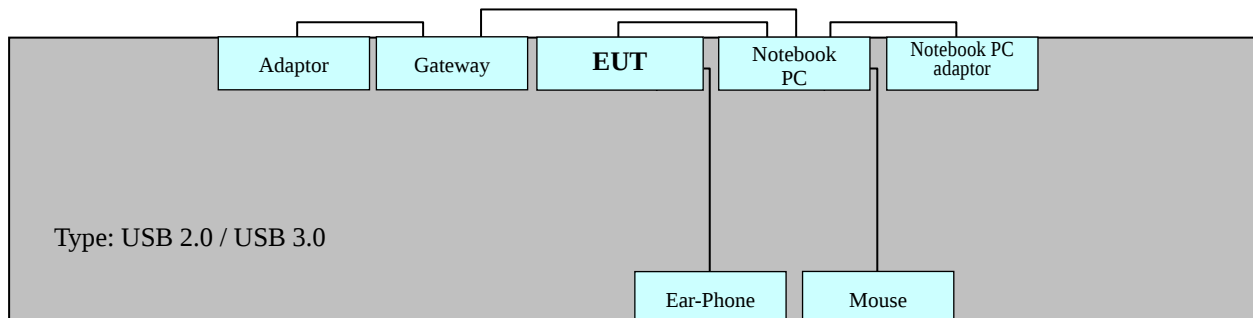

Non-Conductive Table  
Power Line: 120 VAC

### **3. PRELIMINARY TEST**

---

#### **3.1 Conducted Emission Test**

- It was tested Data Communication mode, after connecting all peripheral devices.

**Operation Mode:**      ☒ Data Communication mode (Type: USB 2.0)  
                                 ☒ Data Communication mode (Type: USB 3.0)

#### **3. 2 Radiated Emission Test**

- It was tested Data Communication mode, after connecting all peripheral devices.

**Operation Mode:**      ☒ Data Communication mode (Type: USB 2.0)  
                                 ☒ Data Communication mode (Type: USB 3.0)

## 4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

### 4.1 Conducted Emission Test

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

[ Type: USB 2.0 ]

Limit Apply to : FCC PART 15 Subpart B Class B

Detector : Quasi-Peak, Average (6 dB Bandwidth: 9 kHz)

Operation Mode : Data Communication mode

Temperature : 24.9 °C

Humidity Level : 63.6 %

Test Date : July 15, 2013

| Frequency | Transd | Conductor | Quasi-Peak |                   |              | Average |                   |              |
|-----------|--------|-----------|------------|-------------------|--------------|---------|-------------------|--------------|
|           |        |           | Limit      | Measurement Level | Result Level | Limit   | Measurement Level | Result Level |
| (MHz)     | (dB)   |           | (dBuV)     | (dBuV)            | (dBuV)       | (dBuV)  | (dBuV)            | (dBuV)       |
| 0.150     | 9.80   | H         | 66.00      | 40.00             | 49.80        | 56.00   | -                 | -            |
| 0.150     | 10.00  | N         | 66.00      | 38.80             | 48.80        | 56.00   | -                 | -            |
| 0.158     | 10.00  | N         | 65.57      | 36.70             | 46.70        | 55.57   | -                 | -            |
| 0.158     | 9.80   | H         | 65.57      | 39.00             | 48.80        | 55.57   | -                 | -            |
| 0.744     | 10.00  | N         | 56.00      | 26.50             | 36.50        | 46.00   | 17.20             | 27.20        |
| 1.128     | 9.90   | H         | 56.00      | -                 | -            | 46.00   | 16.80             | 26.70        |

※ NOTE: Refer to page 11 to page 14 for details.

1. Line H = Hot, Line N = Neutral
2. Transd = LISN factor + Cable Loss factor


**HCT**

**EMC**

EUT: LG-D803  
Manufacturer: LG  
Operating Condition: DATA MODE (USB 2.0)  
Test Site: SHIELD ROOM  
Operator: GC YOON  
Test Specification: FCC PART15 B  
Comment: H

**SCAN TABLE: "FCC CLASS B(H)"**

| Short Description: |                |            | KN22 CLASS B |            |           |            |
|--------------------|----------------|------------|--------------|------------|-----------|------------|
| Start Frequency    | Stop Frequency | Step Width | Detector     | Meas. Time | IF Bandw. | Transducer |
| 150.0 kHz          | 500.0 kHz      | 4.0 kHz    | MaxPeak      | 10.0 ms    | 9 kHz     | None       |
|                    |                |            | Average      |            |           |            |
| 500.0 kHz          | 5.0 MHz        | 4.0 kHz    | MaxPeak      | 10.0 ms    | 9 kHz     | None       |
|                    |                |            | Average      |            |           |            |
| 5.0 MHz            | 30.0 MHz       | 4.0 kHz    | MaxPeak      | 10.0 ms    | 9 kHz     | None       |
|                    |                |            | Average      |            |           |            |

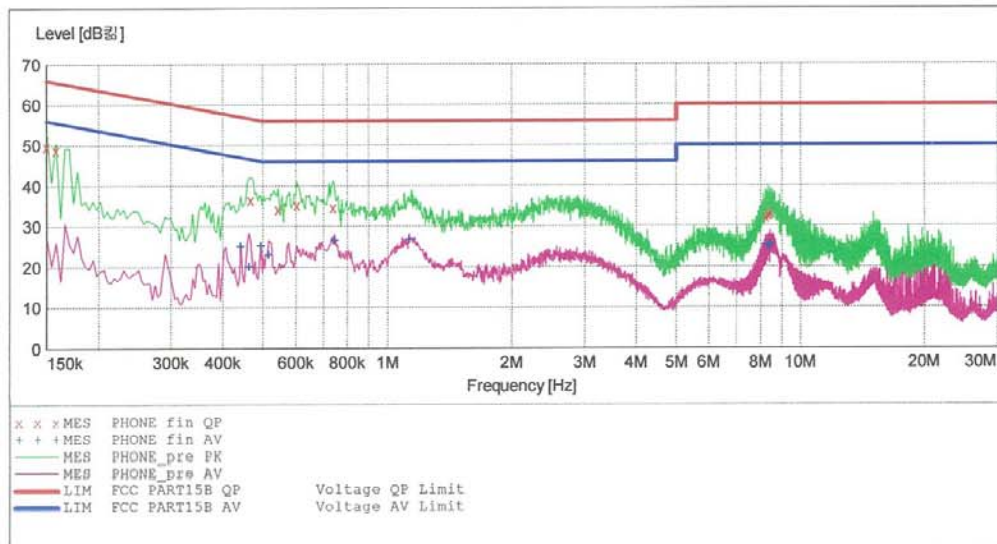

**MEASUREMENT RESULT: "PHONE\_fin QP"**

2013-07-15 2:48 오후

| Frequency MHz | Level dBμV | Transd dB | Limit dBμV | Margin dB | Line | PE  |
|---------------|------------|-----------|------------|-----------|------|-----|
| 0.150001      | 49.80      | 9.8       | 66         | 16.2      | ---  | --- |
| 0.158001      | 48.80      | 9.8       | 66         | 16.7      | ---  | --- |
| 0.466001      | 36.50      | 9.8       | 57         | 20.1      | ---  | --- |
| 0.544000      | 34.20      | 9.8       | 56         | 21.8      | ---  | --- |
| 0.604000      | 35.30      | 9.8       | 56         | 20.7      | ---  | --- |
| 0.740000      | 34.60      | 9.8       | 56         | 21.4      | ---  | --- |
| 8.232000      | 32.10      | 10.4      | 60         | 27.9      | ---  | --- |
| 8.336000      | 32.80      | 10.4      | 60         | 27.2      | ---  | --- |
| 8.460000      | 33.00      | 10.4      | 60         | 27.0      | ---  | --- |

**MEASUREMENT RESULT: "PHONE\_fin AV"**

2013-07-15 2:48 오후

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|------|-----|
| 0.442001         | 25.10         | 9.8          | 47            | 21.9         | ---  | --- |
| 0.462001         | 20.20         | 9.8          | 47            | 26.5         | ---  | --- |
| 0.494001         | 25.20         | 9.8          | 46            | 20.9         | ---  | --- |
| 0.516000         | 23.00         | 9.8          | 46            | 23.0         | ---  | --- |
| 0.744000         | 26.50         | 9.8          | 46            | 19.5         | ---  | --- |
| 1.128000         | 26.70         | 9.9          | 46            | 19.3         | ---  | --- |
| 8.320000         | 25.00         | 10.4         | 50            | 25.0         | ---  | --- |
| 8.380000         | 25.10         | 10.4         | 50            | 24.9         | ---  | --- |
| 8.460000         | 25.50         | 10.4         | 50            | 24.5         | ---  | --- |


**HCT**

**EMC**

EUT: LG-D803  
Manufacturer: LG  
Operating Condition: DATA MODE (USB 2.0)  
Test Site: SHIELD ROOM  
Operator: GC YOON  
Test Specification: FCC PART15 B  
Comment: N

**SCAN TABLE: "FCC CLASS B(N)"**

| Short Description: |                |            | KN22 CLASS B |            |           |            |
|--------------------|----------------|------------|--------------|------------|-----------|------------|
| Start Frequency    | Stop Frequency | Step Width | Detector     | Meas. Time | IF Bandw. | Transducer |
| 150.0 kHz          | 500.0 kHz      | 4.0 kHz    | MaxPeak      | 10.0 ms    | 9 kHz     | None       |
|                    |                |            | Average      |            |           |            |
| 500.0 kHz          | 5.0 MHz        | 4.0 kHz    | MaxPeak      | 10.0 ms    | 9 kHz     | None       |
|                    |                |            | Average      |            |           |            |
| 5.0 MHz            | 30.0 MHz       | 4.0 kHz    | MaxPeak      | 10.0 ms    | 9 kHz     | None       |
|                    |                |            | Average      |            |           |            |

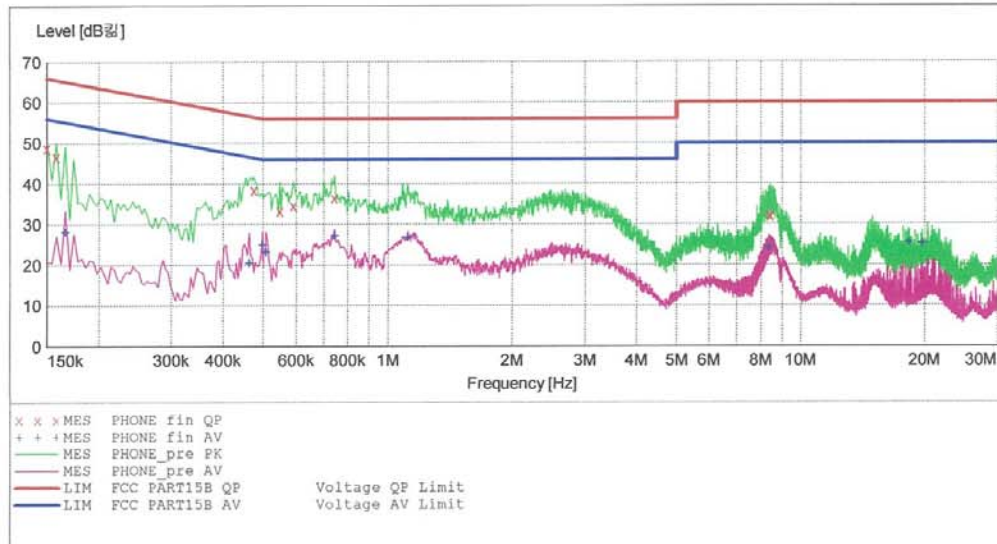

**MEASUREMENT RESULT: "PHONE\_fin QP"**

2013-07-15 2:44 오후

| Frequency MHz | Level dBμV | Transd dB | Limit dBμV | Margin dB | Line | PE  |
|---------------|------------|-----------|------------|-----------|------|-----|
| 0.150001      | 48.80      | 10.0      | 66         | 17.2      | ---  | --- |
| 0.158001      | 46.70      | 10.0      | 66         | 18.9      | ---  | --- |
| 0.474001      | 38.40      | 10.0      | 56         | 18.1      | ---  | --- |
| 0.548000      | 33.40      | 10.0      | 56         | 22.6      | ---  | --- |
| 0.592000      | 34.60      | 10.0      | 56         | 21.4      | ---  | --- |
| 0.744000      | 36.50      | 10.0      | 56         | 19.5      | ---  | --- |
| 8.420000      | 32.20      | 10.6      | 60         | 27.8      | ---  | --- |
| 8.440000      | 32.20      | 10.6      | 60         | 27.8      | ---  | --- |
| 8.464000      | 32.10      | 10.6      | 60         | 27.9      | ---  | --- |

**MEASUREMENT RESULT: "PHONE\_fin AV"**

2013-07-15 2:44 오후

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|------|-----|
| 0.166001         | 28.10         | 10.0         | 55            | 27.0         | ---  | --- |
| 0.462001         | 20.50         | 10.0         | 47            | 26.1         | ---  | --- |
| 0.498001         | 24.90         | 10.0         | 46            | 21.2         | ---  | --- |
| 0.508000         | 23.20         | 10.0         | 46            | 22.8         | ---  | --- |
| 0.744000         | 27.20         | 10.0         | 46            | 18.8         | ---  | --- |
| 1.120000         | 26.70         | 10.1         | 46            | 19.3         | ---  | --- |
| 8.360000         | 24.10         | 10.6         | 50            | 25.9         | ---  | --- |
| 18.244000        | 25.50         | 11.2         | 50            | 24.5         | ---  | --- |
| 19.708000        | 25.20         | 11.2         | 50            | 24.8         | ---  | --- |

### [ Type: USB 3.0 ]

Limit Apply to : FCC PART 15 Subpart B Class B

Detector : Quasi-Peak, Average (6 dB Bandwidth: 9 kHz)

Operation Mode : Data Communication mode

Temperature : 24.9 °C

Humidity Level : 63.6 %

Test Date : July 15, 2013

| Frequency<br>(MHz) | Transd<br>(dB) | Conductor | Quasi-Peak      |                                |                           | Average         |                                |                           |
|--------------------|----------------|-----------|-----------------|--------------------------------|---------------------------|-----------------|--------------------------------|---------------------------|
|                    |                |           | Limit<br>(dBuV) | Measurement<br>Level<br>(dBuV) | Result<br>Level<br>(dBuV) | Limit<br>(dBuV) | Measurement<br>Level<br>(dBuV) | Result<br>Level<br>(dBuV) |
| 0.150              | 9.80           | H         | 66.00           | 40.10                          | 49.90                     | 56.00           | -                              | -                         |
| 0.150              | 10.00          | N         | 66.00           | 37.90                          | 47.90                     | 56.00           | -                              | -                         |
| 0.158              | 10.00          | N         | 65.57           | 36.80                          | 46.80                     | 55.57           | -                              | -                         |
| 0.162              | 9.80           | H         | 65.36           | 38.00                          | 47.80                     | 55.36           | -                              | -                         |
| 0.466              | 9.80           | H         | 56.58           | 28.90                          | 38.70                     | 46.58           | 12.60                          | 22.40                     |
| 1.148              | 10.10          | N         | 56.00           | -                              | -                         | 46.00           | 17.00                          | 27.10                     |

※ **NOTE:** Refer to page 16 to page 19 for details.

1. Line H = Hot, Line N = Neutral
2. Transd = LISN factor + Cable Loss factor


**HCT**

**EMC**

EUT: LG-D803  
Manufacturer: LG  
Operating Condition: DATA MODE (USB 3.0)  
Test Site: SHIELD ROOM  
Operator: GC YOON  
Test Specification: FCC PART15 B  
Comment: H

**SCAN TABLE: "FCC CLASS B(H)"**

| Short Description: |           |         | KN22 CLASS B |            |           |            |
|--------------------|-----------|---------|--------------|------------|-----------|------------|
| Start              | Stop      | Step    | Detector     | Meas. Time | IF Bandw. | Transducer |
| Frequency          | Frequency | Width   |              |            |           |            |
| 150.0 kHz          | 500.0 kHz | 4.0 kHz | MaxPeak      | 10.0 ms    | 9 kHz     | None       |
|                    |           |         | Average      |            |           |            |
| 500.0 kHz          | 5.0 MHz   | 4.0 kHz | MaxPeak      | 10.0 ms    | 9 kHz     | None       |
|                    |           |         | Average      |            |           |            |
| 5.0 MHz            | 30.0 MHz  | 4.0 kHz | MaxPeak      | 10.0 ms    | 9 kHz     | None       |
|                    |           |         | Average      |            |           |            |

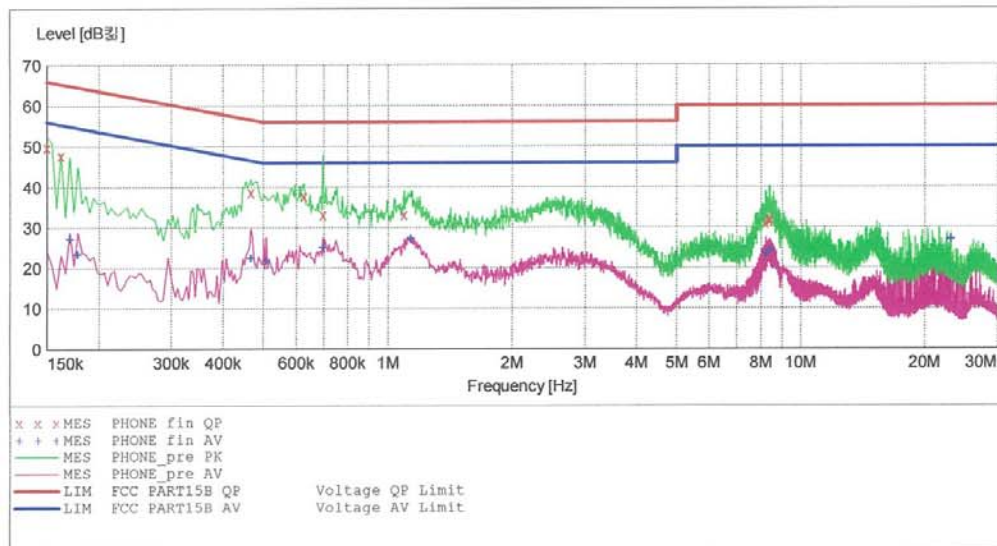

**MEASUREMENT RESULT: "PHONE\_fin QP"**

2013-07-15 2:33오.후

| Frequency MHz | Level dB | Transd dB | Limit dB | Margin dB | Line | PE  |
|---------------|----------|-----------|----------|-----------|------|-----|
| 0.150001      | 49.90    | 9.8       | 66       | 16.1      | ---  | --- |
| 0.162001      | 47.80    | 9.8       | 65       | 17.6      | ---  | --- |
| 0.466001      | 38.70    | 9.8       | 57       | 17.9      | ---  | --- |
| 0.628000      | 37.90    | 9.8       | 56       | 18.1      | ---  | --- |
| 0.696000      | 33.20    | 9.8       | 56       | 22.8      | ---  | --- |
| 1.096000      | 33.20    | 9.9       | 56       | 22.8      | ---  | --- |
| 8.208000      | 31.10    | 10.4      | 60       | 28.9      | ---  | --- |
| 8.376000      | 31.60    | 10.4      | 60       | 28.4      | ---  | --- |
| 8.404000      | 32.20    | 10.4      | 60       | 27.8      | ---  | --- |

**MEASUREMENT RESULT: "PHONE\_fin AV"**

2013-07-15 2:33오.후

| Frequency<br>MHz | Level<br>dB <sub>μV</sub> | Transd<br>dB | Limit<br>dB <sub>μV</sub> | Margin<br>dB | Line | PE  |
|------------------|---------------------------|--------------|---------------------------|--------------|------|-----|
| 0.170001         | 27.30                     | 9.8          | 55                        | 27.7         | ---  | --- |
| 0.178001         | 23.50                     | 9.8          | 55                        | 31.1         | ---  | --- |
| 0.466001         | 22.40                     | 9.8          | 47                        | 24.2         | ---  | --- |
| 0.508000         | 21.80                     | 9.8          | 46                        | 24.2         | ---  | --- |
| 0.696000         | 25.10                     | 9.8          | 46                        | 20.9         | ---  | --- |
| 1.136000         | 27.20                     | 9.9          | 46                        | 18.8         | ---  | --- |
| 8.228000         | 23.30                     | 10.4         | 50                        | 26.7         | ---  | --- |
| 8.428000         | 24.30                     | 10.4         | 50                        | 25.7         | ---  | --- |
| 23.128000        | 27.00                     | 11.1         | 50                        | 23.0         | ---  | --- |


**HCT**

**EMC**

EUT: LG-D803  
Manufacturer: LG  
Operating Condition: DATA MODE (USB 3.0)  
Test Site: SHIELD ROOM  
Operator: GC YOON  
Test Specification: FCC PART15 B  
Comment: N

**SCAN TABLE: "FCC CLASS B(N)"**

| Short Description: |                |            | KN22 CLASS B |            |           |            |
|--------------------|----------------|------------|--------------|------------|-----------|------------|
| Start Frequency    | Stop Frequency | Step Width | Detector     | Meas. Time | IF Bandw. | Transducer |
| 150.0 kHz          | 500.0 kHz      | 4.0 kHz    | MaxPeak      | 10.0 ms    | 9 kHz     | None       |
|                    |                |            | Average      |            |           |            |
| 500.0 kHz          | 5.0 MHz        | 4.0 kHz    | MaxPeak      | 10.0 ms    | 9 kHz     | None       |
|                    |                |            | Average      |            |           |            |
| 5.0 MHz            | 30.0 MHz       | 4.0 kHz    | MaxPeak      | 10.0 ms    | 9 kHz     | None       |
|                    |                |            | Average      |            |           |            |

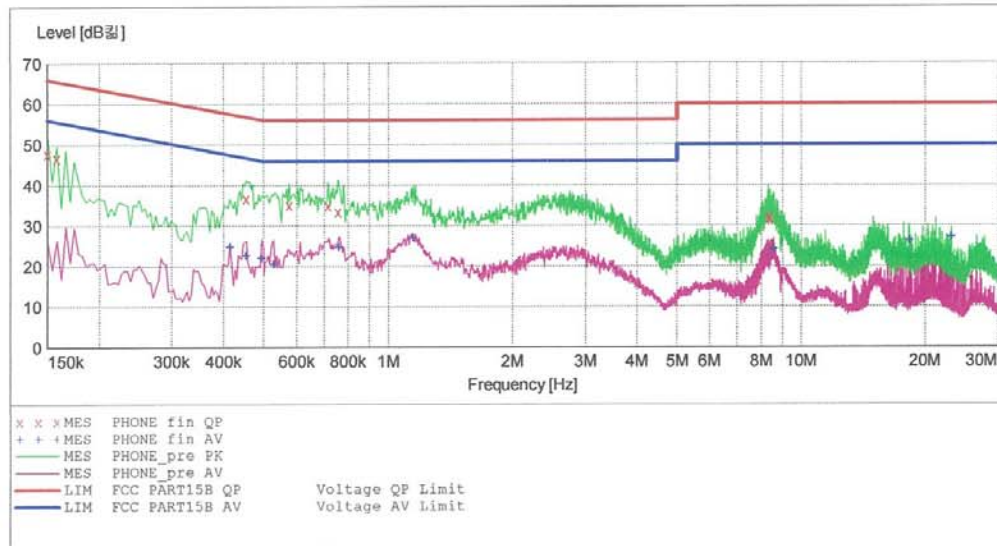

**MEASUREMENT RESULT: "PHONE\_fin QP"**

2013-07-15 2:37 오후

| Frequency MHz | Level dB | Transd dB | Limit dB | Margin dB | Line | PE  |
|---------------|----------|-----------|----------|-----------|------|-----|
| 0.150001      | 47.90    | 10.0      | 66       | 18.1      | ---  | --- |
| 0.158001      | 46.80    | 10.0      | 66       | 18.7      | ---  | --- |
| 0.454001      | 36.80    | 10.0      | 57       | 20.0      | ---  | --- |
| 0.576000      | 35.10    | 10.0      | 56       | 20.9      | ---  | --- |
| 0.716000      | 35.00    | 10.0      | 56       | 21.0      | ---  | --- |
| 0.756000      | 33.50    | 10.0      | 56       | 22.5      | ---  | --- |
| 8.328000      | 32.00    | 10.6      | 60       | 28.0      | ---  | --- |
| 8.388000      | 31.70    | 10.6      | 60       | 28.3      | ---  | --- |
| 8.400000      | 31.90    | 10.6      | 60       | 28.1      | ---  | --- |

**MEASUREMENT RESULT: "PHONE\_fin AV"**

2013-07-15 2:37오.후

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|------|-----|
| 0.414001         | 24.80         | 10.0         | 48            | 22.8         | ---  | --- |
| 0.454001         | 22.60         | 10.0         | 47            | 24.2         | ---  | --- |
| 0.494001         | 22.10         | 10.0         | 46            | 24.0         | ---  | --- |
| 0.528000         | 20.50         | 10.0         | 46            | 25.5         | ---  | --- |
| 0.760000         | 24.70         | 10.0         | 46            | 21.3         | ---  | --- |
| 1.148000         | 27.10         | 10.1         | 46            | 18.9         | ---  | --- |
| 8.564000         | 24.20         | 10.6         | 50            | 25.8         | ---  | --- |
| 18.244000        | 26.20         | 11.2         | 50            | 23.8         | ---  | --- |
| 23.128000        | 27.10         | 11.4         | 50            | 22.9         | ---  | --- |

## 4.2 Radiated Emission Test

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

[ Type: USB 2.0 ]

**-For measurement below 1 GHz**

Limit Apply to : FCC PART 15 Subpart B Class B

Detector : Quasi-Peak (6 dB Bandwidth: 120 kHz)

Operation Mode : Data Communication mode

Temperature : 22.9 °C

Humidity Level : 51.9 %

Test Date : July 13, 2013

| Frequency<br>(MHz) | Reading<br>(dBuV) | Polarity<br>(H/V) | Antenna<br>Height<br>(m) | Correction Factor |               | Limit<br>(dBuV/m) | Level<br>(dBuV/m) | Margin<br>(dB) |
|--------------------|-------------------|-------------------|--------------------------|-------------------|---------------|-------------------|-------------------|----------------|
|                    |                   |                   |                          | Antenna<br>(dB/m) | Cable<br>(dB) |                   |                   |                |
| 94.700             | 17.25             | H                 | 1.00                     | 8.10              | 1.77          | 43.5              | 27.11             | 16.39          |
| 124.000            | 17.64             | V                 | 1.00                     | 10.38             | 2.02          | 43.5              | 30.04             | 13.46          |
| 214.800            | 22.06             | H                 | 1.50                     | 10.08             | 2.66          | 43.5              | 34.80             | 8.70           |
| 320.700            | 20.41             | H                 | 1.00                     | 13.83             | 3.26          | 46.0              | 37.50             | 8.50           |
| 514.400            | 10.84             | V                 | 1.00                     | 18.14             | 4.16          | 46.0              | 33.14             | 12.86          |
| 900.000            | 3.23              | V                 | 1.00                     | 23.61             | 5.63          | 46.0              | 32.47             | 13.53          |

### -For measurement above 1 GHz

Limit Apply to : FCC PART 15 Subpart B Class B

Detector : Peak mode: Peak (RBW: 1 MHz, VBW: 1 MHz)  
: Average mode: Peak (RBW: 1 MHz, VBW: 10 Hz)

Operation Mode : Data Communication mode

Temperature : 23.7 °C

Humidity Level : 49.9 %

Test Date : July 15, 2013

| Frequency<br>(GHz) | Peak              |                   |                | POL | Average           |                   |                |
|--------------------|-------------------|-------------------|----------------|-----|-------------------|-------------------|----------------|
|                    | Total<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |     | Total<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
| 2.4209             | 52.90             | 74                | 21.10          | V   | 29.40             | 54                | 24.60          |

#### ※ NOTE:

1. Measurement above 1 GHz was performed from 1 GHz to the 5<sup>th</sup> harmonic of highest fundamental frequency. Test was measured by 12 GHz.

### [ Type: USB 3.0 ]

#### -For measurement below 1 GHz

Limit Apply to : FCC PART 15 Subpart B Class B

Detector : Quasi-Peak (6 dB Bandwidth: 120 kHz)

Operation Mode : Data Communication mode

Temperature : 22.9 °C

Humidity Level : 51.9 %

Test Date : July 13, 2013

| Frequency<br>(MHz) | Reading<br>(dBuV) | Polarity<br>(H/V) | Antenna<br>Height<br>(m) | Correction Factor |               | Limit<br>(dBuV/m) | Level<br>(dBuV/m) | Margin<br>(dB) |
|--------------------|-------------------|-------------------|--------------------------|-------------------|---------------|-------------------|-------------------|----------------|
|                    |                   |                   |                          | Antenna<br>(dB/m) | Cable<br>(dB) |                   |                   |                |
| 97.300             | 19.48             | H                 | 1.00                     | 8.17              | 1.79          | 43.5              | 29.44             | 14.06          |
| 124.000            | 18.72             | V                 | 1.00                     | 10.38             | 2.02          | 43.5              | 31.12             | 12.38          |
| 240.300            | 24.02             | H                 | 1.20                     | 11.17             | 2.81          | 46.0              | 38.01             | 7.99           |
| 266.500            | 20.20             | V                 | 2.20                     | 12.16             | 2.96          | 46.0              | 35.32             | 10.68          |
| 322.100            | 20.18             | V                 | 1.70                     | 13.86             | 3.27          | 46.0              | 37.31             | 8.69           |
| 375.000            | 15.70             | H                 | 1.20                     | 15.17             | 3.54          | 46.0              | 34.40             | 11.60          |

### -For measurement above 1 GHz

Limit Apply to : FCC PART 15 Subpart B Class B

Detector : Peak mode: Peak (RBW: 1 MHz, VBW: 1 MHz)  
: Average mode: Peak (RBW: 1 MHz, VBW: 10 Hz)

Operation Mode : Data Communication mode

Temperature : 23.7 °C

Humidity Level : 49.9 %

Test Date : July 15, 2013

| Frequency<br>(GHz) | Peak              |                   |                | POL | Average           |                   |                |
|--------------------|-------------------|-------------------|----------------|-----|-------------------|-------------------|----------------|
|                    | Total<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |     | Total<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
| 2.5270             | 50.40             | 74                | 23.60          | V   | 29.30             | 54                | 24.70          |

#### ※ NOTE:

1. Measurement above 1 GHz was performed from 1 GHz to the 5<sup>th</sup> harmonic of highest fundamental frequency. Test was measured by 12 GHz.

## 5. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the antenna factor and cable factor.  
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dB $\mu$ V is obtained. The antenna factor of 7.4 dB/m and a cable factor of 1.1 dB are added. The 30 dB $\mu$ V/m value is mathematically converted to its corresponding level in  $\mu$ V/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dB}\mu\text{V/m}$$

### [Radiated Emission Limits]

| Frequency of Emission<br>(MHz) | Field Strength |              |
|--------------------------------|----------------|--------------|
|                                | $\mu$ V/m      | dB $\mu$ V/m |
| 30 to 88                       | 100            | 40.0         |
| 88 to 216                      | 150            | 43.5         |
| 216 to 960                     | 200            | 46.0         |
| Above 960                      | 500            | 54.0         |

## 6. TEST EQUIPMENT

| <u>Type</u>                                           | <u>Manufacturer</u> | <u>Model Name</u> | <u>Serial Number</u> | <u>Calibration Cycle</u> | <u>Next CAL Date</u> |
|-------------------------------------------------------|---------------------|-------------------|----------------------|--------------------------|----------------------|
| <b><u>Conducted Emission</u></b>                      |                     |                   |                      |                          |                      |
| <input checked="" type="checkbox"/> EMI Test Receiver | Rohde & Schwarz     | ESCI              | 100584               | 1 year                   | 2014.04.25           |
| <input type="checkbox"/> EMI Test Receiver            | Rohde & Schwarz     | ESCI              | 100033               | 1 year                   | 2014.06.23           |
| <input type="checkbox"/> LISN                         | Rohde & Schwarz     | ESH3-Z5           | 100282               | 1 year                   | 2014.07.03           |
| <input checked="" type="checkbox"/> LISN              | EMCO                | 3816/2SH          | 9706-1070            | 1 year                   | 2014.04.26           |
| <input checked="" type="checkbox"/> LISN              | Rohde & Schwarz     | ENV216            | 100073               | 1 year                   | 2014.02.06           |
| <input type="checkbox"/> Attenuator                   | Rohde & Schwarz     | ESH3-Z2           | 357.8810.352         | 1 year                   | 2014.07.03           |
| <b><u>Radiated Emission</u></b>                       |                     |                   |                      |                          |                      |
| -For measurement below 1 GHz                          |                     |                   |                      |                          |                      |
| <input type="checkbox"/> EMI Test Receiver            | Rohde & Schwarz     | ESI40             | 831564103            | 1 year                   | 2014.04.16           |
| <input type="checkbox"/> Trilog Antenna               | Schwarzbeck         | VULB9160          | 3301                 | 2 year                   | 2014.12.17           |
| <input type="checkbox"/> Antenna master               | HD GmbH             | MA240             | 240/520              | N/A                      | -                    |
| <input type="checkbox"/> Turn Table                   | HD GmbH             | 2090              | 9702/1224            | N/A                      | -                    |
| <input checked="" type="checkbox"/> EMI Test Receiver | Rohde & Schwarz     | ESU 26            | 100241               | 1 year                   | 2014.07.01           |
| <input checked="" type="checkbox"/> Trilog Antenna    | Schwarzbeck         | VULB9168          | 185                  | 2 year                   | 2015.04.16           |
| <input checked="" type="checkbox"/> Antenna master    | INNCO Systems       | MA4000-EP         | MA4000/283           | N/A                      | -                    |
| <input checked="" type="checkbox"/> Turn Table        | INNCO Systems       | DT3000-3T         | DT3000/69            | N/A                      | -                    |
| -For measurement above 1 GHz                          |                     |                   |                      |                          |                      |
| <input type="checkbox"/> EMI Test Receiver            | Rohde & Schwarz     | ESI40             | 831564103            | 1 year                   | 2014.04.16           |
| <input type="checkbox"/> Antenna master               | HD GmbH             | MA240             | 240/520              | N/A                      | -                    |
| <input type="checkbox"/> Turn Table                   | HD GmbH             | 2090              | 9702/1224            | N/A                      | -                    |
| <input checked="" type="checkbox"/> EMI Test Receiver | Rohde & Schwarz     | ESU 26            | 100241               | 1 year                   | 2014.07.01           |
| <input checked="" type="checkbox"/> Antenna master    | INNCO Systems       | MA4000-EP         | MA4000/283           | N/A                      | -                    |
| <input checked="" type="checkbox"/> Turn Table        | INNCO Systems       | DT3000-3T         | DT3000/69            | N/A                      | -                    |
| <input checked="" type="checkbox"/> Power Amplifier   | Rohde & Schwarz     | SCU-18            | 10094                | 1 year                   | 2013.09.11           |
| <input checked="" type="checkbox"/> Horn Antenna      | Schwarzbeck         | BBHA 9120D        | 296                  | 2 year                   | 2014.12.13           |

## **7. CONCLUSION**

---

The data collected shows that the **EUT type: Cellular/PCS GSM/GPRS/EDGE, Cellular/PCS WCDMA/HSDPA/HSUPA/DC-HSDPA and LTE B4/B7/B17 Phone with Bluetooth, WLAN, NFC, FCC ID: ZNFD803, Model: LG-D803** complies with §15.107 and §15.109 of the FCC rules.