

PART 27 MEASUREMENT REPORT

Applicant Name:

LG Electronics USA, Inc.
 111 Sylvan Avenue, North Building
 Englewood Cliffs, NJ 07632
 United States

Date of Testing:

6/4 – 7/2/2020

Test Site/Location:

PCTEST Lab. Columbia, MD, USA

Test Report Serial No.:

1M2006040088-04.ZNF

FCC ID:

ZNFG900VM

APPLICANT:

LG Electronics USA, Inc.

Application Type:

Class II Permissive Change

Model:

LM-G900VM

Additional Model(s):

LMG900VM, G900VM, LM-G900QM6, LMG900QM6, G900QM6, LM-G902V, LMG902V, G902V

EUT Type:

Portable Handset

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part:

27

Test Procedure(s):


ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01

Class II Permissive Change(s):

See FCC Change Document

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


 Randy Ortanez
 President



FCC ID: ZNFG900VM		PART 27 MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Quality Manager
Test Report S/N: 1M2006040088-04.ZNF	Test Dates: 6/4 – 7/2/2020	EUT Type: Portable Handset	Page 1 of 21	

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.


TABLE OF CONTENTS

1.0	INTRODUCTION	4
1.1	Scope	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Test Configuration	5
2.4	EMI Suppression Device(s)/Modifications	5
3.0	DESCRIPTION OF TESTS	6
3.1	Evaluation Procedure	6
3.2	Radiated Power and Radiated Spurious Emissions	6
4.0	MEASUREMENT UNCERTAINTY	7
5.0	TEST EQUIPMENT CALIBRATION DATA	8
6.0	SAMPLE CALCULATIONS	9
7.0	TEST RESULTS.....	10
7.1	Summary.....	10
7.2	Radiated Power (EIRP).....	11
7.3	Radiated Spurious Emissions Measurements	15
8.0	CONCLUSION.....	21

FCC ID: ZNFG900VM	 PCTEST® Proud to be part of element	PART 27 MEASUREMENT REPORT (Class II Permissive Change)	 LG	Approved by: Quality Manager
Test Report S/N: 1M2006040088-04.ZNF	Test Dates: 6/4 – 7/2/2020	EUT Type: Portable Handset	Page 2 of 21	


© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.



MEASUREMENT REPORT

FCC Part 27



Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		ERP	
				Max. Power [W]	Max. Power [dBm]	Max. Power [W]	Max. Power [dBm]
LTE Band 12	10 MHz	QPSK	704.0 - 711.0	0.201	23.03	0.122	20.88
		16QAM	704.0 - 711.0	0.169	22.28	0.103	20.13
		64QAM	704.0 - 711.0	0.141	21.49	0.086	19.34
LTE Band 13	10 MHz	QPSK	782.0	0.082	19.13	0.050	16.98
		16QAM	782.0	0.068	18.33	0.042	16.18
		64QAM	782.0	0.057	17.52	0.034	15.37

Overview Table (<1GHz Bands)

Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP	
				Max. Power [W]	Max. Power [dBm]
LTE Band 66/4	20 MHz	QPSK	1720.0 - 1770.0	0.105	20.21
		16QAM	1720.0 - 1770.0	0.088	19.42
		64QAM	1720.0 - 1770.0	0.072	18.56
NR Band n66	20 MHz	$\pi/2$ BPSK	1720.0 - 1770.0	0.123	20.90
		QPSK	1720.0 - 1770.0	0.137	21.37
		16QAM	1720.0 - 1770.0	0.088	19.44
		64QAM	1720.0 - 1770.0	0.060	17.75
		256QAM	1720.0 - 1770.0	0.038	15.79

Overview Table (>1GHz Bands)

FCC ID: ZNFG900VM	 PCTEST® Proud to be part of element	PART 27 MEASUREMENT REPORT (Class II Permissive Change)	 LG	Approved by: Quality Manager
Test Report S/N: 1M2006040088-04.ZNF	Test Dates: 6/4 – 7/2/2020	EUT Type: Portable Handset	Page 3 of 21	

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: ZNFG900VM	 PCTEST® Proud to be part of element	PART 27 MEASUREMENT REPORT (Class II Permissive Change)	 LG	Approved by: Quality Manager
Test Report S/N: 1M2006040088-04.ZNF	Test Dates: 6/4 – 7/2/2020	EUT Type: Portable Handset	Page 4 of 21	

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFG900VM**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 27.

Test Device Serial No.: 4971

2.2 Device Capabilities

This device contains the following capabilities:

CDMA, GSM/GPRS/EDGE, WCDMA/HSPA, LTE, 5G NR, WLAN, UNII, Bluetooth (1x, EDR, LE), NFC

LTE Band 66 (1710 - 1780 MHz) overlaps the entire frequency range of LTE Band 4 (1710 - 1755 MHz). Therefore, test data provided in this report covers Band 4 as well as Band 66.

2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: ZNFG900VM	 PCTEST® Proud to be part of element	PART 27 MEASUREMENT REPORT (Class II Permissive Change)	 LG	Approved by: Quality Manager
Test Report S/N: 1M2006040088-04.ZNF	Test Dates: 6/4 – 7/2/2020	EUT Type: Portable Handset	Page 5 of 21	

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer “Channel Power” function with the integration band set to the emissions’ occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168 D01 v03r01.

Per the guidance of ANSI/TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [\text{dBm}] = P_g [\text{dBm}] - \text{cable loss} [\text{dB}] + \text{antenna gain} [\text{dBd/dBi}]$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g [\text{dBm}] - \text{cable loss} [\text{dB}]$.

For fundamental radiated power measurements, the guidance of KDB 971168 D01 v03r01 is used to record the EUT power level that is subsequently matched via the aforementioned substitution method given in ANSI/TIA-603-E-2016.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

FCC ID: ZNFG900VM	 PCTEST® Proud to be part of element	PART 27 MEASUREMENT REPORT (Class II Permissive Change)	 LG	Approved by: Quality Manager
Test Report S/N: 1M2006040088-04.ZNF	Test Dates: 6/4 – 7/2/2020	EUT Type: Portable Handset	Page 6 of 21	

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: ZNFG900VM	 PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT (Class II Permissive Change)	 LG	Approved by: Quality Manager
Test Report S/N: 1M2006040088-04.ZNF	Test Dates: 6/4 – 7/2/2020	EUT Type: Portable Handset	Page 7 of 21	

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	E5515C	Wireless Communications Test Set	N/A			GB46310798
Anritsu	MT8821C	Radio Communication Analyzer	N/A			6201381794
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	10/10/2019	Biennial	10/10/2021	121034
Espec	ESX-2CA	Environmental Chamber	8/13/2019	Annual	8/13/2020	17620
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	3/12/2020	Biennial	3/12/2022	128337
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	2/22/2019	Biennial	2/22/2021	128338
Mini Circuits	TVA-11-422	RF Power Amp	N/A			QA1317001
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11208010032
Rohde & Schwarz	CMU200	Base Station Simulator	N/A			836371/0079
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			100976
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	9/23/2019	Annual	9/23/2020	100348
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	2/10/2020	Annual	2/10/2021	102134
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	2/21/2020	Annual	2/21/2021	102133
Sunol	DRH-118	Horn Antenna (1-18GHz)	10/3/2019	Biennial	10/3/2021	A050307

Table 5-1. Equipment List

Notes:

- For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
- Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: ZNFG900VM		PART 27 MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Quality Manager
Test Report S/N: 1M2006040088-04.ZNF	Test Dates: 6/4 – 7/2/2020	EUT Type: Portable Handset	Page 8 of 21	

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

6.0 SAMPLE CALCULATIONS

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (-24.80).

FCC ID: ZNFG900VM	 PCTEST [®] Proud to be part of element	PART 27 MEASUREMENT REPORT (Class II Permissive Change)	 LG	Approved by: Quality Manager
Test Report S/N: 1M2006040088-04.ZNF	Test Dates: 6/4 – 7/2/2020	EUT Type: Portable Handset		Page 9 of 21

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

7.0 TEST RESULTS

7.1 Summary

Company Name: LG Electronics USA, Inc.
FCC ID: ZNFG900VM
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
Mode(s): LTE / NR

Test Condition	Test Description	FCC Part Section(s)	RSS Section(s)	Test Limit	Test Result	Reference
RADIATED	Effective Radiated Power / Equivalent Isotropic Radiated Power (LTE Band 12)	27.50(b)(10)	RSS-130(4.4)	< 3 Watts max. ERP < 5 Watts max. EIRP	PASS	Section 7.2
	Effective Radiated Power / Equivalent Isotropic Radiated Power (LTE Band 13)	27.50(c)(10)	RSS-130(4.4)	< 3 Watts max. ERP < 5 Watts max. EIRP	PASS	Section 7.2
	Equivalent Isotropic Radiated Power (NR Band n66)	27.50(d)(4)	RSS-139(6.5)	< 1 Watts max. EIRP	PASS	Section 7.2
	Equivalent Isotropic Radiated Power (LTE Band 4/66)				PASS	Section 7.2
	Radiated Spurious Emissions (LTE Band 13)	2.1053, 27.53(f)	RSS-139(6.6)	< -70 dBW/MHz (for wideband signals) < -80 dBW (for discrete emissions less than 700Hz BW) For all emissions in the band 1559 - 1610 MHz	PASS	Section 7.3
	Radiated Spurious Emissions	2.1053, 27.53	RSS-139(6.6)	> 43 + 10 log ₁₀ (P[Watts]) for all out-of-band emissions	PASS	Section 7.3

Table 7-1. Summary of Test Results

Note:

All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.

FCC ID: ZNFG900VM	 PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT (Class II Permissive Change)	 LG	Approved by: Quality Manager
Test Report S/N: 1M2006040088-04.ZNF	Test Dates: 6/4 – 7/2/2020	EUT Type: Portable Handset	Page 10 of 21	

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

7.2 Radiated Power (ERP/EIRP)

Test Overview

Effective Radiated Power (ERP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $\geq 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: ZNFG900VM	 PCTEST® Proud to be part of element	PART 27 MEASUREMENT REPORT (Class II Permissive Change)	 LG	Approved by: Quality Manager
Test Report S/N: 1M2006040088-04.ZNF	Test Dates: 6/4 – 7/2/2020	EUT Type: Portable Handset	Page 11 of 21	

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

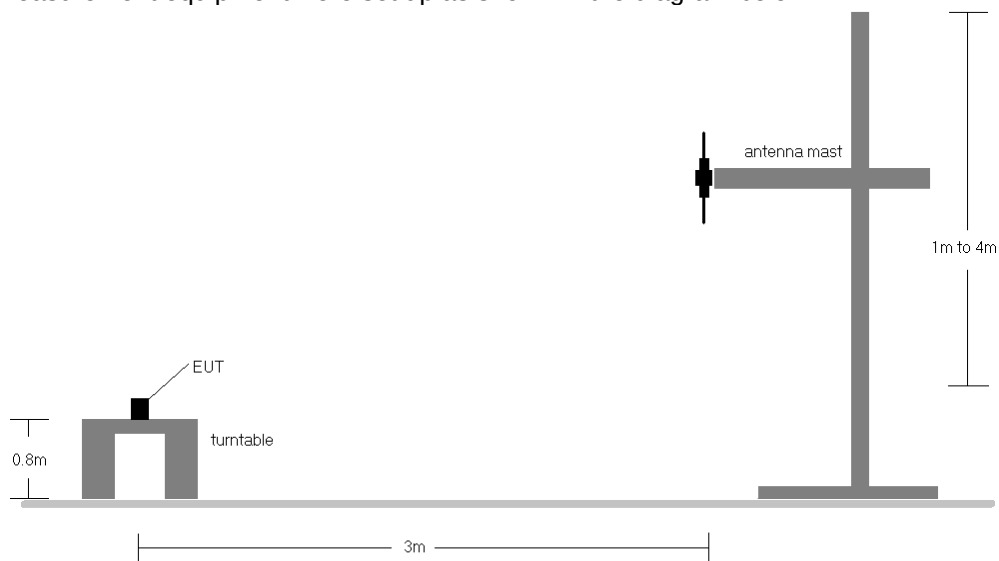


Figure 7-1. Radiated Test Setup <1GHz

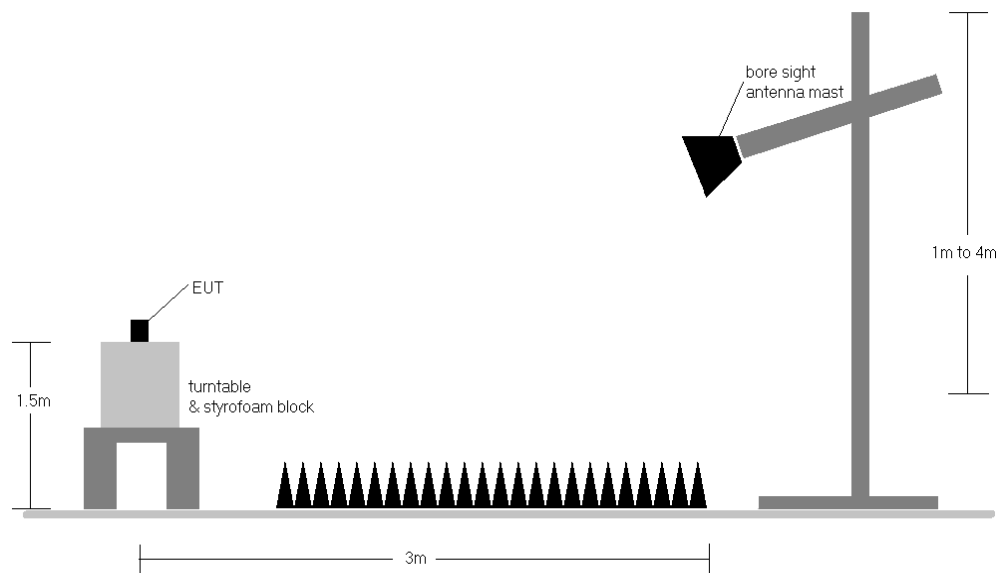


Figure 7-2. Radiated Test Setup >1GHz

FCC ID: ZNFG900VM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT (Class II Permissive Change)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006040088-04.ZNF	Test Dates: 6/4 – 7/2/2020	EUT Type: Portable Handset		Page 12 of 21

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
- 4) For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

FCC ID: ZNFG900VM	 PCTEST® Proud to be part of element	PART 27 MEASUREMENT REPORT (Class II Permissive Change)	 LG	Approved by: Quality Manager
Test Report S/N: 1M2006040088-04.ZNF	Test Dates: 6/4 – 7/2/2020	EUT Type: Portable Handset	Page 13 of 21	

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
20 MHz	QPSK	1720.0	H	107	196	9.41	1 / 50	10.80	20.21	0.105	30.00	-9.79
		1745.0	H	235	54	9.26	1 / 50	10.68	19.94	0.099	30.00	-10.06
		1770.0	H	126	120	9.27	1 / 99	9.98	19.25	0.084	30.00	-10.75
	16-QAM	1720.0	H	107	196	9.41	1 / 50	10.01	19.42	0.088	30.00	-10.58
		1745.0	H	235	54	9.26	1 / 50	9.88	19.14	0.082	30.00	-10.86
		1770.0	H	126	120	9.27	1 / 99	9.32	18.59	0.072	30.00	-11.41
	64-QAM	1720.0	H	107	196	9.41	1 / 50	9.15	18.56	0.072	30.00	-11.44
		1745.0	H	235	54	9.26	1 / 50	9.09	18.35	0.068	30.00	-11.65
		1770.0	H	126	120	9.27	1 / 99	8.67	17.94	0.062	30.00	-12.06
20 MHz	QPSK (Opp. Pol.)	1720.0	V	283	315	9.26	1 / 50	9.40	18.66	0.073	30.00	-11.34

Table 7-1. EIRP Data (LTE Band 66/4)

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
10 MHz	QPSK	704.0	V	166.0	97.0	3.58	1 / 49	19.45	20.88	0.122	34.77	-13.89
		707.5	V	169.0	97.0	3.72	1 / 25	18.34	19.91	0.098	34.77	-14.86
		711.0	V	306.0	79.0	3.67	1 / 0	19.20	20.72	0.118	34.77	-14.05
	16-QAM	704.0	V	166.0	97.0	3.58	1 / 49	18.70	20.13	0.103	34.77	-14.64
		707.5	V	169.0	97.0	3.72	1 / 25	17.52	19.09	0.081	34.77	-15.68
		711.0	V	306.0	79.0	3.67	1 / 0	18.53	20.05	0.101	34.77	-14.72
	64-QAM	704.0	V	166.0	97.0	3.58	1 / 49	17.91	19.34	0.086	34.77	-15.43
		707.5	V	169.0	97.0	3.72	1 / 25	16.69	18.26	0.067	34.77	-16.51
		711.0	V	306.0	79.0	3.67	1 / 0	17.61	19.13	0.082	34.77	-15.64
10 MHz	QPSK (Opp. Pol.)	704.0	H	305.0	87.0	3.72	1 / 49	18.92	20.49	0.112	34.77	-14.28

Table 7-2. ERP Data (LTE Band 12)

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
10 MHz	QPSK	782.0	V	158.0	101.0	5.89	1 / 49	13.24	16.98	0.050	34.77	-17.79
	16-QAM	782.0	V	158.0	101.0	5.89	1 / 49	12.44	16.18	0.042	34.77	-18.59
	64-QAM	782.0	V	158.0	101.0	5.89	1 / 49	11.63	15.37	0.034	34.77	-19.40
10 MHz	QPSK (Opp. Pol.)	782.0	H	158.0	97.0	5.89	1 / 49	13.20	16.94	0.049	34.77	-17.83
	QPSK (Dual Display)	782.0	H	161.0	139.0	5.89	1 / 49	12.94	16.68	0.047	34.77	-18.09

Table 7-3. ERP Data (LTE Band 13)

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
20 MHz	TT/2 BPSK	1720.0	H	229.0	329.0	9.41	1 / 0	10.76	20.17	0.104	30.00	-9.83
		1745.0	H	174.0	339.0	9.26	1 / 50	11.64	20.90	0.123	30.00	-9.10
		1770.0	H	132.0	340.0	9.27	1 / 99	11.18	20.45	0.111	30.00	-9.55
	QPSK	1720.0	H	229.0	329.0	9.41	1 / 0	10.99	20.40	0.110	30.00	-9.60
		1745.0	H	174.0	339.0	9.26	1 / 50	12.11	21.37	0.137	30.00	-8.63
		1770.0	H	132.0	340.0	9.27	1 / 99	11.13	20.40	0.110	30.00	-9.60
	16-QAM	1720.0	H	229.0	329.0	9.41	1 / 0	9.79	19.20	0.083	30.00	-10.80
		1745.0	H	174.0	339.0	9.26	1 / 50	9.97	19.23	0.084	30.00	-10.77
		1770.0	H	132.0	340.0	9.27	1 / 99	10.17	19.44	0.088	30.00	-10.56
	64-QAM	1720.0	H	229.0	329.0	9.41	1 / 0	8.32	17.73	0.059	30.00	-12.27
		1745.0	H	174.0	339.0	9.26	1 / 50	8.29	17.55	0.057	30.00	-12.45
		1770.0	H	132.0	340.0	9.27	1 / 99	8.48	17.75	0.060	30.00	-12.25
	256-QAM	1720.0	H	229.0	329.0	9.41	1 / 0	6.28	15.69	0.037	30.00	-14.31
		1745.0	H	174.0	339.0	9.26	1 / 50	6.09	15.35	0.034	30.00	-14.65
		1770.0	H	132.0	340.0	9.27	1 / 99	6.52	15.79	0.038	30.00	-14.21
20 MHz	QPSK (CP-OFDM)	1745.0	H	180.0	332.0	9.26	1 / 50	10.33	19.59	0.091	30.00	-10.41
	QPSK (Opposite Pol.)	1745.0	V	128.0	263.0	9.26	1 / 50	10.58	19.84	0.096	30.00	-10.16
	QPSK (Dual Display)	1745.0	H	182.0	309.0	9.26	1 / 50	11.36	20.62	0.115	30.00	-9.38

Table 7-4. EIRP Data (NR Band n66)

FCC ID: ZNFG900VM	 PART 27 MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Quality Manager
Test Report S/N: 1M2006040088-04.ZNF	Test Dates: 6/4 – 7/2/2020	EUT Type: Portable Handset	Page 14 of 21

7.3 Radiated Spurious Emissions Measurements

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: ZNFG900VM	 PCTEST® Proud to be part of element	PART 27 MEASUREMENT REPORT (Class II Permissive Change)	 LG	Approved by: Quality Manager
Test Report S/N: 1M2006040088-04.ZNF	Test Dates: 6/4 – 7/2/2020	EUT Type: Portable Handset	Page 15 of 21	

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

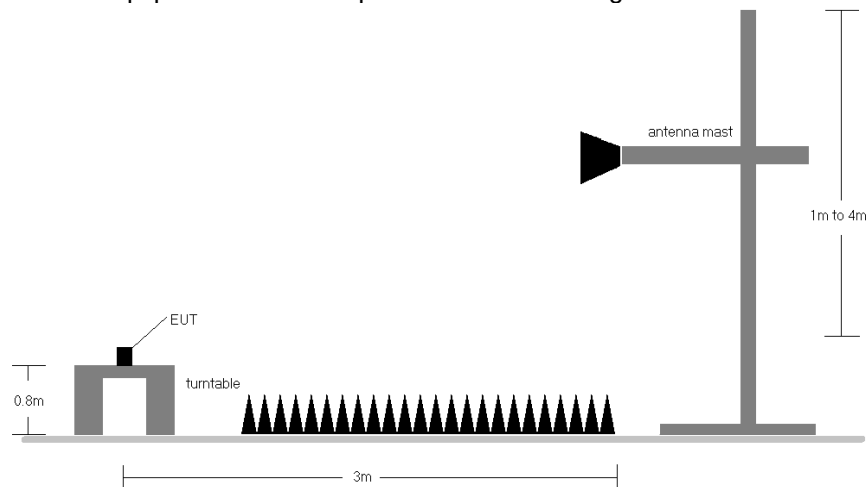


Figure 7-3. Test Instrument & Measurement Setup

Test Notes

- 1) Field strengths are calculated using the Measurement quantity conversions in KDB 971168 Section 5.8.4.
 - b) $E(\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
 - d) $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V}/\text{m}) + 20\log D - 104.8$; where D is the measurement distance in meters.
- 2) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 3) This unit was tested with its standard battery.
- 4) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
- 5) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 6) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 7) The "-" shown in the following RSE tables are used to denote a noise floor measurement.
- 8) For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.
- 9) Spurious emissions shown in this section are measured while operating in EN-DC mode with Sub 6GHz NR carrier as well as an LTE carrier (anchor). Spurious emissions from the NR carrier device, is subject to the rules under which the NR carrier operates. Spurious emission caused by the LTE carrier must meet the requirements of the rules under which the LTE carrier operates.

FCC ID: ZNFG900VM	PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT (Class II Permissive Change)	LG	Approved by: Quality Manager
Test Report S/N: 1M2006040088-04.ZNF	Test Dates: 6/4 – 7/2/2020	EUT Type: Portable Handset	Page 16 of 21	

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

LTE Band 66/4

Bandwidth (MHz):	20
Frequency (MHz):	1720.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3440.0	V	150	215	-79.54	7.34	34.80	-60.45	-13.00	-47.45
5160.0	V	100	310	-77.45	9.77	39.32	-55.94	-13.00	-42.94
6880.0	V	-	-	-82.14	12.97	37.83	-57.43	-13.00	-44.43
8600.0	V	101	81	-79.94	16.17	43.23	-52.03	-13.00	-39.03
10320.0	V	101	358	-77.79	18.98	48.19	-47.07	-13.00	-34.07

Table 7-2. Radiated Spurious Data (LTE Band 66/4 – Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	1745.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3490.0	V	-	-	-80.01	7.19	34.18	-61.08	-13.00	-48.08
5235.0	V	103	315	-77.51	9.60	39.09	-56.17	-13.00	-43.17
6980.0	V	-	-	-82.09	13.50	38.41	-56.84	-13.00	-43.84
8725.0	V	104	78	-80.37	16.69	43.32	-51.94	-13.00	-38.94
10470.0	V	116	0	-77.93	19.96	49.03	-46.23	-13.00	-33.23
12215.0	V	-	-	-83.62	22.21	45.59	-49.67	-13.00	-36.67

Table 7-3. Radiated Spurious Data (LTE Band 66/4 – Mid Channel)

Bandwidth (MHz):	20
Frequency (MHz):	1770.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3540.00	V	-	-	-80.15	7.66	34.51	-60.75	-13.00	-47.75
5310.00	V	107	136	-79.49	10.09	37.60	-57.66	-13.00	-44.66
7080.00	V	-	-	-82.06	14.13	39.07	-56.19	-13.00	-43.19
8850.00	V	112	130	-79.83	16.87	44.04	-51.22	-13.00	-38.22
10620.00	V	100	319	-72.38	19.63	54.25	-41.01	-13.00	-28.01

Table 7-4. Radiated Spurious Data (LTE Band 66/4 – High Channel)

FCC ID: ZNFG900VM	 PCTEST® Proud to be part of element	PART 27 MEASUREMENT REPORT (Class II Permissive Change)	 LG	Approved by: Quality Manager
Test Report S/N: 1M2006040088-04.ZNF	Test Dates: 6/4 – 7/2/2020	EUT Type: Portable Handset	Page 17 of 21	

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

LTE Band 12

Bandwidth (MHz):	10
Frequency (MHz):	704.0
RB / Offset:	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1408.0	V	121	294	-71.65	-3.43	31.92	-63.34	-13.00	-50.34
2112.0	V	-	-	-74.52	-1.11	31.37	-63.88	-13.00	-50.88

Table 7-5. Radiated Spurious Data (LTE Band 12 – Low Channel)

Bandwidth (MHz):	10
Frequency (MHz):	707.5
RB / Offset:	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1415.0	V	132	289	-71.44	-2.79	32.77	-62.49	-13.00	-49.49
2122.5	V	-	-	-73.97	-1.19	31.84	-63.42	-13.00	-50.42

Table 7-6. Radiated Spurious Data (LTE Band 12 – Mid Channel)

Bandwidth (MHz):	10
Frequency (MHz):	711.0
RB / Offset:	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1422.0	V	144	316	-70.49	-3.61	32.90	-62.36	-13.00	-49.36
2133.0	V	-	-	-74.02	-1.76	31.22	-64.03	-13.00	-51.03

Table 7-7. Radiated Spurious Data (LTE Band 12 – High Channel)

FCC ID: ZNFG900VM	 PART 27 MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Quality Manager
Test Report S/N: 1M2006040088-04.ZNF	Test Dates: 6/4 – 7/2/2020	EUT Type: Portable Handset	Page 18 of 21

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

LTE Band 13

Bandwidth (MHz):	10
Frequency (MHz):	782.0
RB / Offset:	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1564.0	V	110	218	-71.63	-3.02	32.35	-62.91	-40.00	-22.91
2346.0	V	-	-	-73.69	-1.34	31.97	-63.28	-13.00	-50.28

Table 7-8. Radiated Spurious Data (LTE Band 13)

Case:	w/ Dual Display
Bandwidth (MHz):	10
Frequency (MHz):	782.0
RB / Offset:	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1564.0	V	114	220	-71.84	-3.02	32.14	-63.12	-40.00	-23.12
2346.0	V	-	-	-73.38	-1.34	32.28	-62.97	-13.00	-49.97

Table 7-9. Radiated Spurious Data (LTE Band 13 – w/ Dual Display)

FCC ID: ZNFG900VM	 PCTEST Proud to be part of element	PART 27 MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Quality Manager
Test Report S/N: 1M2006040088-04.ZNF	Test Dates: 6/4 – 7/2/2020	EUT Type: Portable Handset	Page 19 of 21	

NR Band n66

Bandwidth (MHz):	20
Frequency (MHz):	1720.0
RB / Offset:	1 / 50
Mode:	Stand Alone

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3440.0	H	155	75	-70.49	2.80	39.31	-55.95	-13.00	-42.95
5160.0	H	239	141	-70.20	5.92	42.72	-52.54	-13.00	-39.54
6880.0	H	-	-	-73.66	9.24	42.58	-52.68	-13.00	-39.68

Table 7-10. Radiated Spurious Data (NR Band n66 – Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	1745.0
RB / Offset:	1 / 50
Mode:	Stand Alone

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3490.0	H	161	87	-71.14	2.58	38.44	-56.82	-13.00	-43.82
5235.0	H	199	140	-69.58	6.00	43.42	-51.84	-13.00	-38.84
6980.0	H	-	-	-73.61	7.78	41.17	-54.09	-13.00	-41.09

Table 7-11. Radiated Spurious Data (NR Band n66 – Mid Channel)

Bandwidth (MHz):	20
Frequency (MHz):	1770.0
RB / Offset:	1 / 50
Mode:	Stand Alone

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3540.0	H	181	155	-71.22	3.06	38.84	-56.42	-13.00	-43.42
5310.0	H	200	97	-69.32	5.77	43.45	-51.81	-13.00	-38.81
7080.0	H	-	-	-74.11	8.04	40.93	-54.33	-13.00	-41.33

Table 7-12. Radiated Spurious Data (NR Band n66 – High Channel)

Bandwidth (MHz):	20
Frequency (MHz):	1745.0
RB / Offset:	1 / 50
Mode:	EN-DC
Anchor Band:	LTE Band 2

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3760.5	H	147	317	-69.28	3.58	41.30	-53.95	-13.00	-40.95
5640.5	H	130	97	-69.95	6.07	43.12	-52.14	-13.00	-39.14

Table 7-13. Radiated Spurious Data (ENDC n66-LB2)

FCC ID: ZNFG900VM	 PART 27 MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Quality Manager
Test Report S/N: 1M2006040088-04.ZNF	Test Dates: 6/4 – 7/2/2020	EUT Type: Portable Handset	Page 20 of 21

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Portable Handset** **FCC ID: ZNFG900VM** complies with all the requirements of Parts 27 of the FCC rules.

FCC ID: ZNFG900VM	 Proud to be part of element	PART 27 MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Quality Manager
Test Report S/N: 1M2006040088-04.ZNF	Test Dates: 6/4 – 7/2/2020	EUT Type: Portable Handset		Page 21 of 21

© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.