

FCC NFC REPORT

FCC Certification

Applicant Name:
LG Electronics MobileComm U.S.A., Inc.**Address:**
1000 Sylvan Avenue, Englewood Cliffs NJ 07632**Date of Issue:**

March 31, 2016

Test Site/Location:

HCT CO., LTD., 74,Seoicheon-ro 578beon-gil,Majang-myeo,Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-R-1603-F108-1**HCT FRN:** 0005866421**IC Recognition No.:** 5944A-5**FCC ID : ZNFK580****APPLICANT : LG Electronics MobileComm U.S.A., Inc.****Model(s):** LG-K580**Additional Model(s):** LGK580, K580**EUT Type:** Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA and LTE Phone with Bluetooth, Wi-Fi and NFC**RF Output Field Strength:** 16.96 dBuV/m @30 m**Frequency of Operation:** 13.5597 MHz**Modulation type:** ASK**FCC Classification:** Low Power Communication Device – Transmitter**FCC Rule Part(s):** FCC Part 15.225 Subpart C

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)



Report prepared by
: Seoul Ki Lee
Test Engineer of RF Team



Approved by
: Sang Jun Lee
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1603-F108	March 28, 2016	- First Approval Report
HCT-R-1603-F108-1	March 31, 2016	- Revised the RF output field strength on page 1.

Table of Contents

1. GENERAL INFORMATION	4
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE	5
3.3 GENERAL TEST PROCEDURES	5
3.4 DESCRIPTION OF TEST MODES	5
3.5 STANDARDS	6
4. INSTRUMENT CALIBRATION.....	7
5. FACILITIES AND ACCREDITATIONS	7
5.1 FACILITIES	7
5.2 EQUIPMENT	7
6. ANTENNA REQUIREMENTS	7
7. MEASUREMENT UNCERTAINTY	8
8. TEST SUMMARY	9
9. RADIATED EMISSION MEASUREMENT	10
9.1. RADIATED EMISSION 9 kHz – 30 MHz	11
9.2. RADIATED EMISSION 30 MHz – 1000 MHz	14
10. EMISSION BANDWIDTH PLOT.....	16
11. FREQUENCY TOLERANCE	17
12. POWERLINE CONDUCTE EMISSIONS	22
13. LIST OF TEST EQUIPMENT	31
13.1 LIST OF TEST EQUIPMENT(Conducted Test)	31
13.2 LIST OF TEST EQUIPMENT(Radiated Test).....	32

1. GENERAL INFORMATION

Applicant: LG Electronics MobileComm U.S.A., Inc.
Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632
FCC ID: ZNFK580
EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA and LTE Phone with Bluetooth, Wi-Fi and NFC
FCC Model name(s): LG-K580
FCC Additional Model name(s): LGK580, K580
Date(s) of Tests: February 03, 2016 ~ March 02, 2016
Place of Tests: HCT Co., Ltd.
74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea
(IC Recognition No. : 5944A-5)

2. EUT DESCRIPTION

FCC Model Name	LG-K580
FCC Additional Model name(s)	LGK580, K580
EUT Type	Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA and LTE Phone with Bluetooth, Wi-Fi and NFC
Power Supply	DC 3.85 V
Battery Infomation	Model: BL-T23 Type: Li-Polymer
Frequency of Operation	13.5597 MHz
Transmit Power	10.46 dBuV/m @30 m
Modulation Type	ASK
Antenna Specification	Manufacturer: AT&C Co., LTD. Antenna type: FPCB ANTENNA

3. TEST METHODOLOGY

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10:2013).

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.225 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.3 of ANSI C63.10. (Version: 2013).

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3.5 STANDARDS

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance With

FCC Part 15.Subpart C

Regulation	Measurement standard	Range
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.225(a)	ANSI C63.10:2013	13.553MHz to 13.567MHz
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.225(d)	ANSI C63.10:2013	outside of the 13.110-14.010 MHz band
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.209	ANSI C63.10:2013	9kHz to 30MHz
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.209	ANSI C63.10:2013	30MHz to 1GHz
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.207	ANSI C63.10:2013	150kHz to 30MHz
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.225(e)	ANSI C63.10:2013	0.01% of nominal
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.215(c)	ANSI C63.10:2013	-

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2006).

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The 10 m semi anechoic chamber used to collect the Conducted and Radiated data is located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4(Version :2014). Detailed description of test facilities was submitted to the Commission and accepted dated July 07, 2015 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned loop, dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203

7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	6.07

8. TEST SUMMARY

The results in this report apply only to sample tested

Regulation	Test Type	Range	Result
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.225(a)	Radiated Electric Field Emissions	13.553MHz to 13.567MHz	Pass
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.225(b)	Radiated Electric Field Emissions	13.410MHz to 13.553MHz and 13.567MHz to 13.710MHz	Pass
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.225(c)	Radiated Electric Field Emission	13.110 MHz to 13.410 MHz and 13.710 MHz to 14.010 MHz	Pass
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.209 (d)	Radiated Electric Field Emissions	9kHz to 30MHz	Pass
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.209	Radiated Electric Field Emissions	30MHz to 1GHz	Pass
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.207	AC power conducted emissions	150kHz to 30MHz	Pass
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.225(e)	Frequency Stability	0.01% of nominal	Pass
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.215(c)	20 dB Bandwidth	-	Pass

9. RADIATED EMISSION MEASUREMENT

Requirement(s): 15.209, 15.225

Except as provided elsewhere in this paragraph the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Minimum Standard: FCC Part 15.225 / 15.209

Rule Part	Frequency (MHz)	Limit
Part 15.209	0.009 ~ 0.490	2400/F(kHz) uV/m@300 m
	0.490 ~1.705	24000/F(kHz) uV/m@30 m
	1.705 ~ 30	30 uV/m@30 m
	30 ~ 88	100 ** uV/m@3 m
	88 ~ 216	150 ** uV/m@3 m
	216 ~ 960	200 ** uV/m@3 m
	Above 960	500 uV/m@3 m


** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

15.225 Operation within the band 13.110 – 14.010 MHz.

- The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter (= 84 dBuV/m) at 30 meters.
- Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter (=50.5dBuV/m) at 30 meters.
- Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter (=40.5 dBuV/m) at 30 meters.
- The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.
- The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.
- In the case of radio frequency powered tags designed to operate with a device authorized under this section, the tag may be approved with the device or be considered as a separate device subject to its own authorization. Powered tags approved with a device under a single application shall be labeled with the same identification number as the device.

9.1. RADIATED EMISSION 9 kHz – 30 MHz

Test Set-up

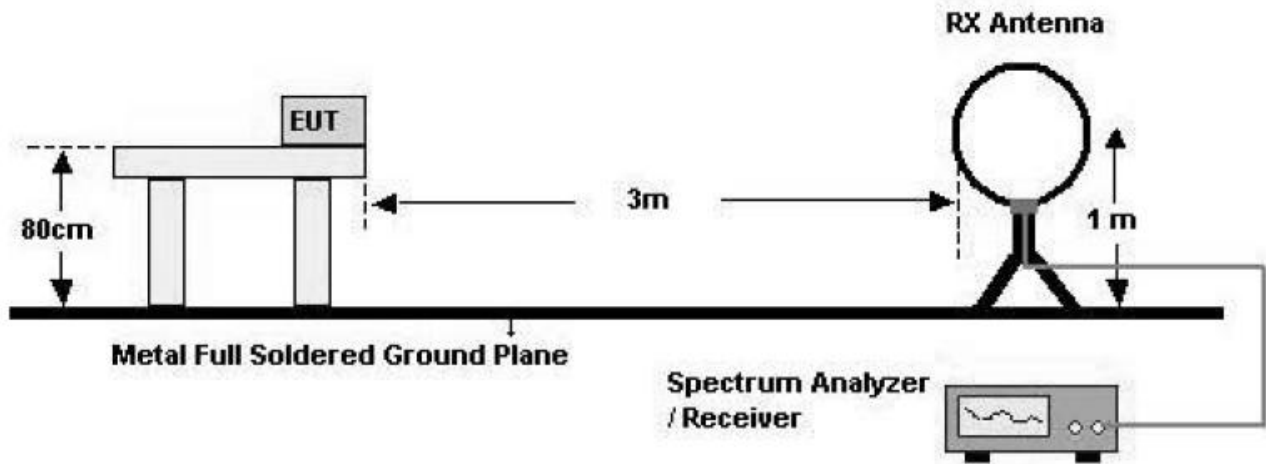

Test Procedure

The EUT was placed on a non-conductive table located on semi-anechoic chamber. The loop antenna was placed at a location 3m from the EUT. Radiated emissions were measured with the loop antenna both parallel and perpendicular to the plane of the EUT loop antenna and with x, y, z planes in EUT.

The limit is converted from microvolts/meter to decibel microvolts/meter. Sample Calculation:

Corrected Amplitude = Raw Amplitude(dBμV/m) + ACF(dB) + Cable Loss(dB) – Distance Correction Factor

The spectrum analyzer is set to:

Frequency Range = 9 kHz ~ 1 GHz

RBW = 9 kHz (9 kHz ~ 30 MHz)
= 120 kHz (30 MHz ~ 1 GHz)

Trace Mode = max hold

Detector Mode = peak / Quasi-peak

Sweep time = auto

■ Test Results (Worst case : z-H)

13.553 MHz-13.567 MHz						
Frequency (MHz)	Read Level (dBuV/m)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.5597	37.47	19.49	-40.00	16.96	84.00	67.04
13.5604	33.63	19.49	-40.00	13.12	84.00	70.88

13.410 MHz-13.553 MHz and 13.567 MHz-13.710 MHz						
Frequency (MHz)	Read Level (dBuV/m)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.4540	26.32	19.49	-40.00	5.81	50.47	44.66
13.6648	26.05	19.49	-40.00	5.54	50.47	44.93

13.110 MHz – 13.410 MHz and 13.710 MHz-14.010 MHz						
Frequency (MHz)	Read Level (dBuV/m)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.3464	17.72	19.49	-40.00	-2.79	40.51	43.30
13.7724	16.36	19.49	-40.00	-4.15	40.51	44.66

9 kHz -30 MHz						
Frequency (MHz)	Read Level (dBuV/m)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
9.3307	16.78	19.98	-40.00	-3.24	29.54	32.78
15.9387	12.36	19.28	-40.00	-8.36	29.54	37.90
27.149	11.57	18.62	-40.00	-9.81	29.54	39.35
27.106	10.74	18.62	-40.00	-10.64	29.54	40.18


Note : The test results for below 30 MHz is correlated to an open site.

The result on OATS is about 6.5 dB higher than semi-anechoic chamber(10 m chamber)

1. Distance Correction Below 30MHz = $40\log(3\text{m}/30\text{m}) = -40 \text{ dB}$
Measurement Distance : 3 m (Below 30 MHz)
2. Factor = Antenna Factor + Cable Loss
3. Result Level = Read Level + Factor + Distance Correction
4. Margin = Limit – Result Level
5. We have done x, y, z planes in EUT
6. Antenna rotated about its vertical/horizontal axis for maximum response at each azimuth position around the EUT.
7. Worst case of operating mode is type A, analog mode and 106 kbps.

■ RESULT PLOTS

Radiated Emissions (9kHz~30MHz) plot

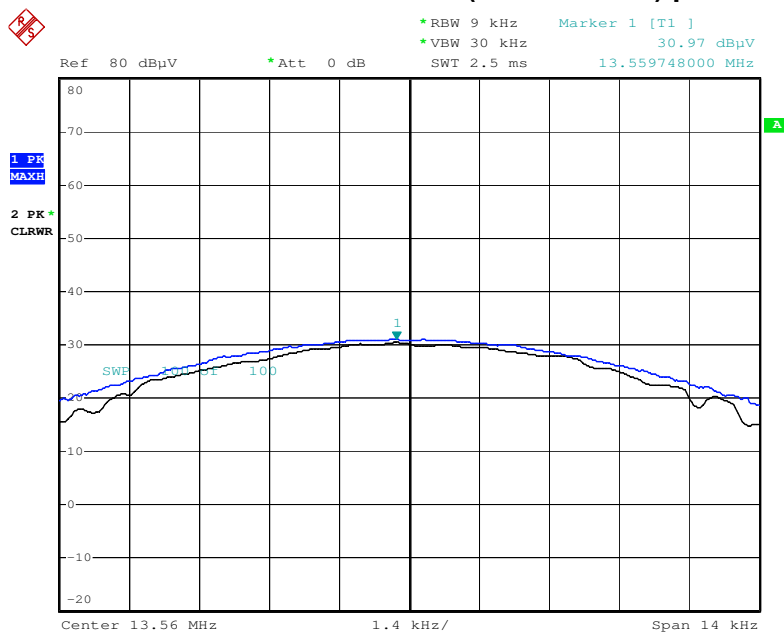


Date: 28.FEB.2016 11:26:38

Note : Only the worst case plots for Radiated Emissions.

9.2. RADIATED EMISSION 30 MHz – 1000 MHz

Test Set-up

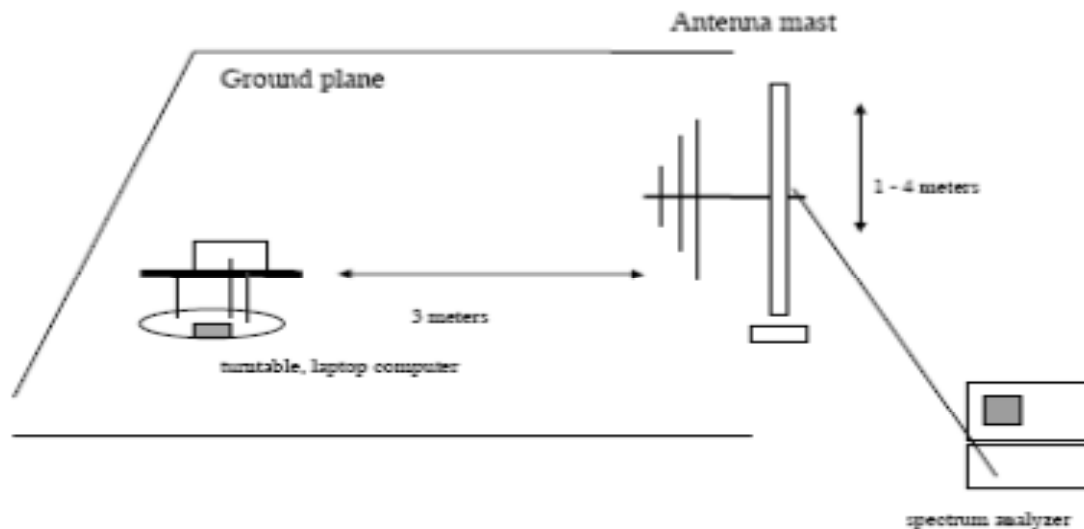

Test Procedures: Radiated emissions were measured according to ANSI C63.10.

The EUT was set to transmit at the highest output power.

The EUT was set 3 meter away from the measuring antenna.

■ Test Results


Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
*37.76	15.38	11.49	0.58	H	27.45	40.00	12.55
55.98	15.29	11.82	0.74	H	27.85	40.00	12.15
*73.52	15.29	10.32	0.77	H	26.38	40.00	13.62
*108.54	15.78	10.45	0.97	H	27.20	43.50	16.30
138.12	15.21	12.84	1.03	H	29.08	43.50	14.42
147.64	15.97	13.12	1.07	H	30.16	43.50	13.34

Remark

1. Result Level = Read Level + (Antenna Factor+ Cable Loss)
2. Margin = Limit – Result Level
3. '*' is the result for restricted band.

■ **RESULT PLOTS**

Radiated Emissions (30MHz~1000MHz) plot

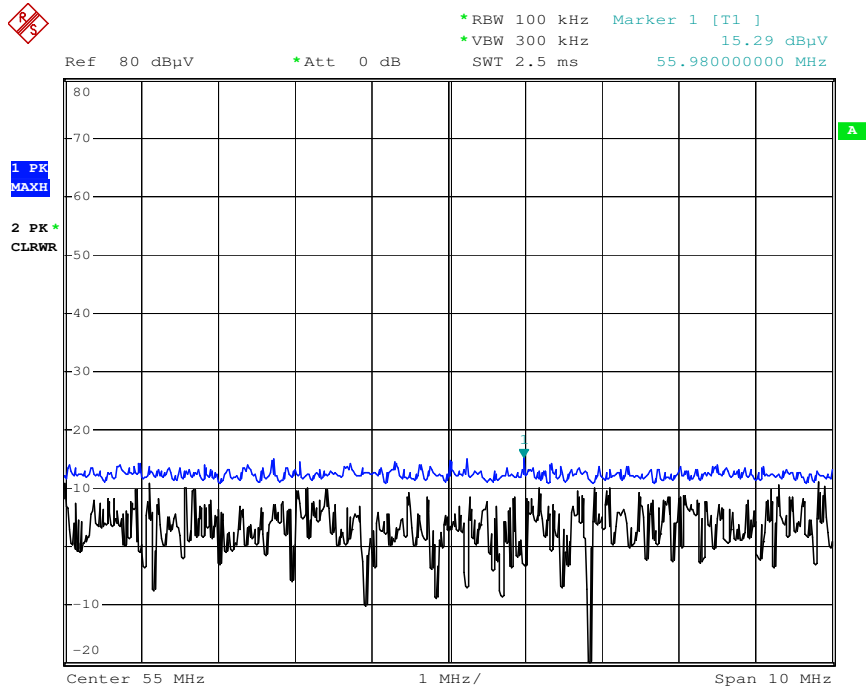

Date: 2.MAR.2016 07:15:12

Note : Only the worst case plots for Radiated Emissions.

10. EMISSION BANDWIDTH PLOT.

Requirement(s):

Test Set-up: The EUT was connected to a spectrum analyzer.

Test Procedure: The 20 dB bandwidth was measured by using a spectrum analyzer.

RBW = Auto

VBW = Auto


Span = Adequately in the operating Tx.

Detector = Peak

Trace mode = Max hold

Allow the trace to stabilize

■ Test Results

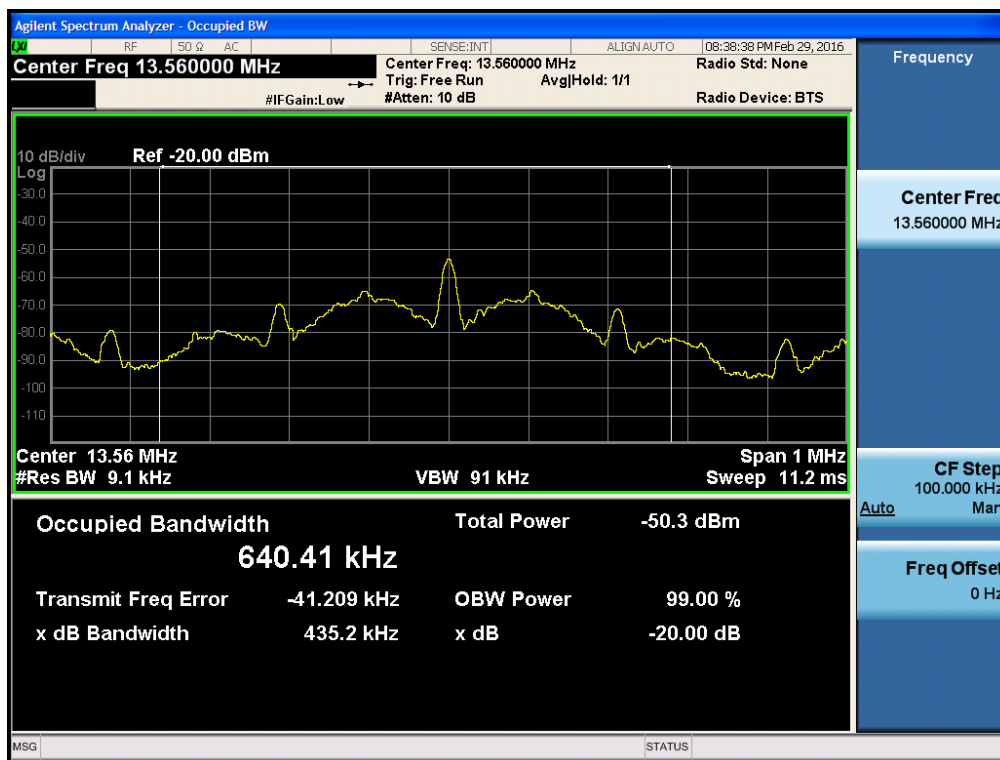

11. FREQUENCY TOLERANCE

Procedure: Part 15.225, ANSI 63.10

If required, the operating or transmitting frequency of an intentional radiator should be measured in accordance with the following procedure to ensure that the device operates outside certain precluded frequency bands and within the frequency range. No modulation needs to be supplied to the intentional radiator during these tests, unless modulation is required to produce an output, e.g., single-sideband suppressed carrier transmitters.

The frequency stability of the transmitter is measured by:

- a) Temperature: The temperature is varied from -20°C to + 50°C using an environmental chamber.
- b) For battery operated equipment, the equipment tests shall be performed using a new battery.
- c) Test Procedure
 - Turn the EUT OFF and place it inside the environmental temperature chamber. For devices that have oscillator heaters, energize only the heater circuit.
 - Set the temperature control on the chamber to the highest specified in the regulatory requirements for the type of device and allow the oscillator heater and the chamber temperature to stabilize.
 - While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.
- d) The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency.

Note : Below the measurement result is worst value of the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized

Measurement Result:

PERATING FREQUENCY: 13.56 MHz
 REFERENCE VOLTAGE: 3.85 VDC
 DEVIATION LIMIT: 0.01% = 1356 Hz

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (MHz)	Frequency Dev. (Hz)	Frequency Dev (%)
100%	3.85	-20	13.559878	-122	-0.0008997
100%		-10	13.559884	-116	-0.0008555
100%		0	13.559887	-113	-0.0008333
100%		+10	13.559895	-105	-0.0007743
100%		+20(Ref.)	13.559904	-96	-0.0007080
100%		+30	13.559917	-83	-0.0006121
100%		+40	13.559925	-75	-0.0005531
100%		+50	13.559947	-53	-0.0003909
115%	4.4	+20	13.559941	-59	-0.0004351
85%	3.6	+20	13.559959	-41	-0.0003024

2 minutes

Measurement Result:

PERATING FREQUENCY: 13.56 MHz
 REFERENCE VOLTAGE: 3.85 VDC
 DEVIATION LIMIT: 0.01% = 1356 Hz

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (MHz)	Frequency Dev. (Hz)	Frequency Dev (%)
100%	3.85	-20	13.559906	-94	-0.0006932
100%		-10	13.559919	-81	-0.0005973
100%		0	13.559924	-76	-0.0005605
100%		+10	13.559928	-72	-0.0005310
100%		+20(Ref.)	13.559926	-74	-0.0005457
100%		+30	13.559942	-58	-0.0004277
100%		+40	13.559953	-47	-0.0003466
100%		+50	13.559962	-38	-0.0002802
115%	4.4	+20	13.559984	-16	-0.0001180
85%	3.6	+20	13.559987	-13	-0.0000959

5 minutes

Measurement Result:

PERATING FREQUENCY: 13.56 MHz
REFERENCE VOLTAGE: 3.85 VDC
DEVIATION LIMIT: 0.01% = 1356 Hz

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (MHz)	Frequency Dev. (Hz)	Frequency Dev (%)
100%	3.85	-20	13.559918	-82	-0.0006047
100%		-10	13.559929	-71	-0.0005236
100%		0	13.559932	-68	-0.0005015
100%		+10	13.559946	-54	-0.0003982
100%		+20(Ref.)	13.559949	-51	-0.0003761
100%		+30	13.559954	-46	-0.0003392
100%		+40	13.559965	-35	-0.0002581
100%		+50	13.559972	-28	-0.0002065
115%	4.4	+20	13.559988	-12	-0.0000885
85%	3.6	+20	13.559995	-5	-0.0000369

10 minutes

Measurement Result:

PERATING FREQUENCY: 13.56 MHz
REFERENCE VOLTAGE: 3.85 VDC
DEVIATION LIMIT: 0.01% = 1356 Hz

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (MHz)	Frequency Dev. (Hz)	Frequency Dev (%)
100%	3.85	-20	13.560061	61	0.0004499
100%		-10	13.560042	42	0.0003097
100%		0	13.560037	37	0.0002729
100%		+10	13.560021	21	0.0001549
100%		+20(Ref.)	13.560012	12	0.0000885
100%		+30	13.559957	-43	-0.0003171
100%		+40	13.559967	-33	-0.0002434
100%		+50	13.559974	-26	-0.0001917
115%	4.4	+20	13.559982	-18	-0.0001327
85%	3.6	+20	13.559988	-12	-0.0000885

12. POWERLINE CONDUCTE EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolt (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.
5. The EUT is the device operating below 30 MHz.
 - For unterminated the Antenna, the AC line conducted tests are performed with the antenna connected
 - For terminated the Antenna, the AC line conducted tests are performed with a dummy load connected to the EUT antenna output terminal.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

Test Plots

Underminate the Antenna

Conducted Emissions (Line 1)

Test


1 / 2

HCT TEST Report

Common Information

EUT: LG-K580
 Manufacturer: LG
 Test Site: SHIELD ROOM
 Operating Conditions: NFC MODE _ UNTERMINATION
 Operator Name: SK LEE

FCC CLASS B

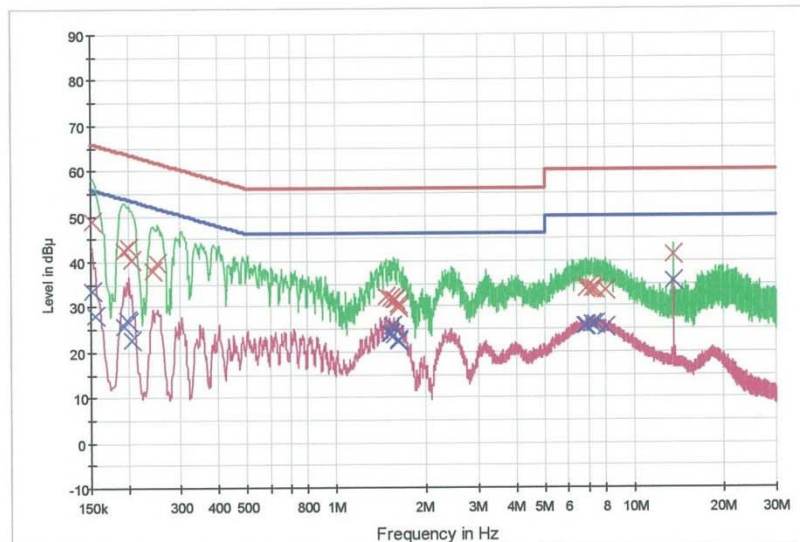

— FCC CLASS B_QP — FCC CLASS B_AV — Preview Result 1-PK+
 — Preview Result 2-AVG × Final Result 1-QPK × Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.152000	48.9	9.000	Off	N	9.6	16.9	65.9
0.194000	42.5	9.000	Off	N	9.6	21.4	63.9
0.202000	43.0	9.000	Off	N	9.6	20.5	63.5
0.206000	40.4	9.000	Off	N	9.6	23.0	63.4
0.242000	37.9	9.000	Off	N	9.6	24.1	62.0
0.252000	39.7	9.000	Off	N	9.6	22.0	61.7
1.462000	32.0	9.000	Off	N	9.7	24.0	56.0
1.514000	31.7	9.000	Off	N	9.7	24.3	56.0
1.562000	31.6	9.000	Off	N	9.7	24.4	56.0
1.568000	31.5	9.000	Off	N	9.7	24.5	56.0
1.610000	30.3	9.000	Off	N	9.7	25.7	56.0
1.618000	29.7	9.000	Off	N	9.7	26.3	56.0
6.858000	33.7	9.000	Off	N	9.9	26.3	60.0
6.990000	34.4	9.000	Off	N	9.9	25.6	60.0
7.220000	34.0	9.000	Off	N	9.9	26.0	60.0
7.358000	33.9	9.000	Off	N	9.9	26.1	60.0
7.990000	33.4	9.000	Off	N	9.9	26.6	60.0
13.560000	41.3	9.000	Off	N	10.1	18.7	60.0

2016-03-10

오전 8:55:48

Test

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.152000	33.4	9.000	Off	N	9.6	22.4	55.9
0.156000	28.0	9.000	Off	N	9.6	27.7	55.7
0.194000	25.8	9.000	Off	N	9.6	28.1	53.9
0.198000	27.0	9.000	Off	N	9.6	26.7	53.7
0.202000	26.7	9.000	Off	N	9.6	26.8	53.5
0.206000	22.6	9.000	Off	N	9.6	30.8	53.4
1.510000	24.0	9.000	Off	N	9.7	22.0	46.0
1.514000	24.0	9.000	Off	N	9.7	22.0	46.0
1.546000	25.8	9.000	Off	N	9.7	20.2	46.0
1.562000	23.7	9.000	Off	N	9.7	22.3	46.0
1.610000	22.6	9.000	Off	N	9.7	23.4	46.0
1.618000	22.2	9.000	Off	N	9.7	23.8	46.0
6.784000	25.7	9.000	Off	N	9.9	24.3	50.0
6.858000	25.8	9.000	Off	N	9.9	24.2	50.0
7.220000	26.0	9.000	Off	N	9.9	24.0	50.0
7.358000	26.0	9.000	Off	N	9.9	24.0	50.0
7.990000	25.5	9.000	Off	N	9.9	24.5	50.0
13.560000	35.7	9.000	Off	N	10.1	14.3	50.0

2016-03-10

오전 8:55:48

Conducted Emissions (Line 2)

Test


1 / 2

HCT TEST Report

Common Information

EUT: LG-K580
 Manufacturer: LG
 Test Site: SHIELD ROOM
 Operating Conditions: NFC MODE _ UNTERMINATION
 Operator Name: SK LEE

FCC CLASS B

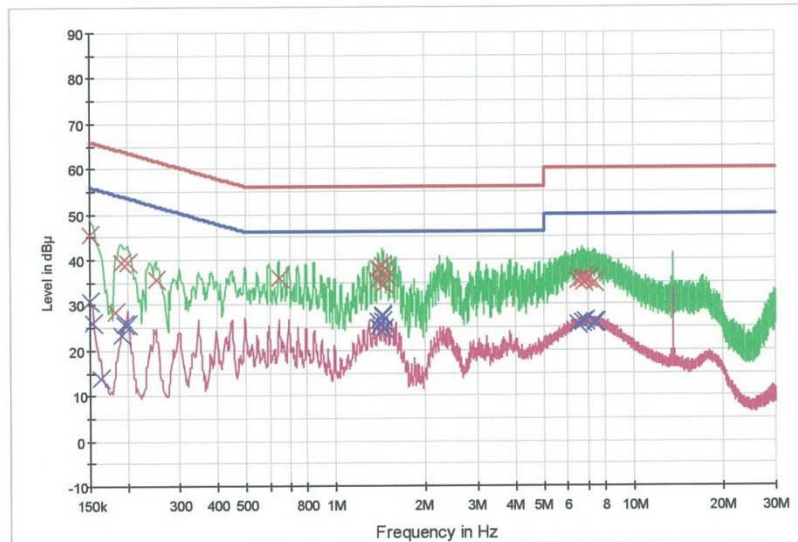

— FCC CLASS B_QP — FCC CLASS B_AV — Preview Result 1-PK+
 — Preview Result 2-AVG × Final Result 1-QPK × Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	45.6	9.000	Off	L1	9.7	20.4	66.0
0.182000	28.5	9.000	Off	L1	9.6	35.9	64.4
0.192000	39.4	9.000	Off	L1	9.6	24.6	63.9
0.200000	39.2	9.000	Off	L1	9.6	24.4	63.6
0.250000	35.7	9.000	Off	L1	9.6	26.0	61.8
0.646000	36.0	9.000	Off	L1	9.7	20.0	56.0
1.388000	37.9	9.000	Off	L1	9.7	18.1	56.0
1.392000	35.3	9.000	Off	L1	9.7	20.7	56.0
1.434000	38.6	9.000	Off	L1	9.7	17.4	56.0
1.440000	37.3	9.000	Off	L1	9.7	18.7	56.0
1.444000	34.6	9.000	Off	L1	9.7	21.4	56.0
1.488000	36.4	9.000	Off	L1	9.7	19.6	56.0
6.446000	35.2	9.000	Off	L1	9.9	24.8	60.0
6.696000	35.6	9.000	Off	L1	9.9	24.4	60.0
6.792000	34.7	9.000	Off	L1	9.9	25.3	60.0
6.832000	36.0	9.000	Off	L1	9.9	24.0	60.0
7.048000	35.7	9.000	Off	L1	9.9	24.4	60.0
7.330000	34.8	9.000	Off	L1	9.9	25.2	60.0

2016-03-10

오전 9:06:21

Test

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	30.8	9.000	Off	L1	9.7	25.2	56.0
0.154000	25.9	9.000	Off	L1	9.6	29.8	55.8
0.162000	13.7	9.000	Off	L1	9.6	41.7	55.4
0.192000	23.4	9.000	Off	L1	9.6	30.5	53.9
0.196000	25.7	9.000	Off	L1	9.6	28.1	53.8
0.200000	25.7	9.000	Off	L1	9.6	27.9	53.6
1.388000	26.5	9.000	Off	L1	9.7	19.5	46.0
1.392000	25.2	9.000	Off	L1	9.7	20.8	46.0
1.432000	27.7	9.000	Off	L1	9.7	18.3	46.0
1.436000	27.4	9.000	Off	L1	9.7	18.6	46.0
1.440000	26.3	9.000	Off	L1	9.7	19.7	46.0
1.444000	24.8	9.000	Off	L1	9.7	21.2	46.0
6.446000	25.8	9.000	Off	L1	9.9	24.2	50.0
6.696000	26.2	9.000	Off	L1	9.9	23.8	50.0
6.842000	26.5	9.000	Off	L1	9.9	23.5	50.0
6.846000	26.6	9.000	Off	L1	9.9	23.4	50.0
7.330000	26.2	9.000	Off	L1	9.9	23.8	50.0
7.446000	26.2	9.000	Off	L1	10.0	23.8	50.0

2016-03-10

오전 9:06:21

Terminate the Antenna Conducted Emissions (Line 1)

Test


1 / 2

HCT TEST Report

Common Information

EUT: LG-K580
Manufacturer: LG
Test Site: SHIELD ROOM
Operating Conditions: NFC MODE _ TERMINATION
Operator Name: SK LEE

FCC CLASS B

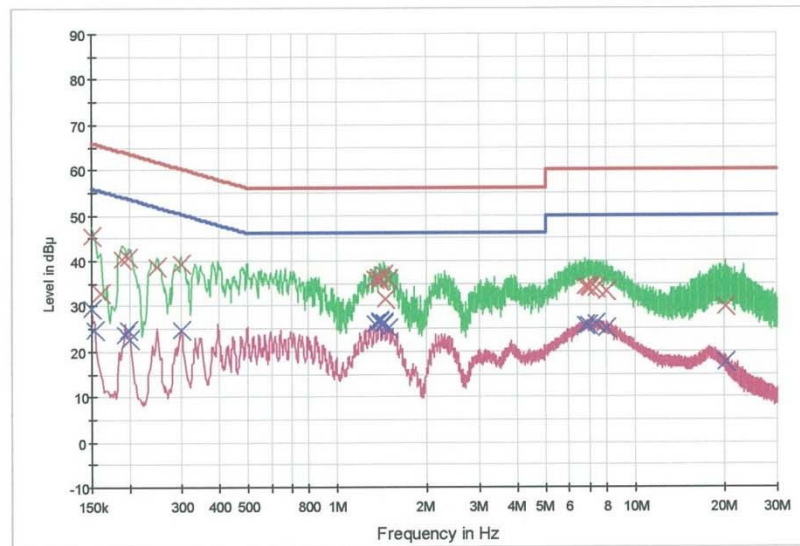

— FCC CLASS B_QP — FCC CLASS B_AV — Preview/Result 1-PK+
— Preview Result 2-AVG × Final Result 1-QPK × Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	45.3	9.000	Off	N	9.6	20.7	66.0
0.160000	32.7	9.000	Off	N	9.6	32.7	65.5
0.190000	40.4	9.000	Off	N	9.6	23.6	64.0
0.198000	40.8	9.000	Off	N	9.6	22.9	63.7
0.248000	38.6	9.000	Off	N	9.6	23.2	61.8
0.298000	39.3	9.000	Off	N	9.6	21.0	60.3
1.340000	35.9	9.000	Off	N	9.7	20.1	56.0
1.388000	36.2	9.000	Off	N	9.7	19.8	56.0
1.392000	35.7	9.000	Off	N	9.7	20.3	56.0
1.440000	37.1	9.000	Off	N	9.7	18.9	56.0
1.458000	31.5	9.000	Off	N	9.7	24.5	56.0
1.490000	35.8	9.000	Off	N	9.7	20.2	56.0
6.796000	34.2	9.000	Off	N	9.9	25.8	60.0
6.946000	34.3	9.000	Off	N	9.9	25.7	60.0
7.032000	33.7	9.000	Off	N	9.9	26.3	60.0
7.334000	34.0	9.000	Off	N	9.9	26.0	60.0
8.036000	33.1	9.000	Off	N	9.9	26.9	60.0
20.136000	29.8	9.000	Off	N	10.3	30.2	60.0

2016-03-10

오전 9:18:52

Test

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	29.6	9.000	Off	N	9.6	26.4	56.0
0.154000	24.6	9.000	Off	N	9.6	31.2	55.8
0.194000	23.6	9.000	Off	N	9.6	30.2	53.9
0.198000	24.5	9.000	Off	N	9.6	29.2	53.7
0.202000	22.5	9.000	Off	N	9.6	31.0	53.5
0.298000	24.8	9.000	Off	N	9.6	25.5	50.3
1.340000	26.1	9.000	Off	N	9.7	19.9	46.0
1.386000	26.6	9.000	Off	N	9.7	19.4	46.0
1.390000	26.3	9.000	Off	N	9.7	19.7	46.0
1.436000	26.4	9.000	Off	N	9.7	19.6	46.0
1.440000	26.1	9.000	Off	N	9.7	20.0	46.0
1.490000	24.9	9.000	Off	N	9.7	21.1	46.0
6.796000	25.8	9.000	Off	N	9.9	24.2	50.0
6.800000	25.7	9.000	Off	N	9.9	24.3	50.0
6.946000	25.9	9.000	Off	N	9.9	24.1	50.0
7.334000	25.9	9.000	Off	N	9.9	24.1	50.0
8.036000	25.1	9.000	Off	N	9.9	24.9	50.0
20.136000	17.4	9.000	Off	N	10.3	32.6	50.0

2016-03-10

오전 9:18:52

Conducted Emissions (Line 2)

Test


1 / 2

HCT TEST Report

Common Information

EUT: LG-K580
 Manufacturer: LG
 Test Site: SHIELD ROOM
 Operating Conditions: NFC MODE _ TERMINATION
 Operator Name: SK LEE

FCC CLASS B

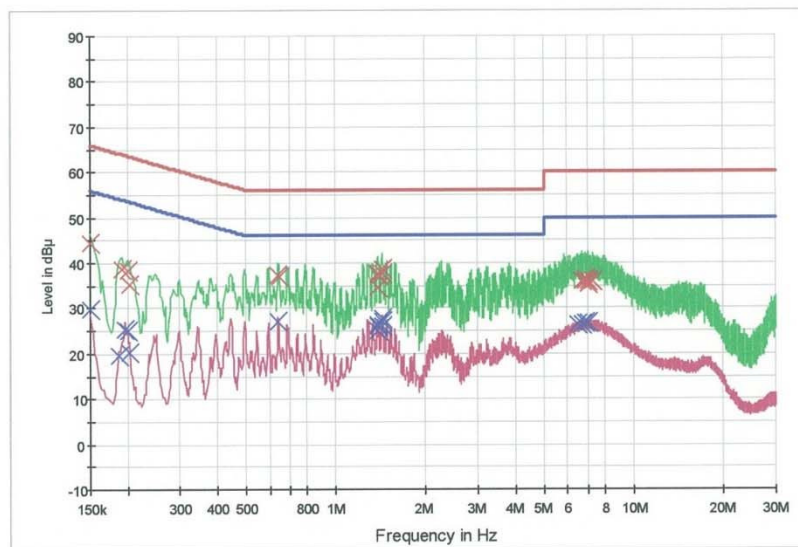

— FCC CLASS B_QP — FCC CLASS B_AV — Preview Result 1-PK+
 — Preview Result 2-AVG × Final Result 1-QPK × Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	44.6	9.000	Off	L1	9.7	21.4	66.0
0.192000	38.6	9.000	Off	L1	9.6	25.4	63.9
0.200000	38.3	9.000	Off	L1	9.6	25.3	63.6
0.204000	35.2	9.000	Off	L1	9.6	28.3	63.4
0.640000	37.3	9.000	Off	L1	9.7	18.7	56.0
0.644000	37.0	9.000	Off	L1	9.7	19.0	56.0
1.378000	37.6	9.000	Off	L1	9.7	18.4	56.0
1.388000	37.2	9.000	Off	L1	9.7	18.8	56.0
1.392000	34.4	9.000	Off	L1	9.7	21.6	56.0
1.426000	37.8	9.000	Off	L1	9.7	18.2	56.0
1.430000	38.7	9.000	Off	L1	9.7	17.3	56.0
1.434000	38.7	9.000	Off	L1	9.7	17.3	56.0
6.694000	35.9	9.000	Off	L1	9.9	24.1	60.0
6.842000	36.1	9.000	Off	L1	9.9	23.9	60.0
6.892000	35.8	9.000	Off	L1	9.9	24.2	60.0
7.042000	35.1	9.000	Off	L1	9.9	24.9	60.0
7.062000	35.9	9.000	Off	L1	9.9	24.1	60.0
7.262000	35.9	9.000	Off	L1	9.9	24.1	60.0

2016-03-10

오전 9:28:34

Test

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	29.7	9.000	Off	L1	9.7	26.3	56.0
0.188000	19.6	9.000	Off	L1	9.6	34.5	54.1
0.196000	25.4	9.000	Off	L1	9.6	28.4	53.8
0.200000	25.0	9.000	Off	L1	9.6	28.7	53.6
0.204000	20.1	9.000	Off	L1	9.6	33.3	53.4
0.642000	27.1	9.000	Off	L1	9.7	18.9	46.0
1.378000	26.1	9.000	Off	L1	9.7	19.9	46.0
1.386000	26.4	9.000	Off	L1	9.7	19.6	46.0
1.390000	25.2	9.000	Off	L1	9.7	20.8	46.0
1.430000	27.7	9.000	Off	L1	9.7	18.3	46.0
1.434000	27.1	9.000	Off	L1	9.7	18.9	46.0
1.438000	26.0	9.000	Off	L1	9.7	20.0	46.0
6.446000	26.2	9.000	Off	L1	9.9	23.8	50.0
6.694000	26.3	9.000	Off	L1	9.9	23.7	50.0
6.842000	26.7	9.000	Off	L1	9.9	23.3	50.0
6.892000	26.6	9.000	Off	L1	9.9	23.4	50.0
7.014000	26.8	9.000	Off	L1	9.9	23.2	50.0
7.042000	26.6	9.000	Off	L1	9.9	23.4	50.0

2016-03-10

오전 9:28:34

13. LIST OF TEST EQUIPMENT

13.1 LIST OF TEST EQUIPMENT(Conducted Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216/ LISN	12/28/2015	Annual	100073
Rohde & Schwarz	ESCI / TEST RECEIVER	12/28/2015	Annual	100584
Agilent	E4440A/ Spectrum Analyzer	03/18/2015	Annual	US45303008
Agilent	N9020A / SIGNAL ANALYZER	06/30/2015	Annual	MY51110085
Agilent	N9030A / SIGNAL ANALYZER	11/24/2015	Annual	MY49431210
Agilent	N1911A/Power Meter	07/09/2015	Annual	MY45100523
Agilent	N1921A /POWER SENSOR	07/09/2015	Annual	MY45241059
Agilent	87300B/Directional Coupler	11/30/2015	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	06/15/2015	Annual	5001
Hewlett Packard	E3632A / DC POWER SUPPLY	03/11/2015	Annual	KR75303962
Agilent	8493C / Attenuator(10 dB)	07/21/2015	Annual	07560
ESPAC.	SH-642 / Temp & Humidity Chamber	07/23/2015	Annual	93000717

13.2 LIST OF TEST EQUIPMENT(Radiated Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Schwarzbeck	VULB 9160/ TRILOG Antenna	10/10/2014	Biennial	3368
HD	MA240/ Antenna Position Tower	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	13
CERNEX	CBL18265035 / POWER AMP	07/27/2015	Annual	22966
Schwarzbeck	BBHA 9120D/ Horn Antenna	05/07/2015	Biennial	937
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	04/30/2015	Biennial	BBHA9170124
Rohde & Schwarz	FSP / Spectrum Analyzer	01/15/2016	Annual	839117/011
Rohde & Schwarz	LOOP ANTENNA	02/04/2016	Biennial	100179
CERNEX	CBL06185030 / POWER AMP	07/21/2015	Annual	22965
CERNEX	CBLU1183540 / POWER AMP	07/21/2015	Annual	22964