

EMI TEST REPORT

FCC CERTIFICATION

Applicant:

LG Electronics MobileComm U.S.A., Inc.
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Date of Receipt: September 27, 2016**Date of Issue: September 29, 2016****Test Report No. HCT-E-1609-F008****HCT FRN: 0005866421****FCC ID :****ZNFKTH**

Rule Part(s) / Standard(s): FCC CFR 47 PART 15 Subpart B Class B
FCC Classification: JBP (Part 15 B – Class B Computing Device Peripheral)
EUT Type: GSM/WCDMA/LTE Phone with WLAN, Bluetooth and NFC
Model Name: LGV34
Test Port: Micro USB / Earphone Port
Date of Test: September 28, 2016

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2014. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

Tested By

Jea-Woong Lee
Test Engineer
EMC Team
Certification Division

Reviewed By

Jin-Pyo Hong
Technical Manager
EMC Team
Certification Division

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.



DOCUMENT HISTORY

The revision history for this document is shown in table.

Version	Date	Description
HCT-E-1609-F008	September 29, 2016	Initial Release



TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION	4
1.1 Description of EUT	4
1.2 Related Submittal(s) / Grant(s).....	4
1.3 Test Facility	5
1.4 Calibration of Measuring Instrument	5
1.5 Tested System Details.....	6
1.6 Cable Description.....	7
1.7 Noise Suppression Parts on Cable. (I/O Cable)	7
2. MEASUREMENT UNCERTAINTY	8
3. DESCRIPTION OF TEST	9
3.1 Measurement of Conducted Emission.....	9
3.2 Measurement of Radiated Measurements	10
4. PRELIMINARY TEST	12
4.1 Conducted Emission Test	12
4. 2 Radiated Emission Test	12
5. CONDUCTED AND RADIATED EMISSION TEST SUMMARY	13
5.1 Conducted Emission Test	13
5.2 Radiated Emission Test	20
6. LIST OF TEST EQUIPMENT	22
7. CONCLUSION	23

ATTACHMENT: TEST SETUP PHOTOGRAPHS



1. GENERAL INFORMATION

1.1 Description of EUT

Equipment Under Test is manufactured by **LG Electronics MobileComm U.S.A., Inc.**
Its basic purpose is used for communications.

FCC ID	ZNFKTH
Model	LGV34
EUT Type	GSM/WCDMA/LTE Phone with WLAN, Bluetooth and NFC
HW Version	Rev.B
SW Version	KTH08b
TX Frequency	824.20 MHz to 848.80 MHz (GSM 850) 1 850.20 MHz to 1 909.80 MHz (GSM 1 900) 826.40 MHz to 846.60 MHz (WCDMA 850) 824 MHz to 849 MHz (LTE B5) 777 MHz to 787 MHz (LTE B13) 704 MHz to 716 MHz (LTE B17)
RX Frequency	869.20 MHz to 893.80 MHz (GSM 850) 1 930.20 MHz to 1 989.80 MHz (GSM 1 900) 871.40 MHz to 891.60 MHz (WCDMA 850) 869 MHz to 894 MHz (LTE B5) 746 MHz to 756 MHz (LTE B13) 734 MHz to 746 MHz (LTE B17)

1.2 Related Submittal(s) / Grant(s)

Original submittal only.



1.3 Test Facility

Test site is located at 74, SEOICHEON-RO, 578BEON-GIL, MAJANG-MYEON, ICHEON-SI, GYEONGGI-DO, SOUTH KOREA. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4-2014.

Measurement Facilities	Registration Number
Radiated Field strength measurement facility (3 m)	90661 (July 07, 2015)
Radiated Field strength measurement facility (10 m)	90661 (July 07, 2015)

1.4 Calibration of Measuring Instrument

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturers recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2006).



1.5 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Model Name	Manufacturer	FCC ID / DoC	Connected To
EUT	LGV34	LG	ZNFKTH	Notebook PC, Earphone
USB cable	EAD63849201	Ningbo Broad	-	EUT, Notebook PC
Earphone	SGEY0007610	I-SOUND	-	EUT
Notebook PC	ProBook6560b	HP	DoC	EUT, Notebook PC adaptor, RJ45 cable, Serial mouse
Notebook PC adaptor	Series PPP009L-E	LITE-ON TECHNOLOGY	-	Notebook PC
Gateway	TL-WR747N	TP-LINK	-	RJ45 cable, Gateway adaptor
Gateway adaptor	T120150-2H1	TP-LINK	-	Gateway
Serial mouse	Serial 2 button mouse	Radio shack	FSUGMZE3	Notebook PC
RJ45 cable	-	-	-	Notebook PC, Gateway
SD card	16 GB	SAMSUNG	-	EUT



1.6 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
EUT	Micro USB	Y	Y	(P,D)1.0
	Earphone	N/A	Y	(D)1.2
Notebook PC	RJ 45	N/A	N	(D)2.5
	Serial (Mouse)	N/A	Y	(D)1.8
	DC in	N	N/A	(P)1.8
Gateway	DC in	N	N/A	(P)1.8

* The marked “(D)” means the data cable and “(P)” means the power cable.

1.7 Noise Suppression Parts on Cable. (I/O Cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
EUT	Micro USB	N	N/A	Y	Both End
	Earphone	N	N/A	Y	Both End
Notebook PC	RJ 45	N	N/A	N	N/A
	Serial (Mouse)	N	N/A	Y	Notebook PC End



2. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Emission (0.15 MHz to 30 MHz)	$\pm 1.82 \text{ dB } (k = 2)$
Radiated Emissions (30 MHz to 1 GHz)	$\pm 5.06 \text{ dB } (k = 2)$
Radiated Emissions (1 GHz to 6 GHz)	$\pm 5.0 \text{ dB } (k = 2)$
Radiated Emissions (6 GHz to 18 GHz)	$\pm 5.4 \text{ dB } (k = 2)$



3. DESCRIPTION OF TEST

3.1 Measurement of Conducted Emission

The test procedure was in accordance with ANSI C63.4-2014, Clause 7.3

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN).
If the EUT is connected to the PC through USB, the AC power-line adapter of the PC is directly connected to a line impedance stabilization network (LISN).
Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50μH of coupling impedance for the measuring instrument.
- b. Both conducted lines are measured in Quasi-Peak and Average mode, including the worst-case data points for each tested configuration.
- c. The frequency range from 150 kHz to 30 MHz was searched.

[Conducted Emission Limits]

Frequency (MHz)	Resolution Bandwidth (kHz)	Quasi-Peak (dB(μV))	Average (dB(μV))
0.15 to 0.5	9	66 to 56*	56 to 46*
0.5 to 5	9	56	46
5 to 30	9	60	50

**Decreases with the logarithm of the frequency.*



3.2 Measurement of Radiated Emission

The test procedure was in accordance with ANSI C63.4-2014, Clause 8.3

- The EUT was placed on the top of a turn table 0.8 meters above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 m away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from 1 m to 4 m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 m to 4 m and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- The test-receiver system was set to Peak and Average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.(1 GHz to 40 GHz)

[Radiated Emission Limits]

Frequency (MHz)	Antenna Distance (m)	Field Strength ($\mu\text{V}/\text{m}$)	Quasi-Peak ($\text{dB}(\mu\text{V})/\text{m}$)
30 to 88	3	100	40.0
88 to 216	3	150	43.5
216 to 960	3	200	46.0
Above 960	3	500	54.0
Frequency (MHz)	Antenna Distance (m)	Peak ($\text{dB}(\mu\text{V})/\text{m}$)	Average ($\text{dB}(\mu\text{V})/\text{m}$)
Above 1 000	3	74	54

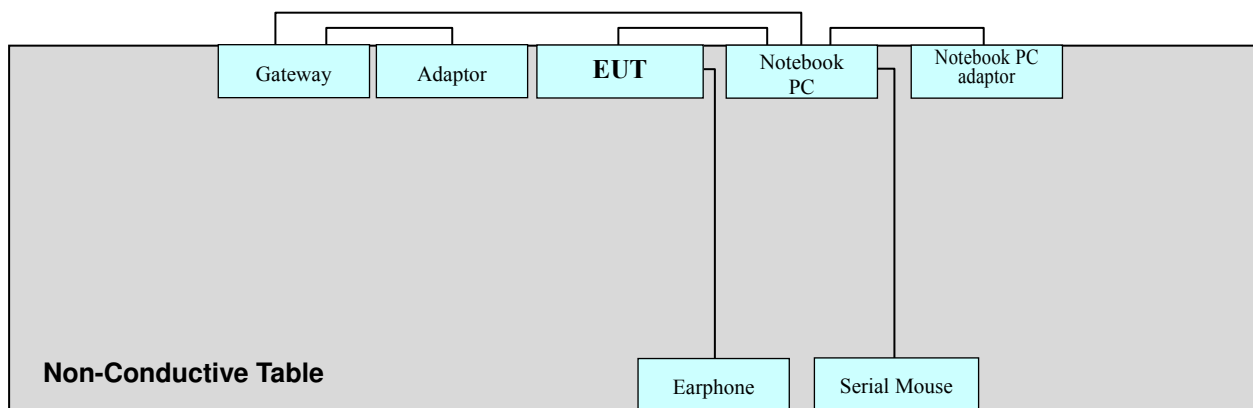


3.2.1 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

3.3 Configuration of Tested System



Power Line: 120 VAC, 60 Hz



4. PRELIMINARY TEST

4.1 Conducted Emission Test

It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode: ☒ Data Communication mode

4. 2 Radiated Emission Test

It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode: ☒ Data Communication mode



5. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

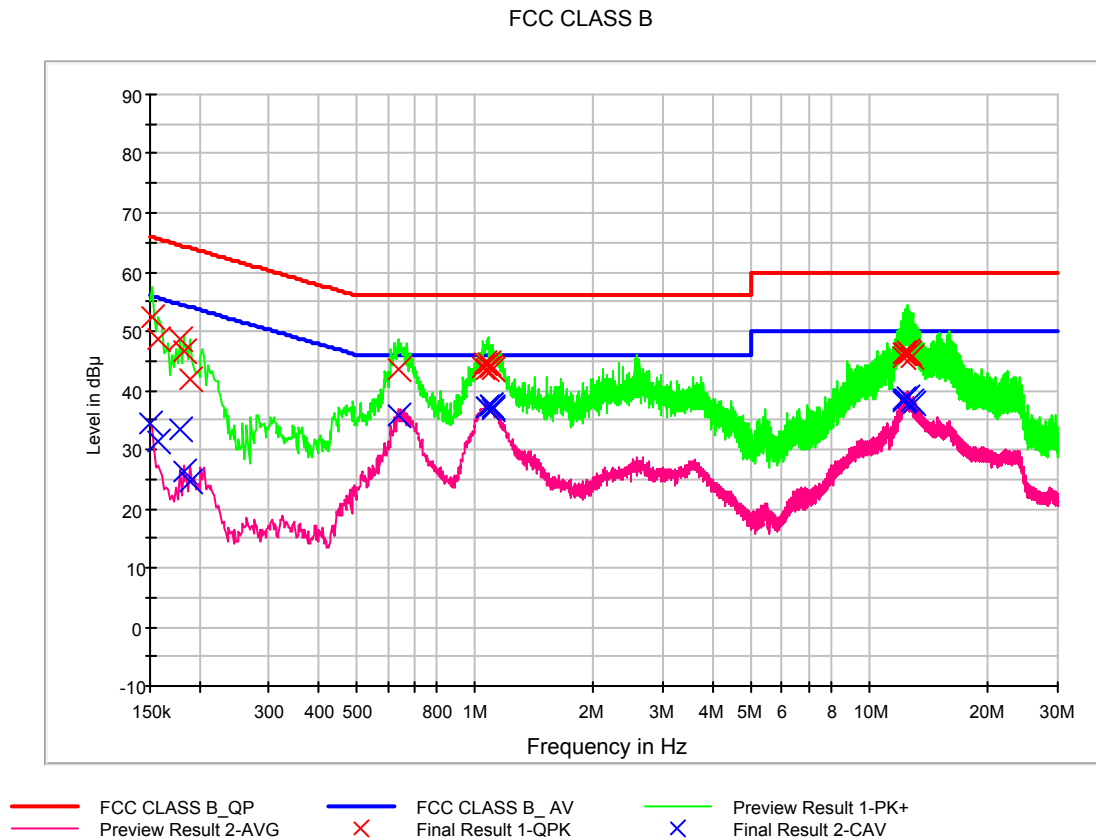
5.1 Conducted Emission Test

The test results of conducted emission at mains ports provide the following information:

Rule Part / Standard	FCC PART 15 Subpart B Class B
Detector	Quasi-Peak, CISPR-Average
Bandwidth	9 kHz (6 dB)
Operation Mode	Data Communication mode
Kind of Test Site	Shielded Room
Temperature	24.9 °C
Relative Humidity	47.7 %
Test Date	September 28, 2016

- Calculation Formula:

1. Conductor L1 = Hot, Conductor N = Neutral
2. Corr. = LISN Factor + Cable Loss
3. QuasiPeak or CAverage= Receiver Reading + Corr.
4. Margin = Limit – QuasiPeak or CAverage

**Figure 1: Spectral Diagrams, Conducted Emission, AC Main Port, Line (L1)**



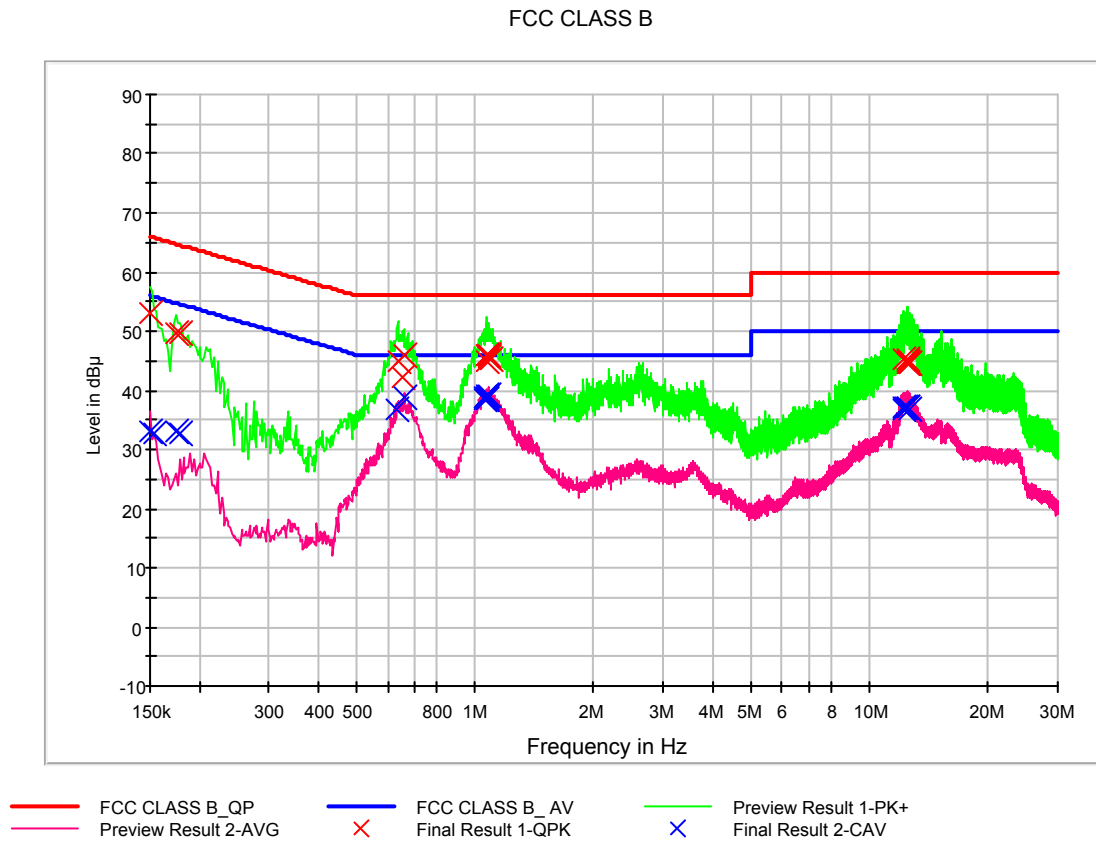
QuasiPeak Final Result, Line (L1)

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.152000	52.2	9.000	L1	9.7	13.7	65.9
0.158000	48.5	9.000	L1	9.7	17.1	65.6
0.178000	48.6	9.000	L1	9.7	16.0	64.6
0.182000	46.6	9.000	L1	9.7	17.8	64.4
0.190000	41.8	9.000	L1	9.7	22.2	64.0
0.636000	43.4	9.000	L1	9.7	12.6	56.0
1.050000	43.8	9.000	L1	9.8	12.2	56.0
1.060000	44.6	9.000	L1	9.8	11.4	56.0
1.068000	43.7	9.000	L1	9.8	12.3	56.0
1.078000	44.5	9.000	L1	9.8	11.5	56.0
1.090000	43.9	9.000	L1	9.8	12.1	56.0
1.104000	43.5	9.000	L1	9.8	12.5	56.0
12.180000	45.8	9.000	L1	10.1	14.2	60.0
12.252000	46.3	9.000	L1	10.1	13.7	60.0
12.306000	46.3	9.000	L1	10.1	13.7	60.0
12.462000	46.5	9.000	L1	10.1	13.5	60.0
12.606000	46.3	9.000	L1	10.1	13.7	60.0
12.728000	45.5	9.000	L1	10.2	14.5	60.0



CAverage Final Result, Line (L1)

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	34.2	9.000	L1	9.7	21.8	56.0
0.158000	31.4	9.000	L1	9.7	24.1	55.6
0.178000	33.3	9.000	L1	9.7	21.3	54.6
0.182000	26.2	9.000	L1	9.7	28.1	54.4
0.190000	24.5	9.000	L1	9.7	29.6	54.0
0.638000	35.9	9.000	L1	9.7	10.1	46.0
1.068000	37.1	9.000	L1	9.8	8.9	46.0
1.076000	37.1	9.000	L1	9.8	8.9	46.0
1.090000	37.3	9.000	L1	9.8	8.7	46.0
1.098000	37.4	9.000	L1	9.8	8.6	46.0
1.104000	36.6	9.000	L1	9.8	9.4	46.0
1.108000	37.0	9.000	L1	9.8	9.0	46.0
12.180000	38.2	9.000	L1	10.1	11.8	50.0
12.252000	38.5	9.000	L1	10.1	11.5	50.0
12.306000	38.5	9.000	L1	10.1	11.5	50.0
12.522000	38.7	9.000	L1	10.1	11.3	50.0
12.728000	38.1	9.000	L1	10.2	11.9	50.0
12.850000	37.6	9.000	L1	10.2	12.4	50.0

**Figure 2: Spectral Diagrams, Conducted Emission, AC Main Port, Line (N)**



QuasiPeak Final Result, Line (N)

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	52.9	9.000	N	9.7	13.1	66.0
0.174000	49.6	9.000	N	9.7	15.1	64.8
0.178000	49.6	9.000	N	9.7	15.0	64.6
0.636000	44.9	9.000	N	9.7	11.1	56.0
0.656000	42.0	9.000	N	9.7	14.0	56.0
0.660000	45.9	9.000	N	9.7	10.1	56.0
1.068000	45.8	9.000	N	9.7	10.2	56.0
1.072000	44.9	9.000	N	9.7	11.1	56.0
1.076000	46.0	9.000	N	9.7	10.0	56.0
1.082000	45.5	9.000	N	9.7	10.5	56.0
1.086000	45.9	9.000	N	9.7	10.1	56.0
1.090000	45.2	9.000	N	9.7	10.8	56.0
12.218000	45.1	9.000	N	10.1	14.9	60.0
12.418000	44.9	9.000	N	10.1	15.1	60.0
12.496000	45.3	9.000	N	10.1	14.7	60.0
12.504000	44.7	9.000	N	10.1	15.3	60.0
12.568000	44.6	9.000	N	10.1	15.4	60.0
12.574000	44.7	9.000	N	10.1	15.3	60.0



CAverage Final Result, Line (N)

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	33.1	9.000	N	9.7	22.9	56.0
0.154000	32.8	9.000	N	9.7	23.0	55.8
0.174000	33.2	9.000	N	9.7	21.6	54.8
0.178000	32.8	9.000	N	9.7	21.8	54.6
0.634000	36.9	9.000	N	9.7	9.1	46.0
0.662000	38.9	9.000	N	9.7	7.1	46.0
1.056000	38.8	9.000	N	9.7	7.2	46.0
1.060000	38.6	9.000	N	9.7	7.4	46.0
1.068000	38.6	9.000	N	9.7	7.4	46.0
1.072000	38.7	9.000	N	9.7	7.3	46.0
1.076000	39.2	9.000	N	9.7	6.8	46.0
1.080000	39.0	9.000	N	9.7	7.0	46.0
12.160000	36.7	9.000	N	10.1	13.3	50.0
12.218000	37.2	9.000	N	10.1	12.8	50.0
12.352000	37.1	9.000	N	10.1	12.9	50.0
12.418000	37.1	9.000	N	10.1	12.9	50.0
12.496000	37.0	9.000	N	10.1	13.0	50.0
12.568000	36.8	9.000	N	10.1	13.2	50.0



5.2 Radiated Emission Test

The test results of radiated emission provide the following information:

-For Measurement Below 1 GHz

Rule Part / Standard	FCC PART 15 Subpart B Class B
Detector	Quasi-Peak
Bandwidth	120 kHz (6 dB)
Operation Mode	Data Communication mode
Kind of Test Site	3 m semi anechoic chamber
Temperature	23.3 °C
Relative Humidity	55.7 %
Test Date	September 28, 2016

Frequency (MHz)	Quasi Peak (dBuV/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)
34.887776	24.7	116.0	V	109.0	21.8	15.3	40.0
58.798317	31.6	400.0	H	143.0	22.5	8.4	40.0
63.486092	35.7	400.0	H	0.0	22.0	4.3	40.0
66.413868	27.4	150.0	H	0.0	21.6	12.6	40.0
240.339880	31.4	166.0	H	15.0	21.7	14.6	46.0
265.570421	32.0	100.0	H	131.0	22.6	14.0	46.0

- Calculation Formula:

1. POL. H = Horizontal, POL. V = Vertical
2. QuasiPeak = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor + Cable Loss
4. Margin = Limit - QuasiPeak



-For Measurement Above 1 GHz

Rule Part / Standard	FCC PART 15 Subpart B Class B
Detector	Peak mode: Peak (RBW: 1 MHz, VBW: 3 MHz) CISPR-Average mode: Peak (RBW: 1 MHz, VBW: 10 Hz)
Highest Operating Frequency	2.15 GHz
Testing Frequency Range	1 GHz to 10.75 GHz
Operation Mode	Data Communication mode
Kind of Test Site	3 m semi anechoic chamber
Temperature	23.3 °C
Relative Humidity	55.7 %
Test Date	September 28, 2016

Frequency (MHz)	Peak (dBμV/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1400.050100	48.6	363.0	V	44.0	-8.9	25.4	74.0
1998.246493	48.9	363.0	V	193.0	-8.4	25.1	74.0
2592.535070	49.8	362.8	V	208.0	-5.4	24.2	74.0
4103.156313	46.6	349.8	V	265.0	-2.1	27.4	74.0
4894.438878	50.1	150.1	H	12.0	0.7	23.9	74.0
5980.770559	51.6	363.0	V	263.0	3.7	22.4	74.0

Frequency (MHz)	CAverage (dBμV/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1400.050100	45.6	363.0	V	44.0	-8.9	8.4	54.0
1998.246493	31.4	363.0	V	193.0	-8.4	22.6	54.0
2592.535070	32.7	362.8	V	208.0	-5.4	21.3	54.0
4103.156313	33.7	349.8	V	265.0	-2.1	20.3	54.0
4894.438878	37.2	150.1	H	12.0	0.7	16.8	54.0
5980.770559	39.2	363.0	V	263.0	3.7	14.8	54.0

- Calculation Formula:

1. POL. H = Horizontal, POL. V = Vertical
2. Peak or CAverage = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor+ Cable Loss –Amplifier Gain
4. Margin = Limit - Peak or CAverage



6. LIST OF TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model Name</u>	<u>Serial Number</u>	<u>Calibration Cycle</u>	<u>CAL Date</u>
<u>Conducted Emission</u>					
☒ EMI Test Receiver	Rohde & Schwarz	ESCI	100584	1 year	12.28.2015
☒ LISN	Rohde & Schwarz	ESH3-Z5	100282	1 year	06.09.2016
☒ LISN	Rohde & Schwarz	ENV216	100073	1 year	12.28.2015
☒ Software	Rohde & Schwarz	EMC32	-	-	-

Radiated Emission

-For measurement below 1 GHz

☒ EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	1 year	03.30.2016
☐ Trilog Antenna	Schwarzbeck	VULB9160	3301	2 year	11.17.2014
☒ Trilog Antenna	Schwarzbeck	VULB9168	255	2 year	04.15.2015
☒ 6dB Attenuator	HP	8491A	24257	2 year	04.15.2015
☒ Antenna master	HD GmbH	MA240	240/520	N/A	-
☒ Antenna master controller	HD GmbH	HD 100	100/637	N/A	-
☒ Turn Table	EMCO	1060-2M	-	N/A	-
☒ Turn Table controller	EMCO	2090	9702-1224	N/A	-
☐ EMI Test Receiver	Rohde & Schwarz	ESU 26	100241	1 year	05.27.2016
☐ Antenna master	INNCO Systems	MA4000-EP	MA4000/283	N/A	-
☐ Turn Table	INNCO Systems	DT3000-3T	DT3000/69	N/A	-
☒ Software	Rohde & Schwarz	EMC32	-	-	-

-For measurement above 1 GHz

☒ EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	1 year	03.30.2016
☐ Antenna master	HD GmbH	MA240	240/520	N/A	-
☐ Antenna master controller	HD GmbH	HD 100	100/637	N/A	-
☒ Antenna master	INNCO Systems	MA4000-XP-ET	48709515	N/A	-
☒ Antenna master controller	INNCO Systems	CO 3000	CO 3000/870/ 35990515	N/A	-
☒ Turn Table	EMCO	1060-2M	-	N/A	-
☒ Turn Table controller	EMCO	2090	9702-1224	N/A	-
☐ Power Amplifier	CERNEX	CBLU1183540	21691	1 year	07.04.2016
☒ Power Amplifier	CERNEX	CBLU5183530	24348	1 year	06.07.2016
☒ Horn Antenna	Schwarzbeck	BBHA 9120D	296	2 year	10.07.2014
☐ EMI Test Receiver	Rohde & Schwarz	ESU 26	100241	1 year	05.27.2016
☐ Turn Table	INNCO Systems	DT3000-3T	DT3000/69	N/A	-
☒ Software	Rohde & Schwarz	EMC32	-	-	-



7. CONCLUSION

The data collected shows that the **EUT Type: GSM/WCDMA/LTE Phone with WLAN, Bluetooth and NFC, Model: LGV34, FCC ID: ZNFKTH** complies with §15.107 and §15.109 of the FCC rules.