



# PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.290.6654

<http://www.pctestlab.com>



## MEASUREMENT REPORT FCC Part 15.247 WLAN 802.11b/g/n

**Applicant Name:**

LG Electronics MobileComm U.S.A  
1000 Sylvan Avenue  
Englewood Cliffs, NJ 07632  
United States

**Date of Testing:**

1/15 - 1/23/2015

**Test Site/Location:**

PCTEST Lab, Columbia, MD, USA

**Test Report Serial No.:**

0Y1501210196.ZNF

**FCC ID:**

**ZNFLK430**

**APPLICANT:**

**LG Electronics MobileComm U.S.A**

**Application Type:**

Class II Permissive Change

**Model(s):**

LG-LK430, LGLK430, LK430, LK-430

**EUT Type:**

Portable Tablet

**FCC Classification:**

Digital Transmission System (DTS)

**FCC Rule Part(s):**

Part 15.247

**Test Procedure(s):**

KDB 558074 v03r02

**Class II Permissive Change:**

Please see FCC change document

**Original Grant Date:**

1/14/2015

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 558074 v03r02. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

  
Randy Ortanez  
President



|                                             |                                                                                     |                                                                                       |                                                                                       |                                        |
|---------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> ZNFLK430                     |  | <b>FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b> |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>0Y1501210196.ZNF | <b>Test Dates:</b><br>1/15 - 1/23/2015                                              | <b>EUT Type:</b><br>Portable Tablet                                                   |                                                                                       | Page 1 of 26                           |

## T A B L E O F C O N T E N T S

|                                                               |    |
|---------------------------------------------------------------|----|
| FCC PART 15.247 MEASUREMENT REPORT .....                      | 3  |
| 1.0 INTRODUCTION.....                                         | 4  |
| 1.1 SCOPE.....                                                | 4  |
| 1.2 PCTEST TEST LOCATION.....                                 | 4  |
| 2.0 PRODUCT INFORMATION .....                                 | 5  |
| 2.1 EQUIPMENT DESCRIPTION.....                                | 5  |
| 2.2 DEVICE CAPABILITIES .....                                 | 5  |
| 2.3 TEST CONFIGURATION .....                                  | 5  |
| 2.4 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS.....              | 5  |
| 3.0 DESCRIPTION OF TEST .....                                 | 6  |
| 3.1 EVALUATION PROCEDURE.....                                 | 6  |
| 3.2 RADIATED EMISSIONS .....                                  | 6  |
| 3.3 ENVIRONMENTAL CONDITIONS .....                            | 6  |
| 4.0 ANTENNA REQUIREMENTS .....                                | 7  |
| 5.0 TEST EQUIPMENT CALIBRATION DATA.....                      | 8  |
| 6.0 TEST RESULTS .....                                        | 9  |
| 6.1 SUMMARY .....                                             | 9  |
| 6.2 RADIATED SPURIOUS EMISSION MEASUREMENTS ABOVE 1 GHZ ..... | 10 |
| 6.3 RADIATED RESTRICTED BAND EDGE MEASUREMENTS .....          | 19 |
| 6.4 RADIATED SPURIOUS EMISSIONS MEASUREMENTS BELOW 1GHZ ..... | 23 |
| 7.0 CONCLUSION .....                                          | 26 |

|                                             |                                                                                     |                                                                                       |                                                                                       |                                        |
|---------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> ZNFLK430                     |  | <b>FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b> |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>0Y1501210196.ZNF | <b>Test Dates:</b><br>1/15 - 1/23/2015                                              | <b>EUT Type:</b><br>Portable Tablet                                                   | Page 2 of 26                                                                          |                                        |



# MEASUREMENT REPORT

## FCC Part 15.247



### § 2.1033 General Information

**APPLICANT:** LG Electronics MobileComm U.S.A

**APPLICANT ADDRESS:** 1000 Sylvan Avenue  
Englewood Cliffs, NJ 07632, United States

**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.

**TEST SITE ADDRESS:** 7185 Oakland Mills Road, Columbia, MD 21046 USA

**FCC RULE PART(S):** Part 15.247

**BASE MODEL:** LG-LK430, LGLK430, LK430, LK-430

**FCC ID:** ZNFLK430

**FCC CLASSIFICATION:** Digital Transmission System (DTS)

**Test Device Serial No.:** WIFI Rad, BT Rad ☐ Production ☒ Pre-Production ☐ Engineering

**DATE(S) OF TEST:** 1/15 - 1/23/2015

**TEST REPORT S/N:** 0Y1501210196.ZNF

### Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

|                                             |                                                                                     |                                                                                       |                                                                                       |                                        |
|---------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> ZNFLK430                     |  | <b>FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b> |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>0Y1501210196.ZNF | <b>Test Dates:</b><br>1/15 - 1/23/2015                                              | <b>EUT Type:</b><br>Portable Tablet                                                   |                                                                                       | Page 3 of 26                           |

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

### 1.2 PCTEST Test Location

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on February 15, 2012.

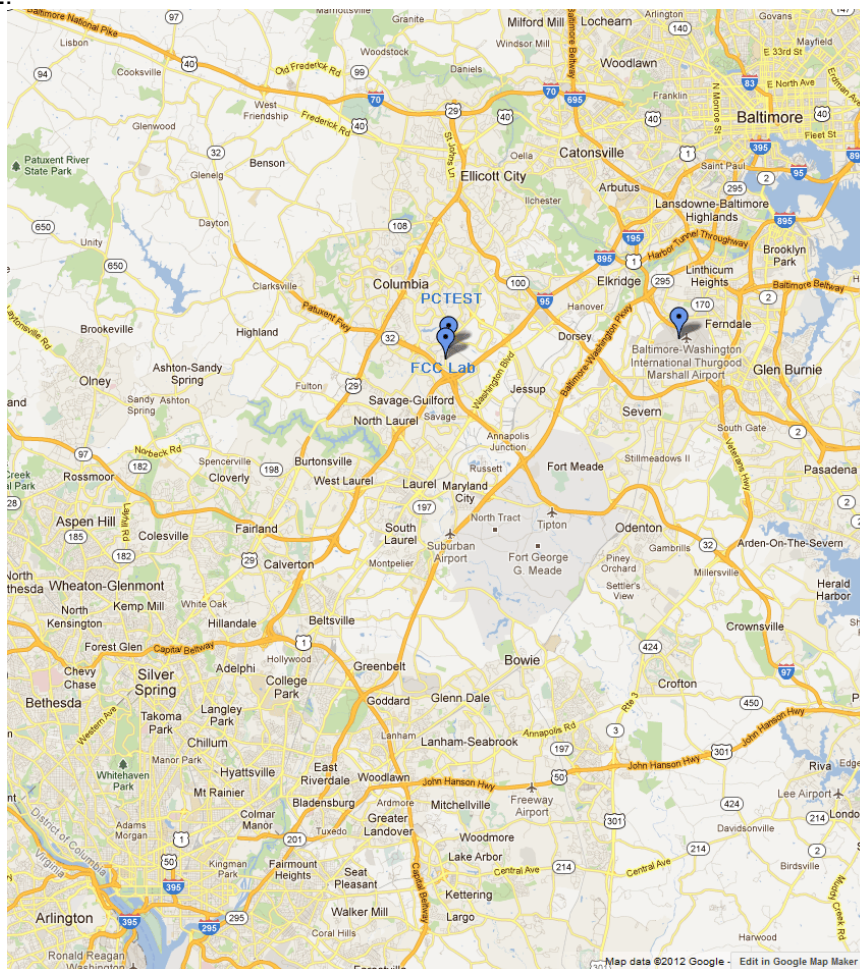


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

|                                      |                                                                                     |                                                                               |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFLK430                     |  | FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1501210196.ZNF | Test Dates:<br>1/15 - 1/23/2015                                                     | EUT Type:<br>Portable Tablet                                                  |                                                                                       | Page 4 of 26                    |

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Tablet FCC ID: ZNFLK430**. The test data contained in this report pertains only to the emissions due to the EUT's WLAN (DTS) transmitter.

### 2.2 Device Capabilities

This device contains the following capabilities:

Multi-band LTE, 802.11b/g/n WLAN, Bluetooth (1x, EDR, LE)

| Maximum Achievable Duty |   |                |
|-------------------------|---|----------------|
| 802.11 Mode/Band        |   | Duty Cycle [%] |
| 2.4GHz                  | b | 99.50          |
|                         | g | 97.16          |
|                         | n | 96.17          |

Data Rates Supported: 1Mbps, 2Mbps, 5.5Mbps, 11Mbps (b)  
6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps (g)  
6.5/7.2Mbps, 13/14.4Mbps, 19.5/21.7Mbps, 26/28.9Mbps, 39/43.3Mbps,  
52/57.8Mbps, 58.5/65Mbps, 65/72.2Mbps (n – 20MHz)

### 2.3 Test Configuration

The LG Portable Tablet FCC ID: ZNFLK430 was tested per the guidance of KDB 558074 v03r02. ANSI C63.10-2009 was used to reference the appropriate EUT setup for radiated spurious emissions testing. See Section 3.2 for radiated emissions test setups

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

|                                      |                                                                                     |                                                                               |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFLK430                     |  | FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1501210196.ZNF | Test Dates:<br>1/15 - 1/23/2015                                                     | EUT Type:<br>Portable Tablet                                                  |                                                                                       | Page 5 of 26                    |

## 3.0 DESCRIPTION OF TEST

### 3.1 Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2009), and the guidance provided in KDB 558074 v03r02 were used in the measurement of the **LG Portable Tablet FCC ID: ZNFLK430**.

Deviation from measurement procedure.....None

### 3.2 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Clause 5, Figure 5.7 of ANSI C63.4-2009. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A ¾" (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 0.8 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

### 3.3 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

|                                      |                                                                                     |                                                                               |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFLK430                     |  | FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1501210196.ZNF | Test Dates:<br>1/15 - 1/23/2015                                                     | EUT Type:<br>Portable Tablet                                                  |                                                                                       | Page 6 of 26                    |

## 4.0 ANTENNA REQUIREMENTS

### Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the Portable Tablet are **permanently attached**.
- There are no provisions for connections to an external antenna.

### Conclusion:

The **LG Portable Tablet FCC ID: ZNFLK430** unit complies with the requirement of §15.203.

| Ch. | Frequency (MHz) | Ch. | Frequency (MHz) |
|-----|-----------------|-----|-----------------|
| 1   | 2412            | 7   | 2442            |
| 2   | 2417            | 8   | 2447            |
| 3   | 2422            | 9   | 2452            |
| 4   | 2427            | 10  | 2457            |
| 5   | 2432            | 11  | 2462            |
| 6   | 2437            |     |                 |

**Table 4-1. Frequency/ Channel Operations**

|                                             |                                                                                     |                                                                                       |                                                                                       |                                        |
|---------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> ZNFLK430                     |  | <b>FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b> |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>0Y1501210196.ZNF | <b>Test Dates:</b><br>1/15 - 1/23/2015                                              | <b>EUT Type:</b><br>Portable Tablet                                                   |                                                                                       | Page 7 of 26                           |

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

| Manufacturer    | Model              | Description                            | Cal Date   | Cal Interval | Cal Due    | Serial Number |
|-----------------|--------------------|----------------------------------------|------------|--------------|------------|---------------|
| -               | RE1                | Radiated Emissions Cable Set (UHF/EHF) | 10/24/2014 | Annual       | 10/24/2015 | N/A           |
| -               | WL25-1             | Conducted Cable Set (25GHz)            | 10/14/2014 | Annual       | 10/14/2015 | N/A           |
| -               | WL40-1             | Conducted Cable Set (40GHz)            | 10/14/2014 | Annual       | 10/14/2015 | N/A           |
| Agilent         | 8447D              | Broadband Amplifier                    | 5/30/2014  | Annual       | 5/30/2015  | 2443A01900    |
| Agilent         | E4448A             | PSA (3Hz-50GHz) Spectrum Analyzer      | 4/16/2014  | Annual       | 4/16/2015  | US42510244    |
| Agilent         | N9038A             | MXE EMI Receiver                       | 3/3/2014   | Annual       | 3/3/2015   | MY51210133    |
| Agilent         | N9030A             | PXA Signal Analyzer (44GHz)            | 3/17/2014  | Annual       | 3/17/2015  | MY52350166    |
| Anritsu         | ML2495A            | Power Meter                            | 10/31/2013 | Biennial     | 10/31/2015 | 941001        |
| Anritsu         | MA2411B            | Pulse Sensor                           | 4/8/2014   | Biennial     | 4/8/2016   | 846215        |
| Com-Power       | AL-130             | 9kHz - 30MHz Loop Antenna              | 6/26/2013  | Biennial     | 6/26/2015  | 121034        |
| Emco            | 3115               | Horn Antenna (1-18GHz)                 | 1/30/2014  | Biennial     | 1/30/2016  | 9704-5182     |
| Emco            | 3816/2             | Line Impedance Stabilization Network   | 2/12/2013  | Biennial     | 2/12/2015  | 9707-1079     |
| Huber+Suhner    | Sucoflex 102A      | 40GHz Radiated Cable                   | 10/15/2014 | Annual       | 10/15/2015 | 251425001     |
| K & L           | 11SH10-3075/U18000 | High Pass Filter                       | 12/1/2014  | Annual       | 12/1/2015  | 2             |
| Pasternack      | NMLC-1             | Line Conducted Emissions Cable (NM)    | 10/17/2014 | Annual       | 10/17/2015 | N/A           |
| Rohde & Schwarz | TS-PR18            | 1-18 GHz Pre-Amplifier                 | 3/5/2014   | Annual       | 3/5/2015   | 100071        |
| Rohde & Schwarz | TS-PR26            | 18-26.5 GHz Pre-Amplifier              | 3/12/2014  | Annual       | 3/12/2015  | 100040        |
| Rohde & Schwarz | ESU26              | EMI Test Receiver (26.5GHz)            | 3/27/2014  | Annual       | 3/27/2015  | 100342        |
| Seekonk         | NC-100             | Torque Wrench 5/16", 8" lbs            | 3/18/2014  | Biennial     | 3/18/2016  | N/A           |
| Sunol           | JB5                | Bi-Log Antenna (30M - 5GHz)            | 1/28/2014  | Biennial     | 1/28/2016  | A051107       |

**Table 5-1. Annual Test Equipment Calibration Schedule**

|                                      |                                                                                     |                                                                               |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFLK430                     |  | FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1501210196.ZNF | Test Dates:<br>1/15 - 1/23/2015                                                     | EUT Type:<br>Portable Tablet                                                  |                                                                                       | Page 8 of 26                    |

## 6.0 TEST RESULTS

### 6.1 Summary

Company Name: LG Electronics MobileComm U.S.A  
 FCC ID: ZNFLK430  
 FCC Classification: Digital Transmission System (DTS)

| FCC Part Section(s)          | Test Description                                                              | Test Limit                                                                     | Test Condition | Test Result | Reference              |
|------------------------------|-------------------------------------------------------------------------------|--------------------------------------------------------------------------------|----------------|-------------|------------------------|
| <b>TRANSMITTER MODE (TX)</b> |                                                                               |                                                                                |                |             |                        |
| 15.205<br>15.209             | General Field Strength Limits (Restricted Bands and Radiated Emission Limits) | Emissions in restricted bands must meet the radiated limits detailed in 15.209 | RADIATED       | PASS        | Sections 6.2, 6.3, 6.4 |

**Table 6-1. Summary of Test Results**

#### Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.

|                                      |                                                                                     |                                                                               |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFLK430                     |  | FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1501210196.ZNF | Test Dates:<br>1/15 - 1/23/2015                                                     | EUT Type:<br>Portable Tablet                                                  | Page 9 of 26                                                                          |                                 |

## 6.2 Radiated Spurious Emission Measurements Above 1 GHz

§15.247(d) §15.205 & §15.209

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 6-2 per Section 15.209.***

| Frequency       | Field Strength<br>[ $\mu\text{V/m}$ ] | Measured Distance<br>[Meters] |
|-----------------|---------------------------------------|-------------------------------|
| Above 960.0 MHz | 500                                   | 3                             |

**Table 6-2. Radiated Limits**

### Test Procedures Used

KDB 558074 v03r02 – Section 12.1, 12.2.7

### Test Settings

#### Average Field Strength Measurements per Section 12.2.5.1 of KDB 558074 v03r02

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be  $\geq 2 \times \text{span/RBW}$ )
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces


#### Peak Field Strength Measurements per Section 12.2.4 of KDB 558074 v03r02

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

|                                      |                                                                                     |                                                                               |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFLK430                     |  | FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1501210196.ZNF | Test Dates:<br>1/15 - 1/23/2015                                                     | EUT Type:<br>Portable Tablet                                                  |                                                                                       | Page 10 of 26                   |

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

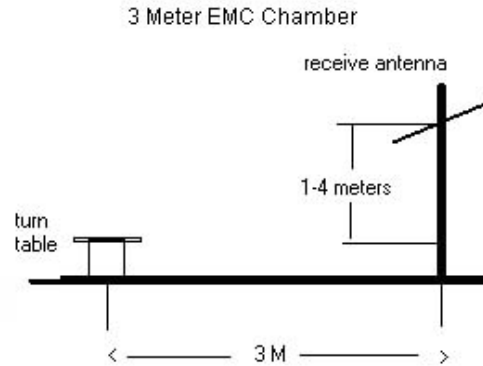

**Figure 6-1. Test Instrument & Measurement Setup**

## Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 558074 v03r02 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 6-10.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. Radiated spurious emissions pre-scan plots are also reported at the beginning of the next section. The plots apply the appropriate system corrections, however, they do not show the fully maximized spectrum. The plots are only included for the purposes of identifying spurious emissions requiring further investigation. Rohde & Schwarz EMC32, Version 9.15.00 automated test software was used to perform the Radiated Spurious Emissions Pre-Scan testing.

|                                             |                                                                                     |                                                                                       |                                                                                       |                                        |
|---------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> ZNFLK430                     |  | <b>FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b> |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>0Y1501210196.ZNF | <b>Test Dates:</b><br>1/15 - 1/23/2015                                              | <b>EUT Type:</b><br>Portable Tablet                                                   |                                                                                       | Page 11 of 26                          |

## Sample Calculations

### Determining Spurious Emissions Levels

- o Field Strength Level  $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- o  $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]}$
- o  $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

### Radiated Band Edge Measurement Offset


- o The amplitude offset shown in the radiated restricted band edge plots in Section 6.8 was calculated using the formula:

Offset (dB) = (Antenna Factor + Cable Loss + 10 dB Attenuator) – Preamplifier Gain


|                                      |                                                                                     |                                                                               |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFLK430                     |  | FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1501210196.ZNF | Test Dates:<br>1/15 - 1/23/2015                                                     | EUT Type:<br>Portable Tablet                                                  |                                                                                       | Page 12 of 26                   |

## Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209

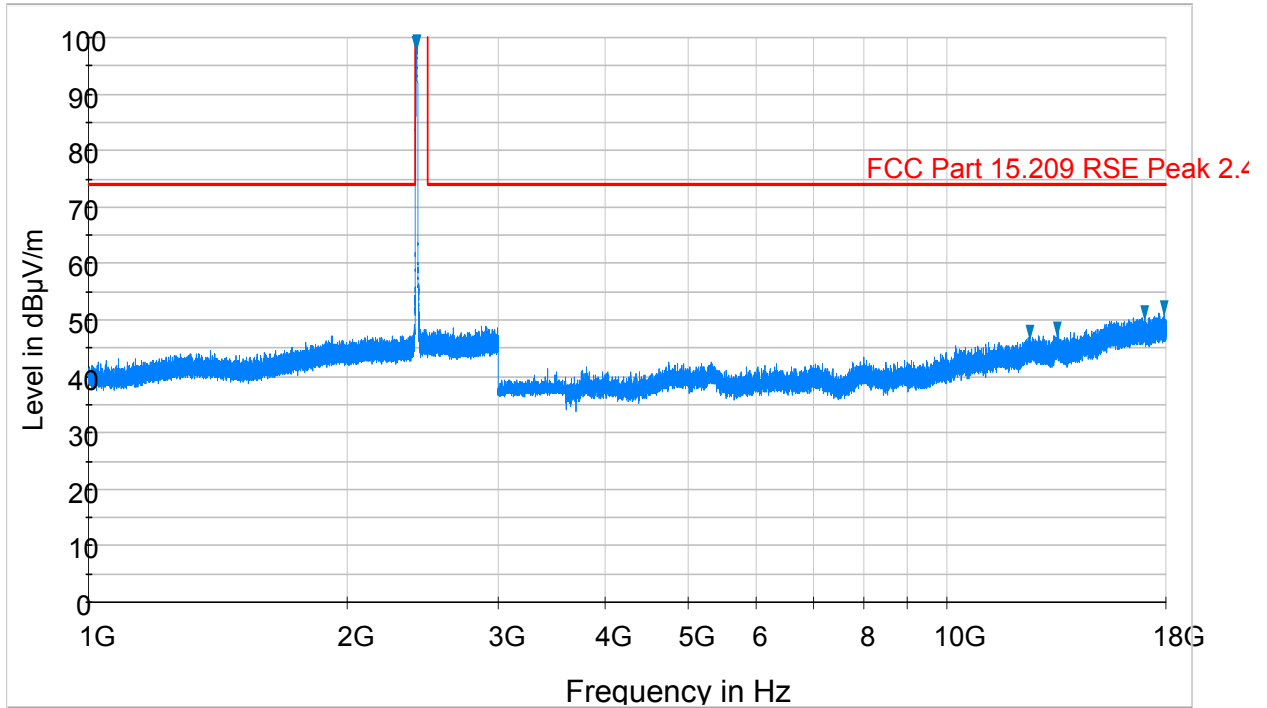


Plot 6-1. Radiated Spurious Plot above 1GHz (802.11b – Ch. 1, Ant. Pol. H)

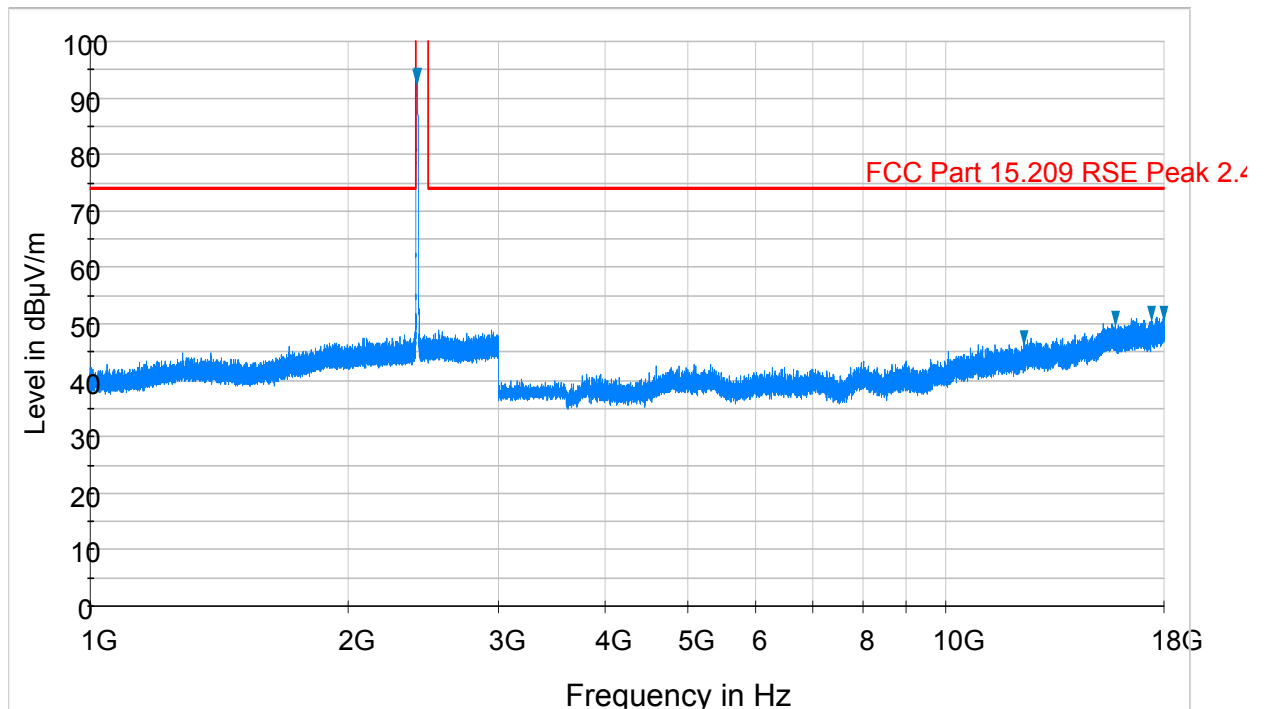


Plot 6-2. Radiated Spurious Plot above 1GHz (802.11b – Ch. 1, Ant. Pol. V)

|                                      |                                               |                                                                               |           |                                 |
|--------------------------------------|-----------------------------------------------|-------------------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFLK430                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1501210196.ZNF | Test Dates:<br>1/15 - 1/23/2015               | EUT Type:<br>Portable Tablet                                                  |           | Page 13 of 26                   |

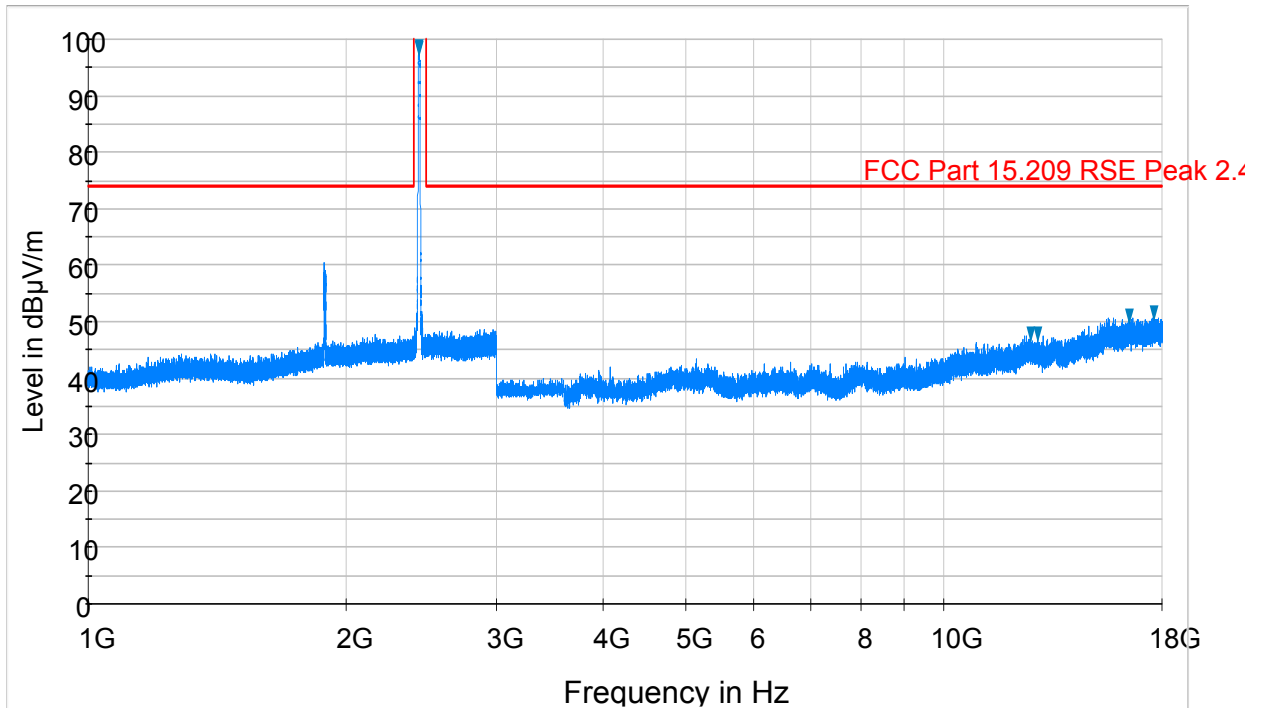


**Plot 6-3. Radiated Spurious Plot above 1GHz (802.11b – Ch. 6, Ant. Pol. H)**

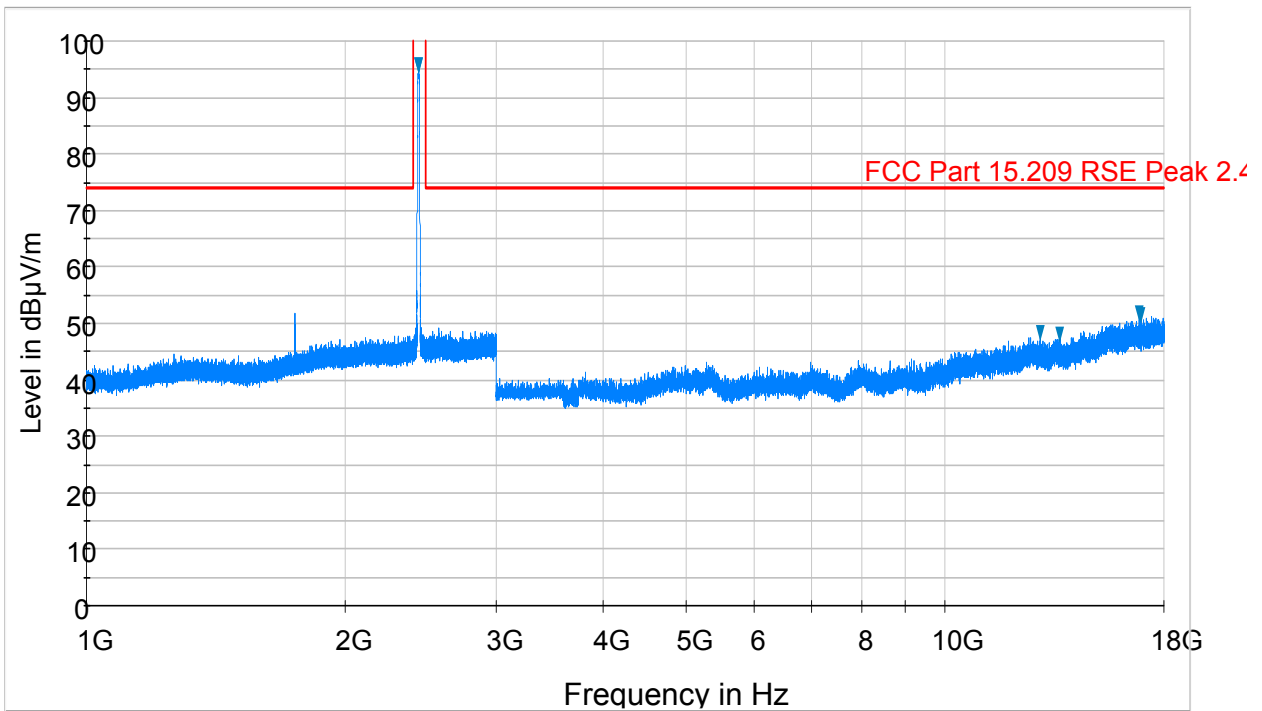


**Plot 6-4. Radiated Spurious Plot above 1GHz (802.11b – Ch. 6, Ant. Pol. V)**

|                                      |                                               |                                                                               |           |                                 |
|--------------------------------------|-----------------------------------------------|-------------------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFLK430                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1501210196.ZNF | Test Dates:<br>1/15 - 1/23/2015               | EUT Type:<br>Portable Tablet                                                  |           | Page 14 of 26                   |

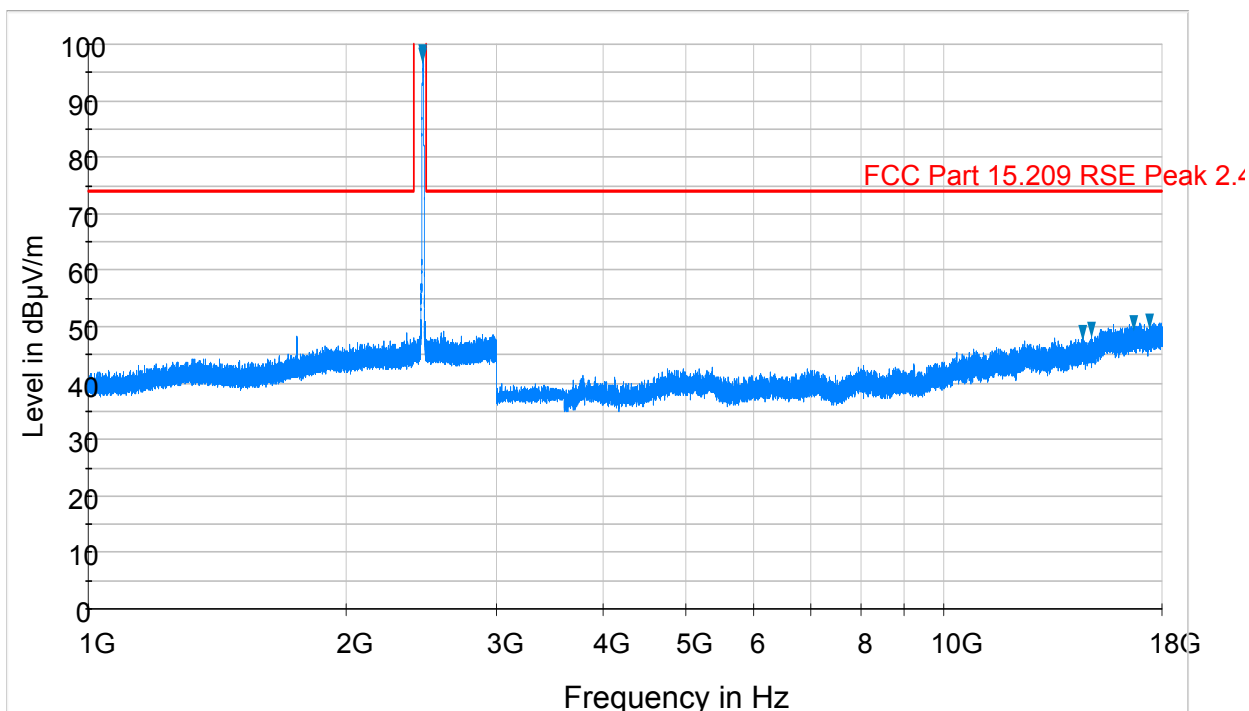


**Plot 6-5. Radiated Spurious Plot above 1GHz (802.11b – Ch. 11, Ant. Pol. H)**

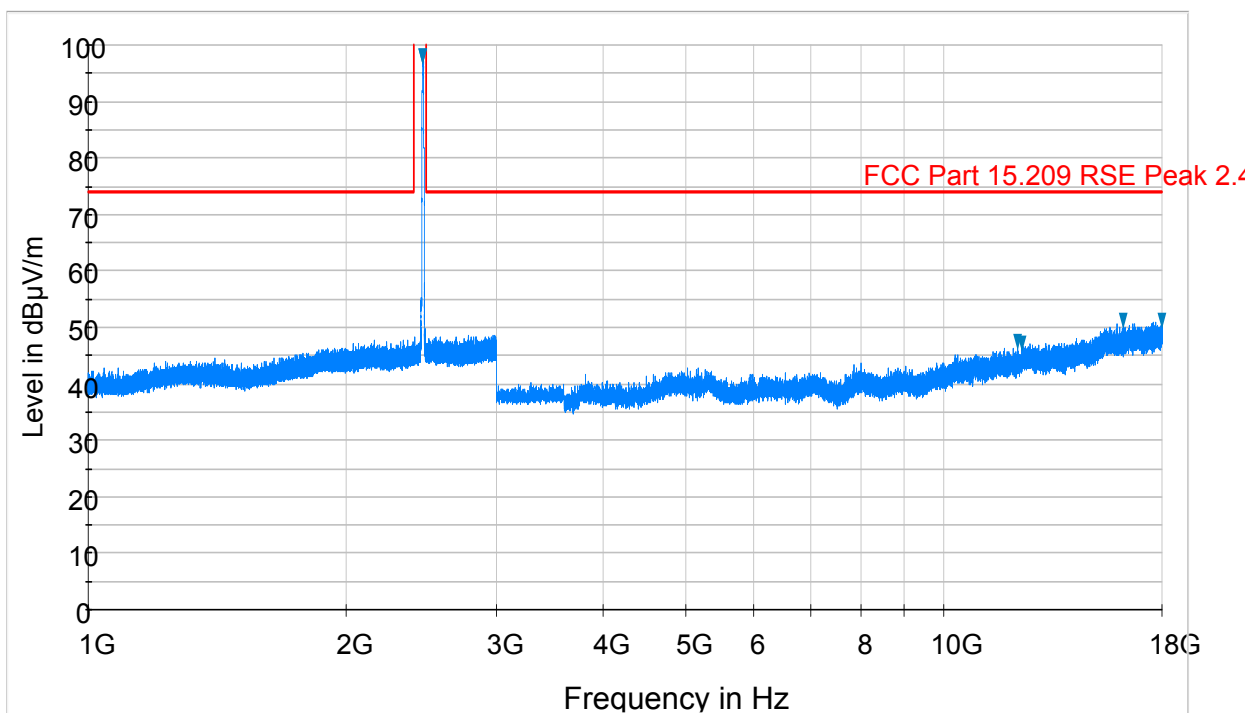


**Plot 6-6. Radiated Spurious Plot above 1GHz (802.11b – Ch. 11, Ant. Pol. V)**

|                                      |                                               |                                                                               |           |                                 |
|--------------------------------------|-----------------------------------------------|-------------------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFLK430                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1501210196.ZNF | Test Dates:<br>1/15 - 1/23/2015               | EUT Type:<br>Portable Tablet                                                  |           | Page 15 of 26                   |

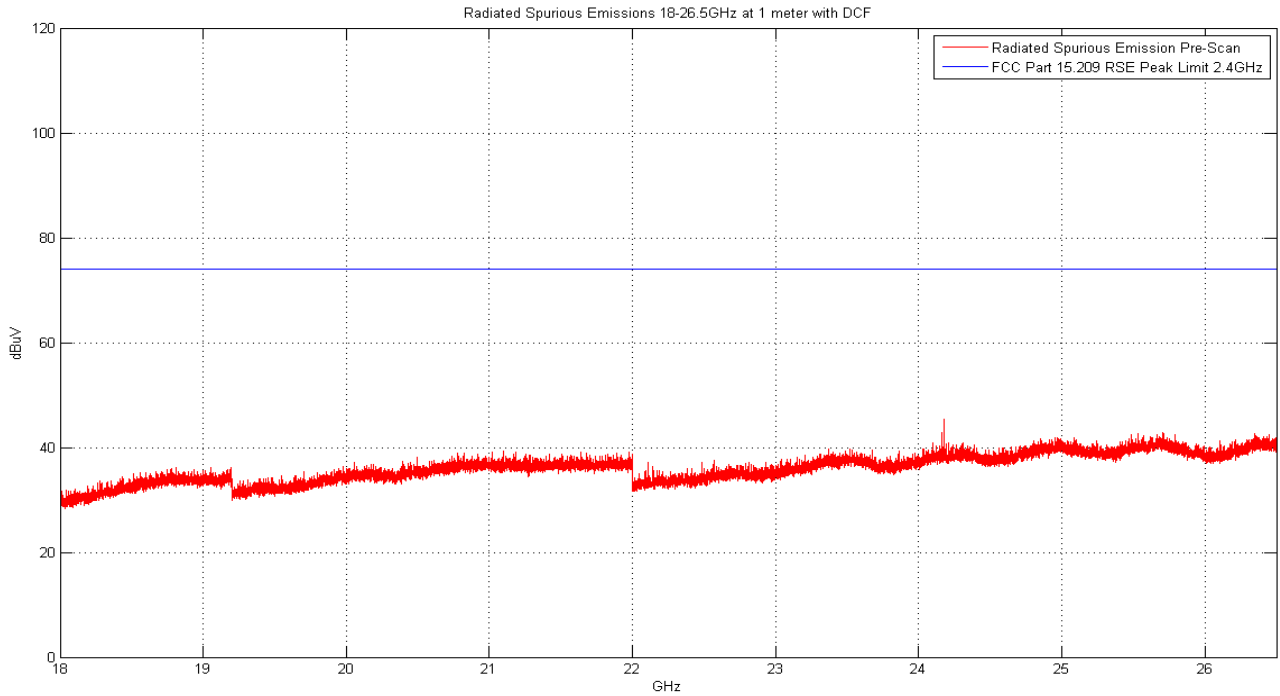

**Plot 6-7. Radiated Spurious Plot above 18GHz (802.11b – Ch. 11, Ant. Pol. V)**

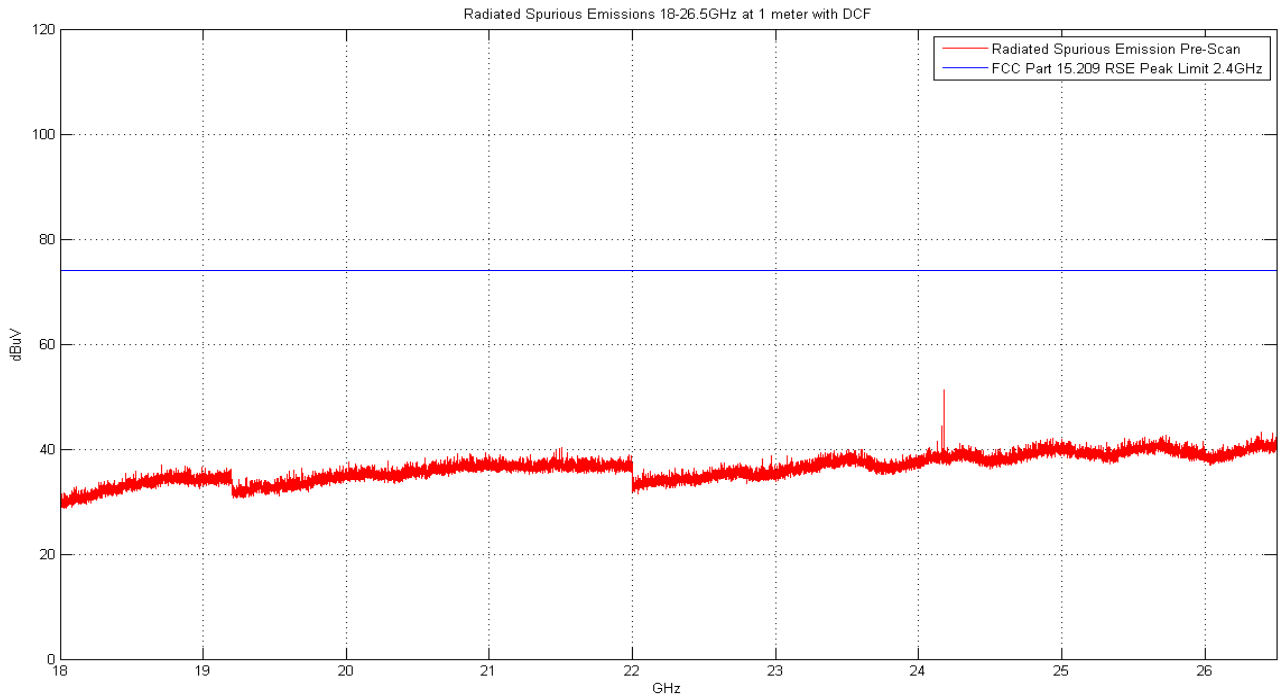

**Plot 6-8. Radiated Spurious Plot above 18GHz (802.11b – Ch. 11, Ant. Pol. V)**

|                                      |                                               |                                                                               |           |                                 |
|--------------------------------------|-----------------------------------------------|-------------------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFLK430                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1501210196.ZNF | Test Dates:<br>1/15 - 1/23/2015               | EUT Type:<br>Portable Tablet                                                  |           | Page 16 of 26                   |

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 01

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Ant. Pol. [H/V] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------------------|----------|-----------------|-------------|-------------------------|----------------|-------------|
| 4824.00         | -110.78              | Avg      | V               | 38.34       | 34.56                   | 53.98          | -19.42      |
| 4824.00         | -98.23               | Peak     | V               | 38.34       | 47.11                   | 73.98          | -26.87      |
| 12060.00        | -111.70              | Avg      | V               | 48.98       | 44.29                   | 53.98          | -9.69       |
| 12060.00        | -100.14              | Peak     | V               | 48.98       | 55.85                   | 73.98          | -18.13      |

Table 6-3. Radiated Measurements

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 06

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Ant. Pol. [H/V] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------------------|----------|-----------------|-------------|-------------------------|----------------|-------------|
| 4874.00         | -110.36              | Avg      | V               | 38.55       | 35.19                   | 53.98          | -18.79      |
| 4874.00         | -97.90               | Peak     | V               | 38.55       | 47.65                   | 73.98          | -26.33      |
| 7311.00         | -111.73              | Avg      | V               | 43.74       | 39.01                   | 53.98          | -14.97      |
| 7311.00         | -99.39               | Peak     | V               | 43.74       | 51.35                   | 73.98          | -22.63      |
| 12185.00        | -111.60              | Avg      | V               | 48.80       | 44.20                   | 53.98          | -9.78       |
| 12185.00        | -100.49              | Peak     | V               | 48.80       | 55.31                   | 73.98          | -18.67      |

Table 6-4. Radiated Measurements

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Ant. Pol. [H/V] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------------------|----------|-----------------|-------------|-------------------------|----------------|-------------|
| 4924.00         | -110.28              | Avg      | V               | 38.76       | 35.48                   | 53.98          | -18.50      |
| 4924.00         | -97.69               | Peak     | V               | 38.76       | 48.07                   | 73.98          | -25.91      |
| 7386.00         | -111.94              | Avg      | V               | 43.95       | 39.01                   | 53.98          | -14.97      |
| 7386.00         | -99.28               | Peak     | V               | 43.95       | 51.67                   | 73.98          | -22.31      |
| 12310.00        | -111.35              | Avg      | V               | 48.76       | 44.42                   | 53.98          | -9.56       |
| 12310.00        | -97.68               | Peak     | V               | 48.76       | 58.09                   | 73.98          | -15.89      |

**Table 6-5. Radiated Measurements**

## 6.3 Radiated Restricted Band Edge Measurements

### \$15.205 \$15.209

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.


Worst Case Mode: 802.11g

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2412MHz

Channel: 1

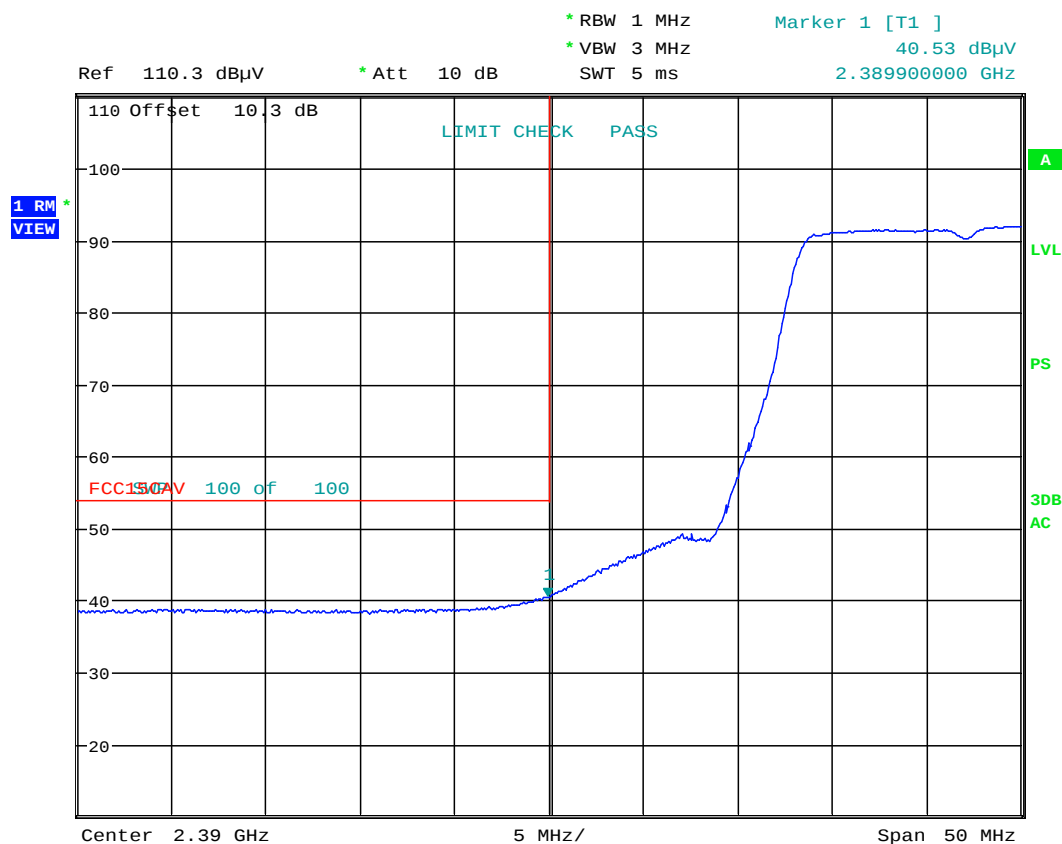


**Plot 6-9. Radiated Restricted Lower Band Edge Measurement (Average)**

|                                      |                                                                                     |                                                                               |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFLK430                     |  | FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1501210196.ZNF | Test Dates:<br>1/15 - 1/23/2015                                                     | EUT Type:<br>Portable Tablet                                                  |                                                                                       | Page 19 of 26                   |

## Antenna-1 Radiated Restricted Band Edge Measurements

\$15.205 \$15.209

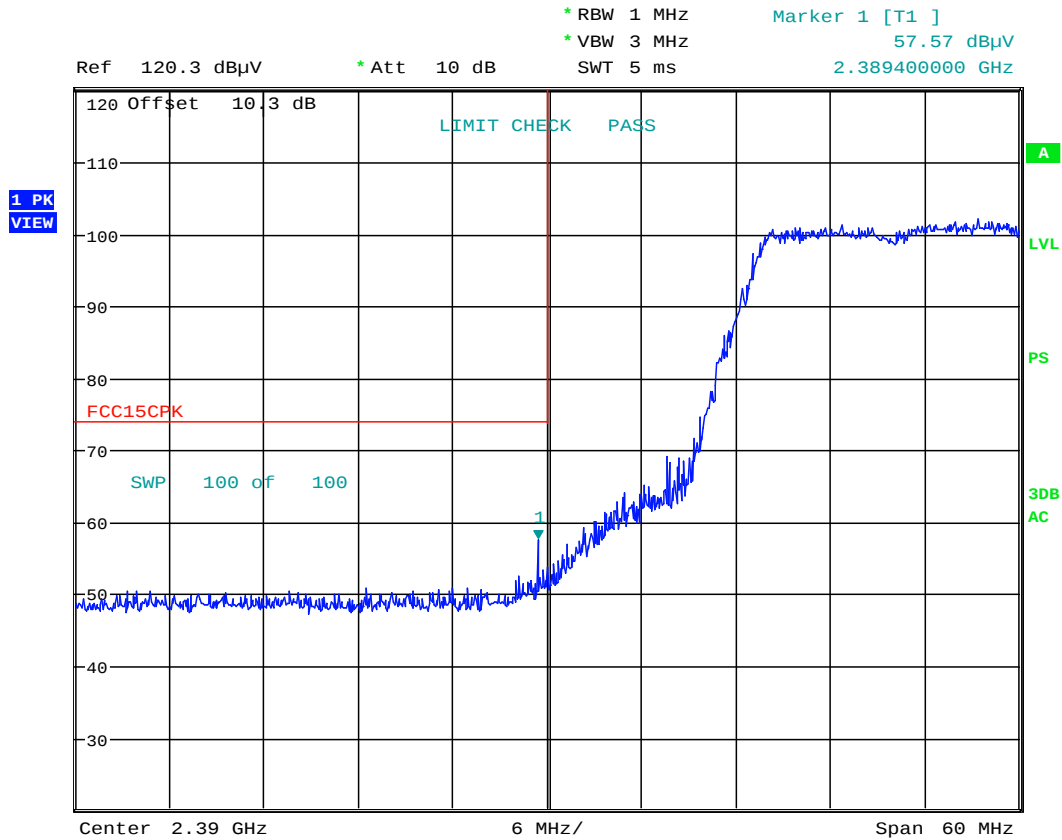

**Plot 6-10. Radiated Restricted Lower Band Edge Measurement (Peak)**

|                                      |                                               |                                                                               |                                                                                       |                                 |
|--------------------------------------|-----------------------------------------------|-------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFLK430                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1501210196.ZNF | Test Dates:<br>1/15 - 1/23/2015               | EUT Type:<br>Portable Tablet                                                  |                                                                                       | Page 20 of 26                   |

## Antenna-1 Radiated Restricted Band Edge Measurements

\$15.205 \$15.209


Worst Case Mode: 802.11g

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2462MHz

Channel: 11

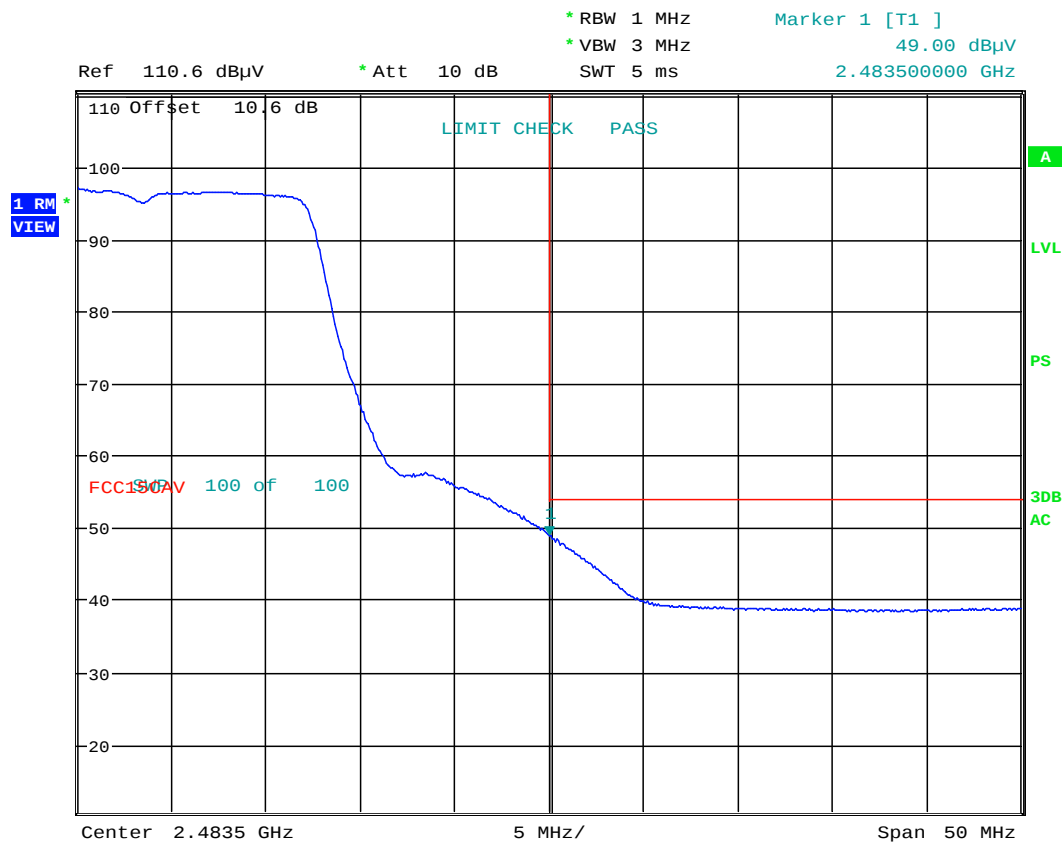


**Plot 6-11. Radiated Restricted Upper Band Edge Measurement (Average)**

|                                      |                                               |                                                                               |           |                                 |
|--------------------------------------|-----------------------------------------------|-------------------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFLK430                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1501210196.ZNF | Test Dates:<br>1/15 - 1/23/2015               | EUT Type:<br>Portable Tablet                                                  |           | Page 21 of 26                   |

## Antenna-1 Radiated Restricted Band Edge Measurements

\$15.205 \$15.209

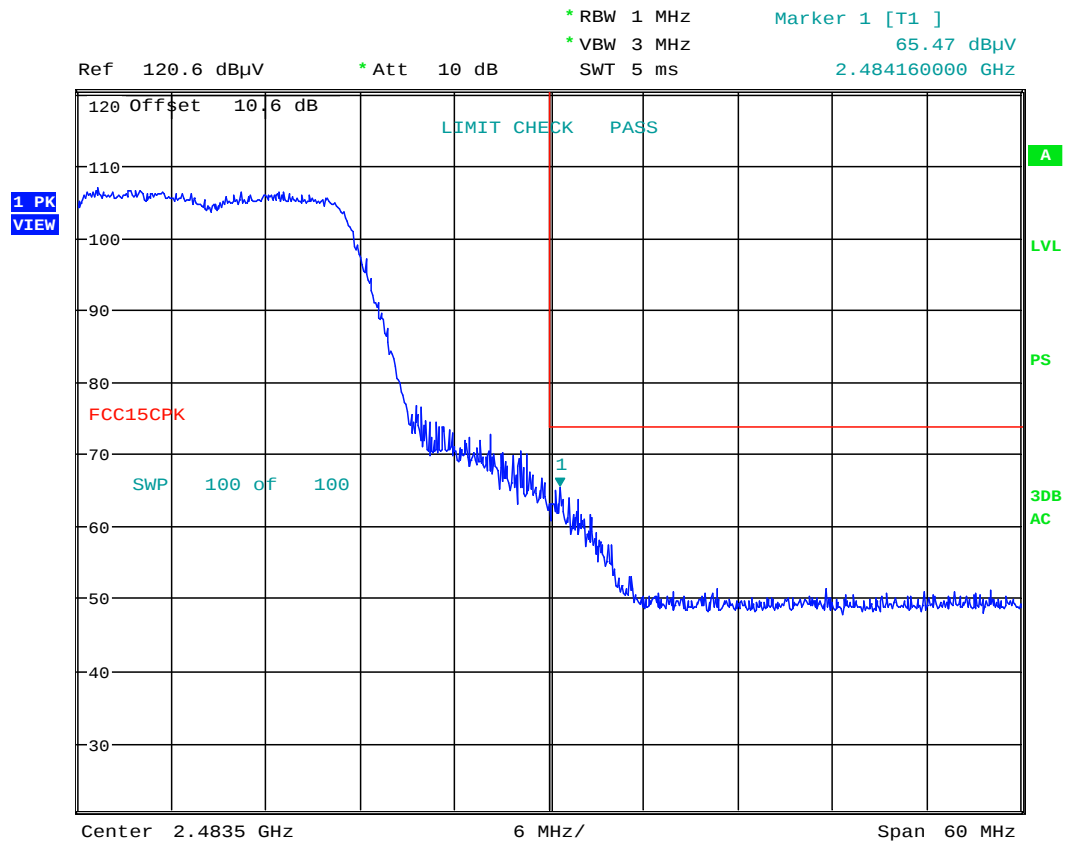

**Plot 6-12. Radiated Restricted Upper Band Edge Measurement (Peak)**

|                                      |                                               |                                                                               |  |                                 |
|--------------------------------------|-----------------------------------------------|-------------------------------------------------------------------------------|--|---------------------------------|
| FCC ID: ZNFLK430                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1501210196.ZNF | Test Dates:<br>1/15 - 1/23/2015               | EUT Type:<br>Portable Tablet                                                  |  | Page 22 of 26                   |

## 6.4 Radiated Spurious Emissions Measurements Below 1GHz

### §15.209

#### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 6-2 per Section 15.209.***

| Frequency         | Field Strength<br>[μV/m] | Measured Distance<br>[Meters] |
|-------------------|--------------------------|-------------------------------|
| 0.009 – 0.490 MHz | 2400/F (kHz)             | 300                           |
| 0.490 – 1.705 MHz | 24000/F (kHz)            | 30                            |
| 1.705 – 30.00 MHz | 30                       | 30                            |
| 30.00 – 88.00 MHz | 100                      | 3                             |
| 88.00 – 216.0 MHz | 150                      | 3                             |
| 216.0 – 960.0 MHz | 200                      | 3                             |
| Above 960.0 MHz   | 500                      | 3                             |

**Table 6-6. Radiated Limits**

#### Test Procedures Used

ANSI C63.4-2009

#### Test Settings


##### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

|                                      |                                                                                     |                                                                               |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFK430                      |  | FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1501210196.ZNF | Test Dates:<br>1/15 - 1/23/2015                                                     | EUT Type:<br>Portable Tablet                                                  |                                                                                       | Page 23 of 26                   |

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

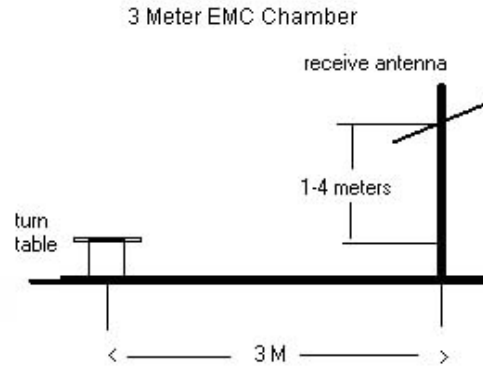

**Figure 6-2. Test Instrument & Measurement Setup**


## Test Notes

1. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 6-10.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.


|                                      |                                               |                                                                               |           |                                 |
|--------------------------------------|-----------------------------------------------|-------------------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFLK430                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1501210196.ZNF | Test Dates:<br>1/15 - 1/23/2015               | EUT Type:<br>Portable Tablet                                                  |           | Page 24 of 26                   |

## Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209

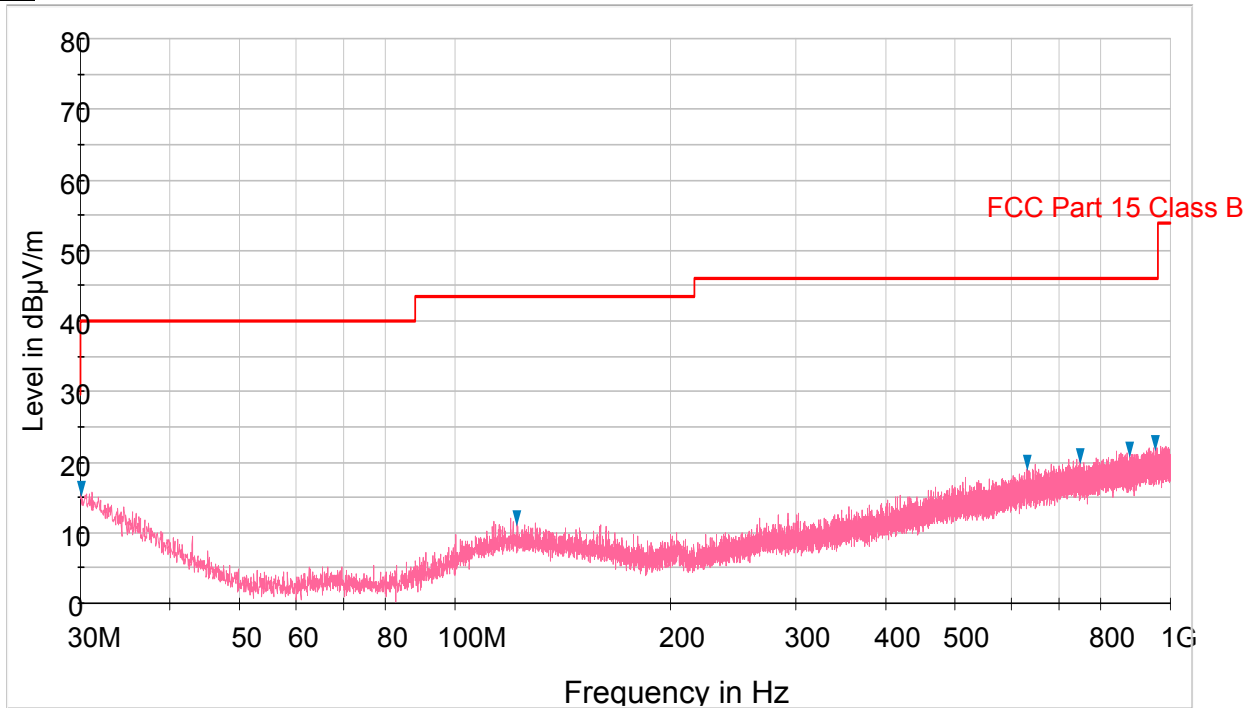

**Plot 6-13. Radiated Spurious Plot below 1GHz (Pol. H)**

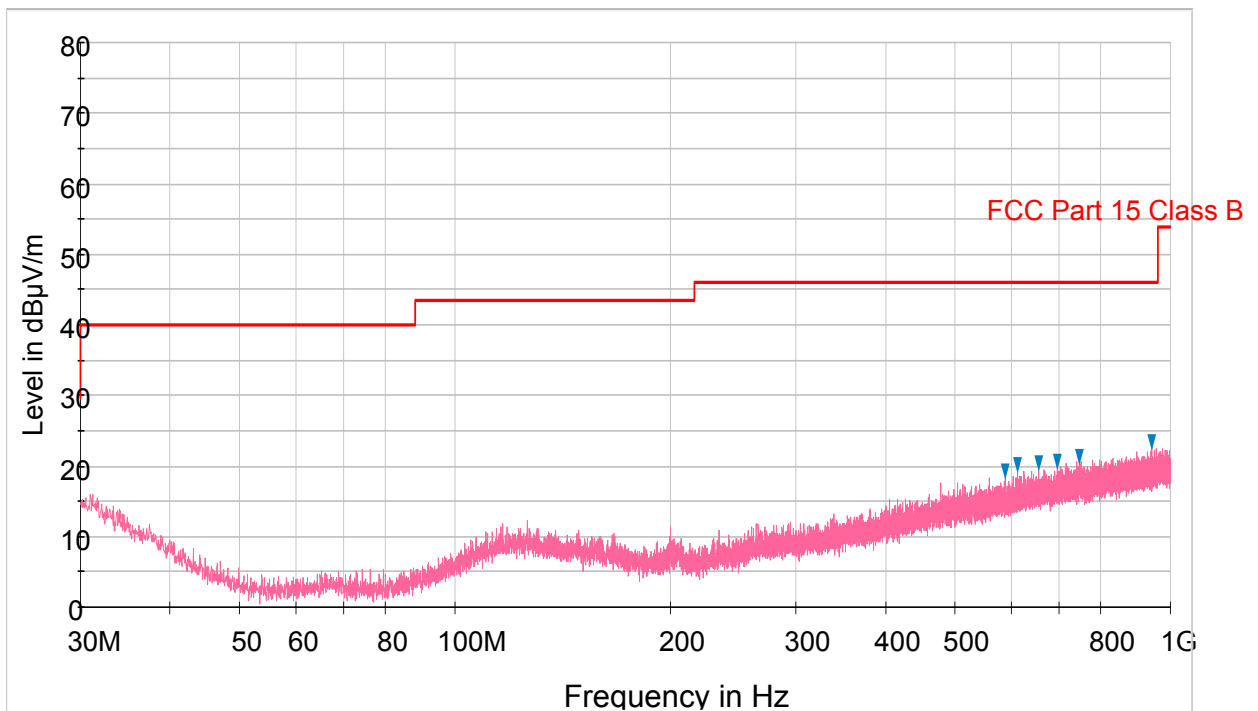

**Plot 6-14. Radiated Spurious Plot below 1GHz (Pol. V)**

|                                      |                                               |                                                                               |                                        |
|--------------------------------------|-----------------------------------------------|-------------------------------------------------------------------------------|----------------------------------------|
| FCC ID: ZNFLK430                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) | <b>Reviewed by:</b><br>Quality Manager |
| Test Report S/N:<br>0Y1501210196.ZNF | Test Dates:<br>1/15 - 1/23/2015               | EUT Type:<br>Portable Tablet                                                  | Page 25 of 26                          |

## 7.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **LG Portable Tablet FCC ID: ZNFLK430** is in compliance with Part 15C of the FCC Rules.

|                                             |                                                                                     |                                                                                       |                                                                                       |                                        |
|---------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> ZNFLK430                     |  | <b>FCC Pt. 15.247 802.11b/g/n MEASUREMENT REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b> |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>0Y1501210196.ZNF | <b>Test Dates:</b><br>1/15 - 1/23/2015                                              | <b>EUT Type:</b><br>Portable Tablet                                                   |                                                                                       | Page 26 of 26                          |