EMC TEST REPORT

Test Report No.	:	KES-EM-22T0432
Date of Issue	:	Jun. 02, 2022
Product name	:	Bluetooth Earbud (Cradle)
Model/Type No.	:	TONE-TF8QC
Variant Model	:	TONE-UTF8QC, TONE-DTF8QC
Applicant	:	LG Electronics USA, Inc.
Applicant Address	:	111 Sylvan Ave, North Building, Englewood Cliffs, New Jersey, United States
Manufacturer	:	LG Electronics Inc.
Manufacturer Address	:	222 LG-ro Jinwi-myeon, Pyeongtaek-si,Gyeonggi-do, Korea
FCC ID	:	ZNFTONETF8Q
IC ID	:	2703C-TONETF8Q
Date of Receipt	:	May. 18, 2022
Test date	:	May. 25, 2022
Test Results	:	☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Dae Hyun, Kim
EMC Test Engineer

Reviewed by

Dong Hun, Jang
EMC Technical Manager

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Jun. 02, 2022	KES-EM-22T0432	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

TABLE OF CONTENTS

1.0 General Product Description 4
1.1 Test Voltage & Frequency 5
1.2 Variant Model Differences 5
1.3 Device Modifications 5
1.4 Equipment Under Test 5
1.5 Support Equipments 5
1.6 External I/O Cabling 6
1.7 EUT Operating Mode(s) 6
1.8 Configuration 7
1.9 Remarks when standards applied 8
1.10 Calibration Details of Equipment Used for Measurement 8
1.11 Test Facility 8
1.12 Measurement Procedure 8
1.13 Laboratory Accreditations and Listings 9
2.0 Test Regulations 10
2.1 Conducted Emissions at Mains Power Ports 11
2.2 Radiated Electric Field Emissions(Below 1 ㎓) 12
2.3 Radiated Electric Field Emissions(Above 1 ㎓) 13
APPENDIX A – TEST DATA 14
Conducted Emissions at Mains Power Ports 14
Radiated Electric Field Emissions(Below 1 ㎓) 18
Radiated Electric Field Emissions(Above 1 ㎓) 22
APPENDIX B - Test Setup Photos and Configuration 25
Radiated Electric Field Emissions(Below 1 ㎓) 27
Radiated Electric Field Emissions(Above 1 ㎓) 29

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

1.0 General Product Description

Main Specifications of EUT are:

Item	Details
Communication Method	Bluetooth
Power	Charging : DC 5 V / 500mA Operating : DC 3.7 V (Battery) / 390 mAh (Lithium Ion Battery)
Size	(65.8 x 51.9 x 32.7) ㎜
Weight	43 g
Port	2 Pin x 2 EA (Charge)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ AC 120 V 60 Hz

1.2 Variant Model Differences

TONE-UTF8QC : The model is identical to the basic model except for the Marketing area (KOREA, United Kingdom, Australia) and model name.

TONE-DTF8QC : The model is identical to the basic model except for the Marketing area (Germany) and model name.

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
Bluetooth Earbud (Cradle)	TONE-TF8QC	-	LG Electronics Inc.	EUT

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
AC/DC Adapter	MCS-02KR2	-	Weihai Sunlin Electronics Co.,Ltd	-
Bluetooth Earbud	TONE-TF8Q	-	LG Electronics Inc.	FCC ID : ZNFTONETF8Q IC ID : 2703C-TONETF8Q
USB DIGITAL TESTER	J7	-	-	-
Notebook	LG15N54	506NZGK000615	LG Electronics Inc.	-
Notebook Adapter	PA-1650-43(65W)	OF58U63849302Y 609	LG Electronics Inc.	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

1.6 External I/O Cabling

■ Charge Mode

Start		END		Cable Spec.	
Description	**I/O Port**	**Description**	**I/O Port**	**Length**	**Shield**
Bluetooth Earbud (Cradle) (EUT)	Charge Port	Bluetooth Earbud	Charge Port	-	-
	USB C Type	USB DIGITAL TESTER	USB	1.0	U
USB DIGITAL TESTER	USB	AC/DC Adapter	USB	-	-

* Unshielded = U, Shielded = S

■ Operating Mode

Start		END		Cable Spec.	
Description	**I/O Port**	**Description**	**I/O Port**	**Length**	**Shield**
Bluetooth Earbud (Cradle) (EUT)	Wireless	Bluetooth Earbud	Wireless	-	-
	USB C Type	Notebook	3.5 ㎜	0.8	U
Notebook	DC Jack	Notebook Adapter	DC Jack	1.8	U

* Unshielded = U, Shielded = S

1.7 EUT Operating Mode(s)

Test mode	operating
Charge	Tested while USB DIGITAL TESTER and EUT charge LED checking the normal state of charge.
Operating	Connect EUT and Earbud wirelessly. It was tested while confirming that the sound from EUT was normally produced.

EUT Test operating S/W		
Name	**Version**	**Manufacture Company**
-	-	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

1.8 Configuration

■ AC Main
□ DC Main

■ Charge Mode

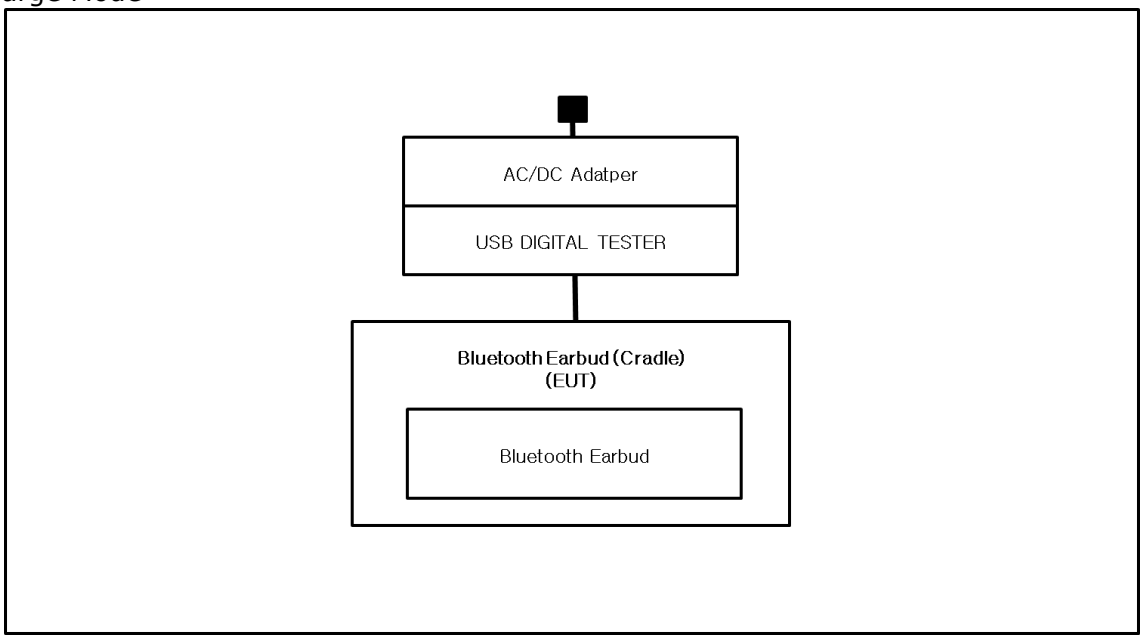

■ Operating Mode

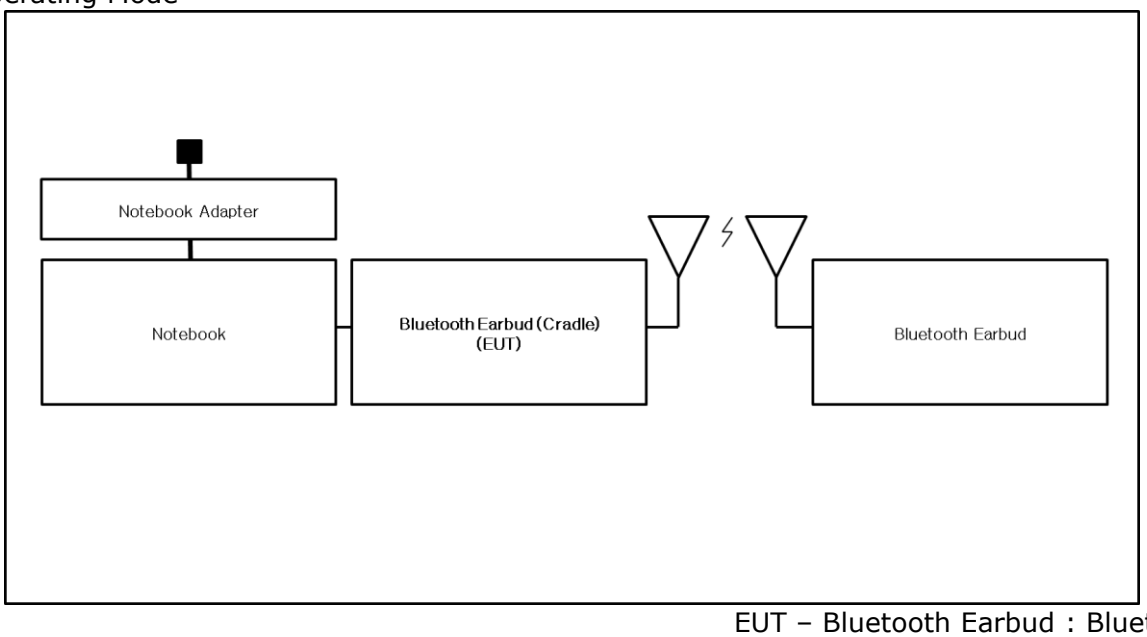

EUT – Bluetooth Earbud : Bluetooth

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

1.9 Remarks when standards applied

N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeoju-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4a:2017 and CISPR 16-1-4:2019

1.12 Measurement Procedure

- Conducted Emissions

The conducted emission levels were measured on each current-carrying line with the spectrum analyzer operating in the CISPR quasi-peak mode (or peak mode if applicable). The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. If the conducted emission exceed the average limit with the instrument set to the quasi-peak mode, the measurements are made in the average mode. The emission spectrum was scanned from 150 ㎑ to 30 ㎒. The highest emission amplitudes relative to the appropriate limits were measured and have been recorded. Quasi-peak readings are distinguished with a "QP".

- Radiated Electric Field Emissions

The test was done at a SEMI ANECHOIC CHAMBER with quasi-peak detector. The final test data was measured using a Quasi-Peak detector below 1㎓ at 10 m or 3 m distance and a Peak and Average detector above 1 ㎓ at 3 m distance. Test was proceeded worst case test mode and cable configuration.
Measurements were made with the antenna positioned in both the horizontal and vertical planes of polarization. The antenna height was varied from 1 m to 4 m and the EUT was rotated 360° to find the maximum emitting point for each frequency.

Measurement procedures was In accordance with ANSI C63.4-2014 7.3.3, 7.3.4, 8.3.1.1, 8.3.1.2, 8.3.2.1, 8.3.2.2

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

1.13 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	**RRA**	EMI (3 m & 10 m Semi-Aechoic Chamber ,10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	KR0100
International	**KOLAS**	EMI (3 m & 10 m Semi-Aechoic Chamber , and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	KT489
USA	**FCC**	3 m & 10 m Semi-Aechoic Chamber, 10 m Open Area and Conducted test site to perform FCC Part 15/18 measurements.	KR0100
Canada	**ISED**	3 m & 10 m Semi-Aechoic Chamber and Conducted test site	23298-1
JAPAN	**VCCI**	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	R-20056, C-20036 T-20040, G-20057
Europe	**TÜV SÜD**	EMI (3 m & 10 m Semi-Aechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	CARAT 001633 0004

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **47 CFR Part 15, Subpart B**

☐ CISPR 22:2009 +A1:2010	☐ Class A	☐ Class B
☒ ANSI C63.4a-2017	☐ Class A	☒ Class B

☒ **IC Regulation ICES-003 Issue 7**

☐ CAN/CSA-CISPR 32:17	☐ Class A	☐ Class B
☒ ANSI C63.4a-2017	☐ Class A	☒ Class B

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

2.1 Conducted Emissions at Mains Power Ports

Test Date
May. 25, 2022

Test Location
Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due	calibration interval
☒	EMI Test S/W	EMC32	R & S	9.12.00	-	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	12, 28, 2022	1 Year
☒	LISN	ENV216	R & S	101787	12, 27, 2022	1 Year
☐	LISN	ESH2-Z5	R & S	100450	12, 27, 2022	1 Year
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 27, 2022	1 Year

Test Conditions
Temperature: (24,6 ± 0,1) ℃
Relative Humidity: (42,7 ± 0,1) % R.H.

Frequency Range of Measurement
150 ㎑ to 30 ㎒

Instrument Settings
IF Band Width: 9 ㎑

Test Results
The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks
See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

2.2 Radiated Electric Field Emissions(Below 1 ㎓)

Test Date
May. 25, 2022

Test Location
☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due	calibration interval
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	03, 31, 2023	1 Year
☒	AMPLIFIER	SCU 01	R & S	100603	11, 24, 2022	1 Year
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	12, 08, 2022	2 Year
☒	ATTENUATOR	8491A	HP	32173	03, 08, 2023	1 Year

Test Conditions
Temperature: (23,5 ± 0,1) ℃
Relative Humidity: (42,5 ± 0,2) % R.H.

Frequency Range of Measurement
30 ㎒ to 1 ㎓

Instrument Settings
IF Band Width: 120 ㎑

Test Results
The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks
See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

2.3 Radiated Electric Field Emissions(Above 1 ㎓)

Test Date
May. 25, 2022

Test Location
SEMI ANECHOIC CHAMBER #4(10m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due	calibration interval
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	03, 31, 2023	1 Year
☒	PREAMPLIFIER	8449B	AGILENT	3008A01742	12, 27, 2022	1 Year
☒	HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1802	12, 16, 2022	1 Year

Test Conditions
Temperature: (23,5 ± 0,2) ℃
Relative Humidity: (42,5 ± 0,2) % R.H.

Frequency Range of Measurement
1 ㎓ to 12,4 ㎓

Instrument Settings
IF Band Width: 1 ㎒

Test Results
The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks
See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

■ Charge Mode

HOT LINE

Common Information

Test Description:	Conducted Emission
Model No.:	TONE-TF8QC
Phase:	
Mode:	Charge
Operator Name:	KES

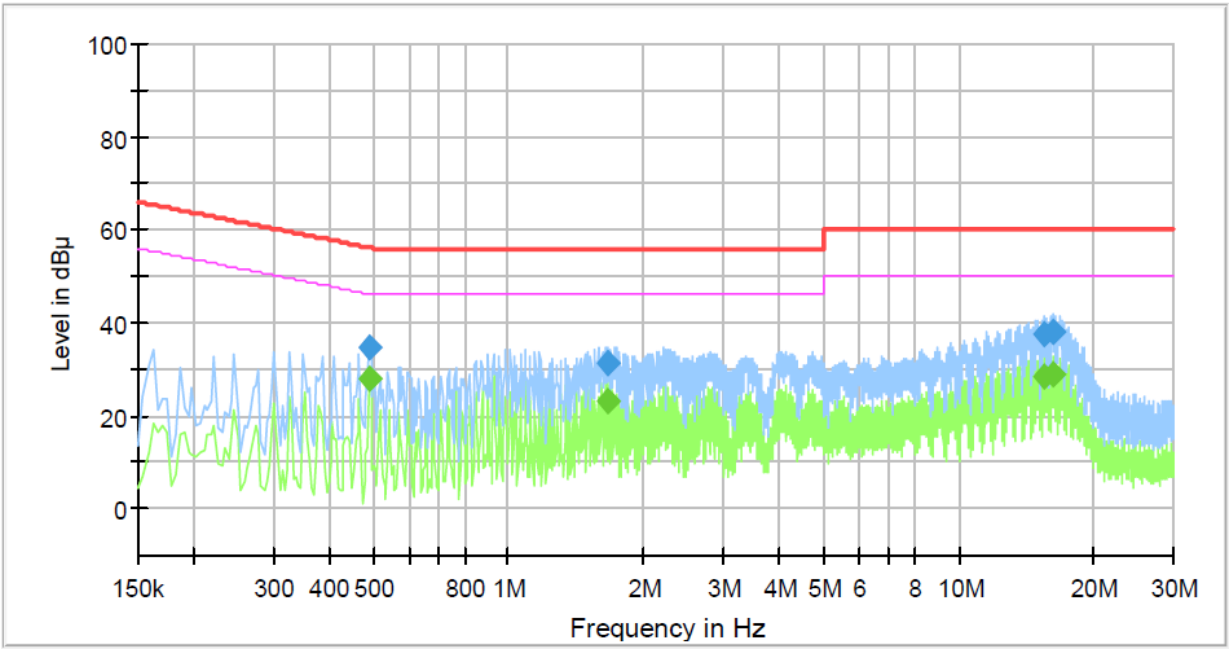

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.490000	---	27.88	46.17	18.29	1000.0	9.000	L1	19.7
0.490000	34.67	---	56.17	21.50	1000.0	9.000	L1	19.7
1.662000	---	23.14	46.00	22.86	1000.0	9.000	L1	20.3
1.662000	31.32	---	56.00	24.68	1000.0	9.000	L1	20.3
15.562000	---	28.42	50.00	21.58	1000.0	9.000	L1	19.9
15.562000	37.66	---	60.00	22.34	1000.0	9.000	L1	19.9
16.206000	---	28.71	50.00	21.29	1000.0	9.000	L1	19.9
16.206000	37.94	---	60.00	22.06	1000.0	9.000	L1	19.9

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

NEUTRAL LINE

Common Information

Test Description:	Conducted Emission
Model No.:	TONE-TF8QC
Phase:	
Mode:	Charge
Operator Name:	KES

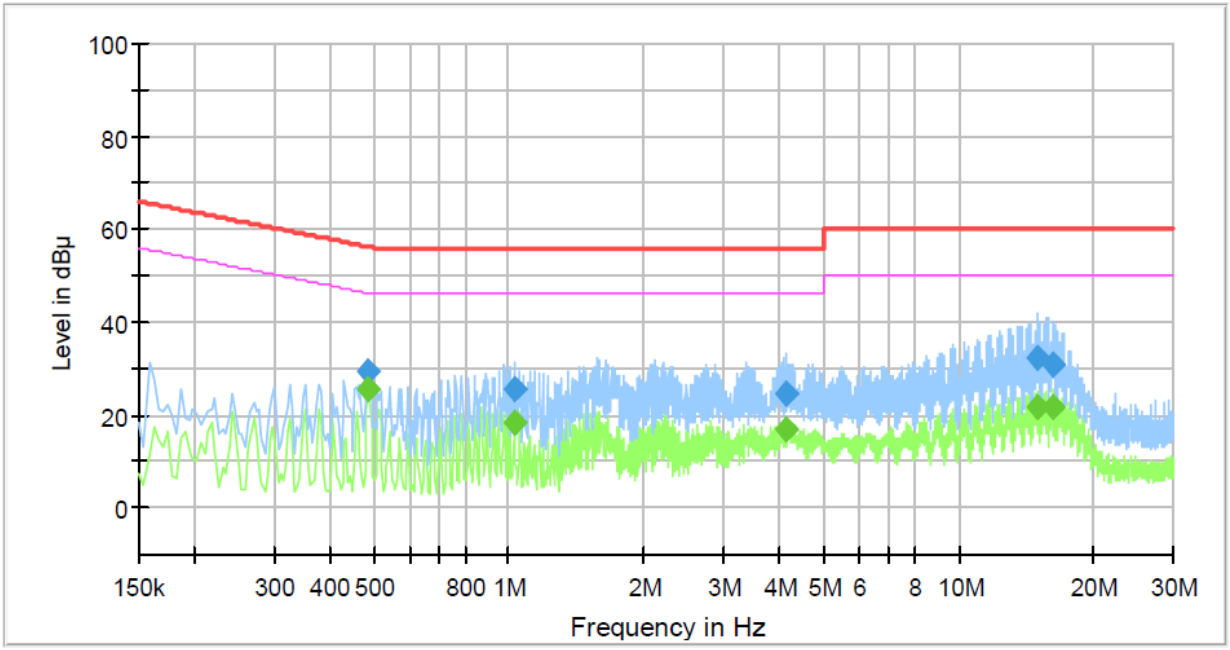

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.486000	---	25.68	46.24	20.56	1000.0	9.000	N	19.7
0.486000	29.38	---	56.24	26.86	1000.0	9.000	N	19.7
1.030000	---	18.16	46.00	27.84	1000.0	9.000	N	20.1
1.030000	25.39	---	56.00	30.61	1000.0	9.000	N	20.1
4.138000	---	16.89	46.00	29.11	1000.0	9.000	N	19.9
4.138000	24.82	---	56.00	31.18	1000.0	9.000	N	19.9
14.922000	---	21.62	50.00	28.38	1000.0	9.000	N	19.9
14.922000	32.33	---	60.00	27.67	1000.0	9.000	N	19.9
16.182000	---	21.87	50.00	28.13	1000.0	9.000	N	19.9
16.182000	30.70	---	60.00	29.30	1000.0	9.000	N	19.9

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

■ Operating Mode

HOT LINE

Common Information

Test Description:	Conducted Emission
Model No.:	TONE-TF8QC
Phase:	
Mode:	Operating
Operator Name:	KES

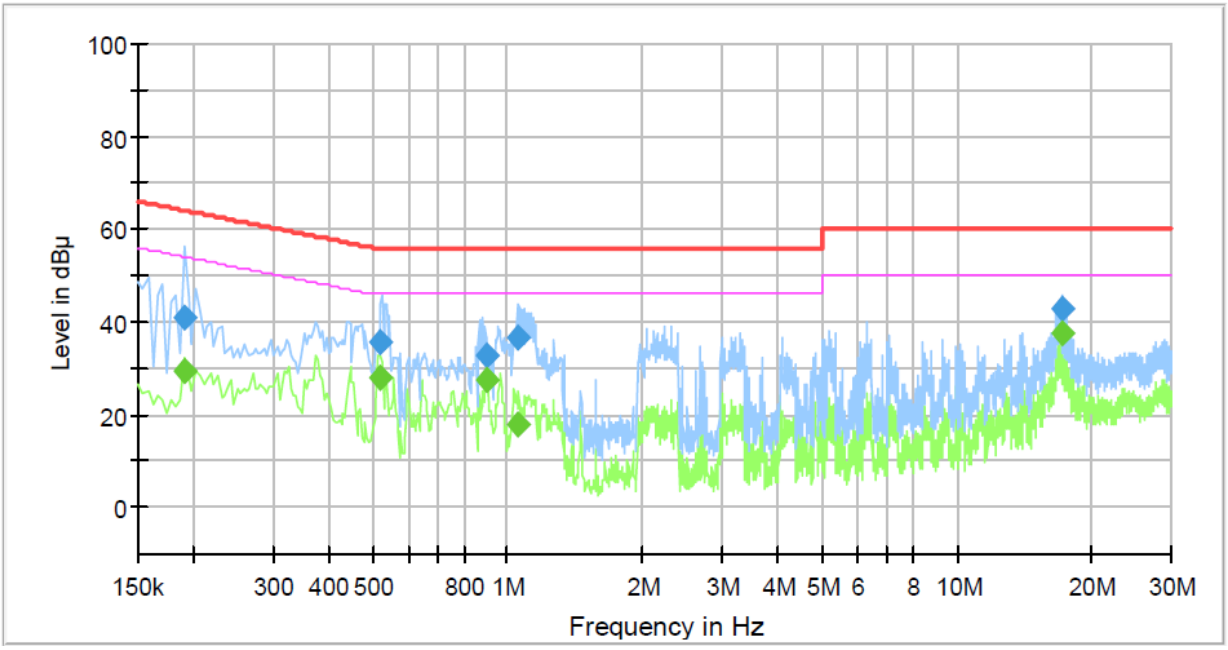

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.190000	---	29.48	54.04	24.56	1000.0	9.000	L1	19.4
0.190000	40.81	---	64.04	23.23	1000.0	9.000	L1	19.4
0.518000	---	28.08	46.00	17.92	1000.0	9.000	L1	19.7
0.518000	35.85	---	56.00	20.15	1000.0	9.000	L1	19.7
0.902000	---	27.37	46.00	18.63	1000.0	9.000	L1	20.1
0.902000	32.91	---	56.00	23.09	1000.0	9.000	L1	20.1
1.058000	---	18.02	46.00	27.98	1000.0	9.000	L1	20.1
1.058000	36.77	---	56.00	19.23	1000.0	9.000	L1	20.1
17.078000	---	37.72	50.00	12.28	1000.0	9.000	L1	19.9
17.078000	42.97	---	60.00	17.03	1000.0	9.000	L1	19.9

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

NEUTRAL LINE

Common Information

Test Description:	Conducted Emission
Model No.:	TONE-TF8QC
Phase:	
Mode:	Operating
Operator Name:	KES

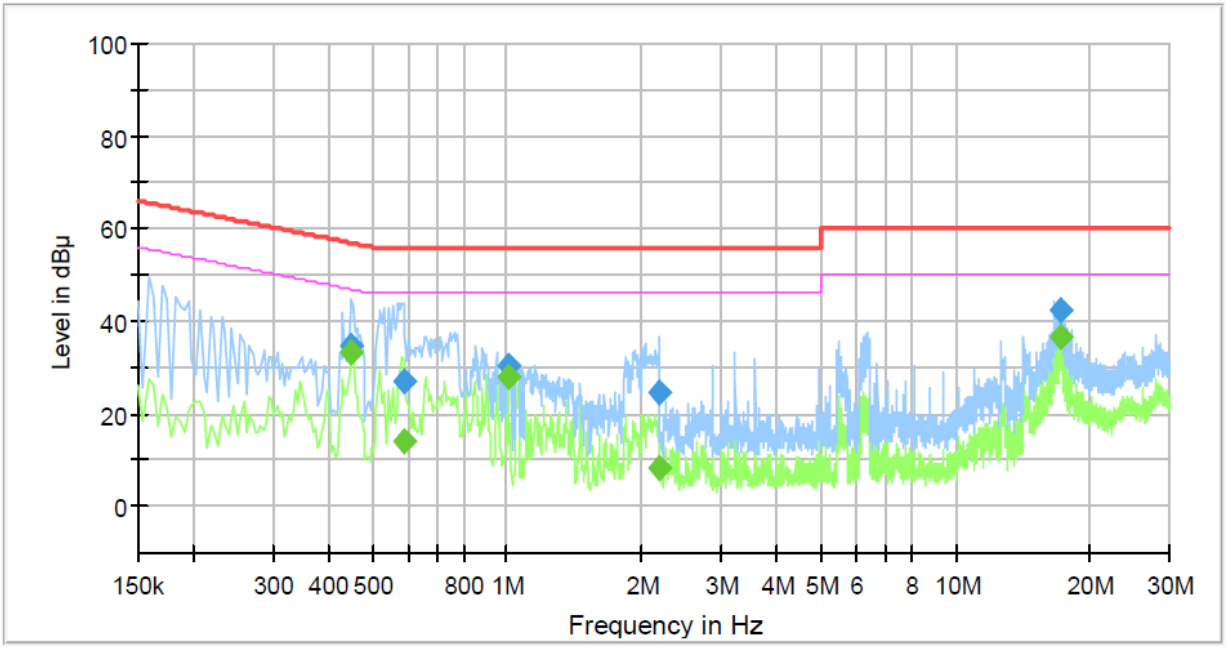

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.450000	---	33.13	46.88	13.75	1000.0	9.000	N	19.7
0.450000	34.50	---	56.88	22.38	1000.0	9.000	N	19.7
0.586000	---	14.00	46.00	32.00	1000.0	9.000	N	19.8
0.586000	27.12	---	56.00	28.88	1000.0	9.000	N	19.8
1.002000	---	28.11	46.00	17.89	1000.0	9.000	N	20.0
1.002000	30.52	---	56.00	25.48	1000.0	9.000	N	20.0
2.178000	---	8.35	46.00	37.65	1000.0	9.000	N	20.3
2.178000	24.49	---	56.00	31.51	1000.0	9.000	N	20.3
17.082000	---	36.79	50.00	13.21	1000.0	9.000	N	19.9
17.082000	42.16	---	60.00	17.84	1000.0	9.000	N	19.9

♦ Calculation
QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]
QuasiPeak / CAverage : The Final Value
Reading Value : Not shown in the table.
Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Emissions(Below 1 ㎓)

- 47 CFR Part 15, Subpart B

■ Charge Mode

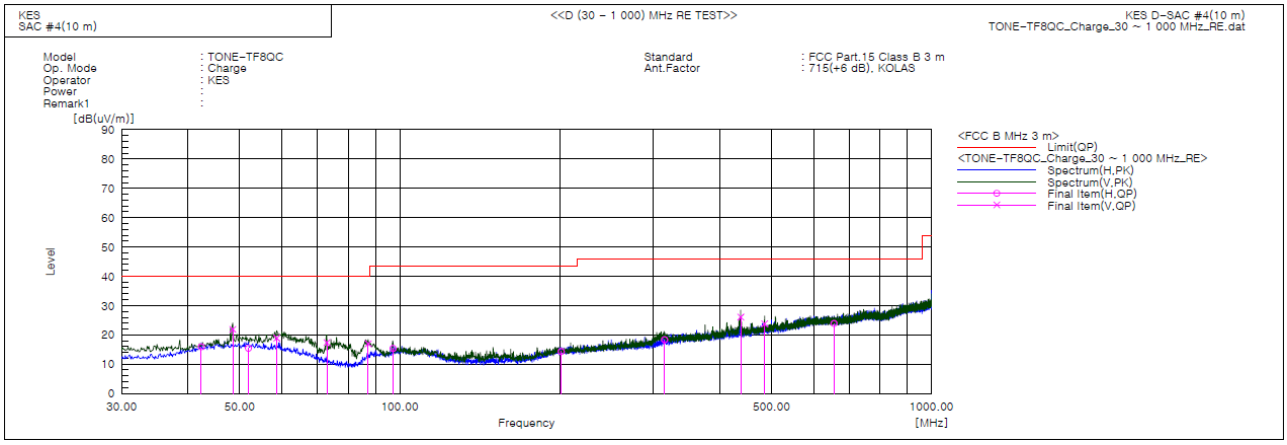

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	42.368	H	38.0	-22.1	15.9	40.0	24.1	400.0	48.0	
2	48.551	V	43.3	-21.4	21.9	40.0	18.1	116.0	212.0	
3	51.946	H	36.9	-21.5	15.4	40.0	24.6	376.0	195.0	
4	58.736	V	41.1	-22.2	18.9	40.0	21.1	100.0	203.0	
5	72.923	V	43.9	-26.5	17.4	40.0	22.6	125.0	353.0	
6	87.230	V	42.6	-25.6	17.0	40.0	23.0	100.0	14.0	
7	97.173	H	38.9	-23.5	15.4	43.5	28.1	390.0	339.0	
8	201.205	H	36.0	-21.7	14.3	43.5	29.2	335.0	343.0	
9	314.695	H	36.4	-18.1	18.3	46.0	27.7	400.0	56.0	
10	437.521	V	40.6	-14.5	26.1	46.0	19.9	100.0	4.0	
11	485.294	V	36.9	-13.1	23.8	46.0	22.2	100.0	78.0	
12	655.408	H	33.5	-9.6	23.9	46.0	22.1	400.0	67.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

■ Operating Mode

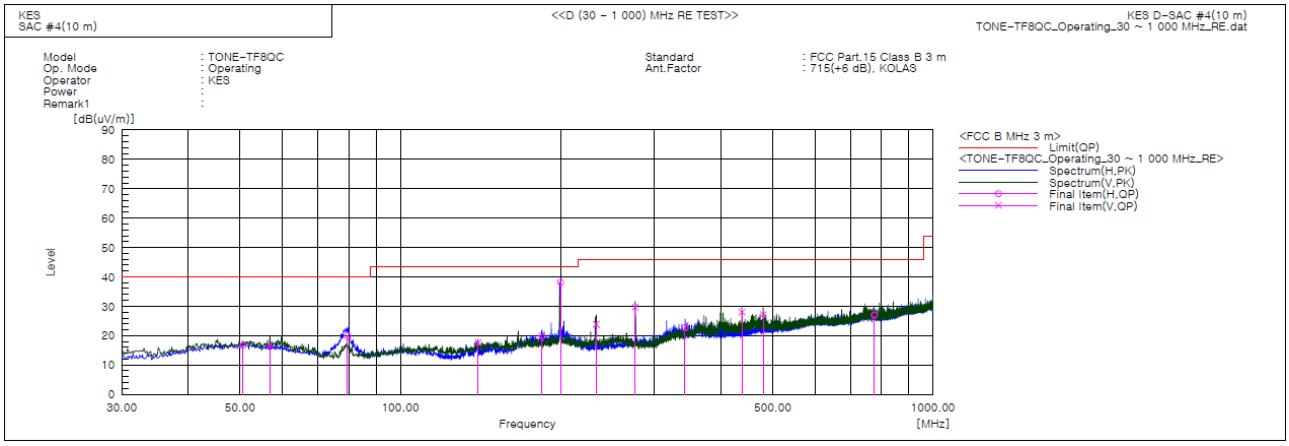

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	50.613	H	38.1	-21.4	16.7	40.0	23.3	400.0	210.0	
2	56.918	V	38.7	-22.0	16.7	40.0	23.3	100.0	139.0	
3	79.591	H	48.0	-28.1	19.9	40.0	20.1	400.0	146.0	
4	139.853	V	43.7	-26.1	17.6	43.5	25.9	100.0	54.0	
5	184.230	H	43.8	-23.8	20.0	43.5	23.5	369.0	354.0	
6	199.871	H	59.9	-21.7	38.2	43.5	5.3	319.0	275.0	
7	233.215	V	44.6	-20.7	23.9	46.0	22.1	136.0	105.0	
8	276.016	V	49.3	-19.6	29.7	46.0	16.3	150.0	83.0	
9	342.340	H	39.2	-16.5	22.7	46.0	23.3	205.0	133.0	
10	437.521	V	42.6	-14.5	28.1	46.0	17.9	100.0	91.0	
11	479.959	V	40.5	-13.3	27.2	46.0	18.8	177.0	120.0	
12	775.688	H	35.3	-8.3	27.0	46.0	19.0	400.0	285.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

- IC Regulation ICES-003 Issue 7

■ Charge Mode

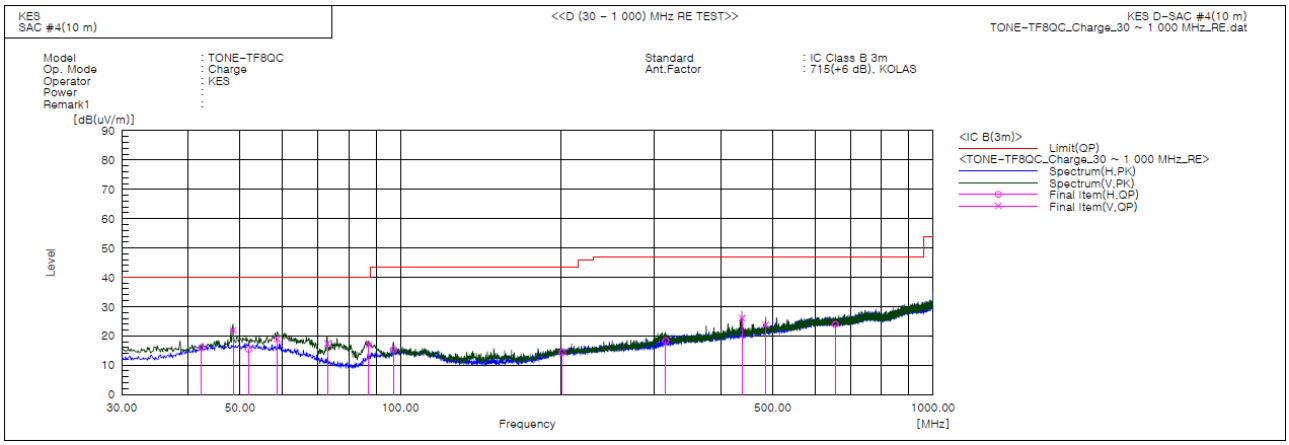

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	42.368	H	38.0	-22.1	15.9	40.0	24.1	400.0	48.0	
2	48.551	V	43.3	-21.4	21.9	40.0	18.1	116.0	212.0	
3	51.946	H	36.9	-21.5	15.4	40.0	24.6	376.0	195.0	
4	58.736	V	41.1	-22.2	18.9	40.0	21.1	100.0	203.0	
5	72.923	V	43.9	-26.5	17.4	40.0	22.6	125.0	353.0	
6	87.230	V	42.6	-25.6	17.0	40.0	23.0	100.0	14.0	
7	97.173	H	38.9	-23.5	15.4	43.5	28.1	390.0	339.0	
8	201.205	H	36.0	-21.7	14.3	43.5	29.2	335.0	343.0	
9	314.695	H	36.4	-18.1	18.3	47.0	28.7	400.0	56.0	
10	437.521	V	40.6	-14.5	26.1	47.0	20.9	100.0	4.0	
11	485.294	V	36.9	-13.1	23.8	47.0	23.2	100.0	78.0	
12	655.408	H	33.5	-9.6	23.9	47.0	23.1	400.0	67.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

■ Operating Mode

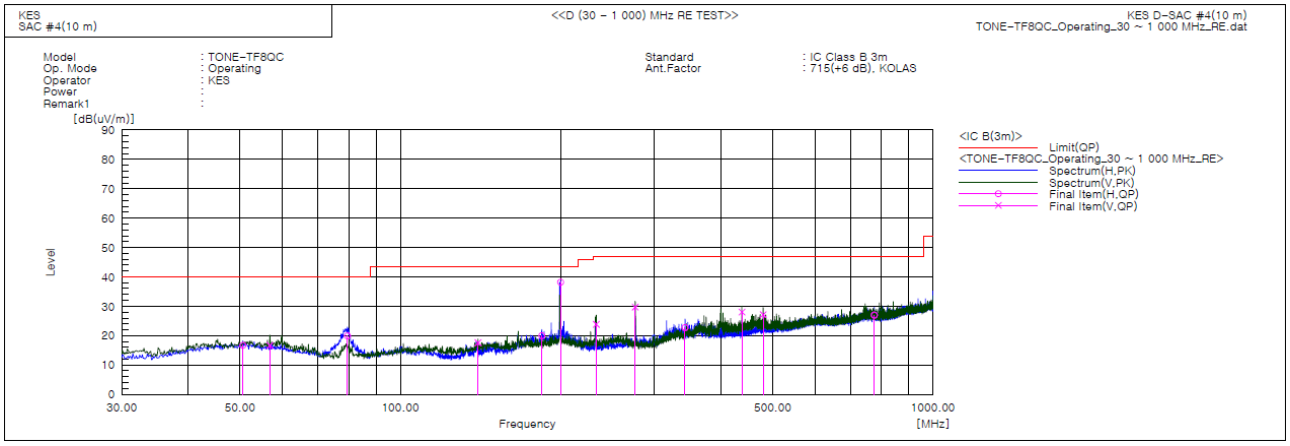

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	50.613	H	38.1	-21.4	16.7	40.0	23.3	400.0	210.0	
2	56.918	V	38.7	-22.0	16.7	40.0	23.3	100.0	139.0	
3	79.591	H	48.0	-28.1	19.9	40.0	20.1	400.0	146.0	
4	139.853	V	43.7	-26.1	17.6	43.5	25.9	100.0	54.0	
5	184.230	H	43.8	-23.8	20.0	43.5	23.5	369.0	354.0	
6	199.871	H	59.9	-21.7	38.2	43.5	5.3	319.0	275.0	
7	233.215	V	44.6	-20.7	23.9	47.0	23.1	136.0	105.0	
8	276.016	V	49.3	-19.6	29.7	47.0	17.3	150.0	83.0	
9	342.340	H	39.2	-16.5	22.7	47.0	24.3	205.0	133.0	
10	437.521	V	42.6	-14.5	28.1	47.0	18.9	100.0	91.0	
11	479.959	V	40.5	-13.3	27.2	47.0	19.8	177.0	120.0	
12	775.688	H	35.3	-8.3	27.0	47.0	20.0	400.0	285.0	

♦ Calculation – SAC #4(10 m)
Result(QP) [dB(㎶/m)] = (Reading(QP)[dB(㎶)] + c.f[dB(1/m)]
Margin(QP)[dB] = Limit[dB(㎶/m)] - Result(QP) [dB(㎶/m)]
Reading(QP) : Reading value, Result(QP) : Reading value + Factor value
Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Emissions(Above 1 ㎓)

■ Charge Mode

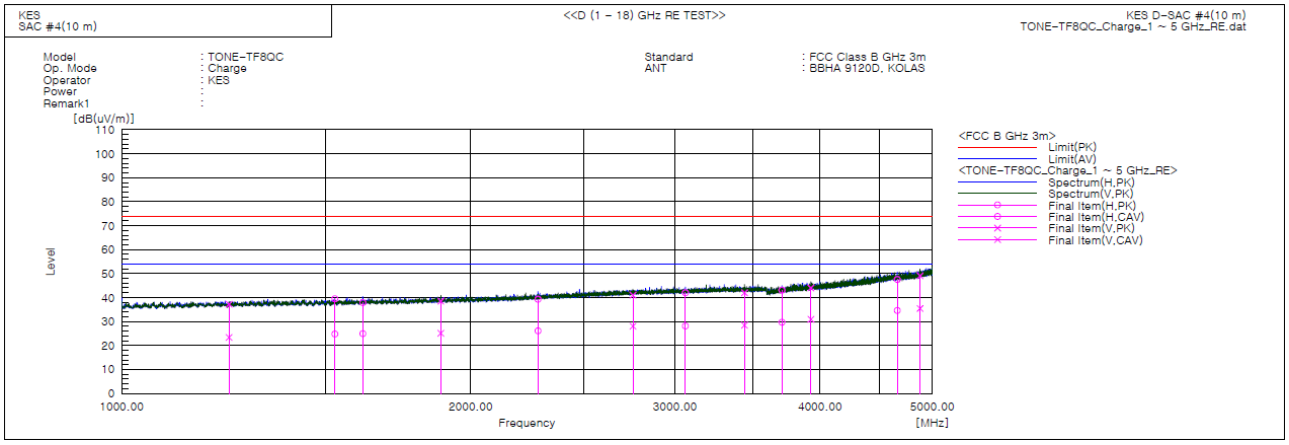

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1237.371	V	42.0	28.1	-4.7	37.3	23.4	74.0	54.0	36.7	30.6	105.0	71.0	
2	1527.206	H	42.7	28.0	-3.2	39.5	24.8	74.0	54.0	34.5	29.2	400.0	161.0	
3	1614.029	H	40.7	27.8	-2.8	37.9	25.0	74.0	54.0	36.1	29.0	400.0	93.0	
4	1884.261	V	40.3	26.9	-1.8	38.5	25.1	74.0	54.0	35.5	28.9	129.0	233.0	
5	2285.599	H	39.1	25.9	0.2	39.3	26.1	74.0	54.0	34.7	27.9	360.0	29.0	
6	2758.739	V	38.6	25.7	2.4	41.0	28.1	74.0	54.0	33.0	25.9	120.0	101.0	
7	3062.890	H	38.6	24.8	3.4	42.0	28.2	74.0	54.0	32.0	25.8	400.0	131.0	
8	3443.512	V	37.7	24.2	4.3	42.0	28.5	74.0	54.0	32.0	25.5	100.0	271.0	
9	3709.904	H	37.7	24.3	5.4	43.1	29.7	74.0	54.0	30.9	24.3	396.0	11.0	
10	3928.777	V	37.3	24.3	6.7	44.0	31.0	74.0	54.0	30.0	23.0	100.0	233.0	
11	4663.509	H	36.2	23.3	11.3	47.5	34.6	74.0	54.0	26.5	19.4	400.0	41.0	
12	4879.136	V	36.4	22.8	12.7	49.1	35.5	74.0	54.0	24.9	18.5	150.0	70.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

■ Operating Mode

- (1 ~ 5) GHz

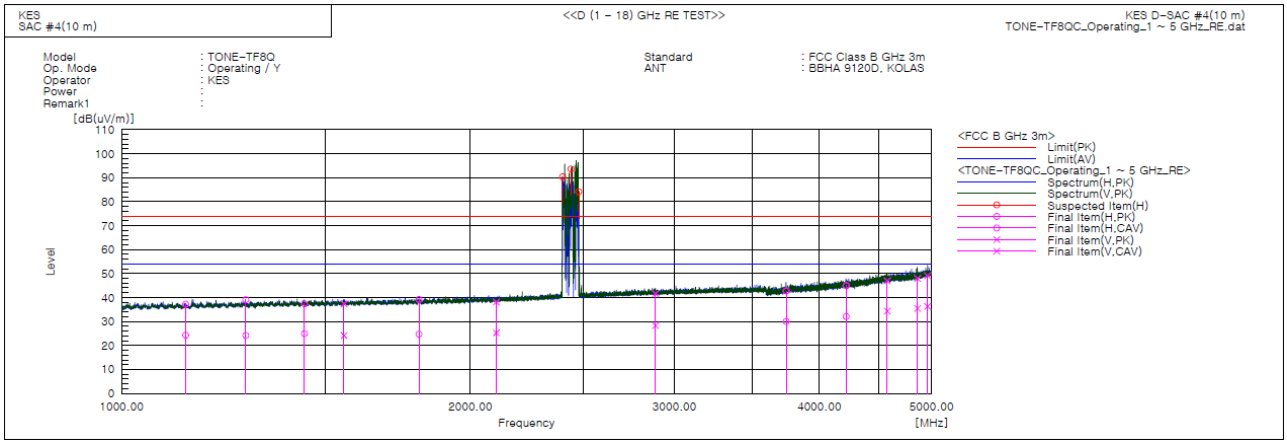

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1135.711	H	42.6	29.6	-5.3	37.3	24.3	74.0	54.0	36.7	29.7	400.0	335.0	
2	1279.663	H	43.6	28.7	-4.5	39.1	24.2	74.0	54.0	34.9	29.8	400.0	45.0	
3	1438.123	H	41.0	28.6	-3.6	37.4	25.0	74.0	54.0	36.6	29.0	299.0	75.0	
4	1555.199	V	40.5	27.3	-3.1	37.4	24.2	74.0	54.0	36.6	29.8	119.0	171.0	
5	1805.516	H	41.3	26.8	-2.1	39.2	24.7	74.0	54.0	34.8	29.3	400.0	82.0	
6	2105.322	V	38.9	26.1	-0.8	38.1	25.3	74.0	54.0	35.9	28.7	100.0	178.0	
7	2888.802	V	38.7	25.4	2.9	41.6	28.3	74.0	54.0	32.4	25.7	106.0	212.0	
8	3744.739	H	37.0	24.3	5.7	42.7	30.0	74.0	54.0	31.3	24.0	396.0	124.0	
9	4218.535	H	36.5	23.6	8.5	45.0	32.1	74.0	54.0	29.0	21.9	300.0	23.0	
10	4578.528	V	36.1	23.5	10.9	47.0	34.4	74.0	54.0	27.0	19.6	156.0	197.0	
11	4860.632	V	35.5	23.0	12.5	48.0	35.5	74.0	54.0	26.0	18.5	288.0	104.0	
12	4960.009	V	35.6	22.8	13.5	49.1	36.3	74.0	54.0	24.9	17.7	100.0	219.0	
13	2402.000	H	--------	--------	0.8	--------	--------	74.0	54.0	--------	--------	100.0	120.0	
14	2442.000	H	--------	--------	1.0	--------	--------	74.0	54.0	--------	--------	100.0	71.0	
15	2480.500	H	--------	--------	1.2	--------	--------	74.0	54.0	--------	--------	100.0	30.0	

* Exclusion Bands

- Fundamental Frequency: 2.4 GHz Band

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

- (5 ~ 12,4) GHz

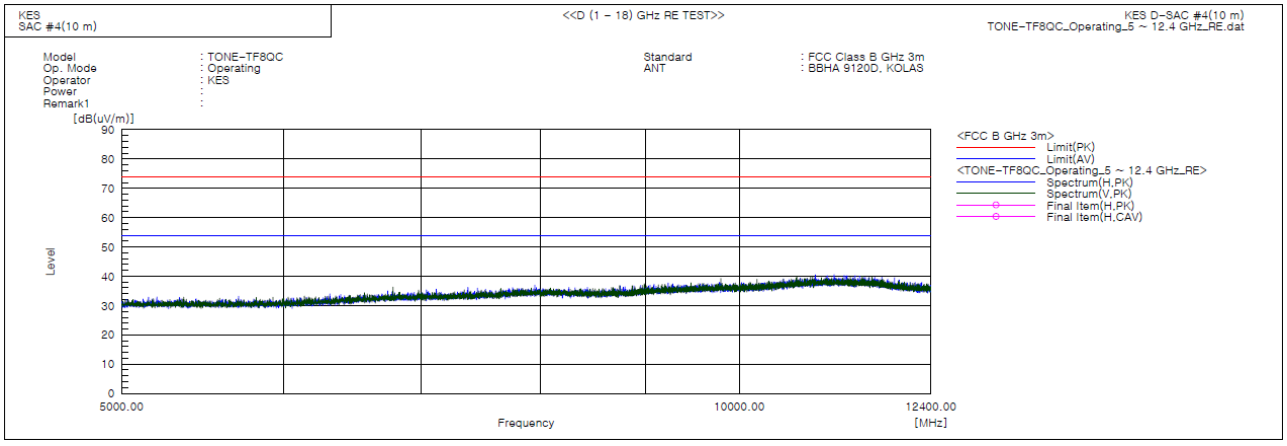

* No spurious emission were detected above 5 GHz.

♦ Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)]

Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Marjin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr