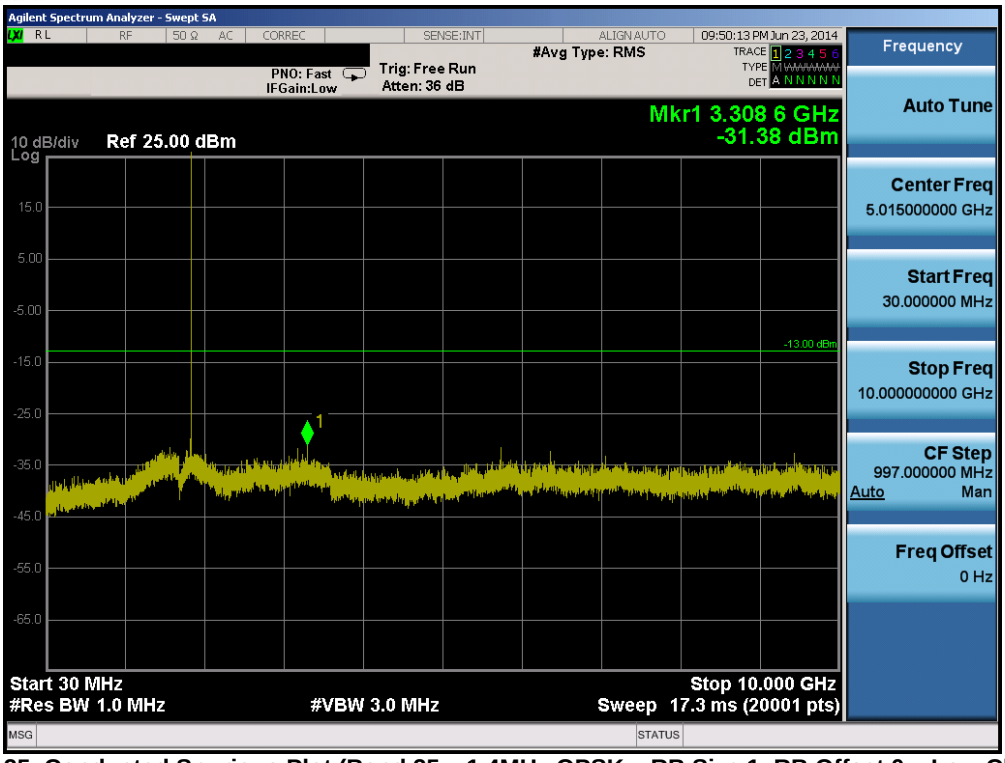

Plot 6-125. Conducted Spurious Plot (Band 25 – 1.4MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

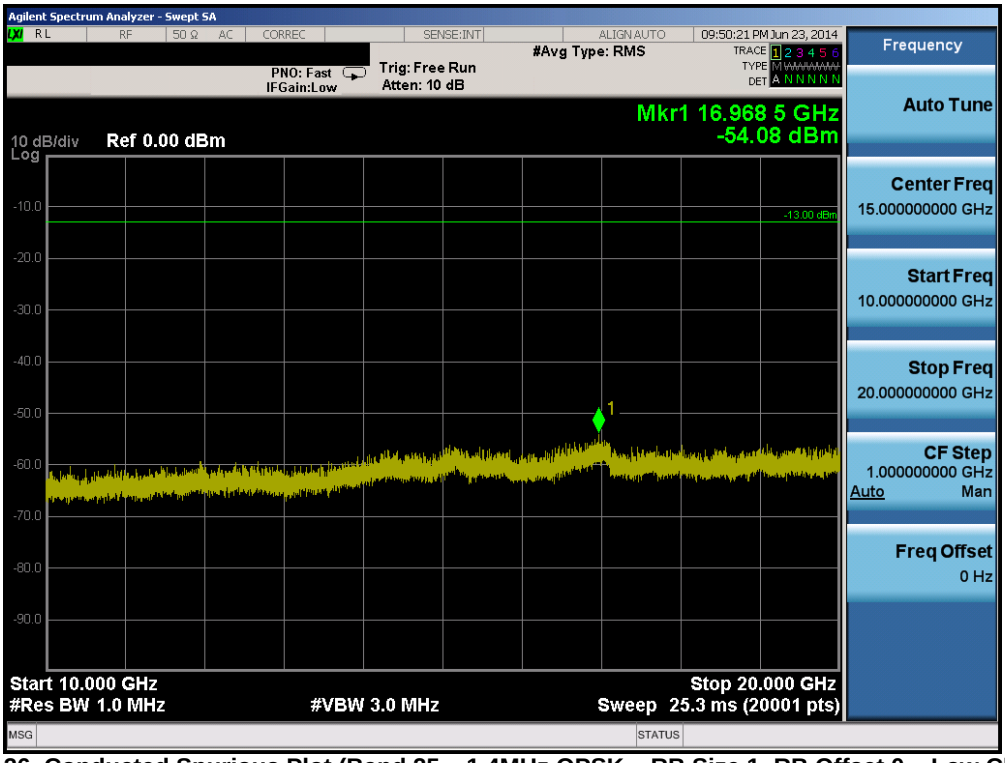

Plot 6-126. Conducted Spurious Plot (Band 25 – 1.4MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

© 2014 PCTEST Engineering Laboratory, Inc.

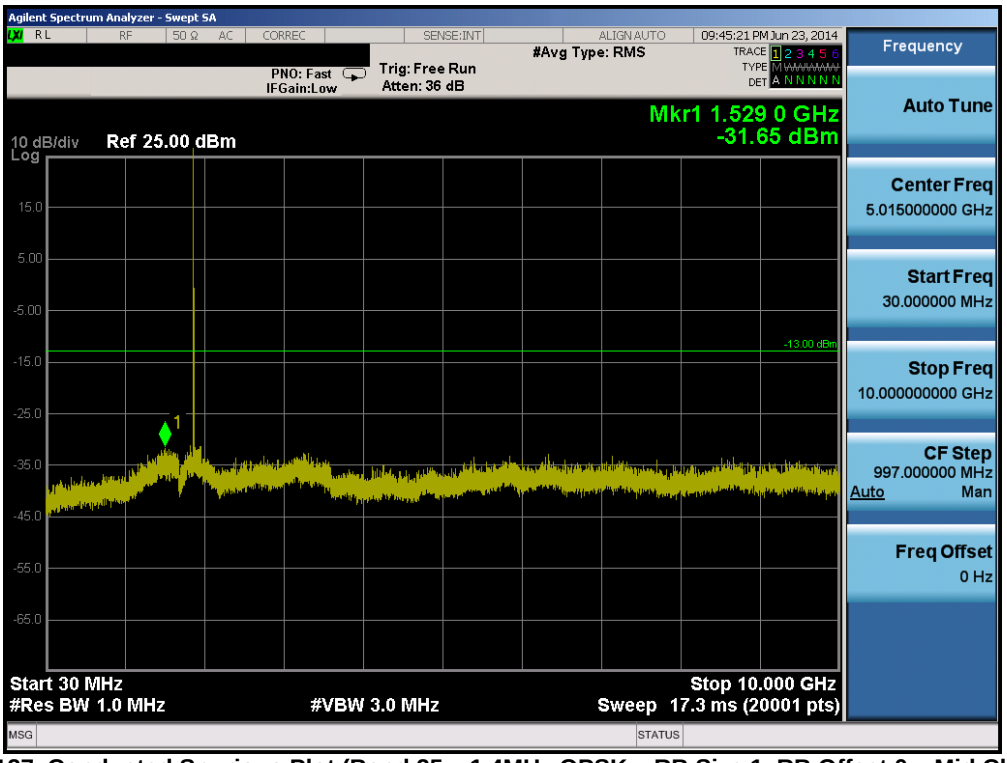

Plot 6-127. Conducted Spurious Plot (Band 25 – 1.4MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

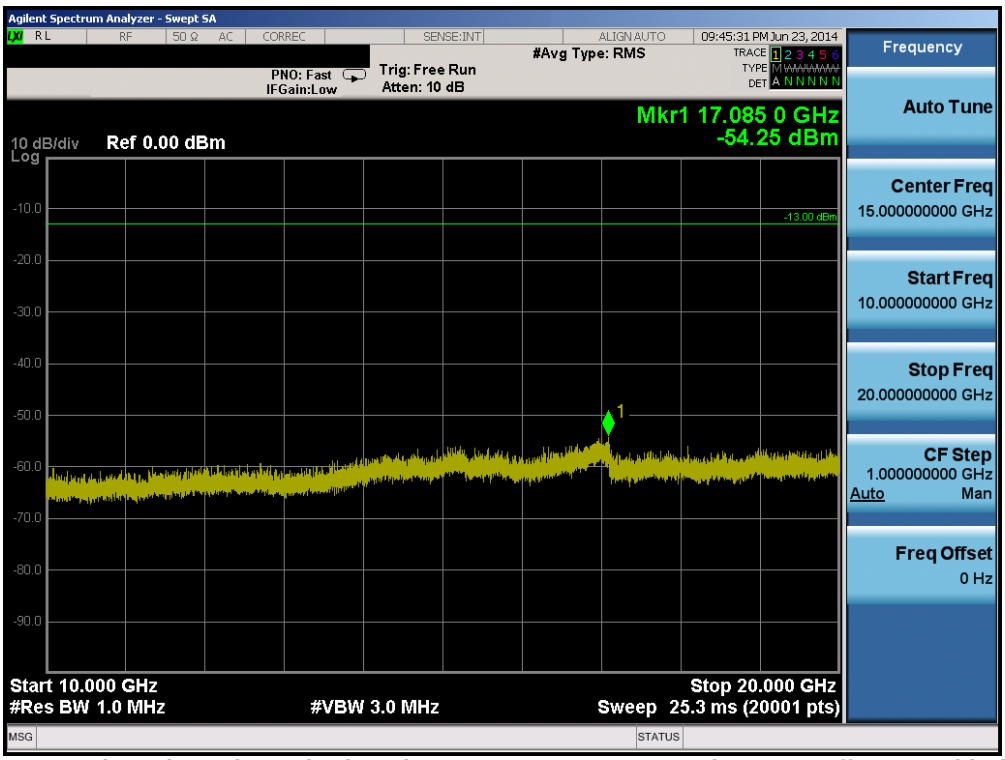

Plot 6-128. Conducted Spurious Plot (Band 25 – 1.4MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

© 2014 PCTEST Engineering Laboratory, Inc.

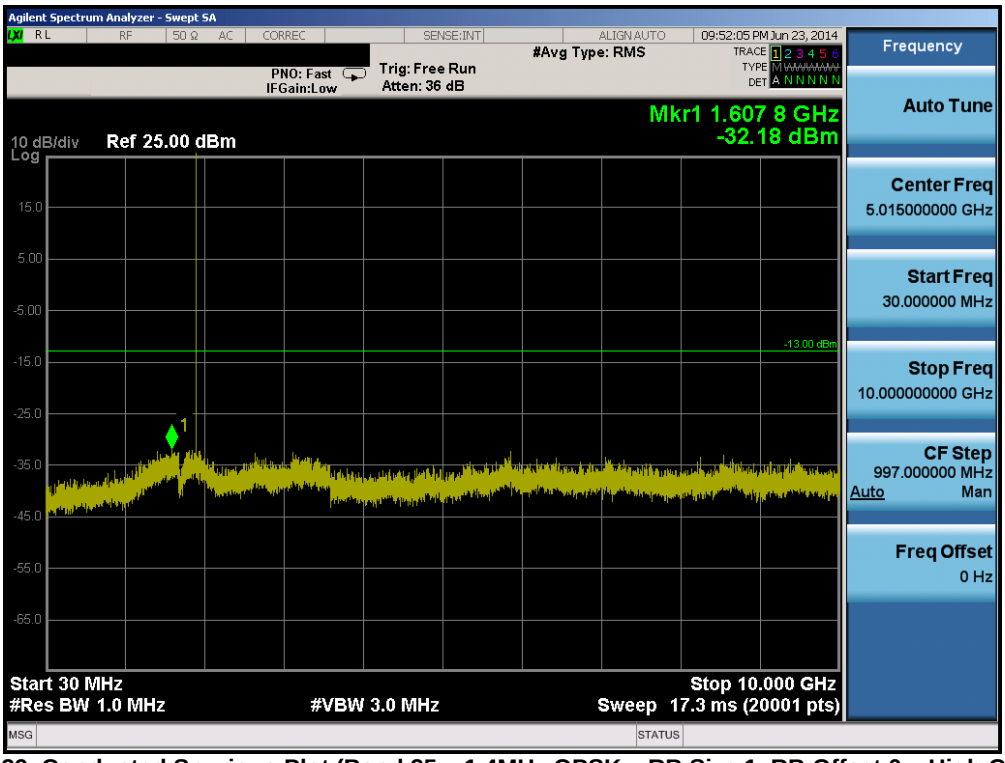

Plot 6-129. Conducted Spurious Plot (Band 25 – 1.4MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

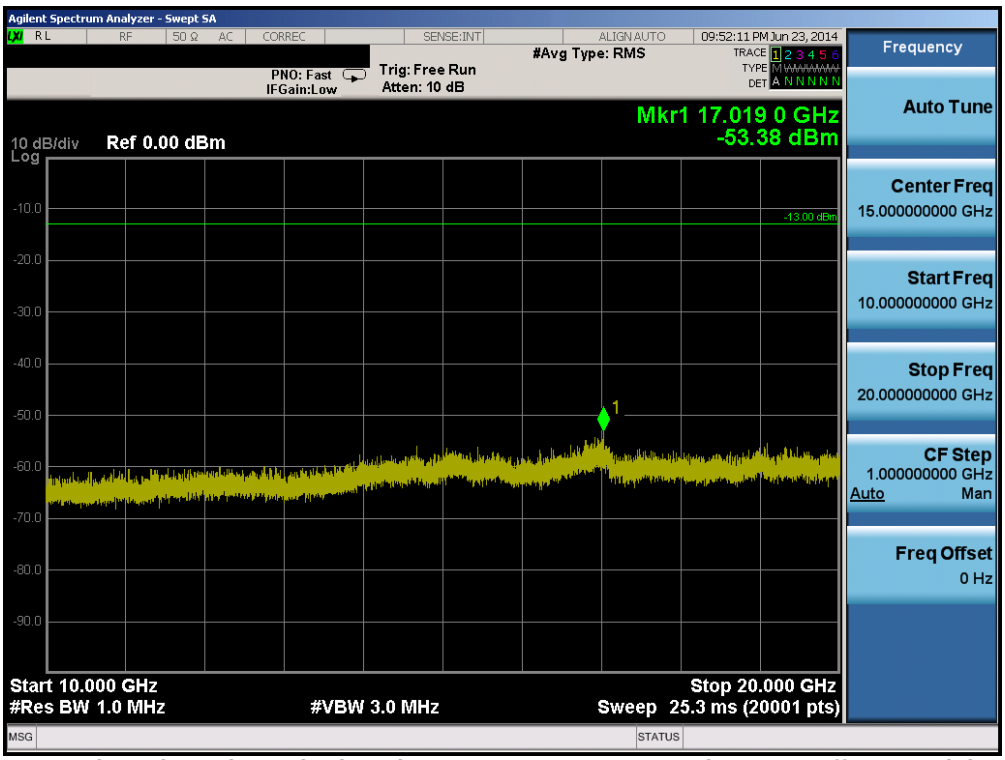

Plot 6-130. Conducted Spurious Plot (Band 25 – 1.4MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

© 2014 PCTEST Engineering Laboratory, Inc.

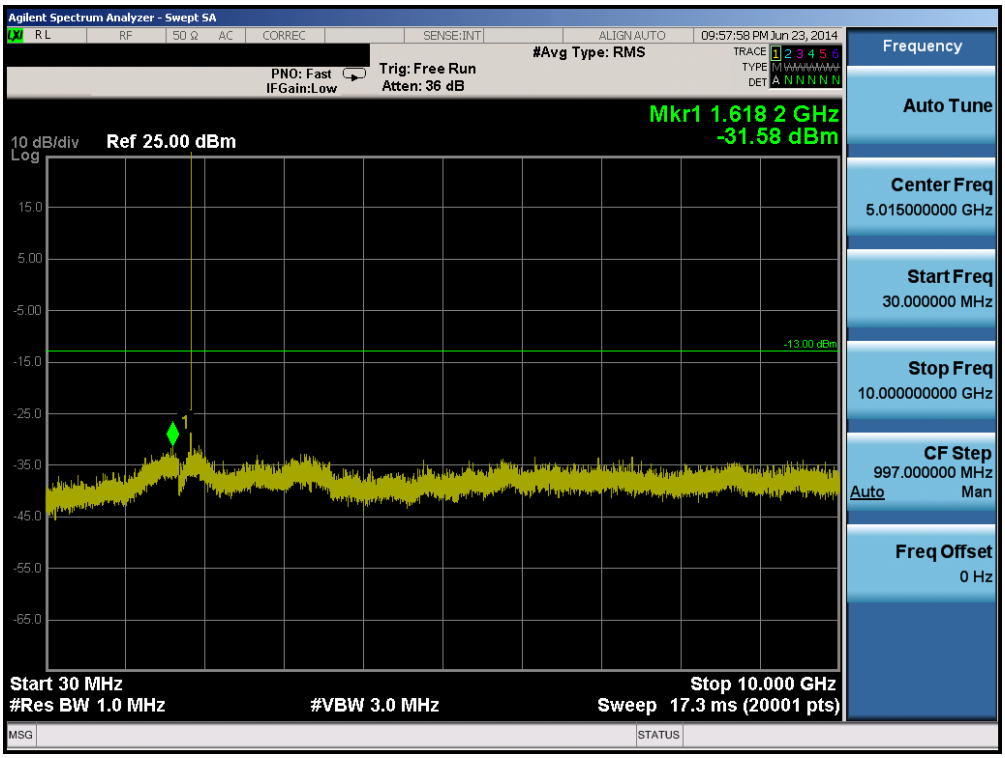

Plot 6-131. Conducted Spurious Plot (Band 25 – 3.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

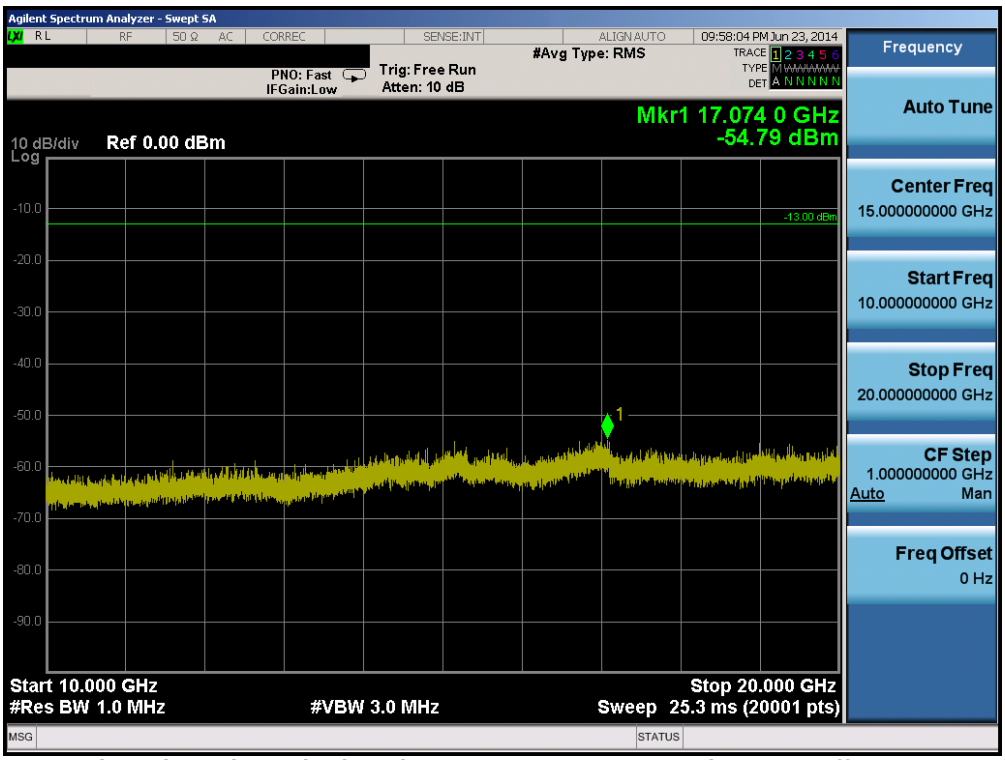

Plot 6-132. Conducted Spurious Plot (Band 25 – 3.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

© 2014 PCTEST Engineering Laboratory, Inc.

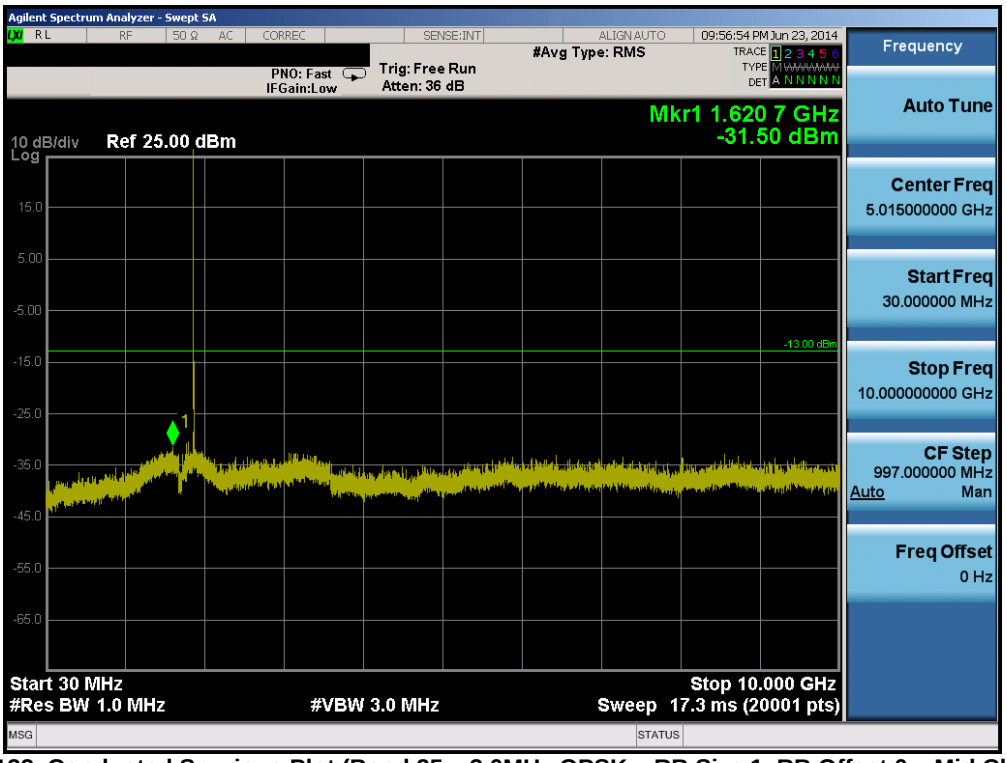

Plot 6-133. Conducted Spurious Plot (Band 25 – 3.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

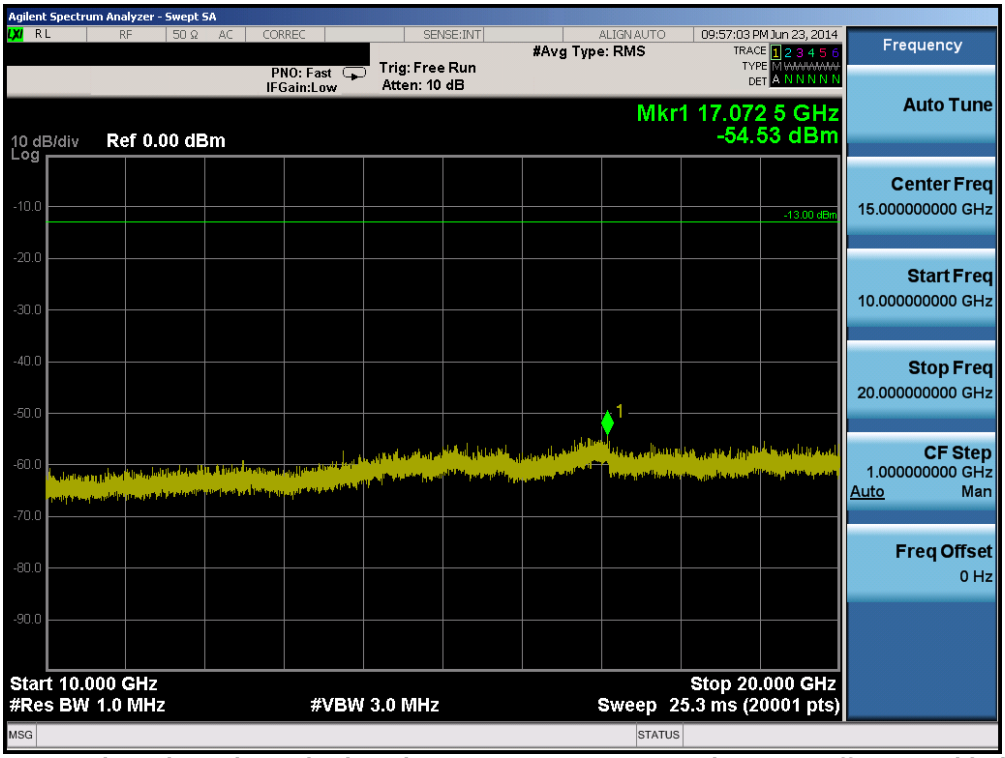

Plot 6-134. Conducted Spurious Plot (Band 25 – 3.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

© 2014 PCTEST Engineering Laboratory, Inc.

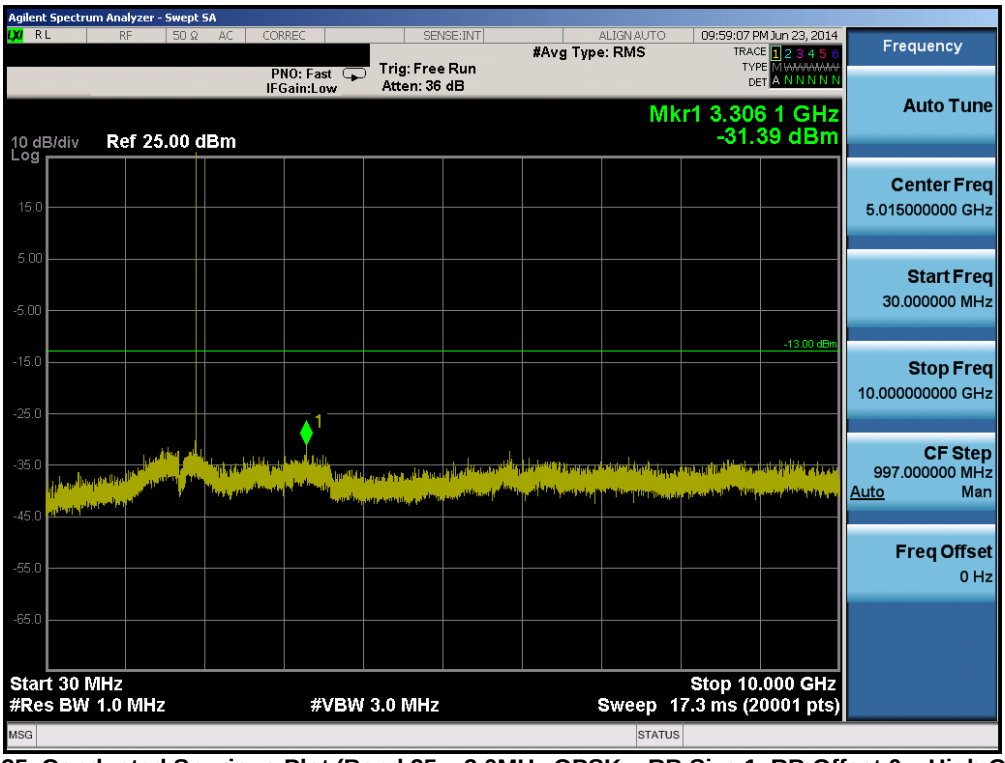

Plot 6-135. Conducted Spurious Plot (Band 25 – 3.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

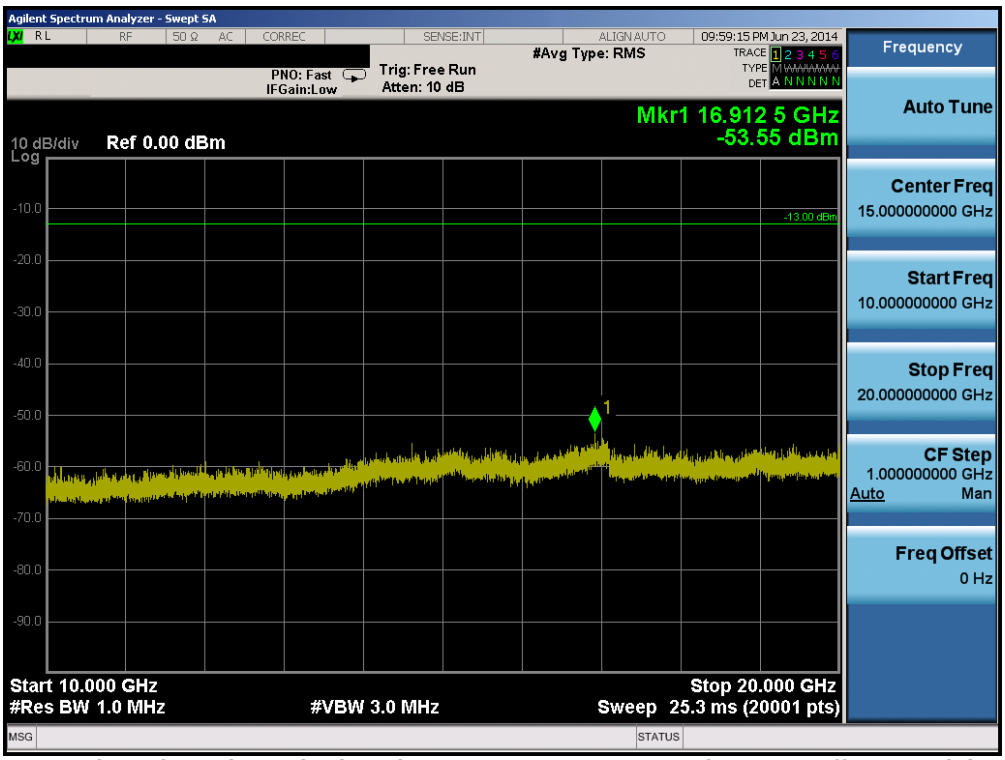

Plot 6-136. Conducted Spurious Plot (Band 25 – 3.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

© 2014 PCTEST Engineering Laboratory, Inc.

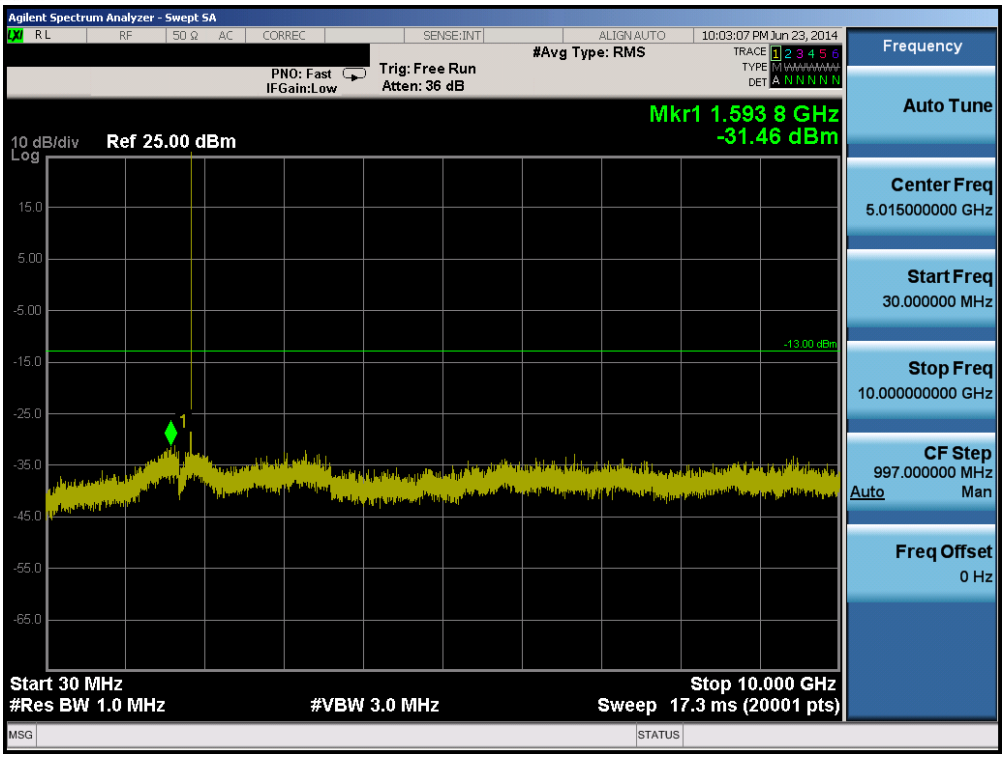

Plot 6-137. Conducted Spurious Plot (Band 25 – 5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

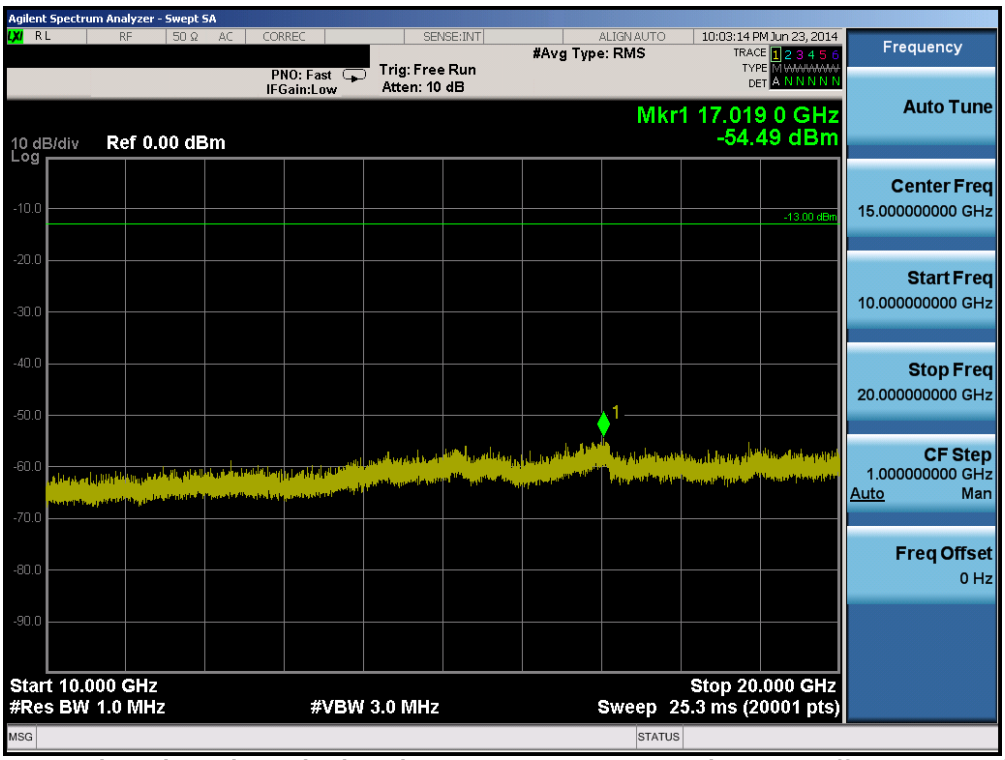

Plot 6-138. Conducted Spurious Plot (Band 25 – 5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

© 2014 PCTEST Engineering Laboratory, Inc.

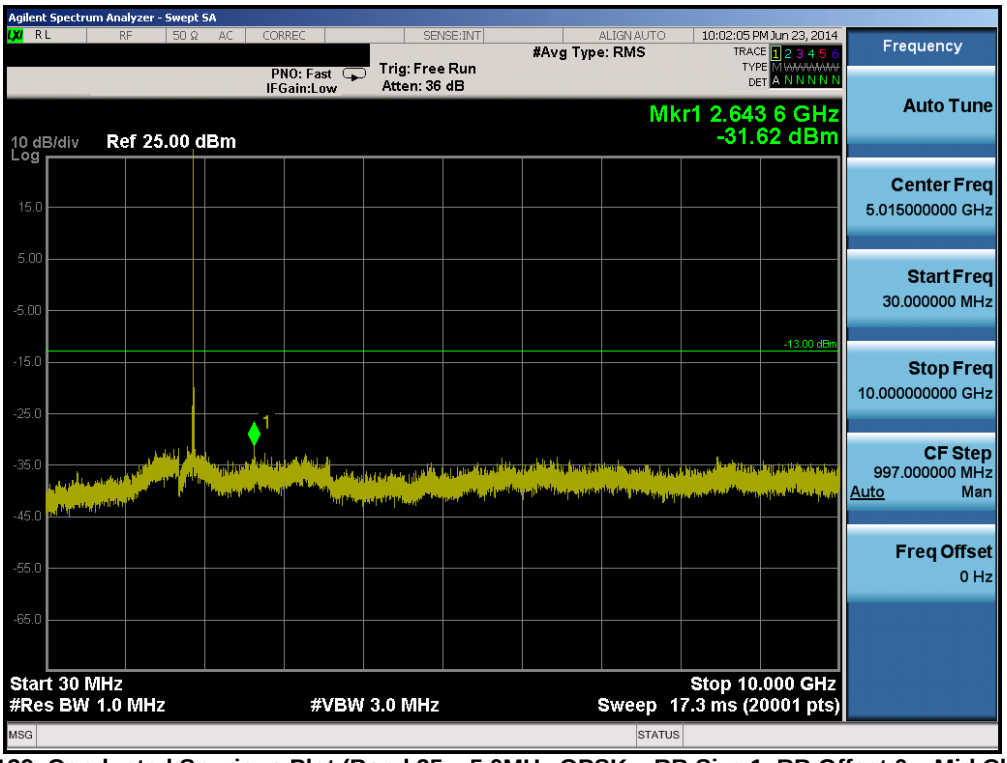

Plot 6-139. Conducted Spurious Plot (Band 25 – 5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

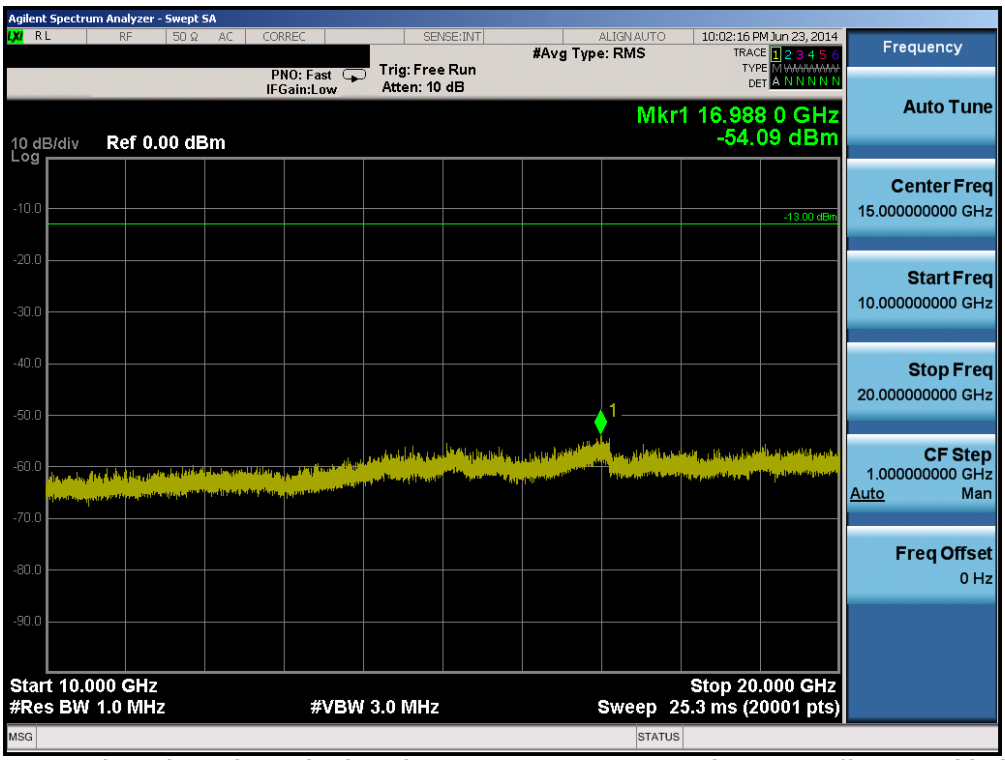

Plot 6-140. Conducted Spurious Plot (Band 25 – 5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

© 2014 PCTEST Engineering Laboratory, Inc.

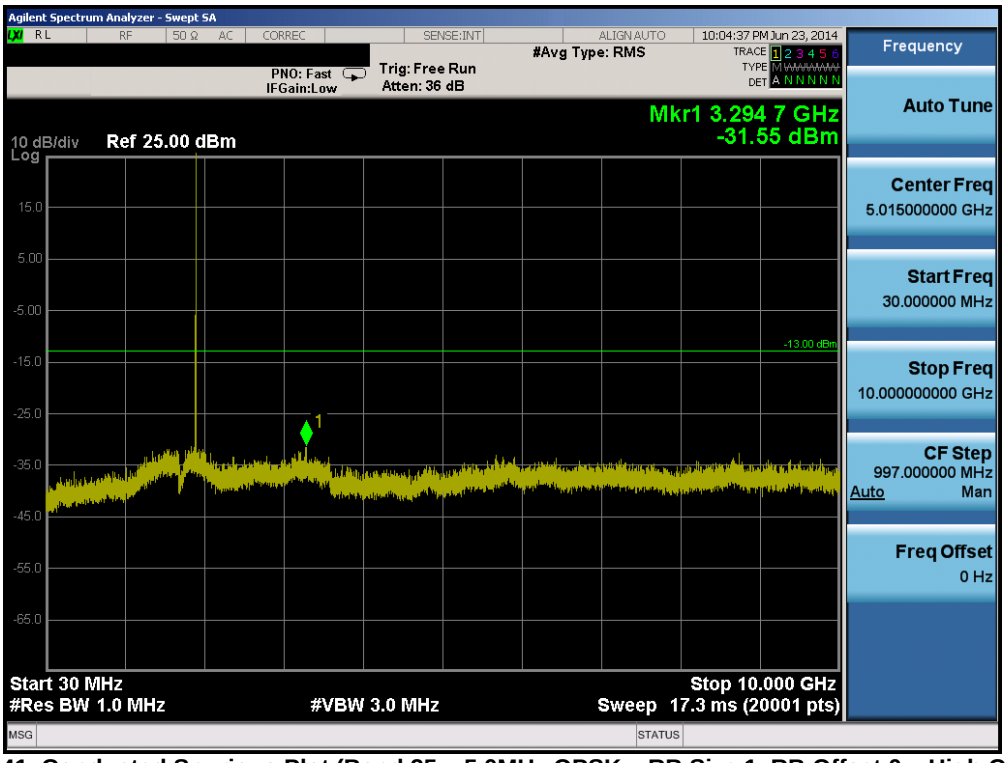

Plot 6-141. Conducted Spurious Plot (Band 25 – 5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

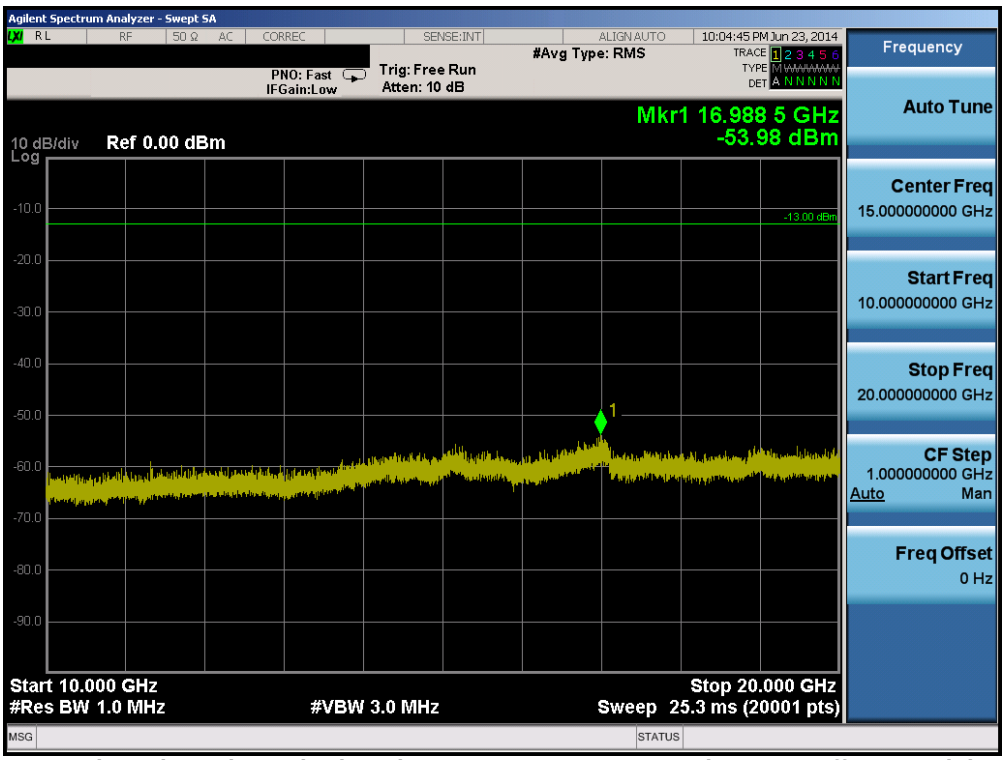

Plot 6-142. Conducted Spurious Plot (Band 25 – 5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

© 2014 PCTEST Engineering Laboratory, Inc.

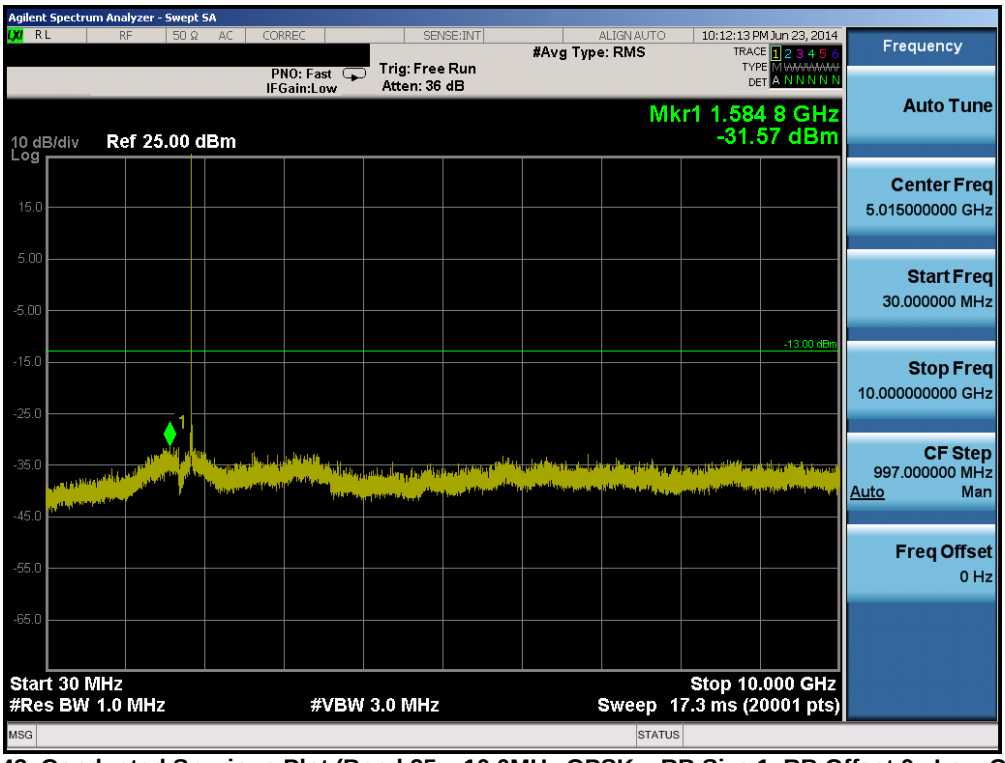

Plot 6-143. Conducted Spurious Plot (Band 25 – 10.0MHz QPSK – RB Size 1, RB Offset 0– Low Channel)

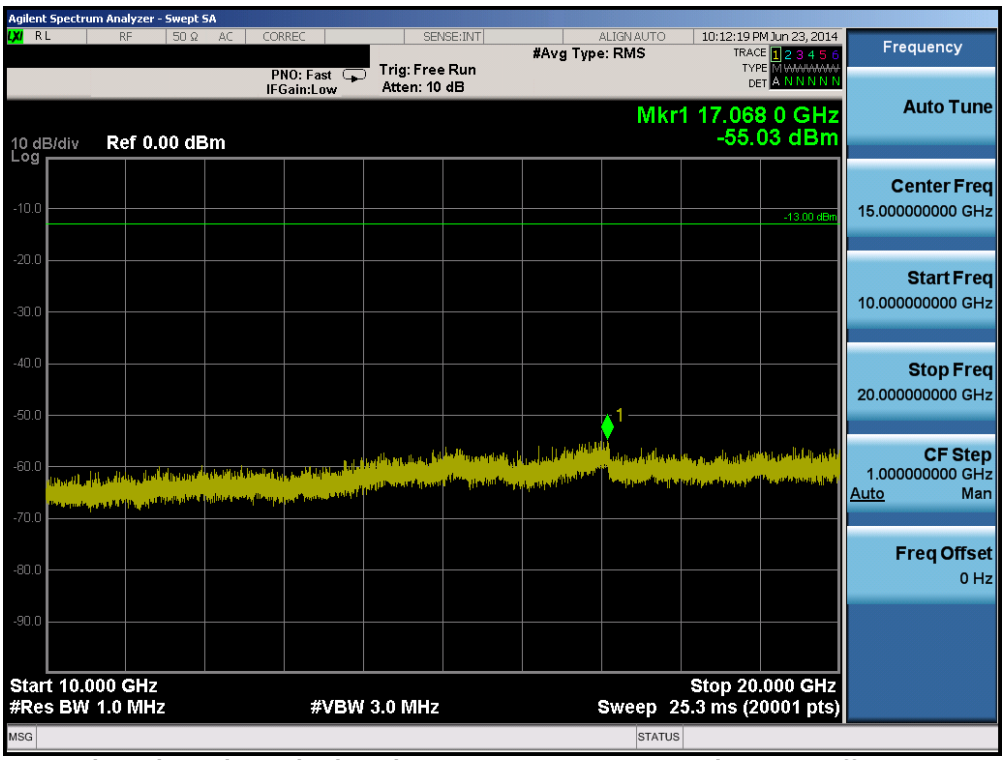

Plot 6-144. Conducted Spurious Plot (Band 25 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

© 2014 PCTEST Engineering Laboratory, Inc.

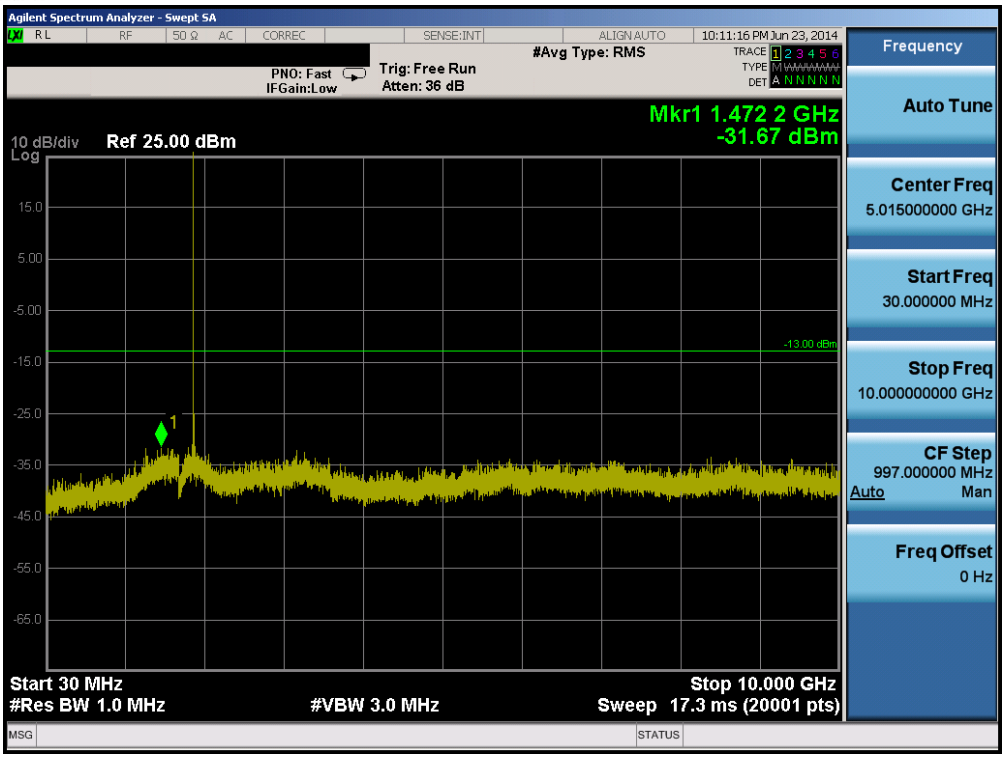

Plot 6-145. Conducted Spurious Plot (Band 25 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

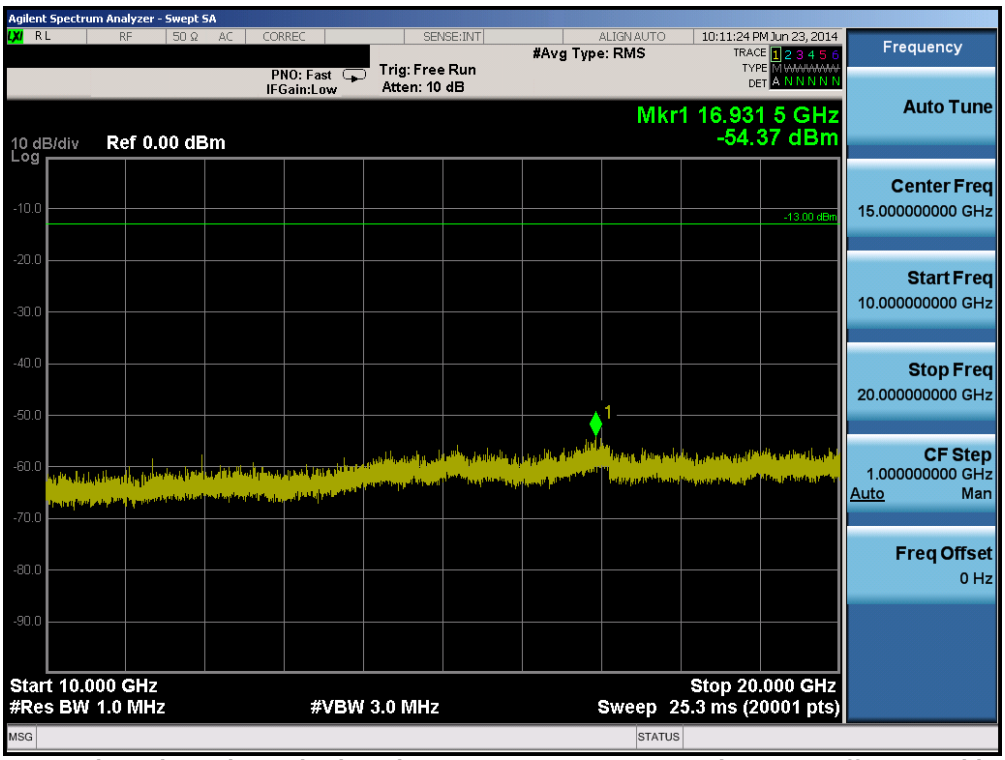

Plot 6-146. Conducted Spurious Plot (Band 25 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

© 2014 PCTEST Engineering Laboratory, Inc.

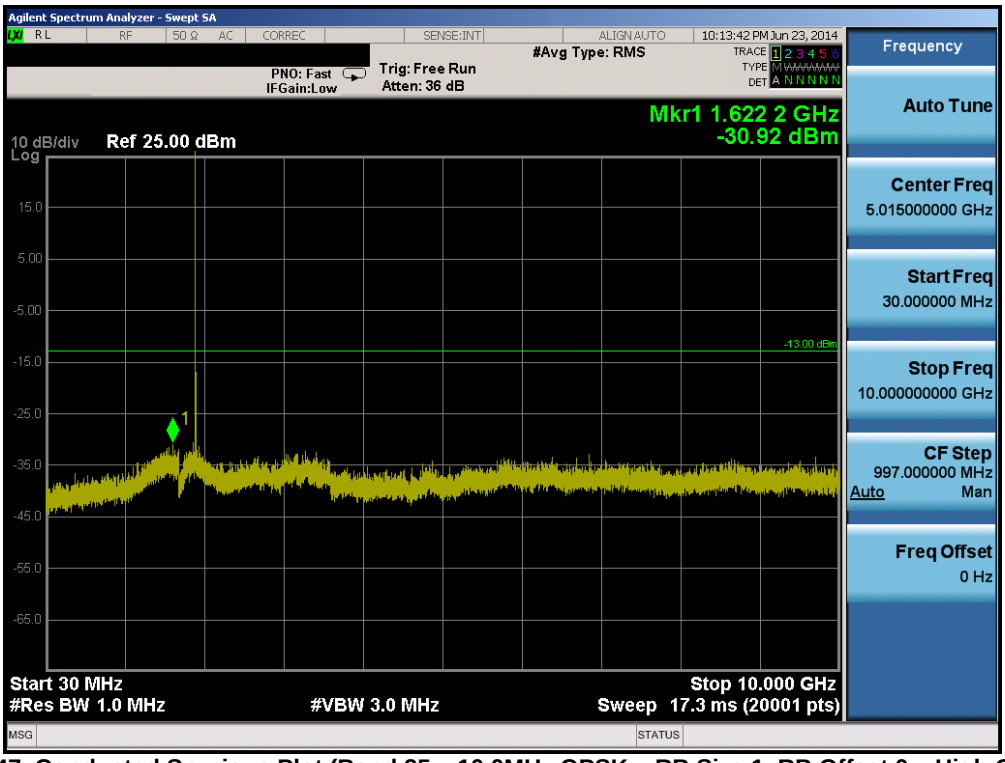

Plot 6-147. Conducted Spurious Plot (Band 25 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

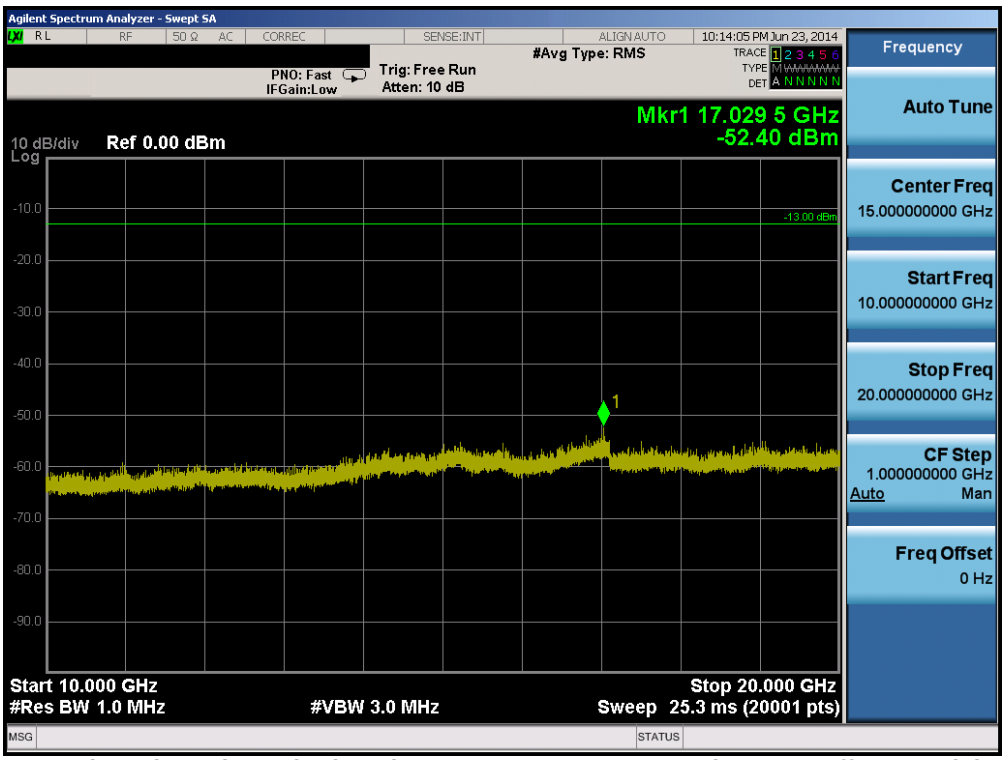

Plot 6-148. Conducted Spurious Plot (Band 25 – 10.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

© 2014 PCTEST Engineering Laboratory, Inc.

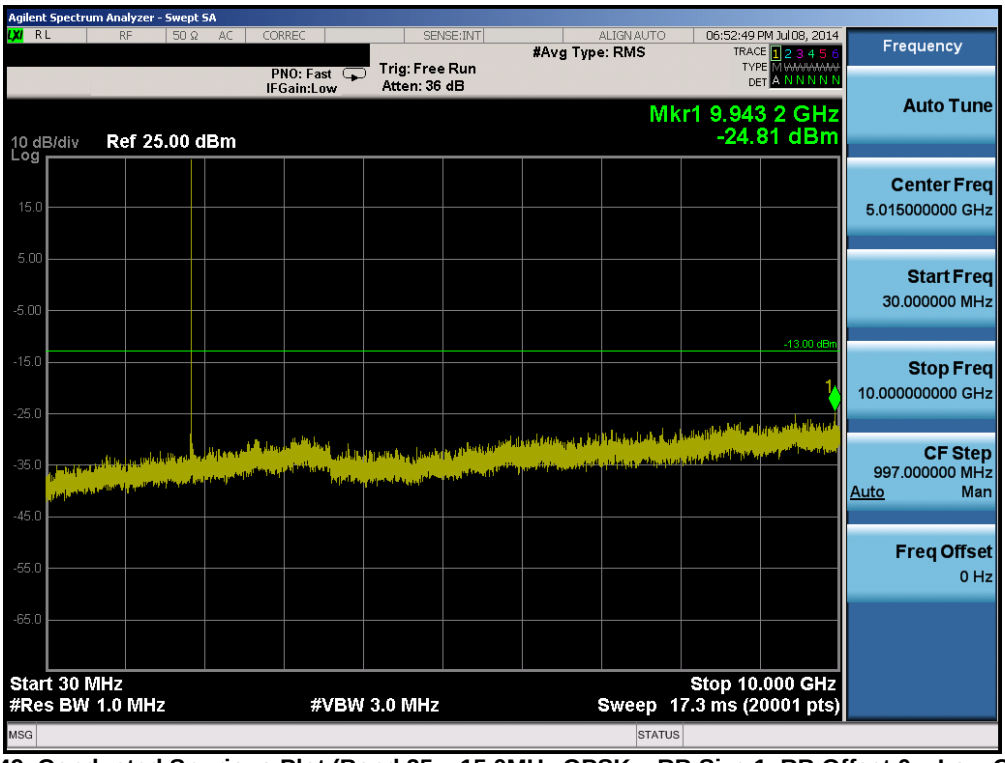

Plot 6-149. Conducted Spurious Plot (Band 25 – 15.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

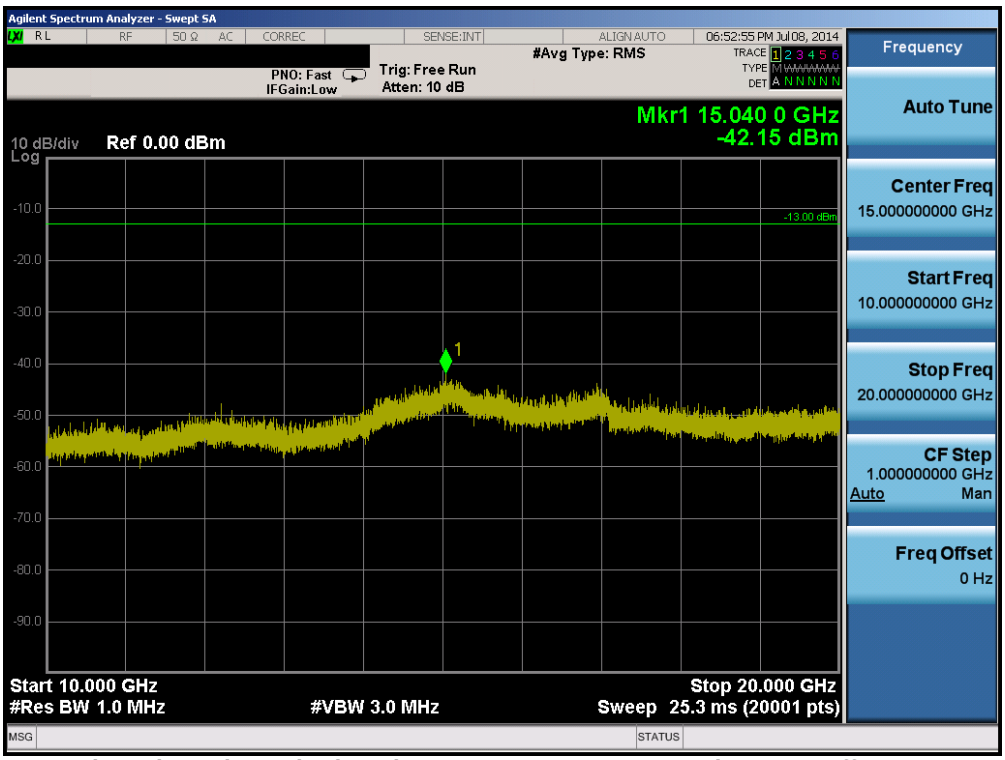

Plot 6-150. Conducted Spurious Plot (Band 25 – 15.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

© 2014 PCTEST Engineering Laboratory, Inc.

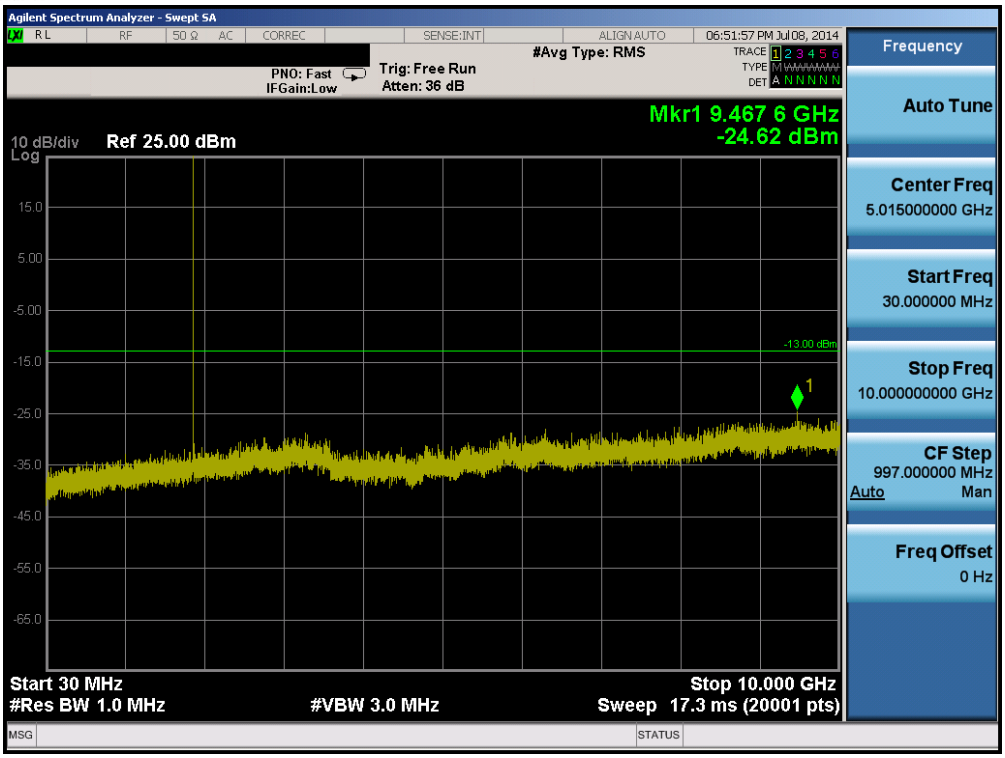

Plot 6-151. Conducted Spurious Plot (Band 25 – 15.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

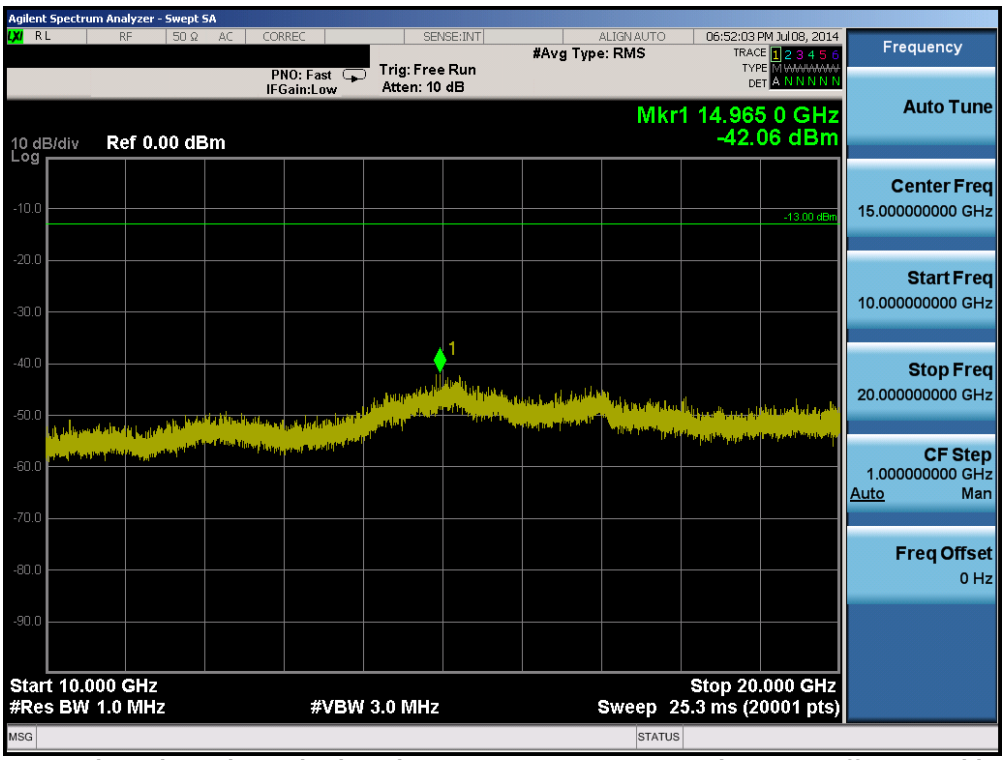

Plot 6-152. Conducted Spurious Plot (Band 25 – 15.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

© 2014 PCTEST Engineering Laboratory, Inc.

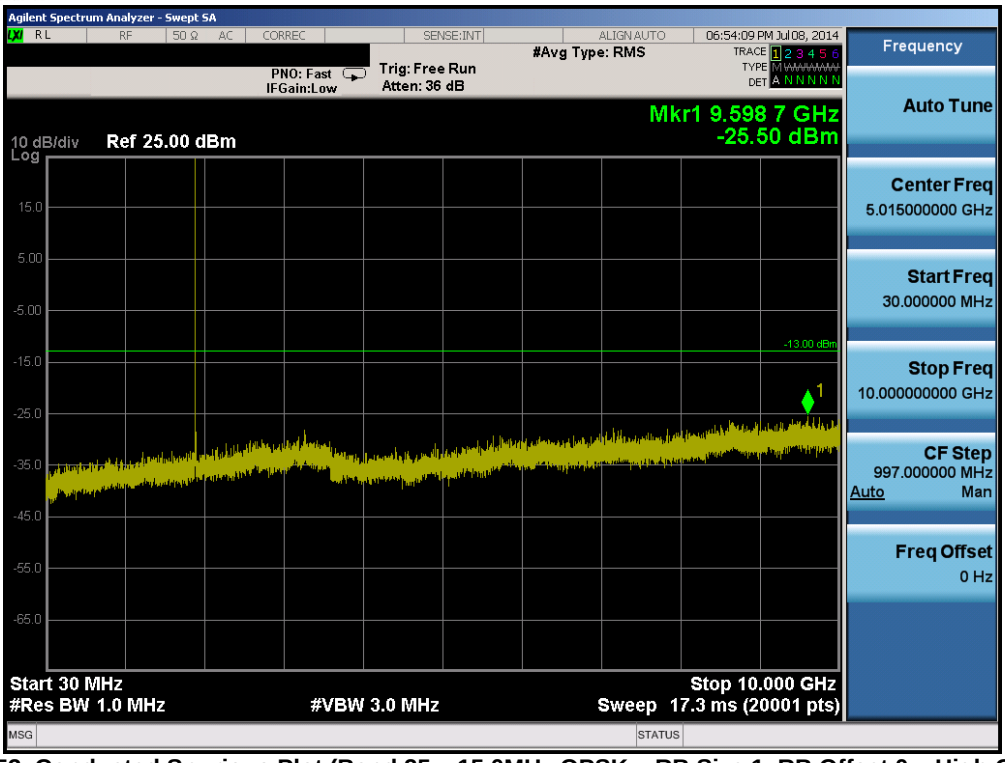

Plot 6-153. Conducted Spurious Plot (Band 25 – 15.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

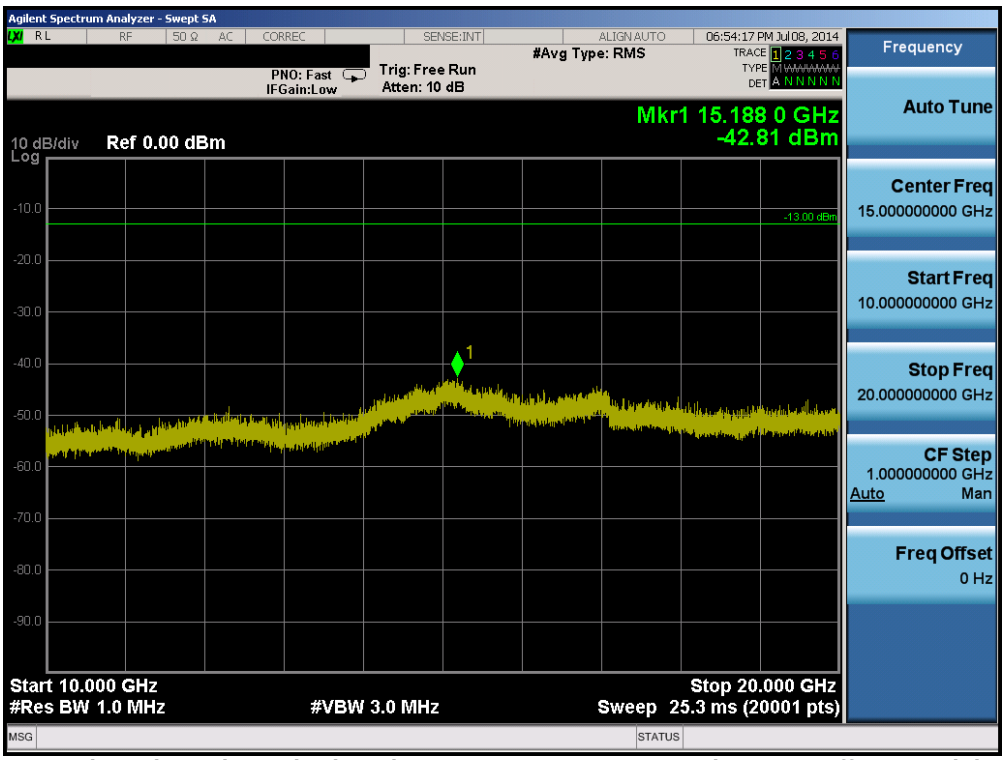

Plot 6-154. Conducted Spurious Plot (Band 25 – 15.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

© 2014 PCTEST Engineering Laboratory, Inc.

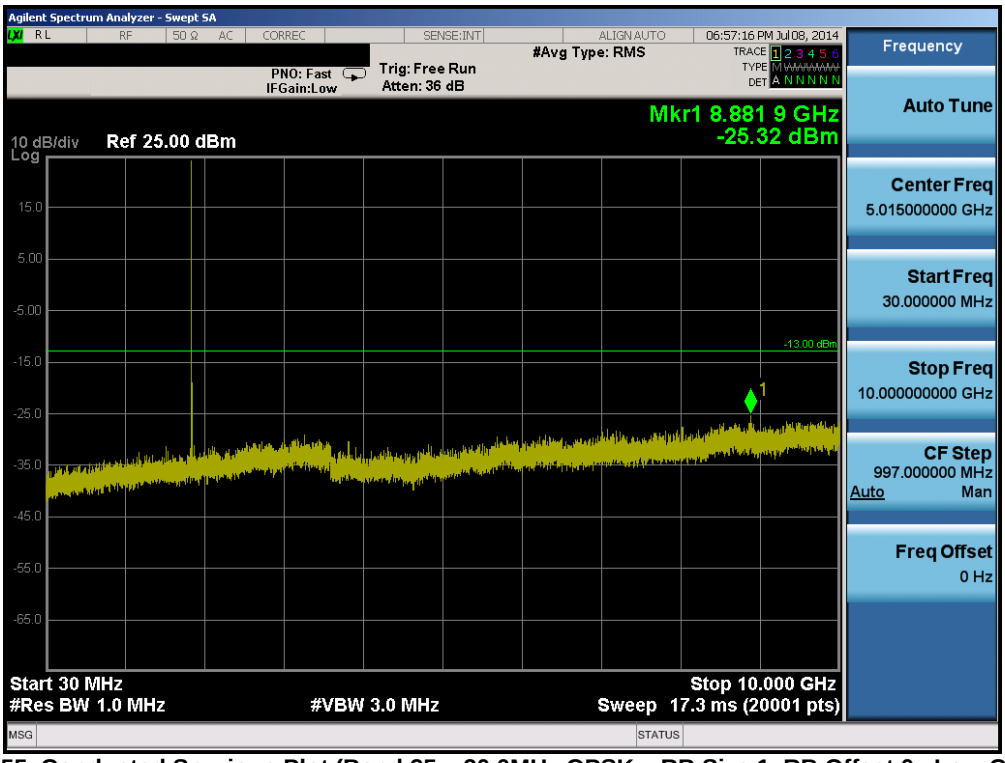

Plot 6-155. Conducted Spurious Plot (Band 25 – 20.0MHz QPSK – RB Size 1, RB Offset 0– Low Channel)

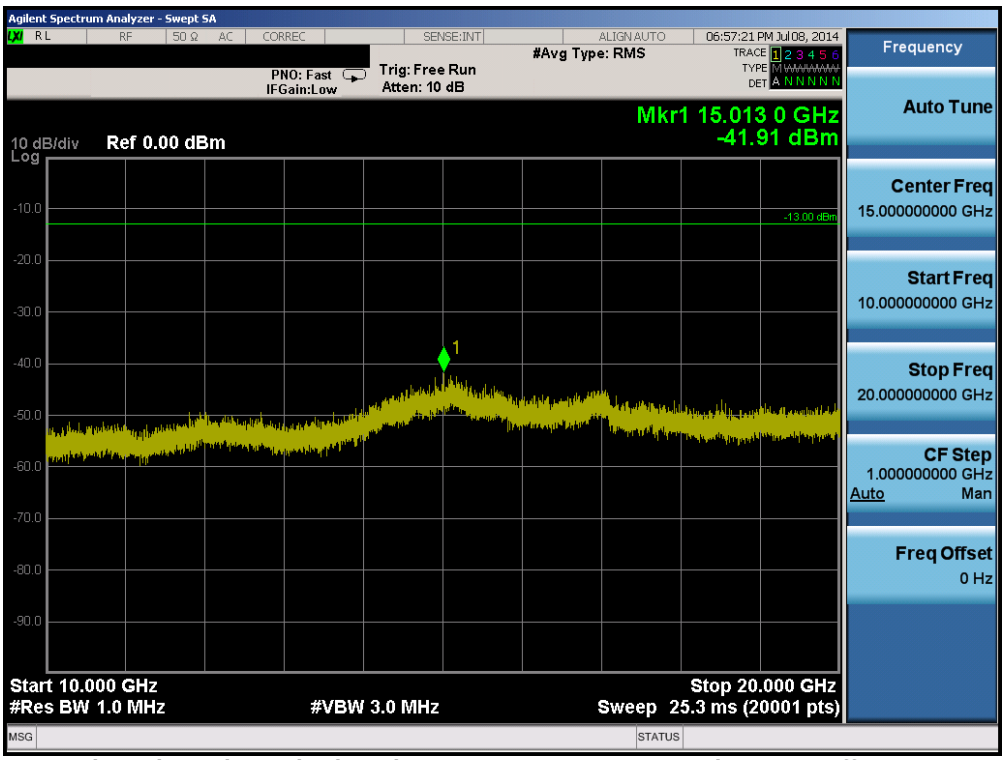

Plot 6-156. Conducted Spurious Plot (Band 25 – 20.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

© 2014 PCTEST Engineering Laboratory, Inc.

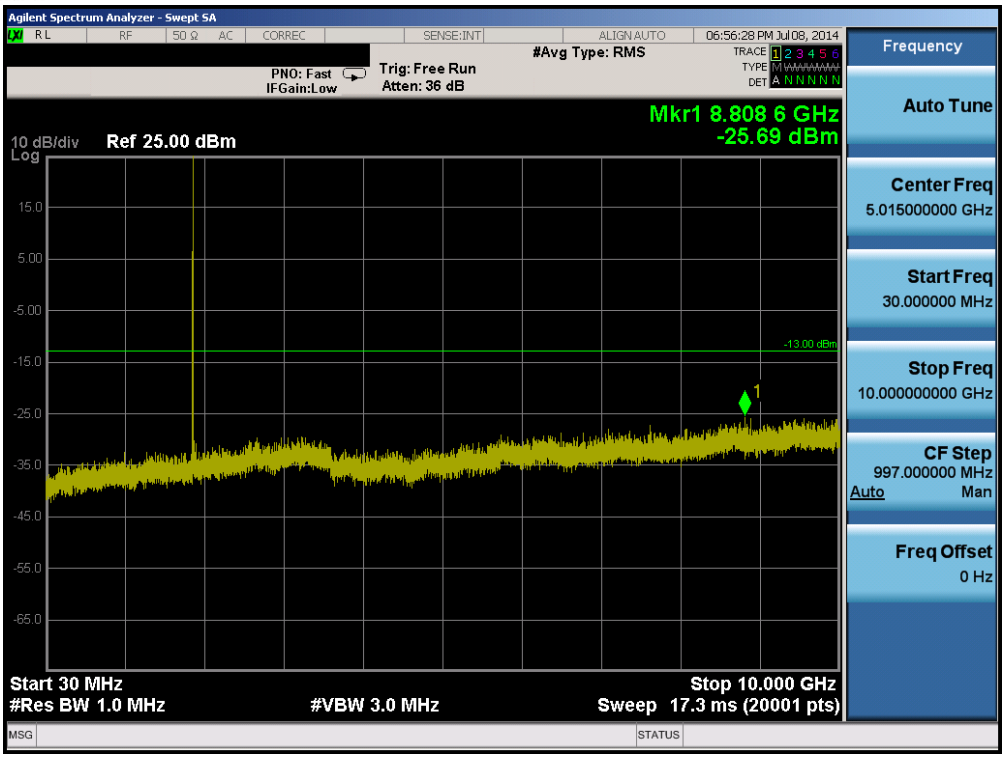

Plot 6-157. Conducted Spurious Plot (Band 25 – 20.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

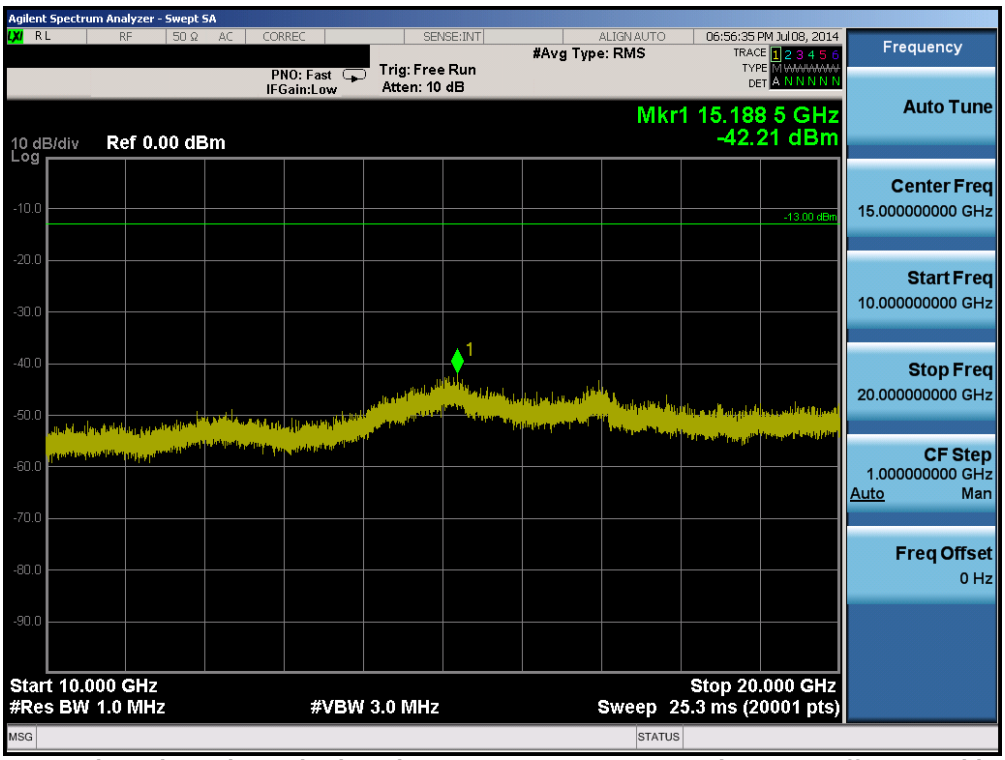

Plot 6-158. Conducted Spurious Plot (Band 25 – 20.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

© 2014 PCTEST Engineering Laboratory, Inc.

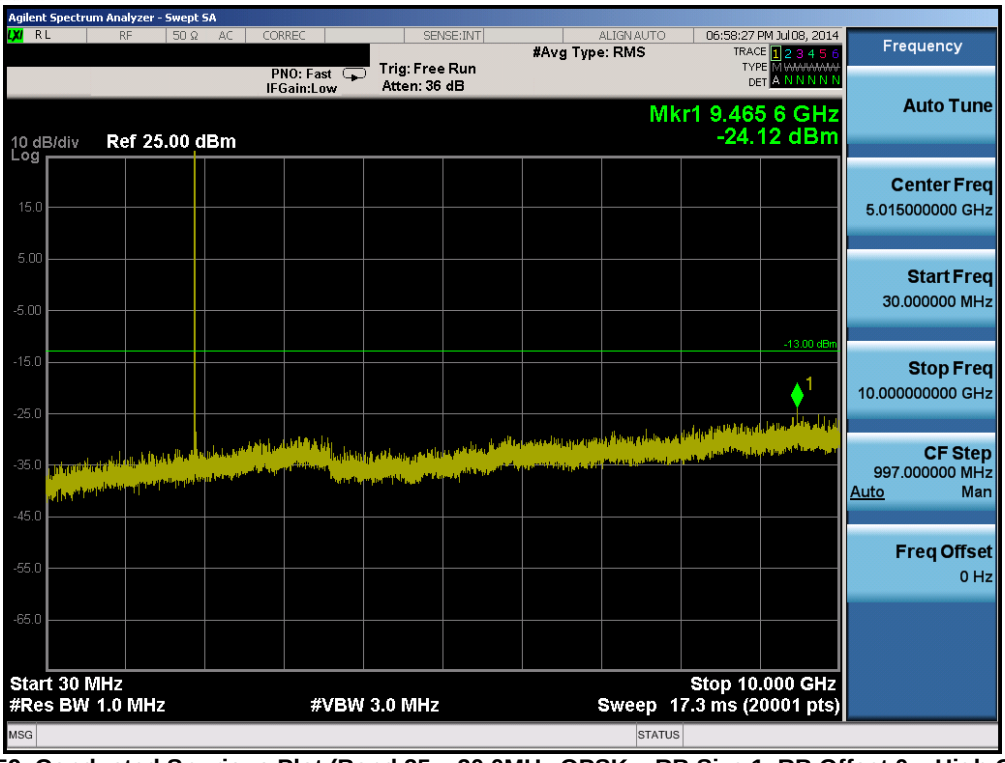

Plot 6-159. Conducted Spurious Plot (Band 25 – 20.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

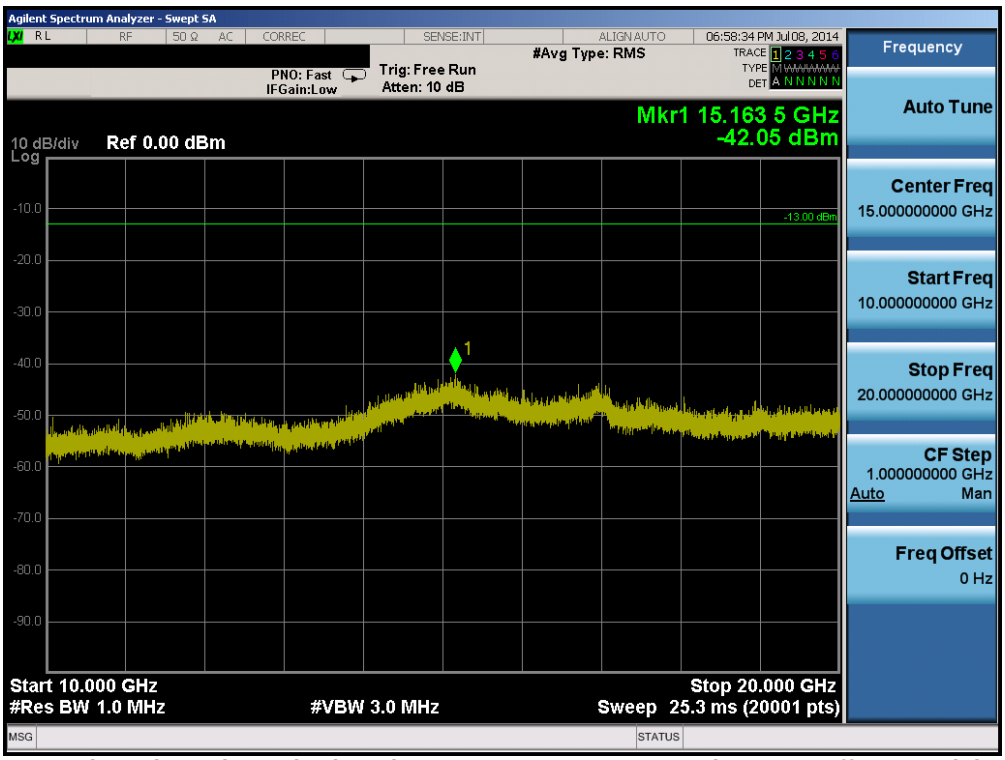

Plot 6-160. Conducted Spurious Plot (Band 25 – 20.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

© 2014 PCTEST Engineering Laboratory, Inc.

6.4 Band Edge Emissions at Antenna Terminal

§2.1051 §22.917(a) §24.238(a) §27.53(e) §27.53(f) §27.53(g)

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is 43 + $\log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 v02r01 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW ≥ 1% of the emission bandwidth
4. VBW ≥ 3 x RBW
5. Detector = RMS
6. Number of sweep points ≥ 2 x Span/RBW
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

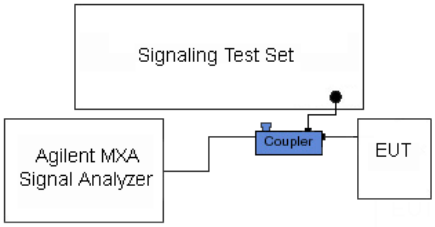

Figure 6-3. Test Instrument & Measurement Setup

Test Notes

Per 22.917(b) 24.238(a) 27.53(g) in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

© 2014 PCTEST Engineering Laboratory, Inc.

Plot 6-161. Lower Band Edge Plot (Band 12 – 1.4MHz QPSK – RB Size 6)

Plot 6-162. Lower Extended Band Edge Plot (Band 12 – 1.4MHz QPSK – RB Size 6)

© 2014 PCTEST Engineering Laboratory, Inc.

Plot 6-163. Upper Band Edge Plot (Band 12 – 1.4MHz QPSK – RB Size 6)

Plot 6-164. Upper Extended Band Edge Plot (Band 12 – 1.4MHz QPSK – RB Size 6)

© 2014 PCTEST Engineering Laboratory, Inc.

Plot 6-165. Lower Band Edge Plot (Band 12 – 3.0MHz QPSK – RB Size 15)

Plot 6-166. Lower Extended Band Edge Plot (Band 12 – 3.0MHz QPSK – RB Size 15)

© 2014 PCTEST Engineering Laboratory, Inc.

Plot 6-167. Upper Band Edge Plot (Band 12 – 3.0MHz QPSK – RB Size 15)

Plot 6-168. Upper Extended Band Edge Plot (Band 12 – 3.0MHz QPSK – RB Size 15)

© 2014 PCTEST Engineering Laboratory, Inc.

Plot 6-169. Lower Band Edge Plot (Band 12 – 5.0MHz QPSK – RB Size 25)

Plot 6-170. Lower Extended Band Edge Plot (Band 12 – 5.0MHz QPSK – RB Size 25)

© 2014 PCTEST Engineering Laboratory, Inc.

Plot 6-171. Upper Band Edge Plot (Band 12 – 5.0MHz QPSK – RB Size 25)

Plot 6-172. Upper Extended Band Edge Plot (Band 12 – 5.0MHz QPSK – RB Size 25)

© 2014 PCTEST Engineering Laboratory, Inc.

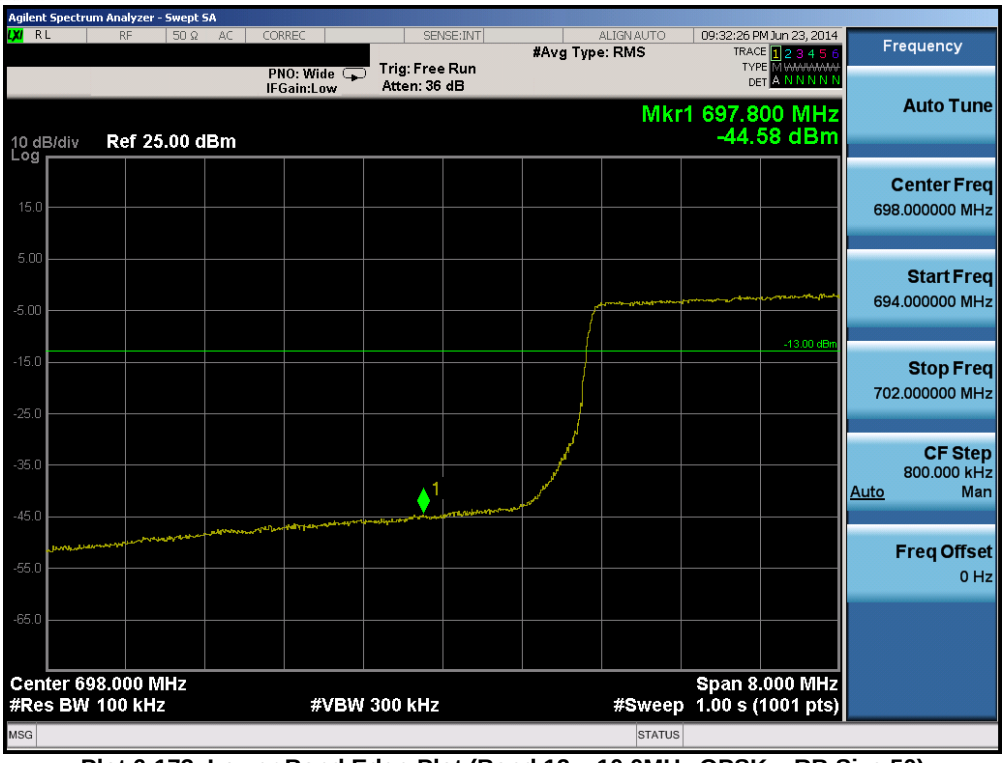

Plot 6-173. Lower Band Edge Plot (Band 12 – 10.0MHz QPSK – RB Size 50)

Plot 6-174. Lower Extended Band Edge Plot (Band 12 – 10.0MHz QPSK – RB Size 50)

© 2014 PCTEST Engineering Laboratory, Inc.

Plot 6-175. Upper Band Edge Plot (Band 12 – 10.0MHz QPSK – RB Size 50)

Plot 6-176. Upper Extended Band Edge Plot (Band 12 – 10.0MHz QPSK – RB Size 50)

© 2014 PCTEST Engineering Laboratory, Inc.

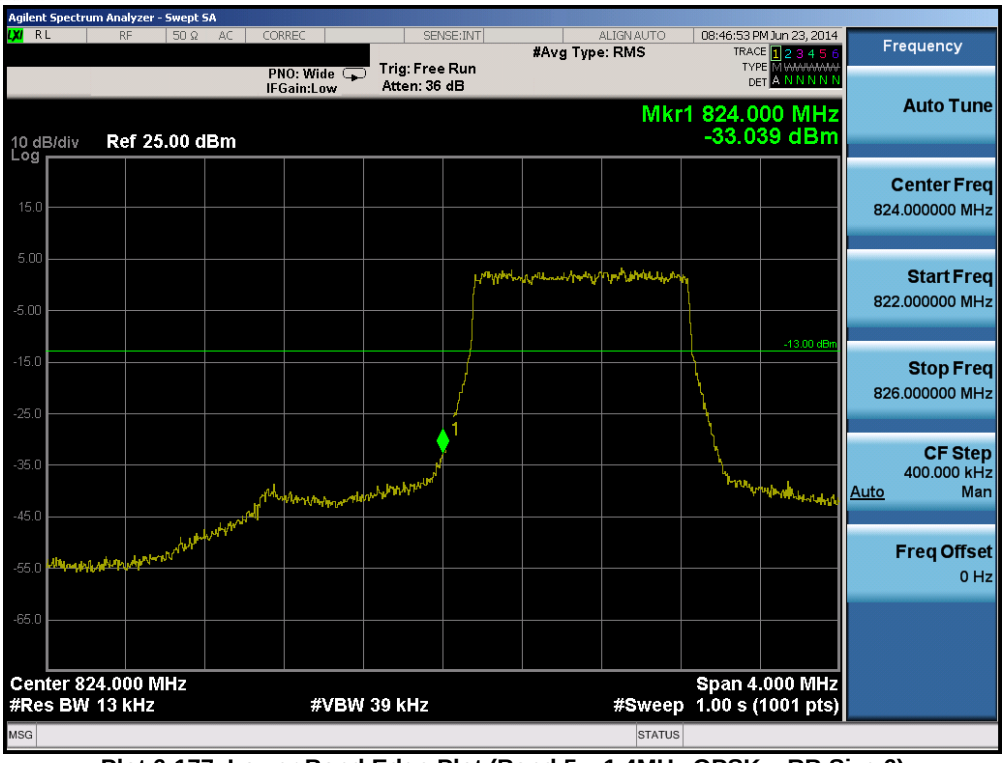

Plot 6-177. Lower Band Edge Plot (Band 5 – 1.4MHz QPSK – RB Size 6)

Plot 6-178. Lower Extended Band Edge Plot (Band 5 – 1.4MHz QPSK – RB Size 6)

© 2014 PCTEST Engineering Laboratory, Inc.

Plot 6-179. Upper Band Edge Plot (Band 5 – 1.4MHz QPSK – RB Size 6)

Plot 6-180. Upper Extended Band Edge Plot (Band 5 – 1.4MHz QPSK – RB Size 6)

© 2014 PCTEST Engineering Laboratory, Inc.

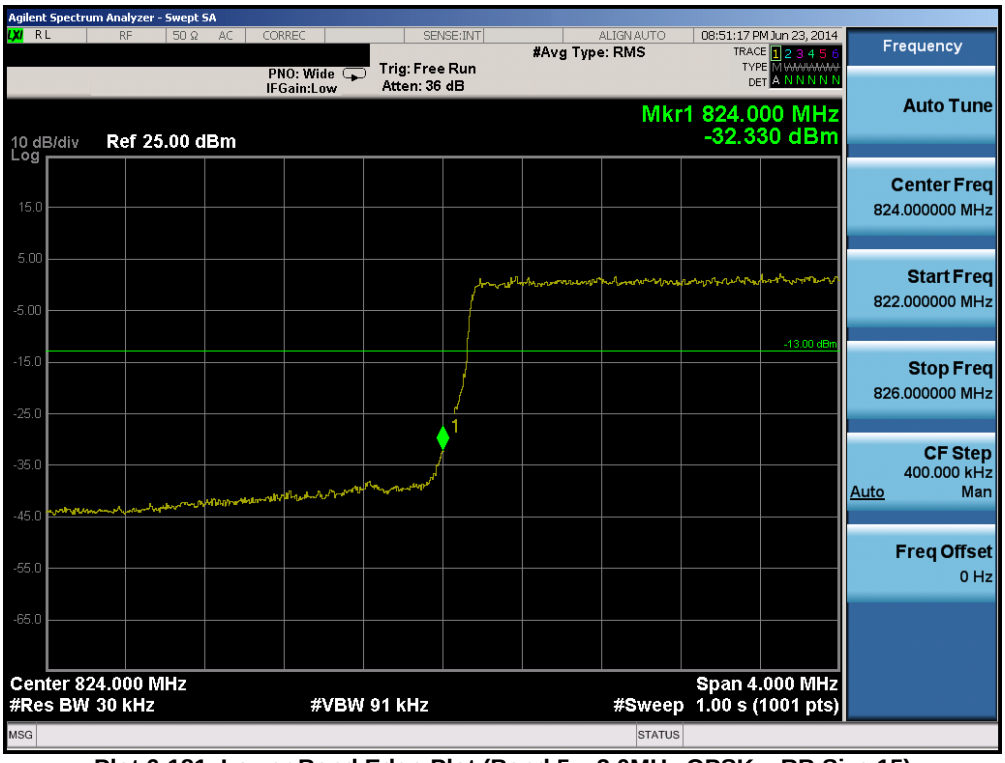

Plot 6-181. Lower Band Edge Plot (Band 5 – 3.0MHz QPSK – RB Size 15)

Plot 6-182. Lower Extended Band Edge Plot (Band 5 – 3.0MHz QPSK – RB Size 15)

© 2014 PCTEST Engineering Laboratory, Inc.

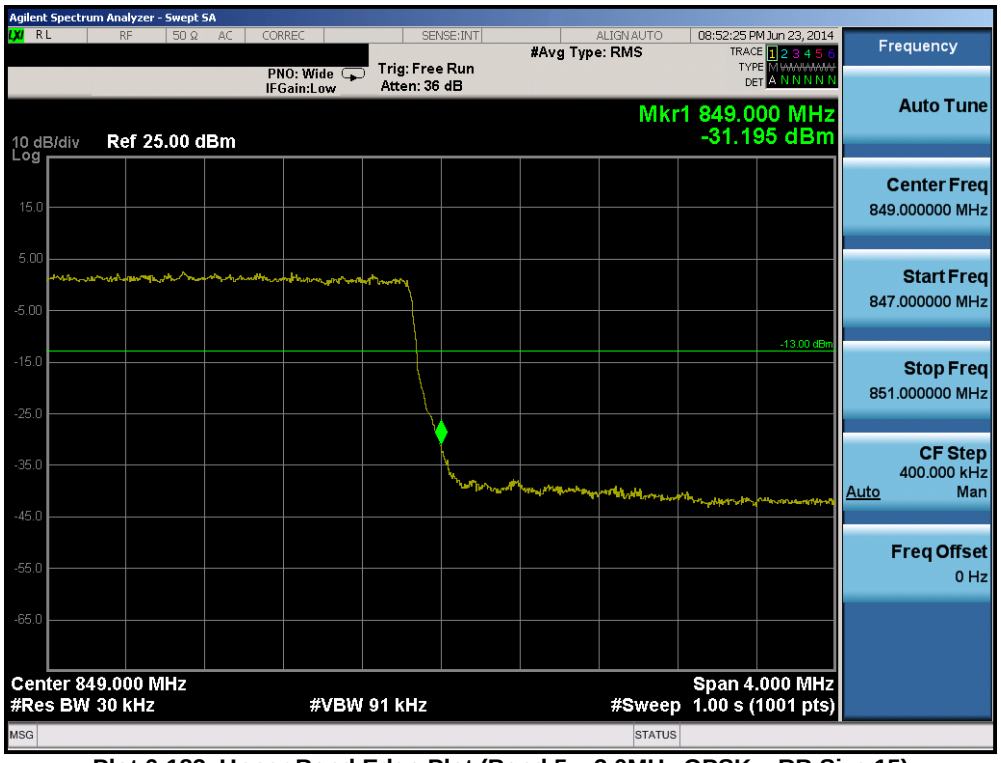

Plot 6-183. Upper Band Edge Plot (Band 5 – 3.0MHz QPSK – RB Size 15)

Plot 6-184. Upper Extended Band Edge Plot (Band 5 – Band 5 – 3.0MHz QPSK – RB Size 15)

© 2014 PCTEST Engineering Laboratory, Inc.

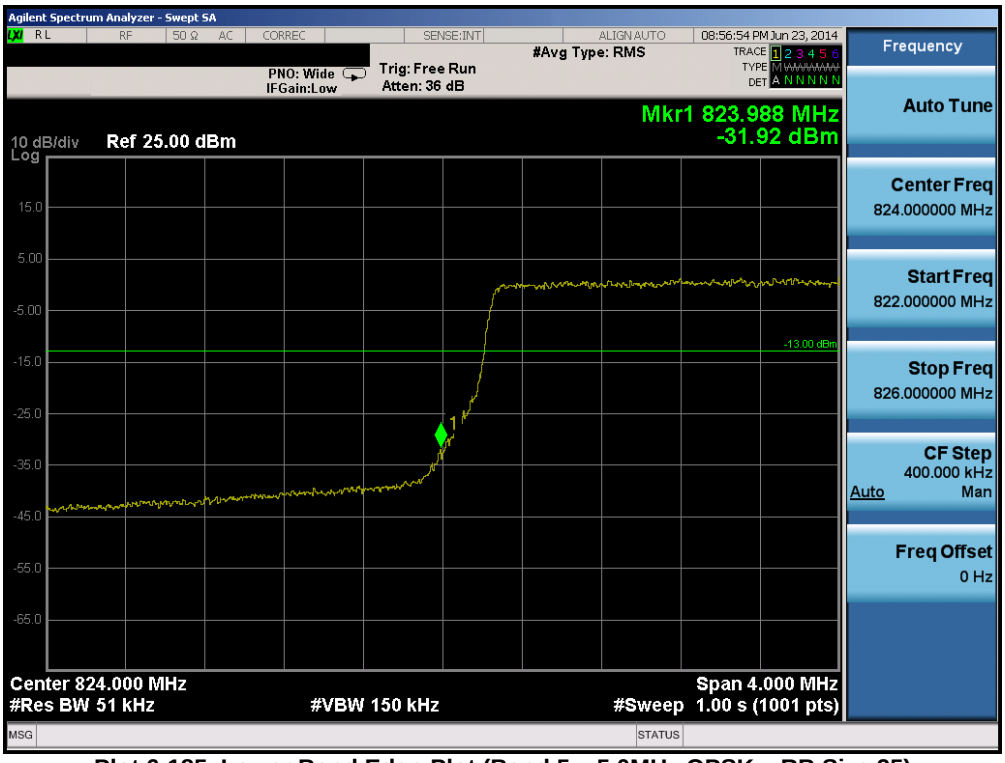

Plot 6-185. Lower Band Edge Plot (Band 5 – 5.0MHz QPSK – RB Size 25)

Plot 6-186. Lower Extended Band Edge Plot (Band 5 – 5.0MHz QPSK – RB Size 25)

© 2014 PCTEST Engineering Laboratory, Inc.

Plot 6-187. Upper Band Edge Plot (Band 5 – 5.0MHz QPSK – RB Size 25)

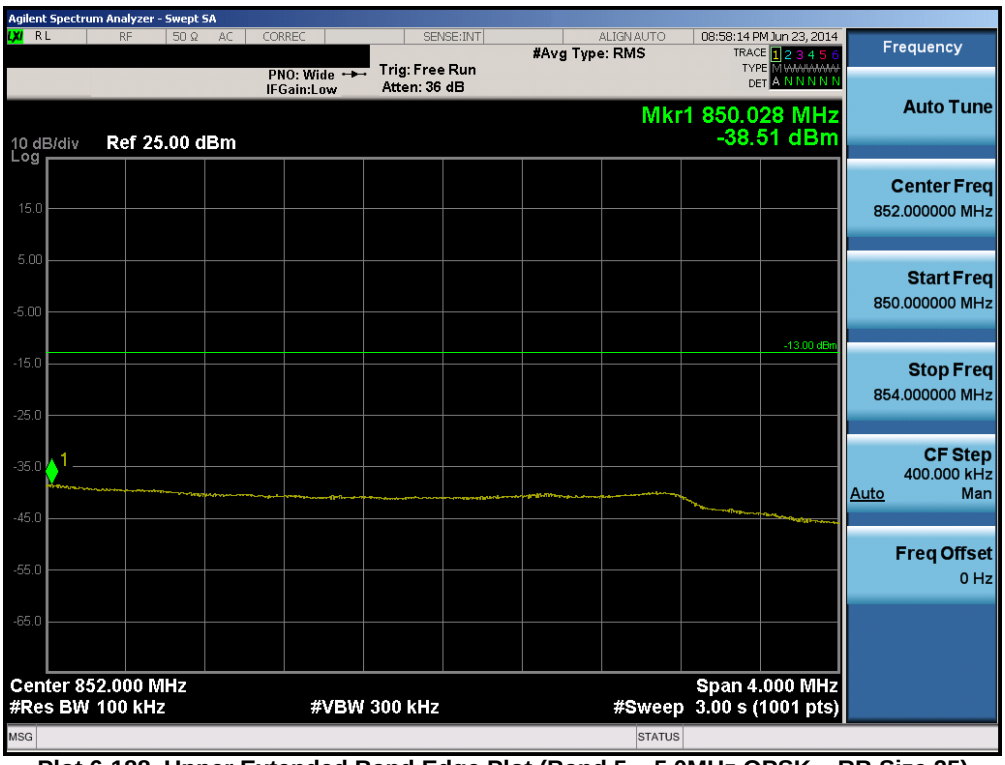

Plot 6-188. Upper Extended Band Edge Plot (Band 5 – 5.0MHz QPSK – RB Size 25)

© 2014 PCTEST Engineering Laboratory, Inc.

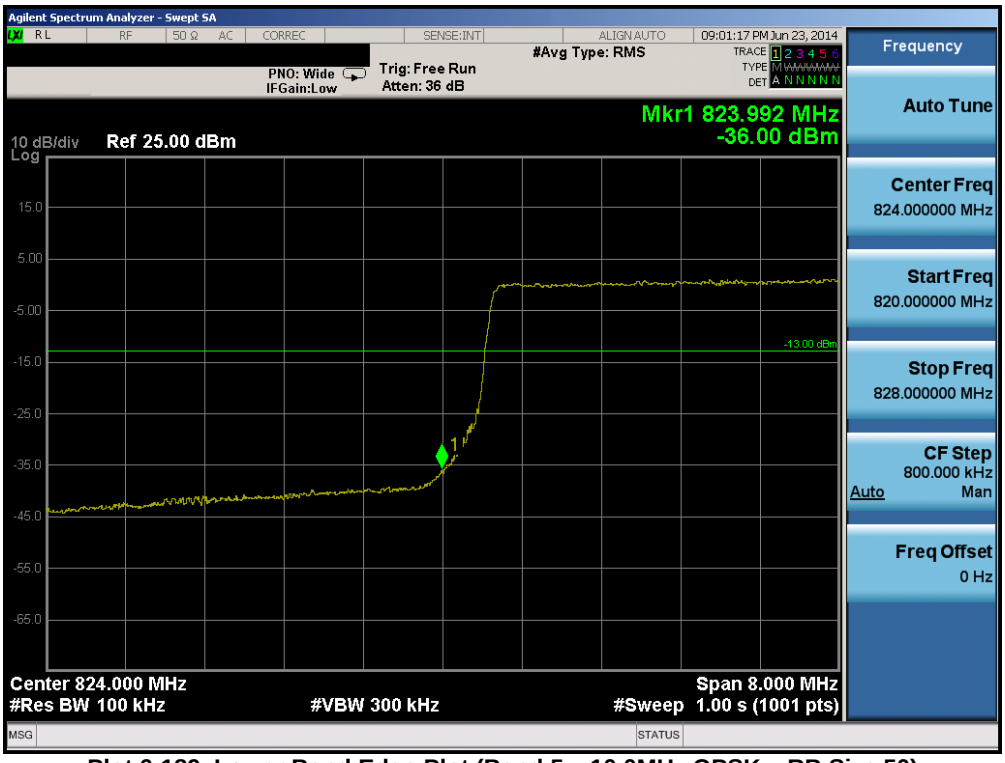

Plot 6-189. Lower Band Edge Plot (Band 5 – 10.0MHz QPSK – RB Size 50)

Plot 6-190. Lower Extended Band Edge Plot (Band 5 – 10.0MHz QPSK – RB Size 50)

© 2014 PCTEST Engineering Laboratory, Inc.

Plot 6-191. Upper Band Edge Plot (Band 5 – 10.0MHz QPSK – RB Size 50)

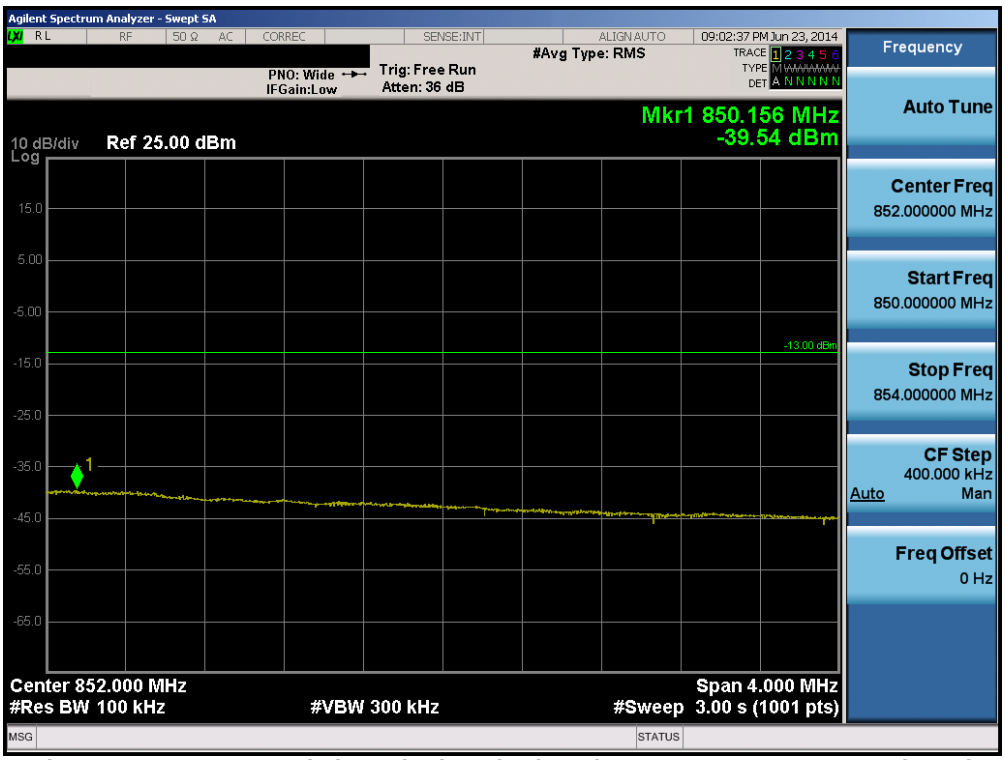

Plot 6-192. Upper Extended Band Edge Plot (Band 5 – 10.0MHz QPSK – RB Size 50)

© 2014 PCTEST Engineering Laboratory, Inc.

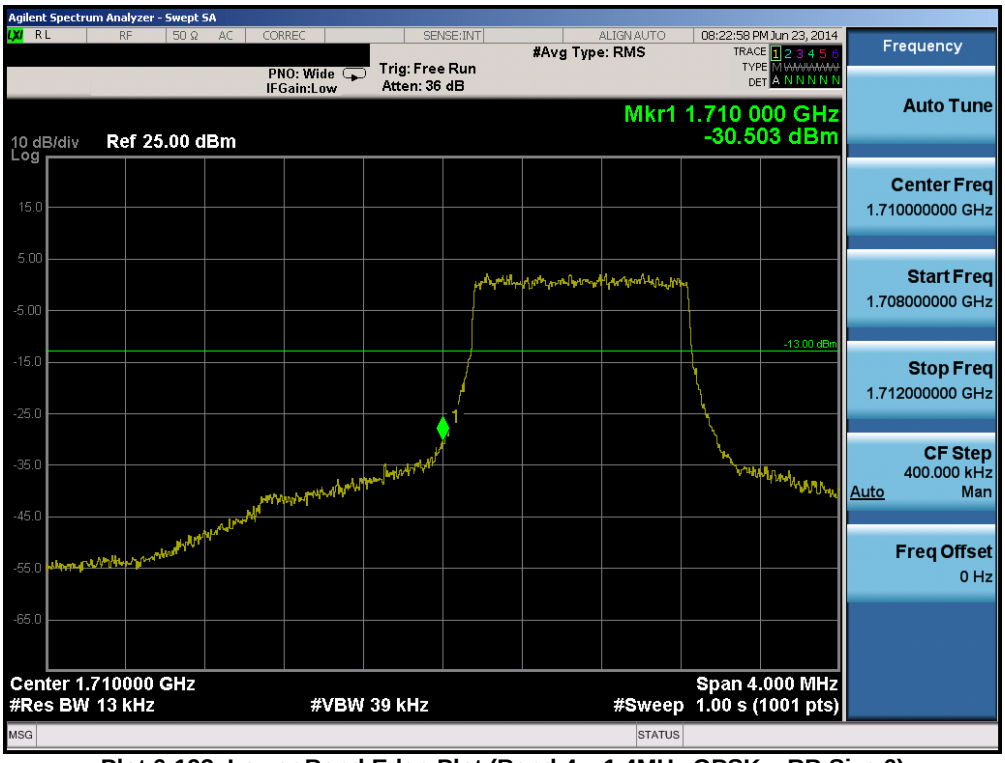

Plot 6-193. Lower Band Edge Plot (Band 4 – 1.4MHz QPSK – RB Size 6)

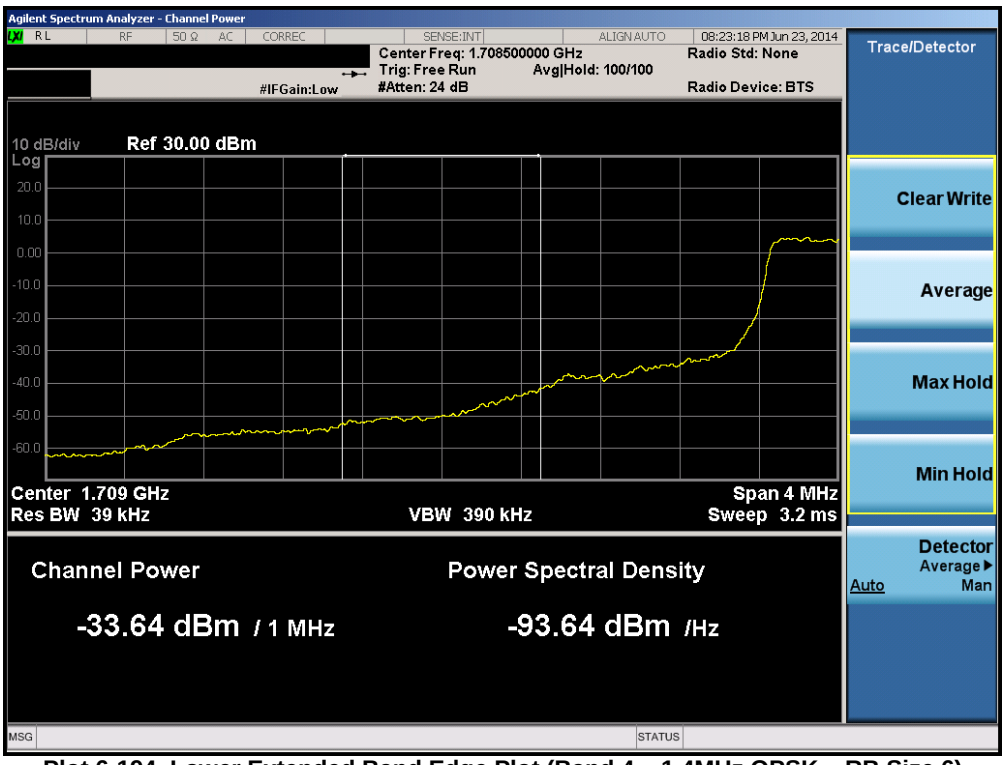

Plot 6-194. Lower Extended Band Edge Plot (Band 4 – 1.4MHz QPSK – RB Size 6)

© 2014 PCTEST Engineering Laboratory, Inc.

Plot 6-195. Upper Band Edge Plot (Band 4 – 1.4MHz QPSK – RB Size 6)

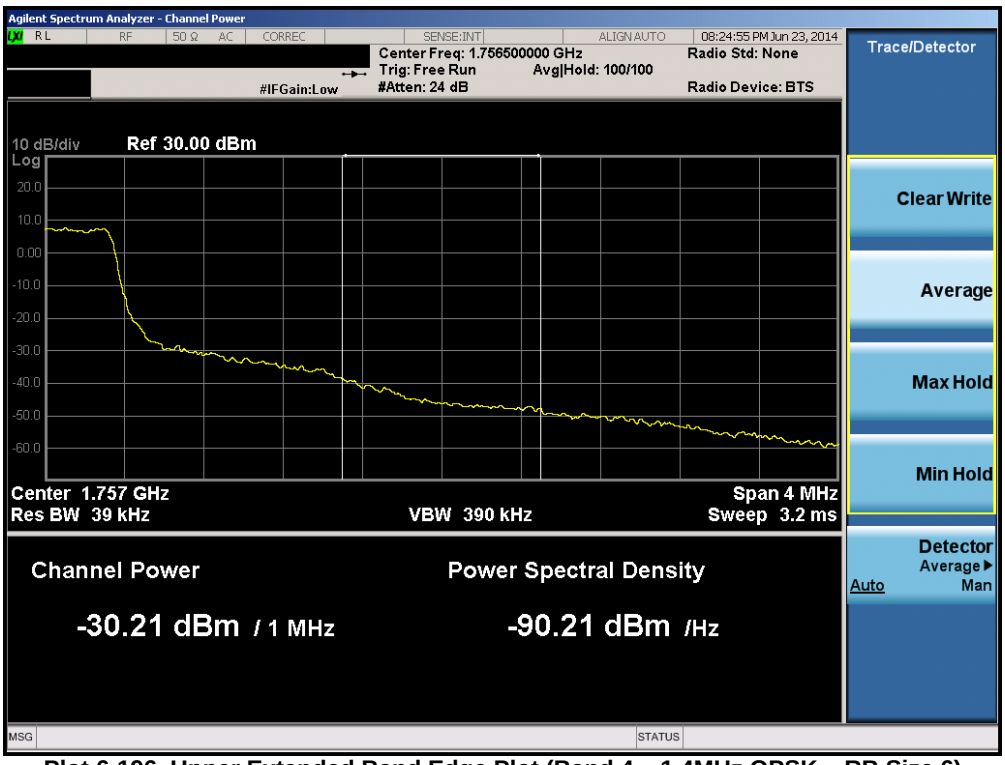

Plot 6-196. Upper Extended Band Edge Plot (Band 4 – 1.4MHz QPSK – RB Size 6)

© 2014 PCTEST Engineering Laboratory, Inc.

Plot 6-197. Lower Band Edge Plot (Band 4 – 3.0MHz QPSK – RB Size 15)

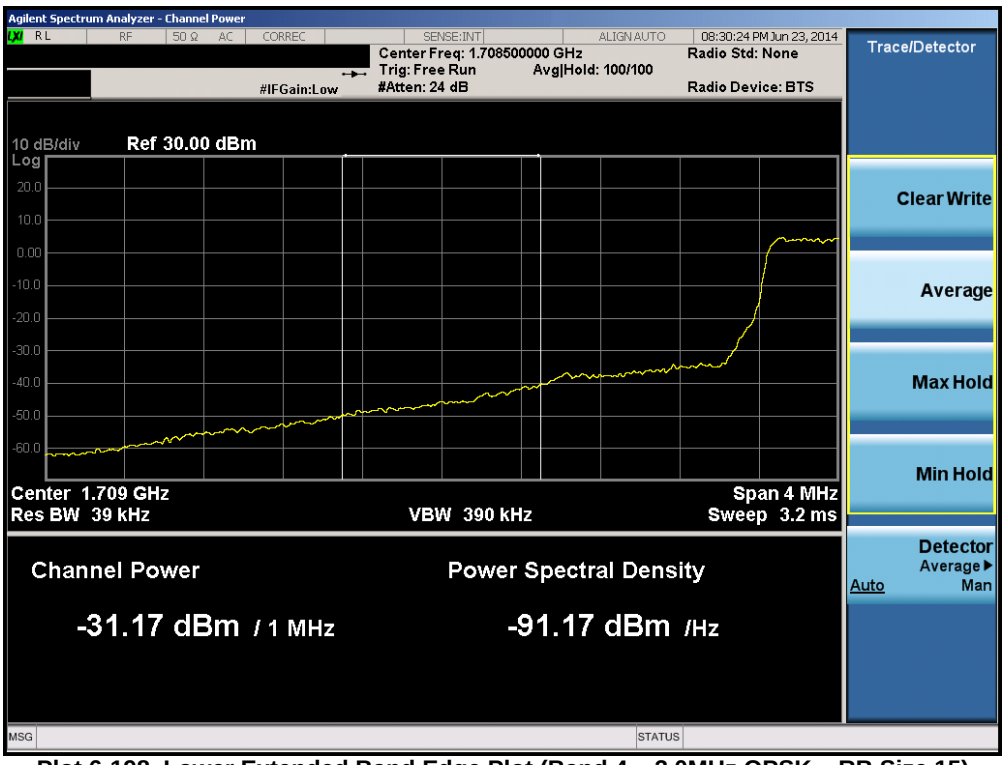

Plot 6-198. Lower Extended Band Edge Plot (Band 4 – 3.0MHz QPSK – RB Size 15)

© 2014 PCTEST Engineering Laboratory, Inc.

Plot 6-199. Upper Band Edge Plot (Band 4 – 3.0MHz QPSK – RB Size 15)

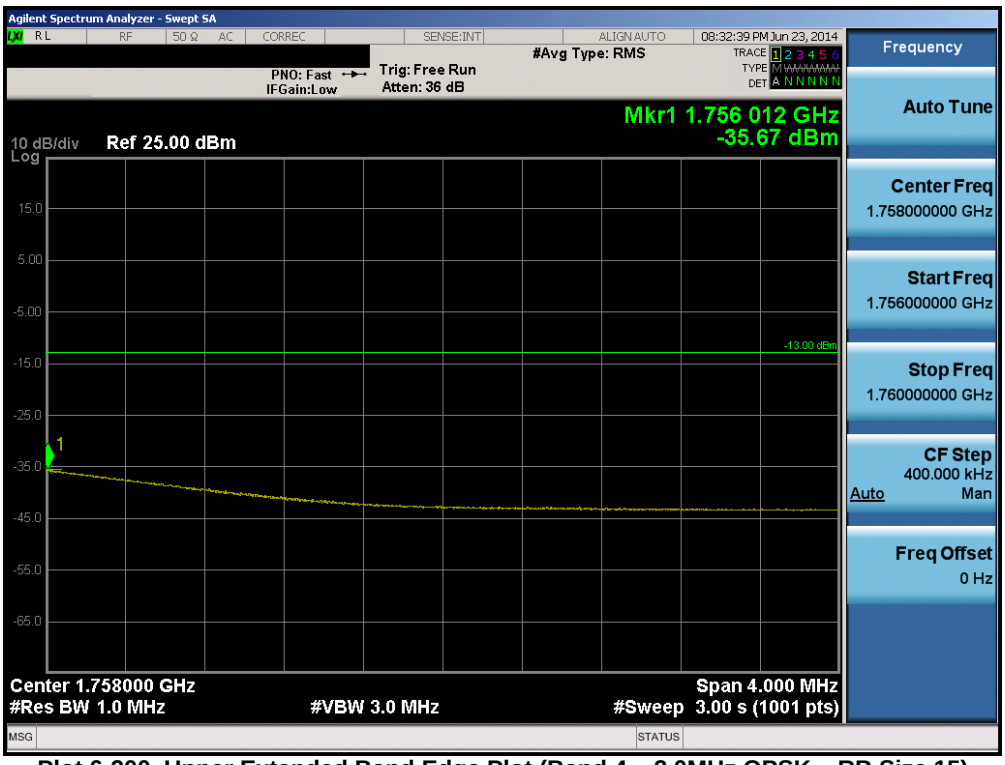

Plot 6-200. Upper Extended Band Edge Plot (Band 4 – 3.0MHz QPSK – RB Size 15)

© 2014 PCTEST Engineering Laboratory, Inc.

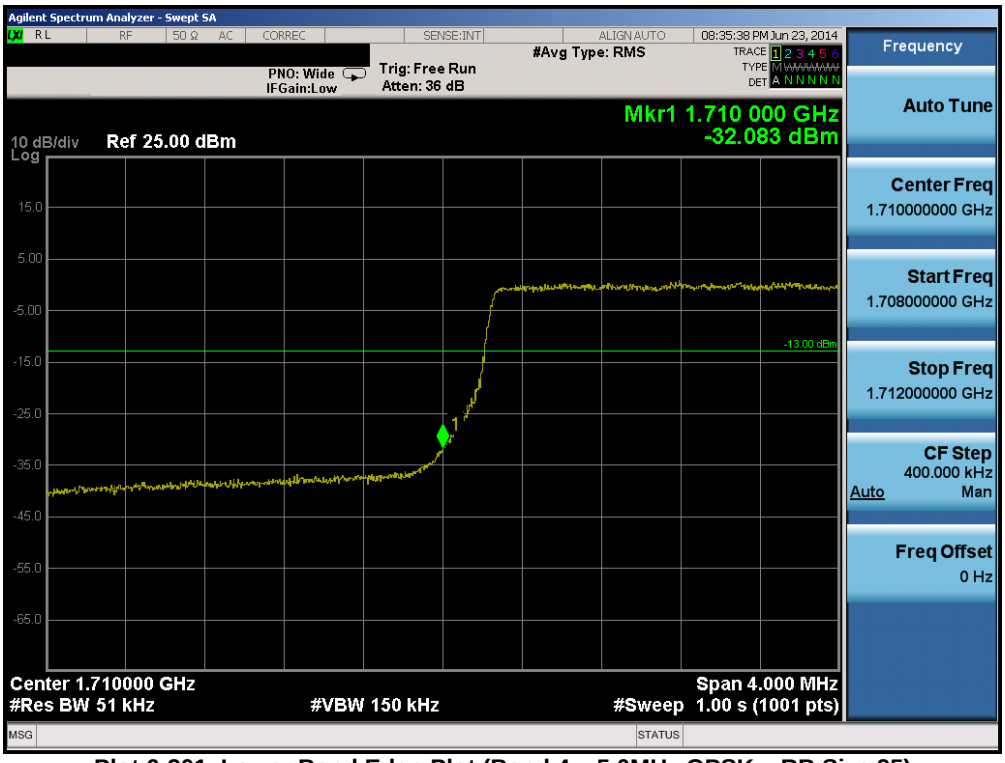

Plot 6-201. Lower Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

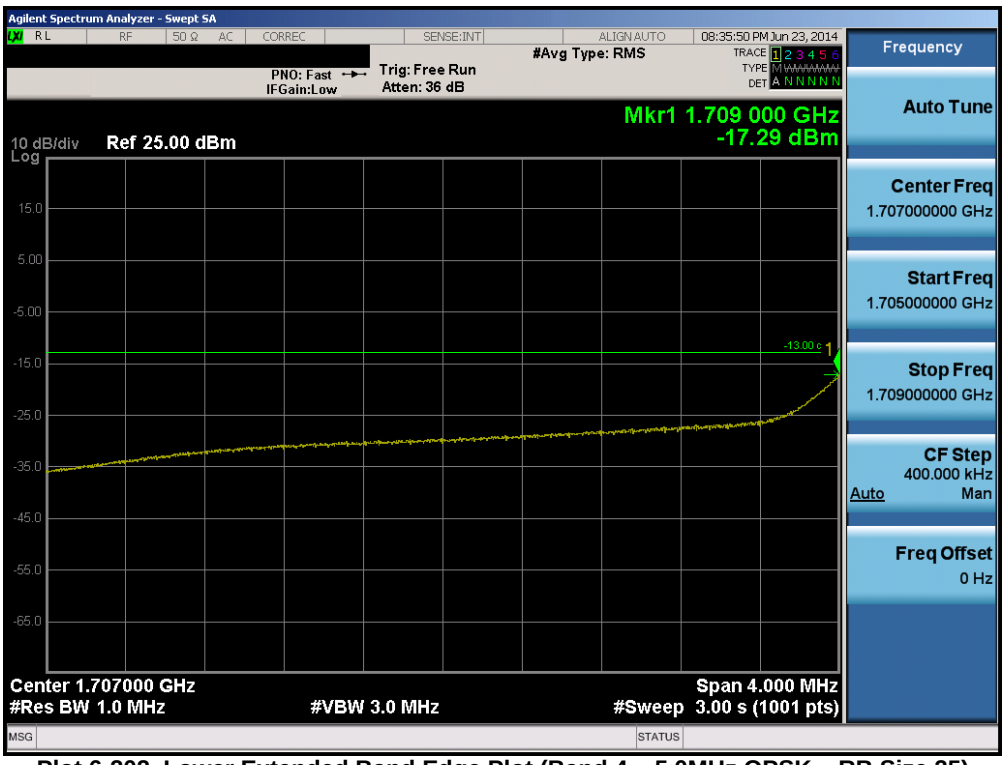

Plot 6-202. Lower Extended Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

© 2014 PCTEST Engineering Laboratory, Inc.

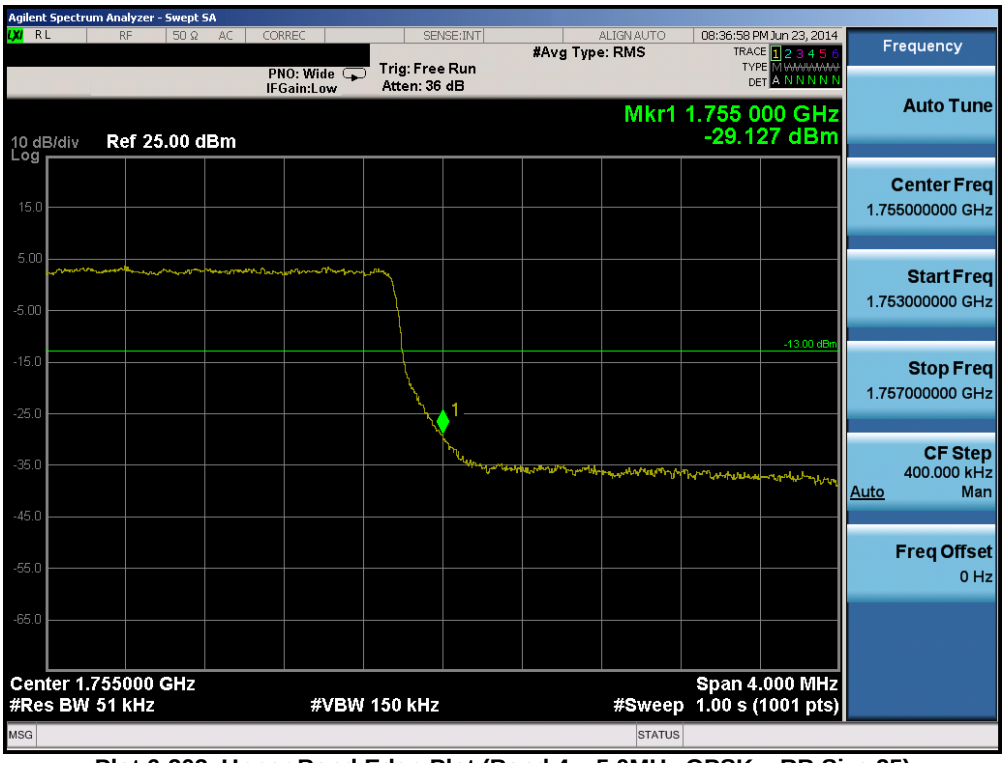

Plot 6-203. Upper Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

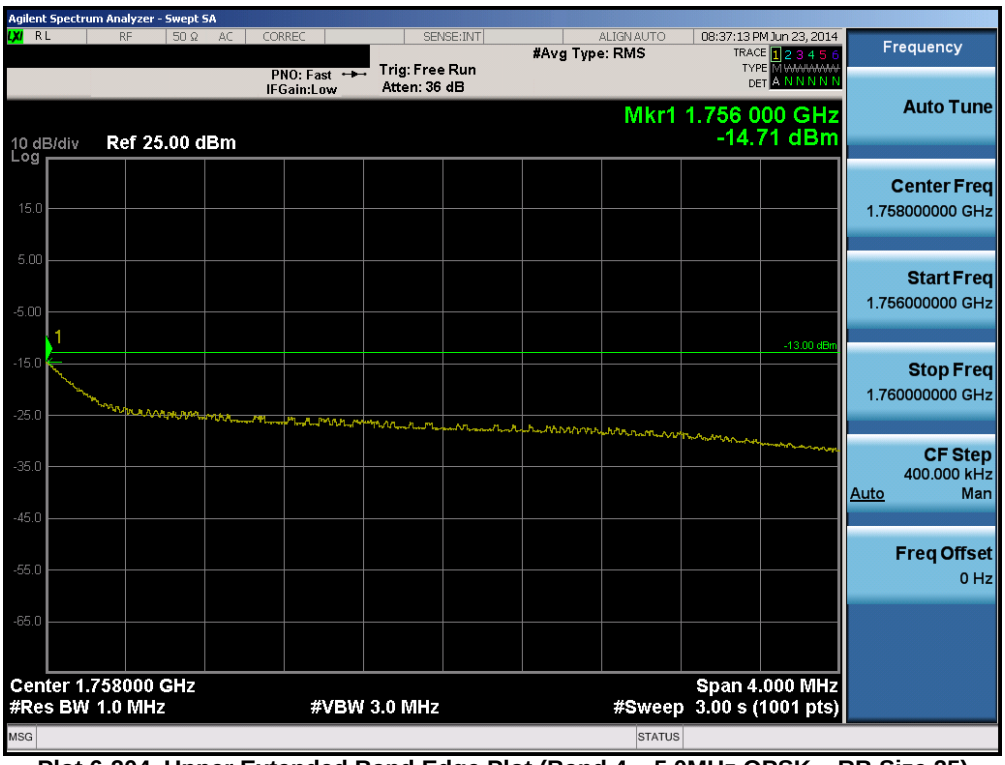

Plot 6-204. Upper Extended Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

© 2014 PCTEST Engineering Laboratory, Inc.

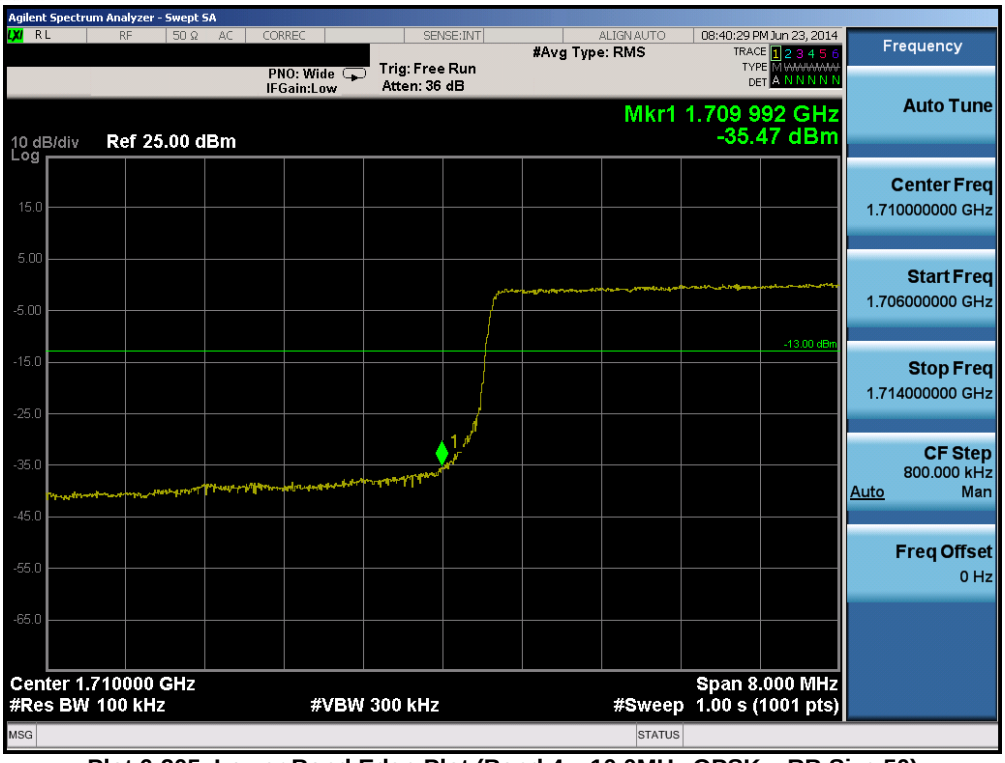

Plot 6-205. Lower Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

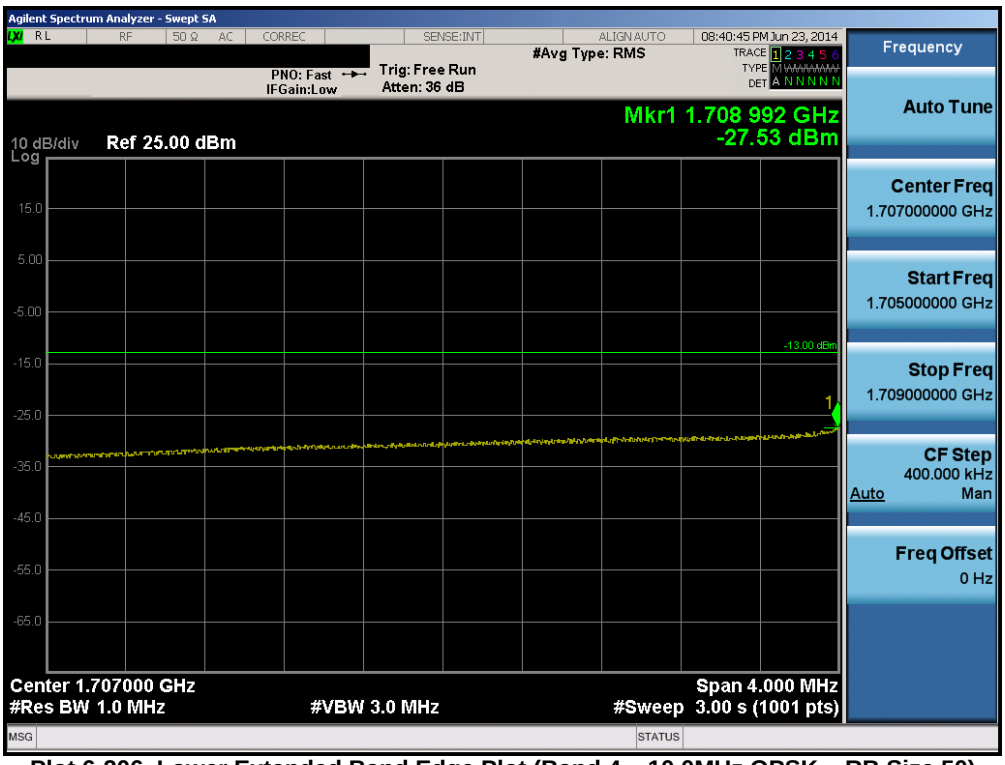

Plot 6-206. Lower Extended Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

© 2014 PCTEST Engineering Laboratory, Inc.

Plot 6-207. Upper Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

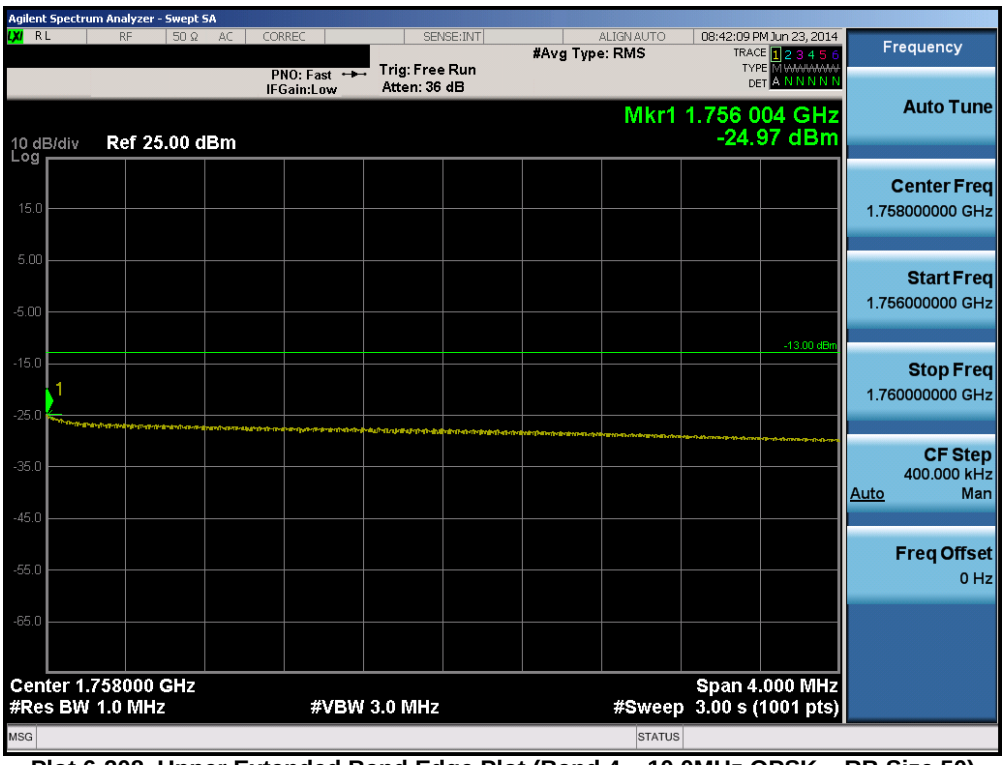

Plot 6-208. Upper Extended Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

© 2014 PCTEST Engineering Laboratory, Inc.

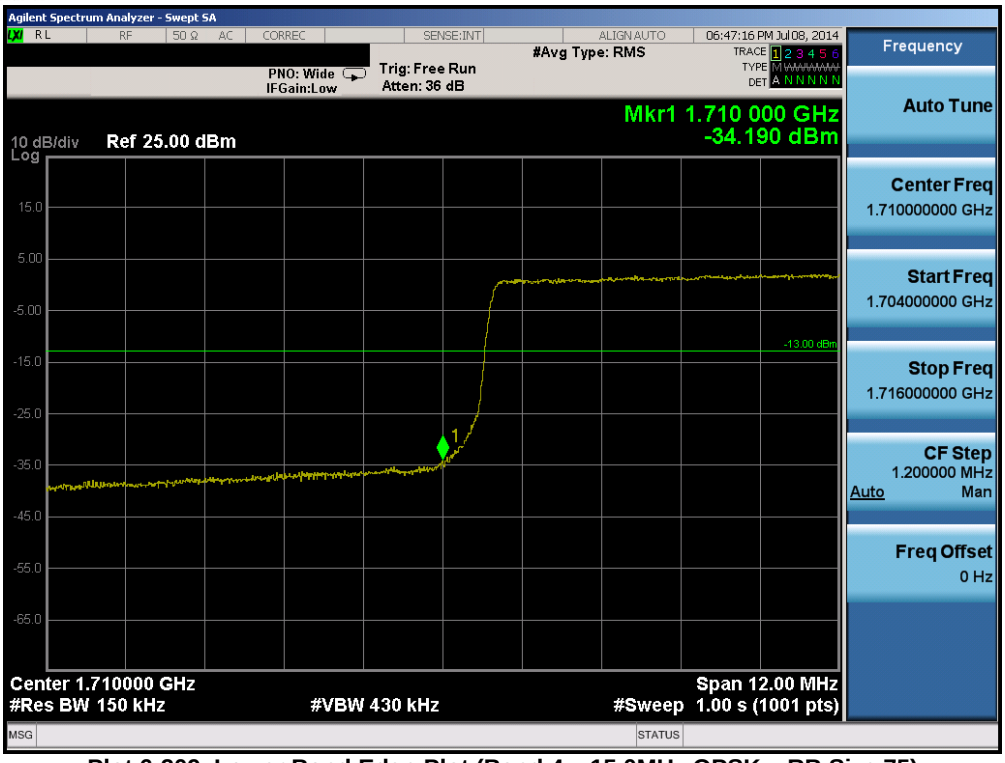

Plot 6-209. Lower Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)

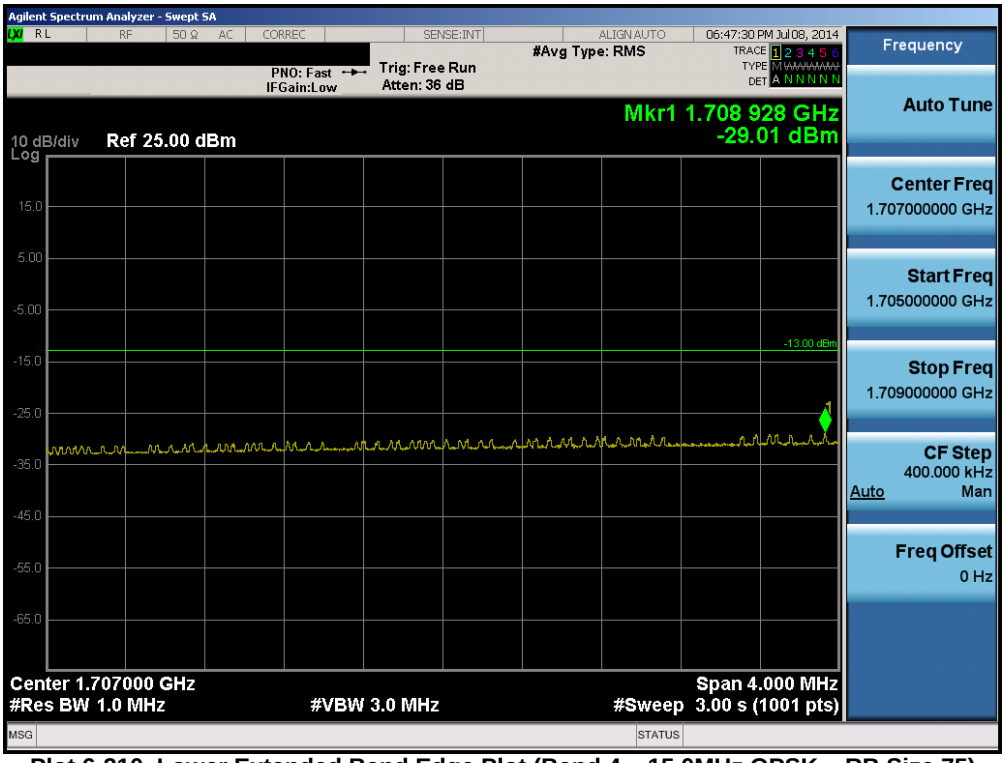

Plot 6-210. Lower Extended Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)

© 2014 PCTEST Engineering Laboratory, Inc.

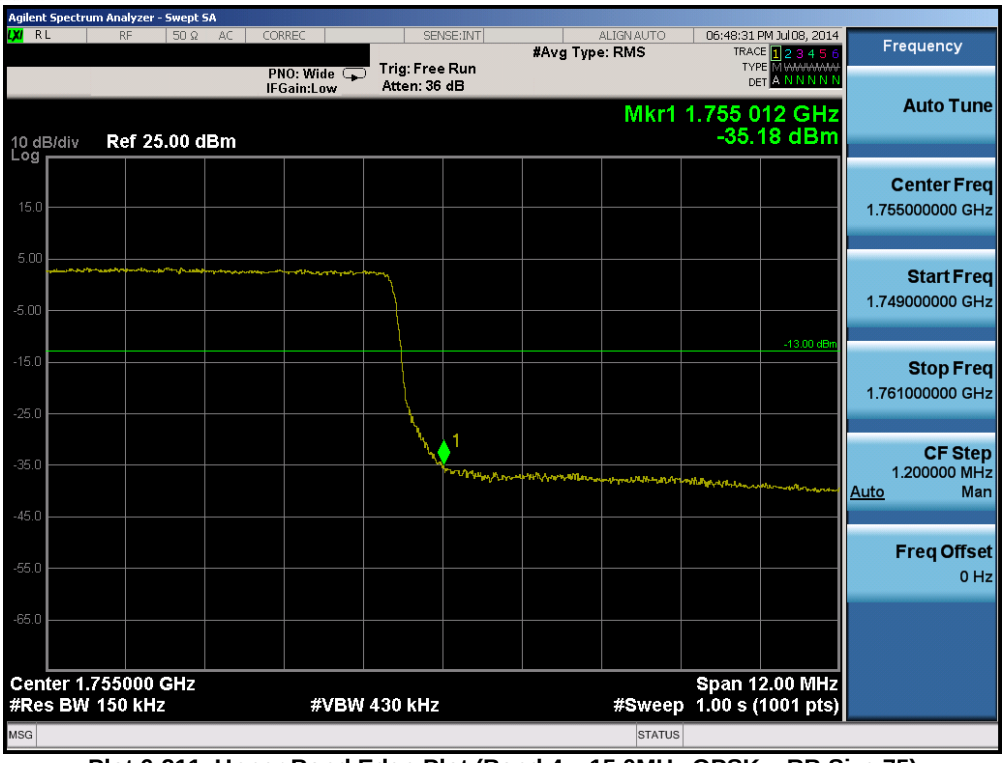

Plot 6-211. Upper Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)

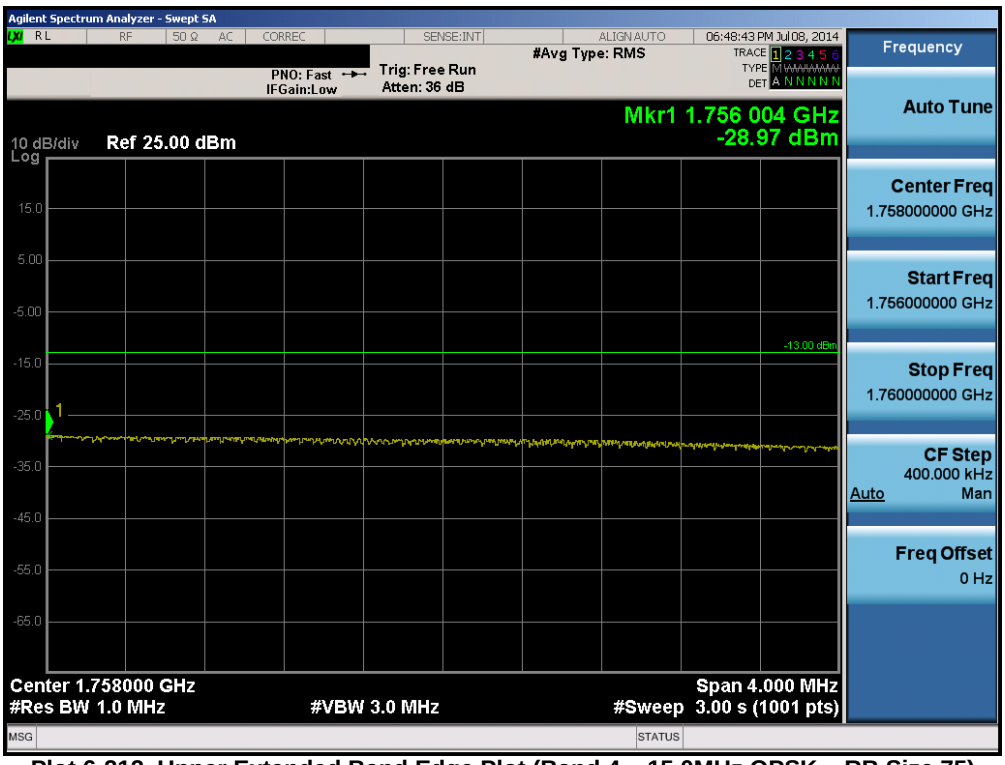

Plot 6-212. Upper Extended Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)

© 2014 PCTEST Engineering Laboratory, Inc.

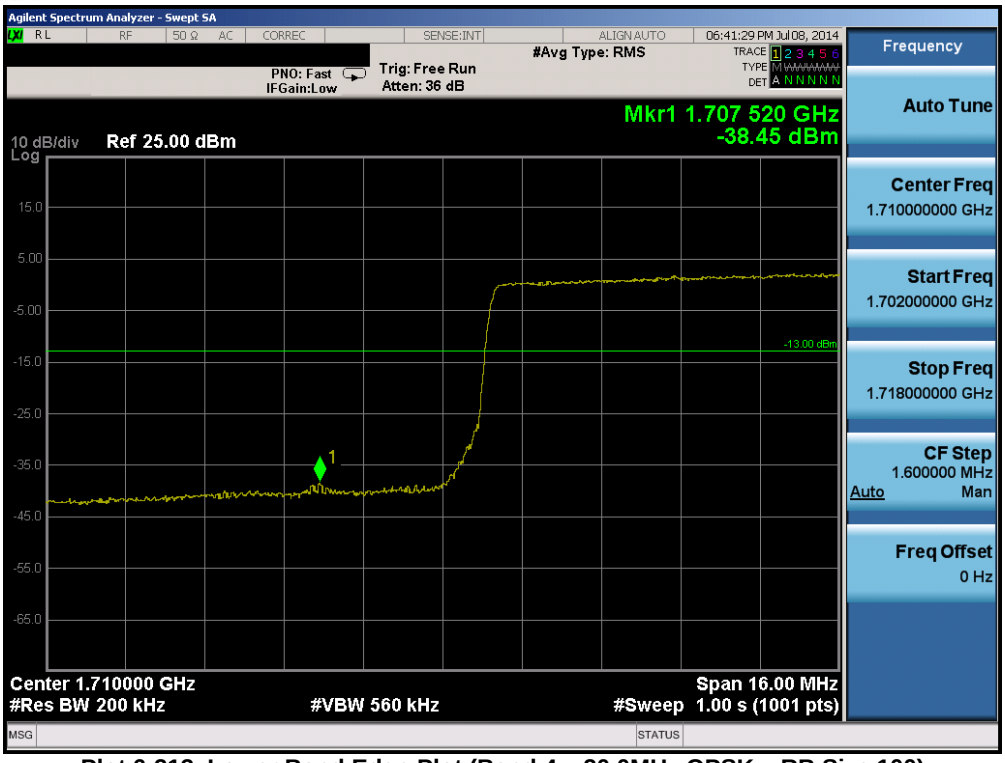

Plot 6-213. Lower Band Edge Plot (Band 4 – 20.0MHz QPSK – RB Size 100)

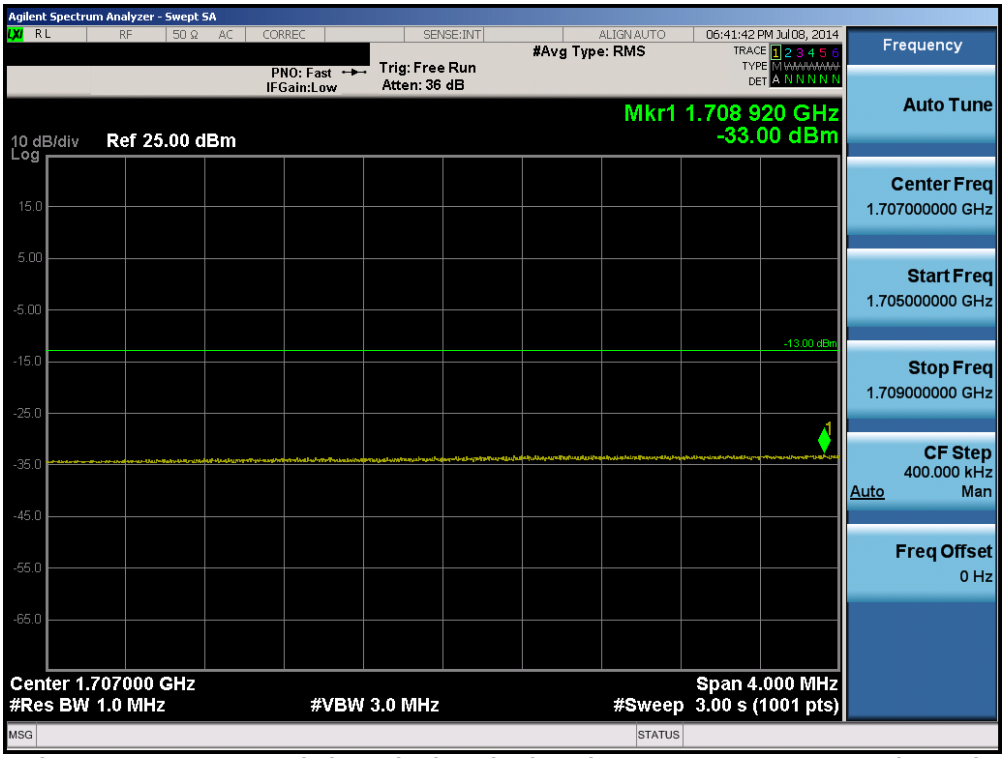

Plot 6-214. Lower Extended Band Edge Plot (Band 4 – 20.0MHz QPSK – RB Size 100)

© 2014 PCTEST Engineering Laboratory, Inc.

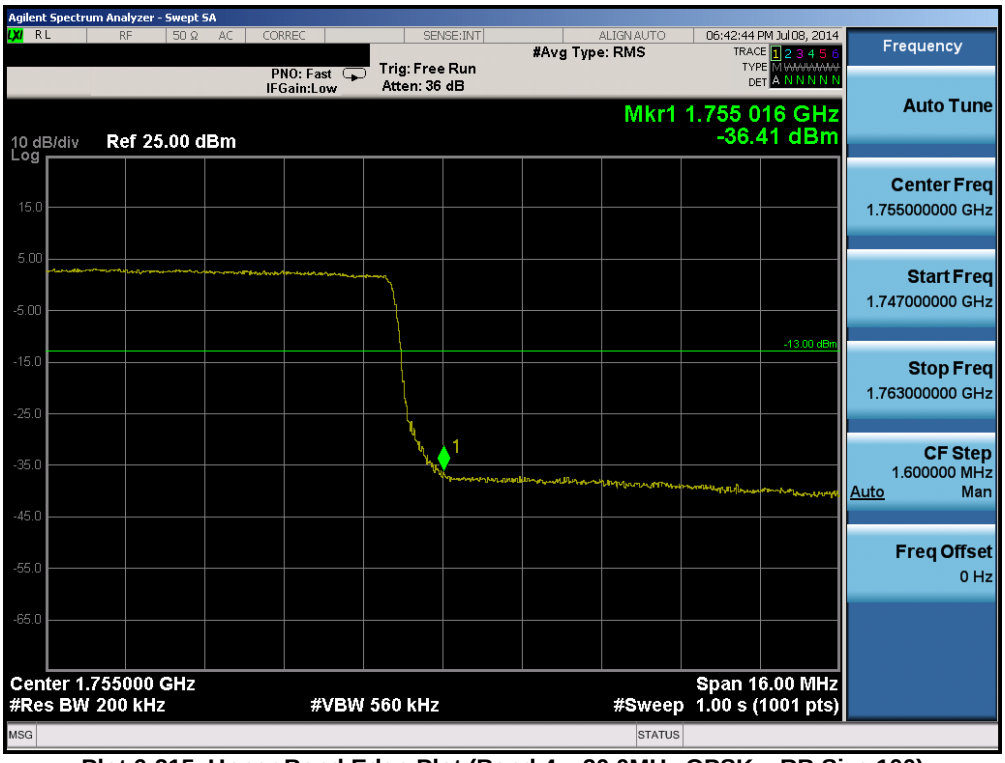

Plot 6-215. Upper Band Edge Plot (Band 4 – 20.0MHz QPSK – RB Size 100)

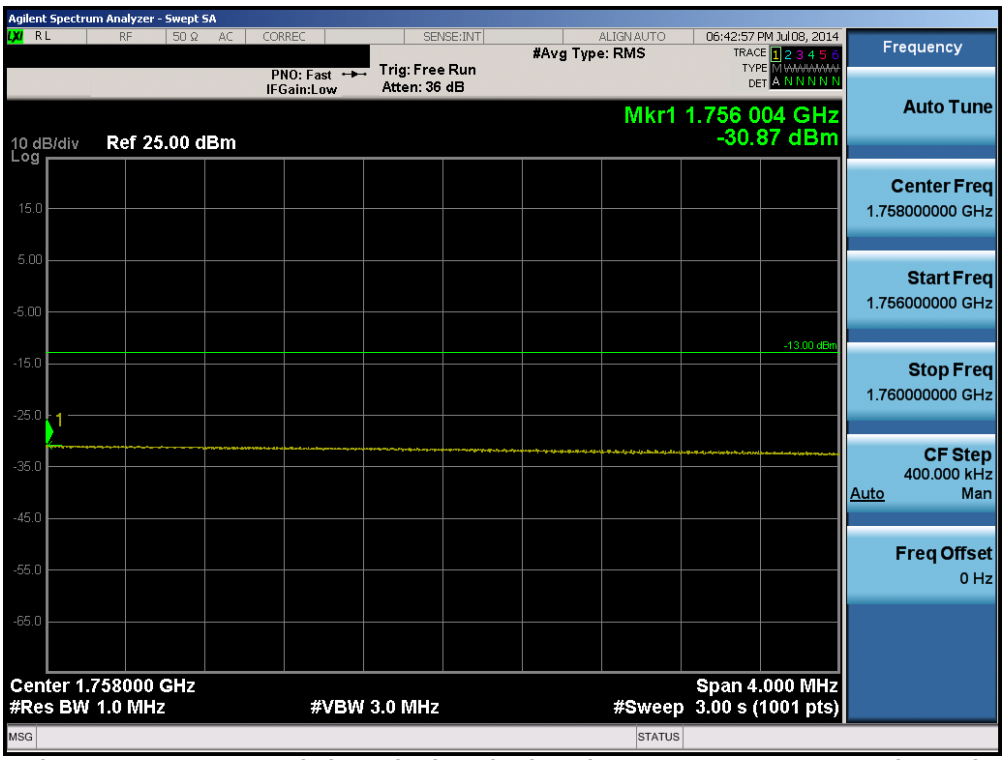

Plot 6-216. Upper Extended Band Edge Plot (Band 4 – 20.0MHz QPSK – RB Size 100)

© 2014 PCTEST Engineering Laboratory, Inc.

Plot 6-217. Lower Band Edge Plot (Band 25 – 1.4MHz QPSK – RB Size 6)

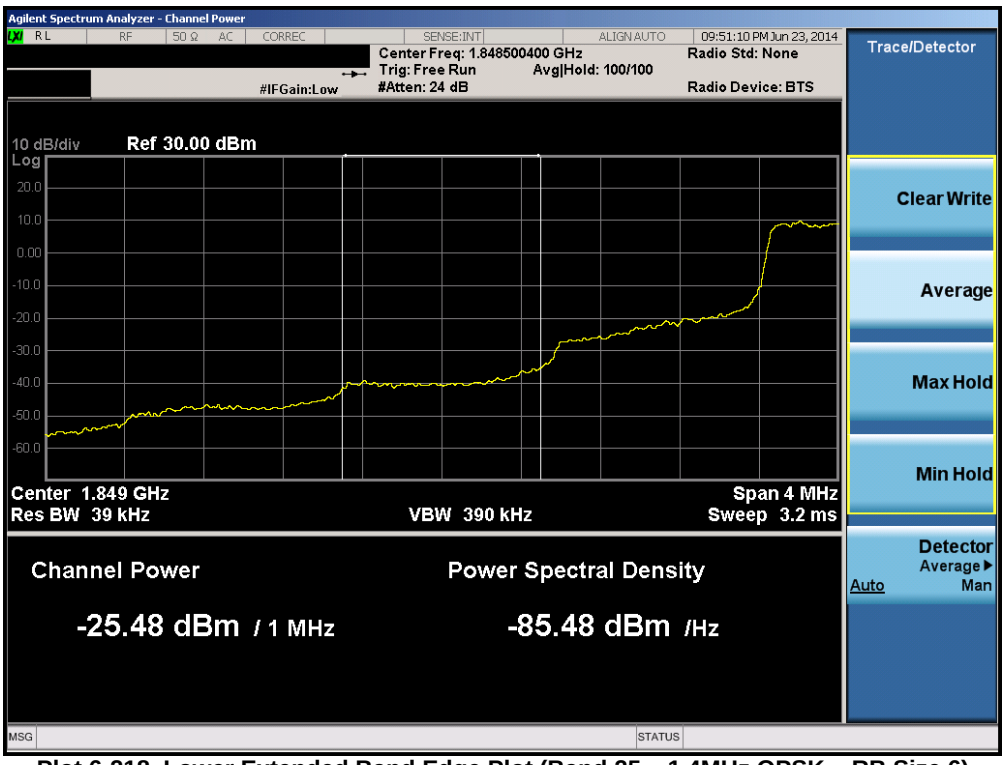

Plot 6-218. Lower Extended Band Edge Plot (Band 25 – 1.4MHz QPSK – RB Size 6)

© 2014 PCTEST Engineering Laboratory, Inc.

Plot 6-219. Upper Band Edge Plot (Band 25 – 1.4MHz QPSK – RB Size 6)

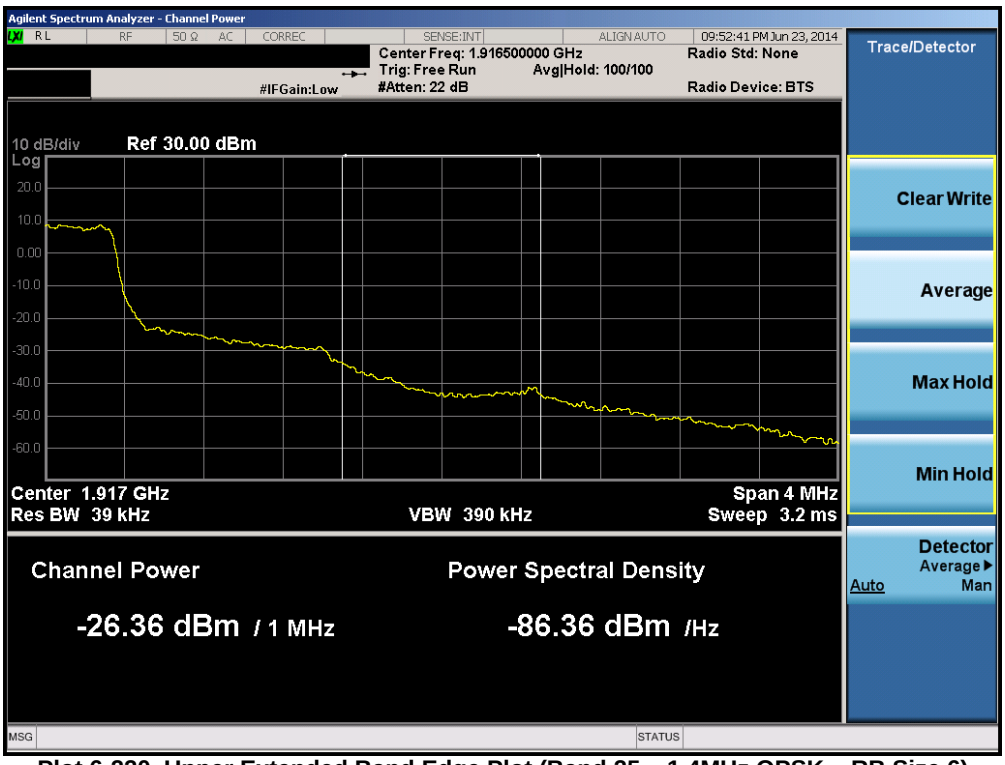

Plot 6-220. Upper Extended Band Edge Plot (Band 25 – 1.4MHz QPSK – RB Size 6)

© 2014 PCTEST Engineering Laboratory, Inc.

Plot 6-221. Lower Band Edge Plot (Band 25 – 3.0MHz QPSK – RB Size 15)

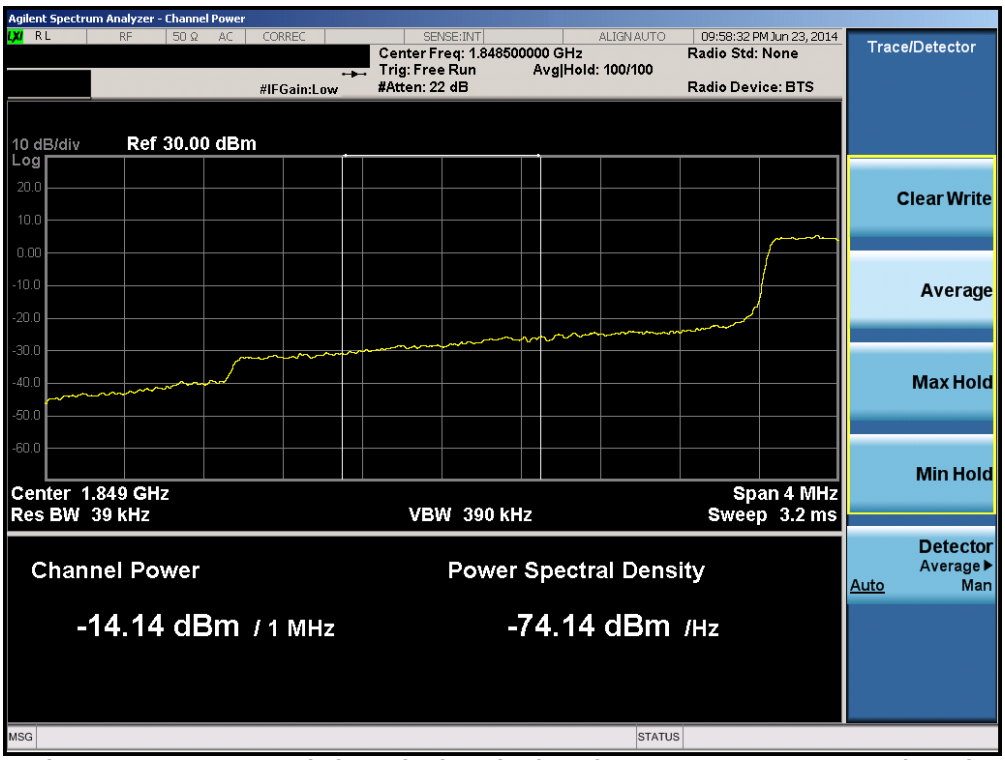

Plot 6-222. Lower Extended Band Edge Plot (Band 25 – 3.0MHz QPSK – RB Size 15)

© 2014 PCTEST Engineering Laboratory, Inc.

Plot 6-223. Upper Band Edge Plot (Band 25 – 3.0MHz QPSK – RB Size 15)

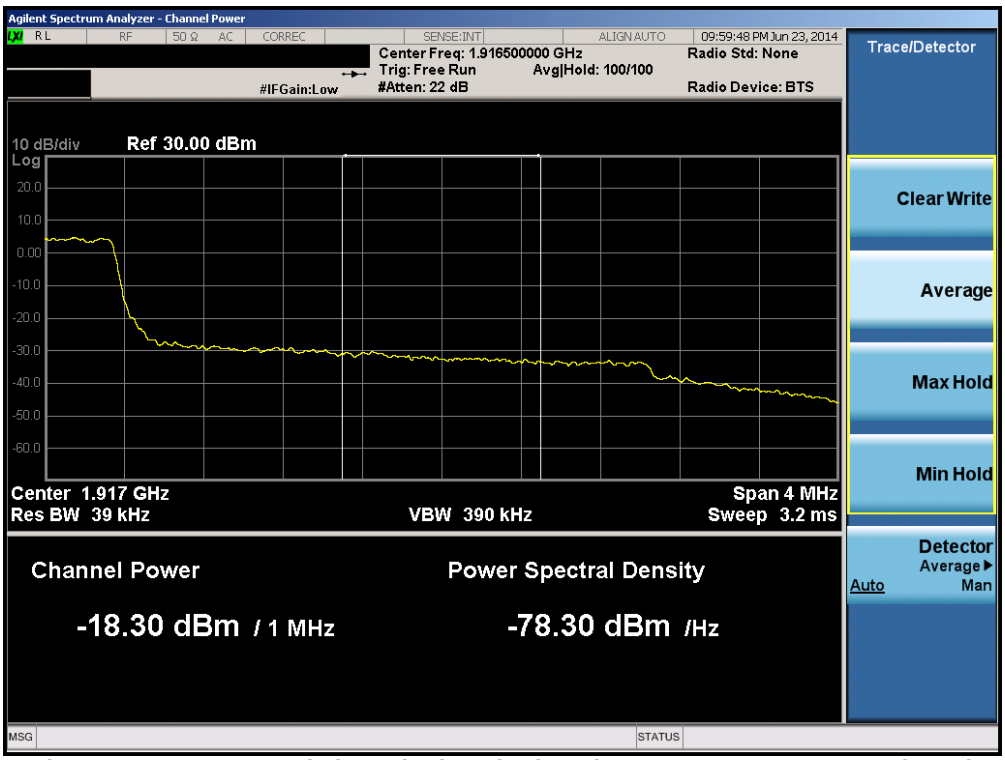

Plot 6-224. Upper Extended Band Edge Plot (Band 25 – 3.0MHz QPSK – RB Size 15)

© 2014 PCTEST Engineering Laboratory, Inc.

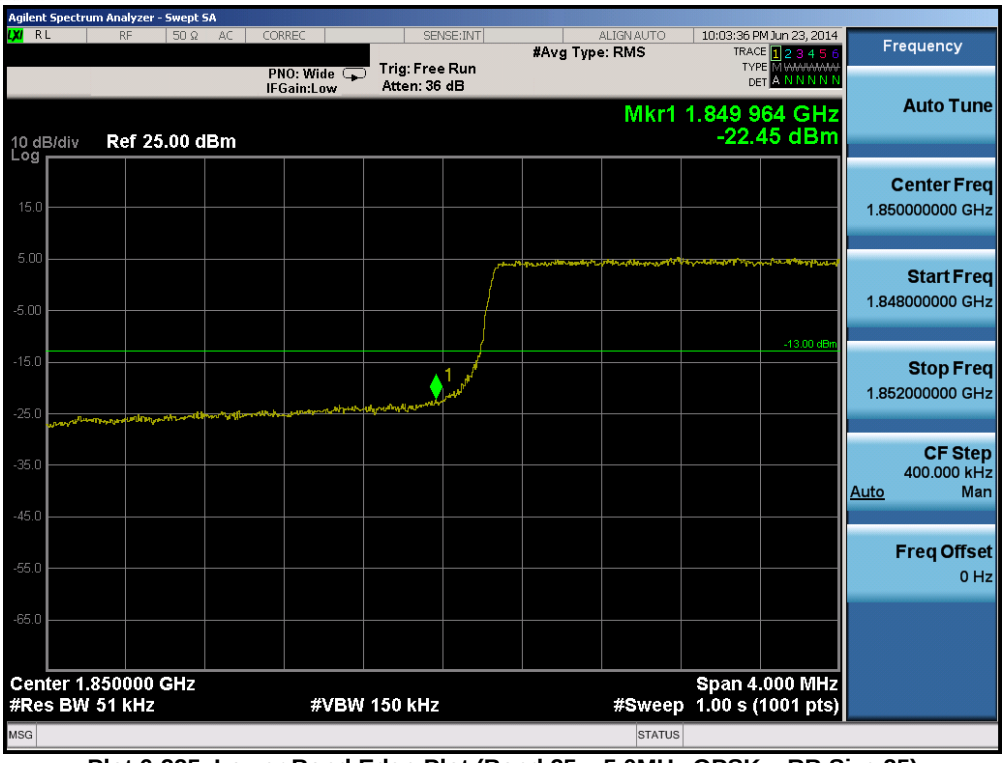

Plot 6-225. Lower Band Edge Plot (Band 25 – 5.0MHz QPSK – RB Size 25)

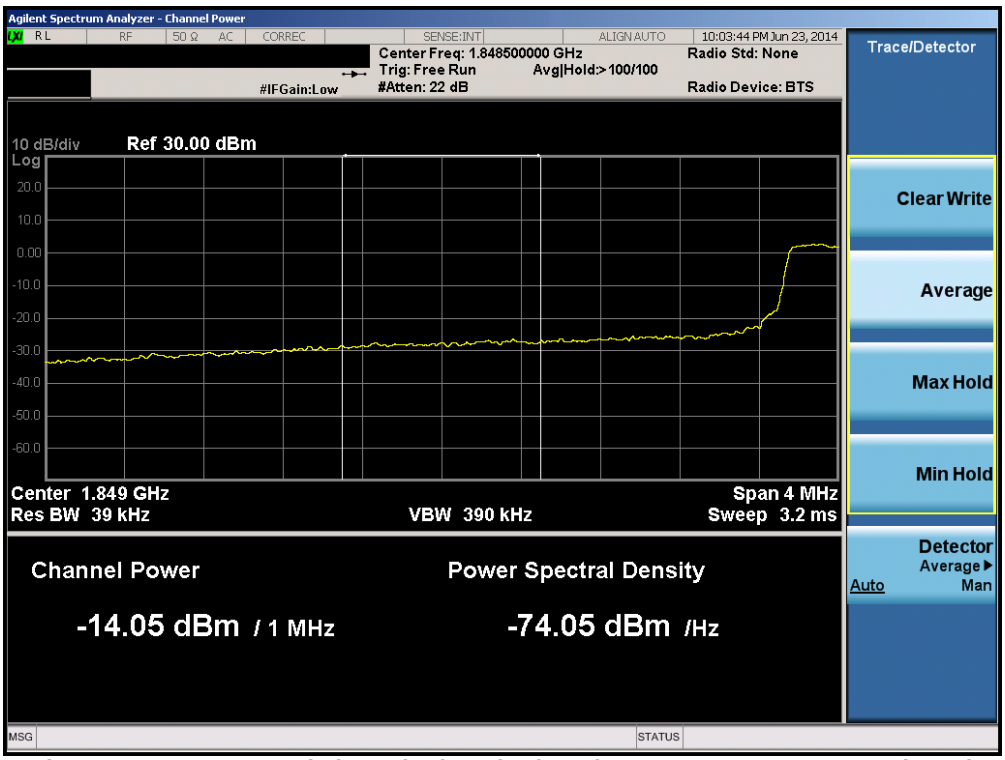

Plot 6-226. Lower Extended Band Edge Plot (Band 25 – 5.0MHz QPSK – RB Size 25)

© 2014 PCTEST Engineering Laboratory, Inc.

Plot 6-227. Upper Band Edge Plot (Band 25 – 5.0MHz QPSK – RB Size 25)

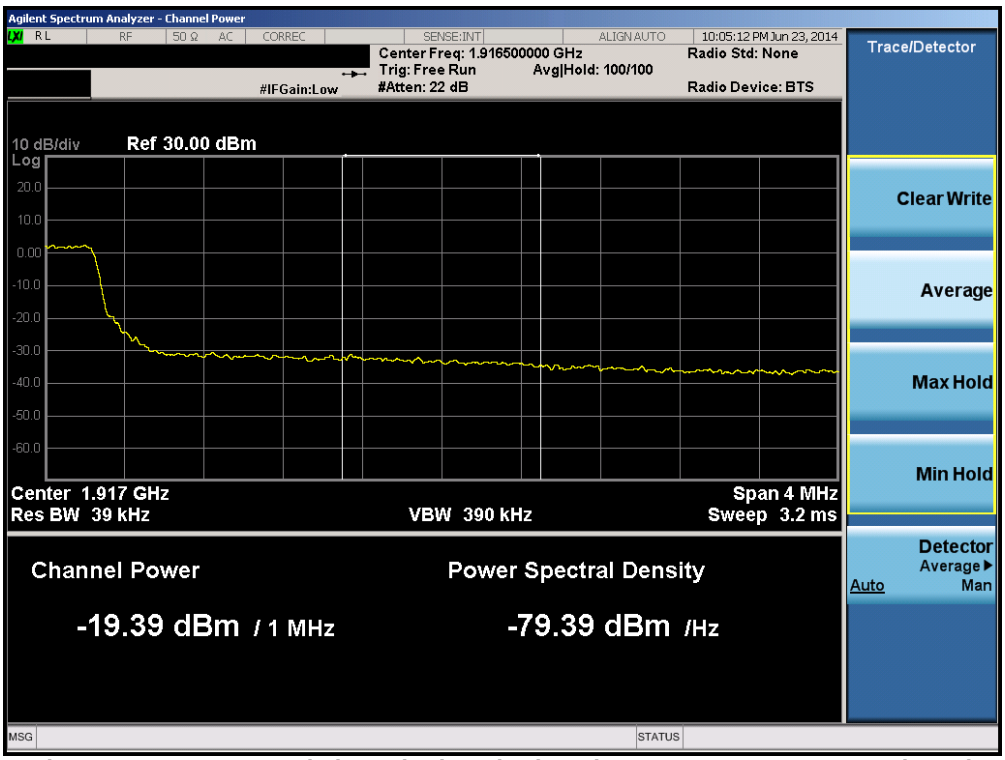

Plot 6-228. Upper Extended Band Edge Plot (Band 25 – 5.0MHz QPSK – RB Size 25)

© 2014 PCTEST Engineering Laboratory, Inc.

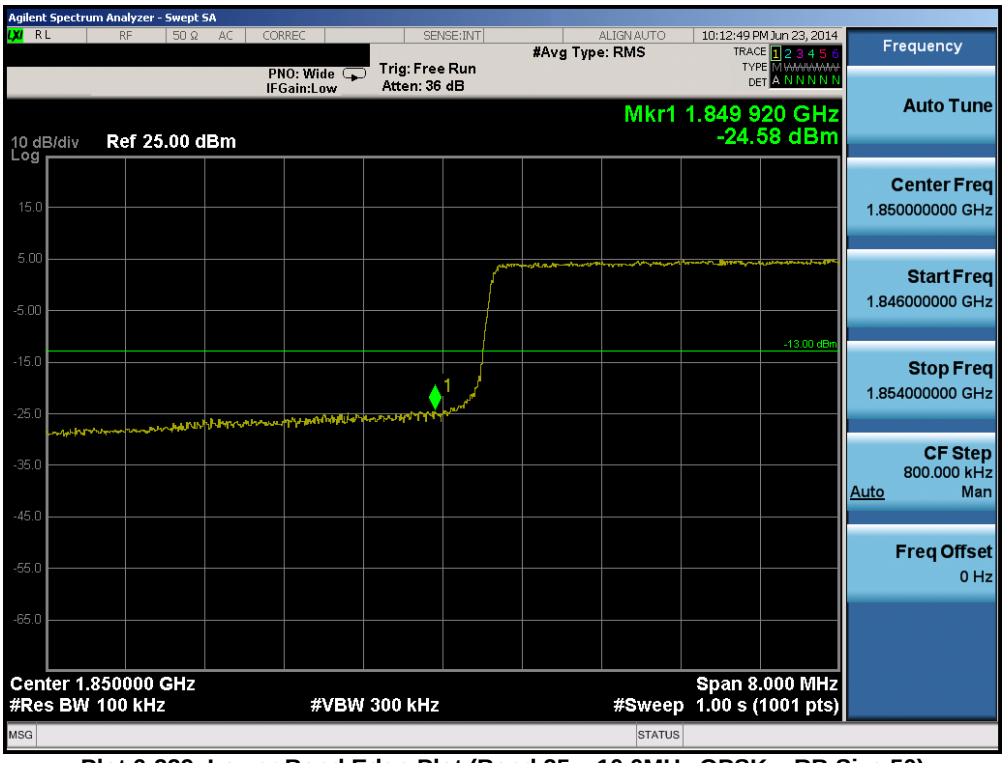

Plot 6-229. Lower Band Edge Plot (Band 25 – 10.0MHz QPSK – RB Size 50)

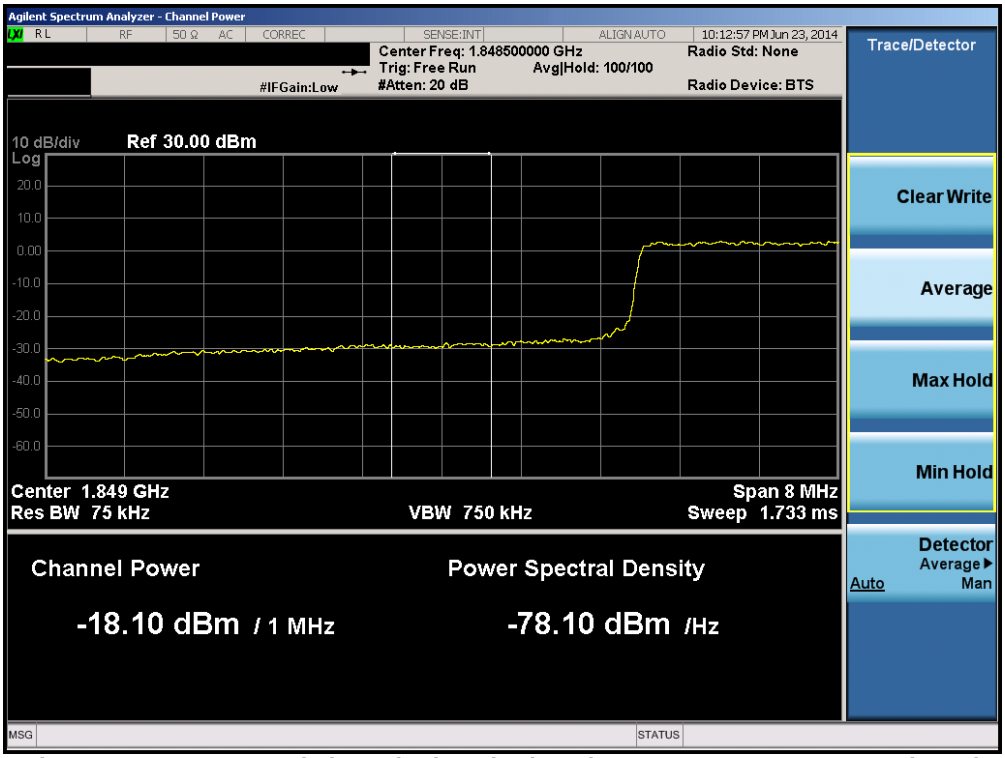

Plot 6-230. Lower Extended Band Edge Plot (Band 25 – 10.0MHz QPSK – RB Size 50)

© 2014 PCTEST Engineering Laboratory, Inc.

Plot 6-231. Upper Band Edge Plot (Band 25 – 10.0MHz QPSK – RB Size 50)

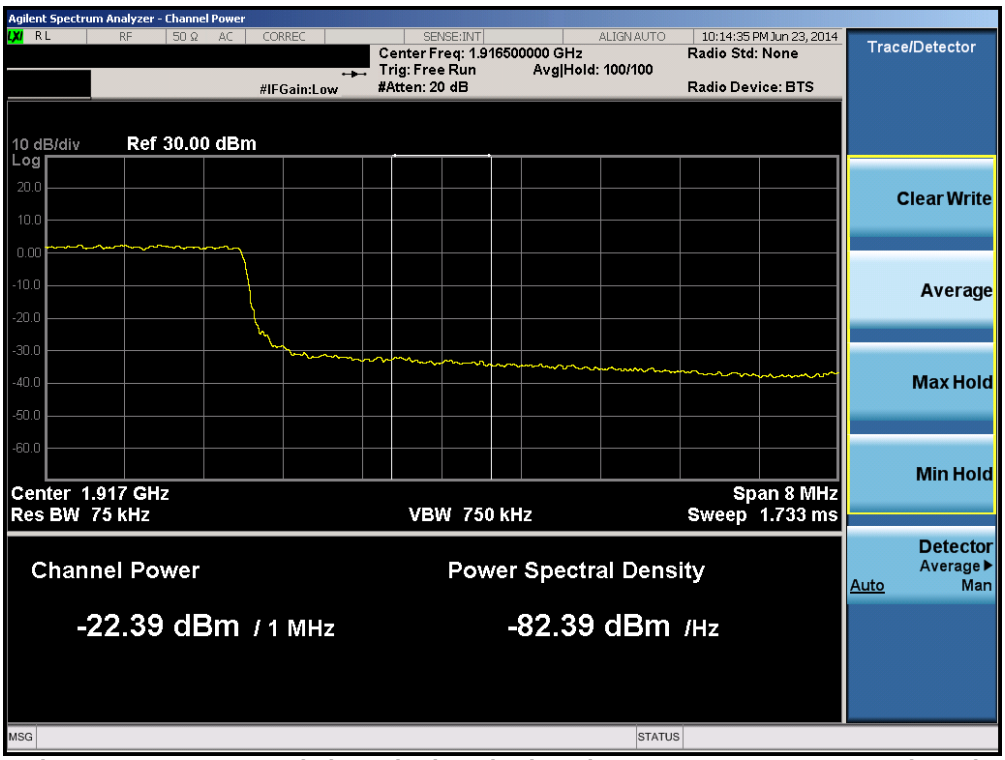

Plot 6-232. Upper Extended Band Edge Plot (Band 25 – 10.0MHz QPSK – RB Size 50)

© 2014 PCTEST Engineering Laboratory, Inc.

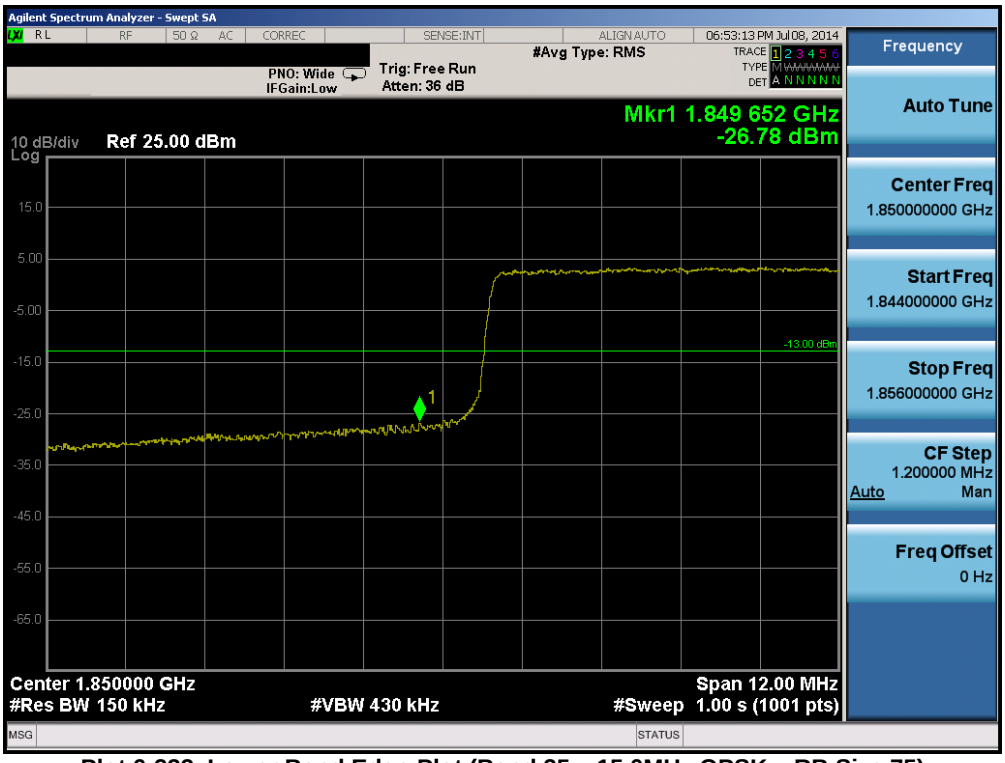

Plot 6-233. Lower Band Edge Plot (Band 25 – 15.0MHz QPSK – RB Size 75)

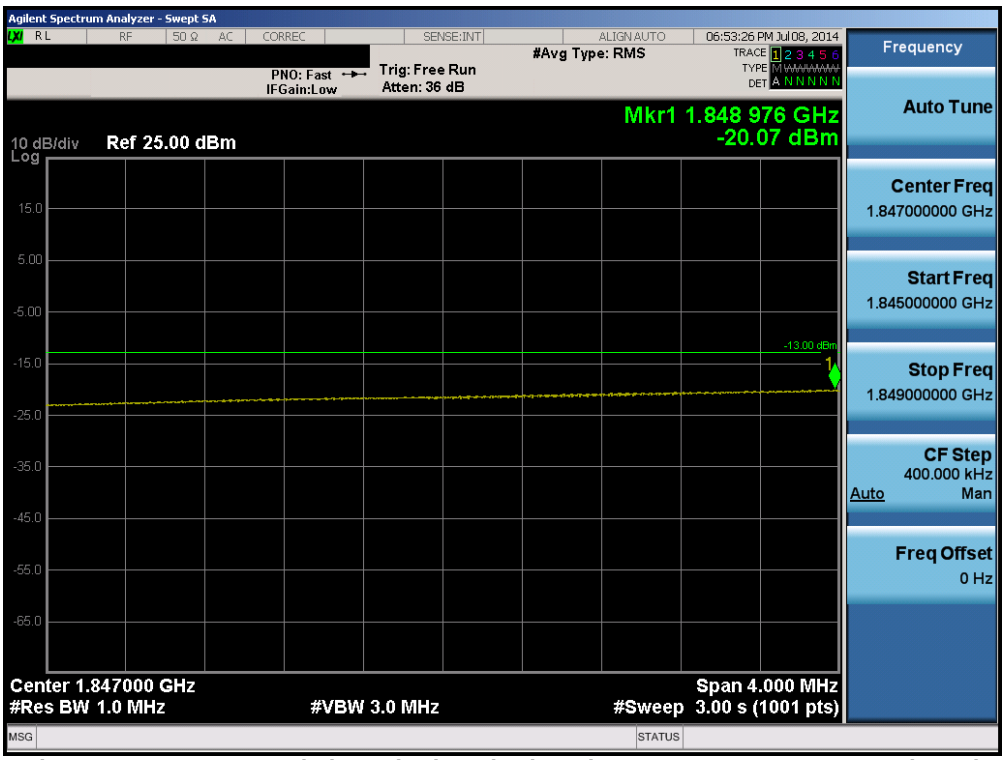

Plot 6-234. Lower Extended Band Edge Plot (Band 25 – 15.0MHz QPSK – RB Size 75)

© 2014 PCTEST Engineering Laboratory, Inc.

Plot 6-235. Upper Band Edge Plot (Band 25 – 15.0MHz QPSK – RB Size 75)

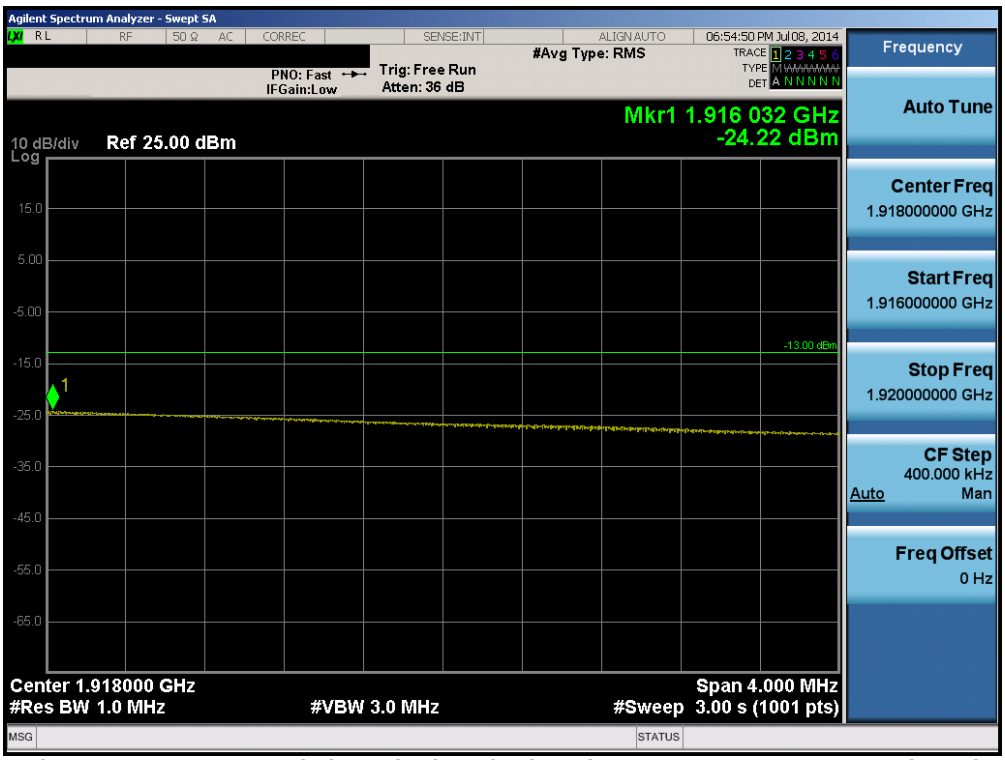

Plot 6-236. Upper Extended Band Edge Plot (Band 25 – 15.0MHz QPSK – RB Size 75)

© 2014 PCTEST Engineering Laboratory, Inc.

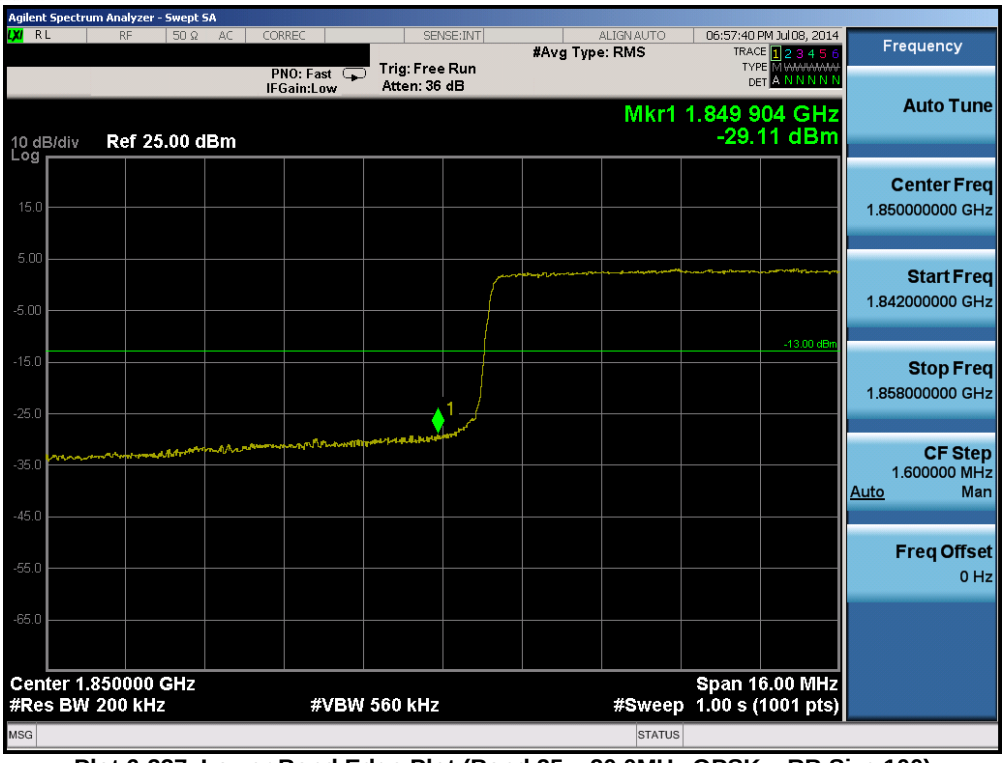

Plot 6-237. Lower Band Edge Plot (Band 25 – 20.0MHz QPSK – RB Size 100)

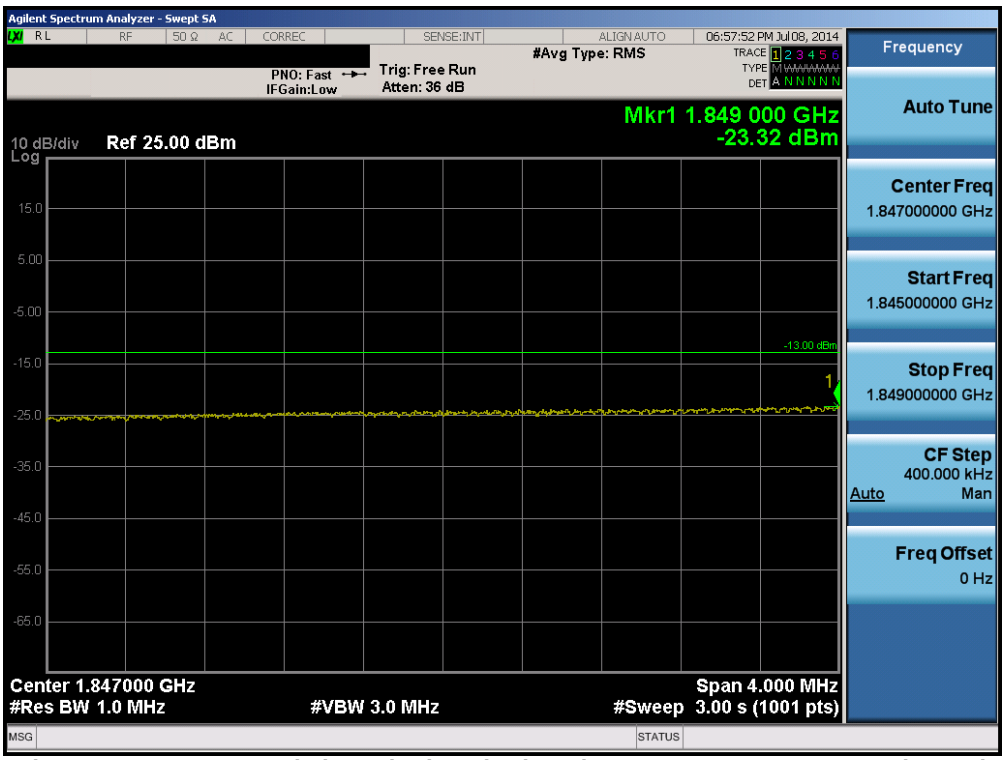

Plot 6-238. Lower Extended Band Edge Plot (Band 25 – 20.0MHz QPSK – RB Size 100)

© 2014 PCTEST Engineering Laboratory, Inc.

Plot 6-239. Upper Band Edge Plot (Band 25 – 20.0MHz QPSK – RB Size 100)

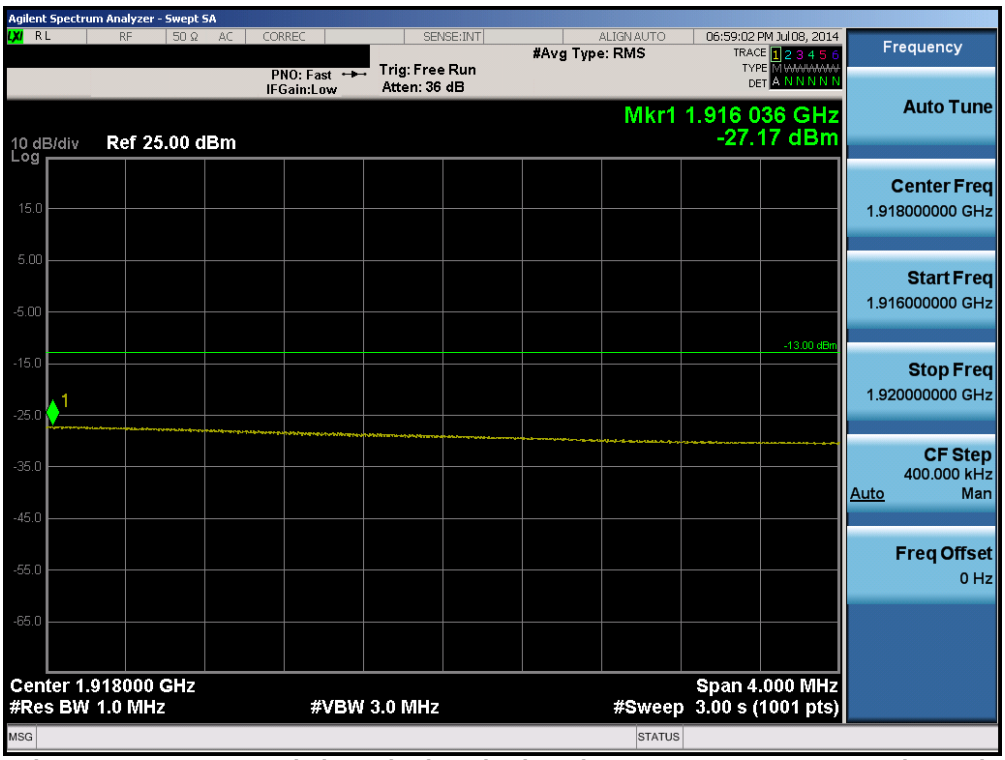

Plot 6-240. Upper Extended Band Edge Plot (Band 25 – 20.0MHz QPSK – RB Size 100)

© 2014 PCTEST Engineering Laboratory, Inc.

6.5 Peak-Average Ratio

§24.232(d) §27.50(d.5)

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

Test Procedure Used

KDB 971168 v02r01 – Section 5.7.1

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

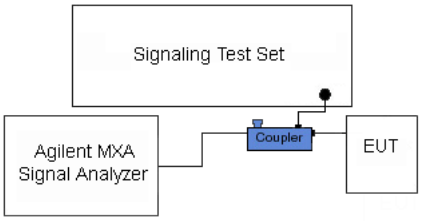

Figure 6-4. Test Instrument & Measurement Setup

Test Notes

None.

© 2014 PCTEST Engineering Laboratory, Inc.

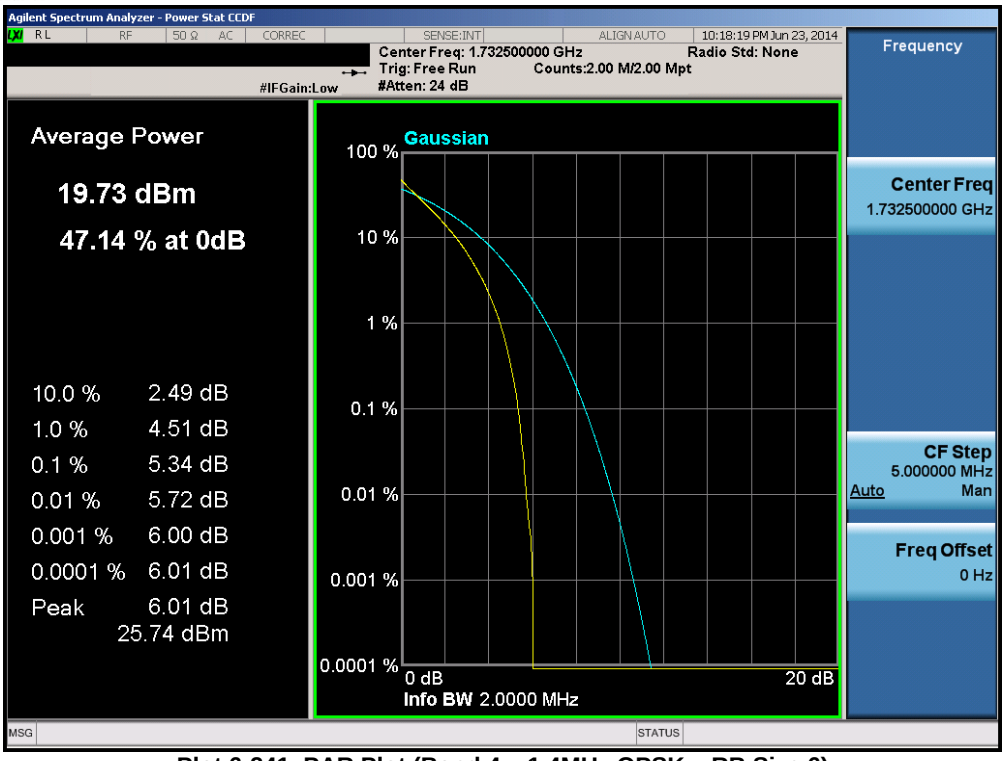

Plot 6-241. PAR Plot (Band 4 – 1.4MHz QPSK – RB Size 6)

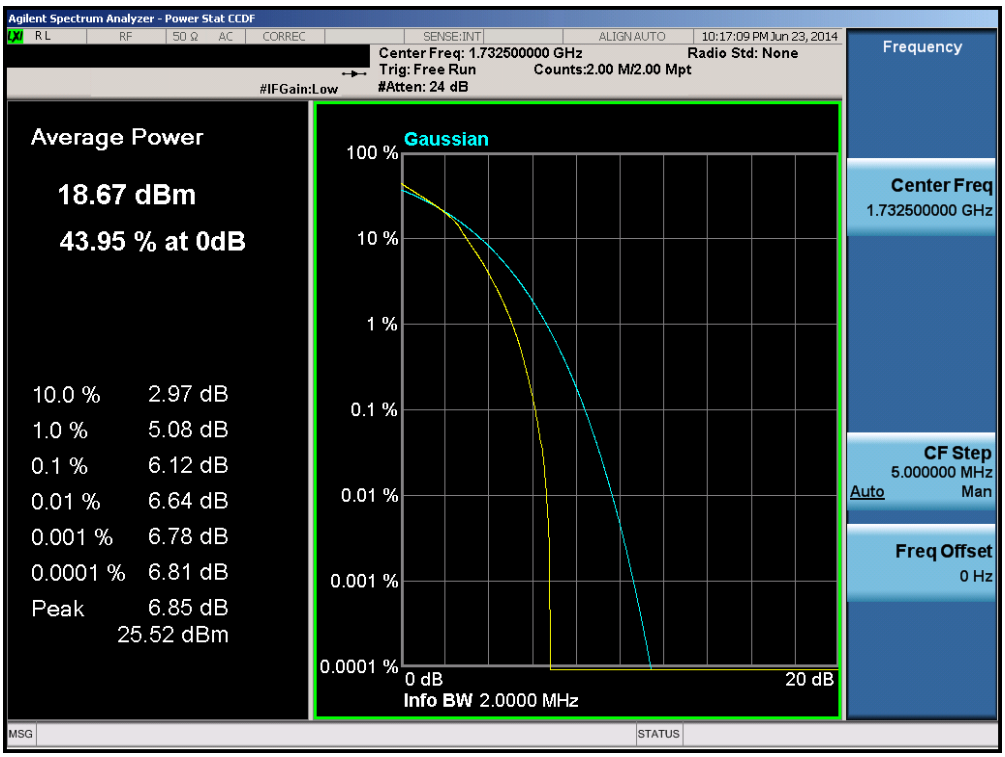

Plot 6-242. PAR Plot (Band 4 – 1.4MHz 16-QAM – RB Size 6)

© 2014 PCTEST Engineering Laboratory, Inc.

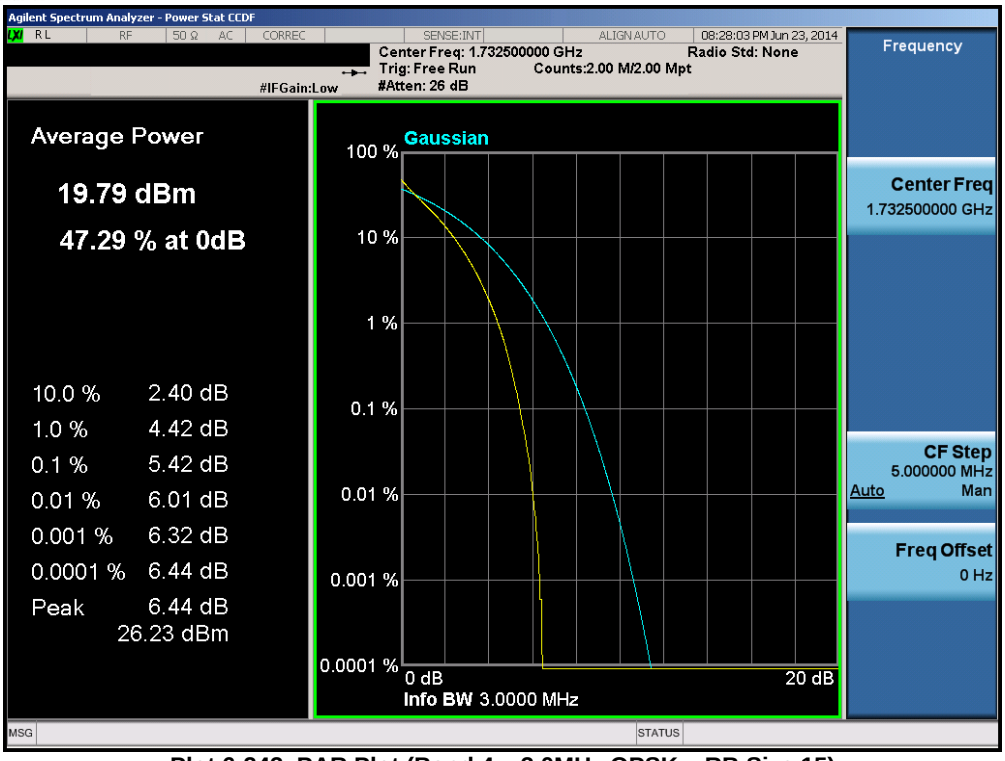

Plot 6-243. PAR Plot (Band 4 – 3.0MHz QPSK – RB Size 15)

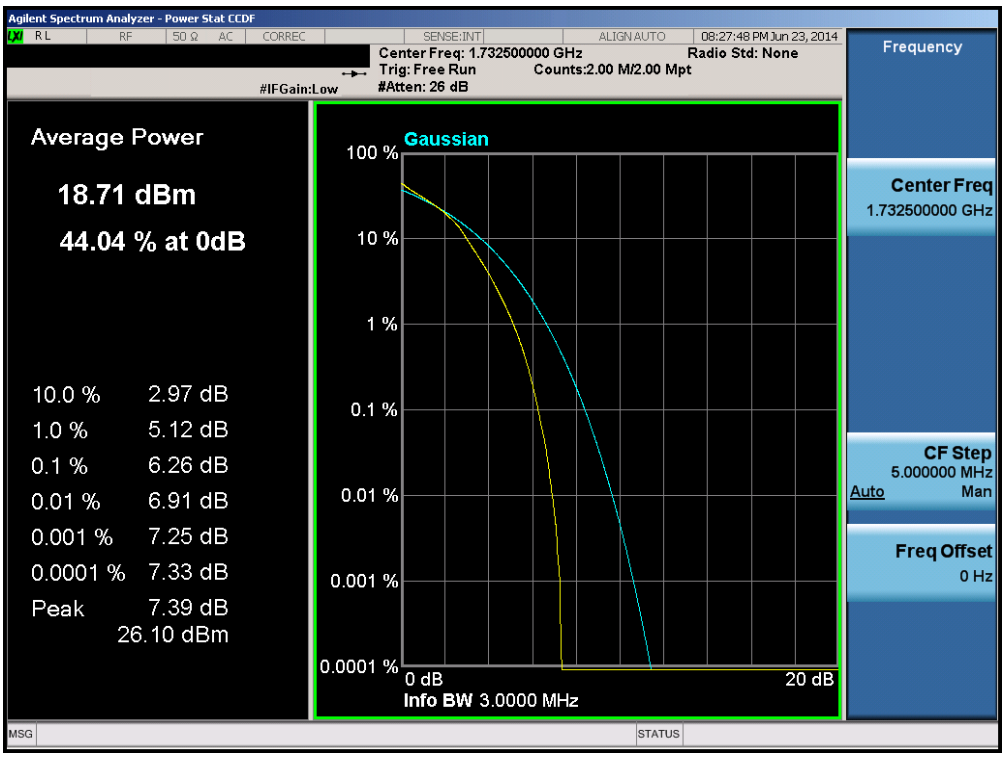

Plot 6-244. PAR Plot (Band 4 – 3.0MHz 16-QAM – RB Size 15)

© 2014 PCTEST Engineering Laboratory, Inc.

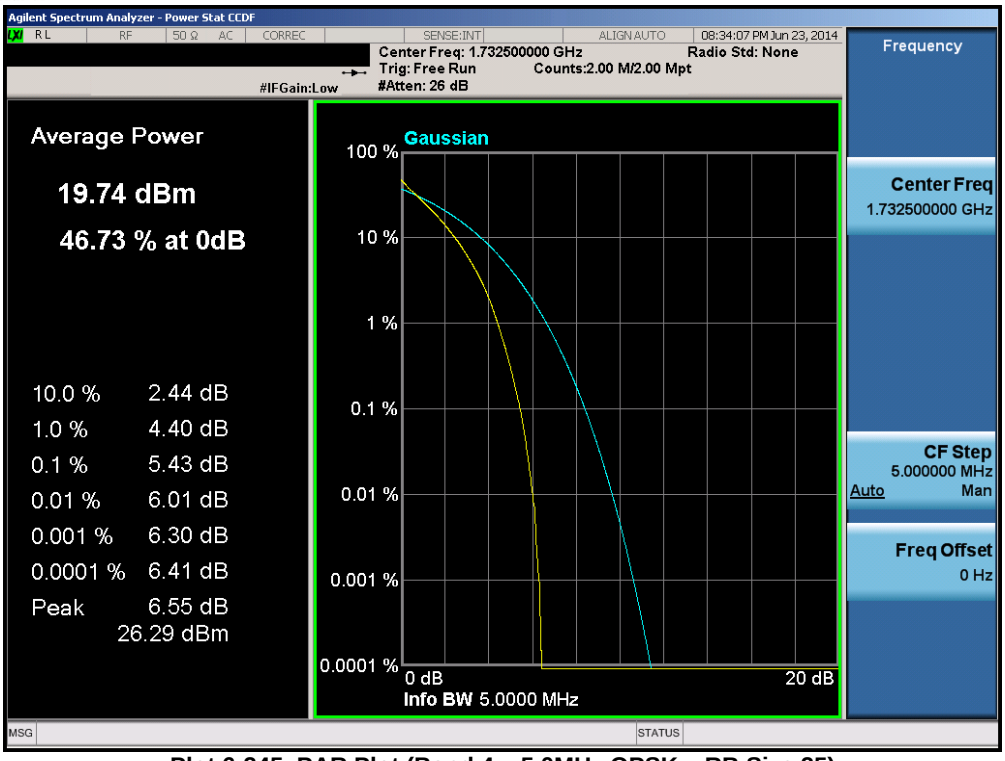

Plot 6-245. PAR Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

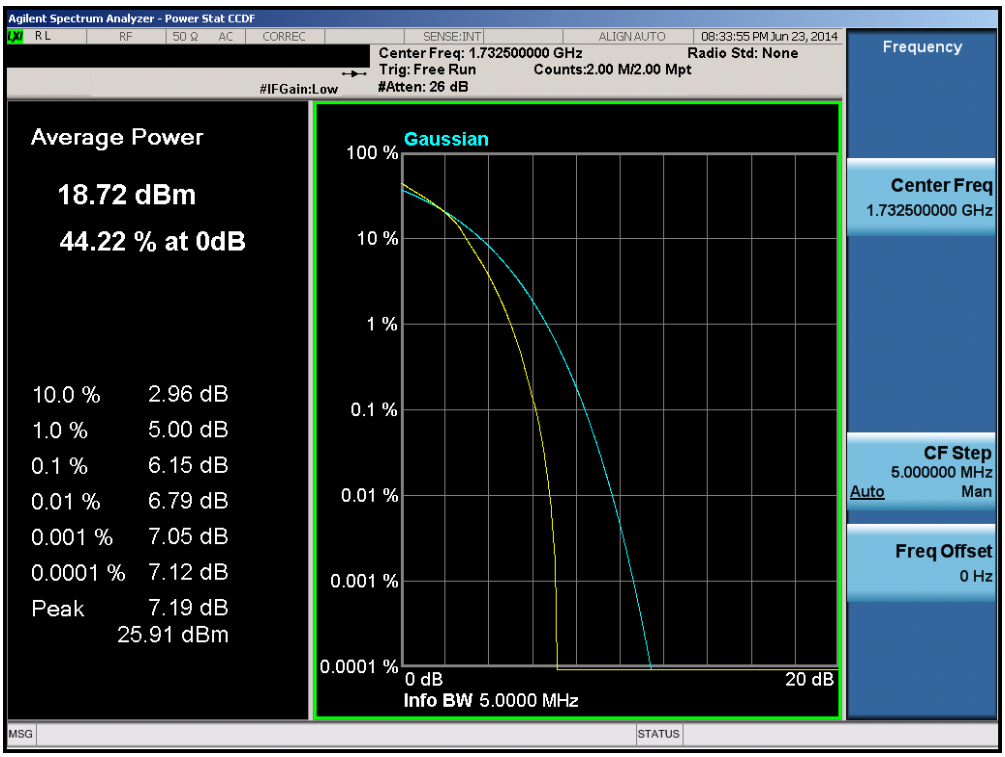

Plot 6-246. PAR Plot (Band 4 – 5.0MHz 16-QAM – RB Size 25)

© 2014 PCTEST Engineering Laboratory, Inc.

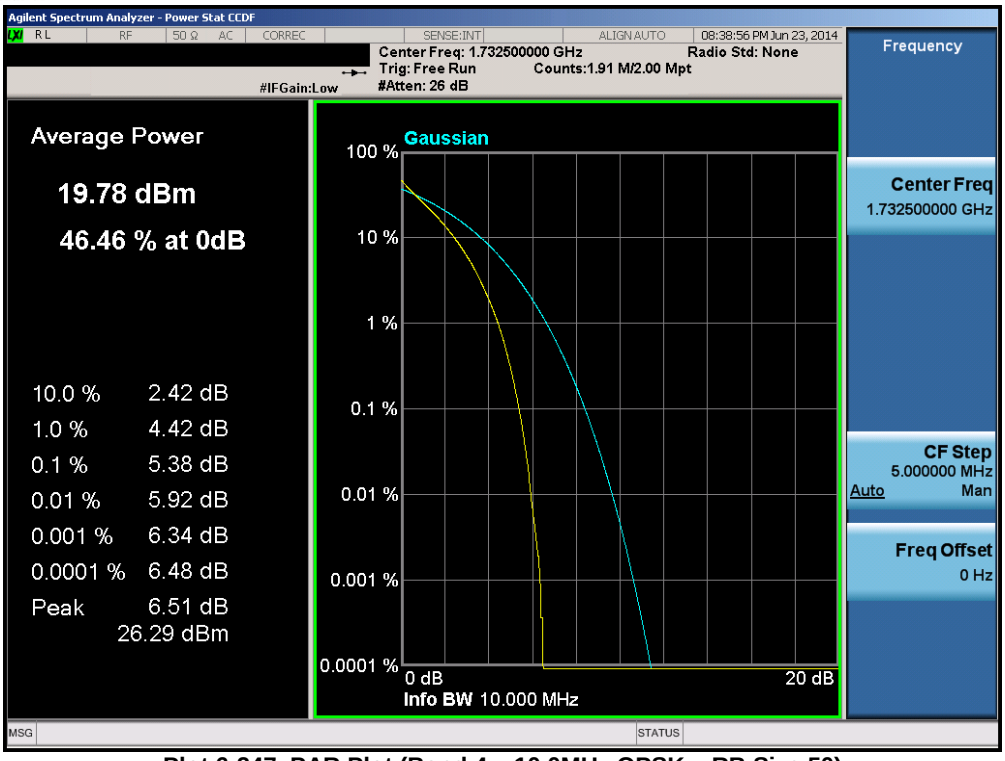

Plot 6-247. PAR Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

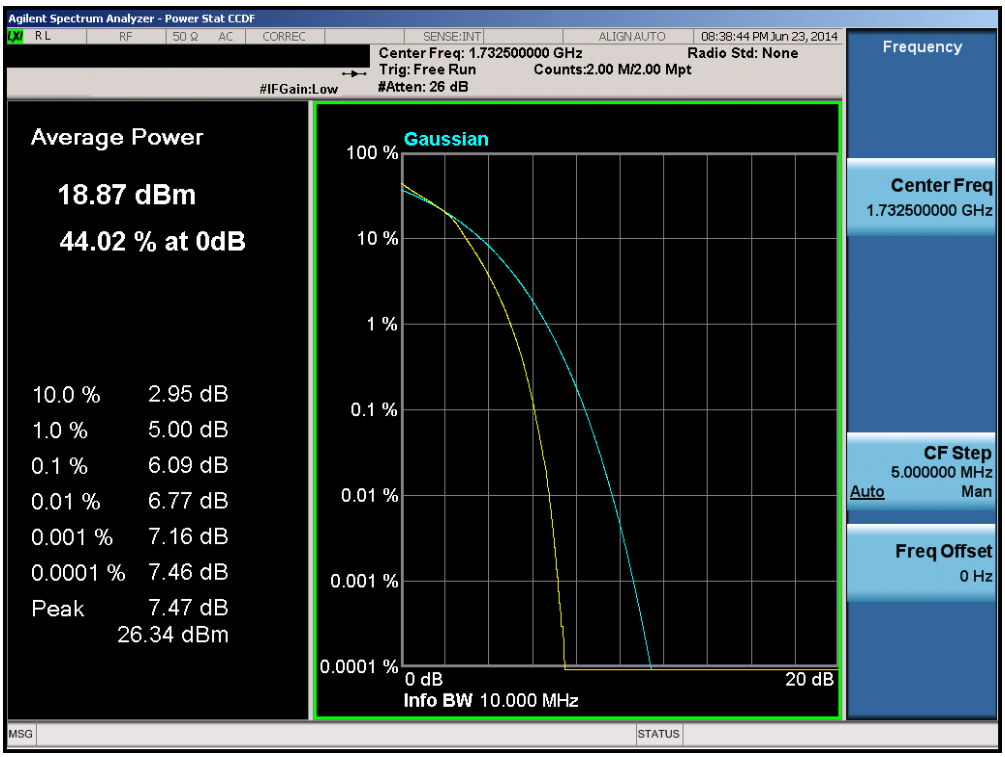

Plot 6-248. PAR Plot (Band 4 – 10.0MHz 16-QAM – RB Size 50)

© 2014 PCTEST Engineering Laboratory, Inc.

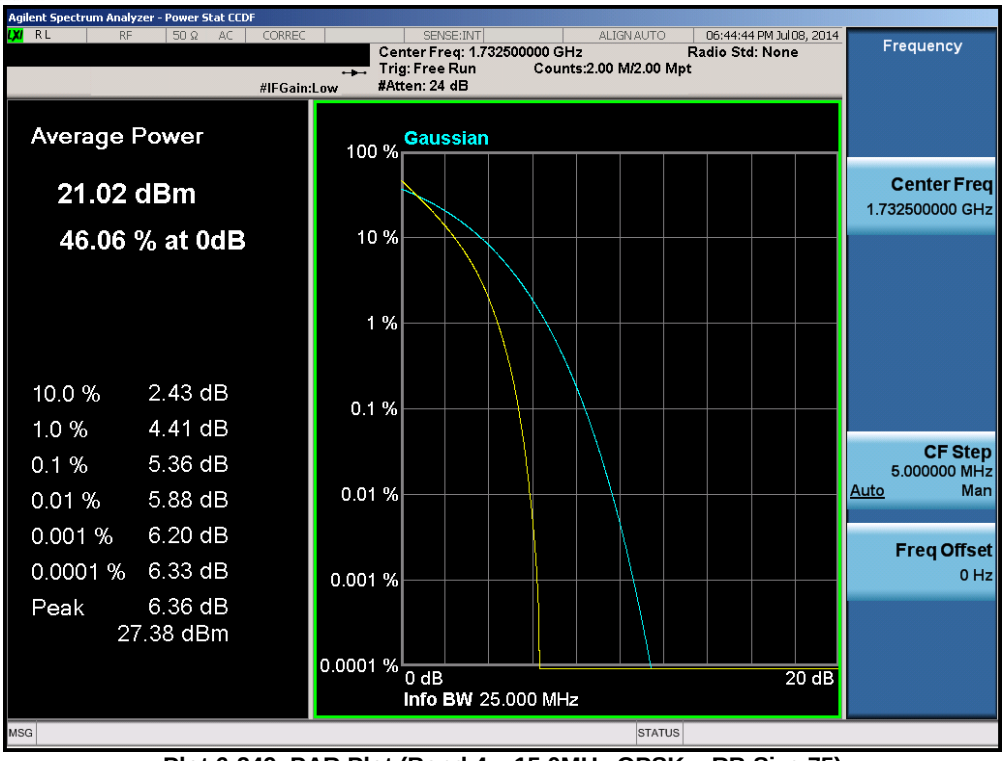

Plot 6-249. PAR Plot (Band 4 – 15.0MHz QPSK – RB Size 75)

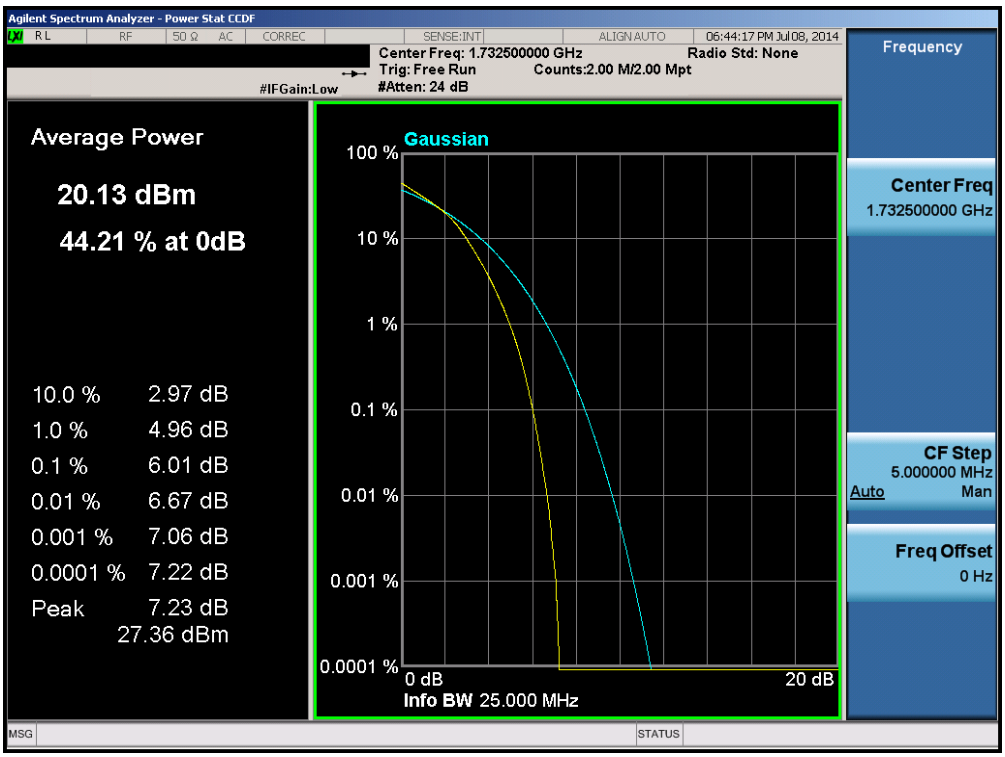

Plot 6-250. PAR Plot (Band 4 – 15.0MHz 16-QAM – RB Size 75)

© 2014 PCTEST Engineering Laboratory, Inc.

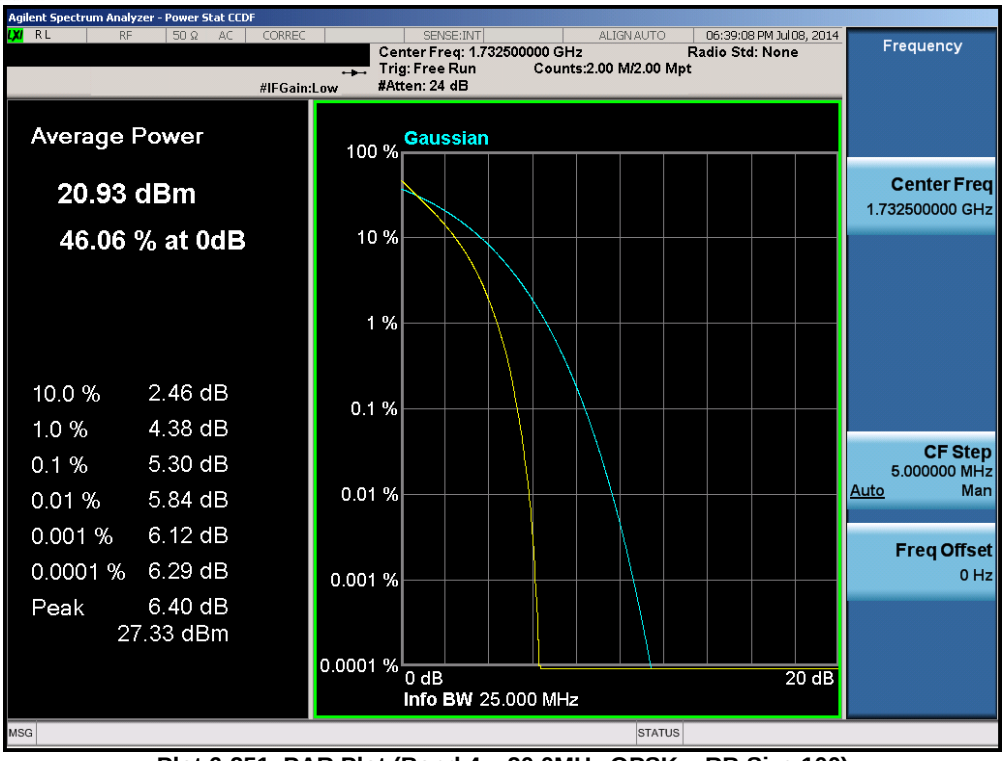

Plot 6-251. PAR Plot (Band 4 – 20.0MHz QPSK – RB Size 100)

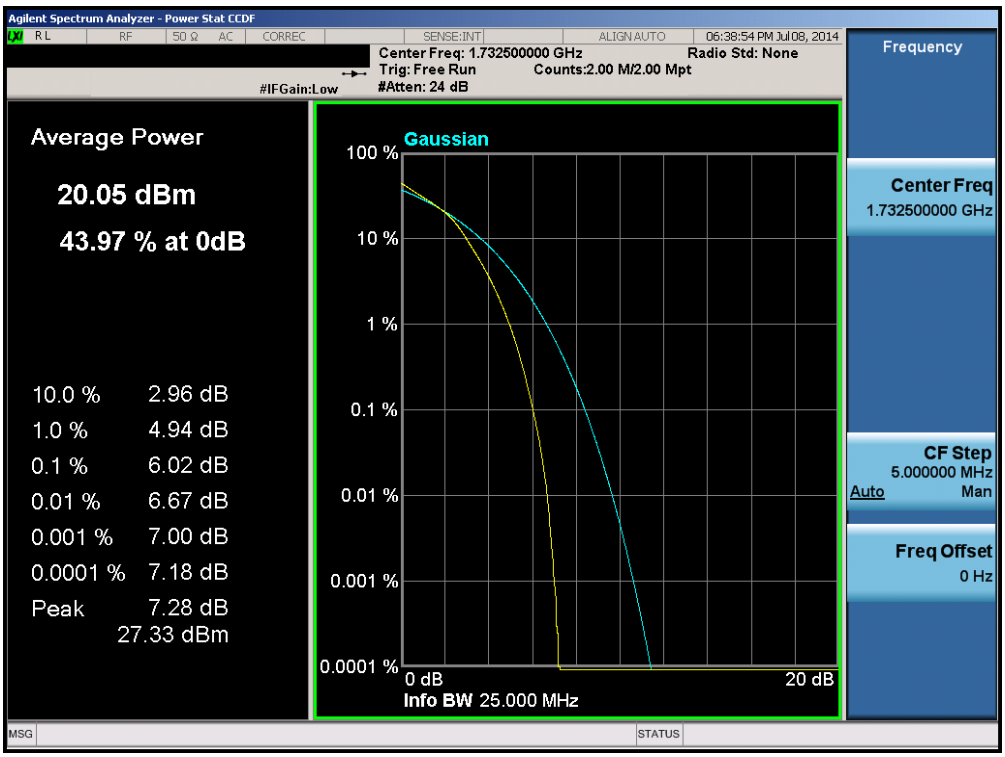

Plot 6-252. PAR Plot (Band 4 – 20.0MHz 16-QAM – RB Size 100)

© 2014 PCTEST Engineering Laboratory, Inc.

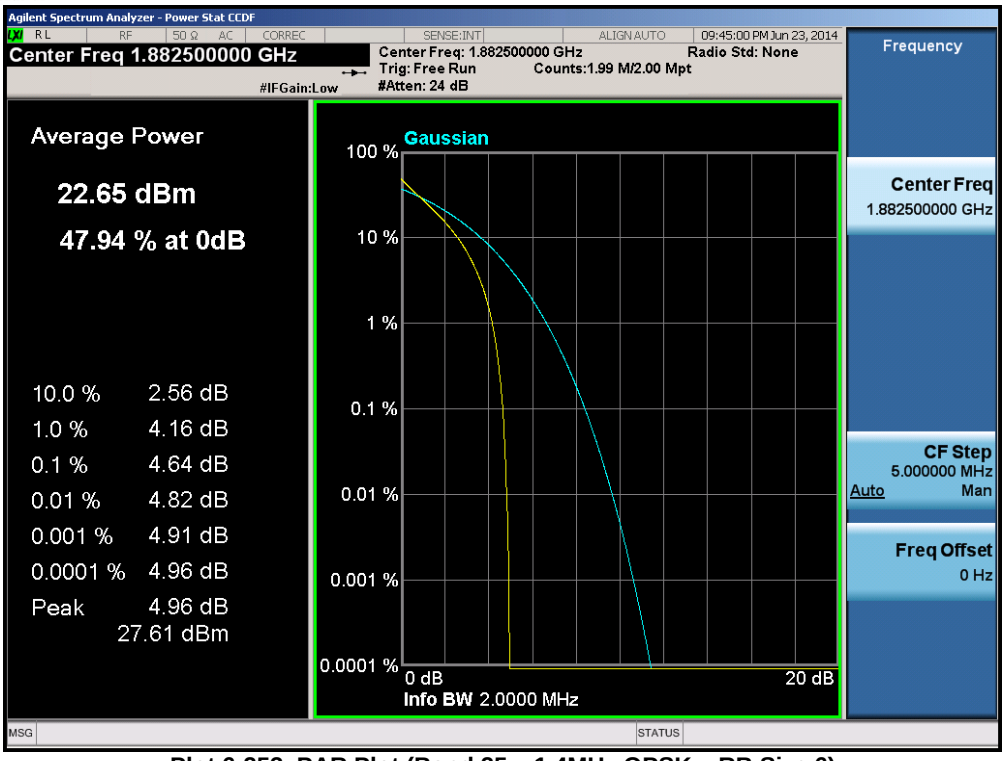

Plot 6-253. PAR Plot (Band 25 – 1.4MHz QPSK – RB Size 6)

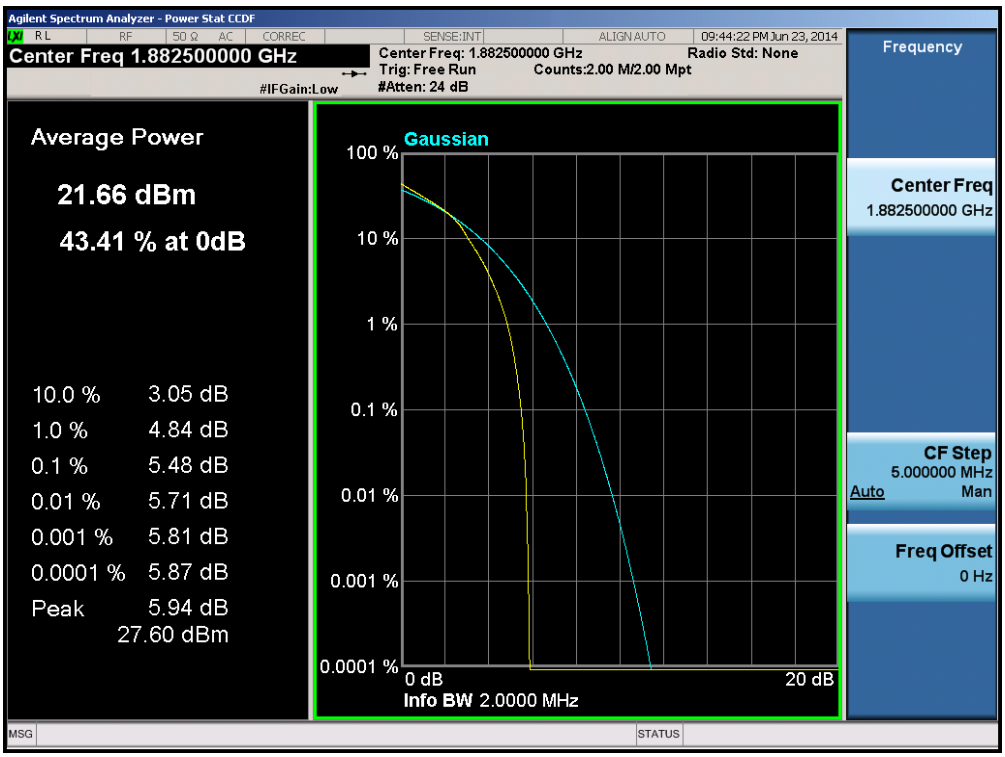

Plot 6-254. PAR Plot (Band 25 – 1.4MHz 16-QAM – RB Size 6)

© 2014 PCTEST Engineering Laboratory, Inc.

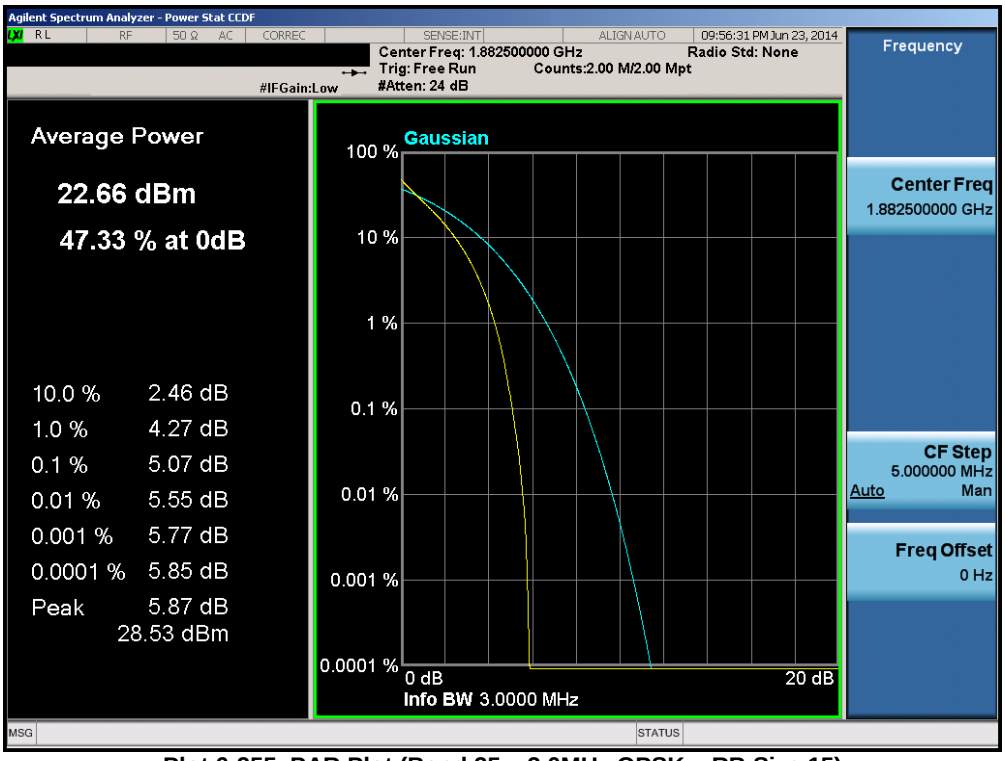

Plot 6-255. PAR Plot (Band 25 – 3.0MHz QPSK – RB Size 15)

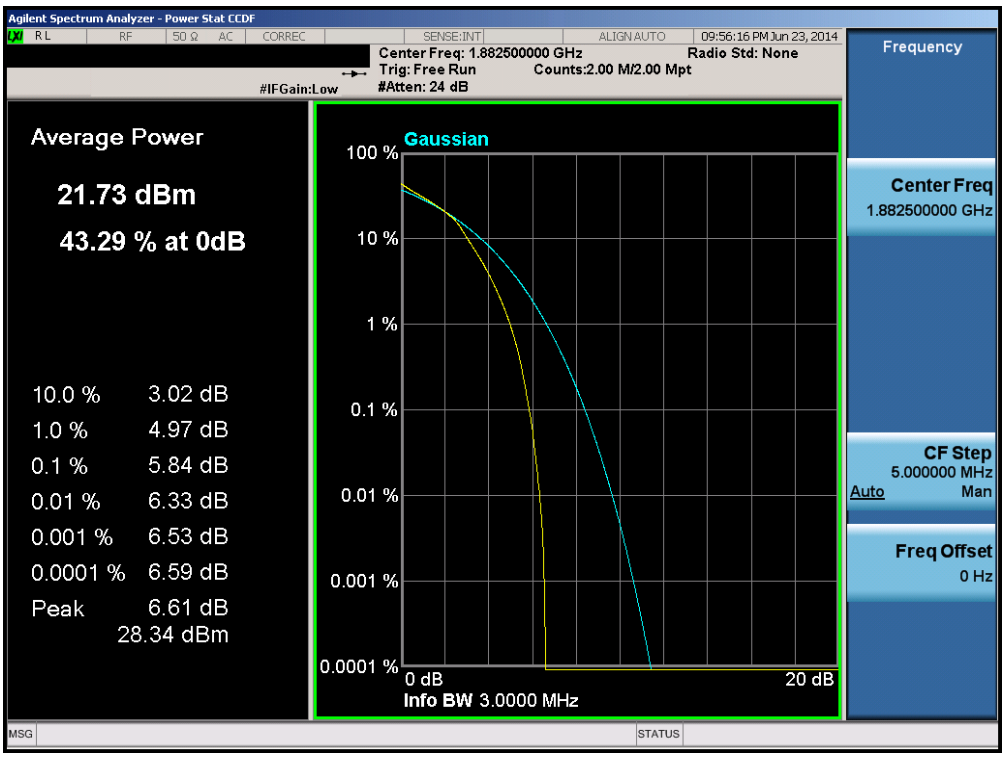

Plot 6-256. PAR Plot (Band 25 – 3.0MHz 16-QAM – RB Size 15)

© 2014 PCTEST Engineering Laboratory, Inc.

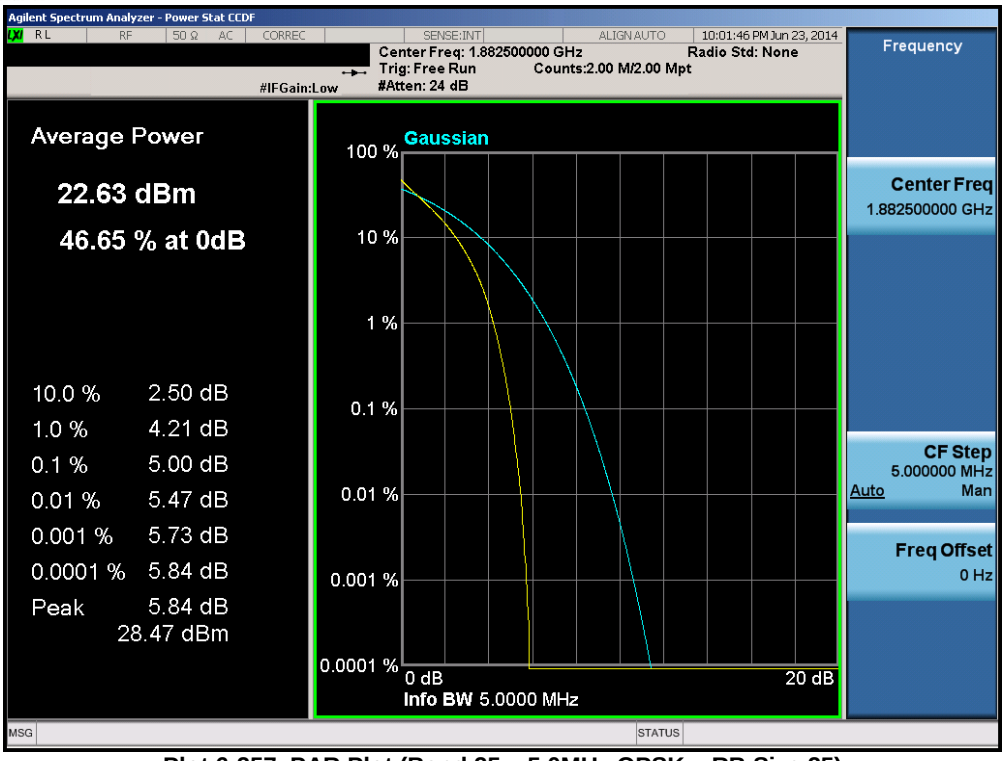

Plot 6-257. PAR Plot (Band 25 – 5.0MHz QPSK – RB Size 25)

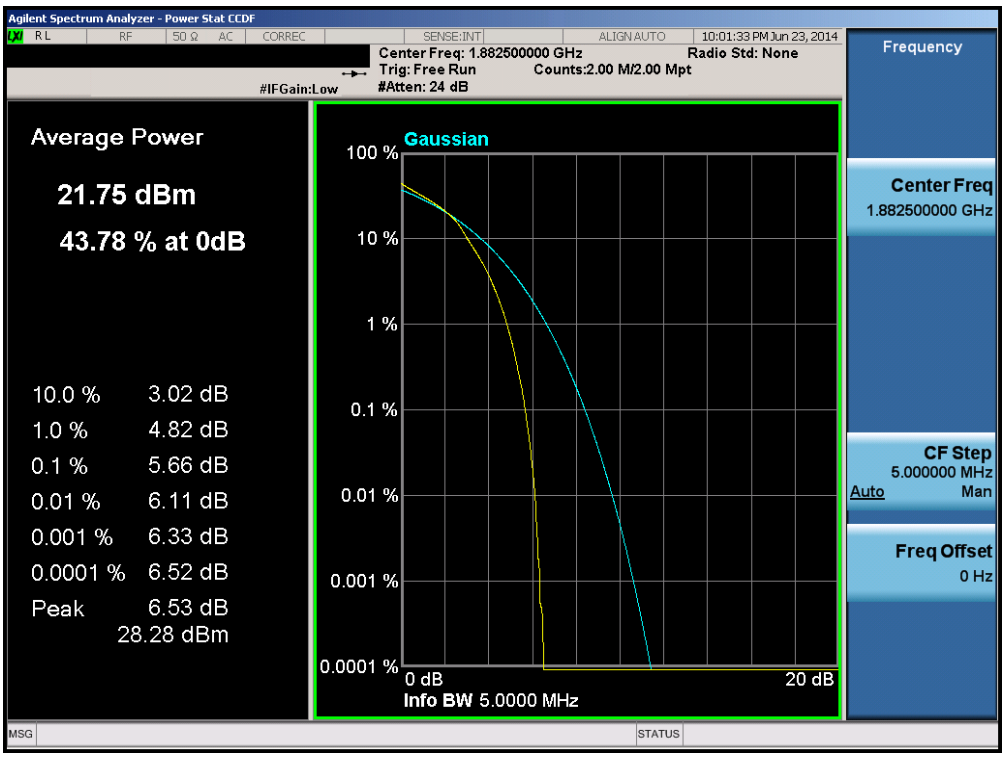

Plot 6-258. PAR Plot (Band 25 – 5.0MHz 16-QAM – RB Size 25)

© 2014 PCTEST Engineering Laboratory, Inc.

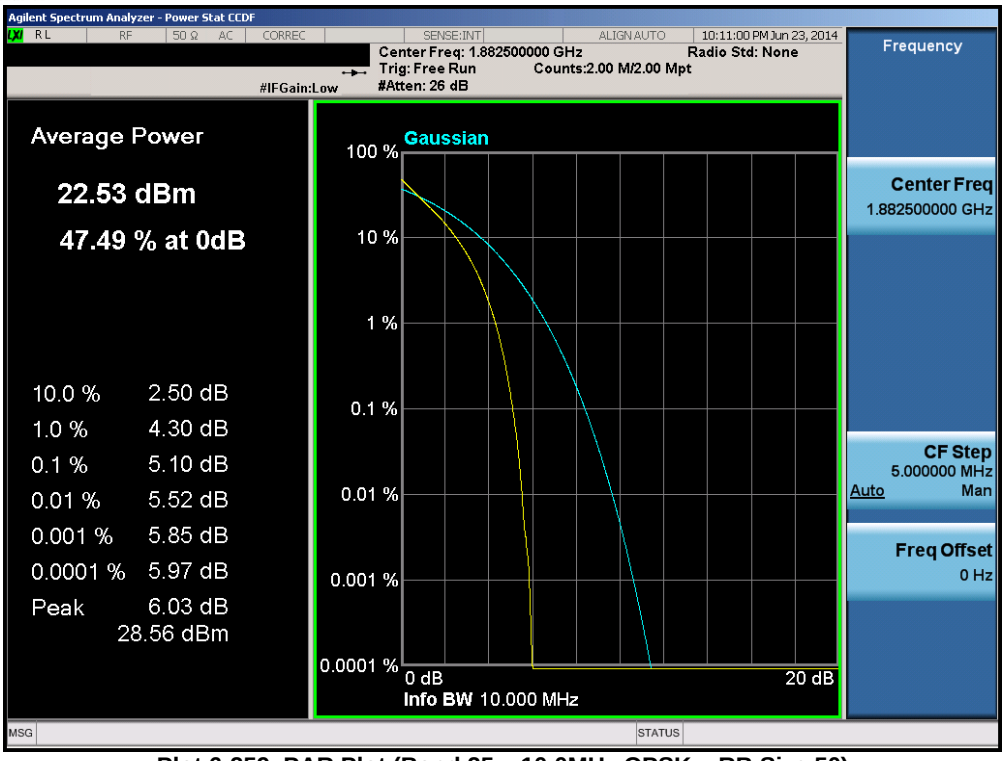

Plot 6-259. PAR Plot (Band 25 – 10.0MHz QPSK – RB Size 50)

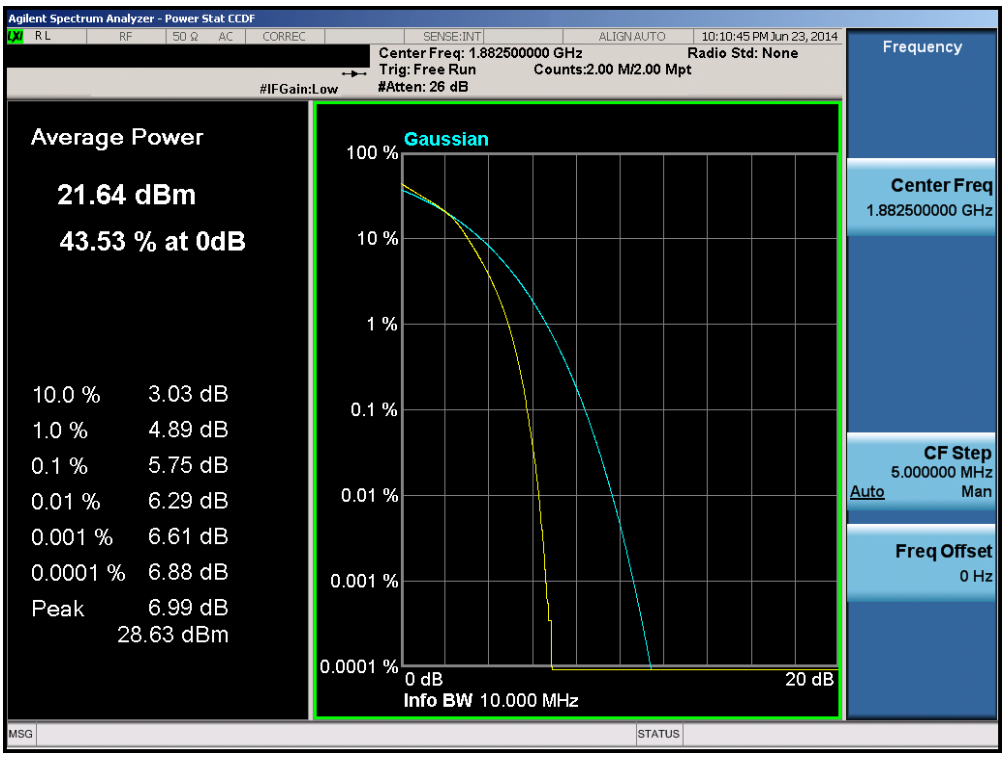

Plot 6-260. PAR Plot (Band 25 – 10.0MHz 16-QAM – RB Size 50)

© 2014 PCTEST Engineering Laboratory, Inc.

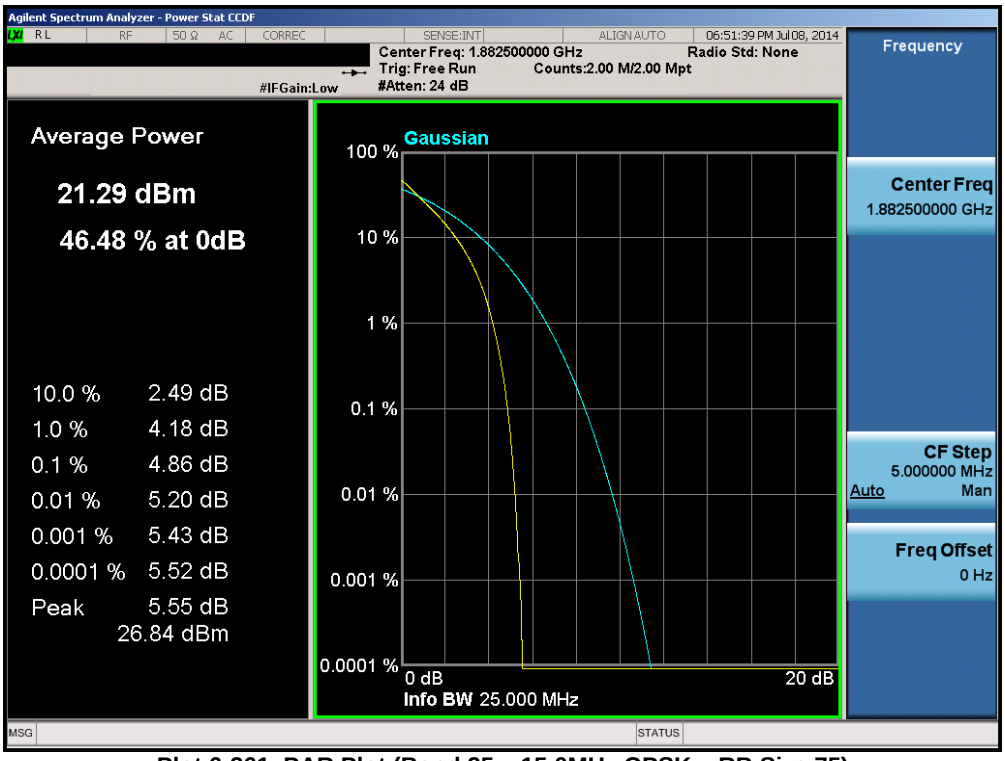

Plot 6-261. PAR Plot (Band 25 – 15.0MHz QPSK – RB Size 75)

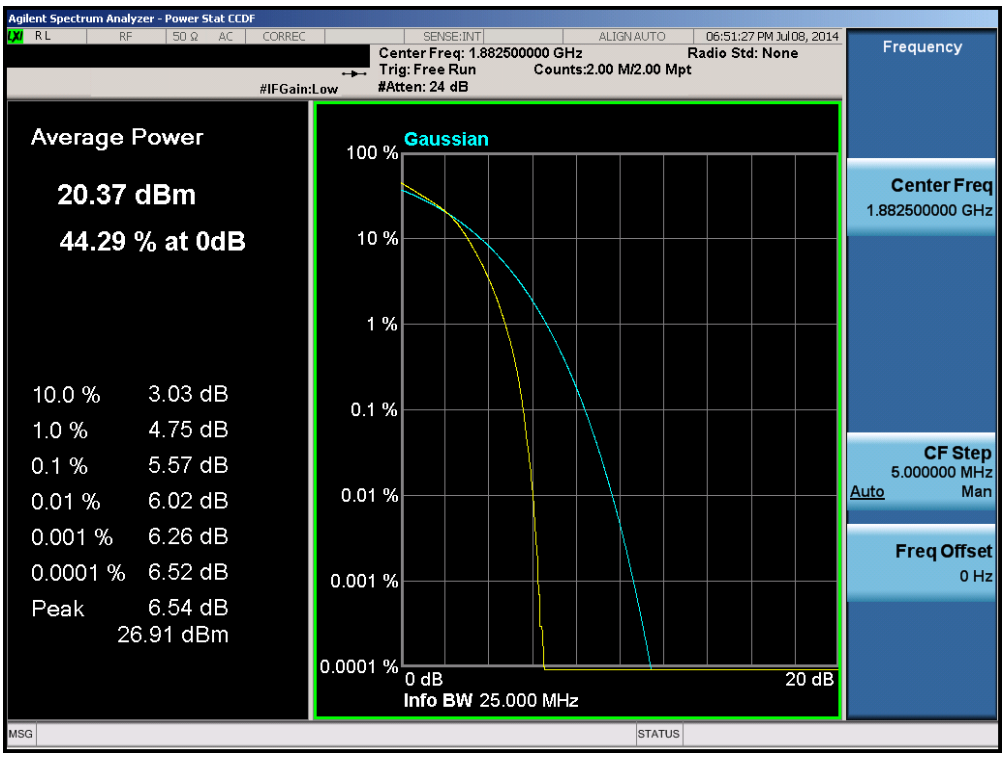

Plot 6-262. PAR Plot (Band 25 – 15.0MHz 16-QAM – RB Size 75)

© 2014 PCTEST Engineering Laboratory, Inc.

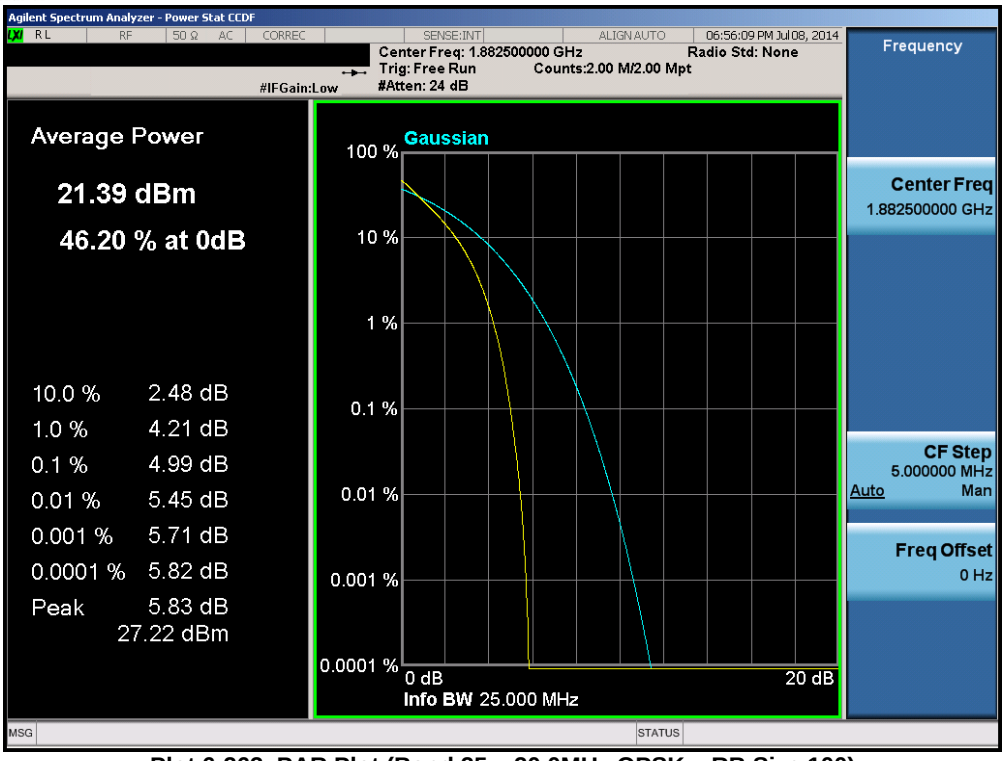

Plot 6-263. PAR Plot (Band 25 – 20.0MHz QPSK – RB Size 100)

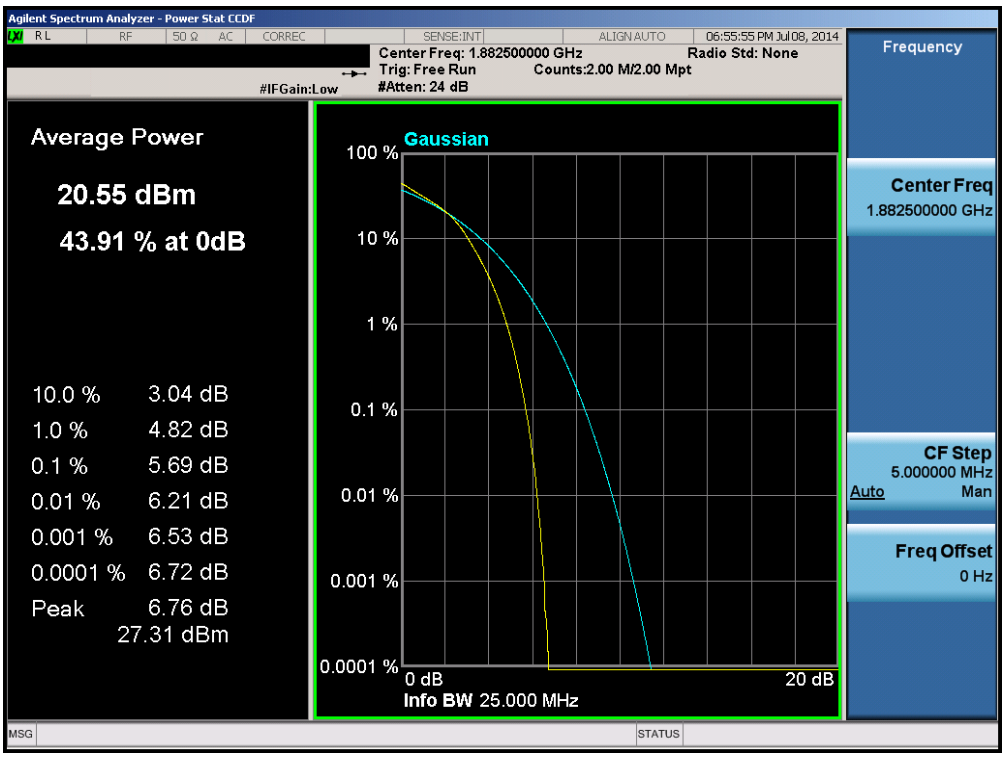

Plot 6-264. PAR Plot (Band 25 – 20.0MHz 16-QAM – RB Size 100)

© 2014 PCTEST Engineering Laboratory, Inc.

6.6 Radiated Power (ERP/EIRP)

§22.913(a.2) §24.232(c) §27.50(c.10) §27.50(d.4)

Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 v02r01 – Section 5.2.1

ANSI/TIA-603-C-2004 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer's "time domain power" measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW ≥ 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points ≥ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto". Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the "gating" function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

© 2014 PCTEST Engineering Laboratory, Inc.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

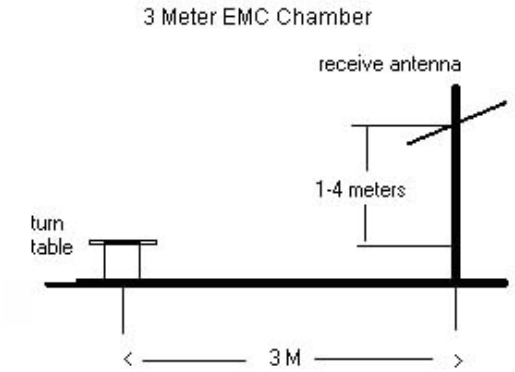

Figure 6-5. Test Instrument & Measurement Setup

Test Notes

1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.

2) The EUT is supplied with a new/fully-recharged battery. The battery for this model BL-53YH contains an embedded NFC antenna.

© 2014 PCTEST Engineering Laboratory, Inc.

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery Cover	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBd]	Ant. Pol. [H/V]	EUT Pol.	ERP [dBm]	ERP [Watts]	Margin [dB]
699.70	1.4	QPSK	Standard	1 / 0	16.89	2.71	V	V	19.60	0.091	-15.17
707.50	1.4	QPSK	Standard	1 / 0	16.65	2.71	V	V	19.36	0.086	-15.41
715.30	1.4	QPSK	Standard	1 / 0	16.04	2.71	V	V	18.75	0.075	-16.02
699.70	1.4	16-QAM	Standard	1 / 5	15.68	2.71	V	V	18.39	0.069	-16.38
707.50	1.4	16-QAM	Standard	1 / 0	15.64	2.71	V	V	18.35	0.068	-16.42
715.30	1.4	16-QAM	Standard	1 / 5	15.24	2.71	V	V	17.95	0.062	-16.82
700.50	3	QPSK	Standard	1 / 0	16.38	2.71	V	V	19.09	0.081	-15.68
707.50	3	QPSK	Standard	1 / 0	16.24	2.71	V	V	18.95	0.079	-15.82
714.50	3	QPSK	Standard	1 / 0	15.60	2.71	V	V	18.31	0.068	-16.46
700.50	3	16-QAM	Standard	1 / 0	15.29	2.71	V	V	18.00	0.063	-16.77
707.50	3	16-QAM	Standard	1 / 0	14.95	2.71	V	V	17.66	0.058	-17.11
714.50	3	16-QAM	Standard	1 / 14	14.47	2.71	V	V	17.18	0.052	-17.59
701.50	5	QPSK	Standard	1 / 0	16.96	2.71	V	V	19.67	0.093	-15.10
707.50	5	QPSK	Standard	1 / 0	16.81	2.71	V	V	19.52	0.090	-15.25
713.50	5	QPSK	Standard	1 / 0	16.31	2.71	V	V	19.02	0.080	-15.75
701.50	5	16-QAM	Standard	1 / 0	15.68	2.71	V	V	18.39	0.069	-16.38
707.50	5	16-QAM	Standard	1 / 0	15.53	2.71	V	V	18.24	0.067	-16.53
713.50	5	16-QAM	Standard	1 / 24	15.11	2.71	V	V	17.82	0.061	-16.95
704.00	10	QPSK	Standard	1 / 0	16.80	2.71	V	V	19.51	0.089	-15.26
707.50	10	QPSK	Standard	1 / 0	16.58	2.71	V	V	19.29	0.085	-15.48
711.00	10	QPSK	Standard	1 / 0	16.84	2.71	V	V	19.55	0.090	-15.22
704.00	10	16-QAM	Standard	1 / 0	15.76	2.71	V	V	18.47	0.070	-16.30
707.50	10	16-QAM	Standard	1 / 0	15.03	2.71	V	V	17.74	0.059	-17.03
711.00	10	16-QAM	Standard	1 / 0	15.95	2.71	V	V	18.66	0.073	-16.11
701.50	5	QPSK	WCC	1 / 0	7.86	2.71	V	H	10.57	0.011	-24.20

Table 6-2. ERP Data (Band 12)

© 2014 PCTEST Engineering Laboratory, Inc.

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery Cover	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBd]	Ant. Pol. [H/V]	EUT Pol.	ERP [dBm]	ERP [Watts]	Margin [dB]
824.70	1.4	QPSK	Standard	1 / 0	16.29	4.60	V	V	20.89	0.123	-17.56
836.50	1.4	QPSK	Standard	1 / 5	15.88	4.82	V	V	20.70	0.118	-17.75
848.30	1.4	QPSK	Standard	1 / 0	15.81	5.04	V	V	20.85	0.122	-17.60
824.70	1.4	16-QAM	Standard	1 / 0	15.10	4.60	V	V	19.70	0.093	-18.75
836.50	1.4	16-QAM	Standard	1 / 0	14.68	4.82	V	V	19.50	0.089	-18.95
848.30	1.4	16-QAM	Standard	1 / 5	14.67	5.04	V	V	19.71	0.094	-18.74
825.50	3	QPSK	Standard	1 / 14	15.88	4.62	V	V	20.50	0.112	-17.95
836.50	3	QPSK	Standard	1 / 0	16.36	4.82	V	V	21.18	0.131	-17.27
847.50	3	QPSK	Standard	1 / 0	16.23	5.02	V	V	21.25	0.133	-17.20
825.50	3	16-QAM	Standard	1 / 14	14.72	4.62	V	V	19.34	0.086	-19.11
836.50	3	16-QAM	Standard	1 / 0	15.14	4.82	V	V	19.96	0.099	-18.49
847.50	3	16-QAM	Standard	1 / 14	15.11	5.02	V	V	20.13	0.103	-18.32
826.50	5	QPSK	Standard	1 / 24	15.47	4.64	V	V	20.11	0.102	-18.34
836.50	5	QPSK	Standard	1 / 0	15.88	4.82	V	V	20.70	0.118	-17.75
846.50	5	QPSK	Standard	1 / 24	15.76	5.01	V	V	20.77	0.119	-17.68
826.50	5	16-QAM	Standard	1 / 24	14.20	4.64	V	V	18.84	0.077	-19.61
836.50	5	16-QAM	Standard	1 / 0	14.61	4.82	V	V	19.43	0.088	-19.02
846.50	5	16-QAM	Standard	1 / 24	14.56	5.01	V	V	19.57	0.091	-18.88
829.00	10	QPSK	Standard	1 / 49	15.92	4.68	V	V	20.60	0.115	-17.85
836.50	10	QPSK	Standard	1 / 0	15.93	4.82	V	V	20.75	0.119	-17.70
844.00	10	QPSK	Standard	1 / 0	15.46	4.96	V	V	20.42	0.110	-18.03
829.00	10	16-QAM	Standard	1 / 49	14.72	4.68	V	V	19.40	0.087	-19.05
836.50	10	16-QAM	Standard	1 / 0	14.68	4.82	V	V	19.50	0.089	-18.95
844.00	10	16-QAM	Standard	1 / 0	14.30	4.96	V	V	19.26	0.084	-19.19
847.50	3	QPSK	WCC	1 / 0	4.73	5.02	V	H	9.75	0.009	-28.70

Table 6-3. ERP Data (Band 5)

© 2014 PCTEST Engineering Laboratory, Inc.

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery Cover	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	Ant. Pol. [H/V]	EUT Pol.	EIRP [dBm]	EIRP [Watts]	Margin [dB]
1710.70	1.4	QPSK	Standard	1 / 5	7.22	9.89	V	V	17.11	0.051	-12.89
1732.50	1.4	QPSK	Standard	1 / 5	9.08	9.85	V	V	18.93	0.078	-11.07
1754.30	1.4	QPSK	Standard	1 / 5	12.59	9.80	V	V	22.39	0.174	-7.61
1710.70	1.4	16-QAM	Standard	1 / 5	6.01	9.89	V	V	15.90	0.039	-14.10
1732.50	1.4	16-QAM	Standard	1 / 5	8.76	9.85	V	V	18.61	0.073	-11.39
1754.30	1.4	16-QAM	Standard	1 / 5	11.38	9.80	V	V	21.18	0.131	-8.82
1711.50	3	QPSK	Standard	1 / 0	6.79	9.89	V	V	16.68	0.047	-13.32
1732.50	3	QPSK	Standard	1 / 14	7.31	9.85	V	V	17.16	0.052	-12.84
1753.50	3	QPSK	Standard	1 / 14	12.73	9.81	V	V	22.54	0.179	-7.46
1711.50	3	16-QAM	Standard	1 / 14	5.55	9.89	V	V	15.44	0.035	-14.56
1732.50	3	16-QAM	Standard	1 / 14	6.88	9.85	V	V	16.73	0.047	-13.27
1753.50	3	16-QAM	Standard	1 / 14	11.43	9.81	V	V	21.24	0.133	-8.76
1712.50	5	QPSK	Standard	1 / 0	7.26	9.89	V	V	17.15	0.052	-12.85
1732.50	5	QPSK	Standard	1 / 24	9.11	9.85	V	V	18.96	0.079	-11.04
1752.50	5	QPSK	Standard	1 / 24	13.43	9.81	V	V	23.24	0.211	-6.76
1712.50	5	16-QAM	Standard	1 / 0	5.88	9.89	V	V	15.77	0.038	-14.23
1732.50	5	16-QAM	Standard	1 / 24	7.88	9.85	V	V	17.73	0.059	-12.27
1752.50	5	16-QAM	Standard	1 / 24	12.02	9.81	V	V	21.83	0.152	-8.17
1715.00	10	QPSK	Standard	1 / 0	6.13	9.88	V	V	16.01	0.040	-13.99
1732.50	10	QPSK	Standard	1 / 49	3.16	9.85	V	V	13.01	0.020	-16.99
1750.00	10	QPSK	Standard	1 / 49	12.32	9.81	V	V	22.13	0.163	-7.87
1715.00	10	16-QAM	Standard	1 / 0	4.74	9.88	V	V	14.62	0.029	-15.38
1732.50	10	16-QAM	Standard	1 / 49	2.53	9.85	V	V	12.38	0.017	-17.62
1750.00	10	16-QAM	Standard	1 / 49	10.99	9.81	V	V	20.80	0.120	-9.20
1717.50	15	QPSK	Standard	1 / 74	11.97	9.88	V	V	21.85	0.153	-8.15
1732.50	15	QPSK	Standard	1 / 0	11.98	9.85	V	V	21.83	0.152	-8.17
1747.50	15	QPSK	Standard	1 / 0	10.59	9.82	V	V	20.41	0.110	-9.59
1717.50	15	16-QAM	Standard	1 / 74	10.80	9.88	V	V	20.68	0.117	-9.32
1732.50	15	16-QAM	Standard	1 / 0	10.84	9.85	V	V	20.69	0.117	-9.31
1747.50	15	16-QAM	Standard	1 / 74	9.34	9.82	V	V	19.16	0.082	-10.84
1720.00	20	QPSK	Standard	1 / 99	12.50	9.87	V	V	22.37	0.173	-7.63
1732.50	20	QPSK	Standard	1 / 0	12.07	9.85	V	V	21.92	0.155	-8.08
1745.00	20	QPSK	Standard	1 / 0	11.99	9.82	V	V	21.81	0.152	-8.19
1720.00	20	16-QAM	Standard	1 / 99	11.48	9.87	V	V	21.35	0.137	-8.65
1732.50	20	16-QAM	Standard	1 / 0	10.84	9.85	V	V	20.69	0.117	-9.31
1745.00	20	16-QAM	Standard	1 / 0	10.87	9.82	V	V	20.69	0.117	-9.31
1752.50	5	QPSK	WCC	1 / 0	7.52	7.66	V	H	15.18	0.033	-14.82

Table 6-4. EIRP Data (Band 4)

© 2014 PCTEST Engineering Laboratory, Inc.

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery Cover	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	Ant. Pol. [H/V]	EUT Pol.	EIRP [dBm]	EIRP [Watts]	Margin [dB]
1850.70	1.4	QPSK	Standard	1 / 5	9.55	9.60	V	H2	19.15	0.082	-13.86
1882.50	1.4	QPSK	Standard	1 / 0	11.83	9.53	V	H2	21.36	0.137	-11.65
1914.30	1.4	QPSK	Standard	1 / 0	10.93	9.47	V	H2	20.40	0.110	-12.61
1850.70	1.4	16-QAM	Standard	1 / 5	8.98	9.60	V	H2	18.58	0.072	-14.43
1882.50	1.4	16-QAM	Standard	1 / 0	10.73	9.53	V	H2	20.26	0.106	-12.75
1914.30	1.4	16-QAM	Standard	1 / 0	9.91	9.47	V	H2	19.38	0.087	-13.63
1851.50	3	QPSK	Standard	1 / 14	13.03	9.60	V	H2	22.62	0.183	-10.39
1882.50	3	QPSK	Standard	1 / 14	14.96	9.53	V	H2	24.49	0.281	-8.52
1913.50	3	QPSK	Standard	1 / 0	13.86	9.47	V	H2	23.33	0.215	-9.68
1851.50	3	16-QAM	Standard	1 / 14	12.43	9.60	V	H2	22.03	0.159	-10.98
1882.50	3	16-QAM	Standard	1 / 0	13.68	9.53	V	H2	23.21	0.209	-9.80
1913.50	3	16-QAM	Standard	1 / 0	12.55	9.47	V	H2	22.02	0.159	-10.99
1852.50	5	QPSK	Standard	1 / 24	11.57	9.59	V	H2	21.16	0.131	-11.85
1882.50	5	QPSK	Standard	1 / 24	12.79	9.53	V	H2	22.32	0.170	-10.69
1912.50	5	QPSK	Standard	1 / 0	13.65	9.47	V	H2	23.12	0.205	-9.89
1852.50	5	16-QAM	Standard	1 / 24	10.44	9.59	V	H2	20.03	0.101	-12.98
1882.50	5	16-QAM	Standard	1 / 0	11.47	9.53	V	H2	21.00	0.126	-12.01
1912.50	5	16-QAM	Standard	1 / 0	12.55	9.47	V	H2	22.02	0.159	-10.99
1855.00	10	QPSK	Standard	1 / 49	11.54	9.59	V	H2	21.13	0.130	-11.88
1882.50	10	QPSK	Standard	1 / 0	12.65	9.53	V	H2	22.18	0.165	-10.83
1910.00	10	QPSK	Standard	1 / 49	13.50	9.47	V	H2	22.97	0.198	-10.04
1855.00	10	16-QAM	Standard	1 / 49	10.28	9.59	V	H2	19.87	0.097	-13.14
1882.50	10	16-QAM	Standard	1 / 0	11.49	9.53	V	H2	21.02	0.126	-11.99
1910.00	10	16-QAM	Standard	1 / 0	12.19	9.47	V	H2	21.66	0.147	-11.35
1857.50	15	QPSK	Standard	1 / 74	8.42	9.58	V	H2	18.00	0.063	-15.01
1882.50	15	QPSK	Standard	1 / 0	8.86	9.53	V	H2	18.39	0.069	-14.62
1907.50	15	QPSK	Standard	1 / 74	7.78	9.48	V	H2	17.26	0.053	-15.75
1857.50	15	16-QAM	Standard	1 / 74	7.37	9.58	V	H2	16.95	0.050	-16.06
1882.50	15	16-QAM	Standard	1 / 0	7.86	9.53	V	H2	17.39	0.055	-15.62
1907.50	15	16-QAM	Standard	1 / 74	6.64	9.48	V	H2	16.12	0.041	-16.89
1860.00	20	QPSK	Standard	1 / 99	9.46	9.58	V	H2	19.04	0.080	-13.97
1882.50	20	QPSK	Standard	1 / 99	9.19	9.53	V	H2	18.72	0.074	-14.29
1905.00	20	QPSK	Standard	1 / 0	9.96	9.48	V	H2	19.44	0.088	-13.57
1860.00	20	16-QAM	Standard	1 / 99	6.49	9.58	V	H2	16.07	0.040	-16.94
1882.50	20	16-QAM	Standard	1 / 99	8.05	9.53	V	H2	17.58	0.057	-15.43
1905.00	20	16-QAM	Standard	1 / 0	8.88	9.48	V	H2	18.36	0.069	-14.65
1882.50	3	QPSK	WCC	1 / 0	2.98	7.38	V	H	10.36	0.011	-22.65

Table 6-5. EIRP Data (Band 25)

© 2014 PCTEST Engineering Laboratory, Inc.

6.7 Radiated Spurious Emissions Measurements

§2.1053 §22.917(a) §24.238(a) §27.53(e) §27.53(f) §27.53(g)

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 v02r01 – Section 5.8

ANSI/TIA-603-C-2004 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW ≥ 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points ≥ 2 x span / RBW
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

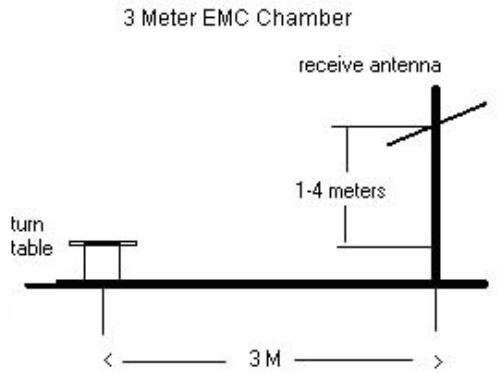

Figure 6-6. Test Instrument & Measurement Setup

© 2014 PCTEST Engineering Laboratory, Inc.

Test Notes

1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.

2) The EUT is supplied with a new/fully-recharged battery. The battery for this model BL-53YH contains an embedded NFC antenna.

3) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.

4) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.

OPERATING FREQUENCY:	701.50	MHz		
CHANNEL:	23035			
MEASURED OUTPUT POWER:	19.67	dBm	=	0.093 W
MODULATION SIGNAL:	QPSK			
BANDWIDTH:	5.0	MHz		
DISTANCE:	3	meters		
LIMIT:	43 + 10 $\log_{10}$ (W) =	32.67	dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
1403.00	-52.82	5.66	-47.16	V	V	66.8
2104.50	-56.41	6.63	-49.78	V	V	69.4
2806.00	-60.56	7.84	-52.73	V	V	72.4

Table 6-6. Radiated Spurious Data (Band 12 – Low Channel)

© 2014 PCTEST Engineering Laboratory, Inc.

OPERATING FREQUENCY:	707.50	MHz		
CHANNEL:	23095			
MEASURED OUTPUT POWER:	19.52	dBm	=	0.090 W
MODULATION SIGNAL:	QPSK			
BANDWIDTH:	5			
DISTANCE:	3	meters		
LIMIT:	43 + 10 $\log_{10}$ (W) =	32.52	dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
1415.00	-58.85	5.73	-53.12	V	V	72.6
2122.50	-62.11	6.73	-55.38	V	V	74.9
2830.00	-61.69	7.80	-53.90	V	V	73.4

Table 6-7. Radiated Spurious Data (Band 12 – Mid Channel)

OPERATING FREQUENCY:	713.50	MHz		
CHANNEL:	23155			
MEASURED OUTPUT POWER:	19.02	dBm	=	0.080 W
MODULATION SIGNAL:	QPSK			
BANDWIDTH:	5			
DISTANCE:	3	meters		
LIMIT:	43 + 10 $\log_{10}$ (W) =	32.02	dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
1427.00	-57.28	5.80	-51.48	V	V	70.5
2140.50	-61.95	6.83	-55.12	V	V	74.1
2854.00	-60.22	7.76	-52.46	V	V	71.5

Table 6-8. Radiated Spurious Data (Band 12 – High Channel)

© 2014 PCTEST Engineering Laboratory, Inc.

OPERATING FREQUENCY:	701.50	MHz		
CHANNEL:	23035			
MEASURED OUTPUT POWER:	9.28	dBm	=	0.008 W
MODULATION SIGNAL:	QPSK			
BANDWIDTH:	5			
DISTANCE:	3	meters		
LIMIT:	43 + 10 $\log_{10}$ (W) =	22.28	dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
1403.00	-49.31	5.66	-43.65	H	H	52.9
2104.50	-52.66	6.63	-46.03	H	H	55.3
2806.00	-54.39	7.84	-46.56	H	H	55.8

Table 6-9. Radiated Spurious Data with WCC (Band 12 – 23035)

OPERATING FREQUENCY:	825.50	MHz		
CHANNEL:	20415			
MEASURED OUTPUT POWER:	20.50	dBm	=	0.112 W
MODULATION SIGNAL:	QPSK			
BANDWIDTH:	3.0	MHz		
DISTANCE:	3	meters		
LIMIT:	43 + 10 $\log_{10}$ (W) =	33.50	dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
1651.00	-52.07	6.56	-45.51	H	H2	66.0
2476.50	-49.61	7.30	-42.31	H	H2	62.8
3302.00	-48.21	7.37	-40.84	H	H2	61.3

Table 6-10. Radiated Spurious Data (Band 5 – Low Channel)

© 2014 PCTEST Engineering Laboratory, Inc.

OPERATING FREQUENCY:	836.50	MHz			
CHANNEL:	20525				
MEASURED OUTPUT POWER:	21.18	dBm	=	0.131	W
MODULATION SIGNAL:	QPSK				
BANDWIDTH:	3				
DISTANCE:	3	meters			
LIMIT:	43 + 10 $\log_{10}$ (W) =	34.18	dBc		

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
1673.00	-54.29	6.55	-47.74	H	H2	68.9
2509.50	-50.21	7.34	-42.86	H	H2	64.0
3346.00	-50.00	7.44	-42.56	H	H2	63.7

Table 6-11. Radiated Spurious Data (Band 5 – Mid Channel)

OPERATING FREQUENCY:	847.50	MHz			
CHANNEL:	20635				
MEASURED OUTPUT POWER:	21.25	dBm	=	0.133	W
MODULATION SIGNAL:	QPSK				
BANDWIDTH:	3				
DISTANCE:	3	meters			
LIMIT:	43 + 10 $\log_{10}$ (W) =	34.25	dBc		

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
1695.00	-52.41	6.55	-45.86	H	H2	67.1
2542.50	-50.78	7.36	-43.42	H	H2	64.7
3390.00	-56.90	7.51	-49.39	H	H2	70.6

Table 6-12. Radiated Spurious Data (Band 5 – High Channel)

© 2014 PCTEST Engineering Laboratory, Inc.

OPERATING FREQUENCY:	847.50	MHz		
CHANNEL:	20635			
MEASURED OUTPUT POWER:	10.36	dBm	=	0.011 W
MODULATION SIGNAL:	QPSK			
BANDWIDTH:	3			
DISTANCE:	3	meters		
LIMIT:	43 + 10 $\log_{10}$ (W) =	23.36	dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
1695.00	-50.23	6.55	-43.68	H	H	54.0
2542.50	-57.16	7.36	-49.80	H	H	60.2
3390.00	-60.56	7.51	-53.05	H	H	63.4

Table 6-13. Radiated Spurious Data with WCC (Band 5 – 20635)

OPERATING FREQUENCY:	1712.50	MHz		
CHANNEL:	19975			
MEASURED OUTPUT POWER:	17.15	dBm	=	0.052 W
MODULATION SIGNAL:	QPSK			
BANDWIDTH:	5.0	MHz		
DISTANCE:	3	meters		
LIMIT:	43 + 10 $\log_{10}$ (W) =	30.15	dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3425.00	-44.41	9.68	-34.72	H	H	51.9
5137.50	-45.62	10.68	-34.94	H	H	52.1
6850.00	-51.74	11.74	-40.00	H	H	57.1

Table 6-14. Radiated Spurious Data (Band 4 – Low Channel)

© 2014 PCTEST Engineering Laboratory, Inc.

OPERATING FREQUENCY:	1732.50	MHz		
CHANNEL:	20175			
MEASURED OUTPUT POWER:	18.96	dBm	=	0.079 W
MODULATION SIGNAL:	QPSK			
BANDWIDTH:	5			
DISTANCE:	3	meters		
LIMIT:	43 + 10 $\log_{10}$ (W) =	31.96	dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3465.00	-42.62	9.71	-32.91	H	H	51.9
5197.50	-46.57	10.59	-35.99	H	H	54.9
6930.00	-50.76	11.75	-39.01	H	H	58.0

Table 6-15. Radiated Spurious Data (Band 4 – Mid Channel)

OPERATING FREQUENCY:	1752.50	MHz		
CHANNEL:	20375			
MEASURED OUTPUT POWER:	23.24	dBm	=	0.211 W
MODULATION SIGNAL:	QPSK			
BANDWIDTH:	5			
DISTANCE:	3	meters		
LIMIT:	43 + 10 $\log_{10}$ (W) =	36.24	dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3505.00	-44.09	9.73	-34.37	H	H	57.6
5257.50	-42.21	10.64	-31.57	H	H	54.8
7010.00	-50.91	11.75	-39.16	H	H	62.4

Table 6-16. Radiated Spurious Data (Band 4 – High Channel)

© 2014 PCTEST Engineering Laboratory, Inc.

OPERATING FREQUENCY:	1752.50	MHz		
CHANNEL:	20375			
MEASURED OUTPUT POWER:	15.18	dBm	=	0.033 W
MODULATION SIGNAL:	QPSK			
BANDWIDTH:	5			
DISTANCE:	3	meters		
LIMIT:	43 + 10 $\log_{10}$ (W) =	28.18	dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3505.00	-46.87	9.73	-37.15	H	H	60.4
5257.50	-52.39	10.64	-41.75	H	H	65.0
7010.00	-46.84	11.75	-35.09	H	H	58.3

Table 6-17. Radiated Spurious Data with WCC (Band 4 – 20375)

OPERATING FREQUENCY:	1851.50	MHz		
CHANNEL:	26055			
MEASURED OUTPUT POWER:	22.62	dBm	=	0.183 W
MODULATION SIGNAL:	QPSK			
BANDWIDTH:	3.0	MHz		
DISTANCE:	3	meters		
LIMIT:	43 + 10 $\log_{10}$ (W) =	35.62	dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3703.00	-46.95	9.43	-37.52	H	H	60.1
5554.50	-42.01	10.79	-31.22	H	H	53.8
7406.00	-44.77	10.70	-34.07	H	H	56.7

Table 6-18. Radiated Spurious Data (Band 25 – Low Channel)

© 2014 PCTEST Engineering Laboratory, Inc.

OPERATING FREQUENCY:	1882.50	MHz		
CHANNEL:	26365			
MEASURED OUTPUT POWER:	24.49	dBm	=	0.281 W
MODULATION SIGNAL:	QPSK			
BANDWIDTH:	3			
DISTANCE:	3	meters		
LIMIT:	43 + 10 $\log_{10}$ (W) =	37.49	dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3765.00	-44.77	9.27	-35.50	H	H	60.0
5647.50	-44.20	11.06	-33.14	H	H	57.6
7530.00	-45.96	10.99	-34.97	H	H	59.5

Table 6-19. Radiated Spurious Data (Band 25 – Mid Channel)

OPERATING FREQUENCY:	1913.50	MHz		
CHANNEL:	26675			
MEASURED OUTPUT POWER:	23.33	dBm	=	0.215 W
MODULATION SIGNAL:	QPSK			
BANDWIDTH:	3			
DISTANCE:	3	meters		
LIMIT:	43 + 10 $\log_{10}$ (W) =	36.33	dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3827.00	-45.18	9.20	-35.98	H	H	59.3
5740.50	-46.20	11.30	-34.89	H	H	58.2
7654.00	-40.07	11.19	-28.89	H	H	52.2

Table 6-20. Radiated Spurious Data (Band 25 – High Channel)

© 2014 PCTEST Engineering Laboratory, Inc.

OPERATING FREQUENCY:	1882.50	MHz		
CHANNEL:	26365			
MEASURED OUTPUT POWER:	10.36	dBm	=	0.011 W
MODULATION SIGNAL:	QPSK			
BANDWIDTH:	3			
DISTANCE:	3	meters		
LIMIT:	43 + 10 $\log_{10}$ (W) =	23.36	dBc	

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3765.00	-44.56	9.27	-35.29	H	H	45.6
5647.50	-41.78	11.06	-30.72	H	H	41.1
7530.00	-44.50	10.99	-33.51	H	H	43.9

Table 6-21. Radiated Spurious Data with WCC (Band 25 – 26365)

© 2014 PCTEST Engineering Laboratory, Inc.

6.8 Frequency Stability / Temperature Variation

§2.1055 §22.355 §24.235 §27.54

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-C-2004. The frequency stability of the transmitter is measured by:

a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency. For Part 24 and Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI/TIA-603-C-2004

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

© 2014 PCTEST Engineering Laboratory, Inc.

Band 12 Frequency Stability Measurements

§2.1055 §27.54

OPERATING FREQUENCY: 707,500,000 Hz

CHANNEL: 23790

REFERENCE VOLTAGE: 3.80 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	707,500,019	19	0.0000027
100 %		- 30	707,499,972	-28	-0.0000040
100 %		- 20	707,500,017	17	0.0000024
100 %		- 10	707,500,021	21	0.0000030
100 %		0	707,499,972	-28	-0.0000040
100 %		+ 10	707,500,023	23	0.0000033
100 %		+ 20	707,499,984	-16	-0.0000023
100 %		+ 30	707,500,024	24	0.0000034
100 %		+ 40	707,499,977	-23	-0.0000033
100 %		+ 50	707,500,015	15	0.0000021
115 %	4.37	+ 20	707,499,972	-28	-0.0000040
BATT. ENDPOINT	3.50	+ 20	707,499,975	-25	-0.0000035

Table 6-22. Frequency Stability Data (Band 12)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

© 2014 PCTEST Engineering Laboratory, Inc.

Band 12 Frequency Stability Measurements

§2.1055 §27.54

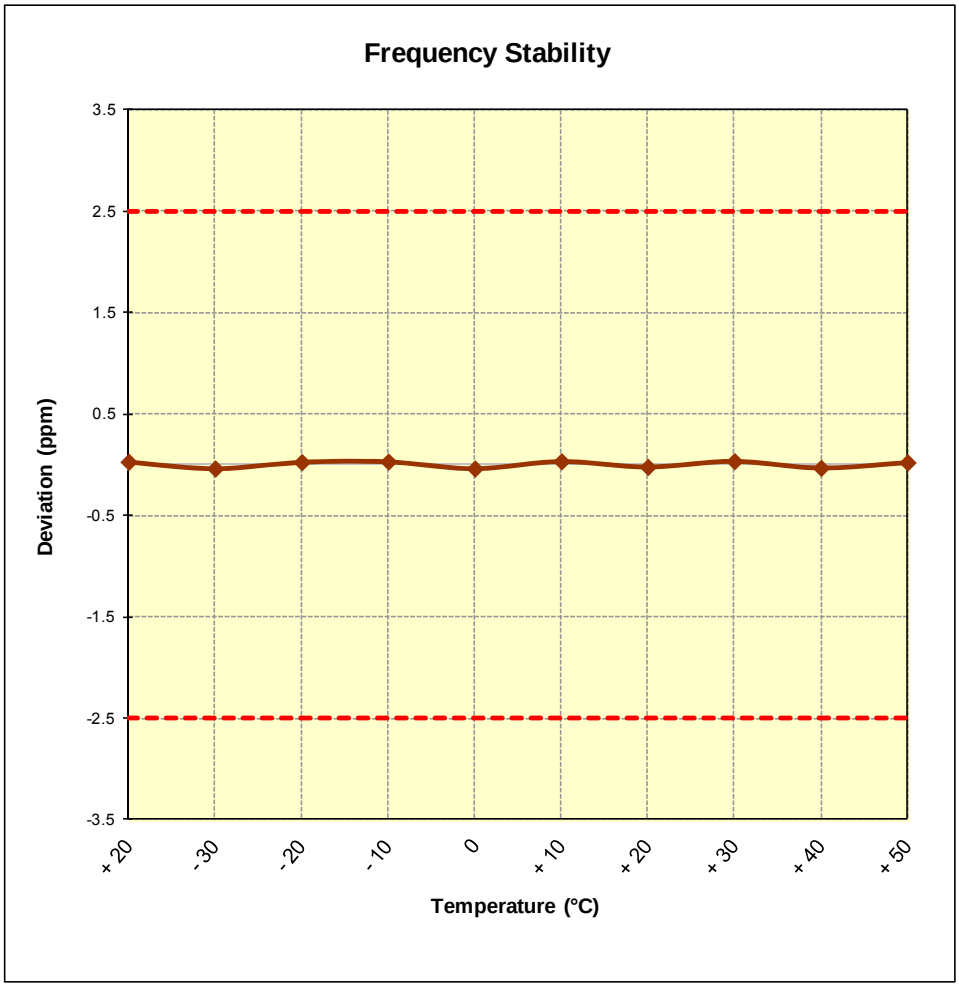

Figure 6-7. Frequency Stability Graph (Band 12)

© 2014 PCTEST Engineering Laboratory, Inc.

Band 5 Frequency Stability Measurements
§2.1055 §22.355

OPERATING FREQUENCY: 836,500,000 Hz

CHANNEL: 20525

REFERENCE VOLTAGE: 3.80 VDC

DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	836,500,019	19	0.0000023
100 %		- 30	836,499,982	-18	-0.0000022
100 %		- 20	836,500,020	20	0.0000024
100 %		- 10	836,500,030	30	0.0000036
100 %		0	836,499,978	-22	-0.0000026
100 %		+ 10	836,500,019	19	0.0000023
100 %		+ 20	836,499,983	-17	-0.0000020
100 %		+ 30	836,500,024	24	0.0000029
100 %		+ 40	836,499,974	-26	-0.0000031
100 %		+ 50	836,500,017	17	0.0000020
115 %	4.37	+ 20	836,499,981	-19	-0.0000023
BATT. ENDPOINT	3.50	+ 20	836,499,985	-15	-0.0000018

Table 6-23. Frequency Stability Data (Band 5)

© 2014 PCTEST Engineering Laboratory, Inc.

Band 5 Frequency Stability Measurements

§2.1055 §22.355

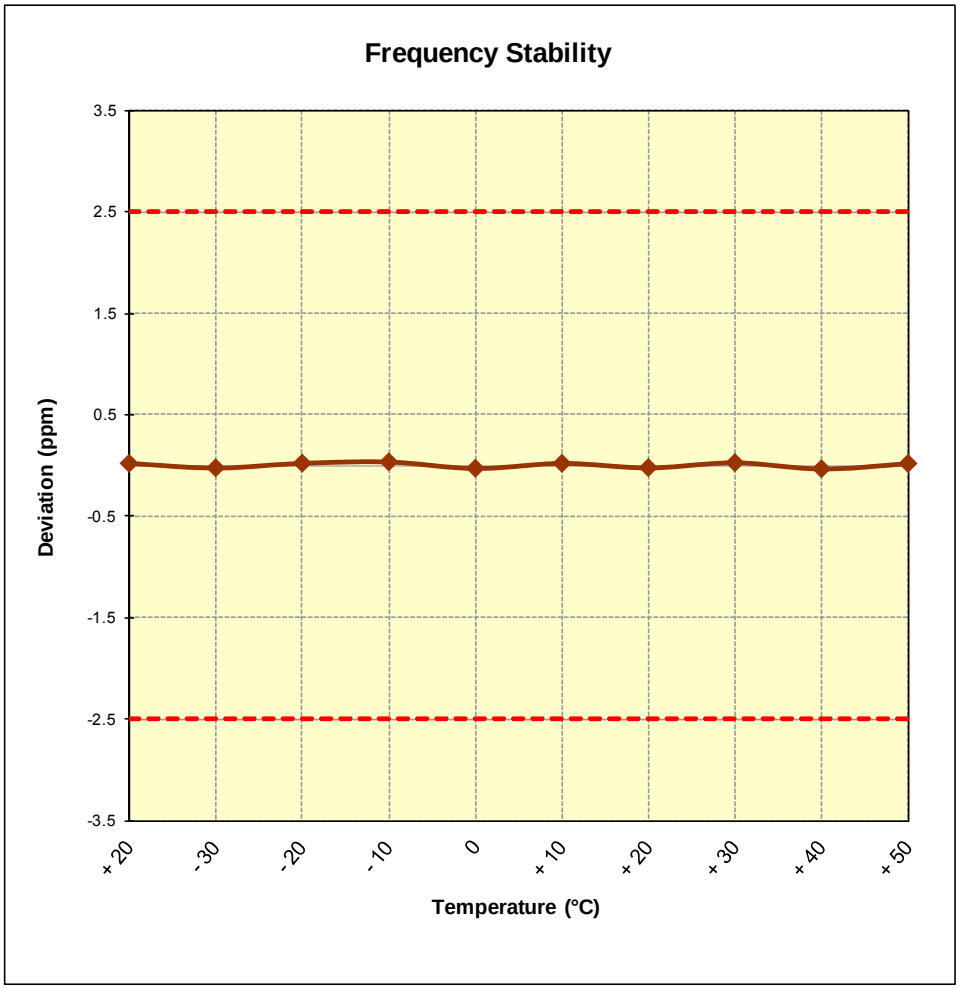

Figure 6-8. Frequency Stability Graph (Band 5)

© 2014 PCTEST Engineering Laboratory, Inc.

Band 4 Frequency Stability Measurements

§2.1055 §§27.54

OPERATING FREQUENCY: 1,732,500,000 Hz

CHANNEL: 20175

REFERENCE VOLTAGE: 3.80 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,732,500,016	16	0.0000009
100 %		- 30	1,732,499,975	-25	-0.0000014
100 %		- 20	1,732,500,021	21	0.0000012
100 %		- 10	1,732,500,023	23	0.0000013
100 %		0	1,732,499,973	-27	-0.0000016
100 %		+ 10	1,732,500,028	28	0.0000016
100 %		+ 20	1,732,499,984	-16	-0.0000009
100 %		+ 30	1,732,500,016	16	0.0000009
100 %		+ 40	1,732,499,970	-30	-0.0000017
100 %		+ 50	1,732,500,019	19	0.0000011
115 %	4.37	+ 20	1,732,499,981	-19	-0.0000011
BATT. ENDPOINT	3.50	+ 20	1,732,499,973	-27	-0.0000016

Table 6-24. Frequency Stability Data (Band 4)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

© 2014 PCTEST Engineering Laboratory, Inc.

Band 4 Frequency Stability Measurements

§2.1055 §§27.54

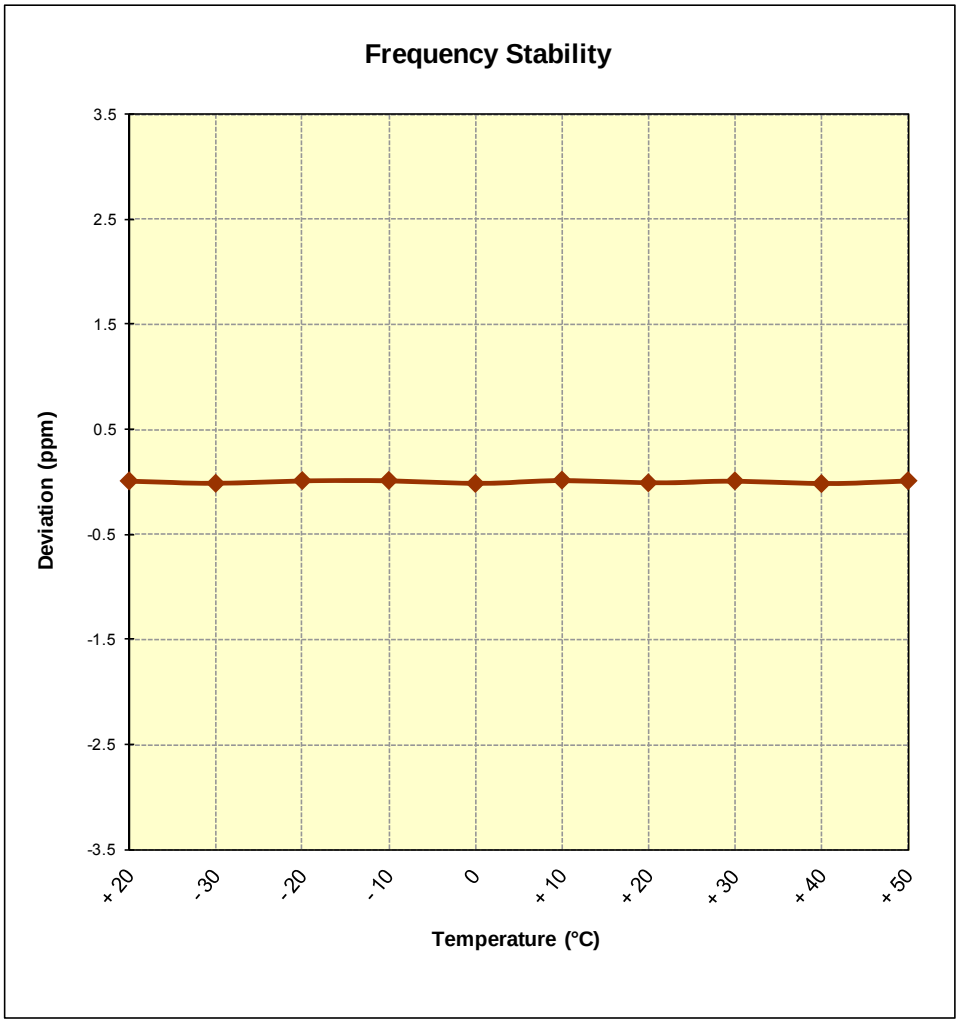

Figure 6-9. Frequency Stability Graph (Band 4)

© 2014 PCTEST Engineering Laboratory, Inc.

Band 25 Frequency Stability Measurements

§2.1055 §24.235

OPERATING FREQUENCY: 1,882,500,000 Hz

CHANNEL: 26365

REFERENCE VOLTAGE: 3.80 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,882,500,015	15	0.0000008
100 %		- 30	1,882,499,981	-19	-0.0000010
100 %		- 20	1,882,500,027	27	0.0000014
100 %		- 10	1,882,500,025	25	0.0000013
100 %		0	1,882,499,976	-24	-0.0000013
100 %		+ 10	1,882,500,027	27	0.0000014
100 %		+ 20	1,882,499,977	-23	-0.0000012
100 %		+ 30	1,882,500,022	22	0.0000012
100 %		+ 40	1,882,499,976	-24	-0.0000013
100 %		+ 50	1,882,500,017	17	0.0000009
115 %	4.37	+ 20	1,882,499,979	-21	-0.0000011
BATT. ENDPOINT	3.50	+ 20	1,882,499,985	-15	-0.0000008

Table 6-25. Frequency Stability Data (Band 25)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

© 2014 PCTEST Engineering Laboratory, Inc.

Band 25 Frequency Stability Measurements

§2.1055 §24.235

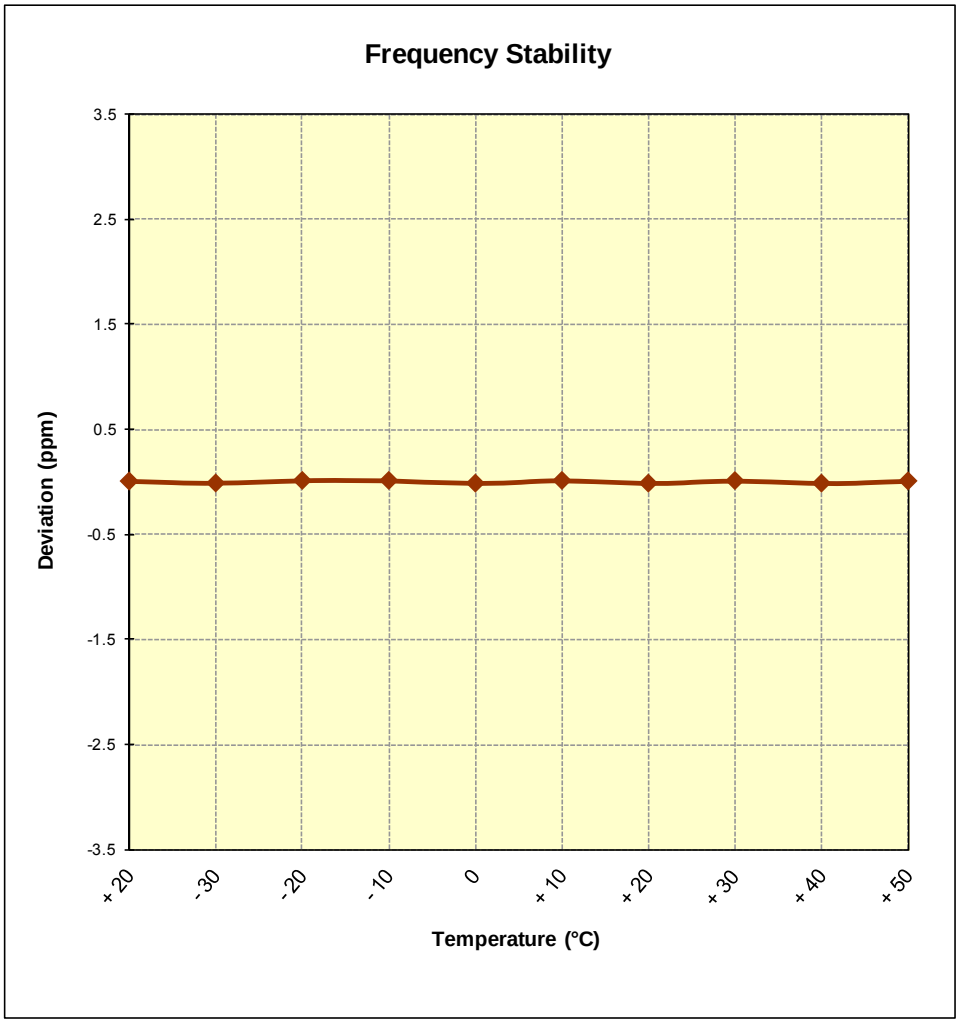

Figure 6-10. Frequency Stability Graph (Band 25)

© 2014 PCTEST Engineering Laboratory, Inc.

7.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Portable Handset FCC ID: ZNFUS990** complies with all the requirements of Parts 2, 22, 24, 27 of the FCC rules for LTE operation only.

© 2014 PCTEST Engineering Laboratory, Inc.