



FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E

CERTIFICATION TEST REPORT

FOR

CDMA WATCH + Bluetooth, DTS b/g

MODEL NUMBER: LG-VC200, LGVC200, VC200

FCC ID: ZNFVC200

REPORT NUMBER: 15I21066-E1 REVISION B

ISSUE DATE: AUGUST 10, 2015

Prepared for

LG ELECTRONICS MOBILECOMM U.S.A., INC
1000 SYLVAN AVENUE
ENGLEWOOD CLIFFS,
NEW JERSEY, 07632, U.S.A

Prepared by

UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
---	7/27/15	Initial Issue	
---	7/30/15	Updated report page 8, 14, 29 & 31	D. Corona
---	8/10/15	Updated Section 5.2, 7 & 8.1.2	D. Corona

TABLE OF CONTENTS

1.	ATTESTATION OF TEST RESULTS	5
2.	TEST METHODOLOGY	6
3.	FACILITIES AND ACCREDITATION	6
4.	CALIBRATION AND UNCERTAINTY	6
4.1.	MEASURING INSTRUMENT CALIBRATION	6
4.2.	SAMPLE CALCULATION	6
4.3.	MEASUREMENT UNCERTAINTY	7
5.	EQUIPMENT UNDER TEST	8
5.1.	DESCRIPTION OF EUT	8
5.2.	MAXIMUM OUTPUT POWER.....	8
5.3.	DESCRIPTION OF AVAILABLE ANTENNAS	9
5.4.	DESCRIPTION OF TEST SETUP.....	10
6.	TEST AND MEASUREMENT EQUIPMENT.....	13
7.	SUMMARY TABLE	14
8.1.	CDMA2000	15
8.1.1.	1xRTT.....	15
8.1.2.	CDMA2000 OUTPUT POWER RESULT	16
9.	PEAK TO AVERAGE RATIO	17
9.1.	CONDUCTED PEAK TO AVERAGE RESULT.....	17
10.	LIMITS AND CONDUCTED RESULTS.....	18
10.1.	OCCUPIED BANDWIDTH.....	18
10.1.1.	OCCUPIED BANDWIDTH RESULTS.....	18
10.1.1.	OCCUPIED BANDWIDTH PLOTS	19
10.2.	BAND EDGE EMISSIONS	20
10.2.1.	BAND EDGE PLOTS	21
10.3.	OUT OF BAND EMISSIONS	22
10.3.1.	OUT OF BAND EMISSIONS RESULT	23
10.3.2.	OUT OF BAND EMISSIONS PLOTS.....	24
10.4.	FREQUENCY STABILITY	25
10.4.1.	FREQUENCY STABILITY RESULTS.....	26
10.5.	RADIATED POWER (ERP & EIRP).....	28
10.5.1.	ERP/EIRP Results.....	29

10.5.2.	ERP/EIRP PLOTS.....	30
10.6.	<i>FIELD STRENGTH OF SPURIOUS RADIATION</i>	32
10.6.1.	SPURIOUS RADIATION PLOTS.....	33
11.	SETUP PHOTOS	35

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: LG ELECTRONICS MOBILECOMM U.S.A., INC.
EUT DESCRIPTION: CDMA WATCH + Bluetooth, DTS b/g
MODEL: LG-VC200, LGVC200, VC200
SERIAL NUMBER: 1ZRY9 (Conducted), 1ZRY5 (Radiated)
DATE TESTED: JUNE 25-JULY 1, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H and 24E	PASS

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



DAN CORONIA
CONSUMER TECHNOLOGY DIVISION
WISE PROJECT LEAD
UL VERIFICATION SERVICES INC

Tested By:



STEVEN TRAN
CONSUMER TECHNOLOGY DIVISION
WISE LAB ENGINEER
UL VERIFICATION SERVICES INC

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 22, and FCC CFR Part 24.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address.

The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A(IC: 2324B-1)	☐ Chamber D(IC: 2324B-4)
☒ Chamber B(IC: 2324B-2)	☐ Chamber E(IC: 2324B-5)
☒ Chamber C(IC: 2324B-3)	☐ Chamber F(IC: 2324B-6)
	☐ Chamber G(IC: 2324B-7)
	☐ Chamber H(IC: 2324B-8)

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

EIRP = PSA reading with EUT worst orientation (dBm) + Path loss (dB) – cable loss(
between the SG and substitution antenna) + Substitution Antenna Factor (dBi)
ERP = PSA reading with EUT worst orientation (dBm) + Path loss (dB) – cable loss(
between the SG and substitution antenna)
(Path loss = Signal generator output – PSA reading with substitution antenna)

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB
Radiated Disturbance, 1GHz to 40GHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is CDMA WATCH + Bluetooth, DTS b/g

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum average conducted and radiated ERP / EIRP output powers as follows:

FCC Part 22/24						
Band	Frequency Range(MHz)	Modulation	Conducted		Radiated	
			AVG(dBm)	AVG(mW)	AVG(dBm)	AVG(mW)
BC0	824~849	1xRTT	23.7	23.44	23.601	229.14
BC1	1850~1910		21.2	131.83	24.987	315.28

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna for the [List the bands supported] with a maximum peak gain as follow:

Frequency (MHz)	Peak Gain (dBi)
BC0, 824~849MHz	-3.58
BC1, 1850~1910MHz	-1.50

5.4. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	LG	STA-U17WD	DS542312055	N/A

I/O CABLES (CONDUCTED SETUP)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF Out	1	Spectrum Analyzer	Shielded	None	NA
2	Antenna Port	1	EUT	Shielded	0.1m	NA
3	RF In/Out	1	Communication Test Set	Shielded	1m	NA


I/O CABLES (RADIATED SETUP)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	USB	1	AC Adapter	Un-shielded	1.2m	NA
2	Jack	1	Headset	Shielded	1m	NA
3	RF In/out	1	Communication Test Set	Un-shielded	2m	NA


TEST SETUP

The EUT is continuously communicated to the call box during the tests.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

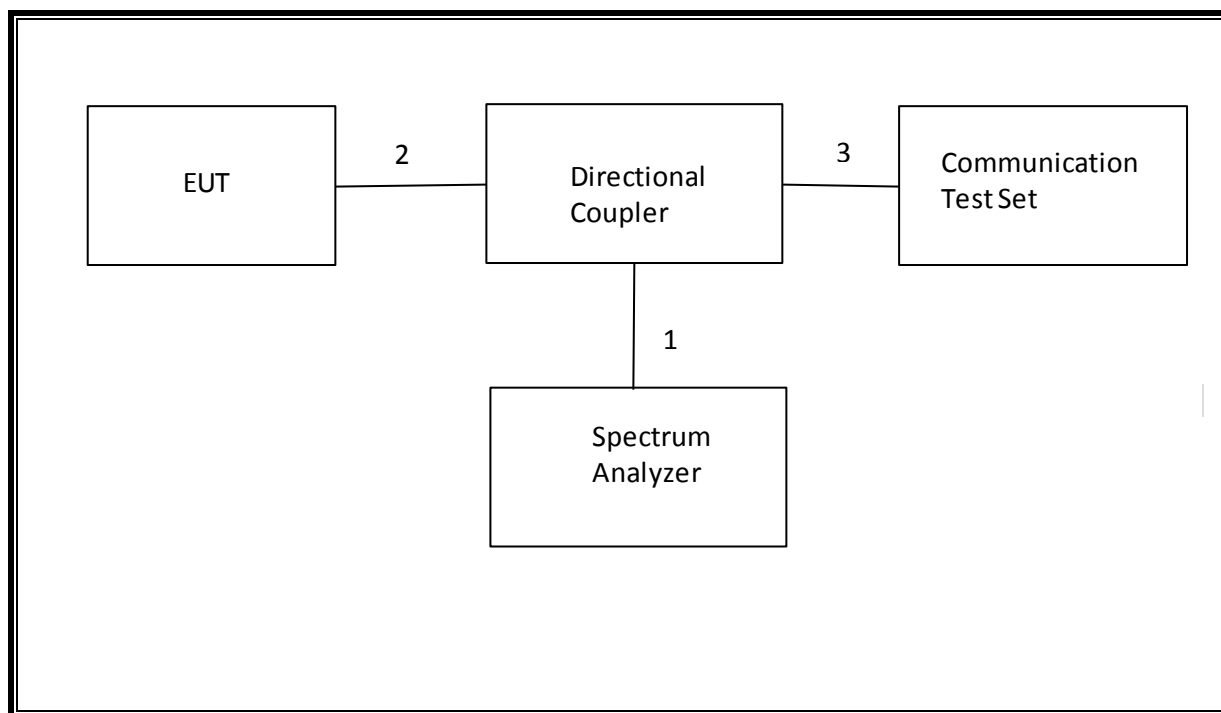

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

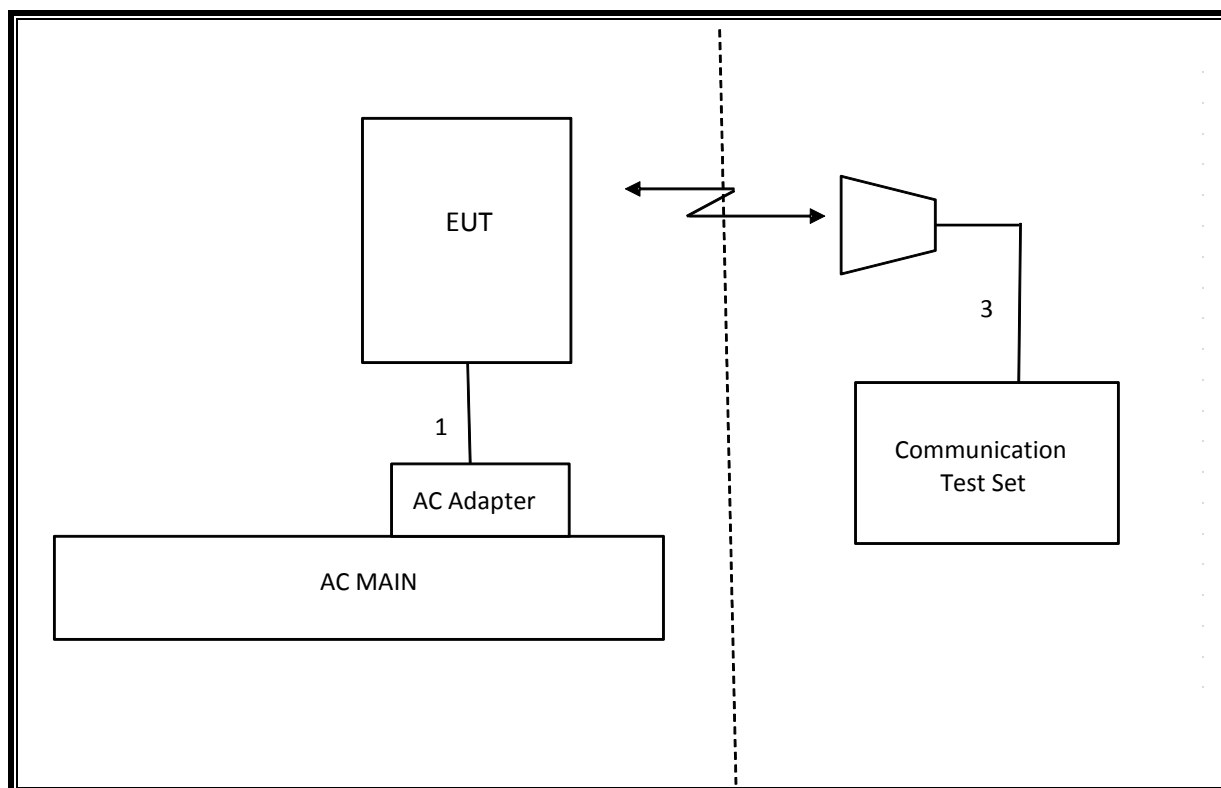

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01179	02/26/16
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01011	08/14/15
Antenna, Horn, 18 GHz	EMCO	3115	C00783	10/25/15
Antenna, Horn, 18 GHz	EMCO	3115	C00784	10/25/15
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	N02687	CNR
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM13193	N02688	CNR
Temperature / Humidity Chamber	Thermotron	SE 600-10-10	C00930	01/09/16
Communications Test Set	R&S	CMW500	T159	07/02/16
DC power supply, 8 V @ 3 A or 15 V	Agilent / HP	E3610A	None	CNR
Vector signal generator, 6 GHz	Agilent / HP	E4438C	None	07/06/16
Antenna, Tuned Dipole 400~1000	ETS	3121C DB4	C00993	02/14/16
Directional Coupler	RF-Lambda	RFDC5M06G15	None	CNR
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00589	12/17/15
Multimeter	Fluke	26111	74320701	4/15/2016

7. SUMMARY TABLE

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Note
2.1049	N/A	Occupied Band width (99%)	N/A	Conducted	Pass	1.278 MHz
22.917(a) 24.238(a) 27.53(g) 90.691	RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)	Band Edge / Conducted Spurious Emission	-13dBm		Pass	-11.22 dBm
2.1046	N/A	Conducted output power	N/A		Pass	23.7dBm
22.355 24.235 27.54 90.213	RSS-132(4.3) RSS-133(6.3) RSS-139(6.3) RSS-199(4.3)	Frequency Stability	2.5PPM		Pass	0.016ppm
22.913(a)(2)	RSS-132(4.4)	Effective Radiated Power	38 dBm	Radiated	Pass	23.60 dBm
24.232(c) 27.50(h)(2)	RSS-133(6.4) RSS-199(4.4)	Equivalent Isotropic Radiated Power	33dBm		Pass	24.99 dBm
22.917(a) 24.238(a) 27.53(g)	RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)	Radiated Spurious Emission	-13dBm		Pass	-45.7 dBm

8.1.2. CDMA2000 OUTPUT POWER RESULT

Band	Mode	Ch	Freq. (MHz)	Avg Pwr (dBm)
BC0	RC1, SO55 (Loopback)	1013	824.70	23.5
		384	836.52	23.7
		777	848.31	23.6
	RC3, SO55 (Loopback)	1013	824.70	23.3
		384	836.52	23.5
		777	848.31	23.7
	RC3, SO32 (+F-SCH)	1013	824.70	23.4
		384	836.52	23.5
		777	848.31	23.4

Band	Mode	Ch	Freq. (MHz)	Avg Pwr (dBm)
BC1	RC1, SO55 (Loopback)	25	1851.25	21.2
		600	1880.00	21.4
		1175	1908.75	21.5
	RC3, SO55 (Loopback)	25	1851.25	21.5
		600	1880.00	21.3
		1175	1908.75	21.4
	RC3, SO32 (+F-SCH)	25	1851.25	21.4
		600	1880.00	21.4
		1175	1908.75	21.5

9. PEAK TO AVERAGE RATIO

Test Procedure


Per KDB 971168 D01 Power Meas License Digital Systems v02r02

Test Spec

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

9.1. CONDUCTED PEAK TO AVERAGE RESULT

RESULTS

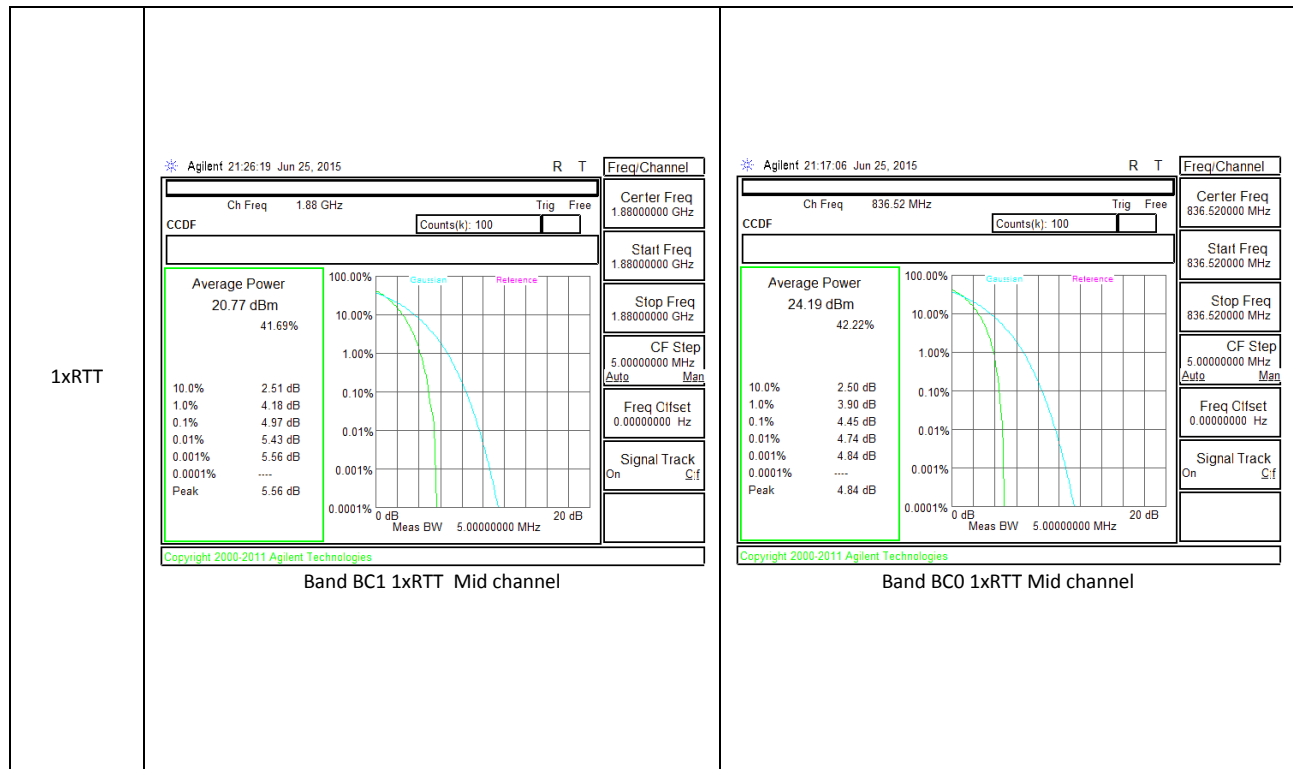

10. LIMITS AND CONDUCTED RESULTS

10.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

IC: RSS-132, 4.5; RSS-133, 6.5

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.


(KDB 971168 D01 Power Meas License Digital Systems v02r02)

RESULTS

10.1.1. OCCUPIED BANDWIDTH RESULTS

Band	Mode	Channel	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
BC0	1xRTT	1013	824.7	1.2589	1.407
		384	836.52	1.265	1.407
		777	848.31	1.2776	1.417
BC1		25	1851.25	1.2597	1.401
		600	1880	1.2609	1.403
		1175	1908.75	1.2672	1.416

10.1.1. OCCUPIED BANDWIDTH PLOTS

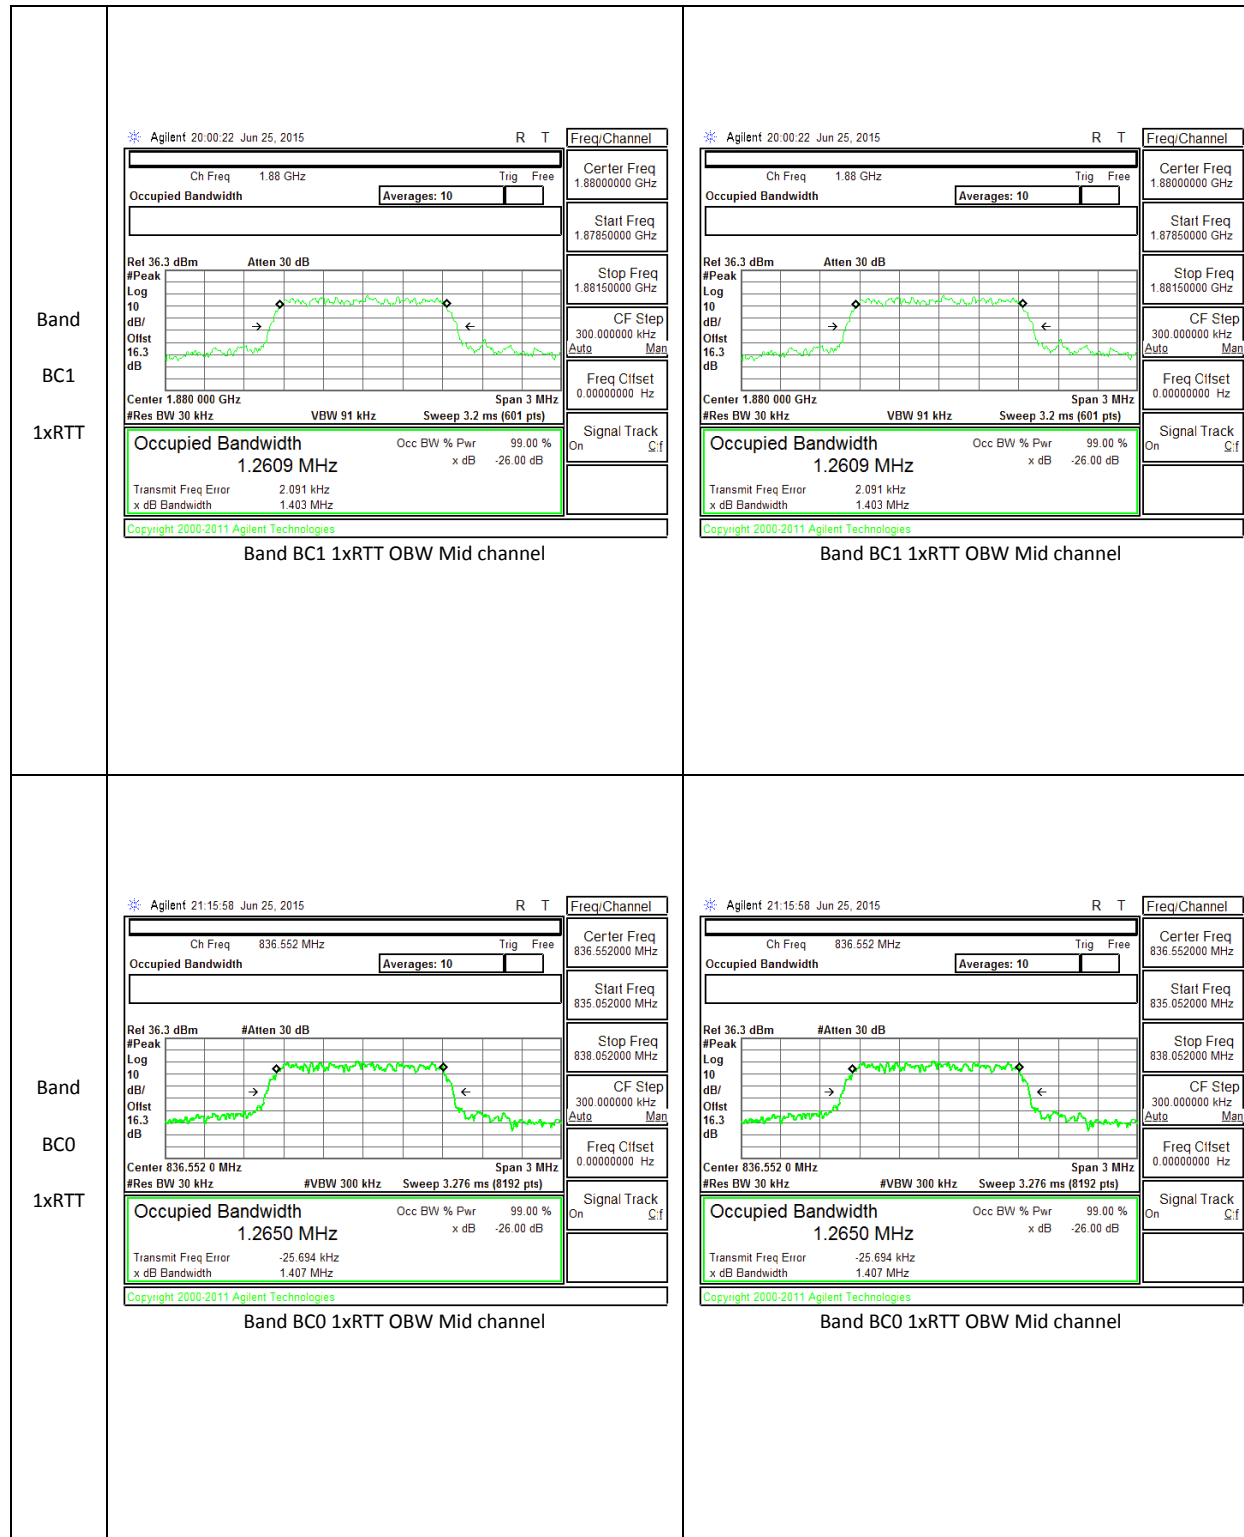

10.2. BAND EDGE EMISSIONS

RULE PART(S)

FCC: §22.359 and §24.238

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.


TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r02

The transmitter output was connected to an Agilent 8960 or a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

RESULTS

10.2.1. BAND EDGE PLOTS

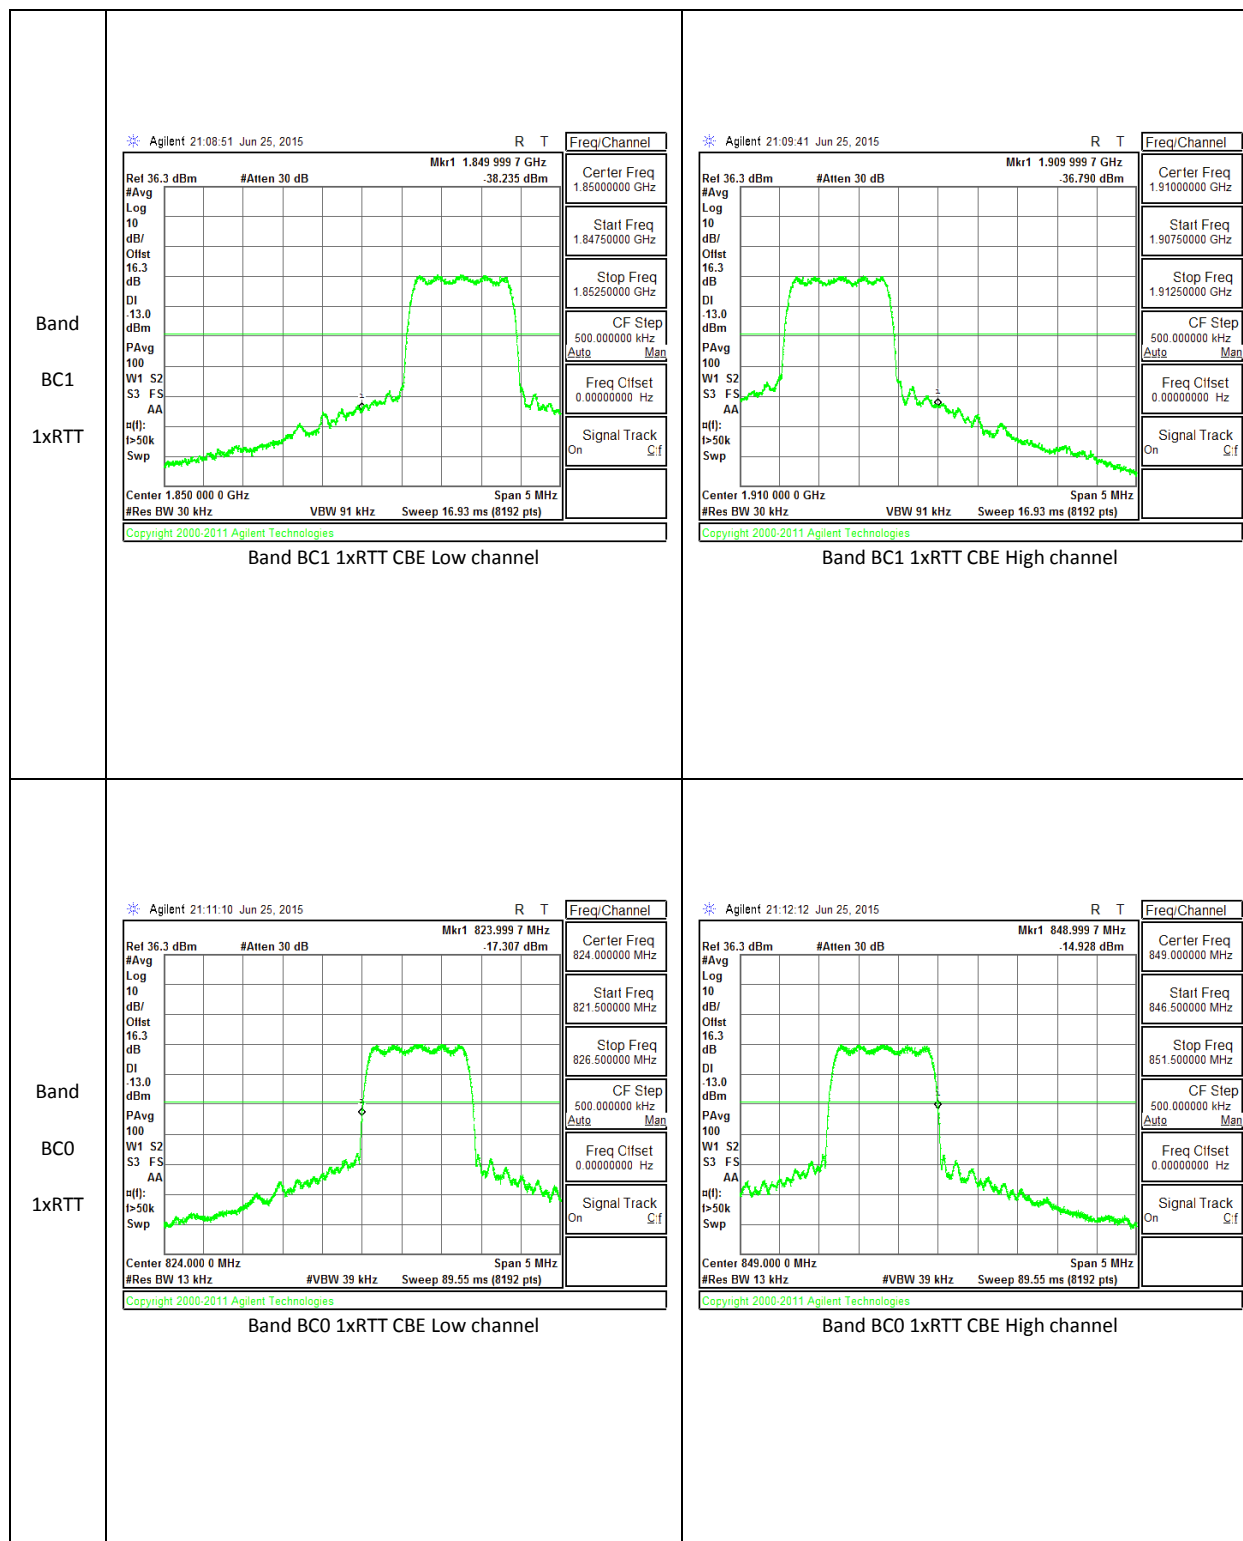

10.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.901, §22.917 and §24.238

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r02


The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

RESULTS

10.3.1. OUT OF BAND EMISSIONS RESULT

Band	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
BC0	1xRTT	824.7	-25.97	-13	-12.97
		836.52	-25.06	-13	-12.06
		848.31	-24.88	-13	-11.88
BC1		1851.25	-24.22	-13	-11.22
		1880	-24.61	-13	-11.61
		1908.75	-25.22	-13	-12.22

10.3.2. OUT OF BAND EMISSIONS PLOTS

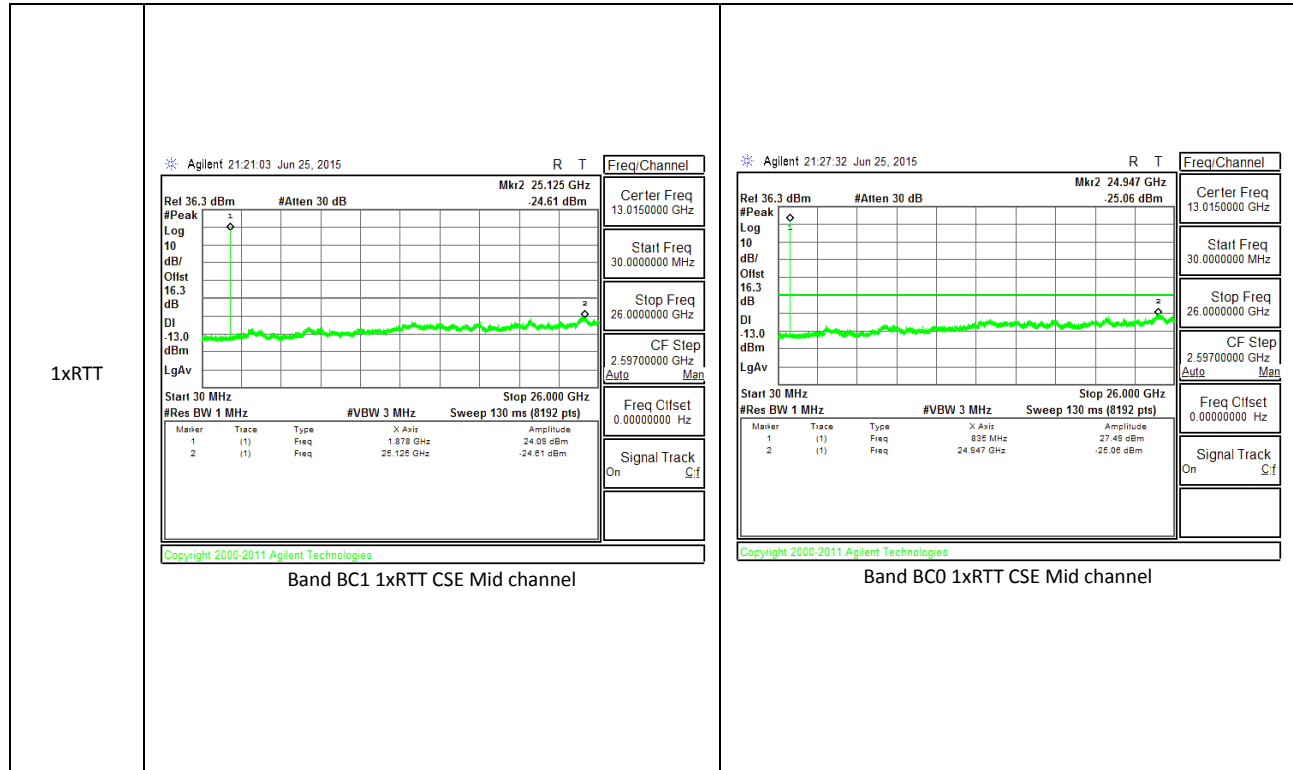

10.4. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355 and §24.235

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r02

RESULTS

See the following pages.

10.4.1. FREQUENCY STABILITY RESULTS

RTT BC1 , Mid Channel 600 Freq: 1880MHz

Reference Frequency: PCS Mid Channel Limit: to stay +- 2.5 ppm =				
		1880	MHz @ 20°C	
		4700.000	Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	1879.999988	-0.001	2.5
3.80	40	1879.999992	-0.003	2.5
3.80	30	1879.999992	-0.003	2.5
3.80	20	1879.999987	0	2.5
3.80	10	1879.999991	-0.002	2.5
3.80	0	1879.999993	-0.003	2.5
3.80	-10	1880.000005	-0.010	2.5
3.80	-20	1880.000006	-0.010	2.5
3.80	-30	1879.999991	-0.002	2.5

Reference Frequency: PCS Mid Channel Limit: to stay +- 2.5 ppm =				
		1880	MHz @ 20°C	
		4700.000	Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	1879.999987	0	2.5
4.37	20	1879.999991	-0.002	2.5
3.23	20	1879.999992	-0.003	2.5

RTT BC0 CELL BAND, MID CHANNEL 384, Frequency 836.52 MHz

Reference Frequency: PCS Mid Channel Limit: to stay +/- 2.5 ppm =			836.52 2091.300	MHz @ 20°C Hz
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	836.519992	0.016	2.5
3.80	40	836.520007	-0.001	2.5
3.80	30	836.520006	0.000	2.5
3.80	20	836.520006	0	2.5
3.80	10	836.520003	0.003	2.5
3.80	0	836.520004	0.002	2.5
3.80	-10	836.519994	0.015	2.5
3.80	-20	836.520007	-0.002	2.5
3.80	-30	836.519995	0.014	2.5

Reference Frequency: PCS Mid Channel			836.52	MHz @ 20°C
Limit: to stay +/- 2.5 ppm =			2091.300	Hz
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	836.520006	0	2.5
4.37	20	836.5200052	0.001	2.5
3.23	20	836.5200066	-0.001	2.5

10.5. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, and §24.232

LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13dB.

TEST PROCEDURE

ANSI / TIA / EIA 603C Clause 2.2.17; PSA setting reference to 971168 D01 v02r02

For peak power measurement with a PSA:

a) Set the RBW $\geq$ OBW; b) Set VBW $\geq 3 \times$ RBW; c) Set span $\geq 2 \times$ RBW; d) Sweep time = auto couple; e) Detector = peak; f) Ensure that the number of measurement points $\geq$ span/RBW; g) Trace mode = max hold;

For average power measurement with a PSA:

a) Set span to at least 1.5 times the OBW; b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz; c) Set VBW $\geq 3 \times$ RBW; d) Set number of points in sweep $\geq 2 \times$ span / RBW; e) Sweep time = auto-couple; f) Detector = RMS (power averaging); g) Use free run trigger If burst duty cycle ≥ 98 ; h) Use trigger to capture bursts If burst duty cycle < 98 ; i) Trace average at least 100 traces in power averaging (i.e., RMS) mode. j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function.

TEST RESULTS

10.5.1. ERP/EIRP Results

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
BC1	1xRTT	25	1851.25	24.987	315.28
		600	1880	23.276	212.62
		1175	1908.75	24.837	304.58
BC0	1xRTT	1013	824.7	23.200	208.93
		384	836.52	23.601	229.14
		777	848.31	22.900	194.98

10.5.2. ERP/EIRP PLOTS

Band BC1 1xRTT	High Frequency Fundamental Measurement UL Verification Services Chamber A Company: LG Electronics Project #: 15I21066 Date: 06/30/15 Test Engineer: A. Escamilla Configuration: EUT only Mode: CDMA RTT BC1 Test Equipment: Receiving: Horn T136, and Chamber A SMA Cables Substitution: Horn T60 Substitution, 4ft SMA Cable Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Delta	Notes
	GHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	1.85125	14.3	V	0.85	9.20	22.69	33.0	-10.3	
	1.85125	16.6	H	0.85	9.20	24.99	33.0	-8.0	
	Mid Ch								
	1.880	14.8	V	0.85	9.10	23.07	33.0	-9.9	
	1.880	15.0	H	0.85	9.10	23.28	33.0	-9.7	
	High Ch								
	1.90875	13.6	V	0.85	9.00	21.75	33.0	-11.3	
	1.90875	16.7	H	0.85	9.00	24.84	33.0	-8.2	
Rev. 3.17.11									

Band BC0 1xRTT	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber A Company: LG Electronics Project #: 15I21066 Date: 07/01/15 Test Engineer: A. Escamilla Configuration: EUT Only Mode: CDMA BC0 RTT FUND Test Equipment: Receiving: Sunol T130, and 5m Chamber A N-type Cable Substitution: Dipole T273, 4ft SMA Cable Warehouse. <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Margin (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td>Low Ch</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>824.70</td> <td>18.48</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>17.58</td> <td>38.5</td> <td>-20.9</td> <td></td> </tr> <tr> <td>824.70</td> <td>24.10</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>23.20</td> <td>38.5</td> <td>-15.2</td> <td></td> </tr> <tr> <td>Mid Ch</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>836.52</td> <td>18.08</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>17.18</td> <td>38.5</td> <td>-21.3</td> <td></td> </tr> <tr> <td>836.52</td> <td>24.50</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>23.60</td> <td>38.5</td> <td>-14.8</td> <td></td> </tr> <tr> <td>High Ch</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>848.31</td> <td>17.11</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>16.21</td> <td>38.5</td> <td>-22.2</td> <td></td> </tr> <tr> <td>848.31</td> <td>23.80</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>22.90</td> <td>38.5</td> <td>-15.5</td> <td></td> </tr> </tbody> </table> Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	Low Ch									824.70	18.48	V	0.9	0.0	17.58	38.5	-20.9		824.70	24.10	H	0.9	0.0	23.20	38.5	-15.2		Mid Ch									836.52	18.08	V	0.9	0.0	17.18	38.5	-21.3		836.52	24.50	H	0.9	0.0	23.60	38.5	-14.8		High Ch									848.31	17.11	V	0.9	0.0	16.21	38.5	-22.2		848.31	23.80	H	0.9	0.0	22.90	38.5	-15.5	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																			
Low Ch																																																																																											
824.70	18.48	V	0.9	0.0	17.58	38.5	-20.9																																																																																				
824.70	24.10	H	0.9	0.0	23.20	38.5	-15.2																																																																																				
Mid Ch																																																																																											
836.52	18.08	V	0.9	0.0	17.18	38.5	-21.3																																																																																				
836.52	24.50	H	0.9	0.0	23.60	38.5	-14.8																																																																																				
High Ch																																																																																											
848.31	17.11	V	0.9	0.0	16.21	38.5	-22.2																																																																																				
848.31	23.80	H	0.9	0.0	22.90	38.5	-15.5																																																																																				

10.6. FIELD STRENGTH OF SPURIOUS RADIATION

RULE PART(S)

FCC: §2.1053, §22.917 and §24.238

LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

RESULTS

10.6.1. SPURIOUS RADIATION PLOTS

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I21066							
Date:		06/30/15							
Test Engineer:		A. Escamilla							
Configuration:		EUT, AC Adapter							
Location:		Chamber A							
Mode:		CDMA 1xRTT BC1 Harmonics							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1851.25									
3702.50	-16.6	V	3.0	35.9	1.0	-51.4	-13.0	-38.4	
5553.75	-14.8	V	3.0	35.5	1.0	-49.3	-13.0	-36.3	
7405.00	-12.7	V	3.0	35.7	1.0	-47.4	-13.0	-34.4	
3702.50	-16.5	H	3.0	35.9	1.0	-51.4	-13.0	-38.4	
5553.75	-13.8	H	3.0	35.5	1.0	-48.3	-13.0	-35.3	
7405.00	-12.4	H	3.0	35.7	1.0	-47.2	-13.0	-34.2	
Mid Ch, 1880									
3760.00	-16.3	V	3.0	35.8	1.0	-51.2	-13.0	-38.2	
5640.00	-15.0	V	3.0	35.5	1.0	-49.5	-13.0	-36.5	
7520.00	-12.3	V	3.0	35.7	1.0	-47.1	-13.0	-34.1	
3760.00	-19.5	H	3.0	35.8	1.0	-54.3	-13.0	-41.3	
5640.00	-19.3	H	3.0	35.5	1.0	-53.8	-13.0	-40.8	
7520.00	-15.7	H	3.0	35.7	1.0	-50.4	-13.0	-37.4	
High Ch, 1908.75									
3817.50	-15.8	V	3.0	35.8	1.0	-50.6	-13.0	-37.6	
5726.25	-14.5	V	3.0	35.5	1.0	-49.0	-13.0	-36.0	
7635.00	-11.6	V	3.0	35.8	1.0	-46.4	-13.0	-33.4	
3817.50	-16.6	H	3.0	35.8	1.0	-51.4	-13.0	-38.4	
5726.25	-14.0	H	3.0	35.5	1.0	-48.5	-13.0	-35.5	
7635.00	-11.0	H	3.0	35.8	1.0	-45.7	-13.0	-32.7	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		LG Electronics							
Project #:		15I21066							
Date:		06/30/15							
Test Engineer:		A. Escamilla							
Configuration:		EUT, AC Adapter							
Location:		Chamber A							
Mode:		CDMA 1xRTT BC0 Harmonics							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 824.7									
1649.40	-30.5	V	3.0	37.4	1.0	-66.9	-13.0	-53.9	
2474.10	-26.6	V	3.0	36.4	1.0	-62.0	-13.0	-49.0	
3298.80	-21.8	V	3.0	35.8	1.0	-56.6	-13.0	-43.6	
1649.40	-30.7	H	3.0	37.4	1.0	-67.1	-13.0	-54.1	
2474.10	-24.3	H	3.0	36.4	1.0	-59.7	-13.0	-46.7	
3298.80	-21.9	H	3.0	35.8	1.0	-56.7	-13.0	-43.7	
Mid Ch, 836.52									
1673.04	-31.0	V	3.0	37.3	1.0	-67.3	-13.0	-54.3	
2509.56	-26.5	V	3.0	36.4	1.0	-61.9	-13.0	-48.9	
3346.08	-21.7	V	3.0	35.8	1.0	-56.5	-13.0	-43.5	
1673.04	-31.0	H	3.0	37.3	1.0	-67.3	-13.0	-54.3	
2509.56	-24.5	H	3.0	36.4	1.0	-59.9	-13.0	-46.9	
3346.08	-21.8	H	3.0	35.8	1.0	-56.6	-13.0	-43.6	
High Ch, 848.31									
1696.62	-29.9	V	3.0	37.3	1.0	-66.2	-13.0	-53.2	
2544.93	-26.5	V	3.0	36.3	1.0	-61.8	-13.0	-48.8	
3393.24	-21.7	V	3.0	35.7	1.0	-56.4	-13.0	-43.4	
1696.62	-30.6	H	3.0	37.3	1.0	-66.9	-13.0	-53.9	
2544.93	-24.8	H	3.0	36.3	1.0	-60.1	-13.0	-47.1	
3393.24	-21.1	H	3.0	35.7	1.0	-55.8	-13.0	-42.8	