



## MEASUREMENT REPORT

### FCC Part 15.407 UNII 802.11a/n

**Applicant Name:**

LG Electronics MobileComm U.S.A  
1000 Sylvan Avenue  
Englewood Cliffs, NJ 07632  
United States

**Date of Testing:**

2/3/2015 - 2/20/2015

**Test Site/Location:**

PCTEST Lab, Columbia, MD, USA

**Test Report Serial No.:**

0Y1502020341.ZNF

**FCC ID:**

**ZNFVK815**

**APPLICANT:**

**LG Electronics MobileComm U.S.A**

**Application Type:**

Certification

**Model(s):**

LG-VK815, LGVK815, VK815

**EUT Type:**

Portable Tablet

**FCC Classification:**

Unlicensed National Information Infrastructure (UNII)

**FCC Rule Part(s):**

Part 15.407

**Test Procedure(s):**

KDB 789033 D02 v01

| Mode    | UNII Band | Channel Bandwidth (MHz) | Tx Frequency (MHz) | Conducted Power |                  |
|---------|-----------|-------------------------|--------------------|-----------------|------------------|
|         |           |                         |                    | Max. Power (mW) | Max. Power (dBm) |
| 802.11a | 1         | 20                      | 5180 - 5240        | 8.831           | 9.46             |
|         | 2A        | 20                      | 5260 - 5320        | 8.091           | 9.08             |
|         | 2C        | 20                      | 5500 - 5700        | 8.511           | 9.30             |
|         | 3         | 20                      | 5745 - 5825        | 8.790           | 9.44             |
| 802.11n | 1         | 20                      | 5180 - 5240        | 7.603           | 8.81             |
|         | 2A        | 20                      | 5260 - 5320        | 7.656           | 8.84             |
|         | 2C        | 20                      | 5500 - 5700        | 7.482           | 8.74             |
|         | 3         | 20                      | 5745 - 5825        | 7.834           | 8.94             |
| 802.11n | 1         | 40                      | 5190 - 5230        | 7.063           | 8.49             |
|         | 2A        | 40                      | 5270 - 5310        | 7.244           | 8.60             |
|         | 2C        | 40                      | 5510 - 5670        | 7.638           | 8.83             |
|         | 3         | 40                      | 5755 - 5795        | 6.503           | 8.13             |

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 D02 v01. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

  
Randy Ortanez  
President



|                                             |                                                                                     |                                                                         |                                                                                       |                                        |
|---------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> ZNFVK815                     |  | <b>FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)</b> |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>0Y1502020341.ZNF | <b>Test Dates:</b><br>2/3/2015 - 2/20/2015                                          | <b>EUT Type:</b><br>Portable Tablet                                     |                                                                                       | Page 1 of 100                          |

# TABLE OF CONTENTS

|                                                                 |     |
|-----------------------------------------------------------------|-----|
| FCC PART 15.407 MEASUREMENT REPORT .....                        | 3   |
| 1.0 INTRODUCTION .....                                          | 4   |
| 1.1 SCOPE .....                                                 | 4   |
| 1.2 PCTEST TEST LOCATION .....                                  | 4   |
| 2.0 PRODUCT INFORMATION .....                                   | 5   |
| 2.1 EQUIPMENT DESCRIPTION .....                                 | 5   |
| 2.2 DEVICE CAPABILITIES .....                                   | 5   |
| 2.3 TEST CONFIGURATION .....                                    | 5   |
| 2.4 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS .....               | 5   |
| 3.0 DESCRIPTION OF TEST .....                                   | 6   |
| 3.1 EVALUATION PROCEDURE .....                                  | 6   |
| 3.2 AC LINE CONDUCTED EMISSIONS .....                           | 6   |
| 3.3 RADIATED EMISSIONS .....                                    | 7   |
| 3.4 ENVIRONMENTAL CONDITIONS .....                              | 7   |
| 4.0 ANTENNA REQUIREMENTS .....                                  | 8   |
| 5.0 TEST EQUIPMENT CALIBRATION DATA .....                       | 9   |
| 6.0 TEST RESULTS .....                                          | 10  |
| 6.1 SUMMARY .....                                               | 10  |
| 6.2 26DB BANDWIDTH MEASUREMENT – 802.11A/N .....                | 11  |
| 6.3 6DB BANDWIDTH MEASUREMENT – 802.11A/N .....                 | 25  |
| 6.4 UNII OUTPUT POWER MEASUREMENT – 802.11A/N .....             | 31  |
| 6.5 MAXIMUM POWER SPECTRAL DENSITY – 802.11A/N .....            | 34  |
| 6.6 FREQUENCY STABILITY .....                                   | 53  |
| 6.7 RADIATED SPURIOUS EMISSION MEASUREMENTS .....               | 57  |
| 6.7.1 RADIATED SPURIOUS EMISSION MEASUREMENTS .....             | 60  |
| 6.7.2 RADIATED BAND EDGE MEASUREMENTS (20MHZ BW) .....          | 71  |
| 6.7.3 RADIATED BAND EDGE MEASUREMENTS (40MHZ BW) .....          | 80  |
| 6.8 RADIATED SPURIOUS EMISSIONS MEASUREMENTS – BELOW 1GHZ ..... | 89  |
| 6.9 LINE-CONDUCTED TEST DATA .....                              | 92  |
| 7.0 CONCLUSION .....                                            | 100 |

|                                             |                                                                                     |                                                                             |                                                                                       |                                        |
|---------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> ZNFVK815                     |  | <b>FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>0Y1502020341.ZNF | <b>Test Dates:</b><br>2/3/2015 - 2/20/2015                                          | <b>EUT Type:</b><br>Portable Tablet                                         |                                                                                       | Page 2 of 100                          |



# MEASUREMENT REPORT

## FCC Part 15.407



### § 2.1033 General Information

**APPLICANT:** LG Electronics MobileComm U.S.A

**APPLICANT ADDRESS:** 1000 Sylvan Avenue  
Englewood Cliffs, NJ 07632, United States

**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.

**TEST SITE ADDRESS:** 7185 Oakland Mills Road, Columbia, MD 21046 USA

**FCC RULE PART(S):** Part 15.407

**BASE MODEL:** LG-VK815

**FCC ID:** ZNFVK815

**FCC CLASSIFICATION:** Unlicensed National Information Infrastructure (UNII)

**Test Device Serial No.:** BT/Wifi#1, BT/Wifi#2 ☐ Production ☒ Pre-Production ☐ Engineering

**DATE(S) OF TEST:** 2/3/2015 - 2/20/2015

**TEST REPORT S/N:** 0Y1502020341.ZNF

### Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP) Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.



|                                             |                                                                                     |                                                                         |                                                                                       |                                        |
|---------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> ZNFVK815                     |  | <b>FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)</b> |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>0Y1502020341.ZNF | <b>Test Dates:</b><br>2/3/2015 - 2/20/2015                                          | <b>EUT Type:</b><br>Portable Tablet                                     |                                                                                       | Page 3 of 100                          |

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

### 1.2 PCTEST Test Location

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on February 15, 2012.

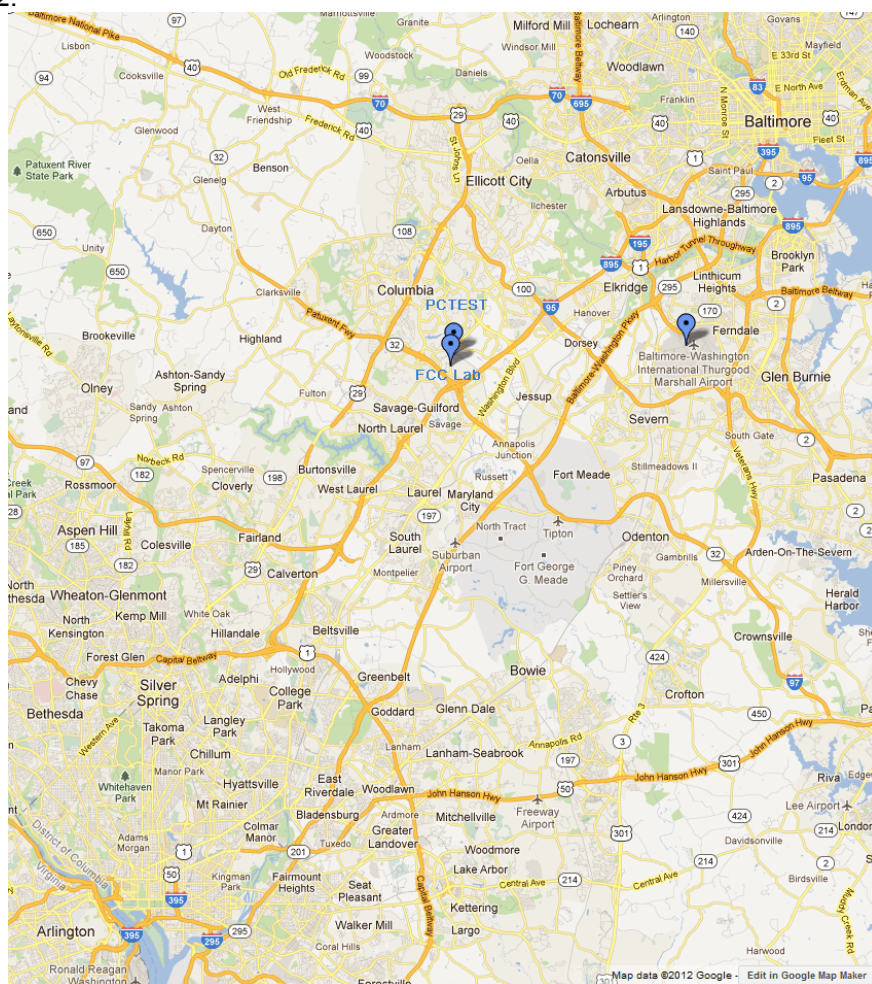


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 4 of 100                   |

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Tablet FCC ID: ZNFVK815**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

### 2.2 Device Capabilities

This device contains the following capabilities:

Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n UNII, Bluetooth (1x, EDR, LE)

**Note:** 5GHz WLAN (DTS/NII) operation is possible in 20MHz, and 40MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of KDB 789033. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

| Maximum Achievable Duty Cycles |          |                |
|--------------------------------|----------|----------------|
| 802.11 Mode/Band               |          | Duty Cycle [%] |
| 5GHz                           | a        | 98.60          |
|                                | n (HT20) | 98.10          |
|                                | n (HT40) | 98.00          |

Data Rate(s) Tested: 6, 9, 12, 18, 24, 36, 48, 54Mbps (802.11a)  
 6.5/7.2, 13/14.4, 19.5/21.7, 26/28.9, 39/43.3, 52/57.8, 58.5/65, 65/72.2 (n – 20MHz)  
 13.5/15, 27/30, 40.5/45, 54/60, 81/90, 108/120, 121.5/135, 135/150 (n – 40MHz BW)

### 2.3 Test Configuration

The LG Portable Tablet FCC ID: ZNFVK815 was tested per the guidance of KDB 789033 D02 v01. ANSI C63.10-2009 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 6.2, 6.4, 6.5, and 0 for antenna port conducted emissions test setups.

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

|                                      |                                                                                     |                                                                     |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFVK815                     |  | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015                                                 | EUT Type:<br>Portable Tablet                                        | Page 5 of 100                                                                         |                                 |

## 3.0 DESCRIPTION OF TEST

### 3.1 Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2009) and the guidance provided in KDB 789033 D02 v01 were used in the measurement of **LG Portable Tablet FCC ID: ZNFVK815**.

Deviation from measurement procedure.....None

### 3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or resolution, clock or data exchange speed, scrolling H pattern to the EUT and/or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 6.9. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 9.15.0.

|                                      |                                                                                     |                                                                     |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFVK815                     |  | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015                                                 | EUT Type:<br>Portable Tablet                                        |                                                                                       | Page 6 of 100                   |

### 3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Clause 5, Figure 5.7 of ANSI C63.4-2009. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A ¾" (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 0.8 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

### 3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

|                                             |                                                                                     |                                                                             |                                                                                       |                                        |
|---------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> ZNFVK815                     |  | <b>FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>0Y1502020341.ZNF | <b>Test Dates:</b><br>2/3/2015 - 2/20/2015                                          | <b>EUT Type:</b><br>Portable Tablet                                         |                                                                                       | Page 7 of 100                          |

## 4.0 ANTENNA REQUIREMENTS

### Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the Portable Tablet are **permanently attached**.
- There are no provisions for connection to an external antenna.

### Conclusion:

The **LG Portable Tablet FCC ID: ZNFVK815** unit complies with the requirement of §15.203.

| Band 1 |                 | Band 2A |                 | Band 2C |                 | Band 3 |                 |
|--------|-----------------|---------|-----------------|---------|-----------------|--------|-----------------|
| Ch.    | Frequency (MHz) | Ch.     | Frequency (MHz) | Ch.     | Frequency (MHz) | Ch.    | Frequency (MHz) |
| 36     | 5180            | 52      | 5260            | 100     | 5500            | 149    | 5745            |
| :      | :               | :       | :               | :       | :               | :      | :               |
| 42     | 5210            | 56      | 5280            | 116     | 5580            | 157    | 5785            |
| :      | :               | :       | :               | :       | :               | :      | :               |
| 48     | 5240            | 64      | 5320            | 140     | 5700            | 165    | 5825            |

Table 4-1. 802.11a / 802.11n (20MHz) Frequency / Channel Operations

| Band 1 |                 | Band 2A |                 | Band 2C |                 | Band 3 |                 |
|--------|-----------------|---------|-----------------|---------|-----------------|--------|-----------------|
| Ch.    | Frequency (MHz) | Ch.     | Frequency (MHz) | Ch.     | Frequency (MHz) | Ch.    | Frequency (MHz) |
| 38     | 5190            | 54      | 5270            | 102     | 5510            | 151    | 5755            |
| :      | :               | :       | :               | :       | :               | :      | :               |
| 46     | 5230            | 62      | 5310            | 110     | 5550            |        |                 |
|        |                 |         |                 | :       | :               |        |                 |
|        |                 |         |                 | 134     | 5670            | 159    | 5795            |

Table 4-2. 802.11n (40MHz BW) Frequency / Channel Operations

|                                      |                                                                                     |                                                                     |  |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------|--|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFVK815                     |  | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) |  |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015                                                 | EUT Type:<br>Portable Tablet                                        |  |                                                                                       | Page 8 of 100                   |

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

| Manufacturer    | Model              | Description                            | Cal Date   | Cal Interval | Cal Due    | Serial Number |
|-----------------|--------------------|----------------------------------------|------------|--------------|------------|---------------|
| -               | RE1                | Radiated Emissions Cable Set (UHF/EHF) | 10/24/2014 | Annual       | 10/24/2015 | N/A           |
| -               | WL25-1             | Conducted Cable Set (25GHz)            | 10/14/2014 | Annual       | 10/14/2015 | N/A           |
| Agilent         | 8447D              | Broadband Amplifier                    | 6/2/2014   | Annual       | 6/2/2015   | 1937A03348    |
| Agilent         | E4448A             | PSA (3Hz-50GHz) Spectrum Analyzer      | 4/16/2014  | Annual       | 4/16/2015  | US42510244    |
| Agilent         | N9020A             | MXA Signal Analyzer                    | 10/27/2014 | Annual       | 10/27/2015 | US46470561    |
| Anritsu         | ML2495A            | Power Meter                            | 10/31/2013 | Biennial     | 10/31/2015 | 941001        |
| Anritsu         | MA2411B            | Pulse Sensor                           | 4/8/2014   | Biennial     | 4/8/2016   | 846215        |
| Com-Power       | AL-130             | 9kHz - 30MHz Loop Antenna              | 6/26/2013  | Biennial     | 6/26/2015  | 121034        |
| Emco            | 3115               | Horn Antenna (1-18GHz)                 | 1/30/2014  | Biennial     | 1/30/2016  | 9704-5182     |
| Emco            | 3816/2             | Line Impedance Stabilization Network   | 2/12/2013  | Biennial     | 2/12/2015  | 9709-1077     |
| Espec           | ESX-2CA            | Environmental Chamber                  | 4/16/2014  | Annual       | 4/16/2015  | 17620         |
| ETS Lindgren    | 3117               | 1-18 GHz DRG Horn (Medium)             | 4/8/2014   | Biennial     | 4/8/2016   | 125518        |
| ETS Lindgren    | 3160-09            | 18-26.5 GHz Standard Gain Horn         | 6/17/2014  | Biennial     | 6/17/2016  | 135427        |
| ETS Lindgren    | 3160-10            | 26.5-40 GHz Standard Gain Horn         | 6/17/2014  | Biennial     | 6/17/2016  | 130993        |
| Huber+Suhner    | Sucoflex 102A      | 40GHz Radiated Cable                   | 10/15/2014 | Annual       | 10/15/2015 | 251425001     |
| K & L           | 11SH10-6000/T18000 | High Pass Filter                       | 12/1/2014  | Annual       | 12/1/2015  | 1             |
| K & L           | 11SH10-3075/U18000 | High Pass Filter                       | 12/1/2014  | Annual       | 12/1/2015  | 2             |
| Pasternack      | NMLC-1             | Line Conducted Emissions Cable (NM)    | 10/17/2014 | Annual       | 10/17/2015 | N/A           |
| Rhode & Schwarz | TS-PR18            | Pre-Amplifier                          | 6/12/2014  | Annual       | 6/12/2015  | 101622        |
| Rohde & Schwarz | TS-PR26            | 18-26.5 GHz Pre-Amplifier              | 3/12/2014  | Annual       | 3/12/2015  | 100040        |
| Rohde & Schwarz | ESU26              | EMI Test Receiver (26.5GHz)            | 3/27/2014  | Annual       | 3/27/2015  | 100342        |
| Rohde & Schwarz | TS-PR40            | 26.5-40 GHz Pre-Amplifier              | 5/15/2014  | Annual       | 5/15/2015  | 100037        |
| Seekonk         | NC-100             | Torque Wrench 5/16", 8" lbs            | 3/18/2014  | Biennial     | 3/18/2016  | N/A           |
| Sunol           | JB5                | Bi-Log Antenna (30M - 5GHz)            | 1/28/2014  | Biennial     | 1/28/2016  | A051107       |
| VWR             | 62344-734          | Thermometer with Clock                 | 2/20/2014  | Biennial     | 2/20/2016  | 140140336     |

**Table 5-1. Annual Test Equipment Calibration Schedule**

**Note:**

For equipment listed above that has a calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

|                                      |                                                                                     |                                                                     |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFVK815                     |  | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015                                                 | EUT Type:<br>Portable Tablet                                        |                                                                                       | Page 9 of 100                   |

## 6.0 TEST RESULTS

### 6.1 Summary

Company Name: LG Electronics MobileComm U.S.A  
 FCC ID: ZNFVK815  
 Method/System: Unlicensed National Information Infrastructure (UNII)

| FCC Part Section(s)          | Test Description                                                              | Test Limit                                                                                   | Test Condition | Test Result | Reference           |
|------------------------------|-------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|----------------|-------------|---------------------|
| <b>TRANSMITTER MODE (TX)</b> |                                                                               |                                                                                              |                |             |                     |
| N/A                          | 26dB Bandwidth                                                                | N/A                                                                                          | CONDUCTED      | PASS        | Section 6.2         |
| 15.407(e)                    | 6dB Bandwidth                                                                 | 500kHz                                                                                       |                | PASS        | Section 6.3         |
| 15.407 (a)                   | Maximum Conducted Output Power                                                | < 250mW (Band 1)<br>< Lesser of 250mW or<br>11+10*log(26dB BW) (Band 2A, 2C)<br><1W (Band 3) |                | PASS        | Section 6.4         |
| 15.407 (a)                   | Peak Power Spectral Density                                                   | < 11 dBm/MHz                                                                                 |                | PASS        | Section 6.5         |
| 15.407(g)                    | Frequency Stability                                                           | N/A                                                                                          |                | PASS        | Section 6.6         |
| 15.407(h)                    | Dynamic Frequency Selection                                                   | See DFS Test Report                                                                          |                | PASS        | See DFS Test Report |
| 15.407(b)                    | Undesirable Emissions                                                         | < -27 dBm/MHz EIRP                                                                           | RADIATED       | PASS        | Section 6.7         |
| 15.205, 15.209, 15.407(b)    | General Field Strength Limits (Restricted Bands and Radiated Emission Limits) | Emissions in restricted bands must meet the radiated limits                                  |                | PASS        | Section 6.7, 6.8    |
| 15.407(b)                    | AC Conducted Emissions 150kHz – 30MHz                                         | < FCC 15.207 limits                                                                          | LINE CONDUCTED | PASS        | Section 6.9         |

**Table 6-1. Summary of Test Results**

**Notes:**

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "UNII Automation", Version 3.4.

|                                      |                                                                                     |                                                                  |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFVK815                     |  | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015                                                 | EUT Type:<br>Portable Tablet                                     | Page 10 of 100                                                                        |                                 |

## 6.2 26dB Bandwidth Measurement – 802.11a/n

### Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle (>98%), at its maximum power control level, as defined in KDB 789033 D02 v01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

***The 26dB bandwidth is used to determine the conducted power limits.***

### Test Procedure Used


KDB 789033 D02 v01 – Section C

### Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 26. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 6-1. Test Instrument & Measurement Setup**


### Test Notes

None.


|                                      |                                                                                     |                                                                     |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFVK815                     |  | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015                                                 | EUT Type:<br>Portable Tablet                                        | Page 11 of 100                                                                        |                                 |

|         | Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured 26dB Bandwidth [MHz] |
|---------|-----------------|-------------|-------------|------------------|-------------------------------|
| Band 1  | 5180            | 36          | a           | 6                | 21.75                         |
|         | 5200            | 40          | a           | 6                | 21.72                         |
|         | 5240            | 48          | a           | 6                | 21.77                         |
|         | 5180            | 36          | n (20MHz)   | 6.5/7.2 (MCS0)   | 21.75                         |
|         | 5200            | 40          | n (20MHz)   | 6.5/7.2 (MCS0)   | 21.68                         |
|         | 5240            | 48          | n (20MHz)   | 6.5/7.2 (MCS0)   | 22.07                         |
|         | 5190            | 38          | n (40MHz)   | 13.5/15 (MCS0)   | 43.44                         |
|         | 5230            | 46          | n (40MHz)   | 13.5/15 (MCS0)   | 43.01                         |
| Band 2A | 5260            | 52          | a           | 6                | 21.59                         |
|         | 5280            | 56          | a           | 6                | 21.44                         |
|         | 5320            | 64          | a           | 6                | 21.54                         |
|         | 5260            | 52          | n (20MHz)   | 6.5/7.2 (MCS0)   | 21.85                         |
|         | 5280            | 56          | n (20MHz)   | 6.5/7.2 (MCS0)   | 22.09                         |
|         | 5320            | 64          | n (20MHz)   | 6.5/7.2 (MCS0)   | 22.21                         |
|         | 5270            | 54          | n (40MHz)   | 13.5/15 (MCS0)   | 42.92                         |
|         | 5310            | 62          | n (40MHz)   | 13.5/15 (MCS0)   | 43.11                         |
| Band 2C | 5500            | 100         | a           | 6                | 21.51                         |
|         | 5580            | 116         | a           | 6                | 21.47                         |
|         | 5700            | 140         | a           | 6                | 21.92                         |
|         | 5500            | 100         | n (20MHz)   | 6.5/7.2 (MCS0)   | 22.28                         |
|         | 5580            | 116         | n (20MHz)   | 6.5/7.2 (MCS0)   | 22.01                         |
|         | 5700            | 140         | n (20MHz)   | 6.5/7.2 (MCS0)   | 21.71                         |
|         | 5510            | 102         | n (40MHz)   | 13.5/15 (MCS0)   | 42.79                         |
|         | 5670            | 134         | n (40MHz)   | 13.5/15 (MCS0)   | 42.61                         |

**Table 6-2. Conducted Bandwidth Measurements**

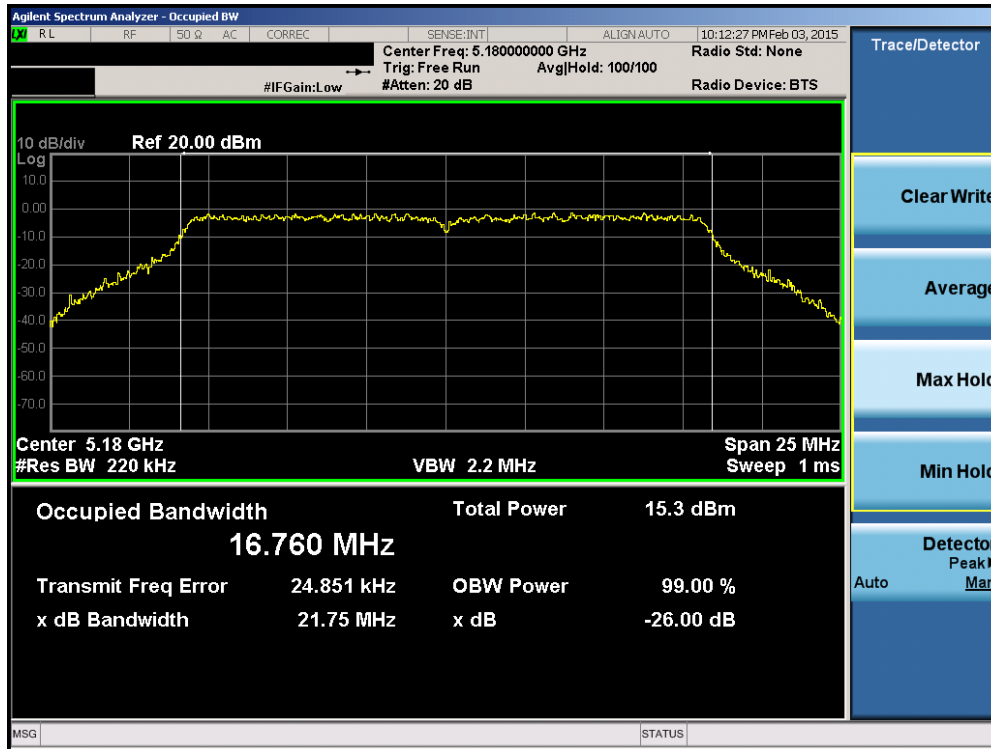


Plot 6-1. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 36)

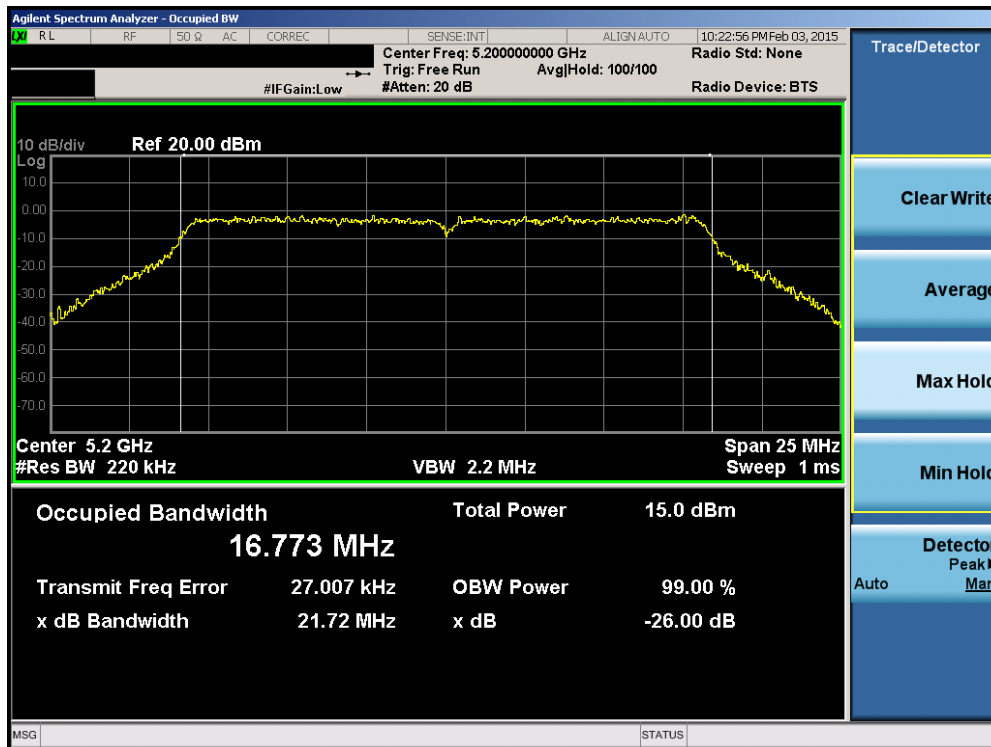


Plot 6-2. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 40)

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 13 of 100                  |

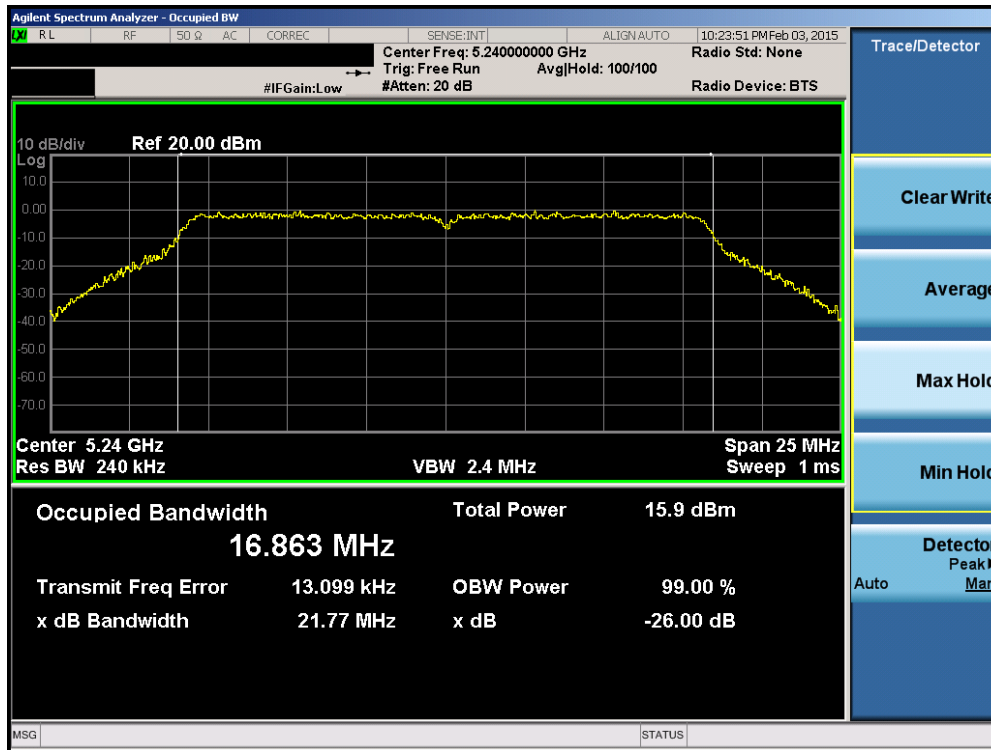


Plot 6-3. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 48)

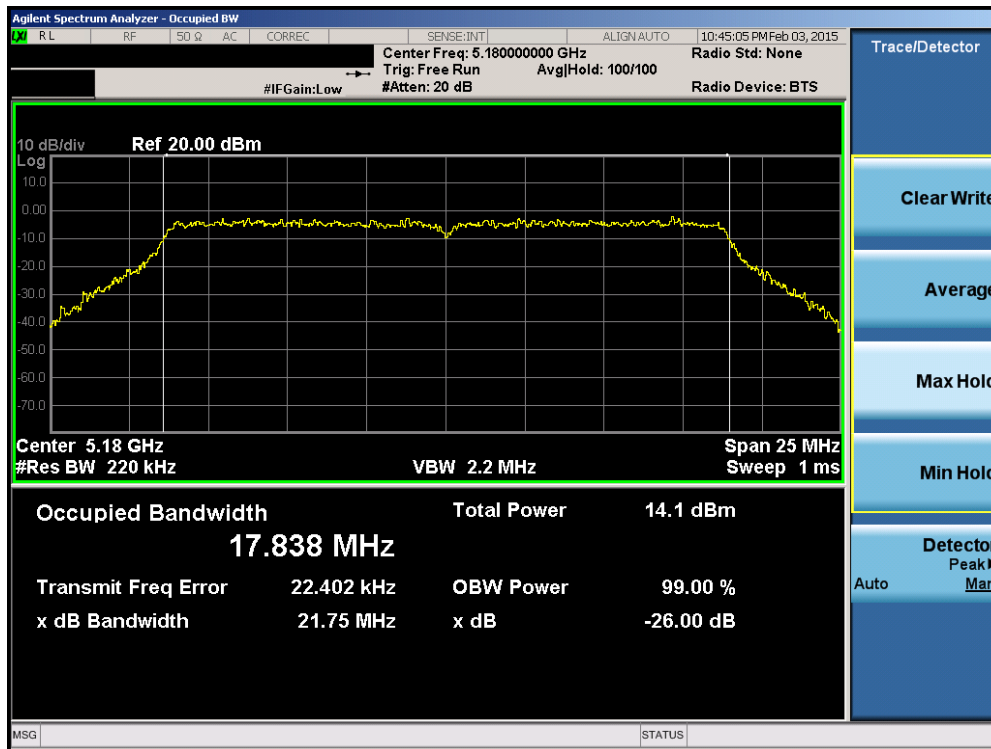


Plot 6-4. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 14 of 100                  |

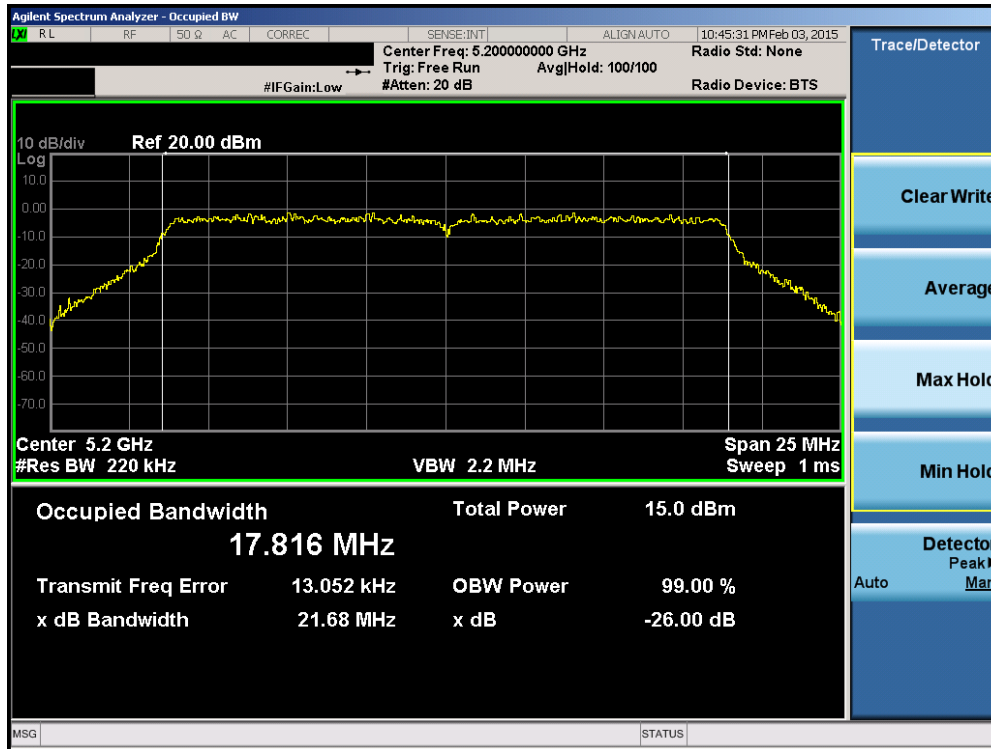


Plot 6-5. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

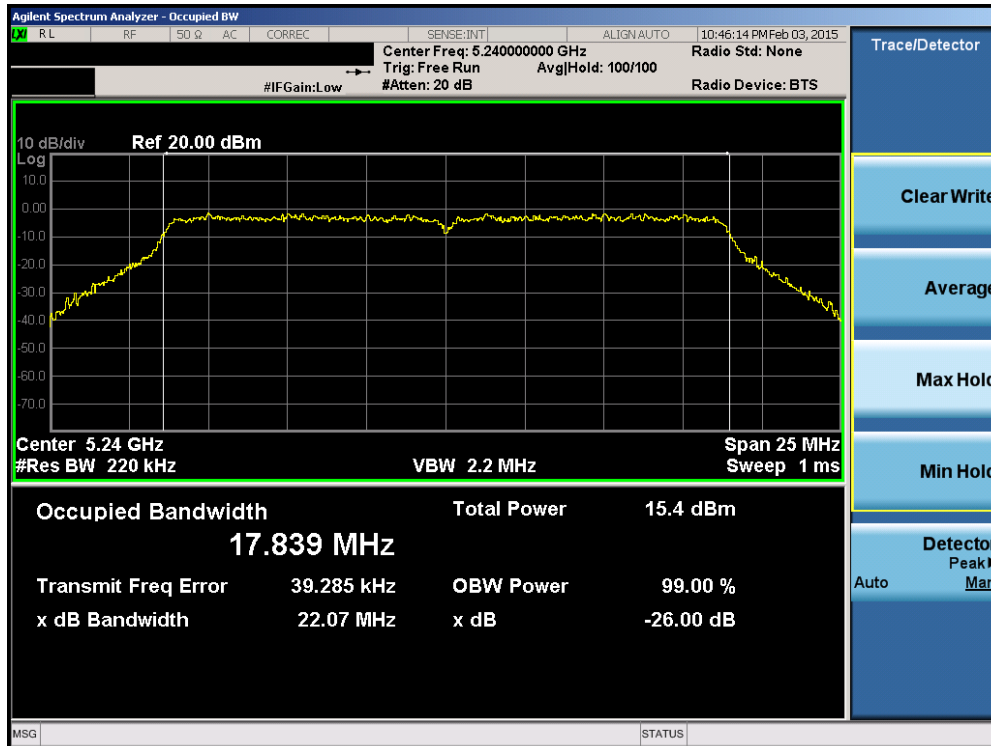


Plot 6-6. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 15 of 100                  |

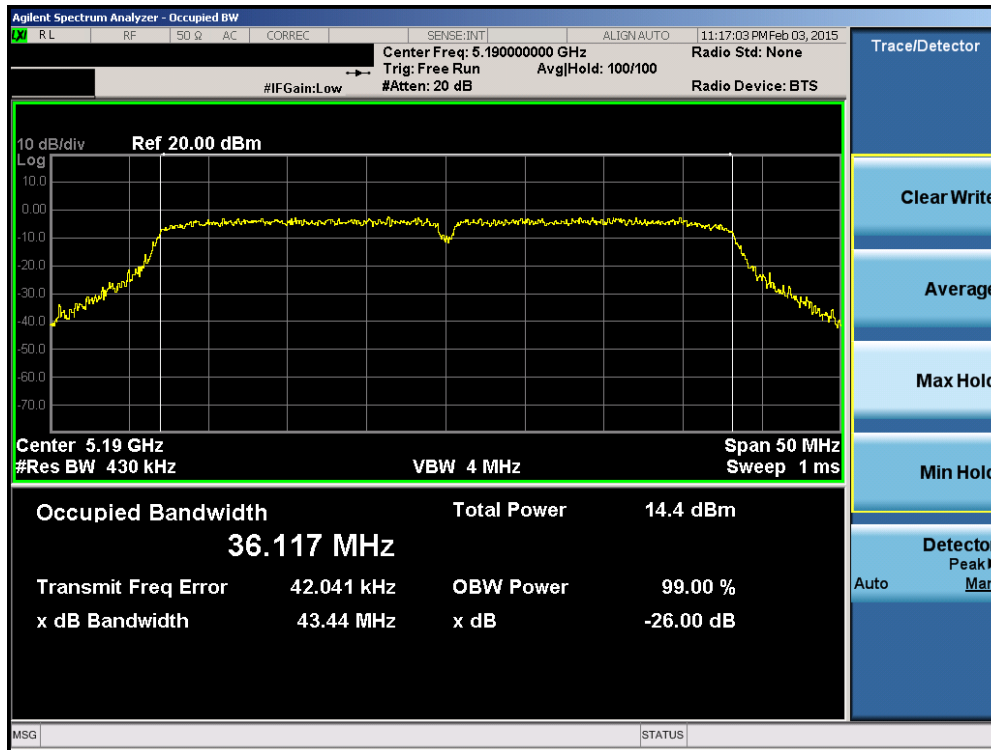


Plot 6-7. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

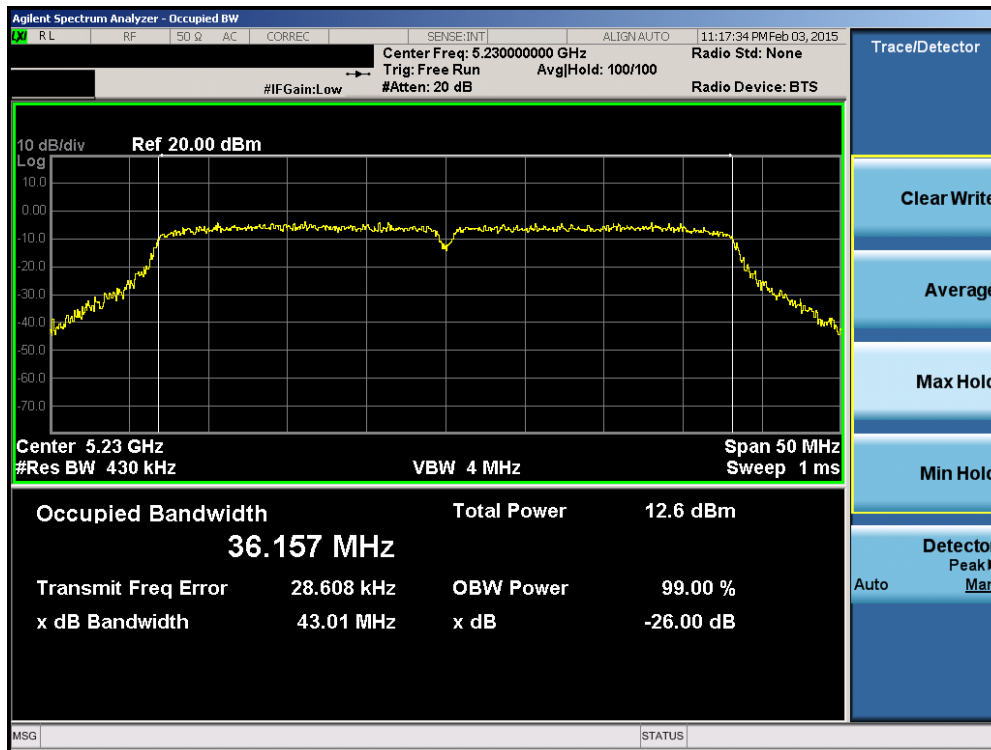


Plot 6-8. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 16 of 100                  |

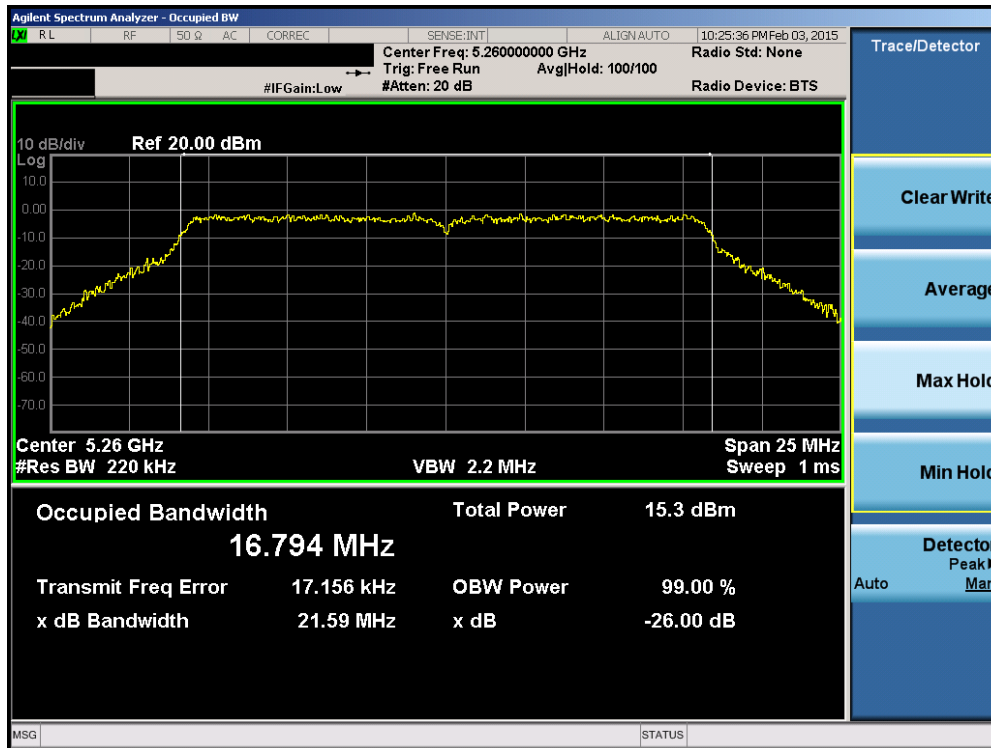


Plot 6-9. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 52)

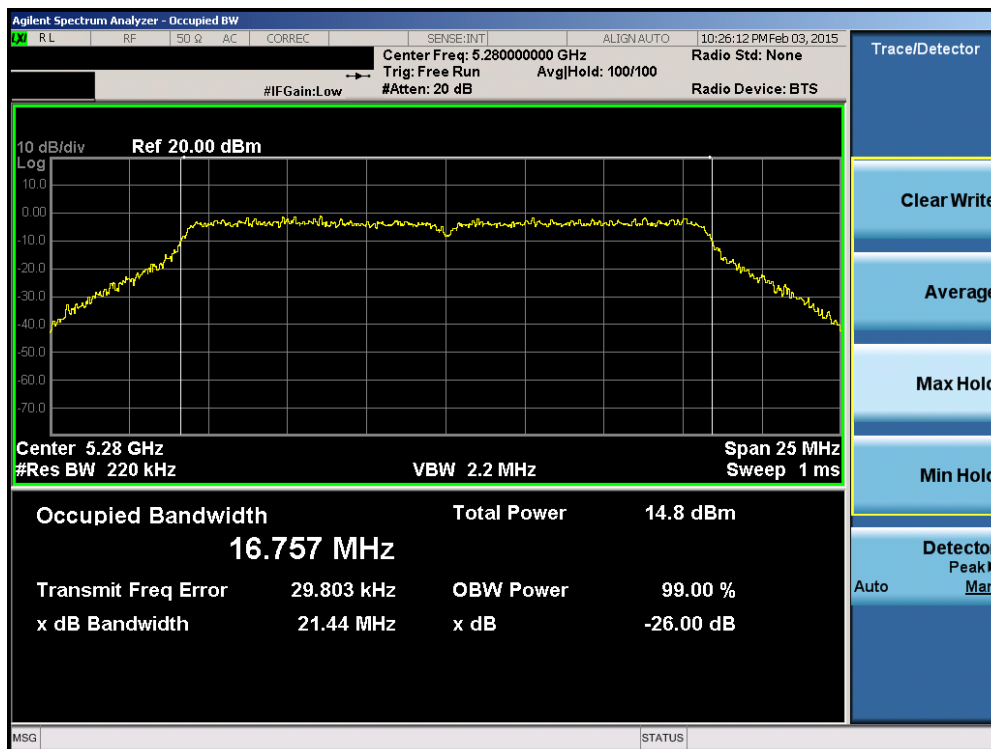


Plot 6-10. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 56)

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 17 of 100                  |

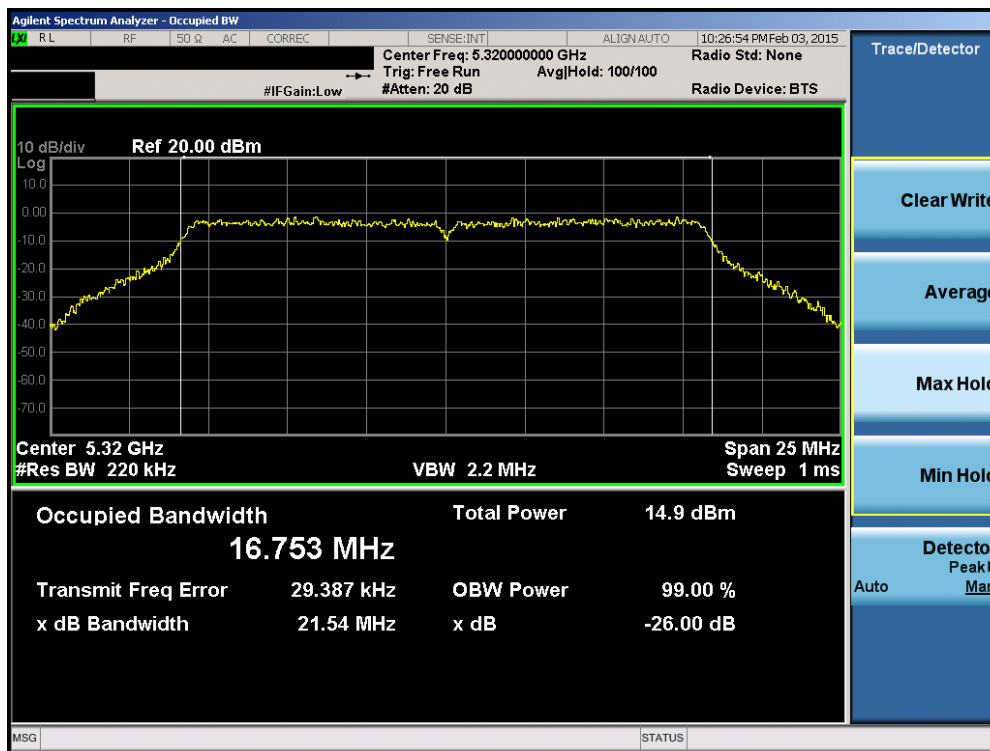


Plot 6-11. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 64)

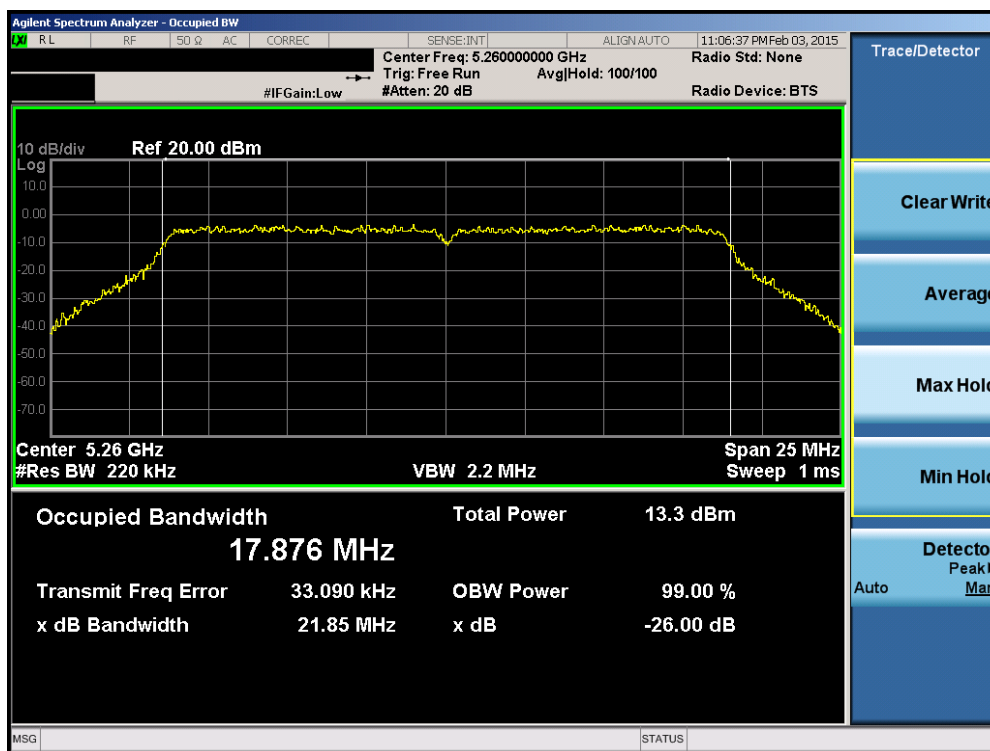


Plot 6-12. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 18 of 100                  |

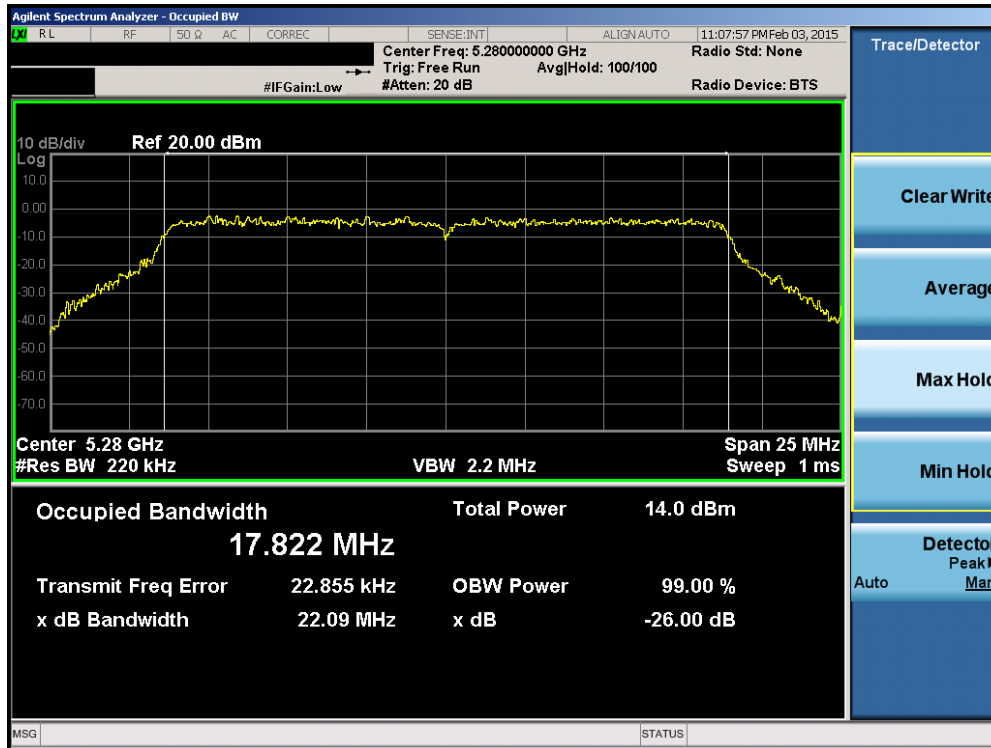


Plot 6-13. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

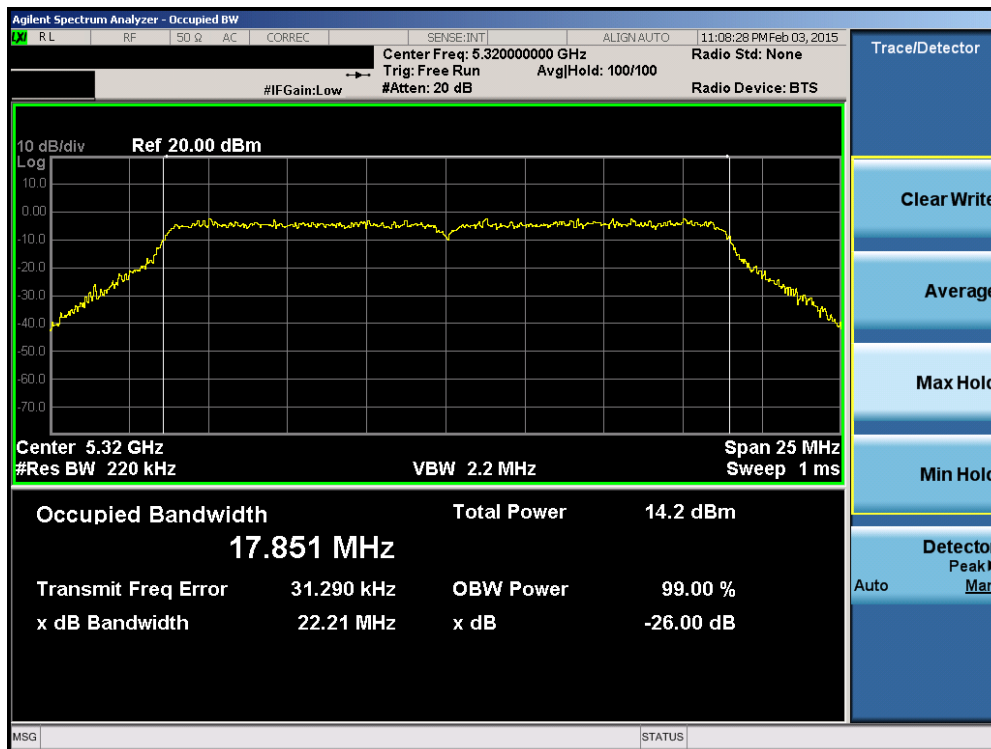


Plot 6-14. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 19 of 100                  |

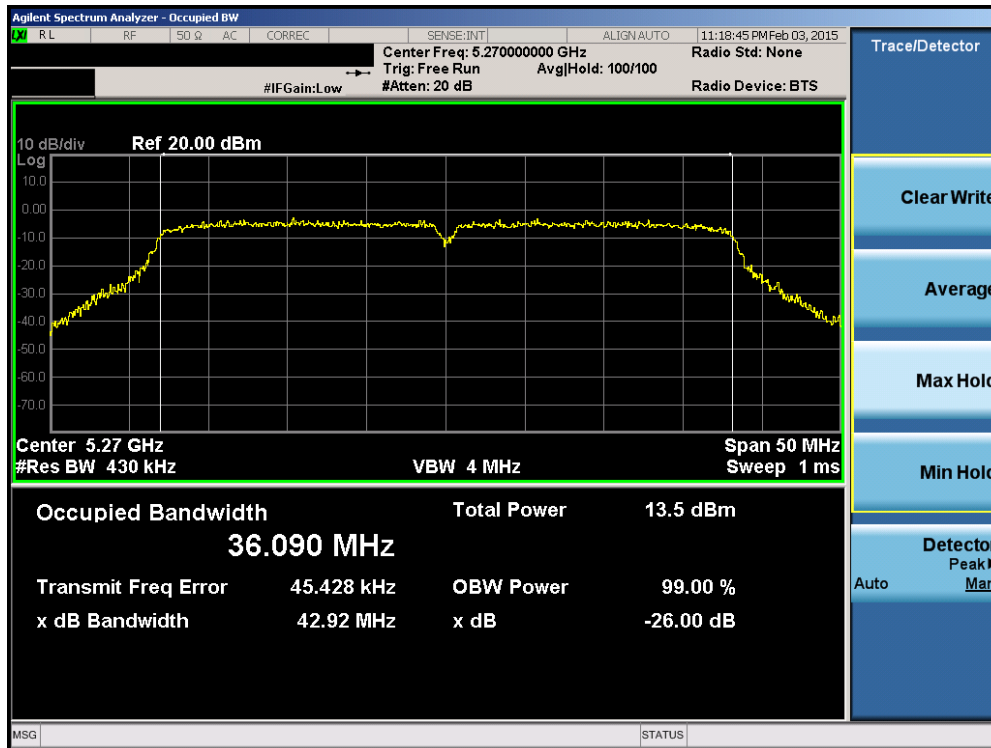


Plot 6-15. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

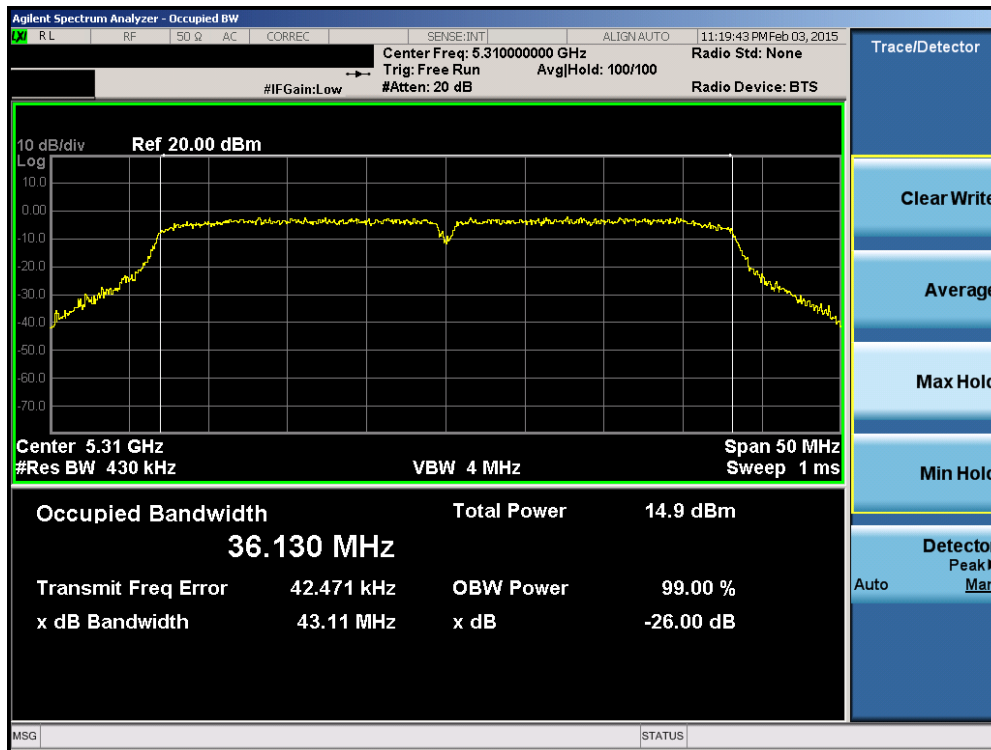


Plot 6-16. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 20 of 100                  |

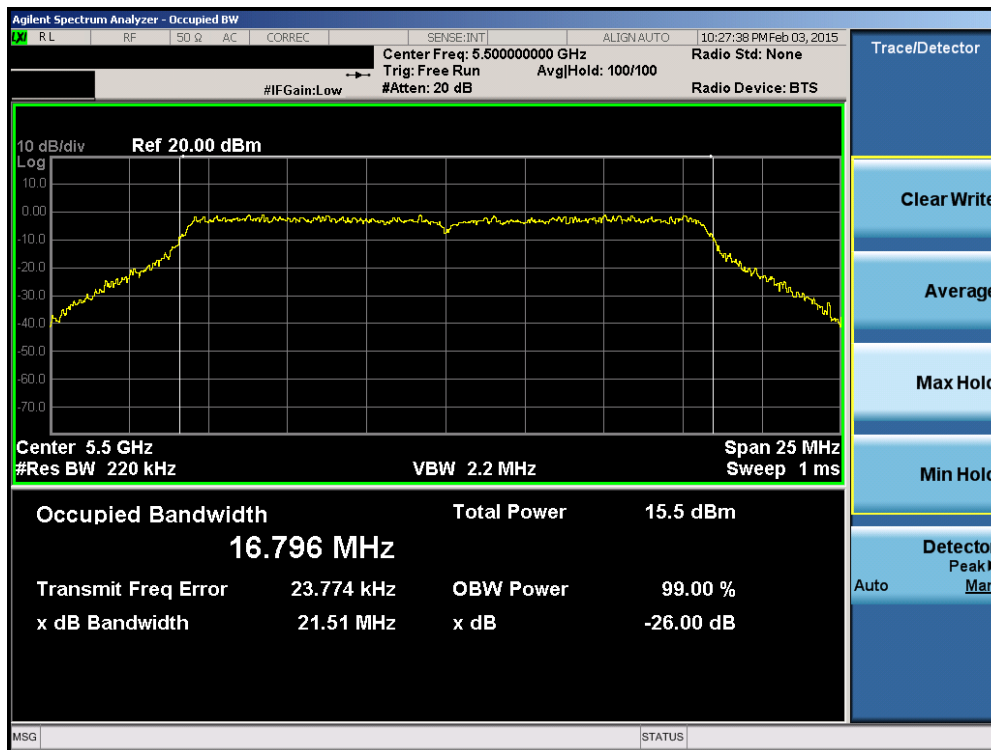


Plot 6-17. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 100)

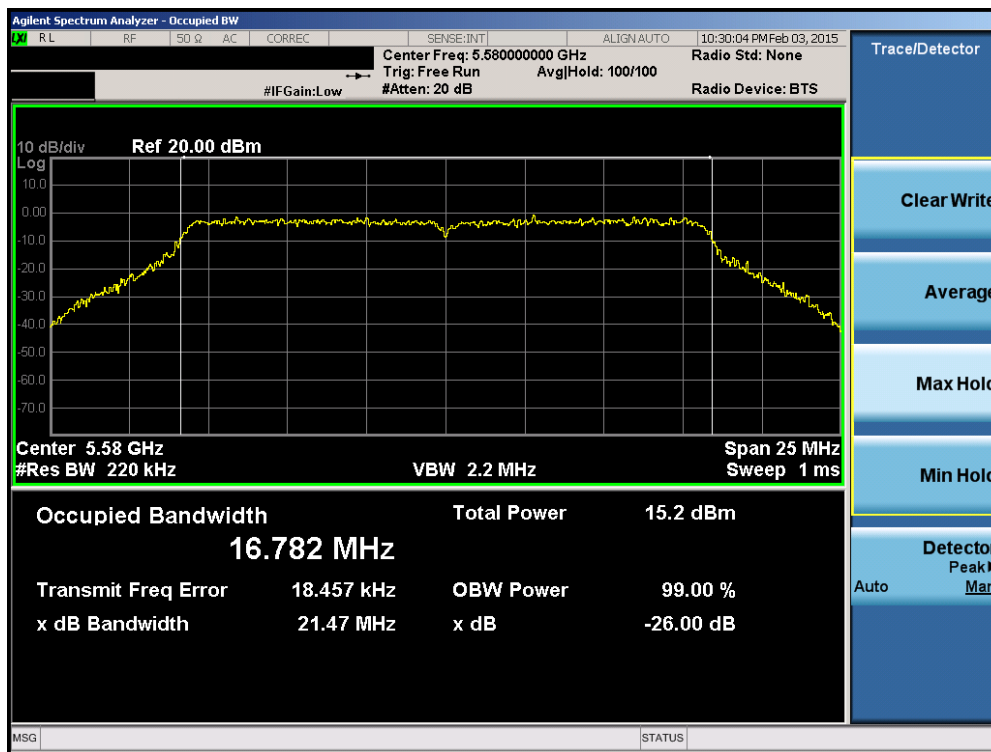


Plot 6-18. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 116)

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 21 of 100                  |

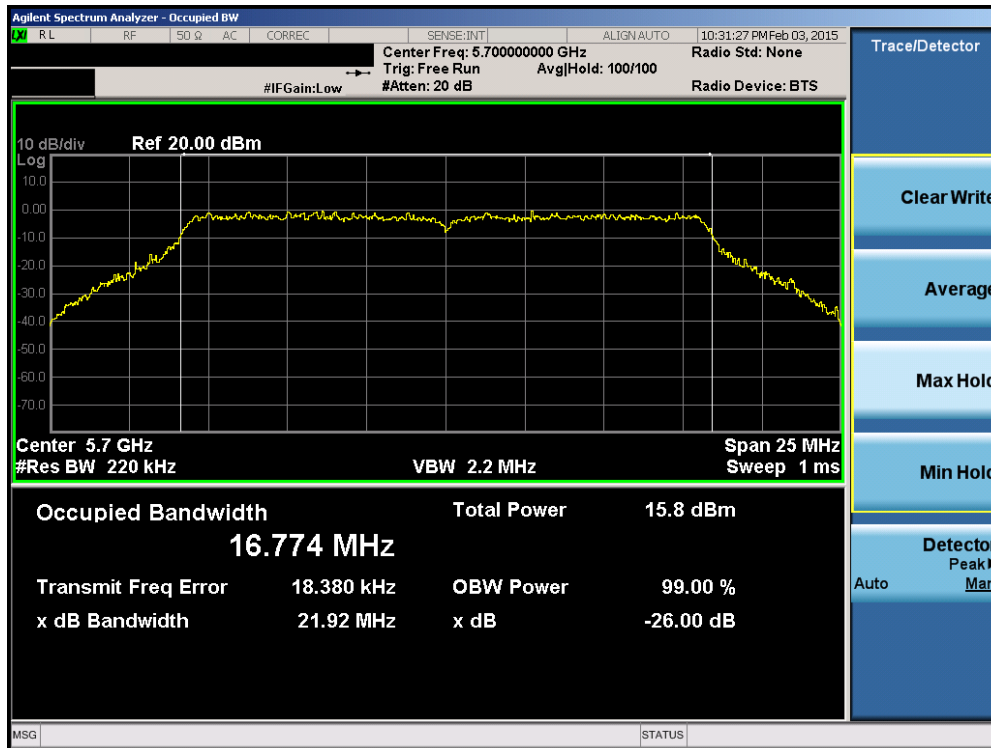


Plot 6-19. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 140)

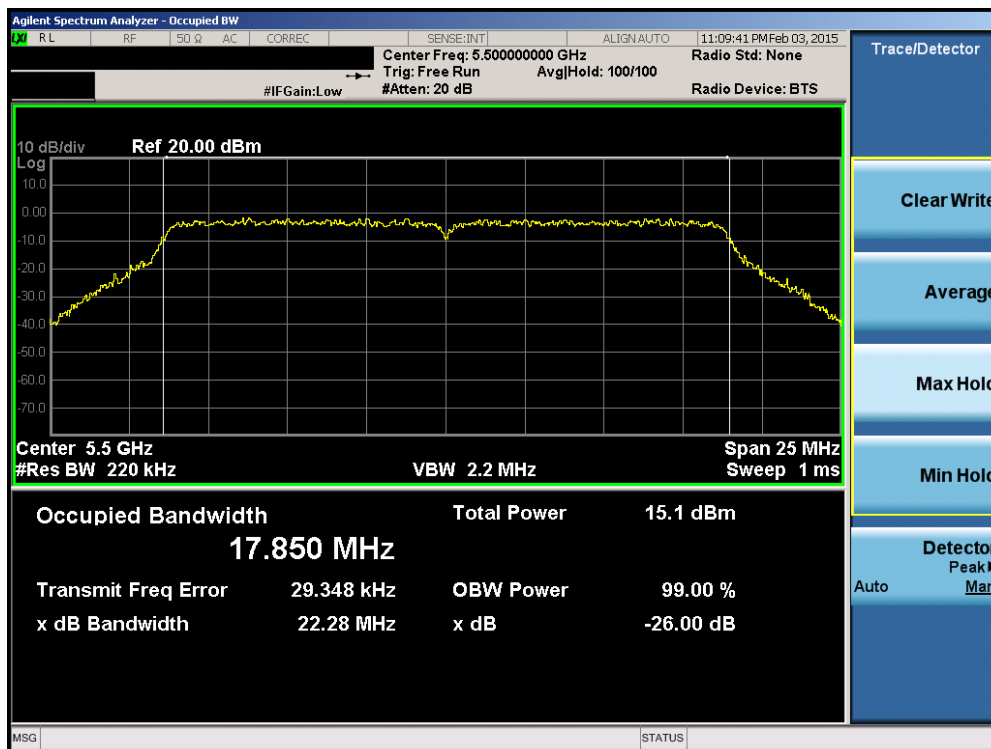


Plot 6-20. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 22 of 100                  |

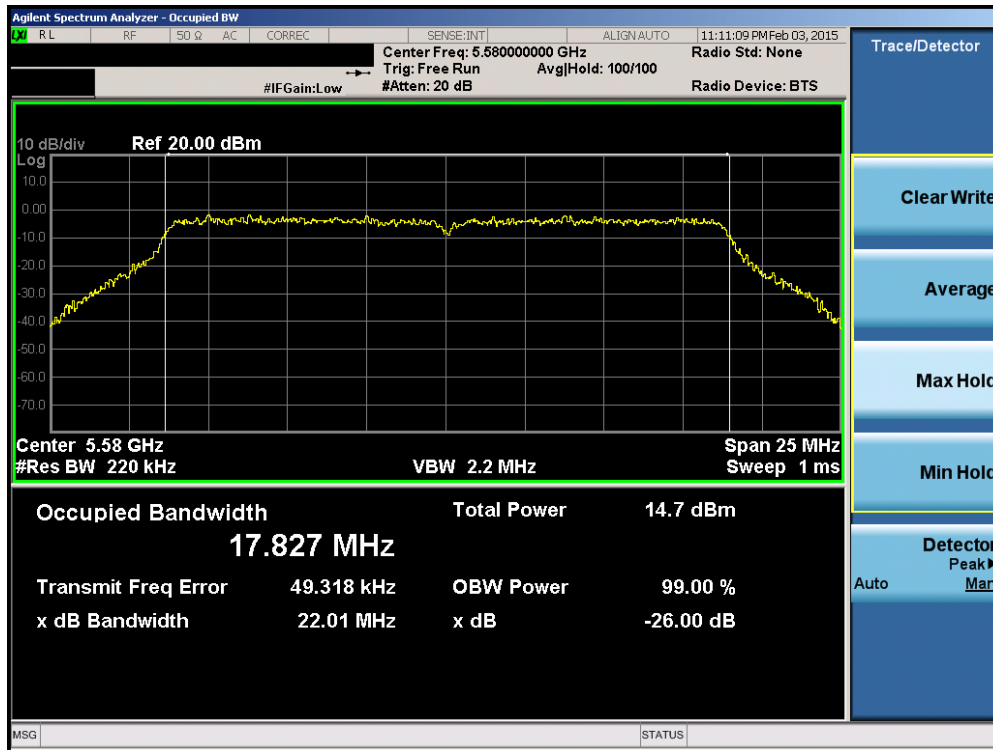


Plot 6-21. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 116)

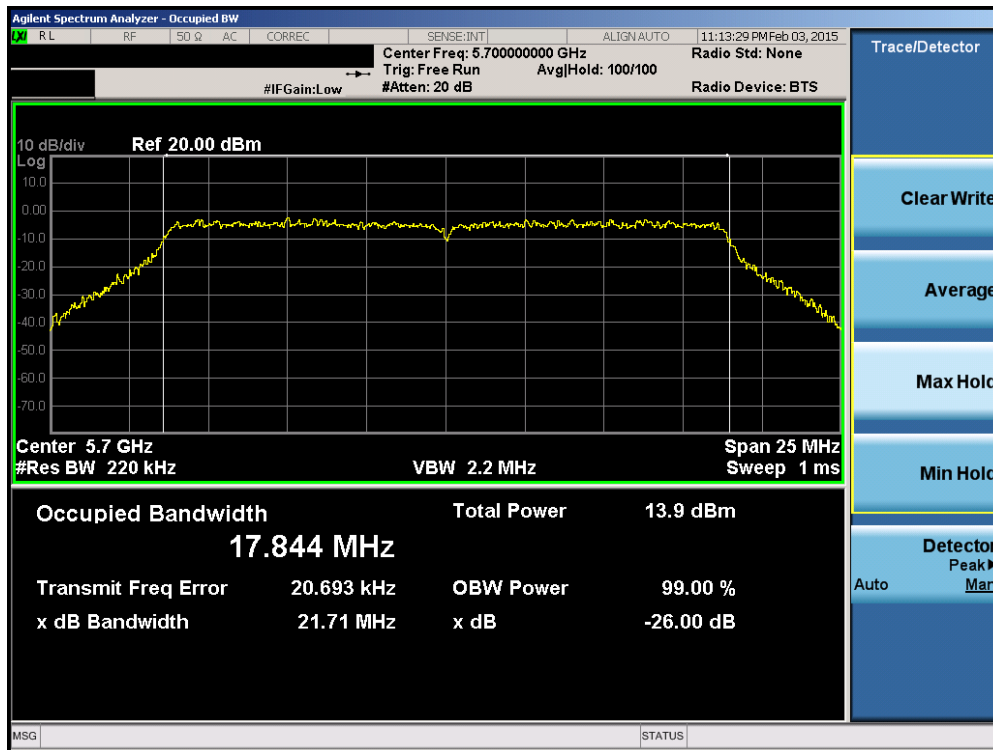


Plot 6-22. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 140)

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 23 of 100                  |

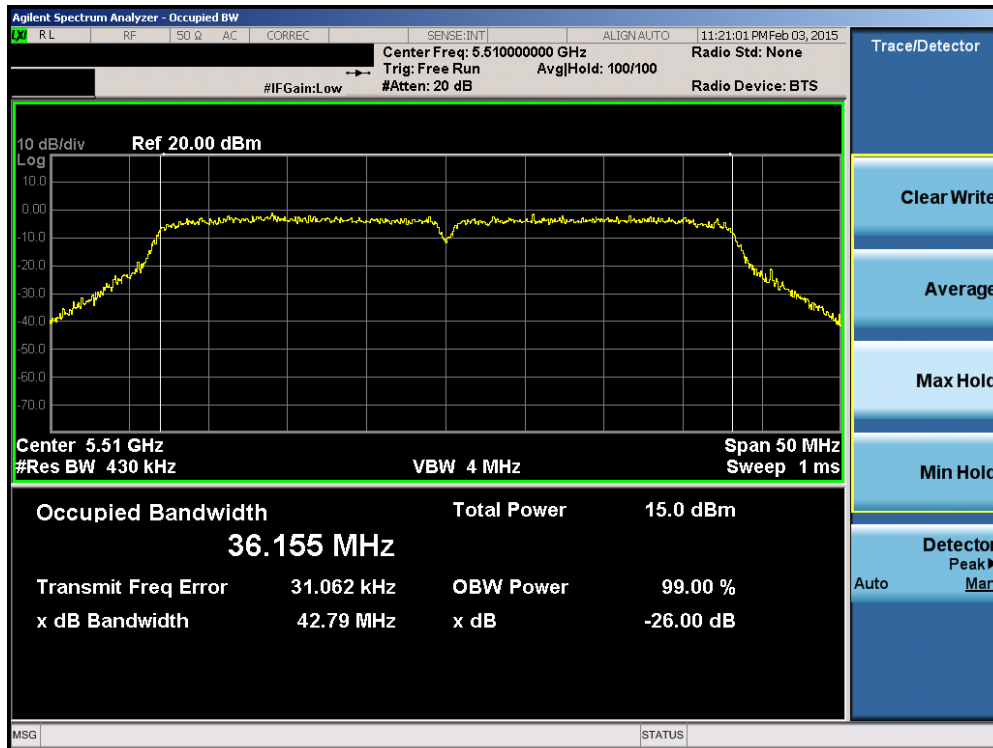

Plot 6-23. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

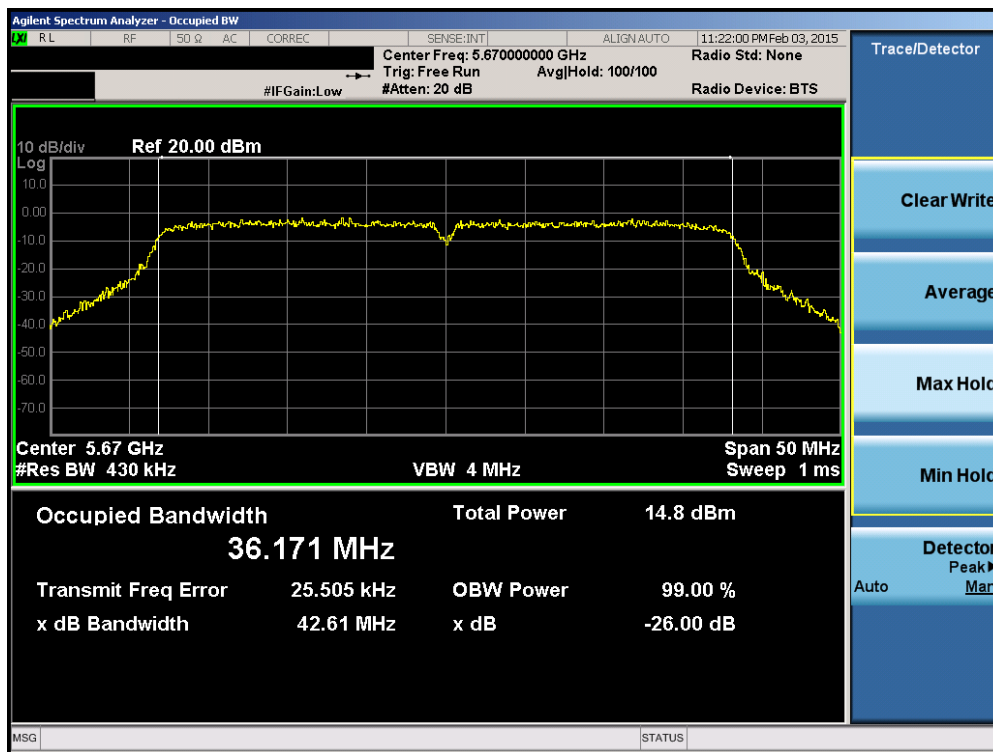

Plot 6-24. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 134)

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 24 of 100                  |

## 6.3 6dB Bandwidth Measurement – 802.11a/n 15.407(e)

### Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle (>98%), at its maximum power control level, as defined in KDB 789033 D02 v01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 6dB bandwidth.

***In the 5.725 – 5.850GHz band, the 6dB bandwidth must be  $\geq 500$  kHz.***

### Test Procedure Used


KDB 789033 D02 v01 – Section C

### Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 6. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 6-2. Test Instrument & Measurement Setup**

### Test Notes


None.

|                                      |                                                                                     |                                                                     |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFVK815                     |  | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015                                                 | EUT Type:<br>Portable Tablet                                        |                                                                                       | Page 25 of 100                  |

## 6 dB Bandwidth Measurements


|               | Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured 6dB Bandwidth [MHz] |
|---------------|-----------------|-------------|-------------|------------------|------------------------------|
| <b>Band 3</b> | 5745            | 149         | a           | 6                | 16.37                        |
|               | 5785            | 157         | a           | 6                | 16.40                        |
|               | 5825            | 165         | a           | 6                | 16.40                        |
|               | 5745            | 149         | n (20MHz)   | 6.5/7.2 (MCS0)   | 17.62                        |
|               | 5785            | 157         | n (20MHz)   | 6.5/7.2 (MCS0)   | 17.60                        |
|               | 5825            | 165         | n (20MHz)   | 6.5/7.2 (MCS0)   | 17.61                        |
|               | 5755            | 151         | n (40MHz)   | 13.5/15 (MCS0)   | 35.17                        |
|               | 5795            | 159         | n (40MHz)   | 13.5/15 (MCS0)   | 35.12                        |

**Table 6-3. Conducted Bandwidth Measurements**

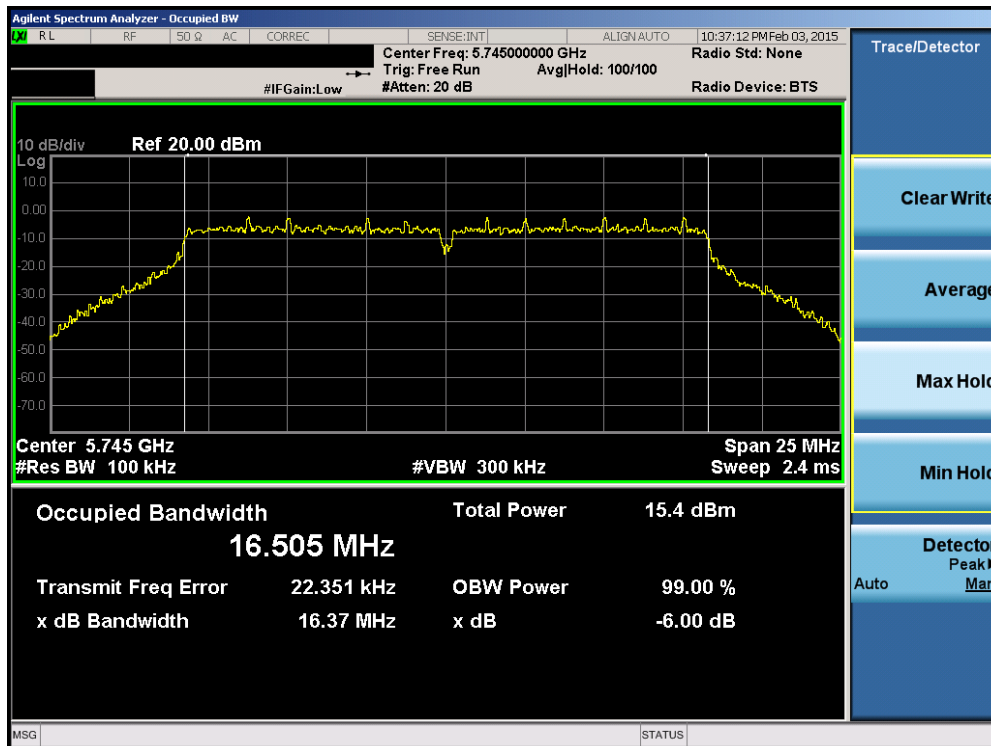


**Plot 6-25. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 149)**

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 26 of 100                  |

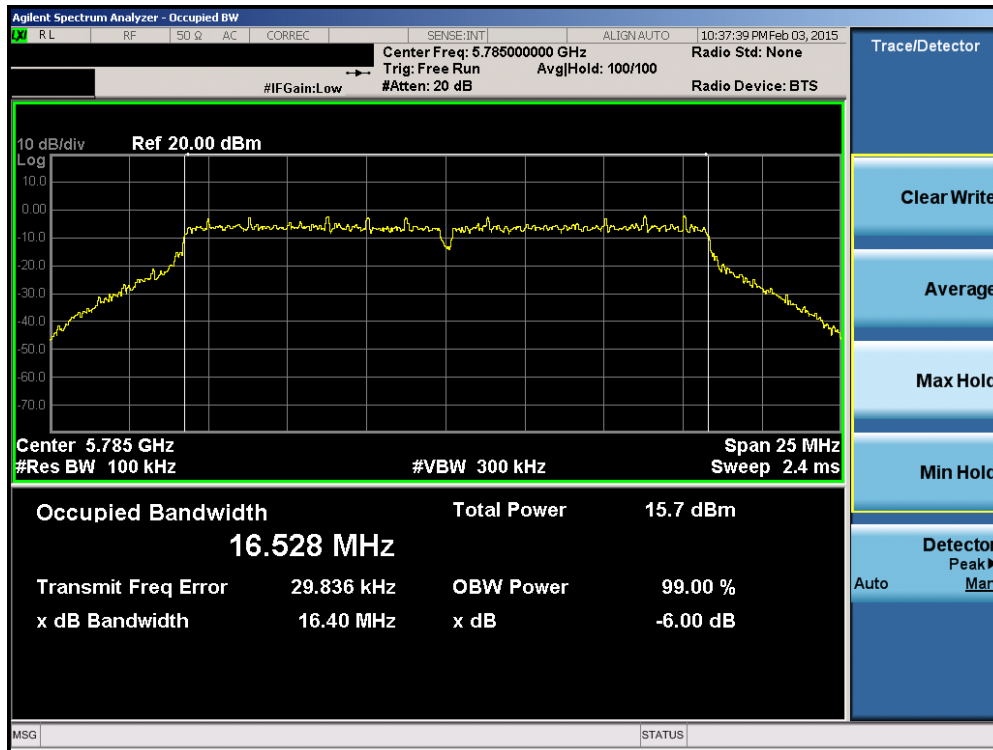


Plot 6-26. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 157)

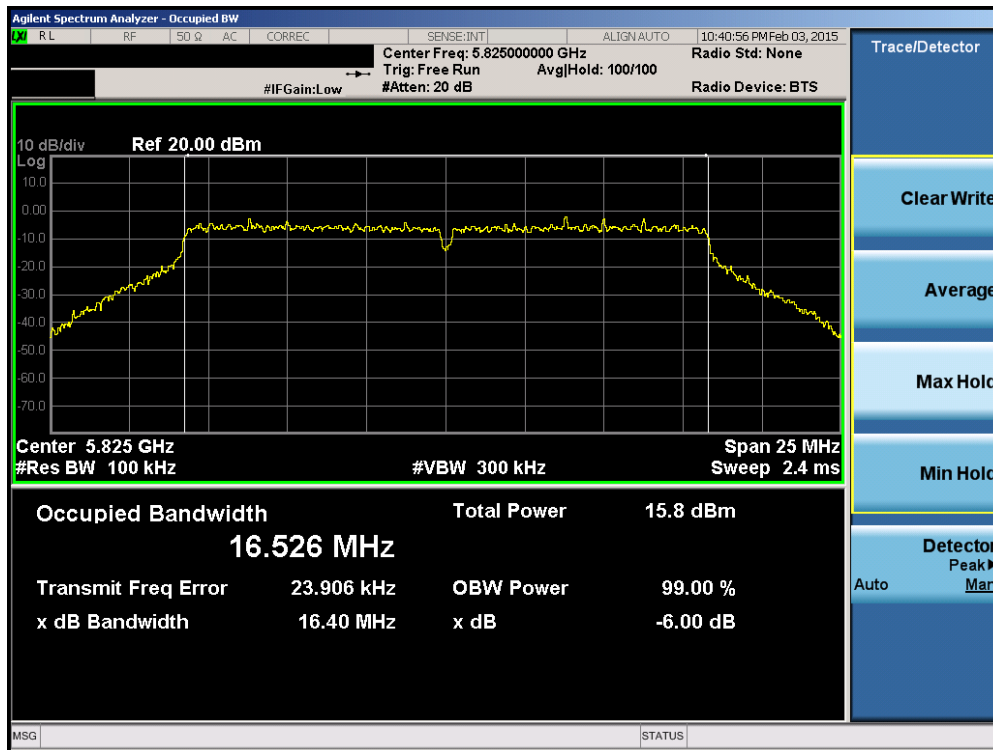


Plot 6-27. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 165)

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 27 of 100                  |

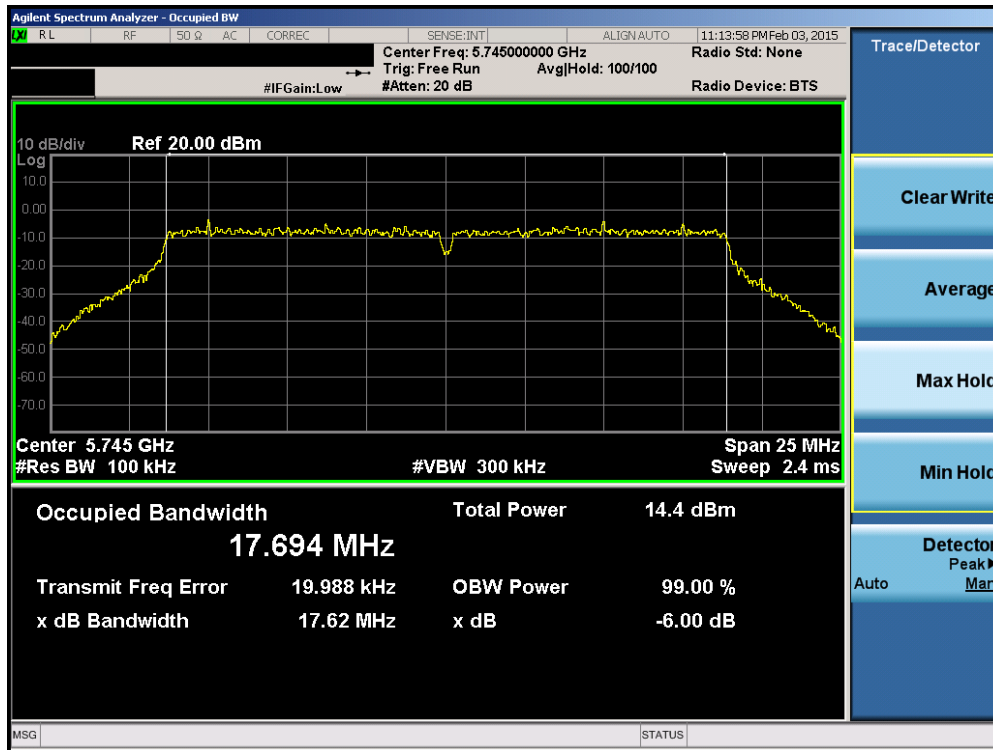


Plot 6-28. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

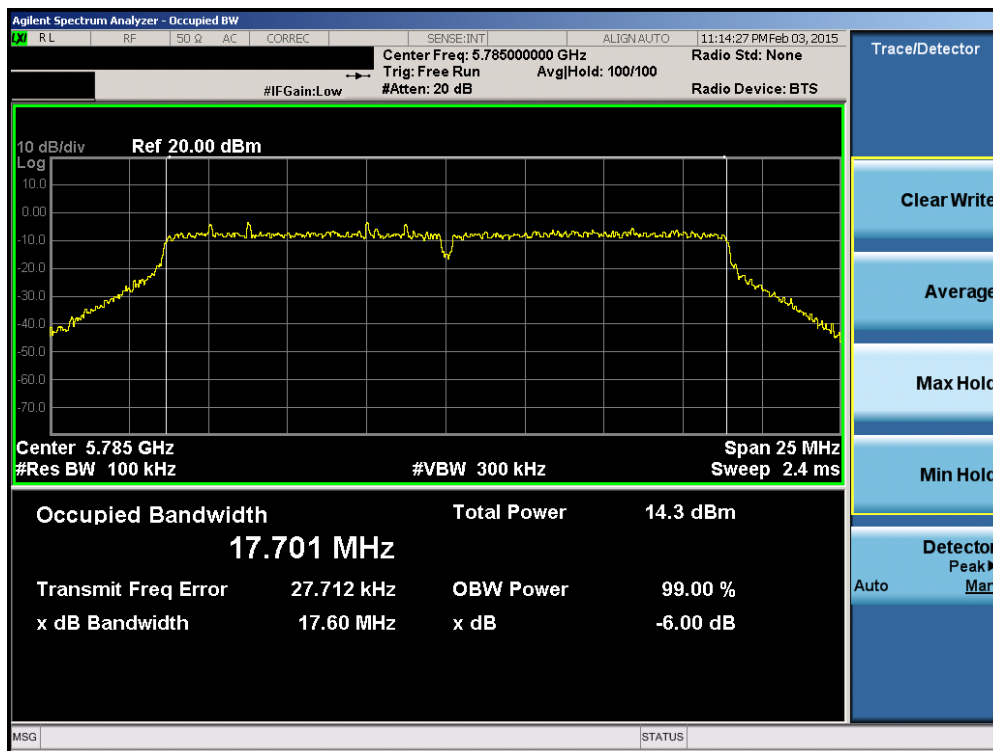


Plot 6-29. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 28 of 100                  |

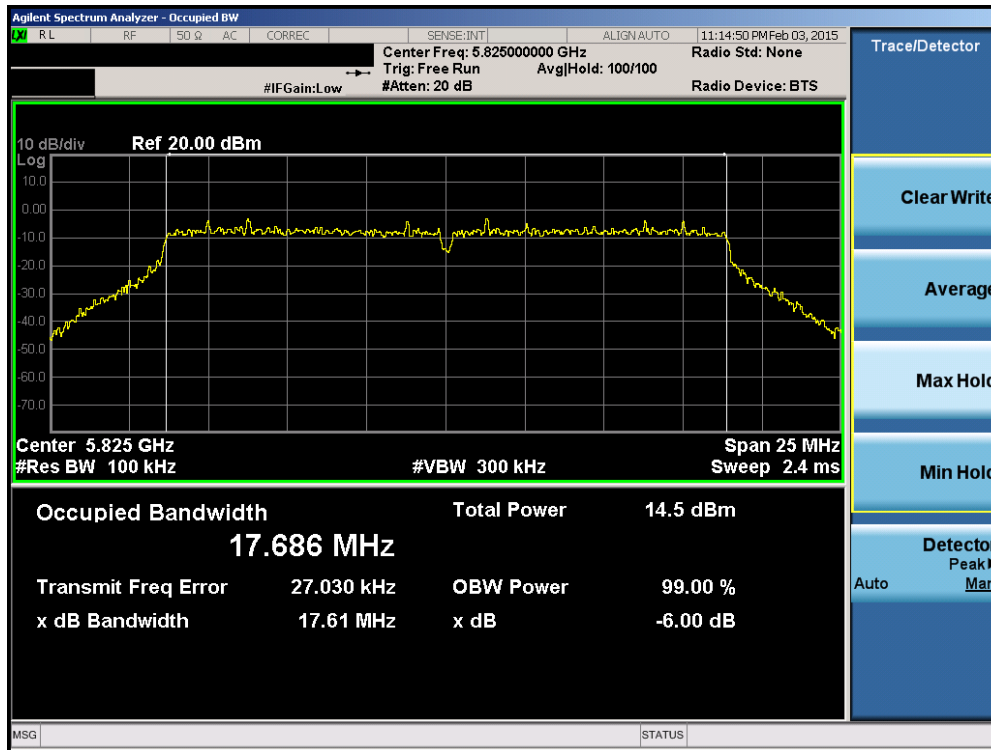


Plot 6-30. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

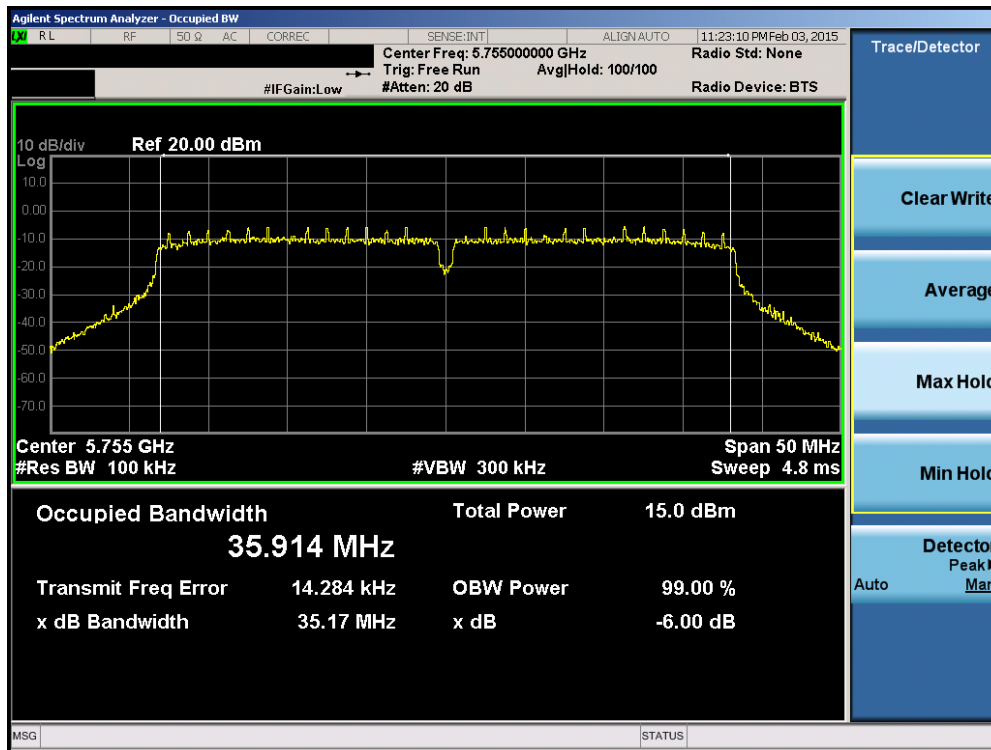

Plot 6-31. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 29 of 100                  |

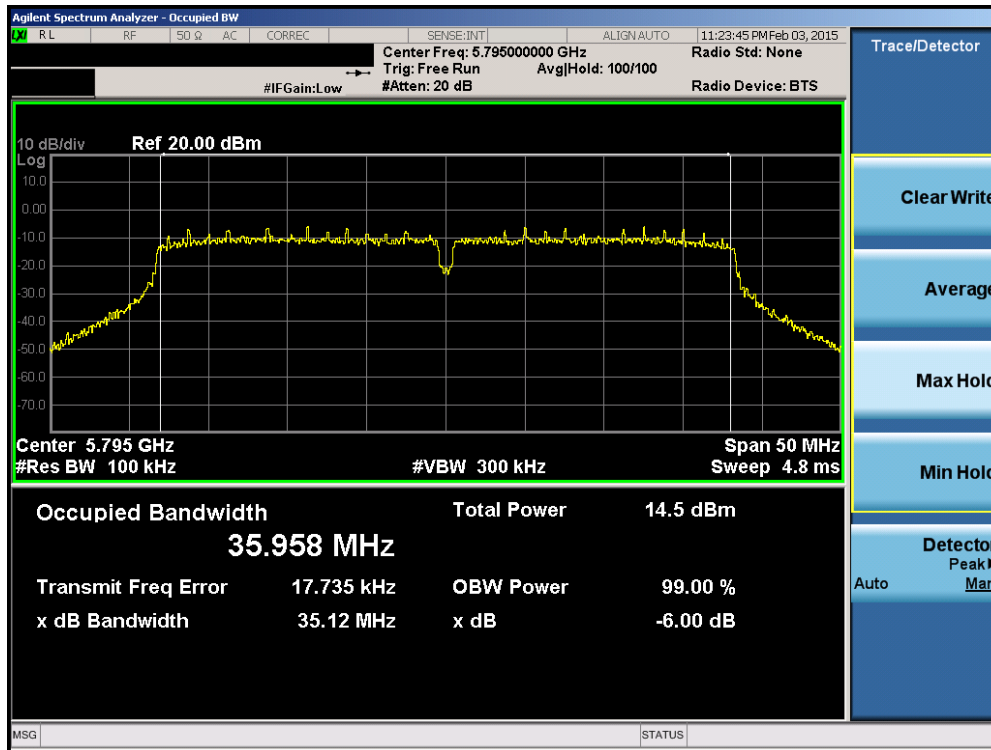

Plot 6-32. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 30 of 100                  |

## 6.4 UNII Output Power Measurement – 802.11a/n §15.407 (a)

### Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle (>98%), at its maximum power control level, as defined in KDB 789033 D02 v01, and at the appropriate frequencies.

***In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is 250mW.***

***In the 5.25 – 5.35GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and  $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(21.44) = 24.31\text{dBm}$ .***

***In the 5.47 – 5.725GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and  $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(21.47) = 24.32\text{dBm}$ .***

***In the 5.725 – 5.825GHz band, the maximum permissible conducted output power is 1W (30dBm).***

### Test Procedure Used


KDB 789033 D02 v01 – Section E)3)b) Method PM-G

### Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 6-3. Test Instrument & Measurement Setup**

### Test Notes

None

|                                      |                                                                                     |                                                                     |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFVK815                     |  | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015                                                 | EUT Type:<br>Portable Tablet                                        |                                                                                       | Page 31 of 100                  |

| 802.11a | Mode    | Freq [MHz] | Channel | Detector | 802.11a Conducted Power [dBm] |       |       |       |       |       |       |       |
|---------|---------|------------|---------|----------|-------------------------------|-------|-------|-------|-------|-------|-------|-------|
|         |         |            |         |          | Data Rate [Mbps]              |       |       |       |       |       |       |       |
|         |         |            |         |          | 6                             | 9     | 12    | 18    | 24    | 36    | 48    | 54    |
|         | 802.11a | 5180       | 36*     | AVG      | 8.76                          | 8.98  | 8.86  | 9.05  | 8.20  | 8.62  | 8.97  | 8.73  |
|         | 802.11a | 5200       | 40      | AVG      | 8.69                          | 8.97  | 9.19  | 9.46  | 8.86  | 9.39  | 8.99  | 8.91  |
|         | 802.11a | 5220       | 44      | AVG      | 8.88                          | 8.78  | 8.72  | 9.12  | 8.80  | 8.94  | 8.89  | 8.98  |
|         | 802.11a | 5240       | 48*     | AVG      | 9.34                          | 9.15  | 9.27  | 9.19  | 9.24  | 9.36  | 8.92  | 9.02  |
|         | 802.11a | 5260       | 52*     | AVG      | 8.33                          | 8.80  | 8.17  | 8.60  | 8.05  | 8.15  | 8.30  | 8.01  |
|         | 802.11a | 5280       | 56      | AVG      | 8.81                          | 8.83  | 8.79  | 8.95  | 8.72  | 8.99  | 8.91  | 8.71  |
|         | 802.11a | 5300       | 60      | AVG      | 8.84                          | 9.08  | 8.69  | 8.65  | 8.93  | 8.76  | 9.01  | 8.91  |
|         | 802.11a | 5320       | 64*     | AVG      | 8.45                          | 8.77  | 8.72  | 8.78  | 8.84  | 8.78  | 8.66  | 8.76  |
|         | 802.11a | 5500       | 100     | AVG      | 9.00                          | 8.70  | 8.46  | 8.82  | 8.62  | 8.90  | 8.54  | 9.12  |
|         | 802.11a | 5520       | 104*    | AVG      | 8.88                          | 8.93  | 9.15  | 8.92  | 8.73  | 8.69  | 8.60  | 8.88  |
|         | 802.11a | 5540       | 108     | AVG      | 8.79                          | 9.06  | 9.08  | 8.85  | 9.00  | 8.84  | 8.47  | 8.24  |
|         | 802.11a | 5560       | 112     | AVG      | 8.87                          | 8.73  | 9.05  | 8.87  | 8.37  | 8.33  | 9.00  | 8.38  |
|         | 802.11a | 5580       | 116*    | AVG      | 9.30                          | 8.97  | 9.04  | 8.21  | 8.82  | 8.95  | 9.08  | 9.03  |
|         | 802.11a | 5660       | 132     | AVG      | 9.10                          | 8.83  | 8.92  | 8.83  | 9.08  | 8.58  | 8.37  | 8.48  |
|         | 802.11a | 5680       | 136*    | AVG      | 8.89                          | 8.50  | 8.98  | 8.45  | 8.74  | 8.97  | 8.84  | 8.44  |
|         | 802.11a | 5700       | 140     | AVG      | 9.01                          | 8.90  | 8.77  | 8.78  | 8.86  | 8.98  | 8.89  | 8.63  |
|         | 802.11a | 5745       | 149*    | AVG      | 9.09                          | 9.33  | 9.21  | 8.73  | 8.92  | 8.99  | 8.68  | 9.27  |
|         |         |            |         | PEAK     | 16.82                         | 17.32 | 16.89 | 16.82 | 16.86 | 17.01 | 16.68 | 17.25 |
|         | 802.11a | 5765       | 153     | AVG      | 9.20                          | 9.44  | 9.25  | 8.90  | 8.57  | 9.28  | 9.21  | 9.16  |
|         |         |            |         | PEAK     | 17.12                         | 17.24 | 17.38 | 16.86 | 16.67 | 17.41 | 17.34 | 17.20 |
|         | 802.11a | 5785       | 157*    | AVG      | 8.93                          | 8.91  | 9.18  | 9.28  | 9.02  | 9.32  | 9.08  | 8.88  |
|         |         |            |         | PEAK     | 16.84                         | 16.67 | 16.79 | 17.20 | 16.97 | 17.50 | 16.99 | 16.75 |
|         | 802.11a | 5805       | 161     | AVG      | 8.53                          | 8.74  | 8.44  | 8.22  | 8.70  | 8.75  | 8.97  | 8.85  |
|         |         |            |         | PEAK     | 16.16                         | 16.49 | 16.45 | 16.10 | 16.62 | 15.68 | 16.95 | 15.60 |
|         | 802.11a | 5825       | 165*    | AVG      | 8.99                          | 8.84  | 8.92  | 8.85  | 8.62  | 8.72  | 9.17  | 8.63  |
|         |         |            |         | PEAK     | 16.83                         | 16.68 | 16.67 | 16.79 | 16.51 | 16.70 | 16.74 | 16.80 |

Table 6-4. 802.11a Maximum Conducted Output Power

|                                      |                                                                                     |                                                                     |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFVK815                     |  | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015                                                 | EUT Type:<br>Portable Tablet                                        |                                                                                       | Page 32 of 100                  |

|                      | Mode    | Freq [MHz] | Channel | Detector | 20MHz BW 802.11n (5GHz) Conducted Power [dBm] |       |       |       |       |       |       |       |
|----------------------|---------|------------|---------|----------|-----------------------------------------------|-------|-------|-------|-------|-------|-------|-------|
|                      |         |            |         |          | Data Rate [Mbps]                              |       |       |       |       |       |       |       |
|                      |         |            |         |          | 6.5                                           | 13    | 19.5  | 26    | 39    | 52    | 58.5  | 65    |
| 20MHz 802.11n (5GHz) | 802.11n | 5180       | 36      | AVG      | 7.92                                          | 7.93  | 7.69  | 8.41  | 7.98  | 8.03  | 7.69  | 8.15  |
|                      | 802.11n | 5200       | 40      | AVG      | 7.70                                          | 8.55  | 8.45  | 8.70  | 8.71  | 8.48  | 7.81  | 8.64  |
|                      | 802.11n | 5220       | 44      | AVG      | 7.61                                          | 8.28  | 8.28  | 7.37  | 7.57  | 8.32  | 8.12  | 8.19  |
|                      | 802.11n | 5240       | 48      | AVG      | 8.81                                          | 8.36  | 8.06  | 8.30  | 8.30  | 8.37  | 7.85  | 7.65  |
|                      | 802.11n | 5260       | 52      | AVG      | 7.74                                          | 7.60  | 7.24  | 7.88  | 8.17  | 7.19  | 7.58  | 7.14  |
|                      | 802.11n | 5280       | 56      | AVG      | 7.97                                          | 7.92  | 7.92  | 7.82  | 7.65  | 8.08  | 8.03  | 7.99  |
|                      | 802.11n | 5300       | 60      | AVG      | 8.71                                          | 7.80  | 7.46  | 8.18  | 7.95  | 8.02  | 7.68  | 8.84  |
|                      | 802.11n | 5320       | 64      | AVG      | 7.63                                          | 7.37  | 7.98  | 7.36  | 7.70  | 7.72  | 7.78  | 8.02  |
|                      | 802.11n | 5500       | 100     | AVG      | 7.72                                          | 8.27  | 8.22  | 8.30  | 7.75  | 7.91  | 8.18  | 7.96  |
|                      | 802.11n | 5520       | 104     | AVG      | 8.27                                          | 8.05  | 7.67  | 8.14  | 7.58  | 7.49  | 7.86  | 7.87  |
|                      | 802.11n | 5540       | 108     | AVG      | 7.56                                          | 8.01  | 7.01  | 8.09  | 8.04  | 7.88  | 8.11  | 7.64  |
|                      | 802.11n | 5560       | 112     | AVG      | 8.21                                          | 7.52  | 7.86  | 8.40  | 8.40  | 7.53  | 7.89  | 8.00  |
|                      | 802.11n | 5580       | 116     | AVG      | 7.71                                          | 8.27  | 8.50  | 8.41  | 7.90  | 7.89  | 8.16  | 8.29  |
|                      | 802.11n | 5660       | 132     | AVG      | 8.13                                          | 8.39  | 8.00  | 7.94  | 7.93  | 7.48  | 7.48  | 7.47  |
|                      | 802.11n | 5680       | 136     | AVG      | 8.43                                          | 8.31  | 8.63  | 8.65  | 8.74  | 8.47  | 8.44  | 8.55  |
|                      | 802.11n | 5700       | 140     | AVG      | 7.75                                          | 8.24  | 8.22  | 8.00  | 7.90  | 7.81  | 8.06  | 8.17  |
|                      | 802.11n | 5745       | 149     | AVG      | 8.11                                          | 8.35  | 8.71  | 8.58  | 8.16  | 8.47  | 8.37  | 8.19  |
|                      |         |            |         | PEAK     | 16.13                                         | 16.47 | 16.37 | 16.72 | 15.63 | 16.55 | 16.29 | 15.75 |
|                      | 802.11n | 5765       | 153     | AVG      | 8.72                                          | 8.50  | 8.54  | 8.05  | 8.23  | 8.26  | 8.94  | 8.48  |
|                      |         |            |         | PEAK     | 16.72                                         | 16.18 | 16.29 | 15.86 | 16.45 | 16.32 | 17.20 | 16.34 |
|                      | 802.11n | 5785       | 157     | AVG      | 8.46                                          | 8.30  | 8.03  | 8.38  | 8.16  | 7.80  | 8.29  | 8.28  |
|                      |         |            |         | PEAK     | 16.20                                         | 16.25 | 16.06 | 16.14 | 16.30 | 15.57 | 16.05 | 15.93 |
|                      | 802.11n | 5805       | 161     | AVG      | 7.92                                          | 7.90  | 7.73  | 7.60  | 7.88  | 7.88  | 8.10  | 7.69  |
|                      |         |            |         | PEAK     | 15.76                                         | 15.68 | 15.57 | 15.55 | 15.54 | 15.50 | 15.54 | 15.54 |
|                      | 802.11n | 5825       | 165     | AVG      | 8.04                                          | 8.12  | 8.19  | 7.88  | 8.35  | 8.32  | 7.96  | 8.04  |
|                      |         |            |         | PEAK     | 16.00                                         | 15.99 | 16.10 | 15.66 | 16.34 | 16.14 | 15.88 | 16.00 |

Table 6-5. 802.11n 20MHz BW Maximum Conducted Output Power

|                      | Mode    | Freq [MHz] | Channel | Detector | 40MHz BW 802.11n (5GHz) Conducted Power [dBm] |       |       |       |       |       |       |       |
|----------------------|---------|------------|---------|----------|-----------------------------------------------|-------|-------|-------|-------|-------|-------|-------|
|                      |         |            |         |          | Data Rate [Mbps]                              |       |       |       |       |       |       |       |
|                      |         |            |         |          | 13.5                                          | 27    | 40.5  | 54    | 81    | 108   | 121.5 | 135   |
| 40MHz 802.11n (5GHz) | 802.11n | 5190       | 38      | AVG      | 7.53                                          | 7.79  | 7.81  | 8.49  | 8.35  | 8.26  | 7.43  | 7.59  |
|                      | 802.11n | 5230       | 46      | AVG      | 7.88                                          | 8.43  | 7.40  | 7.23  | 8.08  | 7.63  | 7.43  | 7.71  |
|                      | 802.11n | 5270       | 54      | AVG      | 8.03                                          | 7.69  | 8.15  | 8.14  | 8.38  | 7.98  | 7.99  | 8.40  |
|                      | 802.11n | 5310       | 62      | AVG      | 8.13                                          | 8.32  | 8.38  | 8.60  | 7.79  | 8.57  | 8.30  | 8.06  |
|                      | 802.11n | 5510       | 102     | AVG      | 8.48                                          | 8.56  | 8.75  | 8.12  | 8.81  | 8.83  | 8.53  | 8.05  |
|                      | 802.11n | 5550       | 110     | AVG      | 7.91                                          | 7.87  | 7.88  | 7.64  | 7.15  | 7.25  | 7.67  | 7.39  |
|                      | 802.11n | 5670       | 134     | AVG      | 8.61                                          | 8.57  | 8.33  | 8.01  | 8.68  | 8.55  | 8.63  | 8.48  |
|                      | 802.11n | 5755       | 151     | AVG      | 7.84                                          | 7.34  | 7.41  | 7.81  | 7.46  | 7.85  | 7.58  | 7.69  |
|                      |         |            |         | PEAK     | 15.46                                         | 14.87 | 14.76 | 15.30 | 15.30 | 15.38 | 15.32 | 14.77 |
|                      | 802.11n | 5795       | 159     | AVG      | 8.02                                          | 7.71  | 8.13  | 8.03  | 7.45  | 7.78  | 7.77  | 7.89  |
|                      |         |            |         | PEAK     | 15.24                                         | 15.28 | 15.56 | 15.30 | 14.97 | 15.22 | 15.54 | 15.57 |

Table 6-6. 802.11n 40MHz BW Maximum Conducted Output Power

## 6.5 Maximum Power Spectral Density – 802.11a/n §15.407(a)

### Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle (>98%), at its maximum power control level, as defined in KDB 789033 D02 v01, and at the appropriate frequencies. Method SA-1, as defined in KDB 789033 D02 v01, was used to measure the power spectral density.

***In the 5.15 – 5.25GHz, 5.25 – 5.35GHz, 5.47 – 5.725GHz bands, the maximum permissible power spectral density is 11dBm/MHz.***

***In the 5.725 – 5.850GHz band, the maximum permissible power spectral density is 30dBm/500kHz.***

### Test Procedure Used


KDB 789033 D02 v01 – Section F

### Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points  $\geq 2 \times (\text{span}/\text{RBW})$
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run since the EUT was operating at a duty cycle  $\geq 98\%$
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 6-4. Test Instrument & Measurement Setup**


### Test Notes

None


|                                      |                                                                                     |                                                                     |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFVK815                     |  | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015                                                 | EUT Type:<br>Portable Tablet                                        |                                                                                       | Page 34 of 100                  |

|         | Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured Power Density [dBm] | Max Permissible Power Density [dBm/MHz] | Margin [dB] | Pass / Fail |
|---------|-----------------|-------------|-------------|------------------|------------------------------|-----------------------------------------|-------------|-------------|
| Band 1  | 5180            | 36          | a           | 6                | -2.25                        | 11.0                                    | -13.25      | Pass        |
|         | 5200            | 40          | a           | 6                | -2.67                        | 11.0                                    | -13.67      | Pass        |
|         | 5240            | 48          | a           | 6                | -2.27                        | 11.0                                    | -13.27      | Pass        |
|         | 5180            | 36          | n (20MHz)   | 6.5/7.2 (MCS0)   | -3.32                        | 11.0                                    | -14.32      | Pass        |
|         | 5200            | 40          | n (20MHz)   | 6.5/7.2 (MCS0)   | -2.93                        | 11.0                                    | -13.93      | Pass        |
|         | 5240            | 48          | n (20MHz)   | 6.5/7.2 (MCS0)   | -2.80                        | 11.0                                    | -13.80      | Pass        |
|         | 5190            | 38          | n (40MHz)   | 13.5/15 (MCS0)   | -6.55                        | 11.0                                    | -17.55      | Pass        |
|         | 5230            | 46          | n (40MHz)   | 13.5/15 (MCS0)   | -8.35                        | 11.0                                    | -19.35      | Pass        |
| Band 2A | 5260            | 52          | a           | 6                | -2.46                        | 11.0                                    | -13.46      | Pass        |
|         | 5280            | 56          | a           | 6                | -3.02                        | 11.0                                    | -14.02      | Pass        |
|         | 5320            | 64          | a           | 6                | -2.49                        | 11.0                                    | -13.49      | Pass        |
|         | 5260            | 52          | n (20MHz)   | 6.5/7.2 (MCS0)   | -4.48                        | 11.0                                    | -15.48      | Pass        |
|         | 5280            | 56          | n (20MHz)   | 6.5/7.2 (MCS0)   | -3.79                        | 11.0                                    | -14.79      | Pass        |
|         | 5320            | 64          | n (20MHz)   | 6.5/7.2 (MCS0)   | -3.45                        | 11.0                                    | -14.45      | Pass        |
|         | 5270            | 54          | n (40MHz)   | 13.5/15 (MCS0)   | -7.01                        | 11.0                                    | -18.01      | Pass        |
|         | 5310            | 62          | n (40MHz)   | 13.5/15 (MCS0)   | -6.28                        | 11.0                                    | -17.28      | Pass        |
| Band 2C | 5500            | 100         | a           | 6                | -2.34                        | 11.0                                    | -13.34      | Pass        |
|         | 5580            | 116         | a           | 6                | -2.18                        | 11.0                                    | -13.18      | Pass        |
|         | 5700            | 140         | a           | 6                | -1.91                        | 11.0                                    | -12.91      | Pass        |
|         | 5500            | 100         | n (20MHz)   | 6.5/7.2 (MCS0)   | -3.25                        | 11.0                                    | -14.25      | Pass        |
|         | 5580            | 116         | n (20MHz)   | 6.5/7.2 (MCS0)   | -3.28                        | 11.0                                    | -14.28      | Pass        |
|         | 5700            | 140         | n (20MHz)   | 6.5/7.2 (MCS0)   | -3.82                        | 11.0                                    | -14.82      | Pass        |
|         | 5510            | 102         | n (40MHz)   | 13.5/15 (MCS0)   | -5.70                        | 11.0                                    | -16.70      | Pass        |
|         | 5670            | 134         | n (40MHz)   | 13.5/15 (MCS0)   | -6.01                        | 11.0                                    | -17.01      | Pass        |

Table 6-7. Bands 1, 2A, 2C Conducted Power Spectral Density Measurements

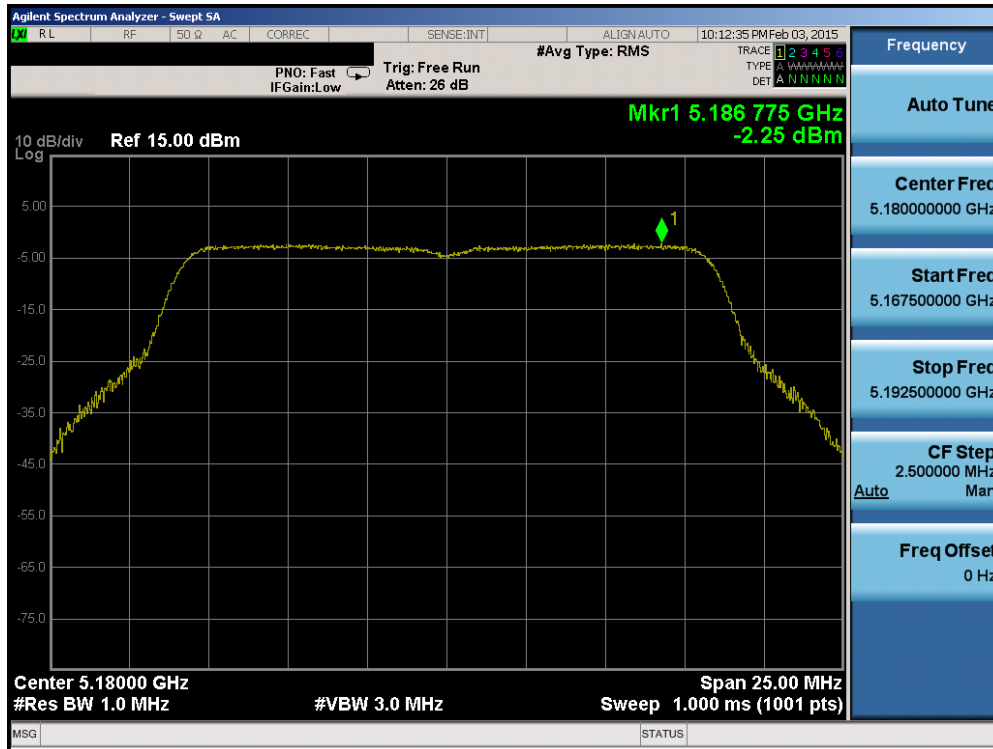


Plot 6-33. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 36)

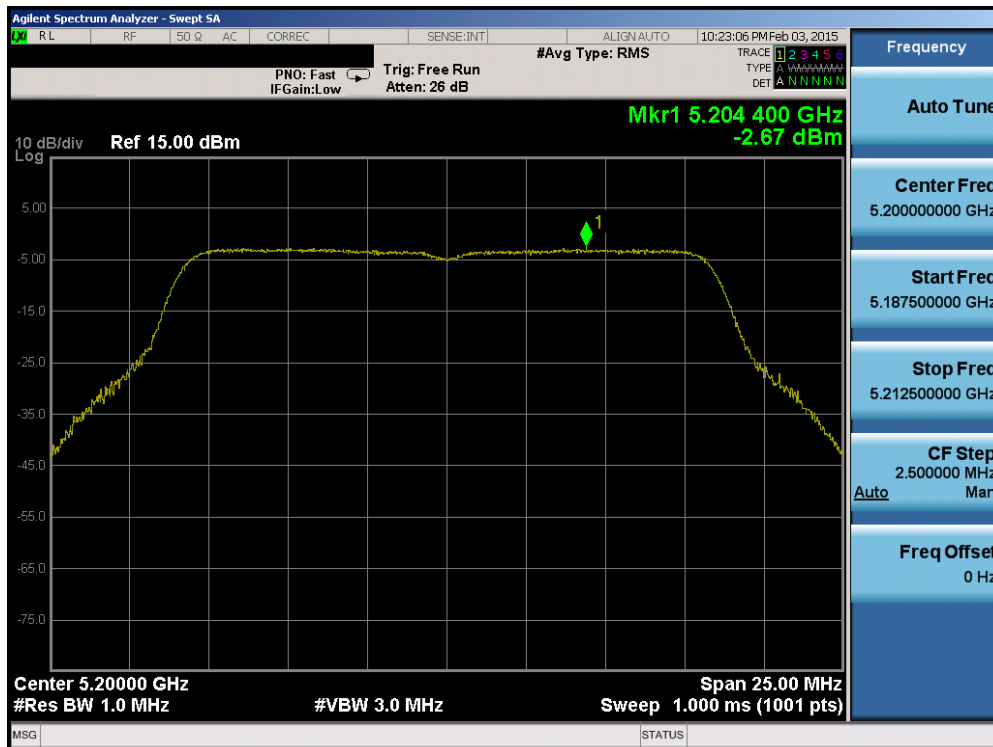


Plot 6-34. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 40)

|                                      |                                               |                                                                     |  |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|--|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |  | Page 36 of 100                  |

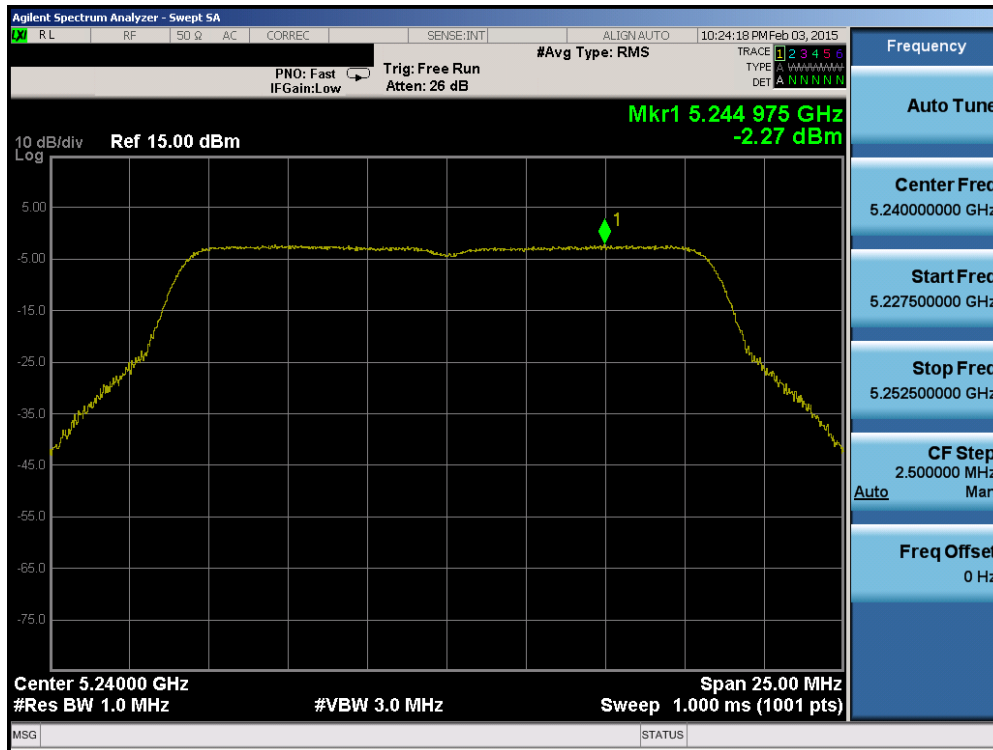


Plot 6-35. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 48)

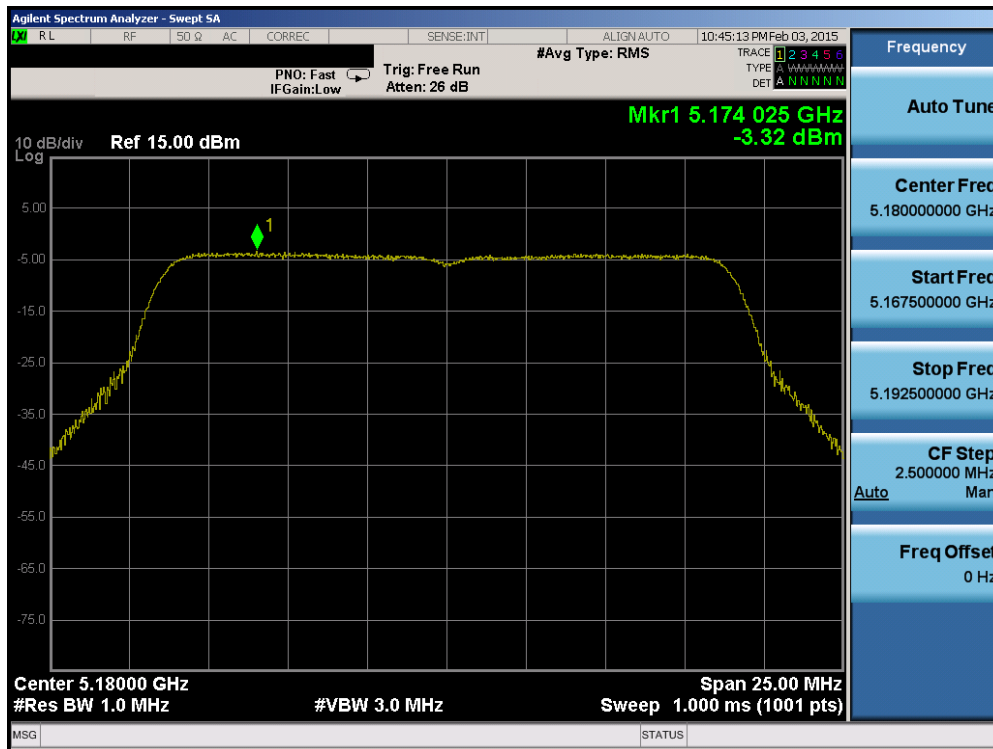


Plot 6-36. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 37 of 100                  |

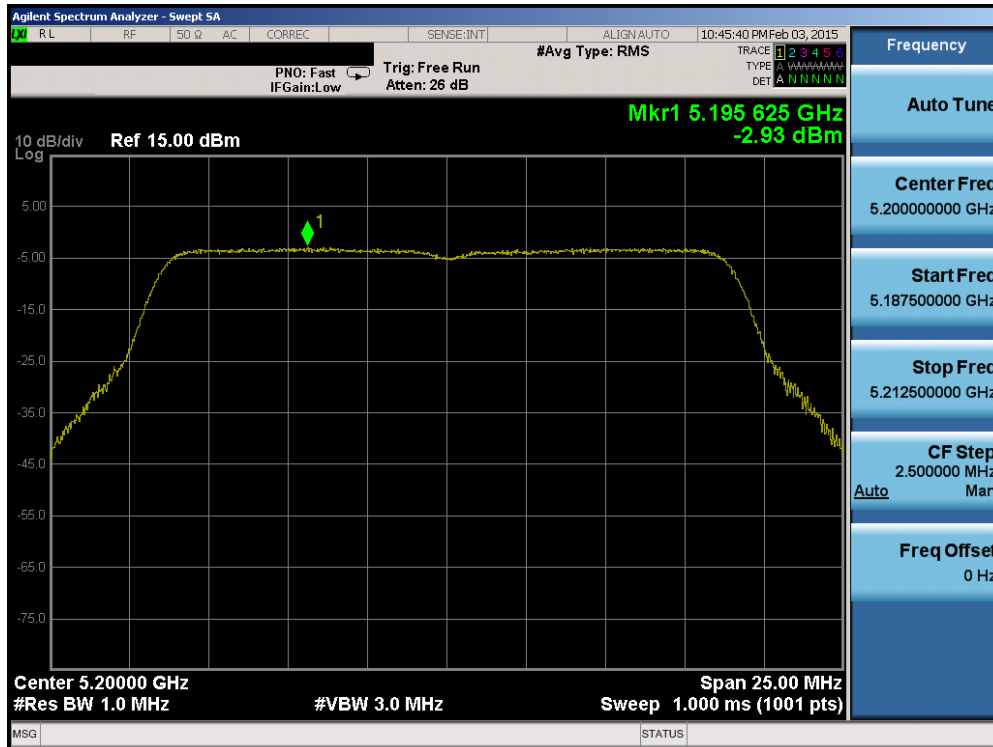


Plot 6-37. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

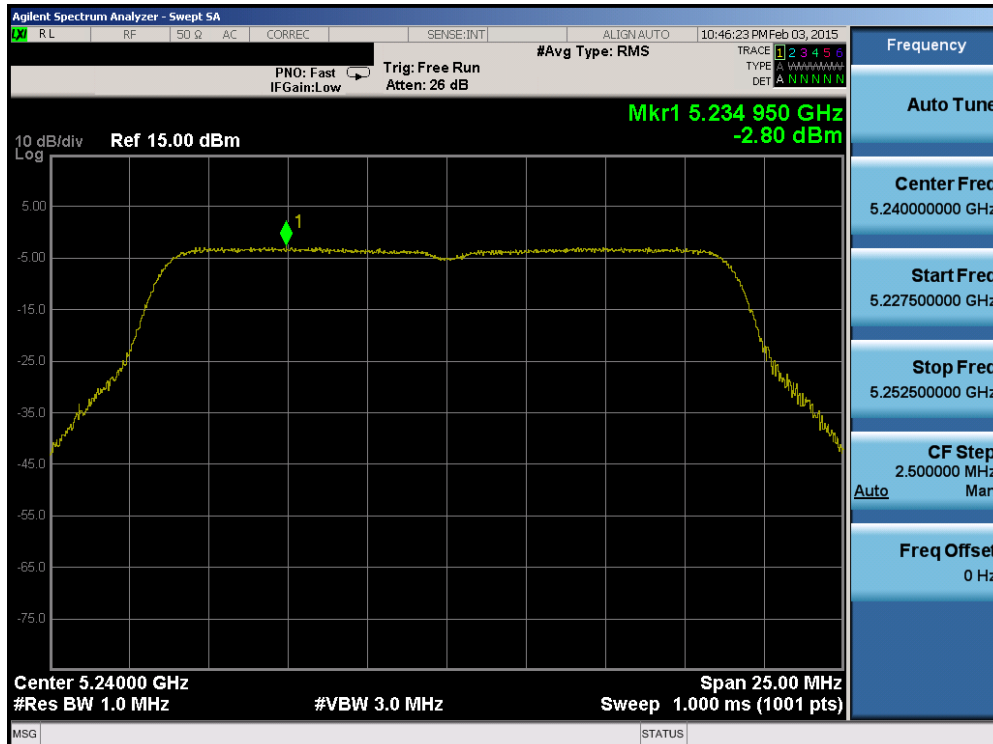


Plot 6-38. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

|                                      |                                               |                                                                     |  |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|--|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |  | Page 38 of 100                  |

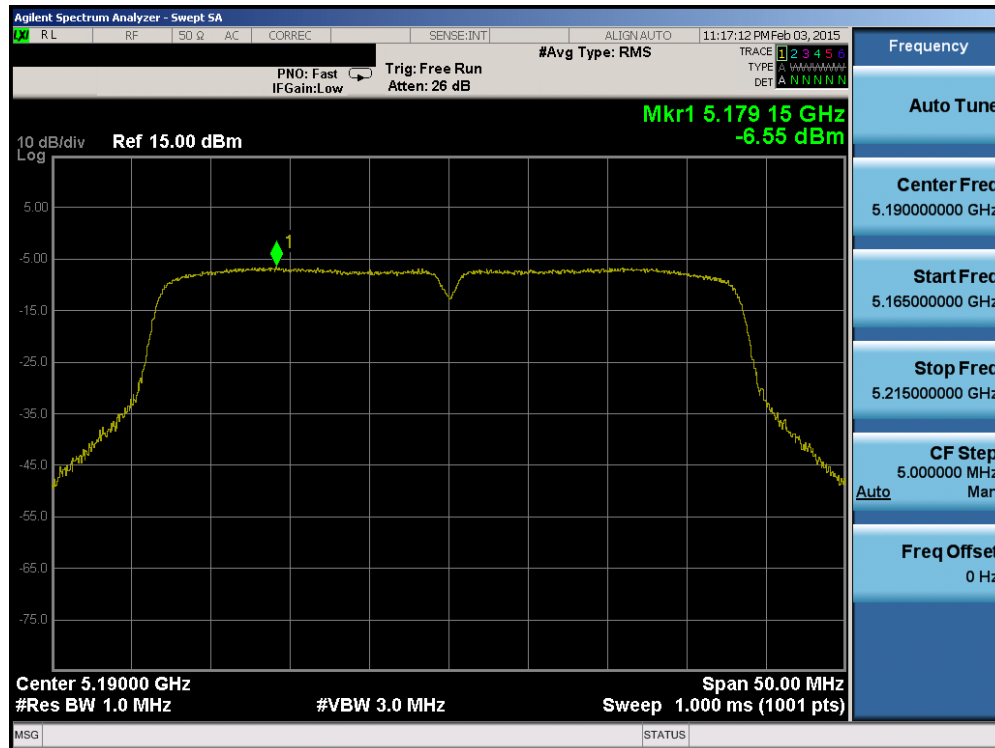


Plot 6-39. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

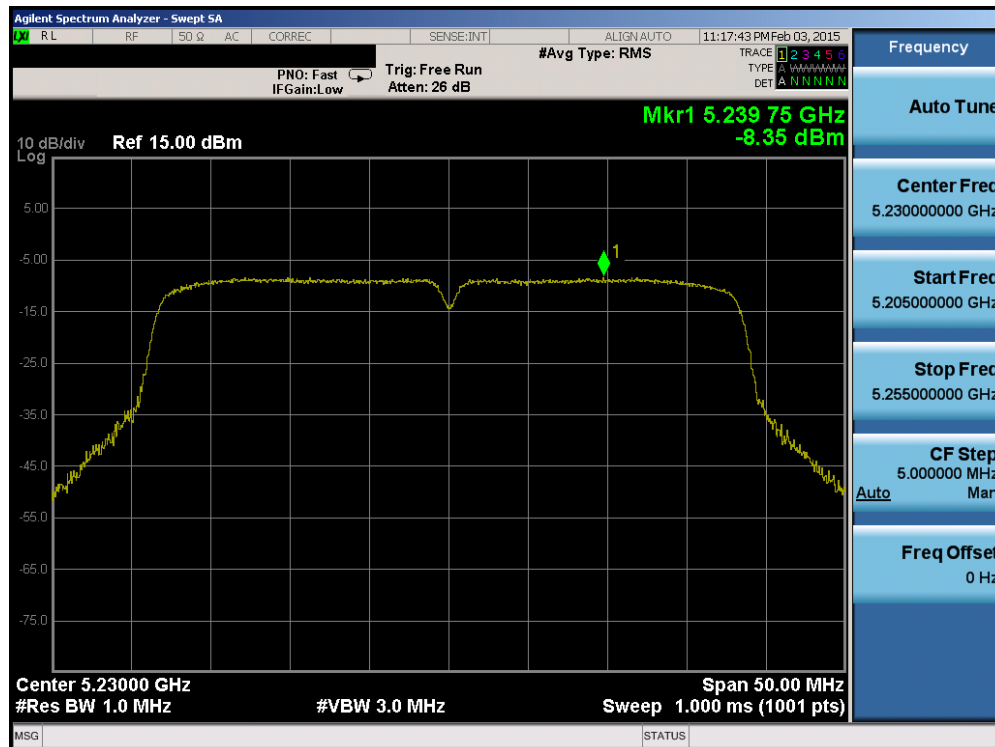


Plot 6-40. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

|                                      |                                               |                                                                     |  |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|--|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |  | Page 39 of 100                  |

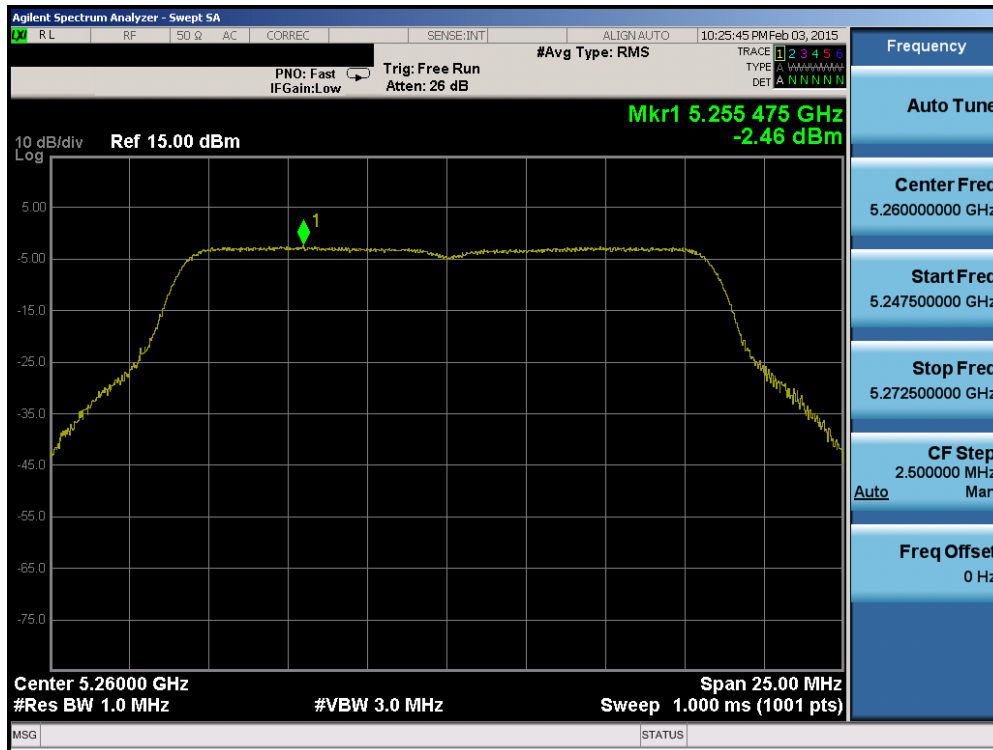


Plot 6-41. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 52)

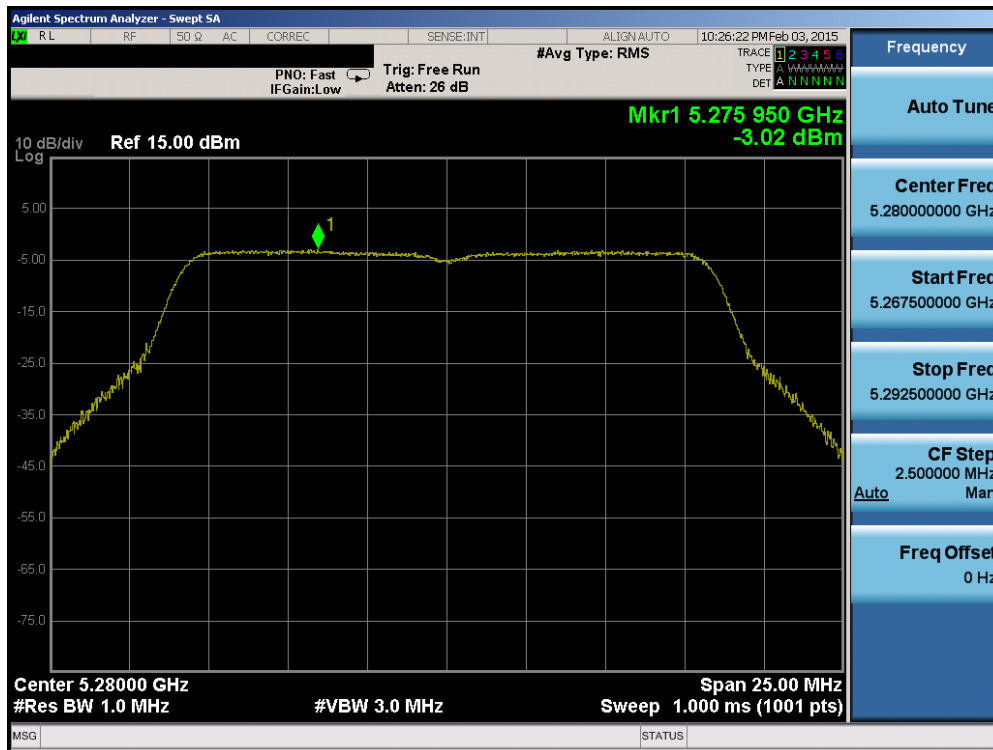


Plot 6-42. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 56)

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 40 of 100                  |

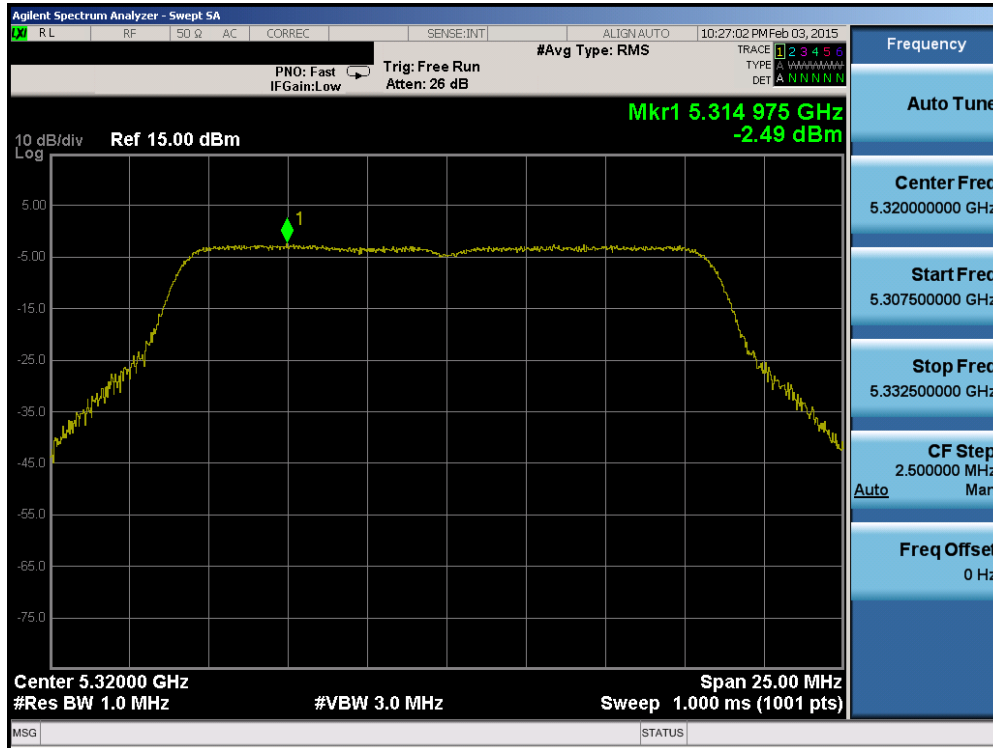


Plot 6-43. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 64)

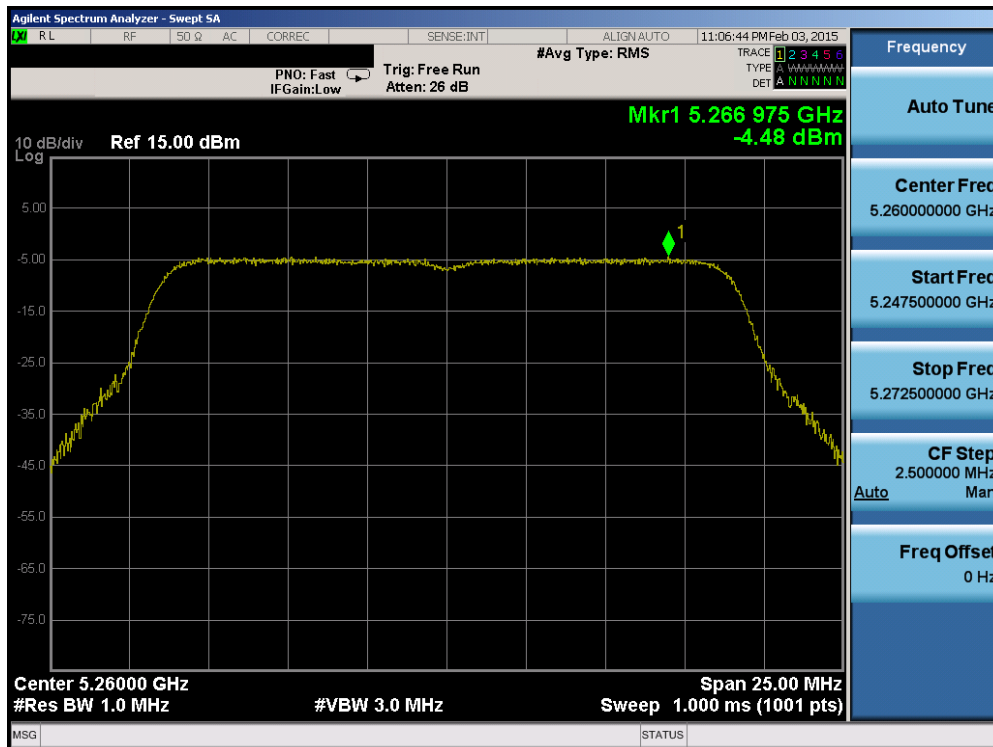


Plot 6-44. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 41 of 100                  |

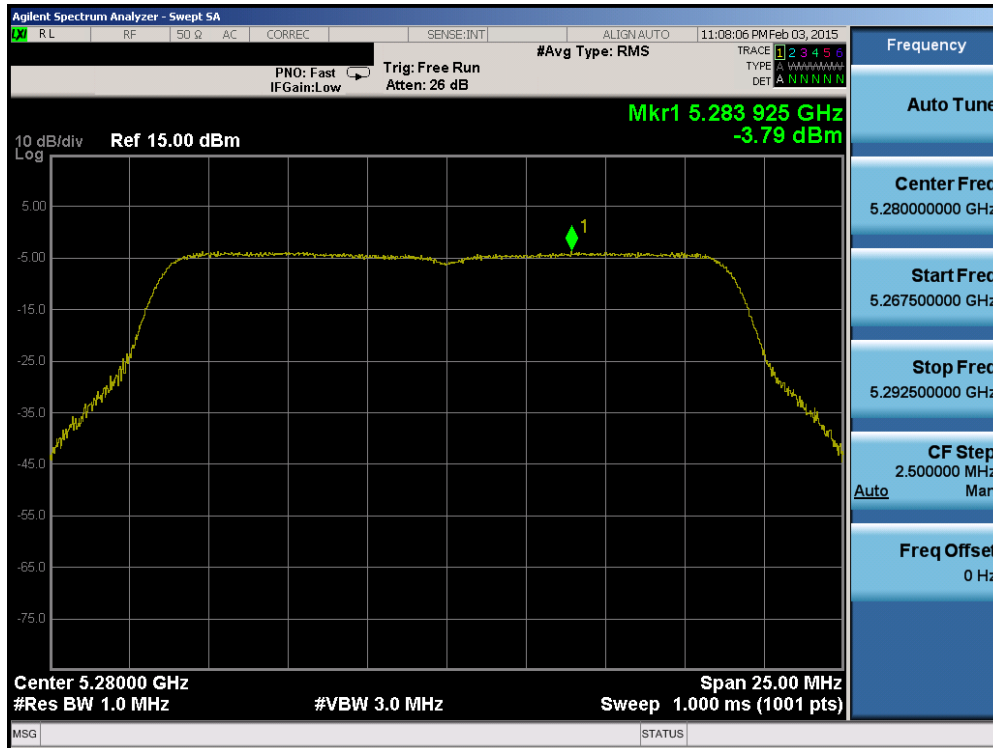


Plot 6-45. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

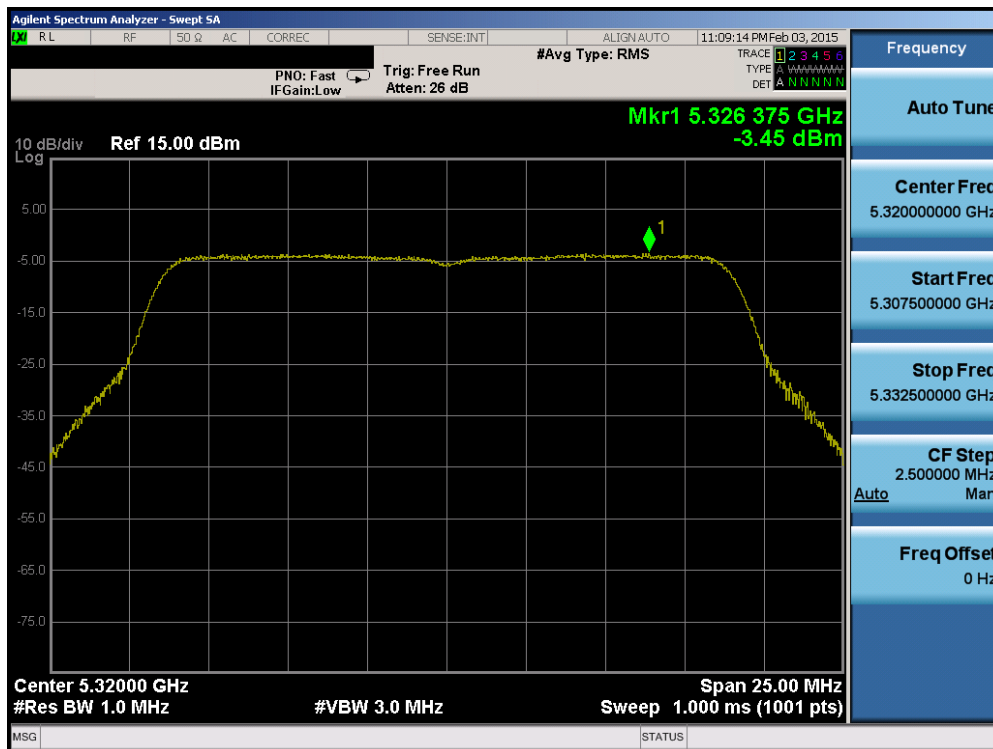


Plot 6-46. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

|                                      |                                               |                                                                     |  |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|--|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |  | Page 42 of 100                  |

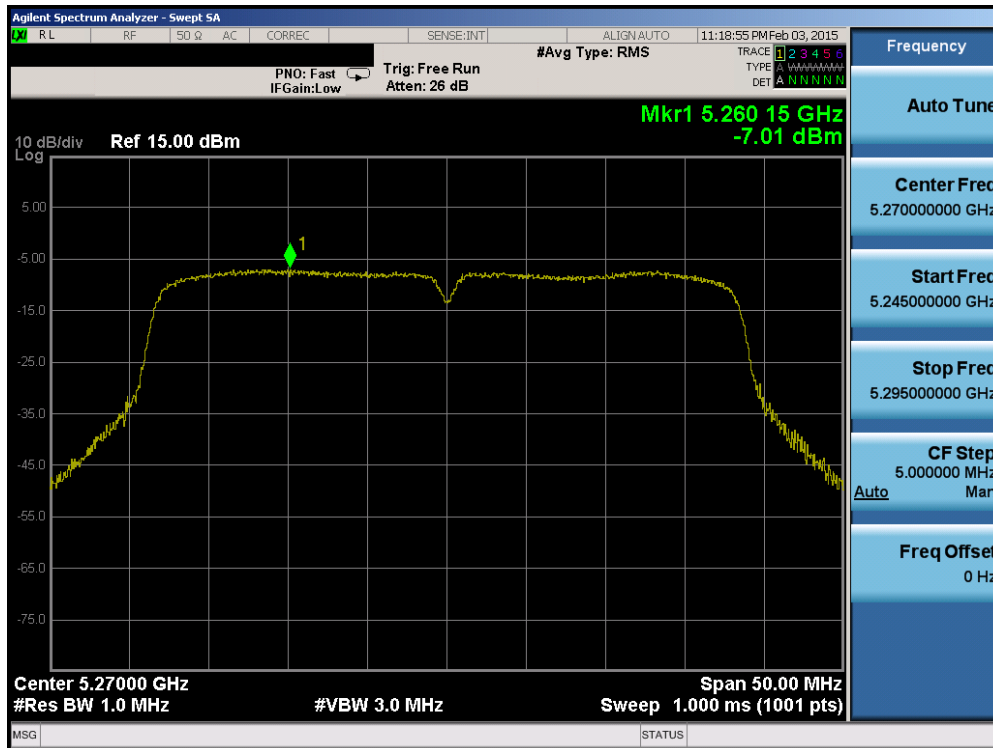


Plot 6-47. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

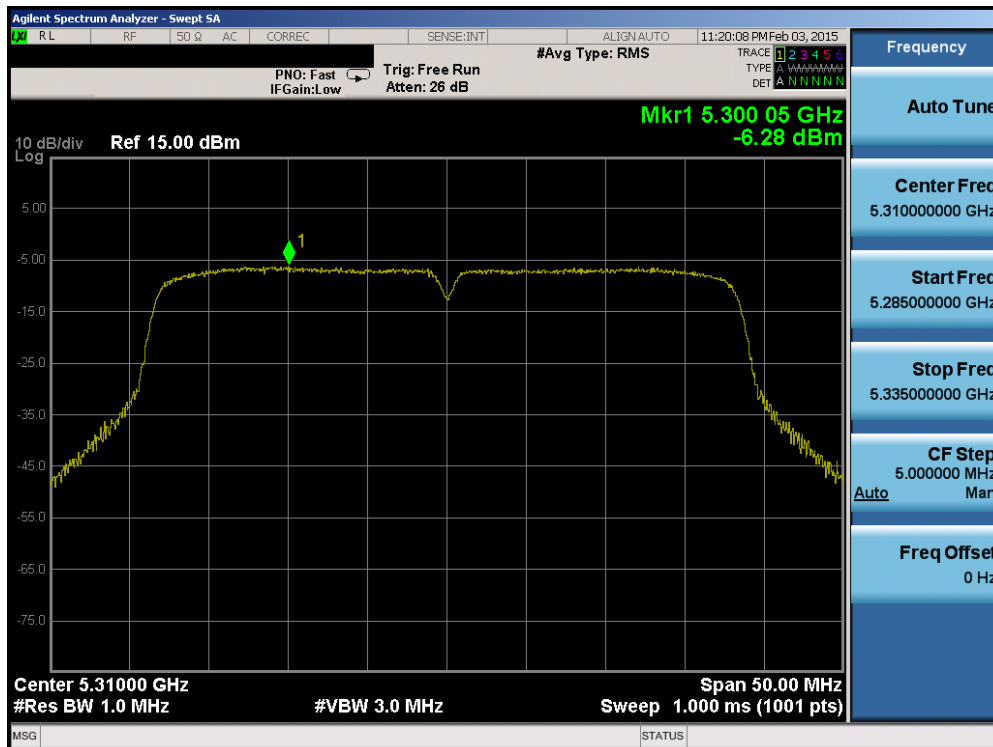


Plot 6-48. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

|                                      |                                               |                                                                     |  |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|--|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |  | Page 43 of 100                  |

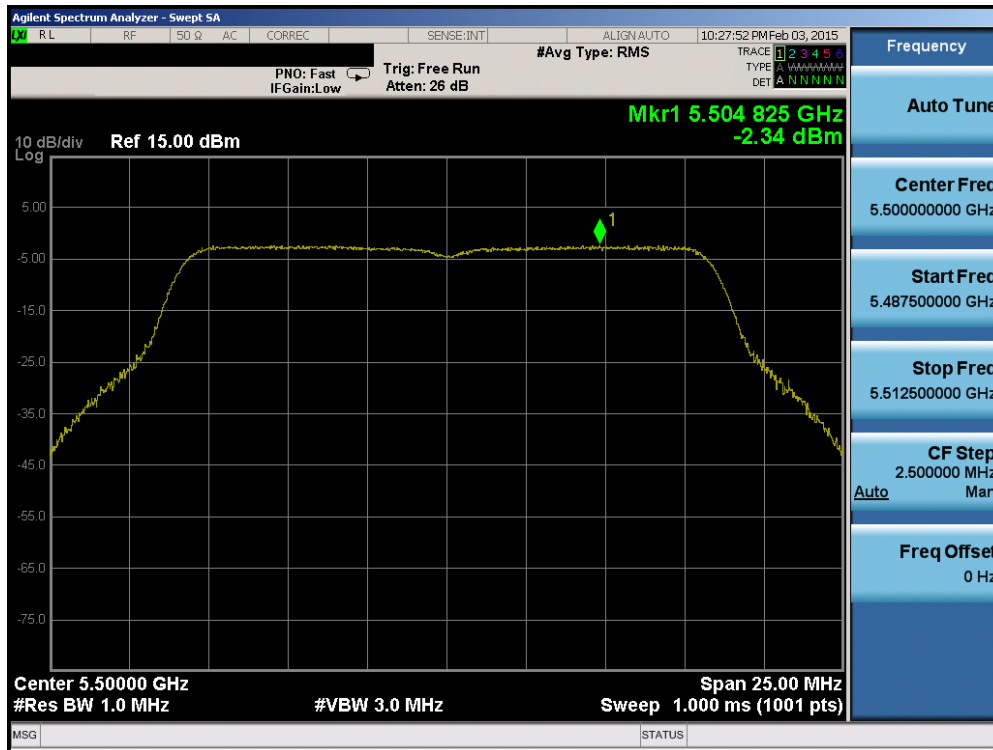


Plot 6-49. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 100)

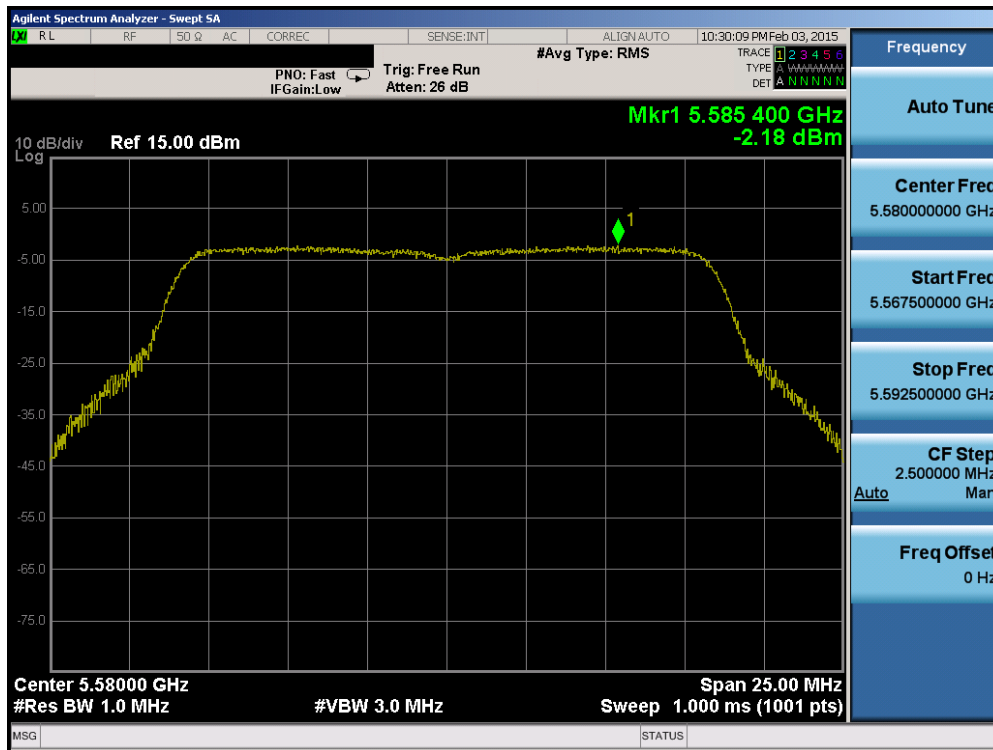


Plot 6-50. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 116)

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 44 of 100                  |

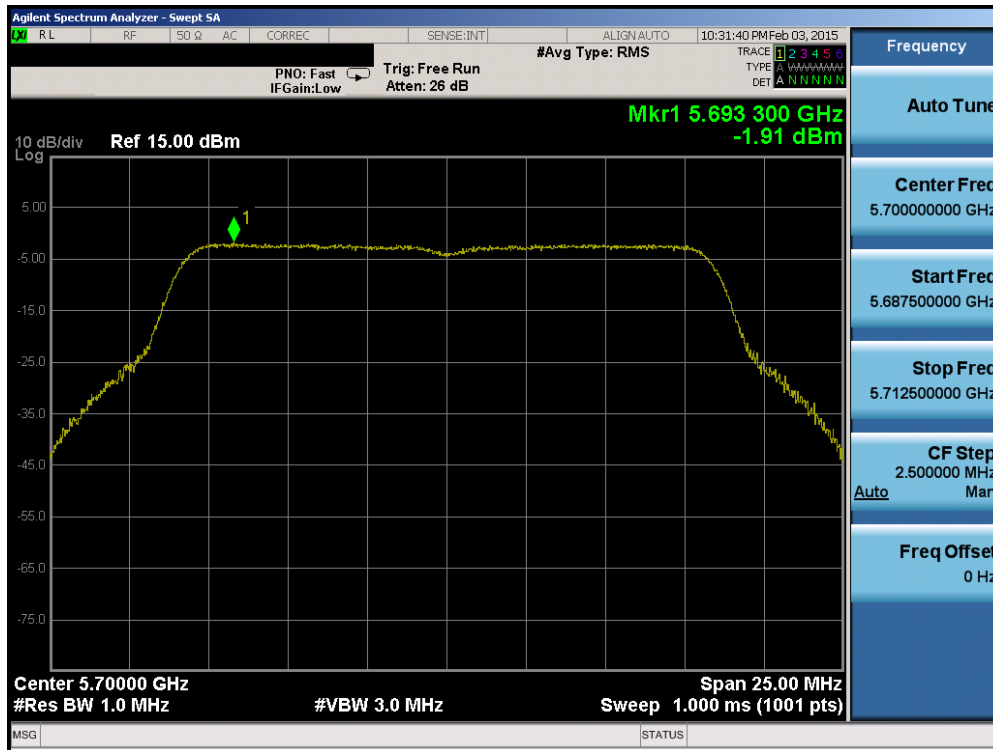


Plot 6-51. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 140)

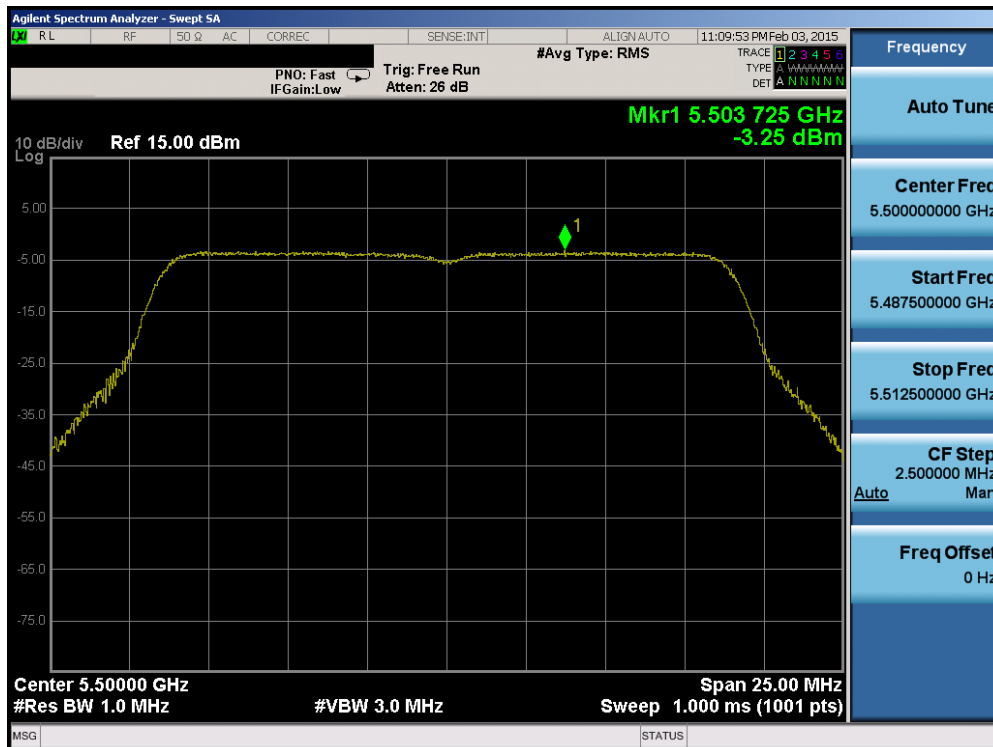


Plot 6-52. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

|                                      |                                               |                                                                     |  |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|--|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |  | Page 45 of 100                  |

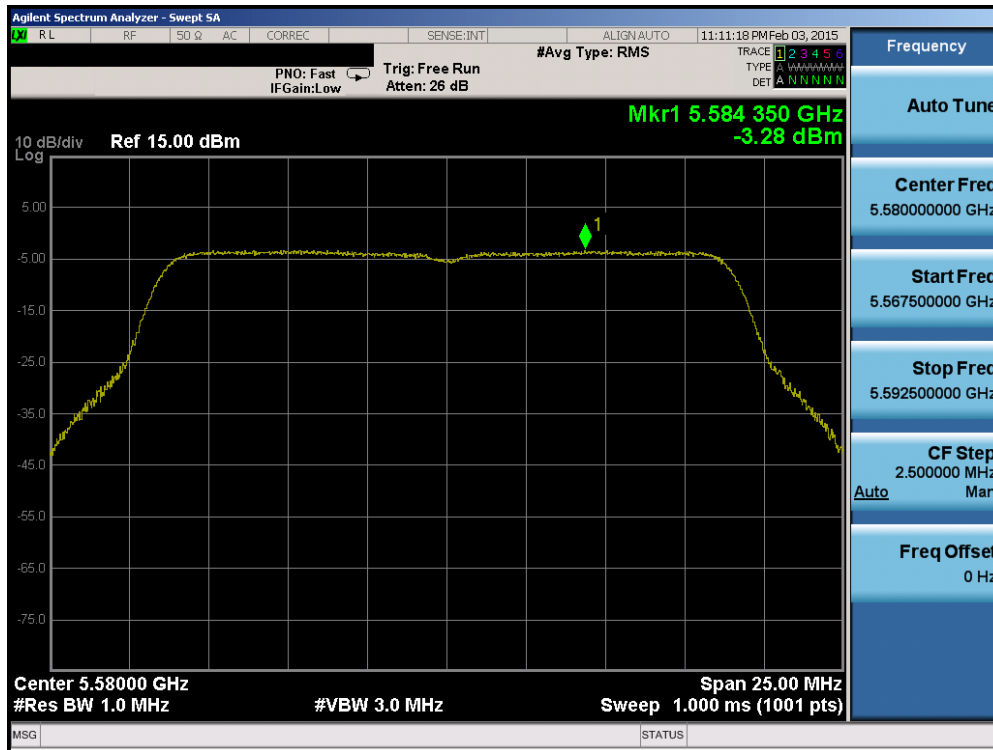


Plot 6-53. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 116)

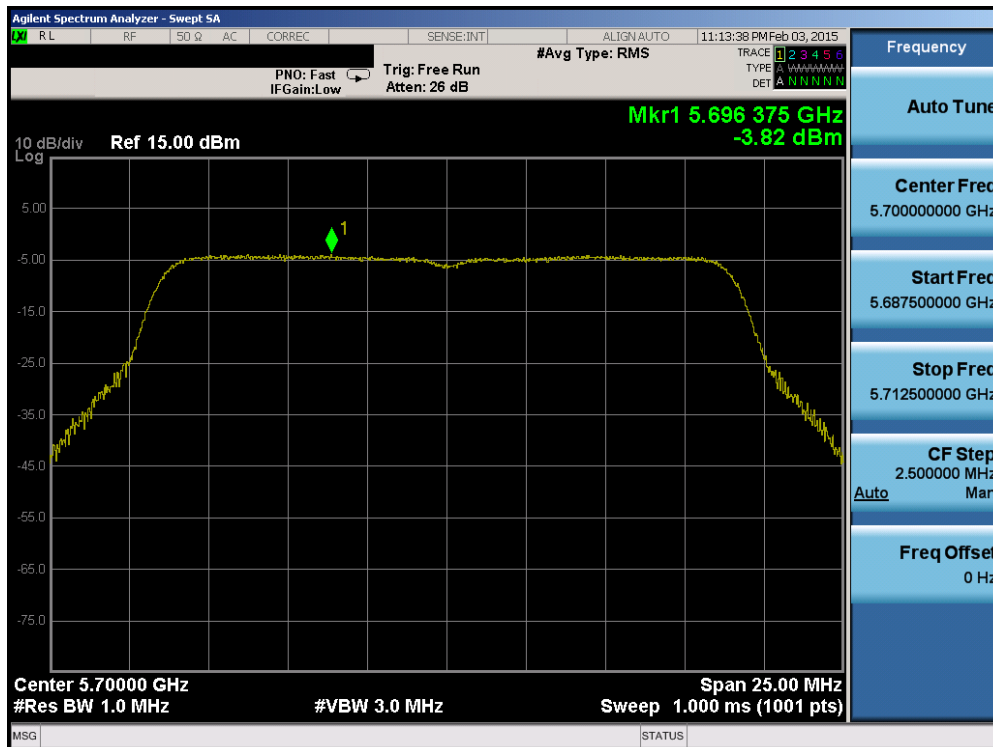


Plot 6-54. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 140)

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 46 of 100                  |

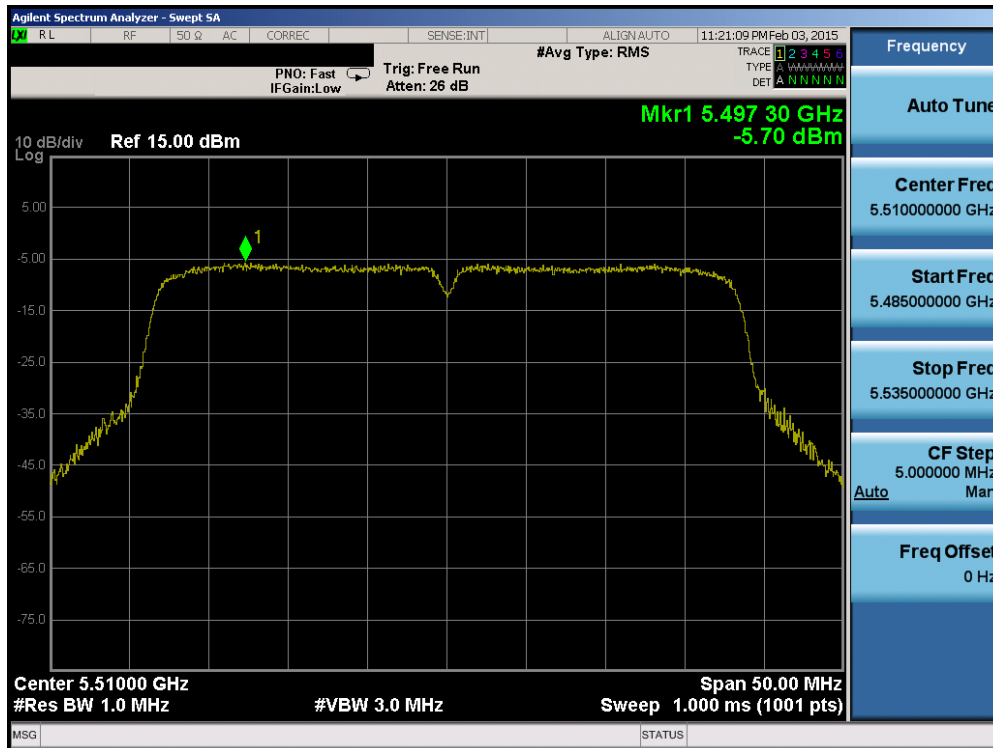

Plot 6-55. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

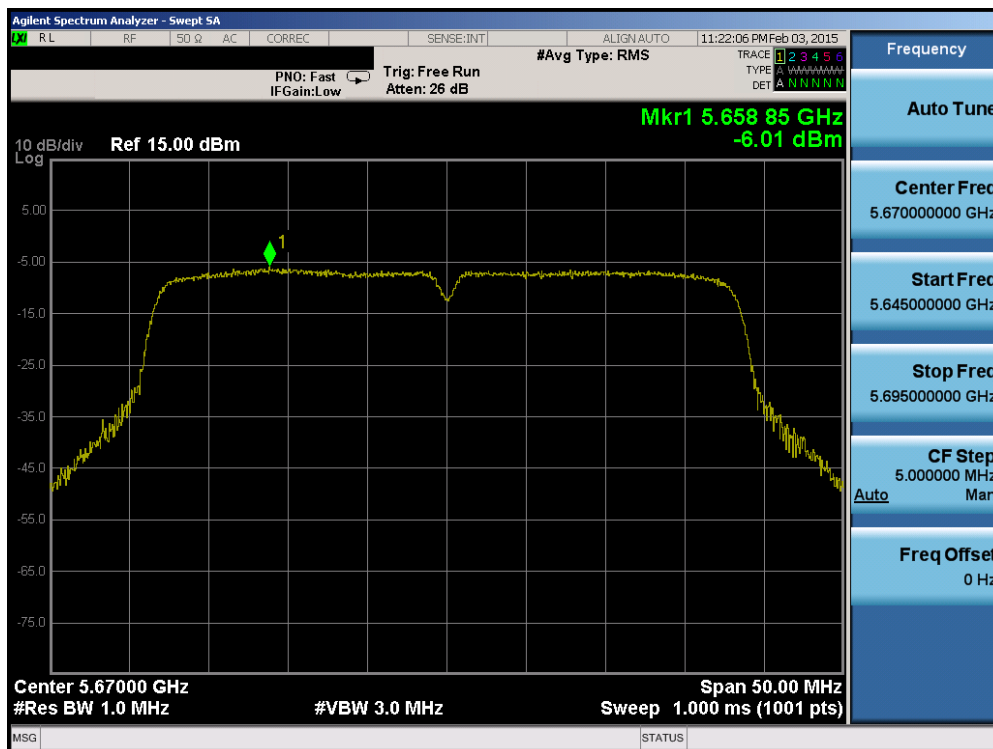


Plot 6-56. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 134)

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 47 of 100                  |


|               | Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured Power Density [dBm] | Max Permissible Power Density [dBm/500kHz] | Margin [dB] | Pass / Fail |
|---------------|-----------------|-------------|-------------|------------------|------------------------------|--------------------------------------------|-------------|-------------|
| <b>Band 3</b> | 5745            | 149         | a           | 6                | -5.20                        | 30.0                                       | -35.20      | Pass        |
|               | 5785            | 157         | a           | 6                | -5.10                        | 30.0                                       | -35.10      | Pass        |
|               | 5825            | 165         | a           | 6                | -4.66                        | 30.0                                       | -34.66      | Pass        |
|               | 5745            | 149         | n (20MHz)   | 6.5/7.2 (MCS0)   | -6.21                        | 30.0                                       | -36.21      | Pass        |
|               | 5785            | 157         | n (20MHz)   | 6.5/7.2 (MCS0)   | -5.98                        | 30.0                                       | -35.98      | Pass        |
|               | 5825            | 165         | n (20MHz)   | 6.5/7.2 (MCS0)   | -5.83                        | 30.0                                       | -35.83      | Pass        |
|               | 5755            | 151         | n (40MHz)   | 13.5/15 (MCS0)   | -9.37                        | 30.0                                       | -39.37      | Pass        |
|               | 5795            | 159         | n (40MHz)   | 13.5/15 (MCS0)   | -9.49                        | 30.0                                       | -39.49      | Pass        |

**Table 6-8. Band 3 Conducted Power Spectral Density Measurements**

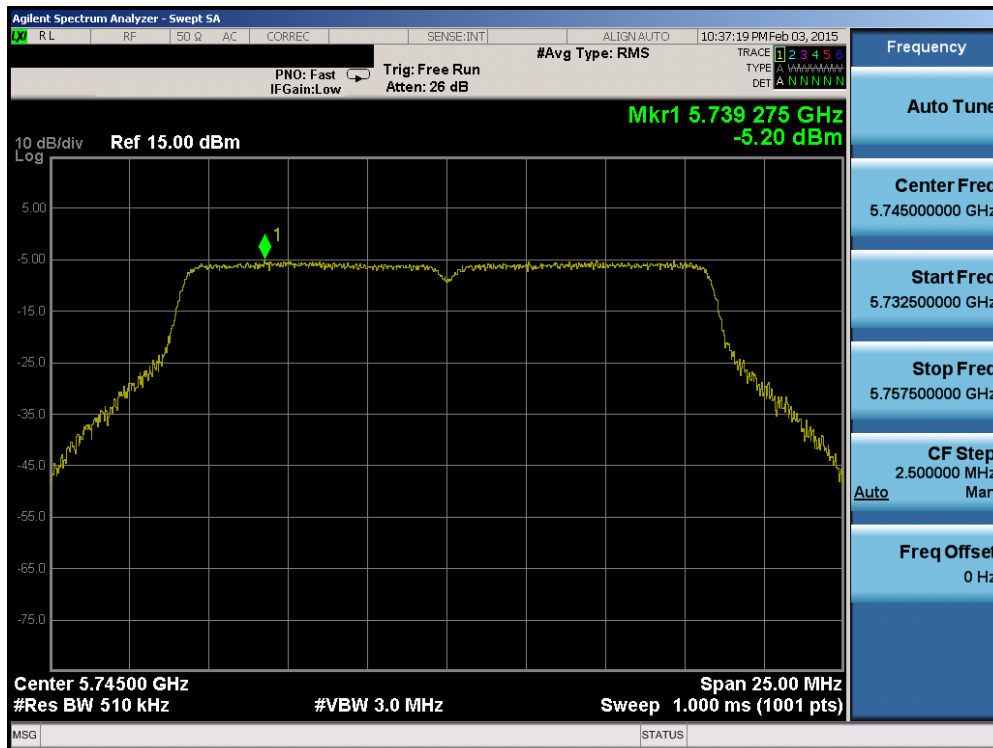


**Plot 6-57. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 149)**

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 48 of 100                  |

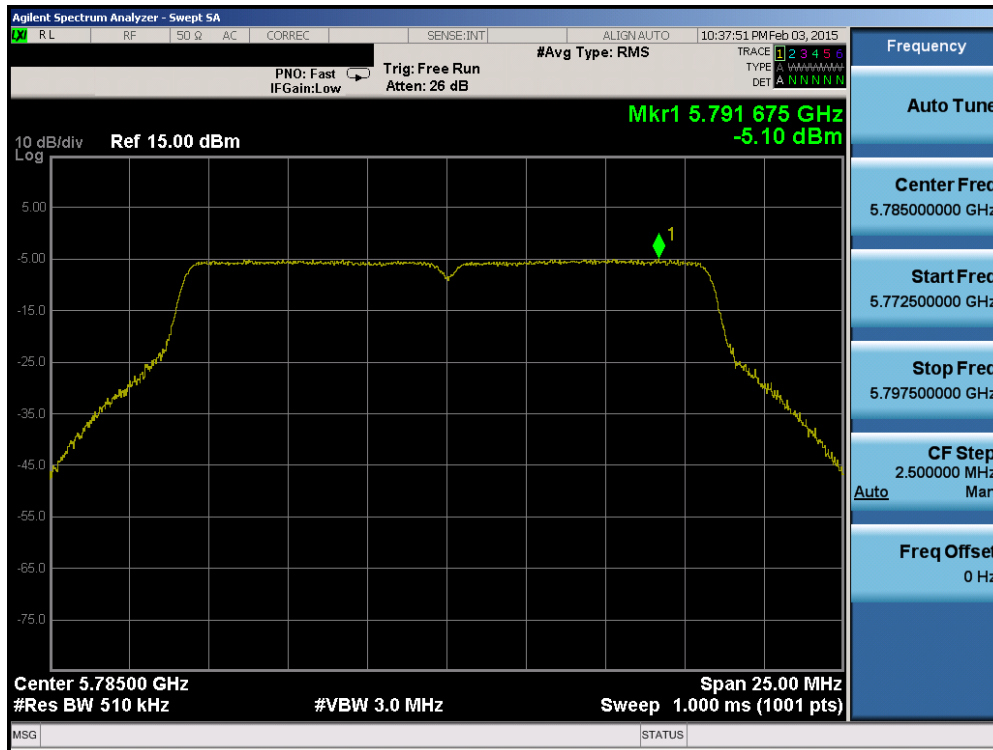


Plot 6-58. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 157)

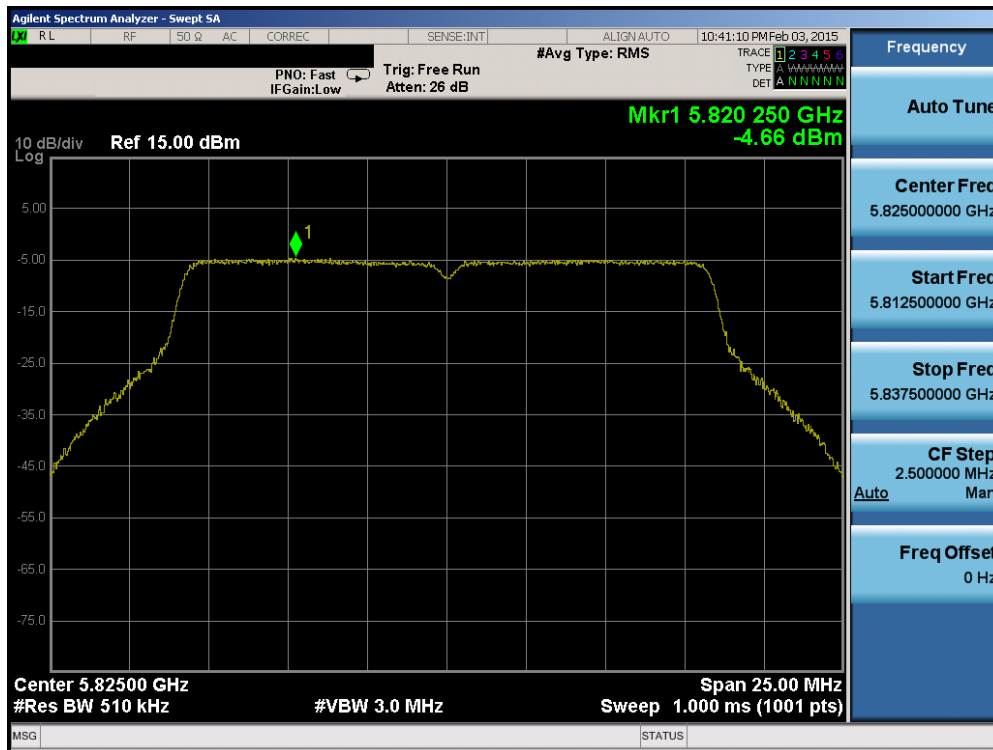


Plot 6-59. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 165)

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 49 of 100                  |

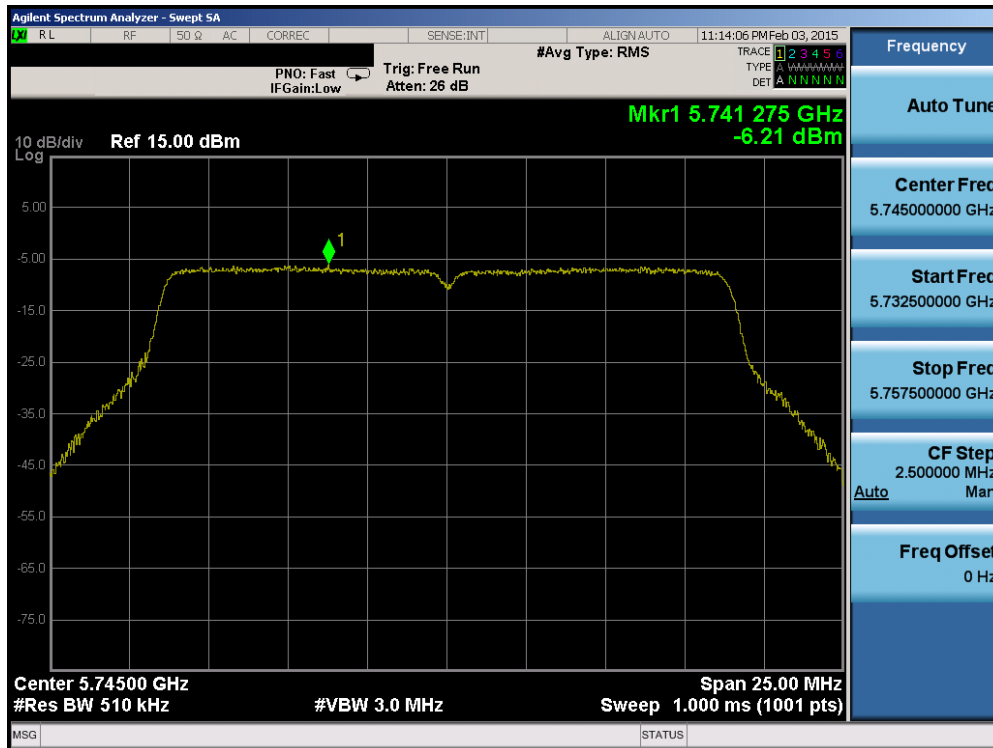


Plot 6-60. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

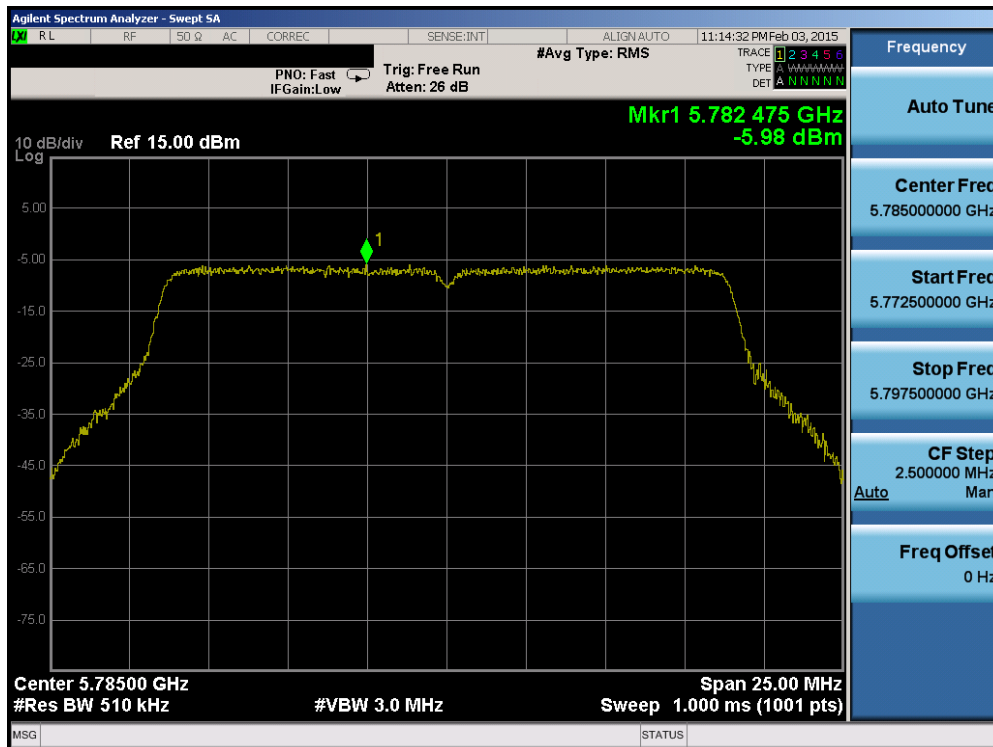


Plot 6-61. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 50 of 100                  |

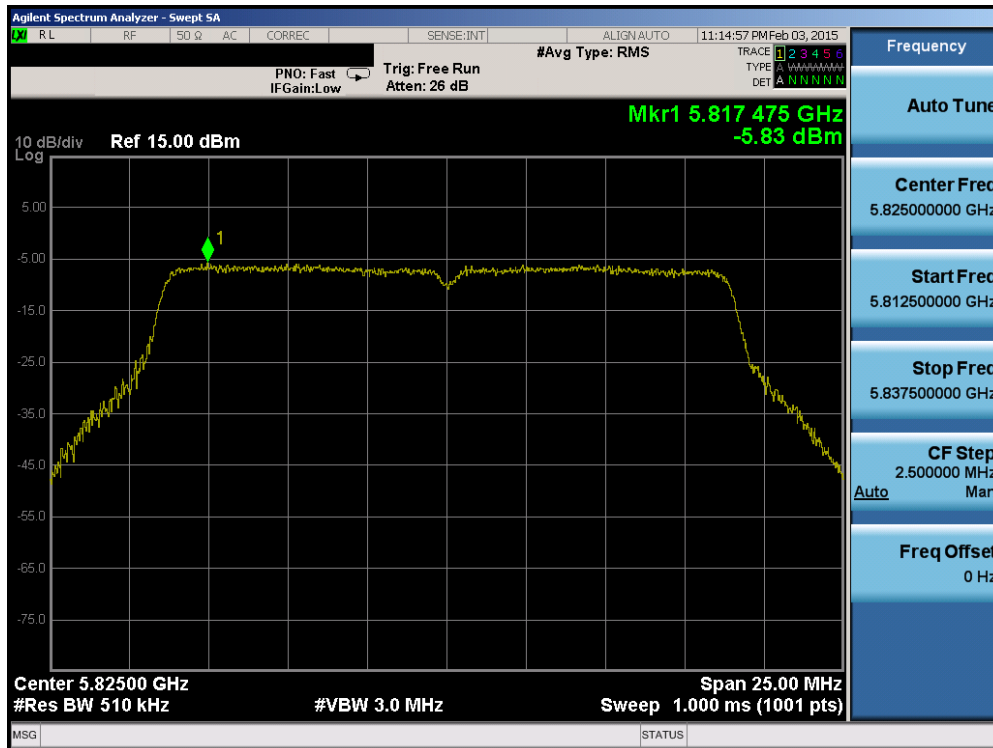


Plot 6-62. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

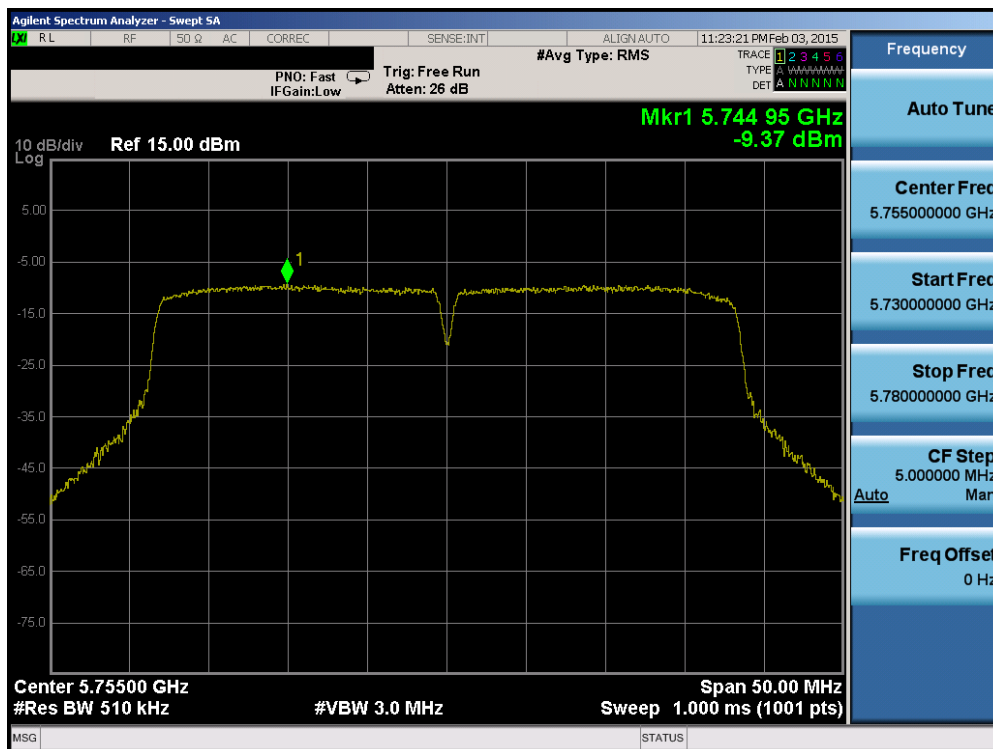

Plot 6-63. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

|                                      |                                               |                                                                     |  |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|--|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |  | Page 51 of 100                  |

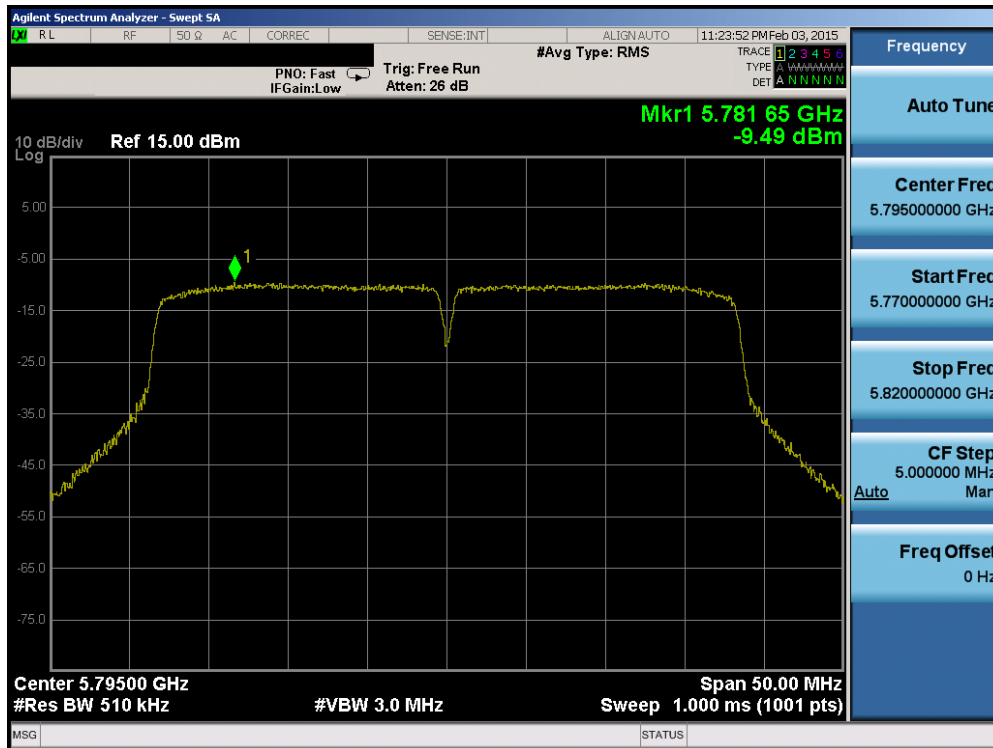

Plot 6-64. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

|                                      |                                               |                                                                     |  |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|--|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |  | Page 52 of 100                  |

## 6.6 Frequency Stability

### §15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,180,000,000 Hz  
 CHANNEL: 36  
 REFERENCE VOLTAGE: 3.80 VDC

| VOLTAGE (%)    | POWER (VDC) | TEMP (°C)  | FREQUENCY (Hz) | Freq. Dev. (Hz) | Deviation (%) |
|----------------|-------------|------------|----------------|-----------------|---------------|
| 100 %          | 3.80        | + 20 (Ref) | 5,180,000,013  | 13              | 0.00000026    |
| 100 %          |             | - 30       | 5,180,000,024  | 24              | 0.00000047    |
| 100 %          |             | - 20       | 5,180,000,005  | 5               | 0.00000010    |
| 100 %          |             | - 10       | 5,180,000,013  | 13              | 0.00000025    |
| 100 %          |             | 0          | 5,180,000,077  | 77              | 0.00000148    |
| 100 %          |             | + 10       | 5,180,000,005  | 5               | 0.00000010    |
| 100 %          |             | + 20       | 5,180,000,056  | 56              | 0.00000109    |
| 100 %          |             | + 30       | 5,180,000,075  | 75              | 0.00000145    |
| 100 %          |             | + 40       | 5,180,000,061  | 61              | 0.00000118    |
| 100 %          |             | + 50       | 5,180,000,011  | 11              | 0.00000021    |
| BATT. ENDPOINT | 3.40        | + 20       | 5,180,000,027  | 27              | 0.00000053    |

**Table 6-9. Frequency Stability Measurements for UNII Band 1 (Ch. 36)**

#### Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

|                                      |                                                                                     |                                                                     |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFVK815                     |  | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015                                                 | EUT Type:<br>Portable Tablet                                        |                                                                                       | Page 53 of 100                  |

## Frequency Stability

### §15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,260,000,000 Hz  
 CHANNEL: 52  
 REFERENCE VOLTAGE: 3.80 VDC

| VOLTAGE (%)    | POWER (VDC) | TEMP (°C)  | FREQUENCY (Hz) | Freq. Dev. (Hz) | Deviation (%) |
|----------------|-------------|------------|----------------|-----------------|---------------|
| 100 %          | 3.80        | + 20 (Ref) | 5,260,000,010  | 10              | 0.00000019    |
| 100 %          |             | - 30       | 5,260,000,052  | 52              | 0.00000099    |
| 100 %          |             | - 20       | 5,260,000,030  | 30              | 0.00000057    |
| 100 %          |             | - 10       | 5,260,000,057  | 57              | 0.00000109    |
| 100 %          |             | 0          | 5,260,000,006  | 6               | 0.00000011    |
| 100 %          |             | + 10       | 5,260,000,010  | 10              | 0.00000018    |
| 100 %          |             | + 20       | 5,260,000,008  | 8               | 0.00000015    |
| 100 %          |             | + 30       | 5,260,000,083  | 83              | 0.00000158    |
| 100 %          |             | + 40       | 5,260,000,014  | 14              | 0.00000027    |
| 100 %          |             | + 50       | 5,260,000,032  | 32              | 0.00000060    |
| BATT. ENDPOINT | 3.40        | + 20       | 5,260,000,096  | 96              | 0.00000182    |

**Table 6-10. Frequency Stability Measurements for UNII Band 2A (Ch. 52)**

#### Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

|                                      |                                                                                     |                                                                     |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFVK815                     |  | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015                                                 | EUT Type:<br>Portable Tablet                                        |                                                                                       | Page 54 of 100                  |

## Frequency Stability

### §15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,500,000,000 Hz  
 CHANNEL: 100  
 REFERENCE VOLTAGE: 3.80 VDC

| VOLTAGE (%)    | POWER (VDC) | TEMP (°C)  | FREQUENCY (Hz) | Freq. Dev. (Hz) | Deviation (%) |
|----------------|-------------|------------|----------------|-----------------|---------------|
| 100 %          | 3.80        | + 20 (Ref) | 5,500,000,071  | 71              | 0.00000130    |
| 100 %          |             | - 30       | 5,500,000,001  | 1               | 0.00000002    |
| 100 %          |             | - 20       | 5,500,000,073  | 73              | 0.00000132    |
| 100 %          |             | - 10       | 5,500,000,019  | 19              | 0.00000034    |
| 100 %          |             | 0          | 5,500,000,097  | 97              | 0.00000177    |
| 100 %          |             | + 10       | 5,500,000,067  | 67              | 0.00000122    |
| 100 %          |             | + 20       | 5,500,000,009  | 9               | 0.00000016    |
| 100 %          |             | + 30       | 5,500,000,019  | 19              | 0.00000034    |
| 100 %          |             | + 40       | 5,500,000,029  | 29              | 0.00000052    |
| 100 %          |             | + 50       | 5,500,000,071  | 71              | 0.00000129    |
| BATT. ENDPOINT | 3.40        | + 20       | 5,500,000,010  | 10              | 0.00000019    |

**Table 6-11. Frequency Stability Measurements for UNII Band 2C (Ch. 100)**

#### Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

|                                      |                                                                                     |                                                                     |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFVK815                     |  | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015                                                 | EUT Type:<br>Portable Tablet                                        | Page 55 of 100                                                                        |                                 |

## Frequency Stability

### §15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,745,000,000 Hz  
 CHANNEL: 149  
 REFERENCE VOLTAGE: 3.80 VDC

| VOLTAGE (%)    | POWER (VDC) | TEMP (°C)  | FREQUENCY (Hz) | Freq. Dev. (Hz) | Deviation (%) |
|----------------|-------------|------------|----------------|-----------------|---------------|
| 100 %          | 3.80        | + 20 (Ref) | 5,745,000,067  | 67              | 0.00000116    |
| 100 %          |             | - 30       | 5,745,000,073  | 73              | 0.00000127    |
| 100 %          |             | - 20       | 5,745,000,062  | 62              | 0.00000108    |
| 100 %          |             | - 10       | 5,745,000,037  | 37              | 0.00000064    |
| 100 %          |             | 0          | 5,745,000,048  | 48              | 0.00000084    |
| 100 %          |             | + 10       | 5,745,000,039  | 39              | 0.00000068    |
| 100 %          |             | + 20       | 5,745,000,052  | 52              | 0.00000091    |
| 100 %          |             | + 30       | 5,745,000,070  | 70              | 0.00000122    |
| 100 %          |             | + 40       | 5,745,000,028  | 28              | 0.00000048    |
| 100 %          |             | + 50       | 5,745,000,059  | 59              | 0.00000103    |
| BATT. ENDPOINT | 3.40        | + 20       | 5,745,000,015  | 15              | 0.00000026    |

**Table 6-12. Frequency Stability Measurements for UNII Band 3 (Ch. 149)**

### Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

|                                      |                                                                                     |                                                                     |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFVK815                     |  | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015                                                 | EUT Type:<br>Portable Tablet                                        | Page 56 of 100                                                                        |                                 |

## 6.7 Radiated Spurious Emission Measurements

**\$15.407(b.1)(b.6) \$15.205 \$15.209**

### **Test Overview and Limit**

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle (>98%), at its maximum power control level, as defined in KDB 789033 D02 v01, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11n (20MHz BW) and 802.11n (40MHz BW)), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 6-13 per Section 15.209.***

| Frequency       | Field Strength<br>[ $\mu\text{V/m}$ ] | Measured Distance<br>[Meters] |
|-----------------|---------------------------------------|-------------------------------|
| Above 960.0 MHz | 500                                   | 3                             |

**Table 6-13. Radiated Limits**

### **Test Procedures Used**

KDB 789033 D02 v01 – Section G

### **Test Settings**

#### **Average Measurements above 1GHz (Method AD)**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be  $\geq 2 \times \text{span/RBW}$ )
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

#### **Peak Measurements above 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


|                                             |                                                                                     |                                                                             |                                                                                       |                                        |
|---------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> ZNFVK815                     |  | <b>FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>0Y1502020341.ZNF | <b>Test Dates:</b><br>2/3/2015 - 2/20/2015                                          | <b>EUT Type:</b><br>Portable Tablet                                         |                                                                                       | Page 57 of 100                         |

### Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 120kHz
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

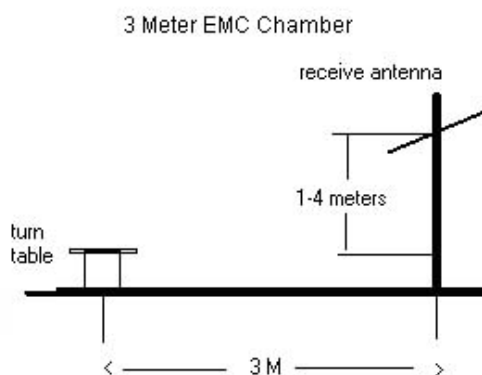

**Figure 6-5. Test Instrument & Measurement Setup**

### Test Notes

1. All radiated spurious emissions levels were measured in a radiated test setup per the guidance of KDB 789033 D02 v01 Section H.
2. All emissions that lie in the restricted bands (denoted by a \* next to the frequency) specified in §15.205 are below the limit shown in Table 6-13.
3. All spurious emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 6-11. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dBμV/m.
4. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
5. This unit was tested with its standard battery.

|                                      |                                                                                     |                                                                     |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFVK815                     |  | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015                                                 | EUT Type:<br>Portable Tablet                                        |                                                                                       | Page 58 of 100                  |

6. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
7. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
8. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section. Rohde & Schwarz EMC32, Version 9.15.00 automated test software was used to perform the Radiated Spurious Emissions Pre-Scan testing.

## **Sample Calculations**

### **Determining Spurious Emissions Levels**

- o Field Strength Level  $_{[dB\mu V/m]} = \text{Analyzer Level}_{[dBm]} + 107 + \text{AFCL}_{[dB/m]}$
- o  $\text{AFCL}_{[dB/m]} = \text{Antenna Factor}_{[dB/m]} + \text{Cable Loss}_{[dB]}$
- o  $\text{Margin}_{[dB]} = \text{Field Strength Level}_{[dB\mu V/m]} - \text{Limit}_{[dB\mu V/m]}$


### **Radiated Band Edge Measurement Offset**

- o The amplitude offset shown in the radiated restricted band edge plots in Section 6.8 was calculated using the formula:


$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + 10 \text{ dB Attenuator}) - \text{Preamplifier Gain}$$

|                                      |                                                                                     |                                                                     |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFVK815                     |  | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015                                                 | EUT Type:<br>Portable Tablet                                        |                                                                                       | Page 59 of 100                  |

## 6.7.1 Radiated Spurious Emission Measurements

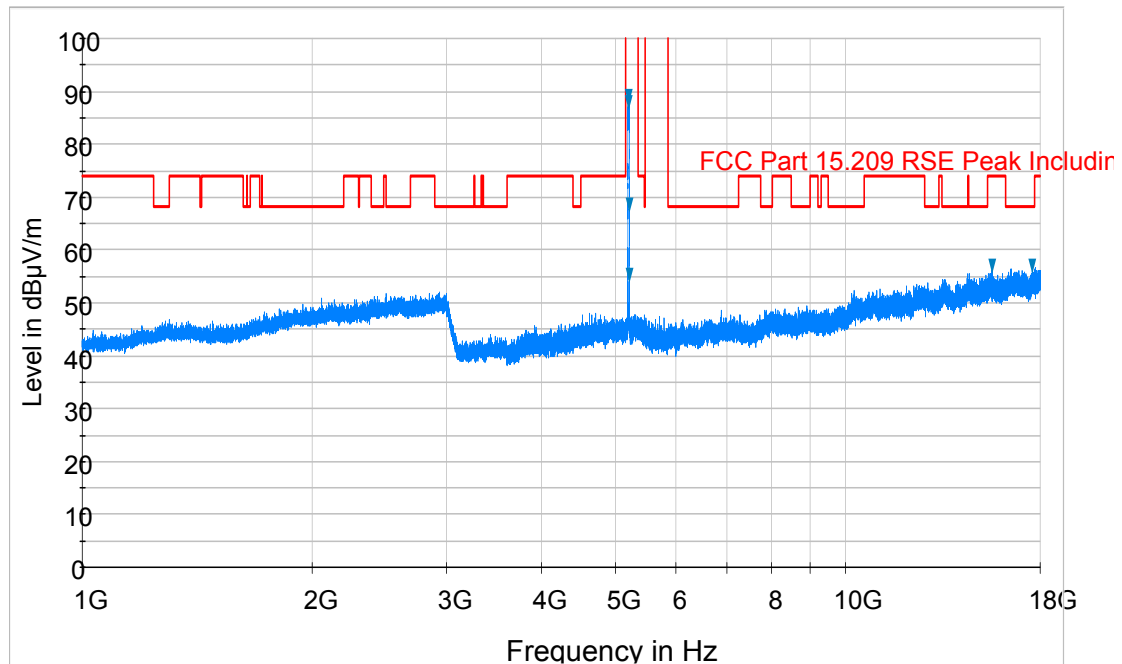


Plot 6-65. Radiated Spurious Plot above 1GHz (802.11a – U1 Ch. 40, Ant. Pol. H)

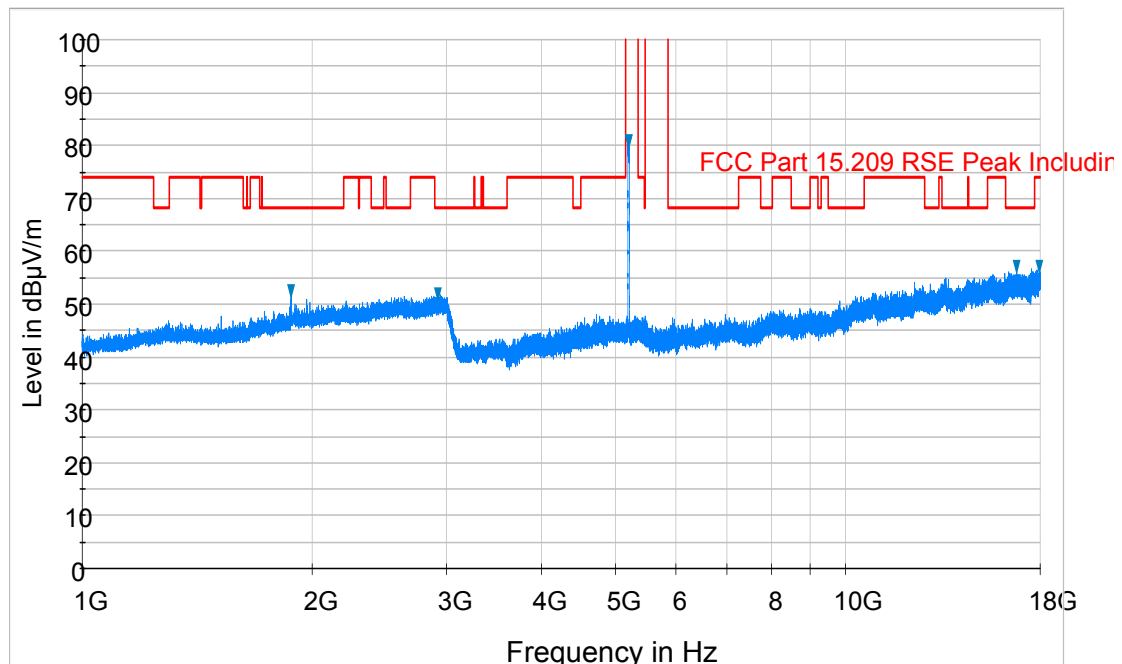


Plot 6-66. Radiated Spurious Plot above 1GHz (802.11a – U1 Ch. 40, Ant. Pol. V)

|                                      |                                               |                                                                     |                                        |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|----------------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>Reviewed by:</b><br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        | Page 60 of 100                         |

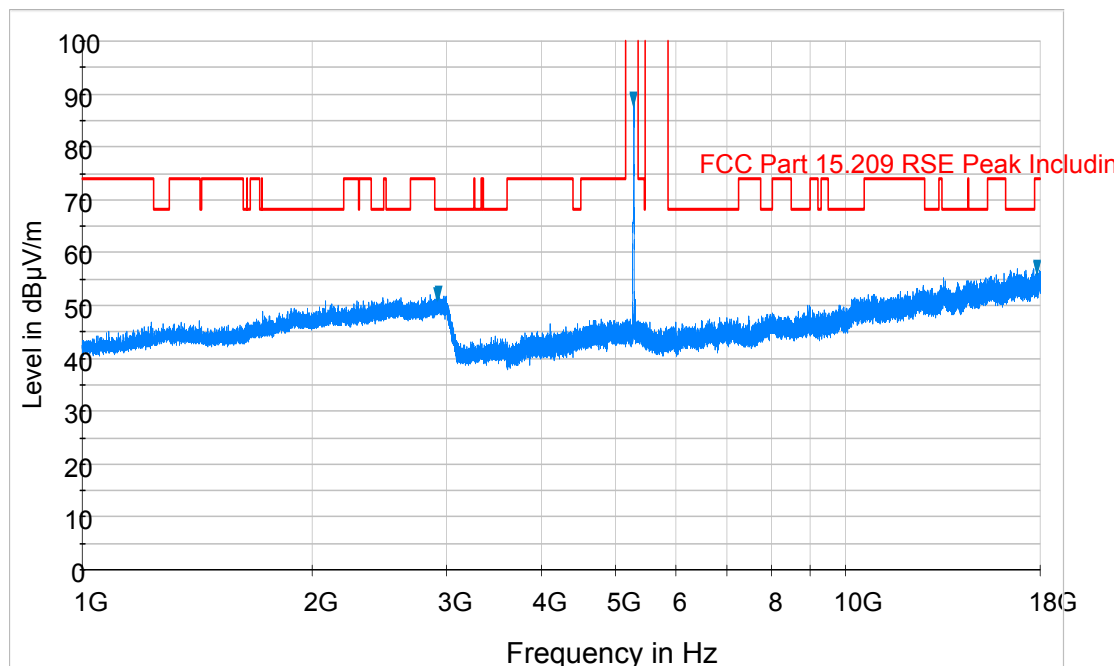


**Plot 6-67. Radiated Spurious Plot above 1GHz (802.11a – U2A Ch. 56, Ant. Pol. H)**

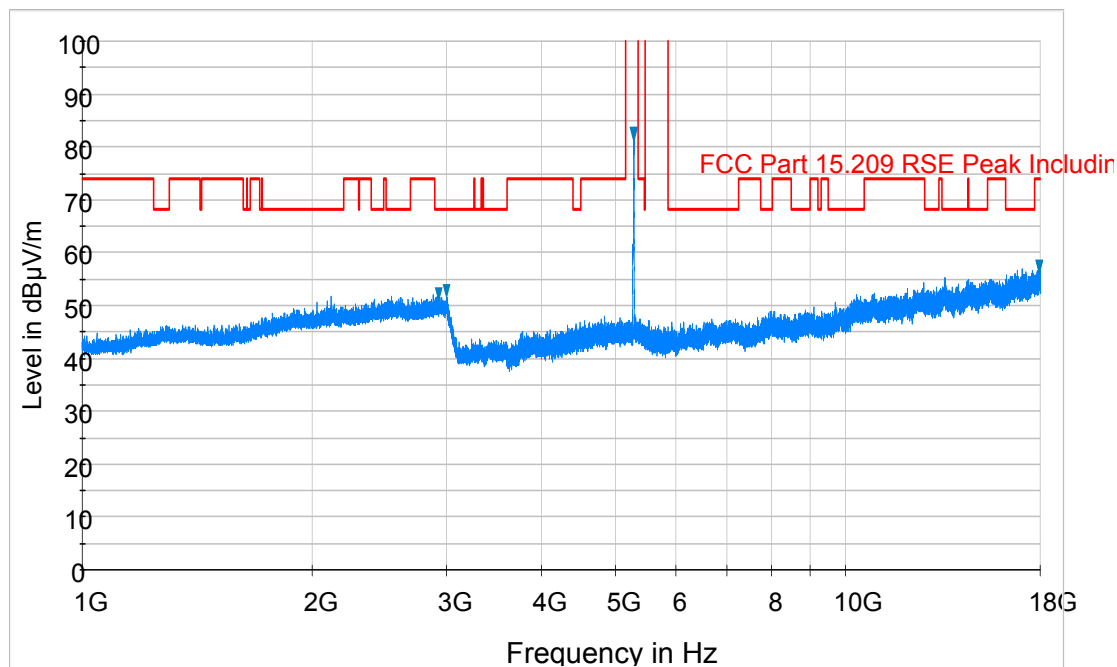


**Plot 6-68. Radiated Spurious Plot above 1GHz (802.11a – U2A Ch. 56, Ant. Pol. V)**

|                                             |                                               |                                                                            |                                        |
|---------------------------------------------|-----------------------------------------------|----------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT</b><br>(CERTIFICATION) | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>0Y1502020341.ZNF | <b>Test Dates:</b><br>2/3/2015 - 2/20/2015    | <b>EUT Type:</b><br>Portable Tablet                                        | Page 61 of 100                         |

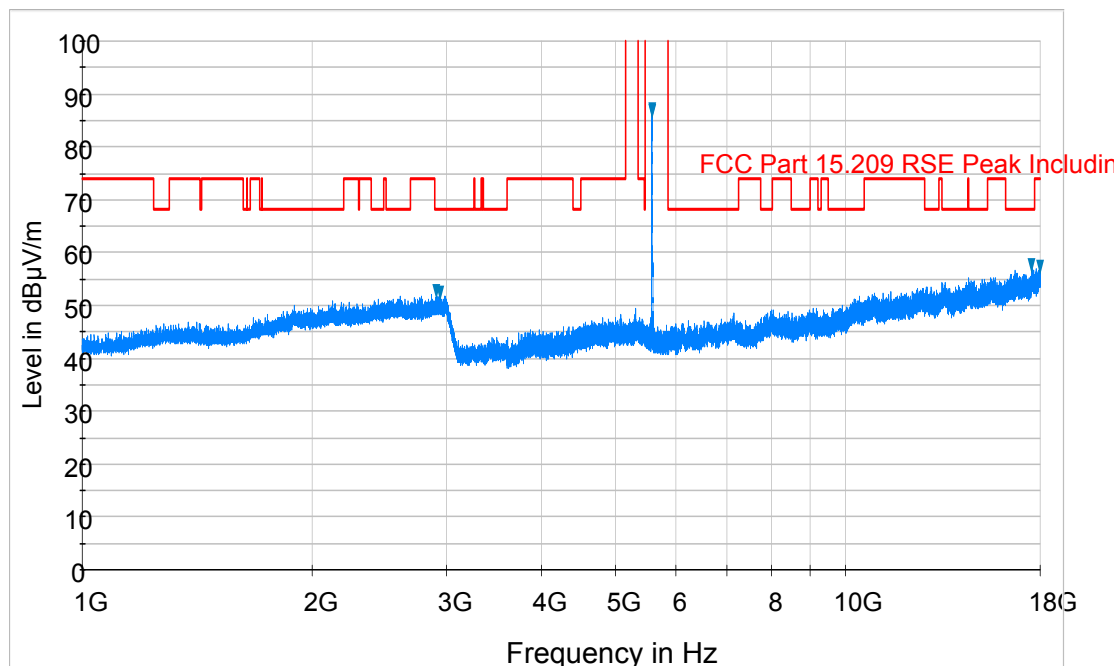


**Plot 6-69. Radiated Spurious Plot above 1GHz (802.11a – U2C Ch. 116, Ant. Pol. H)**

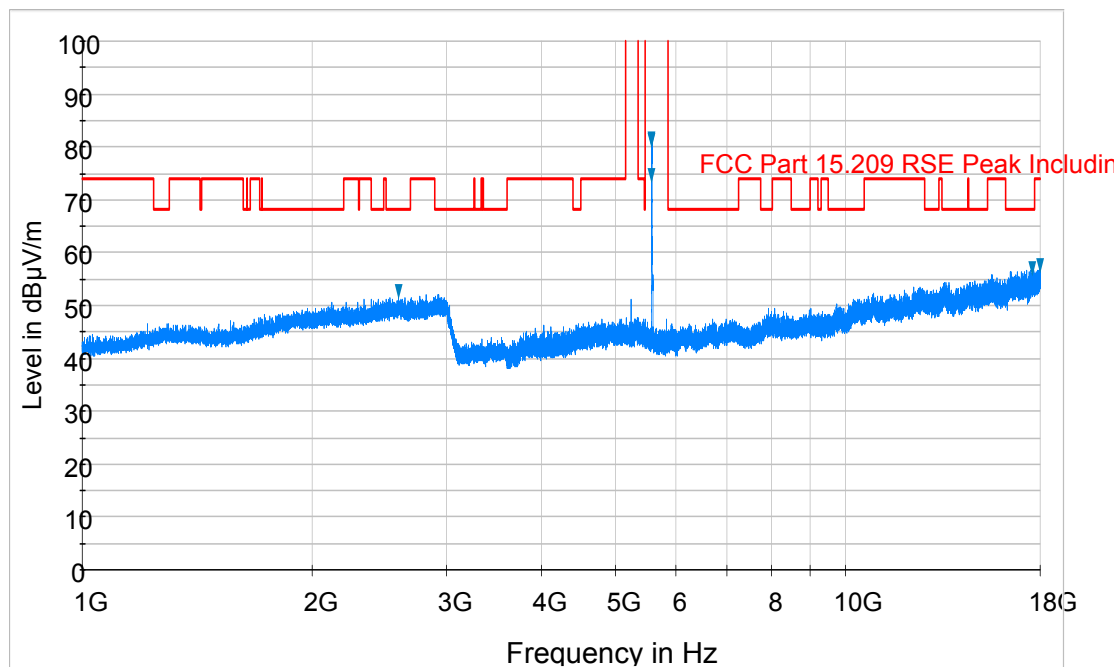


**Plot 6-70. Radiated Spurious Plot above 1GHz (802.11a – U2C Ch. 116, Ant. Pol. V)**

|                                      |                                               |                                                                     |                                        |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|----------------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>Reviewed by:</b><br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        | Page 62 of 100                         |

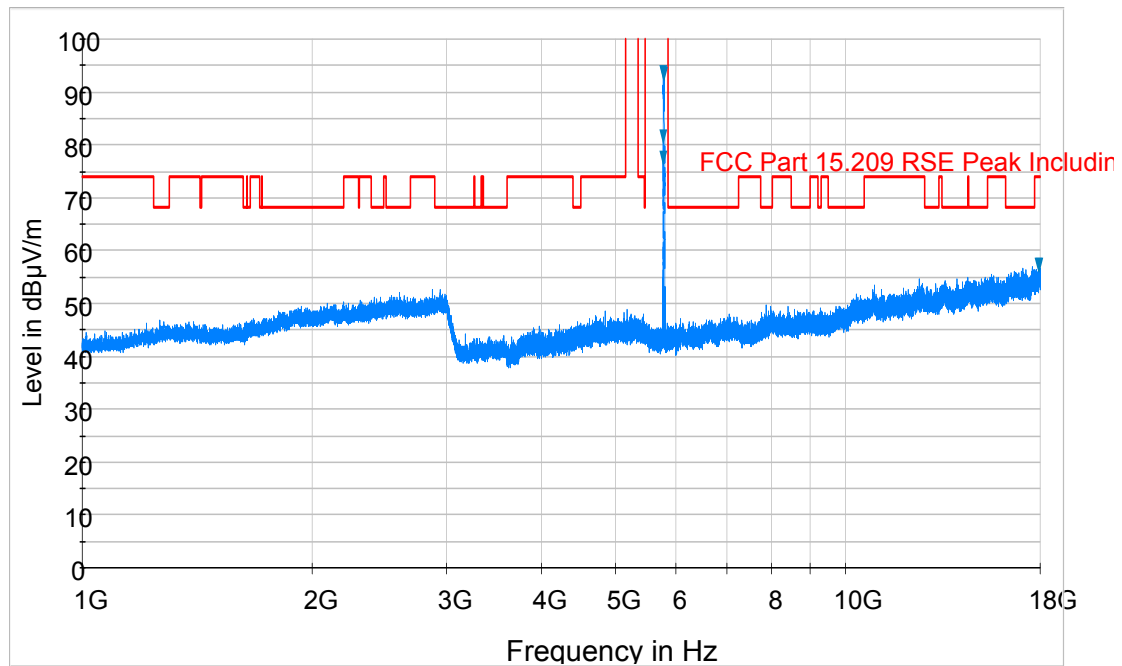

**Plot 6-71. Radiated Spurious Plot above 1GHz (802.11a – U3 Ch. 157, Ant. Pol. H)**

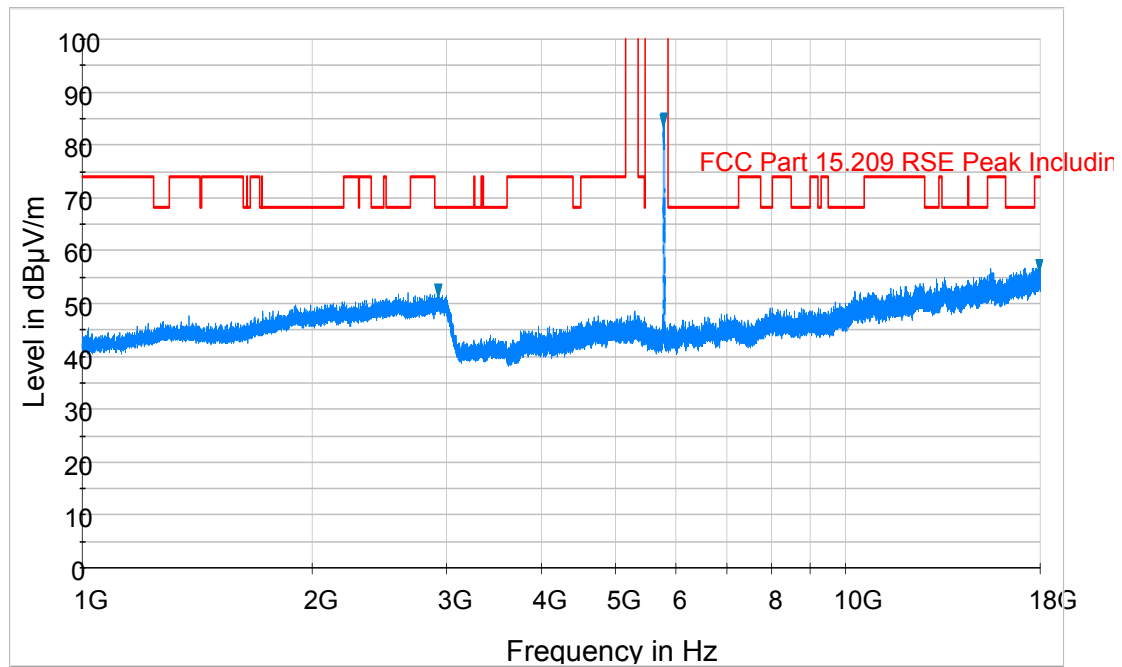


**Plot 6-72. Radiated Spurious Plot above 1GHz (802.11a – U3 Ch. 157, Ant. Pol. V)**


|                                      |                                               |                                                                     |    |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|----|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | LG | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |    | Page 63 of 100                  |

## Radiated Spurious Emissions Measurements (Above 18GHz)

### §15.209

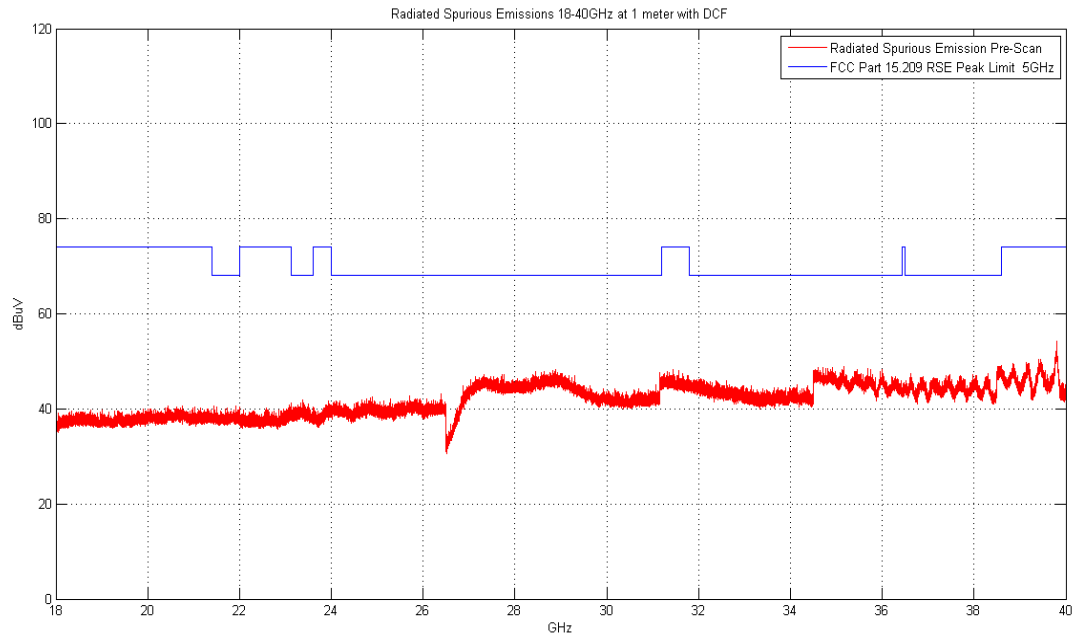

**Plot 6-73. Radiated Spurious Plot above 18GHz (802.11a – Ant. Pol. H)**

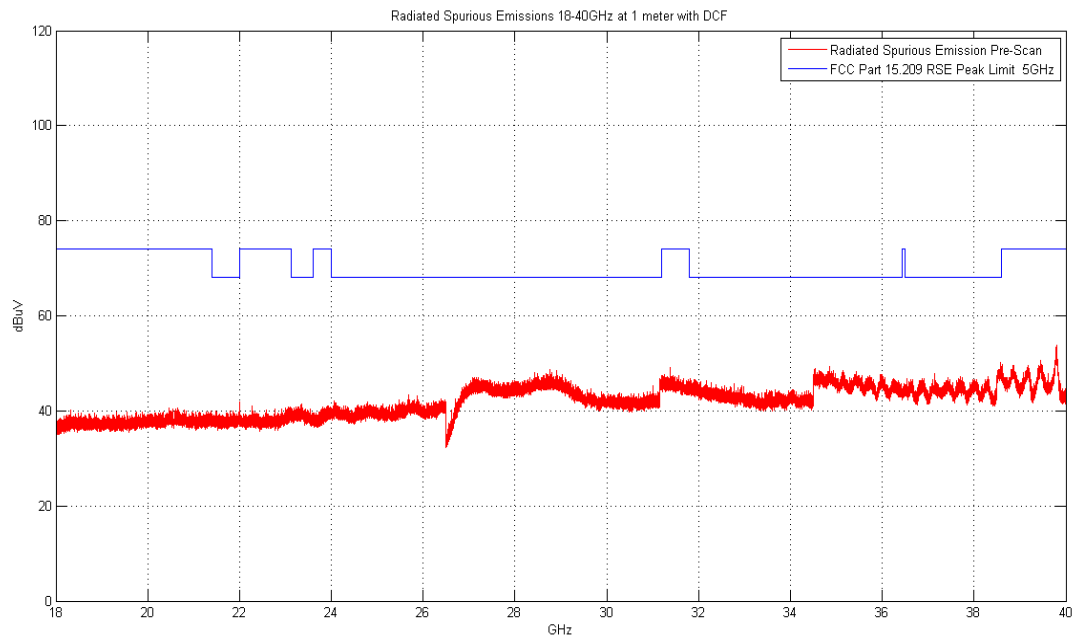

**Plot 6-74. Radiated Spurious Plot above 18GHz (802.11a – Ant. Pol. V)**

|                                             |                                               |                                                                             |                                        |
|---------------------------------------------|-----------------------------------------------|-----------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br/>(CERTIFICATION)</b> | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>0Y1502020341.ZNF | <b>Test Dates:</b><br>2/3/2015 - 2/20/2015    | <b>EUT Type:</b><br>Portable Tablet                                         | Page 64 of 100                         |

## Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209

Worst Case Mode: 802.11a  
Worst Case Transfer Rate: 6 Mbps  
Distance of Measurements: 1 & 3 Meters  
Operating Frequency: 5180MHz  
Channel: 36

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Ant. Pol. [H/V] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------------------|----------|-----------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 10360.00        | -100.00              | Peak     | H               | 46.55       | 0.00                            | 53.55                   | 68.20          | -14.65      |
| * 15540.00      | -112.10              | Average  | H               | 49.22       | 0.00                            | 44.12                   | 53.98          | -9.86       |
| * 15540.00      | -99.18               | Peak     | H               | 49.22       | 0.00                            | 57.04                   | 73.98          | -16.94      |
| * 20720.00      | -96.52               | Average  | H               | 48.73       | -9.54                           | 49.67                   | 53.98          | -4.31       |
| * 20720.00      | -91.01               | Peak     | H               | 48.73       | -9.54                           | 55.18                   | 73.98          | -18.80      |
| 25900.00        | -90.62               | Peak     | H               | 51.07       | -9.54                           | 57.91                   | 68.20          | -10.29      |

**Table 6-14. Radiated Measurements**

Worst Case Mode: 802.11a  
Worst Case Transfer Rate: 6 Mbps  
Distance of Measurements: 1 & 3 Meters  
Operating Frequency: 5200MHz  
Channel: 40

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Ant. Pol. [H/V] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------------------|----------|-----------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 10400.00        | -99.66               | Peak     | H               | 46.56       | 0.00                            | 53.91                   | 68.20          | -14.29      |
| * 15600.00      | -112.34              | Average  | H               | 49.31       | 0.00                            | 43.97                   | 53.98          | -10.01      |
| * 15600.00      | -99.64               | Peak     | H               | 49.31       | 0.00                            | 56.67                   | 73.98          | -17.31      |
| * 20800.00      | -97.44               | Average  | H               | 48.83       | -9.54                           | 48.84                   | 53.98          | -5.14       |
| * 20800.00      | -91.62               | Peak     | H               | 48.83       | -9.54                           | 54.66                   | 73.98          | -19.32      |
| 26000.00        | -91.73               | Peak     | H               | 51.15       | -9.54                           | 56.88                   | 68.20          | -11.32      |

**Table 6-15. Radiated Measurements**

|                                      |                                                                                     |                                                                  |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFVK815                     |  | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015                                                 | EUT Type:<br>Portable Tablet                                     |                                                                                       | Page 65 of 100                  |

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5240MHz  
 Channel: 48

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Ant. Pol. [H/V] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------------------|----------|-----------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 10480.00        | -99.50               | Peak     | H               | 46.58       | 0.00                            | 54.08                   | 68.20          | -14.12      |
| * 15720.00      | -112.54              | Average  | H               | 49.58       | 0.00                            | 44.04                   | 53.98          | -9.94       |
| * 15720.00      | -99.66               | Peak     | H               | 49.58       | 0.00                            | 56.92                   | 73.98          | -17.06      |
| * 20960.00      | -96.53               | Average  | H               | 48.98       | -9.54                           | 49.91                   | 53.98          | -4.07       |
| * 20960.00      | -90.02               | Peak     | H               | 48.98       | -9.54                           | 56.42                   | 73.98          | -17.56      |
| 26200.00        | -89.14               | Peak     | H               | 51.17       | -9.54                           | 59.48                   | 68.20          | -8.72       |

**Table 6-16. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5260MHz  
 Channel: 52

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Ant. Pol. [H/V] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------------------|----------|-----------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 10520.00        | -103.66              | Peak     | H               | 46.59       | 0.00                            | 49.93                   | 68.20          | -18.27      |
| * 15780.00      | -118.47              | Average  | H               | 49.80       | 0.00                            | 38.33                   | 53.98          | -15.65      |
| * 15780.00      | -106.79              | Peak     | H               | 49.80       | 0.00                            | 50.01                   | 73.98          | -23.97      |
| * 21040.00      | -95.62               | Average  | H               | 49.04       | -9.54                           | 50.87                   | 53.98          | -3.11       |
| * 21040.00      | -89.47               | Peak     | H               | 49.04       | -9.54                           | 57.02                   | 73.98          | -16.96      |
| 26300.00        | -89.95               | Peak     | H               | 51.24       | -9.54                           | 58.75                   | 68.20          | -9.45       |

**Table 6-17. Radiated Measurements**

|                                      |                                                                                     |                                                                  |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFVK815                     |  | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015                                                 | EUT Type:<br>Portable Tablet                                     |                                                                                       | Page 66 of 100                  |

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5280MHz  
 Channel: 56

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Ant. Pol. [H/V] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------------------|----------|-----------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 10560.00        | -103.76              | Peak     | H               | 46.61       | 0.00                            | 49.85                   | 68.20          | -18.35      |
| * 15840.00      | -118.69              | Average  | H               | 50.04       | 0.00                            | 38.35                   | 53.98          | -15.63      |
| * 15840.00      | -106.55              | Peak     | H               | 50.04       | 0.00                            | 50.49                   | 73.98          | -23.49      |
| * 21120.00      | -97.68               | Average  | H               | 49.07       | -9.54                           | 48.85                   | 53.98          | -5.13       |
| * 21120.00      | -97.55               | Peak     | H               | 49.07       | -9.54                           | 48.98                   | 73.98          | -25.00      |
| 26400.00        | -89.88               | Peak     | H               | 51.37       | -9.54                           | 58.94                   | 68.20          | -9.26       |

**Table 6-18. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5320MHz  
 Channel: 64

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Ant. Pol. [H/V] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------------------|----------|-----------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 10640.00      | -114.75              | Average  | H               | 46.64       | 0.00                            | 38.89                   | 53.98          | -15.09      |
| * 10640.00      | -103.21              | Peak     | H               | 46.64       | 0.00                            | 50.43                   | 73.98          | -23.55      |
| * 15960.00      | -118.28              | Average  | H               | 50.49       | 0.00                            | 39.21                   | 53.98          | -14.77      |
| * 15960.00      | -106.58              | Peak     | H               | 50.49       | 0.00                            | 50.91                   | 73.98          | -23.07      |
| * 21280.00      | -99.55               | Average  | H               | 49.15       | -9.54                           | 47.06                   | 53.98          | -6.92       |
| * 21280.00      | -95.58               | Peak     | H               | 49.15       | -9.54                           | 51.03                   | 73.98          | -22.95      |
| 26600.00        | -103.88              | Peak     | H               | 47.61       | -9.54                           | 41.19                   | 68.20          | -27.01      |

**Table 6-19. Radiated Measurements**

|                                      |                                                                                     |                                                                  |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFVK815                     |  | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015                                                 | EUT Type:<br>Portable Tablet                                     |                                                                                       | Page 67 of 100                  |

Worst Case Mode: 802.11a  
Worst Case Transfer Rate: 6 Mbps  
Distance of Measurements: 1 & 3 Meters  
Operating Frequency: 5500MHz  
Channel: 100

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Ant. Pol. [H/V] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------------------|----------|-----------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11000.00      | -113.93              | Average  | H               | 46.98       | 0.00                            | 40.05                   | 53.98          | -13.93      |
| * 11000.00      | -103.84              | Peak     | H               | 46.98       | 0.00                            | 50.14                   | 73.98          | -23.84      |
| 16500.00        | -106.33              | Peak     | H               | 52.45       | 0.00                            | 53.12                   | 68.20          | -15.09      |
| 22000.00        | -83.87               | Peak     | H               | 49.46       | -9.54                           | 63.05                   | 68.20          | -5.15       |
| 27500.00        | -102.63              | Peak     | H               | 47.92       | -9.54                           | 42.75                   | 68.20          | -25.45      |

**Table 6-20. Radiated Measurements**

Worst Case Mode: 802.11a  
Worst Case Transfer Rate: 6 Mbps  
Distance of Measurements: 1 & 3 Meters  
Operating Frequency: 5580MHz  
Channel: 116

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Ant. Pol. [H/V] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------------------|----------|-----------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11160.00      | -114.05              | Average  | H               | 47.20       | 0.00                            | 40.16                   | 53.98          | -13.82      |
| * 11160.00      | -104.14              | Peak     | H               | 47.20       | 0.00                            | 50.07                   | 73.98          | -23.91      |
| 16740.00        | -106.49              | Peak     | H               | 53.73       | 0.00                            | 54.24                   | 68.20          | -13.96      |
| * 22320.00      | -96.42               | Average  | H               | 49.87       | -9.54                           | 50.91                   | 53.98          | -3.07       |
| * 22320.00      | -92.96               | Peak     | H               | 49.87       | -9.54                           | 54.37                   | 73.98          | -19.61      |
| 27900.00        | -103.59              | Peak     | H               | 48.09       | -9.54                           | 41.96                   | 68.20          | -26.24      |

**Table 6-21. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5700MHz  
 Channel: 140

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Ant. Pol. [H/V] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------------------|----------|-----------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11400.00      | -114.01              | Average  | H               | 47.64       | 0.00                            | 40.63                   | 53.98          | -13.34      |
| * 11400.00      | -103.89              | Peak     | H               | 47.64       | 0.00                            | 50.75                   | 73.98          | -23.22      |
| 17100.00        | -106.75              | Peak     | H               | 54.67       | 0.00                            | 54.92                   | 68.20          | -13.28      |
| * 22800.00      | -96.60               | Average  | H               | 49.98       | -9.54                           | 50.84                   | 53.98          | -3.14       |
| * 22800.00      | -92.90               | Peak     | H               | 49.98       | -9.54                           | 54.54                   | 73.98          | -19.44      |
| 28500.00        | -103.88              | Peak     | H               | 48.35       | -9.54                           | 41.93                   | 68.20          | -26.27      |

**Table 6-22. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5745MHz  
 Channel: 149

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Ant. Pol. [H/V] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------------------|----------|-----------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11490.00      | -112.19              | Average  | H               | 47.88       | 0.00                            | 42.69                   | 53.98          | -11.29      |
| * 11490.00      | -102.62              | Peak     | H               | 47.88       | 0.00                            | 52.26                   | 73.98          | -21.72      |
| 17235.00        | -105.68              | Peak     | H               | 54.99       | 0.00                            | 56.32                   | 68.20          | -11.88      |
| * 22980.00      | -101.11              | Average  | H               | 49.94       | -9.54                           | 46.28                   | 53.98          | -7.69       |
| * 22980.00      | -97.00               | Peak     | H               | 49.94       | -9.54                           | 50.39                   | 73.98          | -23.58      |
| 28725.00        | -104.16              | Peak     | H               | 48.26       | -9.54                           | 41.56                   | 68.20          | -26.64      |

**Table 6-23. Radiated Measurements**

|                                      |                                                                                     |                                                                  |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFVK815                     |  | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015                                                 | EUT Type:<br>Portable Tablet                                     |                                                                                       | Page 69 of 100                  |

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5785MHz  
 Channel: 157

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Ant. Pol. [H/V] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------------------|----------|-----------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11570.00      | -113.13              | Average  | H               | 48.15       | 0.00                            | 42.02                   | 53.98          | -11.96      |
| * 11570.00      | -103.68              | Peak     | H               | 48.15       | 0.00                            | 51.47                   | 73.98          | -22.51      |
| 17355.00        | -107.22              | Peak     | H               | 55.40       | 0.00                            | 55.19                   | 68.20          | -13.01      |
| 23140.00        | -87.73               | Peak     | H               | 50.05       | -9.54                           | 59.78                   | 68.20          | -8.42       |
| 28925.00        | -104.32              | Peak     | H               | 48.28       | -9.54                           | 41.41                   | 68.20          | -26.79      |

**Table 6-24. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5825MHz  
 Channel: 165

| Frequency [MHz] | Analyzer Level [dBm] | Detector | Ant. Pol. [H/V] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------------------|----------|-----------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11650.00      | -112.32              | Average  | H               | 48.38       | 0.00                            | 43.06                   | 53.98          | -10.92      |
| * 11650.00      | -103.32              | Peak     | H               | 48.38       | 0.00                            | 52.06                   | 73.98          | -21.92      |
| 17475.00        | -106.95              | Peak     | H               | 56.02       | 0.00                            | 56.08                   | 68.20          | -12.12      |
| 23300.00        | -87.74               | Peak     | H               | 50.10       | -9.54                           | 59.81                   | 68.20          | -8.39       |
| 29125.00        | -104.38              | Peak     | H               | 48.24       | -9.54                           | 41.32                   | 68.20          | -26.88      |

**Table 6-25. Radiated Measurements**

## 6.7.2 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5180MHz

Channel: 36

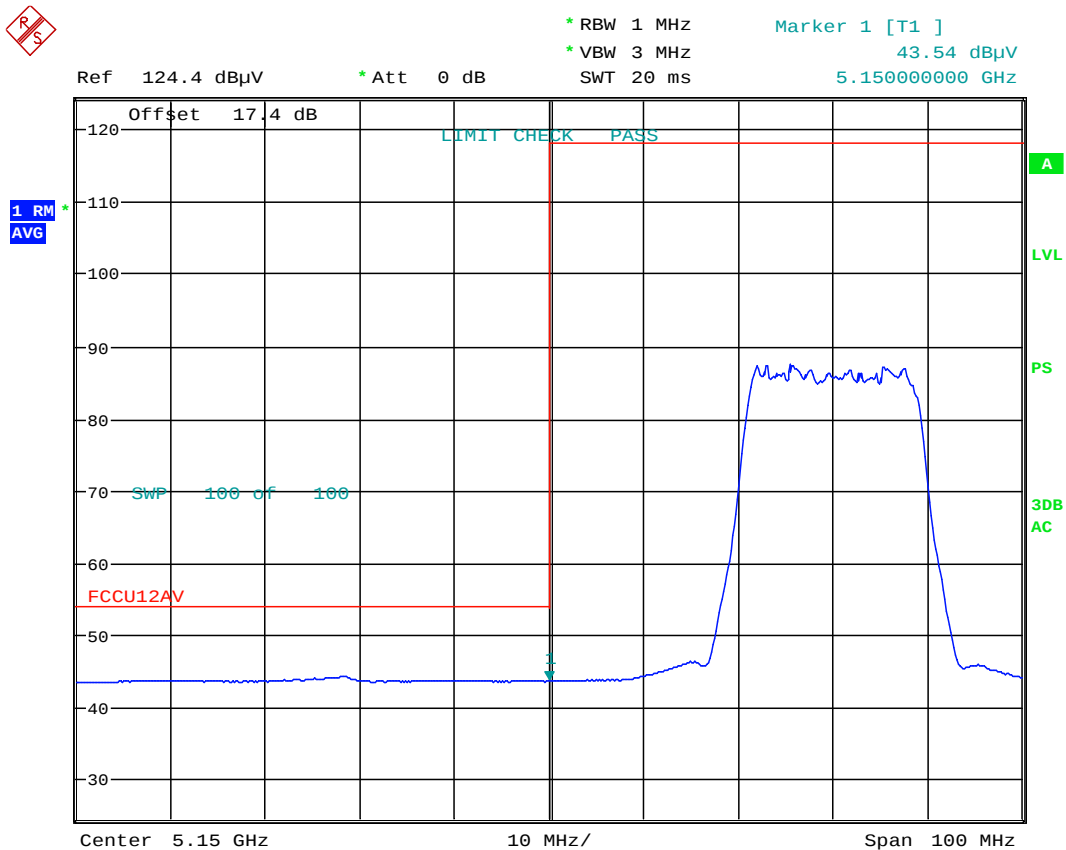

Date: 11.FEB.2015 14:37:27

**Plot 6-75. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)**

|                                      |                                               |                                                                     |                                        |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|----------------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>Reviewed by:</b><br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        | Page 71 of 100                         |


# Radiated Band Edge Measurements (20MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209



**MARKER 2**  
5.125769231 GHz  
Ref 124.4 dBμV \* Att 0 dB

\* RBW 1 MHz  
\* VBW 3 MHz  
SWT 20 ms

Marker 2 [T2]  
56.43 dBμV  
5.125769231 GHz

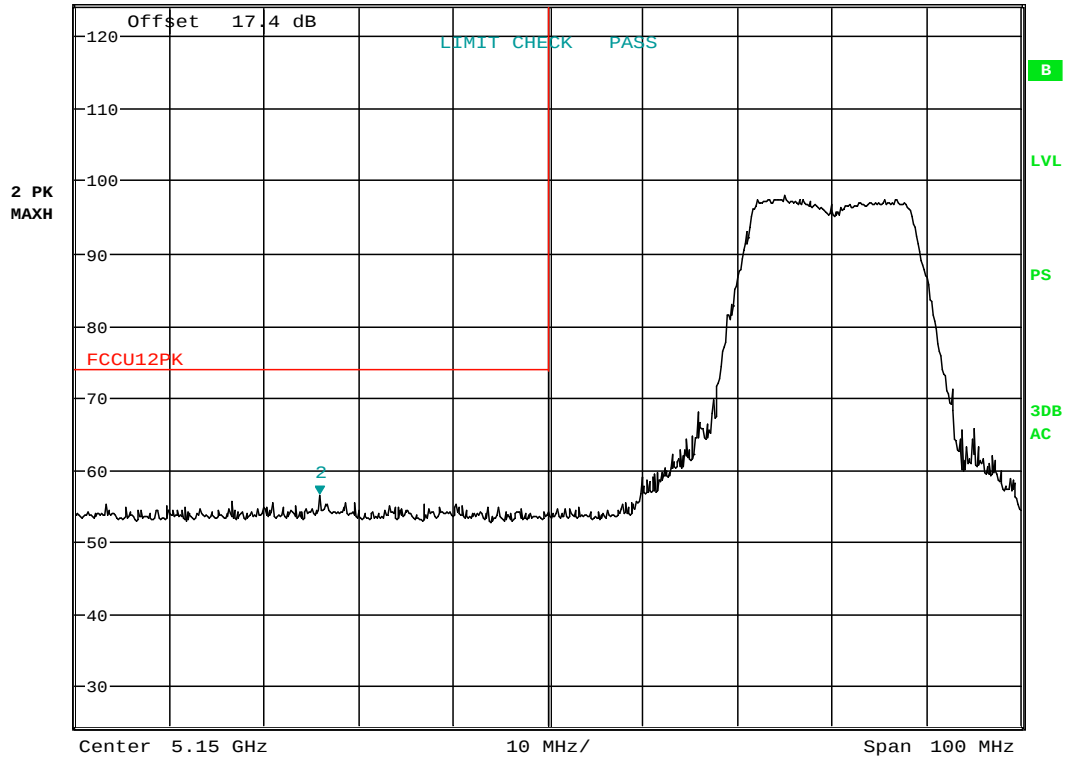

Date: 11.FEB.2015 14:38:58

**Plot 6-76. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)**

|                                      |                                               |                                                                     |  |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|--|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |  | Page 72 of 100                  |

# Radiated Band Edge Measurements (20MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209

Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5320MHz


Channel: 64



**MARKER 1**  
5.371730769 GHz  
Ref 124.8 dBμV \* Att 0 dB

\* RBW 1 MHz  
\* VBW 3 MHz  
SWT 20 ms

Marker 1 [T1]  
45.25 dBμV  
5.371730769 GHz

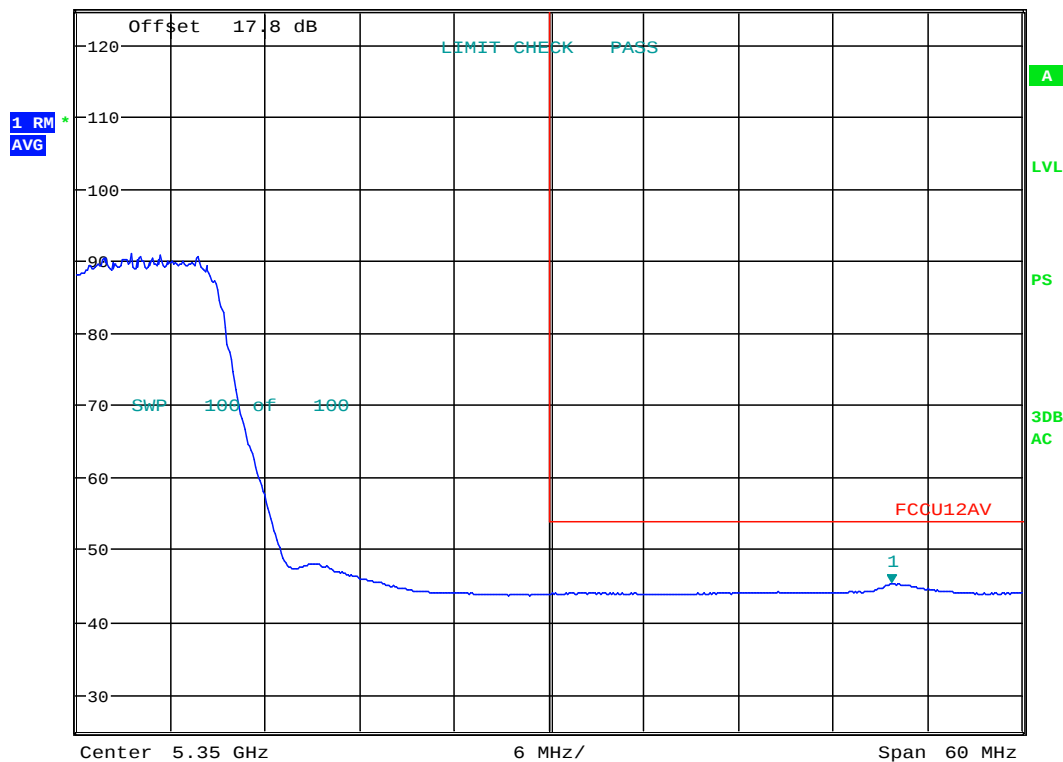

Date: 11.FEB.2015 14:43:27

**Plot 6-77. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)**

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 73 of 100                  |


# Radiated Band Edge Measurements (20MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209



**MARKER 2**  
5.371634615 GHz  
Ref 124.8 dBμV \* Att 0 dB

\* RBW 1 MHz  
\* VBW 3 MHz  
SWT 20 ms

Marker 2 [T2]  
57.45 dBμV  
5.371634615 GHz

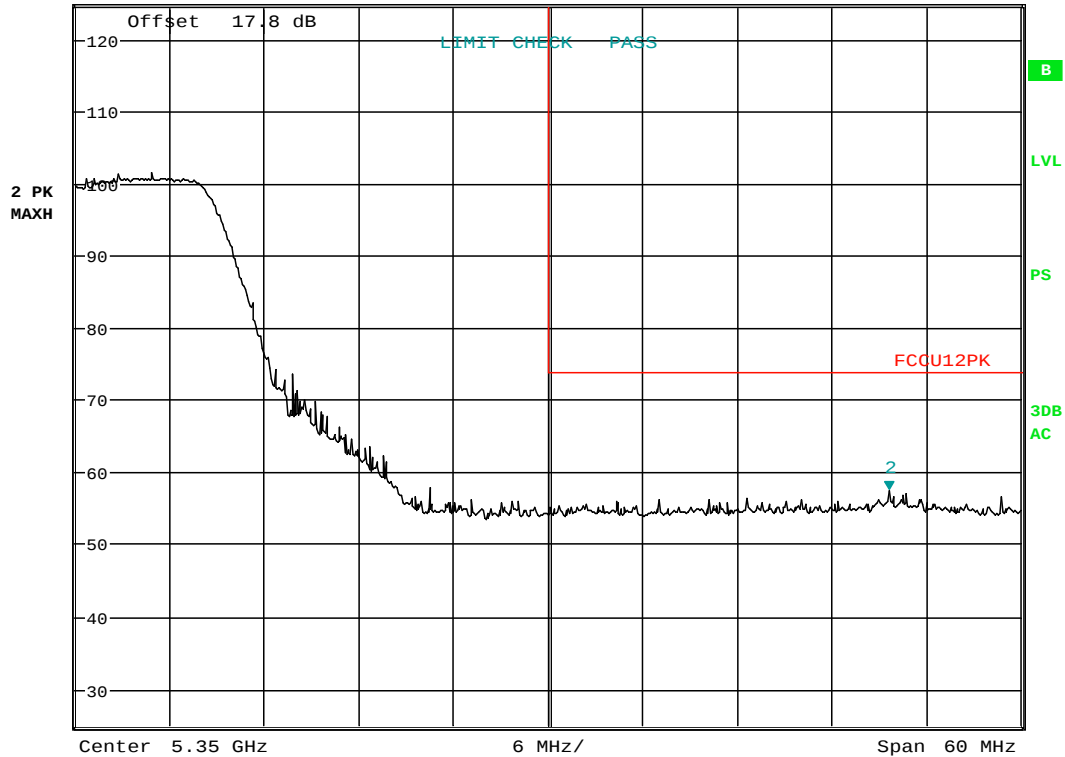

Date: 11.FEB.2015 14:45:04

**Plot 6-78. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)**

|                                      |                                               |                                                                     |                                        |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|----------------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>Reviewed by:</b><br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        | Page 74 of 100                         |

# Radiated Band Edge Measurements (20MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5500MHz

Channel: 100

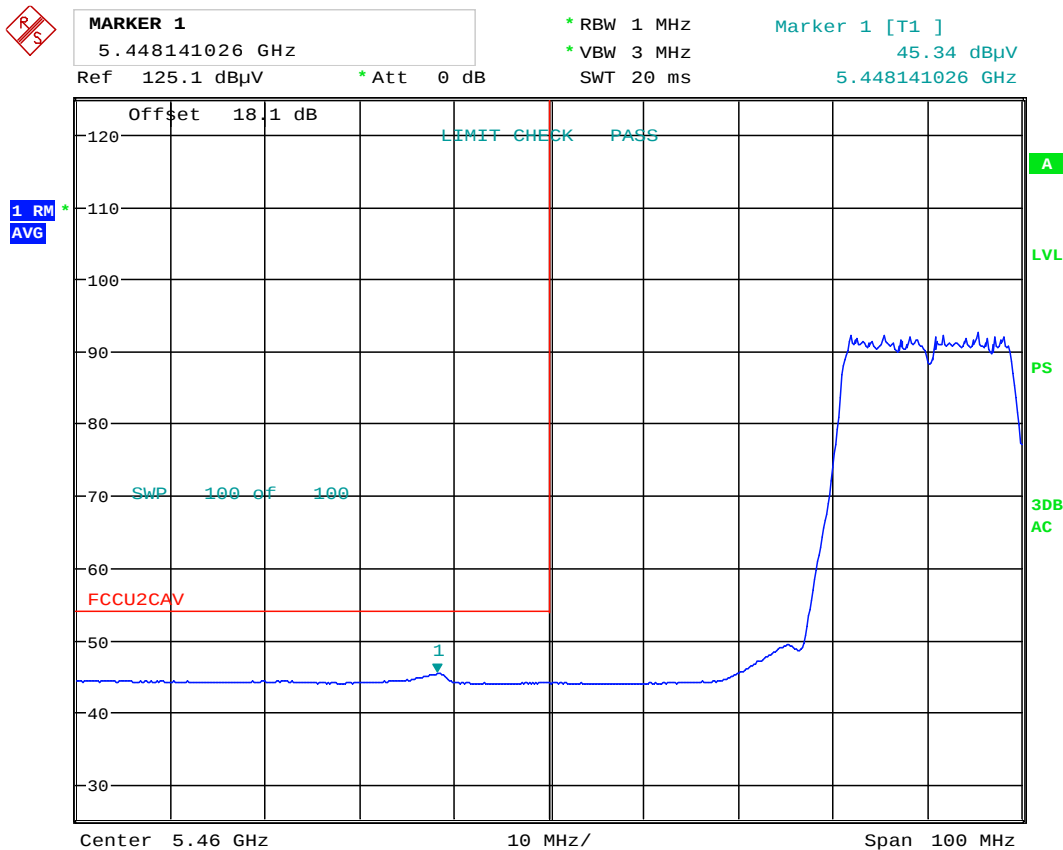

Date: 11.FEB.2015 14:49:04

**Plot 6-79. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)**

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 75 of 100                  |


# Radiated Band Edge Measurements (20MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209



**MARKER 2**  
5.448301282 GHz  
Ref 125.1 dBμV \* Att 0 dB

\* RBW 1 MHz  
\* VBW 3 MHz  
SWT 20 ms

Marker 2 [T2]  
55.80 dBμV  
5.448301282 GHz

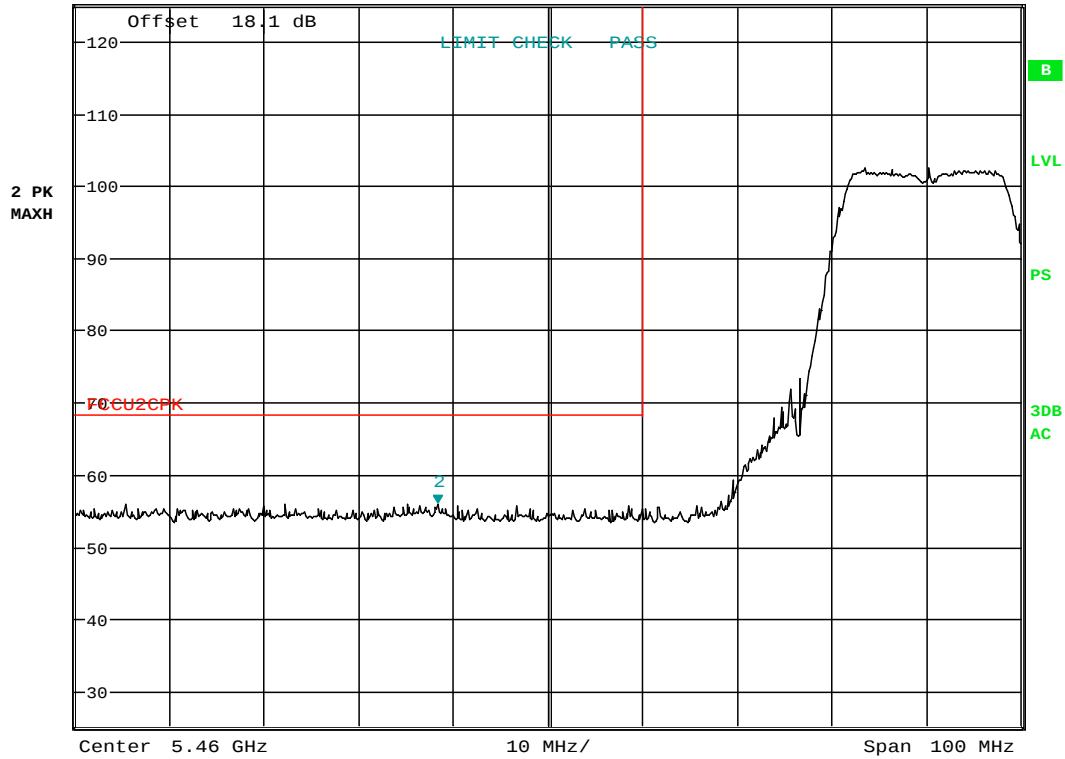


Date: 11.FEB.2015 14:49:45

**Plot 6-80. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)**

|                                      |                                               |                                                                     |  |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|--|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |  | Page 76 of 100                  |

# Radiated Band Edge Measurements (20MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209

Worst Case Mode: 802.11a  
Worst Case Transfer Rate: 6 Mbps  
Distance of Measurements: 3 Meters  
Operating Frequency: 5700MHz  
Channel: 140

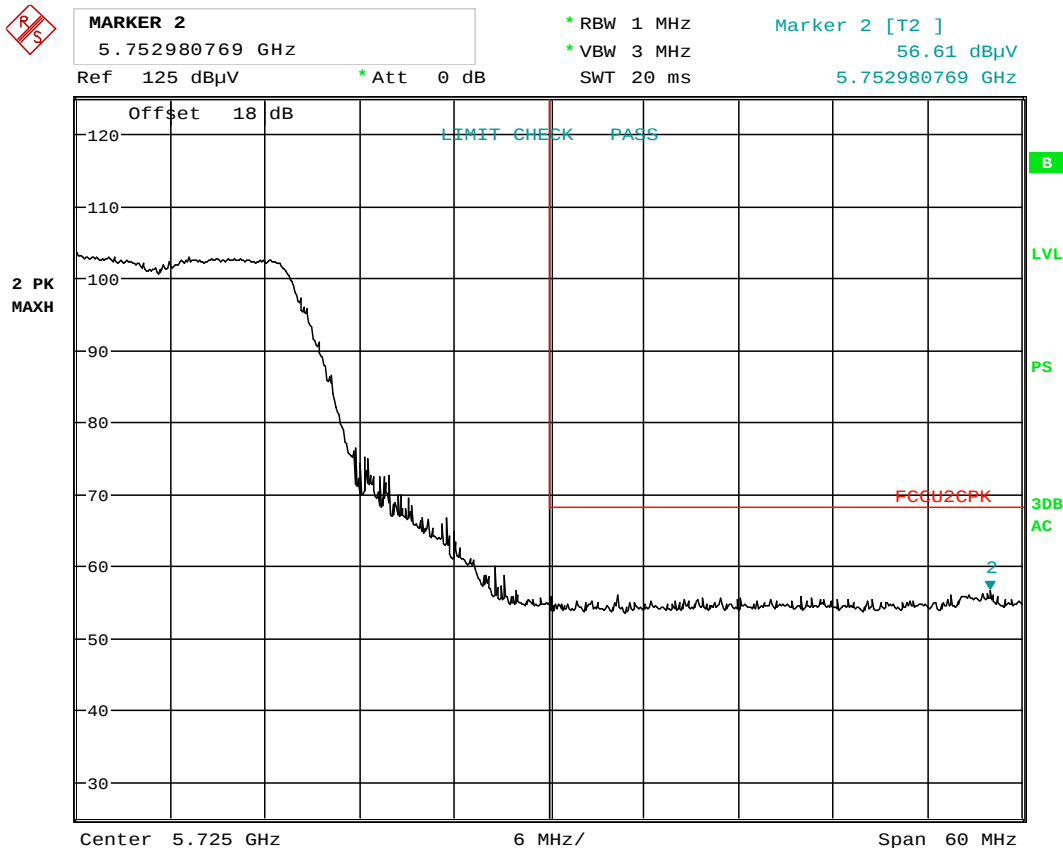


Date: 11.FEB.2015 14:52:30

**Plot 6-81. Radiated Upper Band Edge Plot (Peak – UNII Band 2C)**

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 77 of 100                  |

# Radiated Band Edge Measurements (20MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209

Worst Case Mode: 802.11a  
Worst Case Transfer Rate: 6 Mbps  
Distance of Measurements: 3 Meters  
Operating Frequency: 5745MHz  
Channel: 149

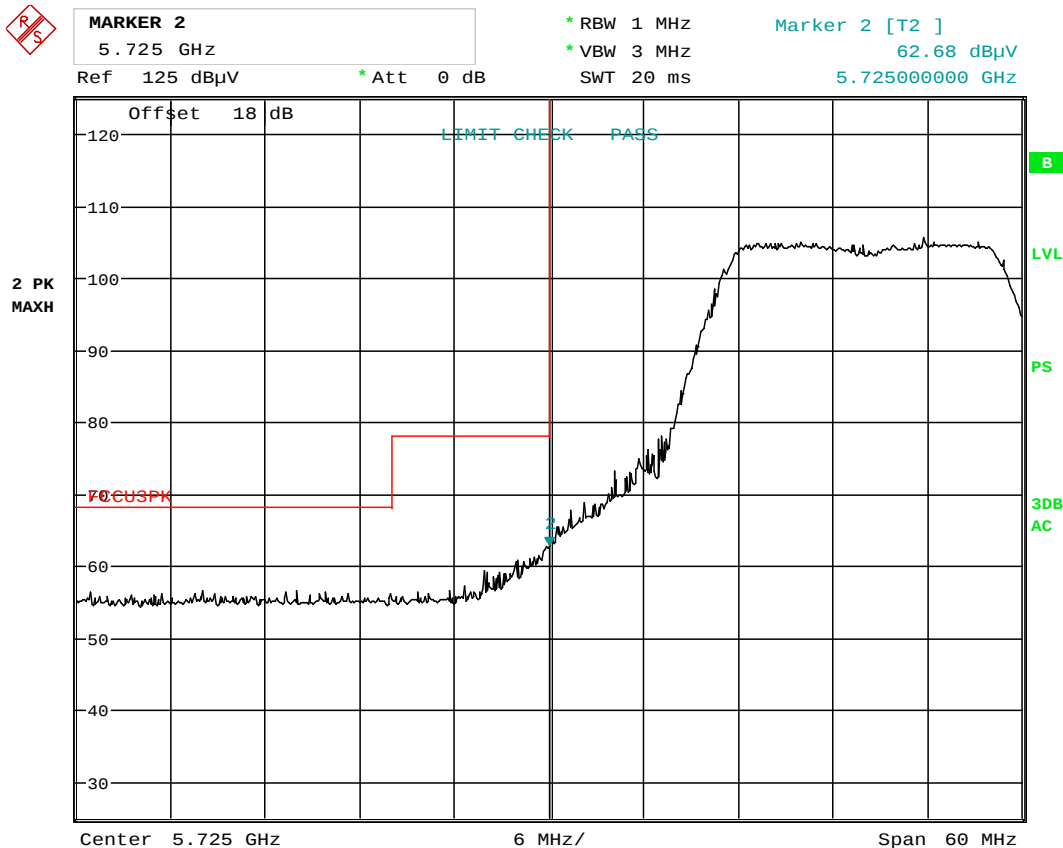

Date: 11.FEB.2015 14:55:27

**Plot 6-82. Radiated Lower Band Edge Plot (Peak – UNII Band 3)**

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 78 of 100                  |

# Radiated Band Edge Measurements (20MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5825MHz

Channel: 165

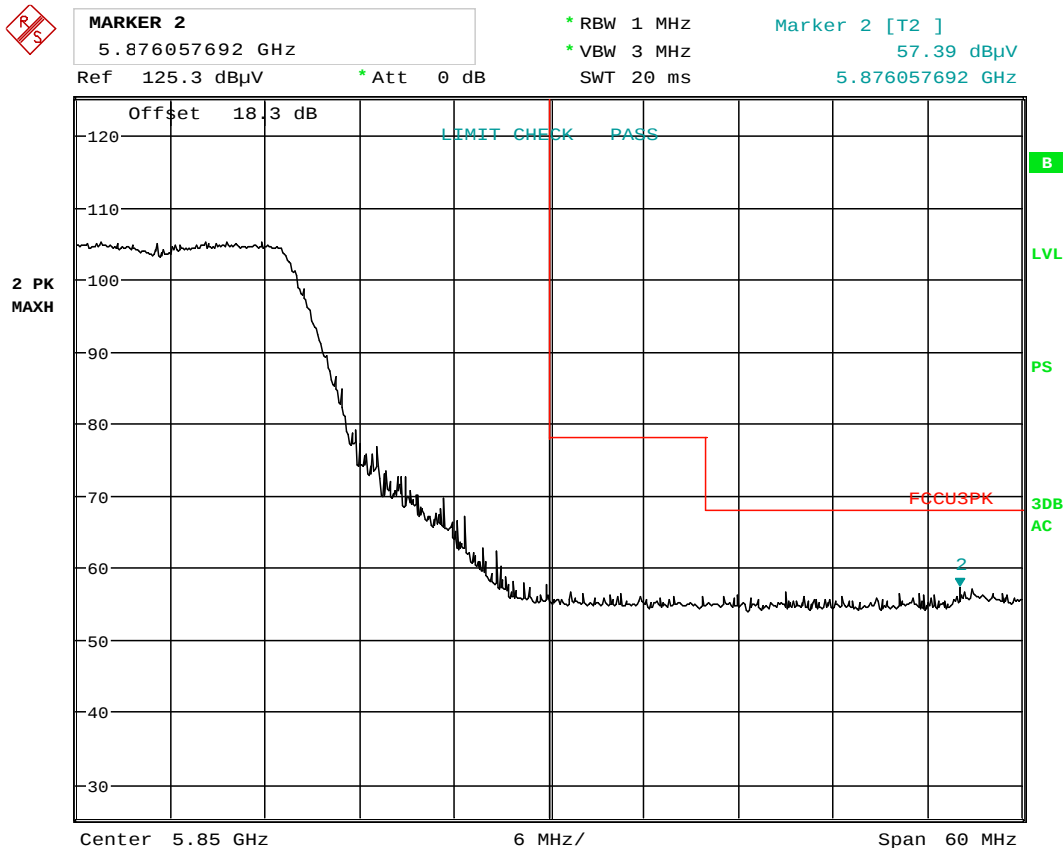

Date: 11.FEB.2015 14:57:09

**Plot 6-83. Radiated Upper Band Edge Plot (Peak – UNII Band 3)**

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 79 of 100                  |

### 6.7.3 Radiated Band Edge Measurements (40MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5190MHz

Channel: 38

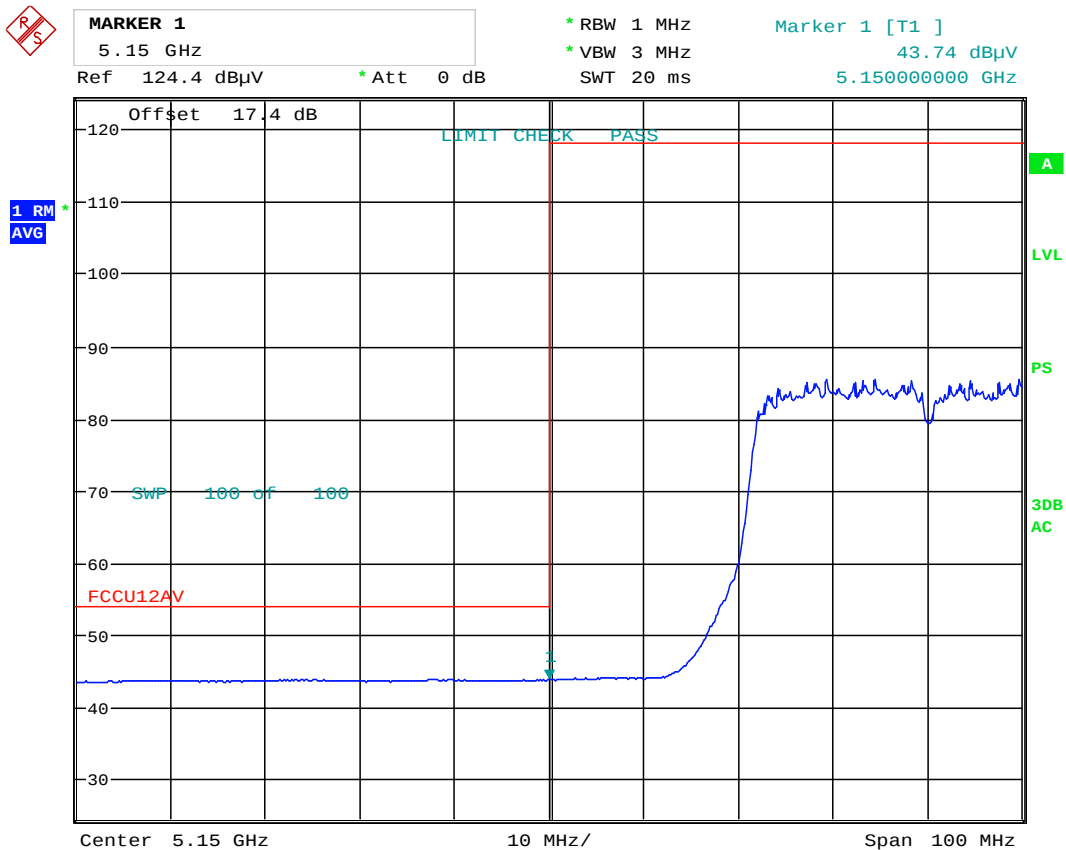

Date: 11.FEB.2015 15:03:25

**Plot 6-84. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)**

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 80 of 100                  |

## Radiated Band Edge Measurements (40MHz BW)


\$15.407(b.1)(b.2) \$15.205 \$15.209



**MARKER 2**  
5.15 GHz  
Ref 124.4 dBμV \* Att 0 dB

\* RBW 1 MHz  
\* VBW 3 MHz  
SWT 20 ms

Marker 2 [T2]  
54.95 dBμV  
5.150000000 GHz

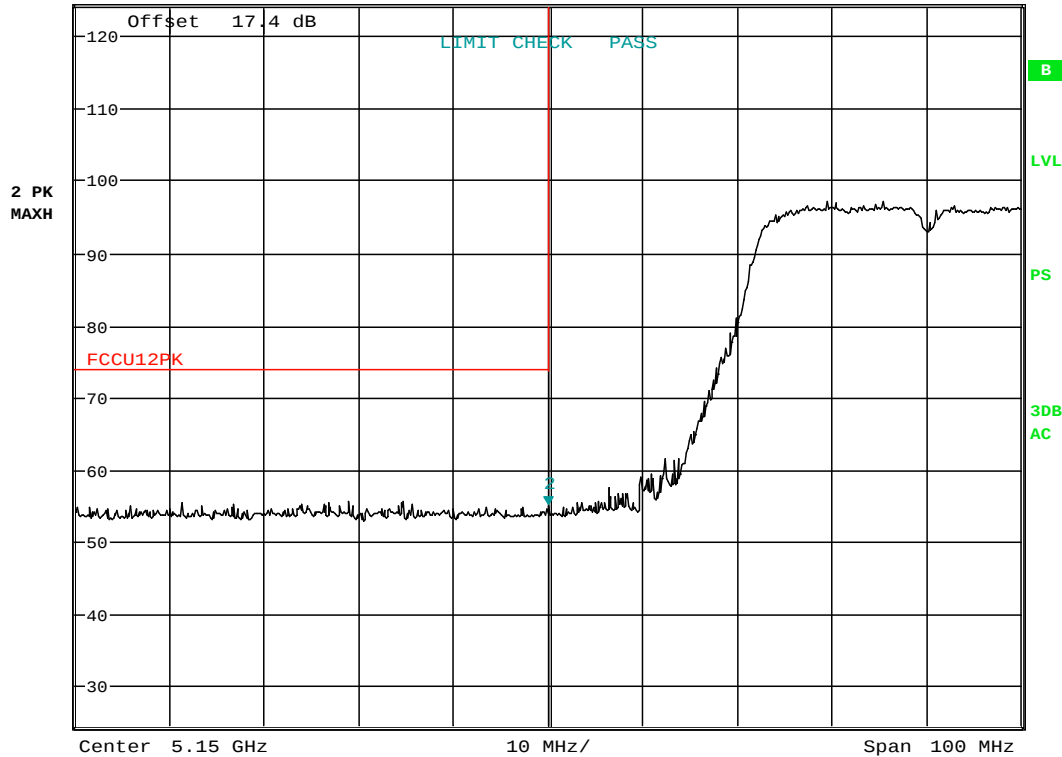

Date: 11.FEB.2015 15:04:40

**Plot 6-85. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)**

|                                      |                                               |                                                                     |    |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|----|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | LG | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |    | Page 81 of 100                  |

# Radiated Band Edge Measurements (40MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5310MHz

Channel: 62

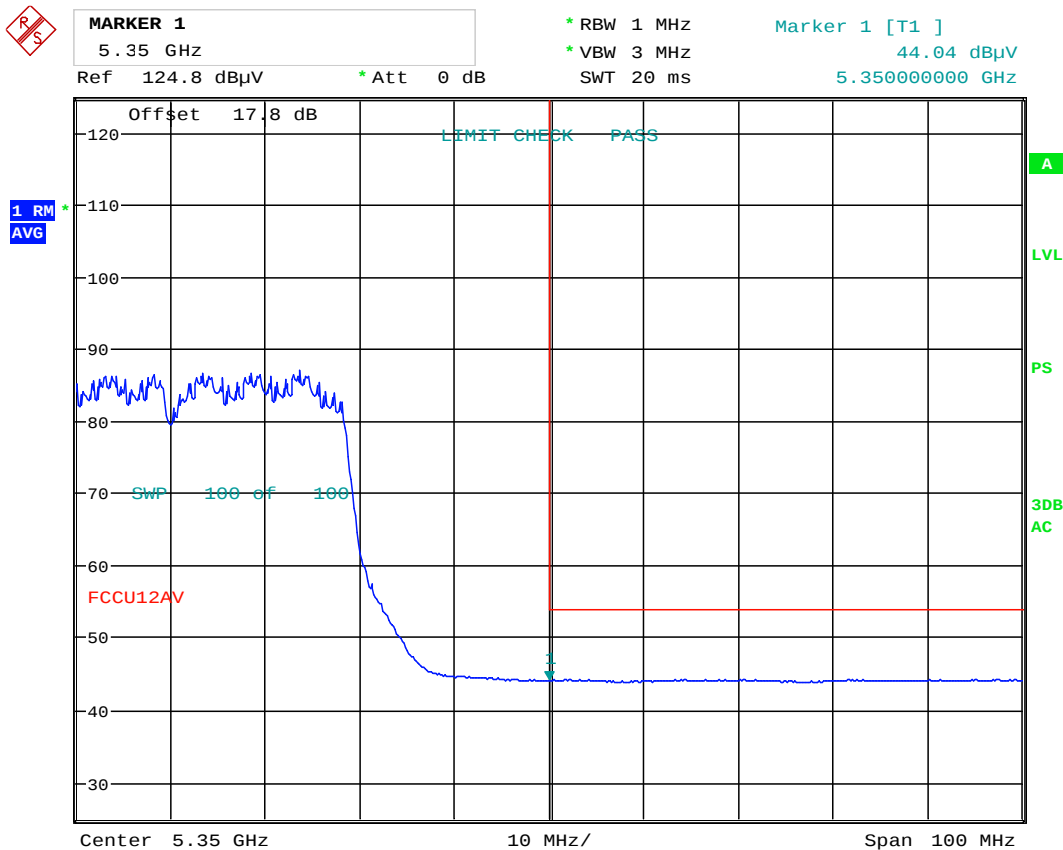

Date: 11.FEB.2015 15:07:47

**Plot 6-86. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)**

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 82 of 100                  |


# Radiated Band Edge Measurements (40MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209



**MARKER 2**  
5.350320513 GHz  
Ref 124.8 dBμV \* Att 0 dB

\* RBW 1 MHz  
\* VBW 3 MHz  
SWT 20 ms

Marker 2 [T2]  
55.57 dBμV  
5.350320513 GHz

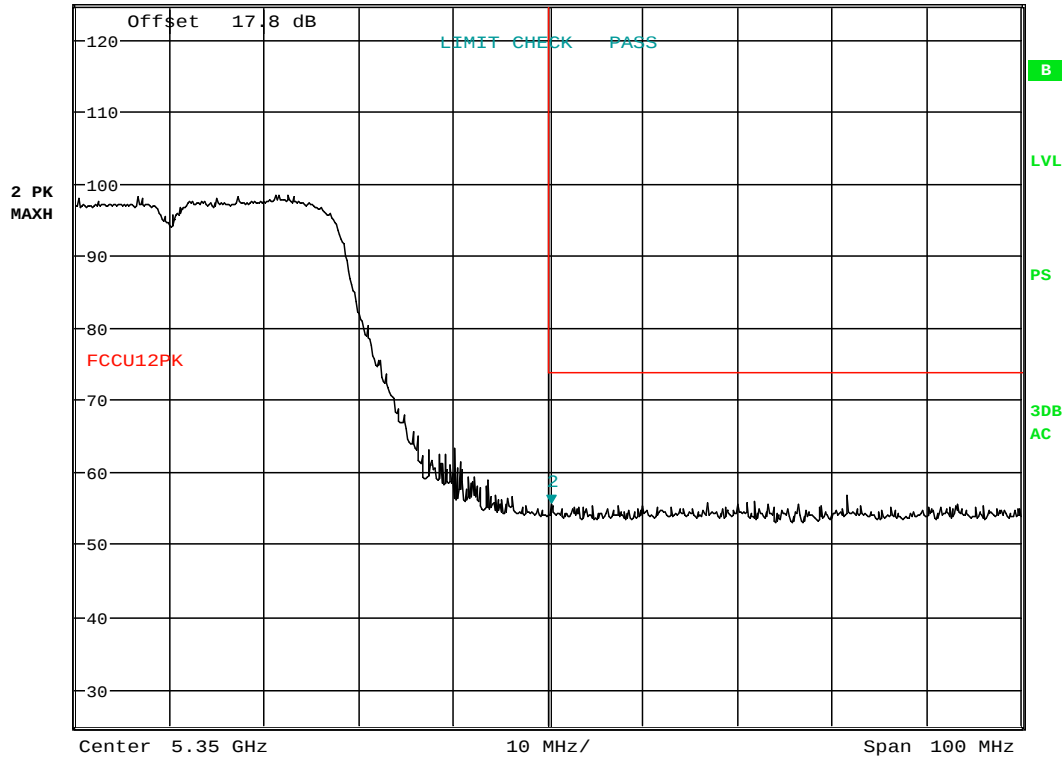

Date: 11.FEB.2015 15:08:14

**Plot 6-87. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)**

|                                      |                                               |                                                                     |  |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|--|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |  | Page 83 of 100                  |

# Radiated Band Edge Measurements (40MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5510MHz

Channel: 102

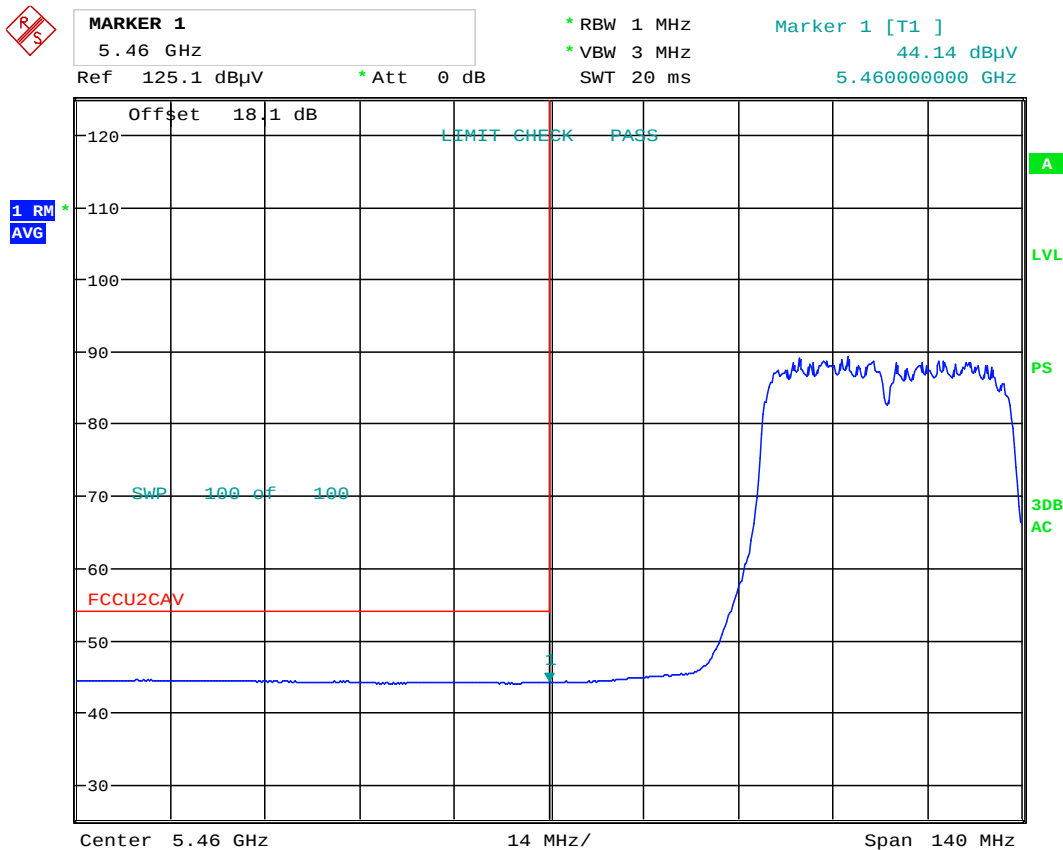

Date: 11.FEB.2015 15:11:40

**Plot 6-88. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)**

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 84 of 100                  |


# Radiated Band Edge Measurements (40MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209



**MARKER 2**  
5.465833333 GHz  
Ref 125.1 dBμV \* Att 0 dB

\* RBW 1 MHz  
\* VBW 3 MHz  
SWT 20 ms

Marker 2 [T2]  
56.67 dBμV  
5.465833333 GHz

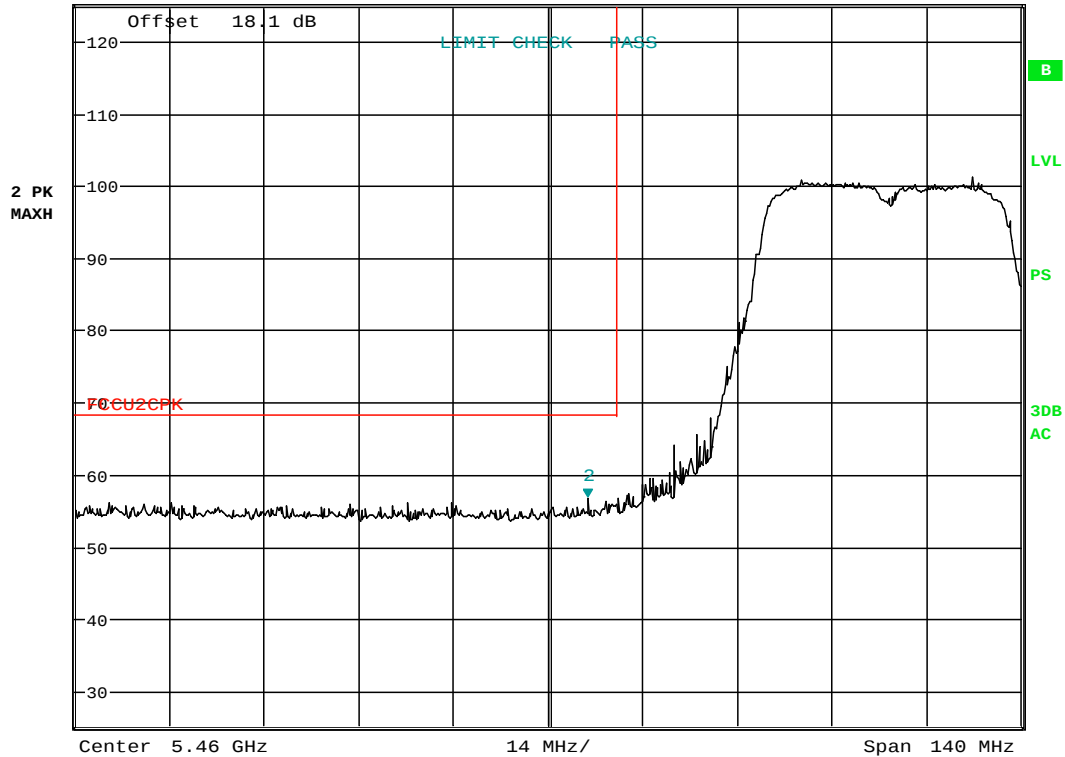

Date: 11.FEB.2015 15:12:19

**Plot 6-89. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)**

|                                      |                                               |                                                                     |  |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|--|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |  | Page 85 of 100                  |

## Radiated Band Edge Measurements (40MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5670MHz

Channel: 134

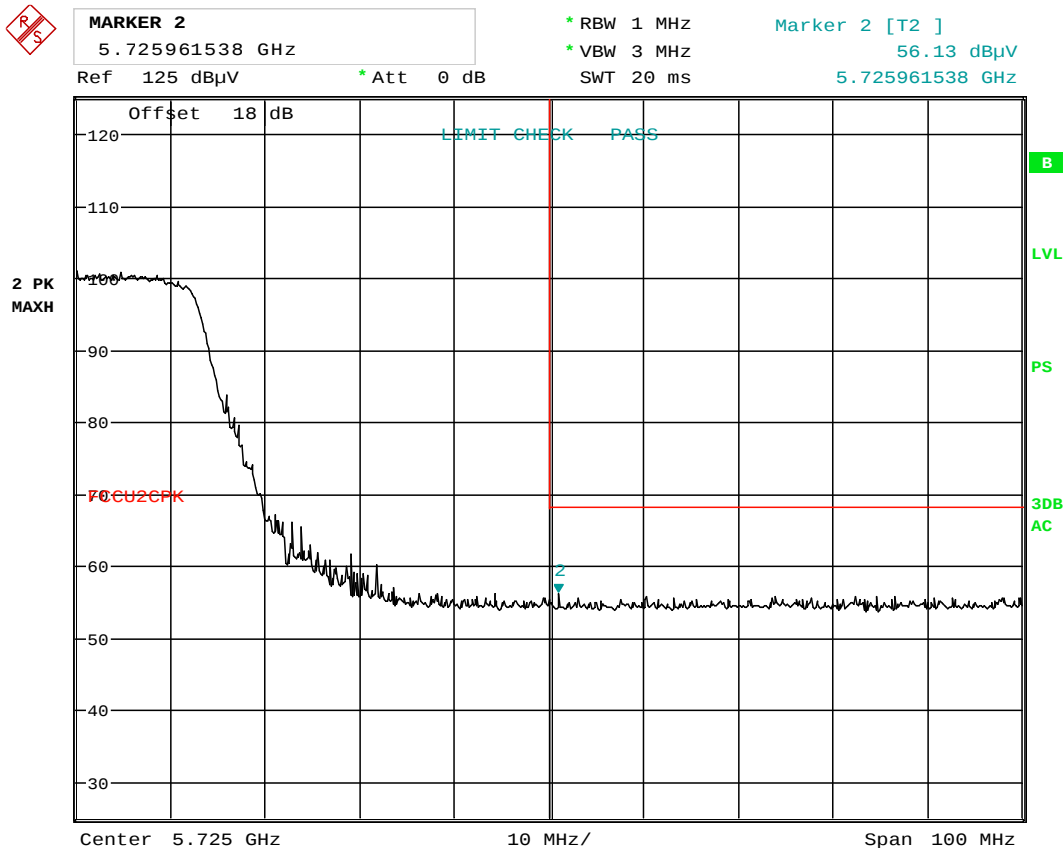

Date: 11.FEB.2015 15:14:43

**Plot 6-90. Radiated Upper Band Edge Plot (Peak – UNII Band 2C)**

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 86 of 100                  |

# Radiated Band Edge Measurements (40MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5755MHz

Channel: 151

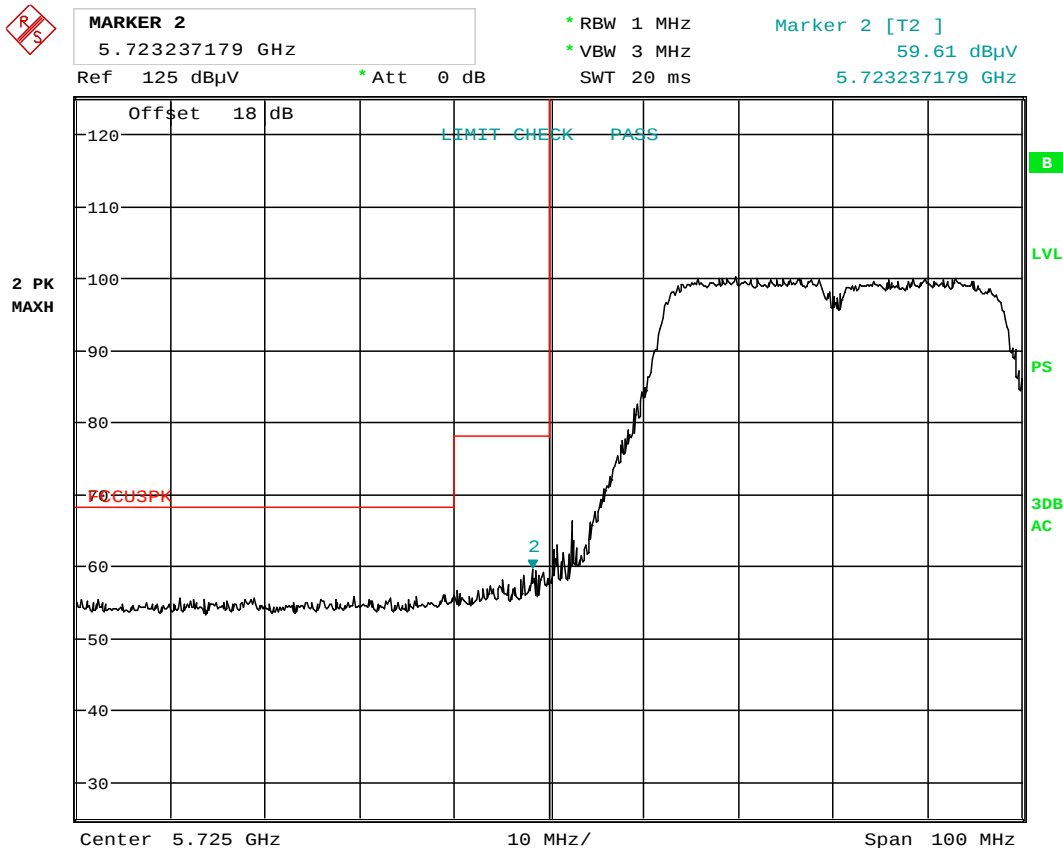

Date: 11.FEB.2015 15:17:00

**Plot 6-91. Radiated Lower Band Edge Plot (Peak – UNII Band 3)**

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 87 of 100                  |

# Radiated Band Edge Measurements (40MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5795MHz

Channel: 159

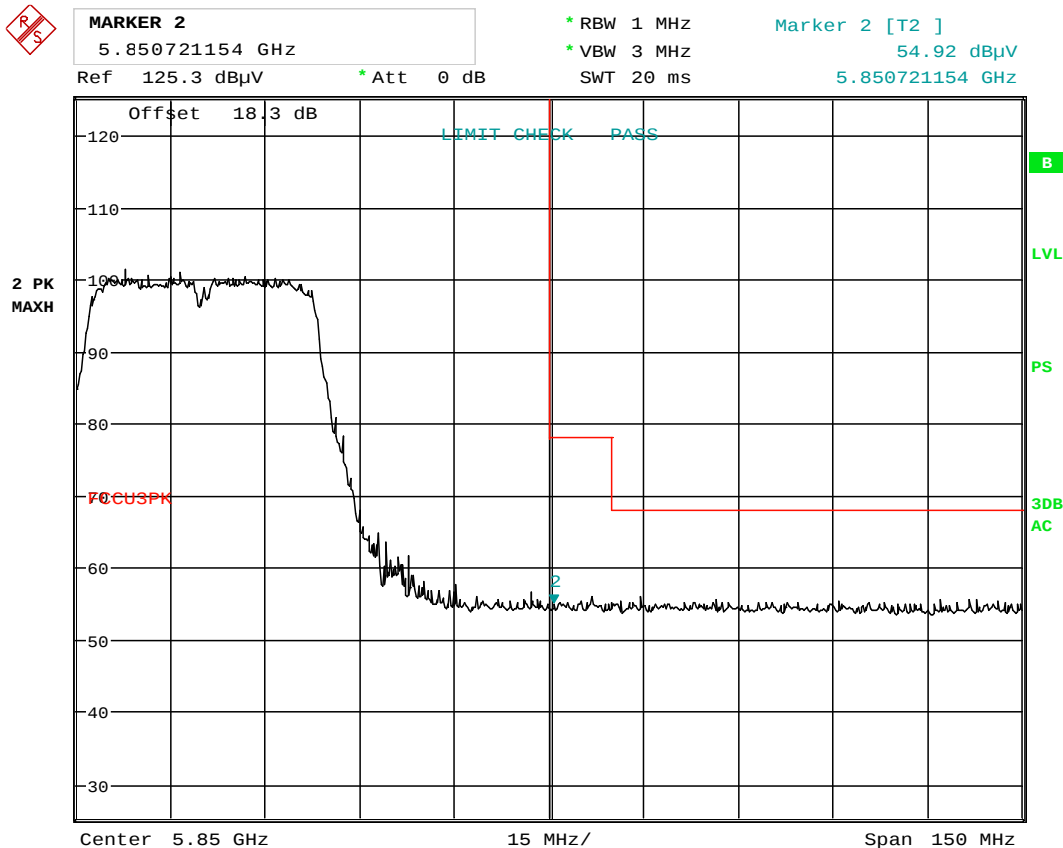

Date: 11.FEB.2015 15:18:35

**Plot 6-92. Radiated Upper Band Edge Plot (Peak – UNII Band 3)**

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 88 of 100                  |

## 6.8 Radiated Spurious Emissions Measurements – Below 1GHz

### §15.209

#### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 6-26 per Section 15.209.***

| Frequency         | Field Strength<br>[μV/m] | Measured Distance<br>[Meters] |
|-------------------|--------------------------|-------------------------------|
| 0.009 – 0.490 MHz | 2400/F (kHz)             | 300                           |
| 0.490 – 1.705 MHz | 24000/F (kHz)            | 30                            |
| 1.705 – 30.00 MHz | 30                       | 30                            |
| 30.00 – 88.00 MHz | 100                      | 3                             |
| 88.00 – 216.0 MHz | 150                      | 3                             |
| 216.0 – 960.0 MHz | 200                      | 3                             |
| Above 960.0 MHz   | 500                      | 3                             |

**Table 6-26. Radiated Limits**

#### Test Procedures Used

ANSI C63.4-2009

#### Test Settings


##### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

|                                             |                                                                                                                                   |                                                                             |                                                                                                 |                                        |
|---------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> ZNFVK815                     |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |  <b>LG</b> | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>0Y1502020341.ZNF | <b>Test Dates:</b><br>2/3/2015 - 2/20/2015                                                                                        | <b>EUT Type:</b><br>Portable Tablet                                         | Page 89 of 100                                                                                  |                                        |

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

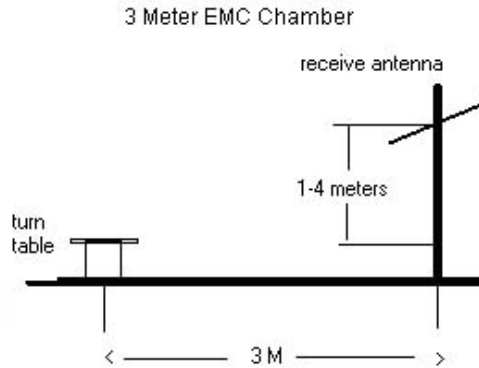

**Figure 6-6. Test Instrument & Measurement Setup**


## Test Notes

1. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 6-10.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots. Rohde & Schwarz EMC32, Version 9.15.00 automated test software was used to perform the Radiated Spurious Emissions Pre-Scan testing.


|                                             |                                               |                                                                            |                                        |
|---------------------------------------------|-----------------------------------------------|----------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT</b><br>(CERTIFICATION) | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>0Y1502020341.ZNF | <b>Test Dates:</b><br>2/3/2015 - 2/20/2015    | <b>EUT Type:</b><br>Portable Tablet                                        | Page 90 of 100                         |

## Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209

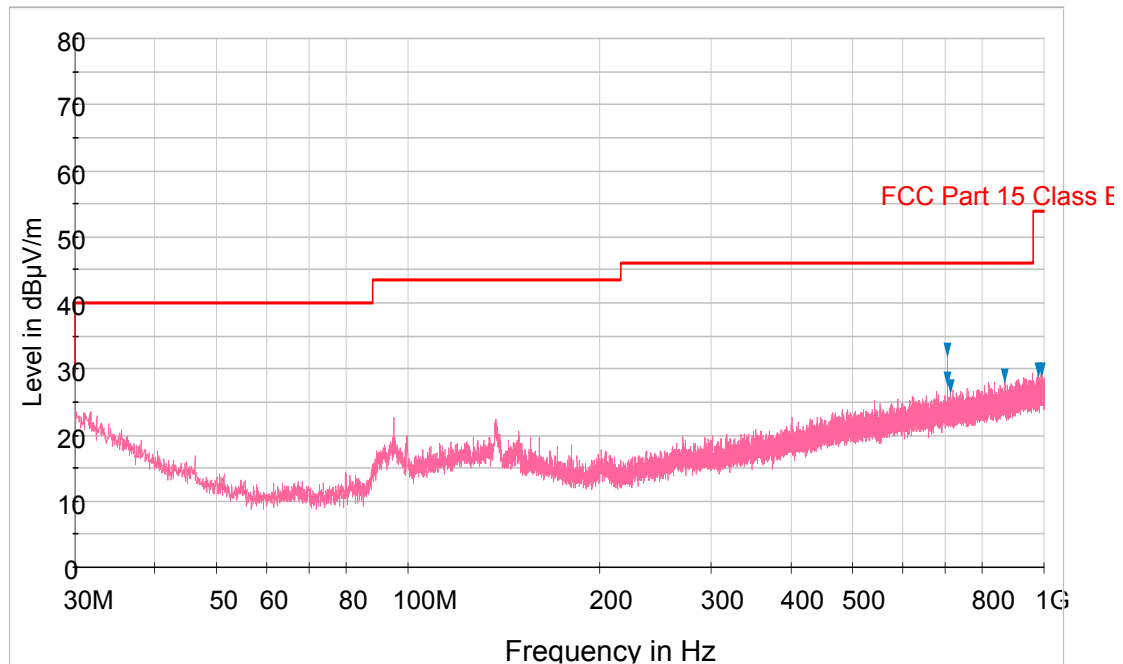

**Plot 6-93. Radiated Spurious Plot below 1GHz (802.11a – U3 Ch. 157, Ant. Pol. H)**

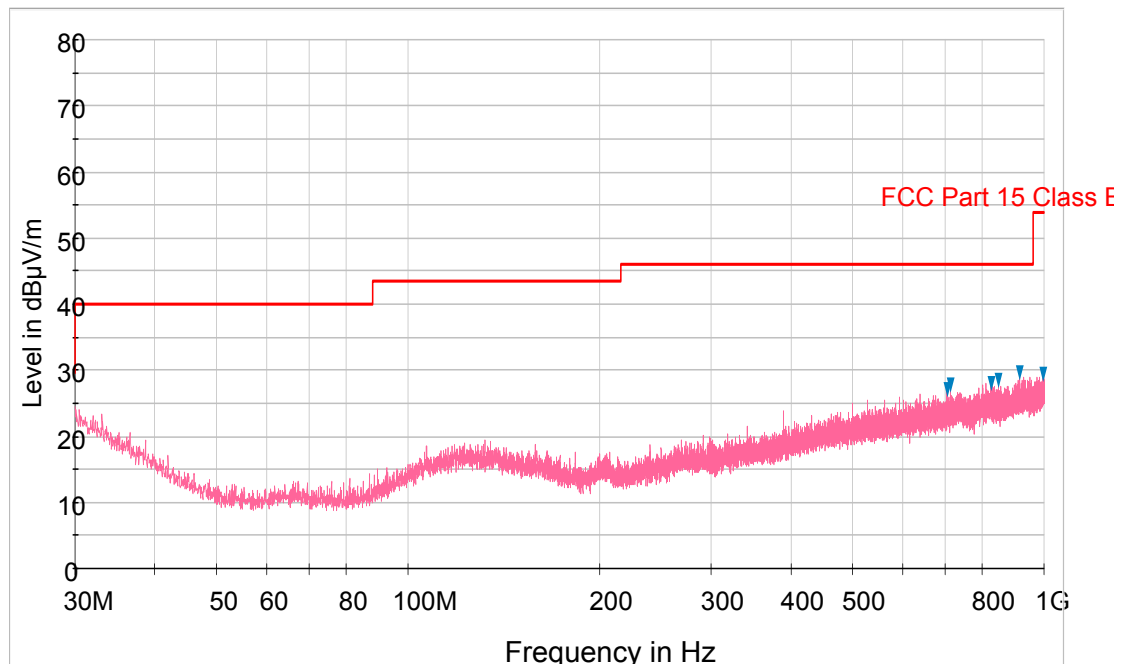


**Plot 6-94. Radiated Spurious Plot below 1GHz (802.11a – U3 Ch. 157, Ant. Pol. V)**

|                                      |                                               |                                                                     |    |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|----|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | LG | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |    | Page 91 of 100                  |

## 6.9 Line-Conducted Test Data

**\$15.407**

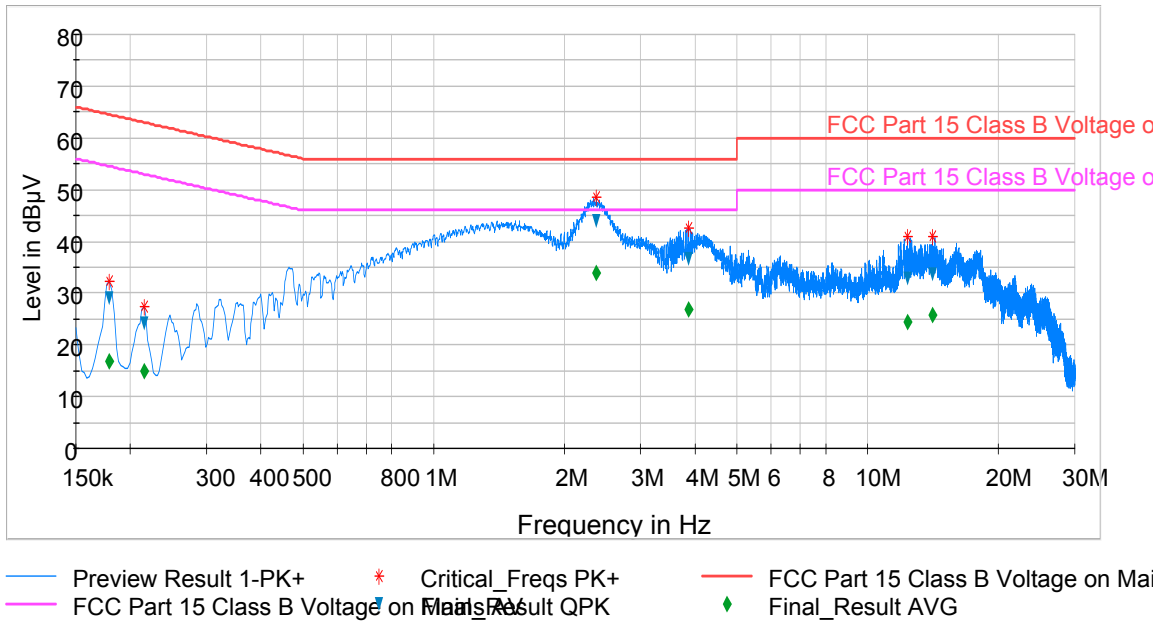

**Plot 6-95. Line Conducted Plot with 802.11a UNII Band 1 (L1)**

| Frequency<br>MHz | Line | Corr.<br>dB | QuasiPeak<br>dBμV | Limit<br>dBμV | Margin<br>dB | Average<br>dBμV | Limit<br>dBμV | Margin<br>dB |
|------------------|------|-------------|-------------------|---------------|--------------|-----------------|---------------|--------------|
| 0.179            | L1   | 0.2         | 29.00             | 64.52         | 35.52        | 16.73           | 54.52         | 37.79        |
| 0.215            | L1   | 0.2         | 24.11             | 63.00         | 38.89        | 14.85           | 53.00         | 38.15        |
| 2.373            | L1   | 0.1         | 43.82             | 56.00         | 12.18        | 33.90           | 46.00         | 12.10        |
| 3.867            | L1   | 0.2         | 36.55             | 56.00         | 19.45        | 26.73           | 46.00         | 19.27        |
| 12.334           | L1   | 0.4         | 32.91             | 60.00         | 27.09        | 24.33           | 50.00         | 25.67        |
| 14.096           | L1   | 0.4         | 33.60             | 60.00         | 26.40        | 25.72           | 50.00         | 24.28        |

**Table 6-27. Line Conducted Data with 802.11a UNII Band 1 (L1)**


**Notes:**

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 36. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

|                                      |                                               |                                                                     |  |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|--|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |  | Page 92 of 100                  |

## Line-Conducted Test Data

**\$15.407**

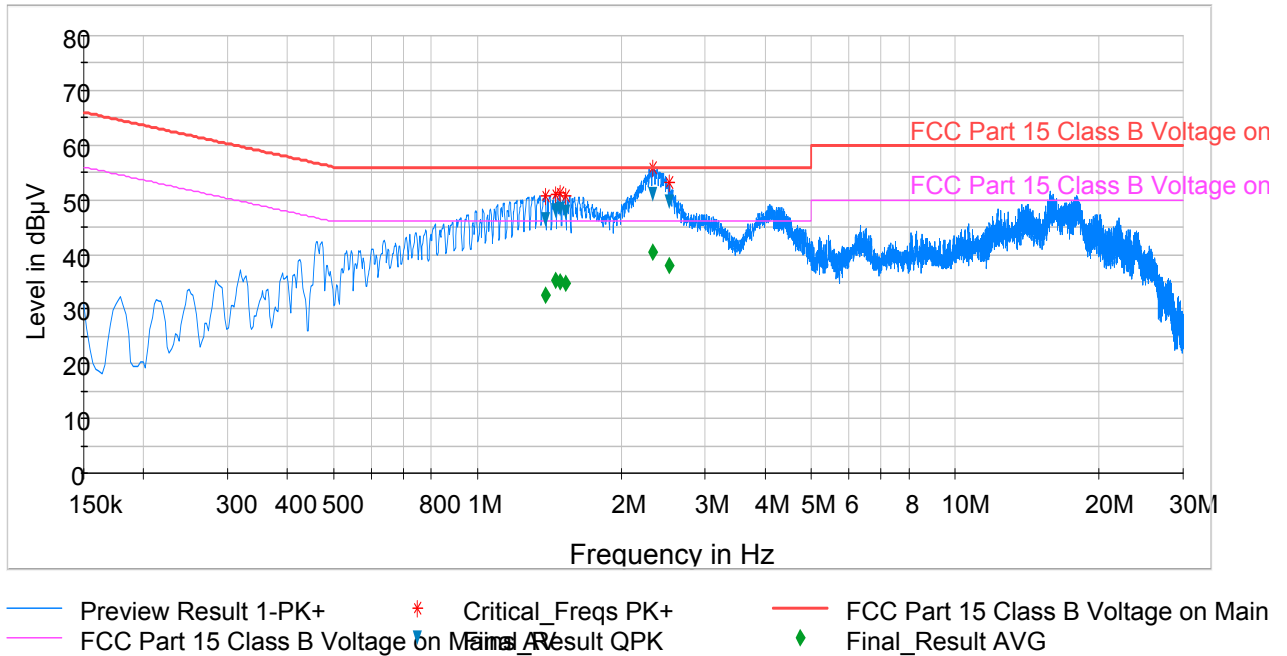

**Plot 6-96. Line Conducted Plot with 802.11a UNII Band 1 (N)**

| Frequency<br>MHz | Line | Corr.<br>dB | QuasiPeak<br>dBμV | Limit<br>dBμV | Margin<br>dB | Average<br>dBμV | Limit<br>dBμV | Margin<br>dB |
|------------------|------|-------------|-------------------|---------------|--------------|-----------------|---------------|--------------|
| 1.388            | N    | 0.1         | 46.35             | 56.00         | 9.65         | 32.60           | 46.00         | 13.40        |
| 1.455            | N    | 0.1         | 48.08             | 56.00         | 7.92         | 35.14           | 46.00         | 10.86        |
| 1.491            | N    | 0.1         | 48.18             | 56.00         | 7.82         | 35.06           | 46.00         | 10.94        |
| 1.527            | N    | 0.2         | 47.66             | 56.00         | 8.34         | 34.65           | 46.00         | 11.35        |
| 2.324            | N    | 0.2         | 50.91             | 56.00         | 5.09         | 40.45           | 46.00         | 5.55         |
| 2.517            | N    | 0.2         | 49.73             | 56.00         | 6.27         | 37.98           | 46.00         | 8.02         |

**Table 6-28. Line Conducted Data with 802.11a UNII Band 1 (N)**


### Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 36. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 93 of 100                  |

## Line-Conducted Test Data

**\$15.407**

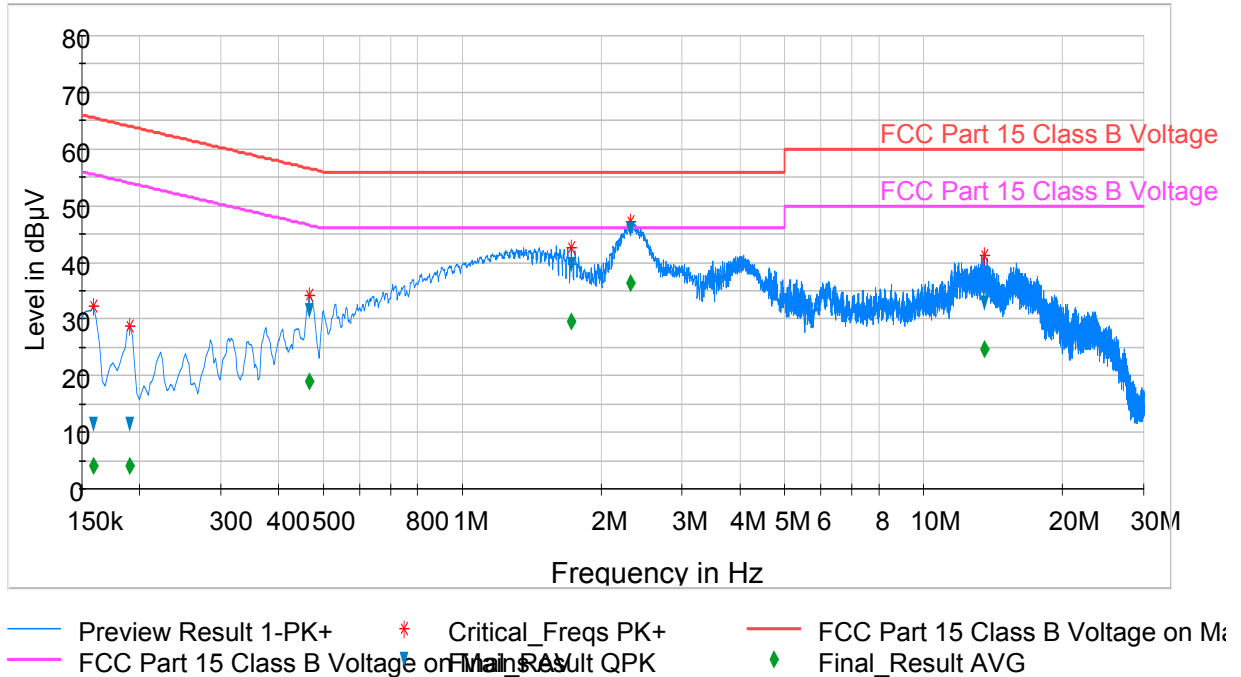

**Plot 6-97. Line Conducted Plot with 802.11a UNII Band 2A (L1)**

| Frequency<br>MHz | Line | Corr.<br>dB | QuasiPeak<br>dBμV | Limit<br>dBμV | Margin<br>dB | Average<br>dBμV | Limit<br>dBμV | Margin<br>dB |
|------------------|------|-------------|-------------------|---------------|--------------|-----------------|---------------|--------------|
| 0.159            | L1   | 0.2         | 11.50             | 65.52         | 54.02        | 4.15            | 55.52         | 51.37        |
| 0.191            | L1   | 0.2         | 11.31             | 64.01         | 52.70        | 4.14            | 54.01         | 49.87        |
| 0.467            | L1   | 0.1         | 31.53             | 56.56         | 25.03        | 18.93           | 46.56         | 27.63        |
| 1.725            | L1   | 0.1         | 39.66             | 56.00         | 16.34        | 29.52           | 46.00         | 16.48        |
| 2.312            | L1   | 0.1         | 45.79             | 56.00         | 10.21        | 36.41           | 46.00         | 9.59         |
| 13.551           | L1   | 0.4         | 32.82             | 60.00         | 27.18        | 24.62           | 50.00         | 25.38        |

**Table 6-29. Line Conducted Data with 802.11a UNII Band 2A (L1)**


### Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 52. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

|                                      |                                               |                                                                     |  |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|--|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |  | Page 94 of 100                  |

## Line-Conducted Test Data

**\$15.407**

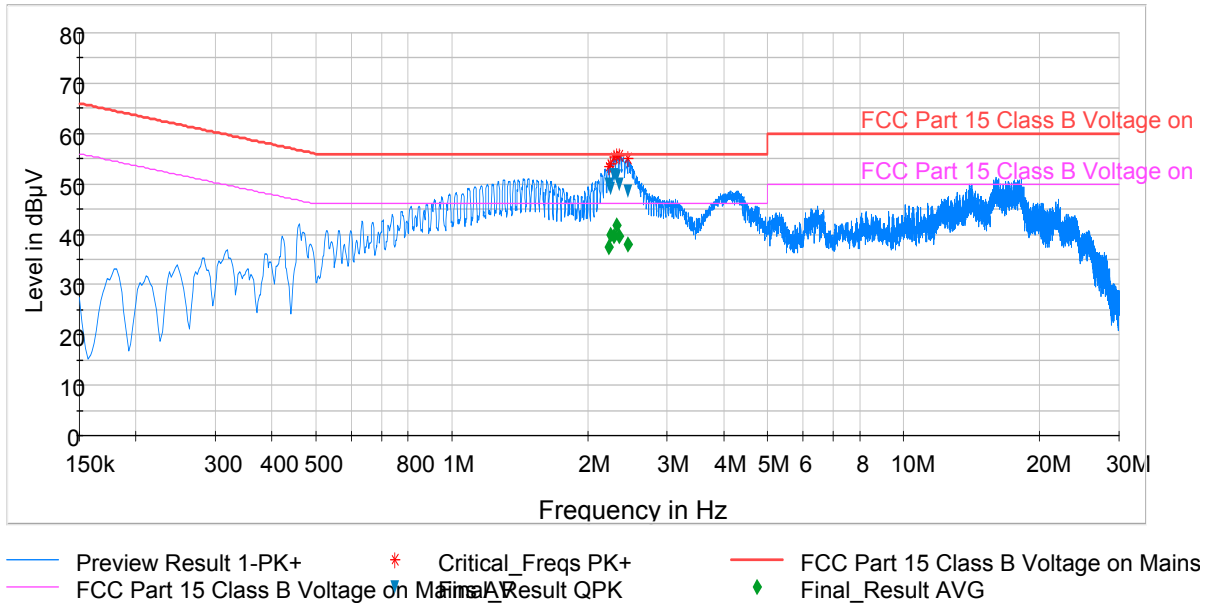

**Plot 6-98. Line Conducted Plot with 802.11a UNII Band 2A (N)**

| Frequency<br>MHz | Line | Corr.<br>dB | QuasiPeak<br>dBμV | Limit<br>dBμV | Margin<br>dB | Average<br>dBμV | Limit<br>dBμV | Margin<br>dB |
|------------------|------|-------------|-------------------|---------------|--------------|-----------------|---------------|--------------|
| 2.225            | N    | 0.2         | 49.81             | 56.00         | 6.19         | 37.41           | 46.00         | 8.59         |
| 2.243            | N    | 0.2         | 49.02             | 56.00         | 6.98         | 39.84           | 46.00         | 6.16         |
| 2.290            | N    | 0.2         | 51.84             | 56.00         | 4.16         | 39.65           | 46.00         | 6.35         |
| 2.315            | N    | 0.2         | 51.43             | 56.00         | 4.57         | 41.75           | 46.00         | 4.25         |
| 2.351            | N    | 0.2         | 49.94             | 56.00         | 6.06         | 39.71           | 46.00         | 6.29         |
| 2.454            | N    | 0.2         | 48.52             | 56.00         | 7.48         | 37.84           | 46.00         | 8.16         |

**Table 6-30. Line Conducted Data with 802.11a UNII Band 2A (N)**


**Notes:**

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 52. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
- Margin (dB) = QP/AV Limit (dBμV) - QP/AV Level (dBμV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 95 of 100                  |

## Line-Conducted Test Data

**\$15.407**

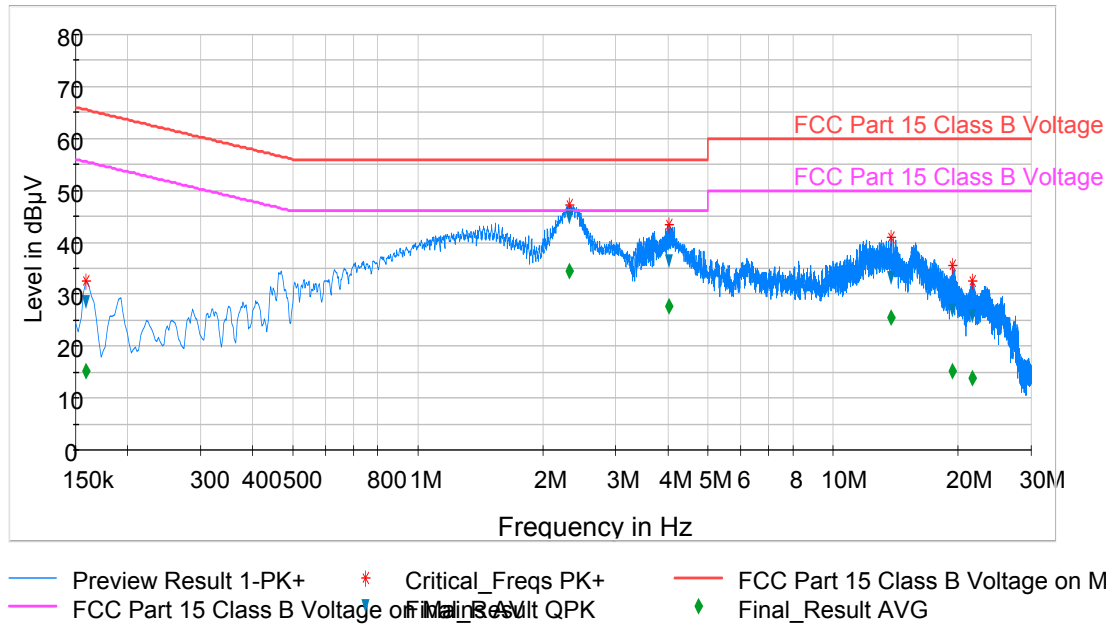

**Plot 6-99. Line Conducted Plot with 802.11a UNII Band 2C (L1)**

| Frequency<br>MHz | Line | Corr.<br>dB | QuasiPeak<br>dBμV | Limit<br>dBμV | Margin<br>dB | Average<br>dBμV | Limit<br>dBμV | Margin<br>dB |
|------------------|------|-------------|-------------------|---------------|--------------|-----------------|---------------|--------------|
| 0.159            | L1   | 0.2         | 28.54             | 65.52         | 36.98        | 15.07           | 55.52         | 40.45        |
| 2.319            | L1   | 0.1         | 44.80             | 56.00         | 11.20        | 34.38           | 46.00         | 11.62        |
| 4.018            | L1   | 0.2         | 36.44             | 56.00         | 19.56        | 27.56           | 46.00         | 18.44        |
| 13.814           | L1   | 0.4         | 33.19             | 60.00         | 26.81        | 25.43           | 50.00         | 24.57        |
| 19.345           | L1   | 0.6         | 26.92             | 60.00         | 33.08        | 15.14           | 50.00         | 34.86        |
| 21.615           | L1   | 0.7         | 25.81             | 60.00         | 34.19        | 13.95           | 50.00         | 36.05        |

**Table 6-31. Line Conducted Plot with 802.11a UNII Band 2C (L1)**


### Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 100. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 96 of 100                  |

## Line-Conducted Test Data

**\$15.407**

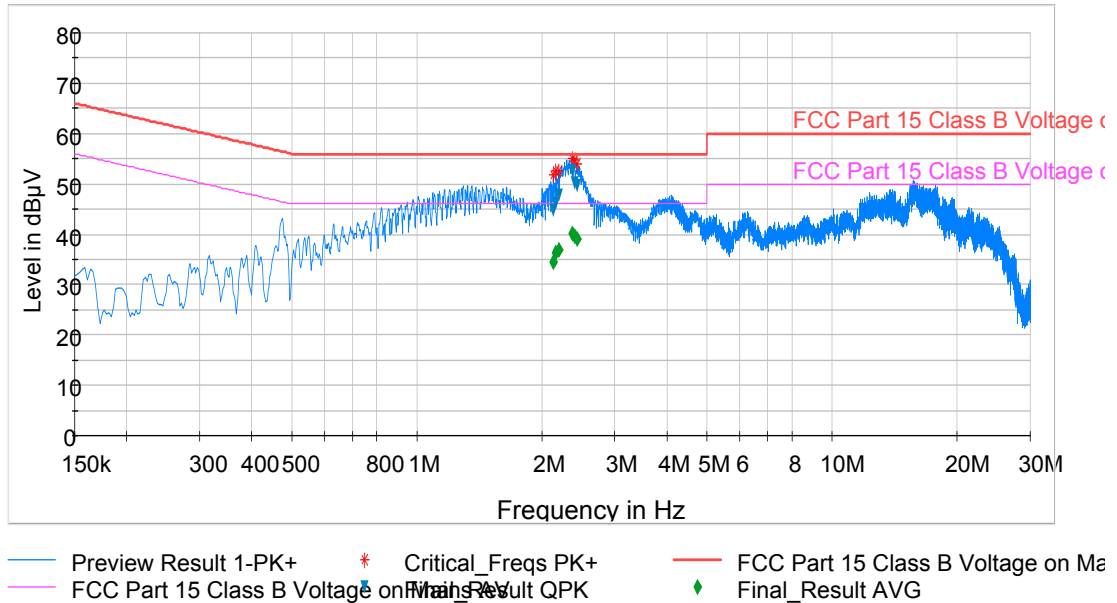

**Plot 6-100. Line Conducted Plot with 802.11a UNII Band 2C (N)**

| Frequency<br>MHz | Line | Corr.<br>dB | QuasiPeak<br>dBμV | Limit<br>dBμV | Margin<br>dB | Average<br>dBμV | Limit<br>dBμV | Margin<br>dB |
|------------------|------|-------------|-------------------|---------------|--------------|-----------------|---------------|--------------|
| 2.132            | N    | 0.2         | 44.67             | 56.00         | 11.33        | 34.55           | 46.00         | 11.45        |
| 2.164            | N    | 0.2         | 46.10             | 56.00         | 9.90         | 36.24           | 46.00         | 9.76         |
| 2.198            | N    | 0.2         | 47.63             | 56.00         | 8.37         | 36.96           | 46.00         | 9.04         |
| 2.364            | N    | 0.2         | 52.61             | 56.00         | 3.39         | 40.03           | 46.00         | 5.97         |
| 2.398            | N    | 0.2         | 50.26             | 56.00         | 5.74         | 39.54           | 46.00         | 6.46         |
| 2.429            | N    | 0.2         | 49.59             | 56.00         | 6.41         | 39.16           | 46.00         | 6.84         |

**Table 6-32. Line Conducted Data with 802.11a UNII Band 2C (N)**


**Notes:**

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 100. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
- Margin (dB) = QP/AV Limit (dBμV) - QP/AV Level (dBμV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 97 of 100                  |

## Line-Conducted Test Data

**\$15.407**

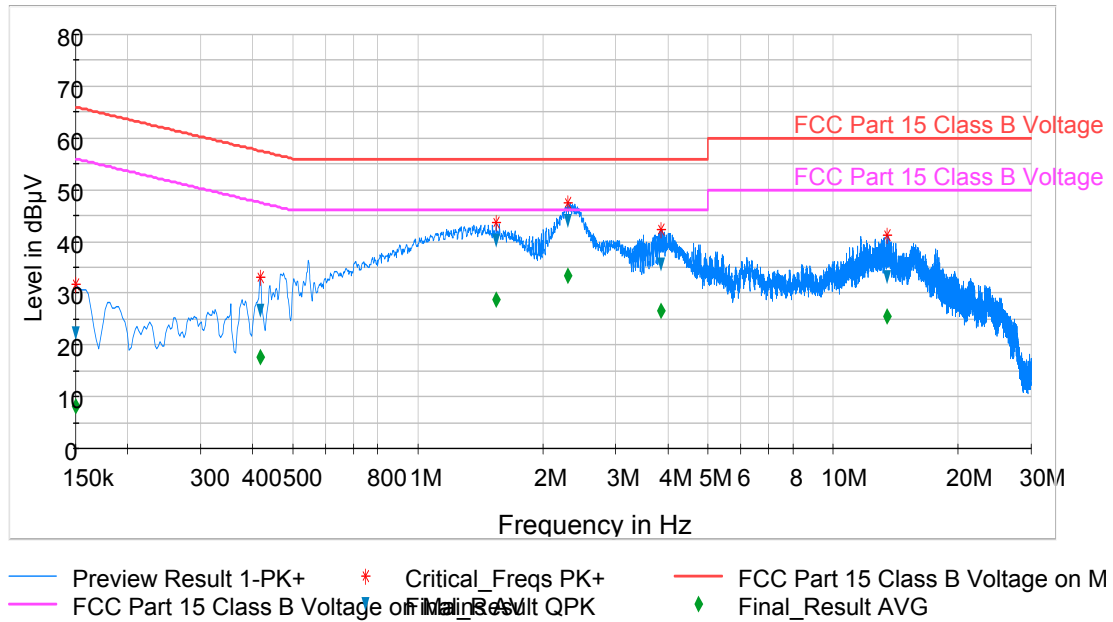

**Plot 6-101. Line Conducted Plot with 802.11a UNII Band 3 (L1)**

| Frequency<br>MHz | Line | Corr.<br>dB | QuasiPeak<br>dBµV | Limit<br>dBµV | Margin<br>dB | Average<br>dBµV | Limit<br>dBµV | Margin<br>dB |
|------------------|------|-------------|-------------------|---------------|--------------|-----------------|---------------|--------------|
| 0.150            | L1   | 0.2         | 22.21             | 66.00         | 43.79        | 8.16            | 56.00         | 47.84        |
| 0.418            | L1   | 0.1         | 26.51             | 57.49         | 30.98        | 17.74           | 47.49         | 29.75        |
| 1.543            | L1   | 0.1         | 40.11             | 56.00         | 15.89        | 28.88           | 46.00         | 17.12        |
| 2.294            | L1   | 0.1         | 43.95             | 56.00         | 12.05        | 33.33           | 46.00         | 12.67        |
| 3.858            | L1   | 0.2         | 35.61             | 56.00         | 20.39        | 26.58           | 46.00         | 19.42        |
| 13.468           | L1   | 0.4         | 33.15             | 60.00         | 26.85        | 25.48           | 50.00         | 24.52        |

**Table 6-33. Line Conducted Plot with 802.11a UNII Band 3 (L1)**


### Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 149. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBµV) - QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 98 of 100                  |

## Line-Conducted Test Data

\$15.407

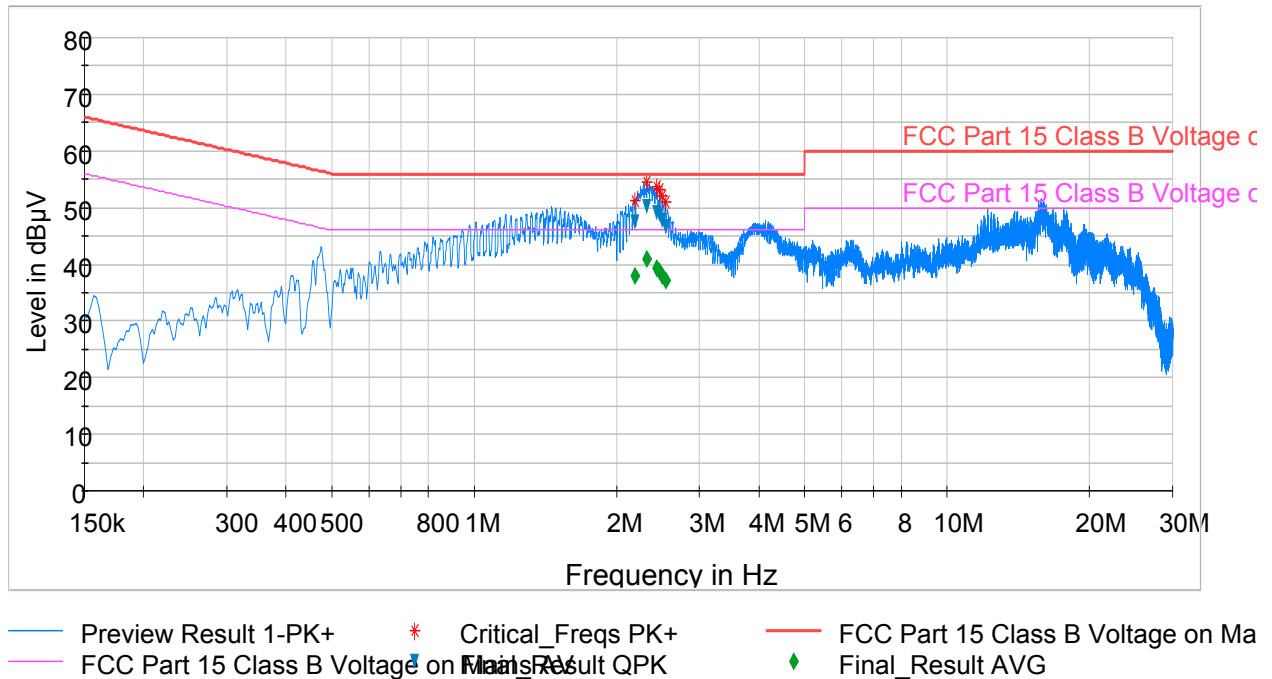

**Plot 6-102. Line Conducted Plot with 802.11a UNII Band 3 (N)**

| Frequency<br>MHz | Line | Corr.<br>dB | QuasiPeak<br>dBμV | Limit<br>dBμV | Margin<br>dB | Average<br>dBμV | Limit<br>dBμV | Margin<br>dB |
|------------------|------|-------------|-------------------|---------------|--------------|-----------------|---------------|--------------|
| 2.186            | N    | 0.2         | 47.34             | 56.00         | 8.66         | 37.95           | 46.00         | 8.05         |
| 2.315            | N    | 0.2         | 50.19             | 56.00         | 5.81         | 41.02           | 46.00         | 4.98         |
| 2.434            | N    | 0.2         | 49.18             | 56.00         | 6.82         | 39.26           | 46.00         | 6.74         |
| 2.465            | N    | 0.2         | 48.69             | 56.00         | 7.31         | 38.81           | 46.00         | 7.19         |
| 2.497            | N    | 0.2         | 47.72             | 56.00         | 8.28         | 37.84           | 46.00         | 8.16         |
| 2.537            | N    | 0.2         | 46.63             | 56.00         | 9.37         | 37.21           | 46.00         | 8.79         |

**Table 6-34. Line Conducted Data with 802.11a UNII Band 3 (N)**

### Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 149. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

|                                      |                                               |                                                                     |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFVK815                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1502020341.ZNF | Test Dates:<br>2/3/2015 - 2/20/2015           | EUT Type:<br>Portable Tablet                                        |           | Page 99 of 100                  |

## 7.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **LG Portable Tablet FCC ID: ZNFVK815** is in compliance with Part 15E of the FCC Rules.

|                                             |                                                                                     |                                                                             |                                                                                       |                                        |
|---------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> ZNFVK815                     |  | <b>FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>0Y1502020341.ZNF | <b>Test Dates:</b><br>2/3/2015 - 2/20/2015                                          | <b>EUT Type:</b><br>Portable Tablet                                         |                                                                                       | Page 100 of 100                        |