

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland

Name: **LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)**

Group: LTE-FDD
 UID: 10176-CAB


PAR: ¹ **6.52 dB**
 MIF: ² **-9.76 dB**

Standard Reference: 3GPP / ETSI TS 136.101 V8.4.0
 3GPP / ETSI TS 136.213 V8.4.0
 FCC OET KDB 941225 D05 SAR for LTE Devices v01
 Category: Random amplitude modulation
 Modulation: 16-QAM
 Frequency Band:


Band 1, E-UTRA/FDD (1920.0-1980.0 MHz, 20133)
 Band 2, E-UTRA/FDD (1850.0-1910.0 MHz, 20134)
 Band 3, E-UTRA/FDD (1710.0-1785.0 MHz, 20135)
 Band 4, E-UTRA/FDD (1710.0-1755.0 MHz, 20136)
 Band 5, E-UTRA/FDD (824.0-849.0 MHz, 20137)
 Band 6, E-UTRA/FDD (830.0-840.0 MHz, 20138)
 Band 7, E-UTRA/FDD (2500.0-2570.0 MHz, 20139)
 Band 8, E-UTRA/FDD (880.0-915.0 MHz, 20140)
 Band 9, E-UTRA/FDD (1749.9-1784.9 MHz, 20141)
 Band 10, E-UTRA/FDD (1710.0-1770.0 MHz, 20142)
 Band 11, E-UTRA/FDD (1427.9-1447.9 MHz, 20209)
 Band 12, E-UTRA/FDD (699.0-716.0 MHz, 20210)
 Band 13, E-UTRA/FDD (777.0-787.0 MHz, 20145)
 Band 14, E-UTRA/FDD (788.0-798.0 MHz, 20146)
 Band 17, E-UTRA/FDD (704.0-716.0 MHz, 20147)
 Band 18, E-UTRA/FDD (815.0-830.0 MHz, 20157)
 Band 19, E-UTRA/FDD (830.0-845.0 MHz, 20158)
 Band 20, E-UTRA/FDD (832.0-862.0 MHz, 20159)
 Band 21, E-UTRA/FDD (1447.9-1462.9 MHz, 20160)
 Band 22, E-UTRA/FDD (3410.0-3490.0 MHz, 20190)
 Band 23, E-UTRA/FDD (2000.0-2020.0 MHz, 20164)
 Band 24, E-UTRA/FDD (1626.5-1660.5 MHz, 20165)
 Band 25, E-UTRA/FDD (1850.0-1915.0 MHz, 20166)
 Band 26 E-UTRA/FDD (814.0-849.0 MHz, 20211)
 Band 27 E-UTRA/FDD (807.0-824.0 MHz, 20212)
 Band 28 E-UTRA/FDD (703.0-748.0 MHz, 20213)

Detailed Specification: Modulation Scheme: SC-FDMA
 Number of PUSCHs: 1
 Settings for Subframe #0 to #9:
 Modulation Scheme: QPSK
 Data Type: UL-SCH
 Number RB: 1
 Transport Block Size: 256
 TBS Index: 14
 MCS Index: 15
 Data Type: PN9
 Bandwidth: 10.0 MHz
 Integration Time: 10.0 ms


¹ PAR (0.1%) in accordance with FCC KDB 971168, Section 6.0 "Measurement of the Peak-to-Average Power Ratio (PAPR)"
² Modulation Interference Factor (MIF) value valid only in conjunction with advanced probe response linearization calibration for the same communication system (same UID and version).

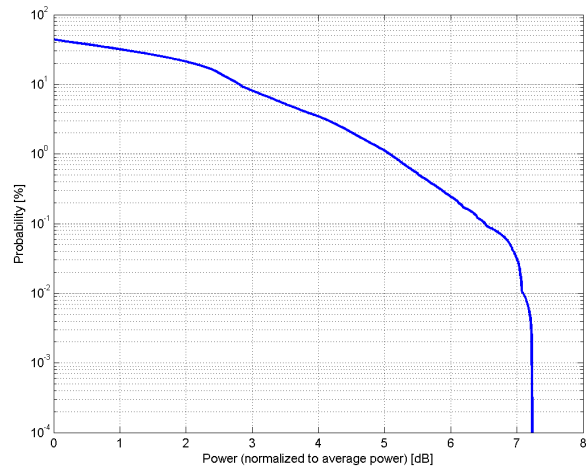

Complementary Cumulative Distribution Function (CCDF)

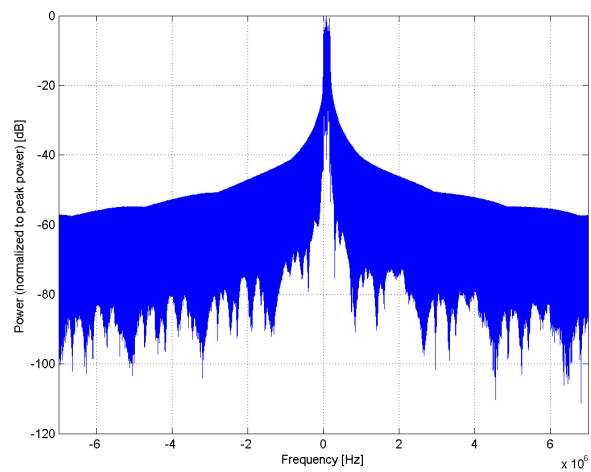

Frequency Domain

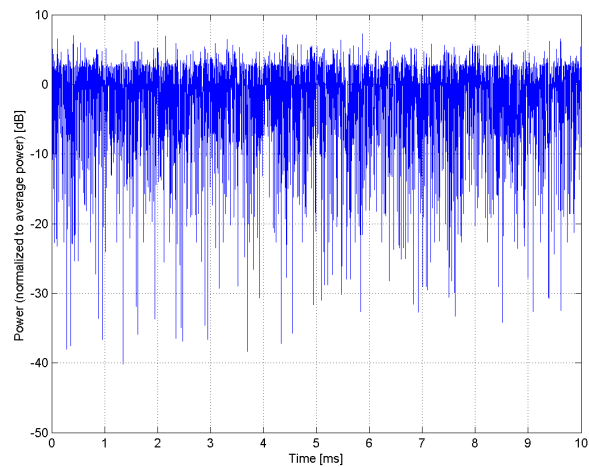

Time Domain