



**FCC 47 CFR PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 8**

CERTIFICATION TEST REPORT

FOR

GSM/CDMA/WCDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac and NFC

MODEL NUMBER: LG-VS985, VS985, LGVS985, AS985, LG-AS985 & LGAS985

FCC ID: ZNFVS985

IC: 2703C-VS985

REPORT NUMBER: 14U17502-2

ISSUE DATE: MAY 8, 2014

Prepared for

**LG ELECTRONICS MOBILECOMM U.S.A., INC
1000 SYLVAN AVENUE
ENGLEWOOD CLIFFS, NEW JERSEY, 07632, U.S.A.**

Prepared by

**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	5/8/14	Initial Issue	P. Zhang

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION.....	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION.....	6
4.3. MEASUREMENT UNCERTAINTY	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT.....	7
5.2. MAXIMUM OUTPUT POWER.....	7
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	7
5.4. WORST-CASE CONFIGURATION AND MODE.....	8
5.5. DESCRIPTION OF TEST SETUP.....	9
6. TEST AND MEASUREMENT EQUIPMENT	11
7. SUMMARY TABLE	12
8. ANTENNA PORT TEST RESULTS	13
8.1. 20 dB AND 99% BANDWIDTH.....	13
8.1.1. BASIC DATA RATE GFSK MODULATION.....	13
8.1.1. ENHANCED DATA RATE 8PSK MODULATION	13
8.2. FOR GFSK HOPPING FREQUENCY SEPARATION.....	22
8.3. GFSK NUMBER OF HOPPING CHANNELS	24
8.4. GFSK AVERAGE TIME OF OCCUPANCY.....	27
8.5. OUTPUT POWER	31
8.5.1. BASIC DATA RATE GFSK MODULATION.....	31
8.5.2. ENHANCED DATA RATE 8PSK MODULATION	31
8.6. AVERAGE POWER.....	36
8.6.1. BASIC DATA RATE GFSK MODULATION.....	36
8.6.2. ENHANCED DATA RATE 8PSK MODULATION	36
8.7. CONDUCTED SPURIOUS EMISSIONS.....	37
8.7.1. BASIC DATA RATE GFSK MODULATION.....	38
8.7.1. ENHANCED DATA RATE 8PSK MODULATION	42
9. RADIATED TEST RESULTS	46
9.1. LIMITS AND PROCEDURE	46
9.2. TRANSMITTER ABOVE 1 GHz	47

9.2.1.	BASIC DATA RATE GFSK MODULATION.....	47
9.2.2.	ENHANCED DATA RATE 8PSK MODULATION	63
9.3.	WORST-CASE BELOW 1 GHz	79
10.	AC POWER LINE CONDUCTED EMISSIONS	85
11.	SETUP PHOTOS	89

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: LG ELECTRONICS MOBILECOMM U.S.A., INC

EUT DESCRIPTION: GSM/CDMA/WCDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac and NFC.

MODEL: LG-VS985, VS985, LGVS985, AS985, LG-AS985 & LGAS985

SERIAL NUMBER: 14ZMN (Conducted), 14ZK7 (Radiated)

DATE TESTED: APRIL 14 – MAY 8, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 8 Annex 8	Pass
INDUSTRY CANADA RSS-GEN Issue 3	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Tested By:



PENG ZHANG
CONSUMER TECHNOLOGY DIVISION
PROJECT LEAD
UL Verification Services Inc.

CHARLES VERGONIO
CONSUMER TECHNOLOGY DIVISION
LAB ENGINEER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/CDMA/WCDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac and NFC.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	7.66	5.83
2402 - 2480	Enhanced 8PSK	8.02	6.34

Note: GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance. For average power data please refer to section 8.6.

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of -1.74 dBi.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	LG	MCS-04WT2	TA350000050	N/A
Earphone	LG	N/A	N/A	N/A
WPC Cover	LG	N/A	N/A	N/A
WPC Charger	LG	WPC-300	304HYBF00069	BEJWCP300


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A

TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests. EUT was set in the Hidden menu mode to enable BT communications.

SETUP DIAGRAM FOR TESTS

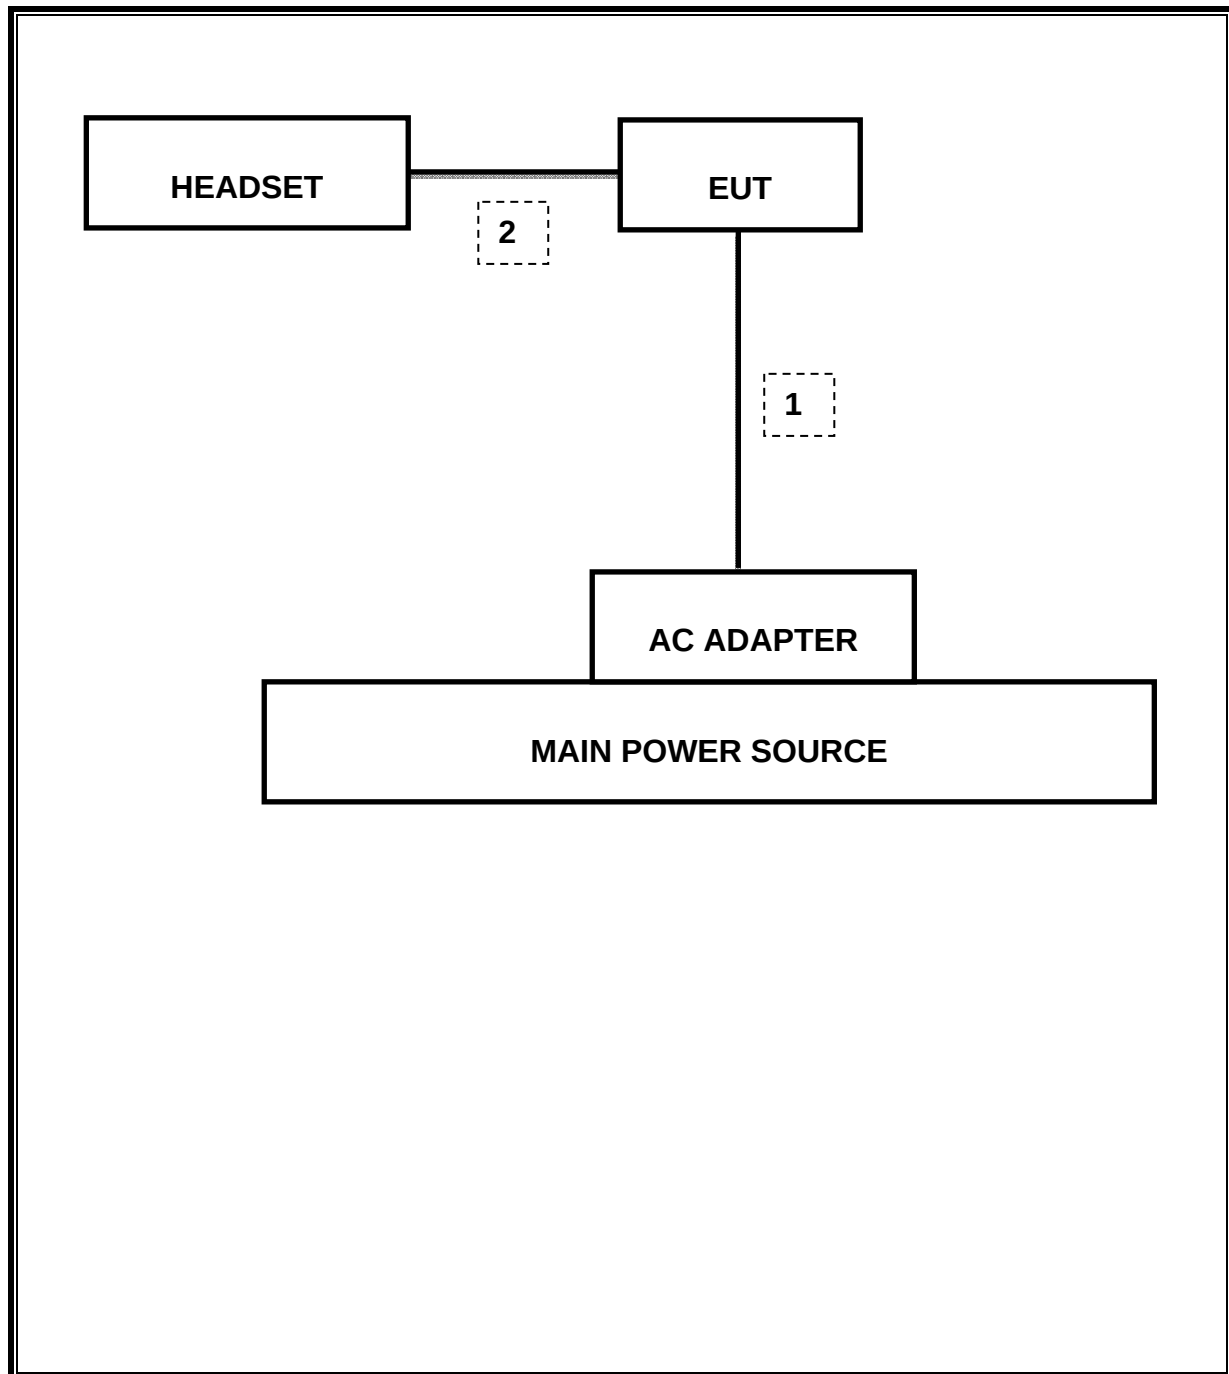

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Biconolog, 30MHz-1 GHz	Sunol Sciences	JB1	C01171	02/13/15
Antenna, Horn, 18GHz	EMCO	3115	C00783	10/25/14
Antenna, Horn, 25.5 GHz	ARA	MWH-1826/B	C00980	11/14/14
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	01/28/15
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01052	10/22/14
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	12/20/14
CBT Bluetooth Tester	R & S	CBT	None	07/12/14
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/14
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/14
LISN, 30 MHz	FCC	50/250-25-2	C00626	01/14/15
Reject Filter, 2.4GHz	Micro-Tronics	BRM50702	N02684	CNR

7. SUMMARY TABLE

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
2.1049	RSS-GEN 4.6	Occupied Band width (99%)	N/A	Conducted	Pass	1.1835MHz
2.1051, 15.247 (d)	RSS-210 A8.5	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-53.28dBm
15.247 (b)(1)	RSS-210 A8.4	TX conducted output power	<21dBm		Pass	8.02dBm
15.247 (a)(1)	RSS-210 A8.1(b)	Hopping frequency separation	> 25KHz		Pass	1MHz
15.247 (a)(1)(iii)	RSS-210 A8.1(d)	Number of Hopping channels	More than 15 non-overlapping channels		Pass	79
15.247 (a)(1)(iii)	RSS-210 A8.1(d)	Avg Time of Occupancy	< 0.4sec		Pass	0.327sec
15.207 (a)	RSS-GEN 7.2.2	AC Power Line conducted emissions	Section 10	Radiated	Pass	43.57dBuV
15.205, 15.209	RSS-210 Clause 2.6, RSS-210 Clause 6	Radiated Spurious Emission	< 54dBuV/m		Pass	36.94dBuV/m

8. ANTENNA PORT TEST RESULTS

8.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to $\geq$ RBW. The sweep time is coupled.

RESULTS



8.1.1. BASIC DATA RATE GFSK MODULATION


Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	0.924562	0.9008536
Middle	2441	0.925705	0.8996242
High	2480	0.924126	0.913495
Worst		0.925705	0.913495

8.1.1. ENHANCED DATA RATE 8PSK MODULATION



Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.297	1.1835
Middle	2441	1.296	1.1829
High	2480	1.316	1.1816
Worst		1.316	1.1835


GFSK 20 dB BANDWIDTH

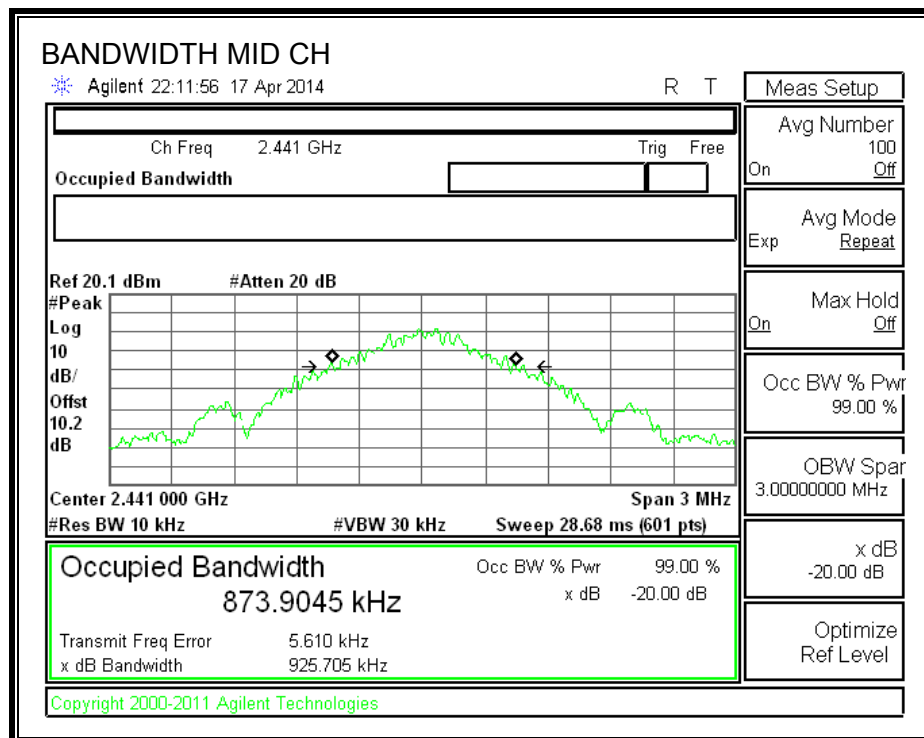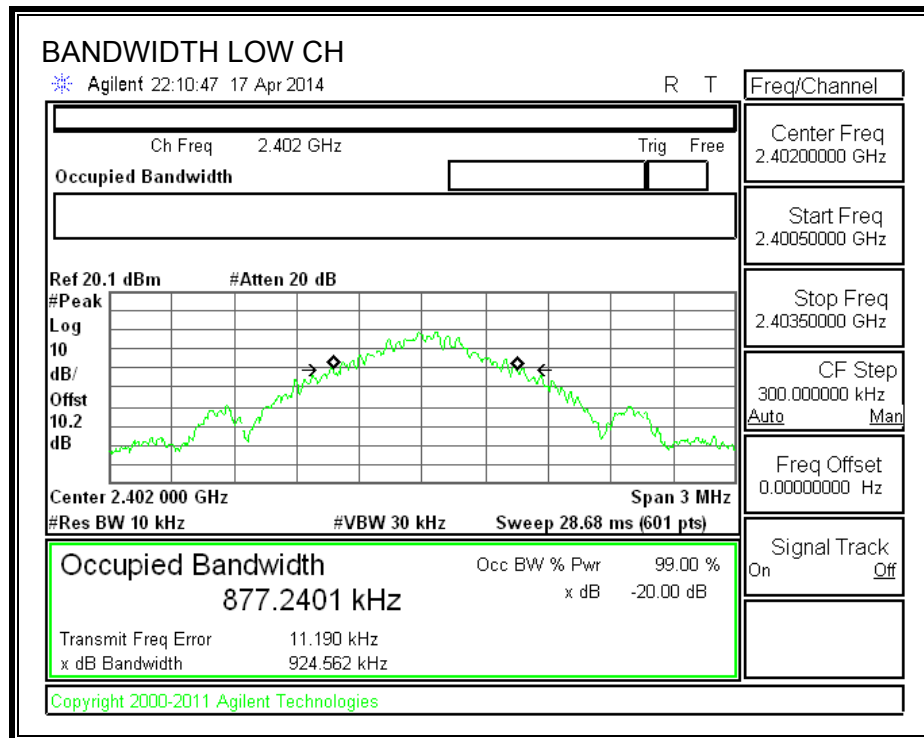


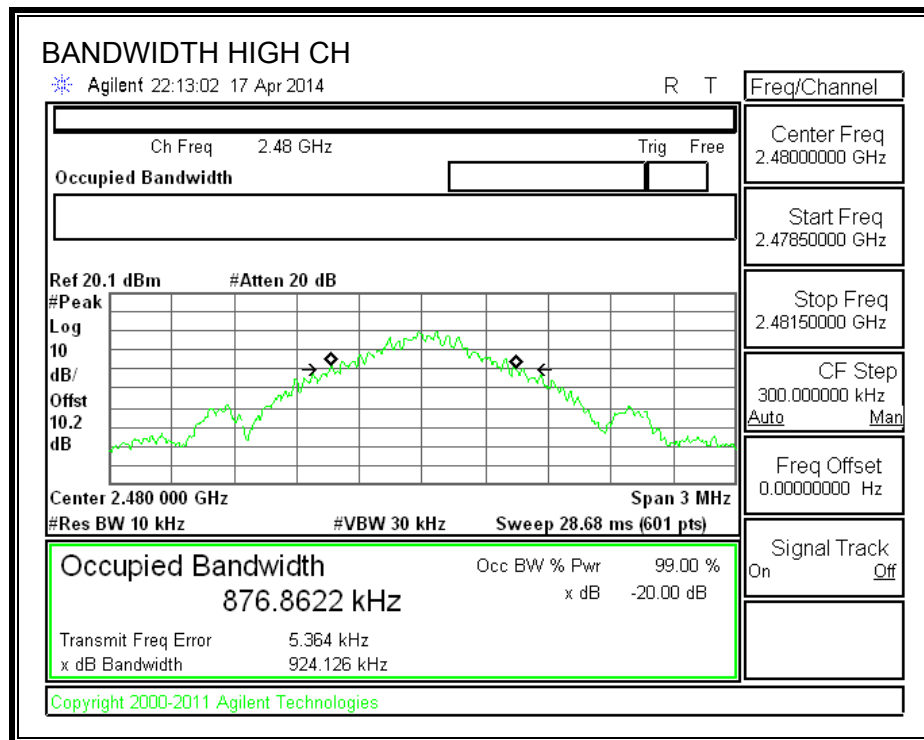



GFSK 99% BANDWIDTH

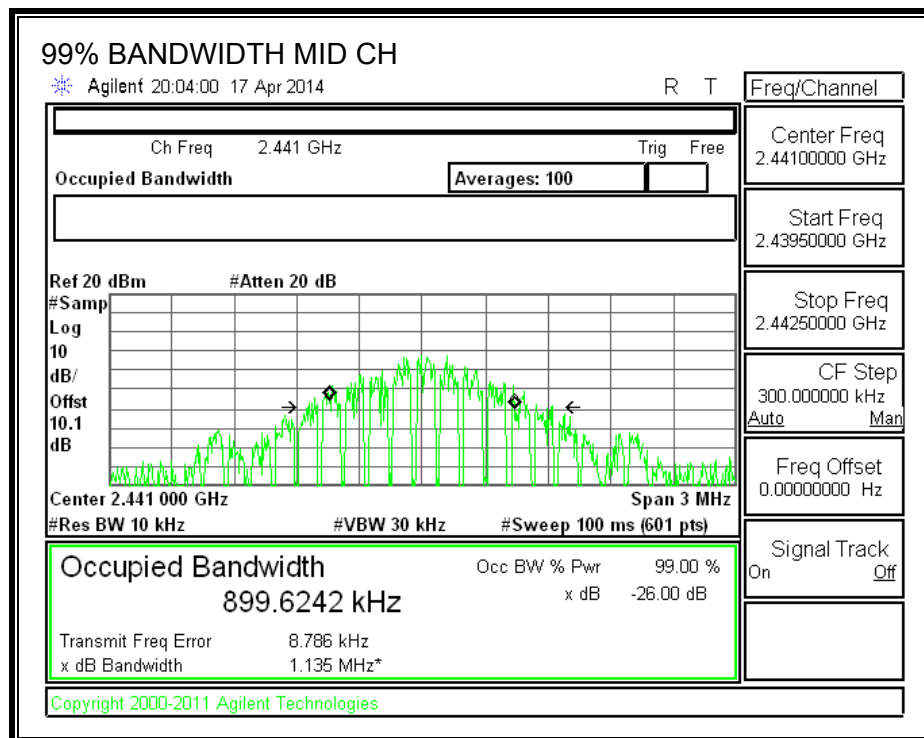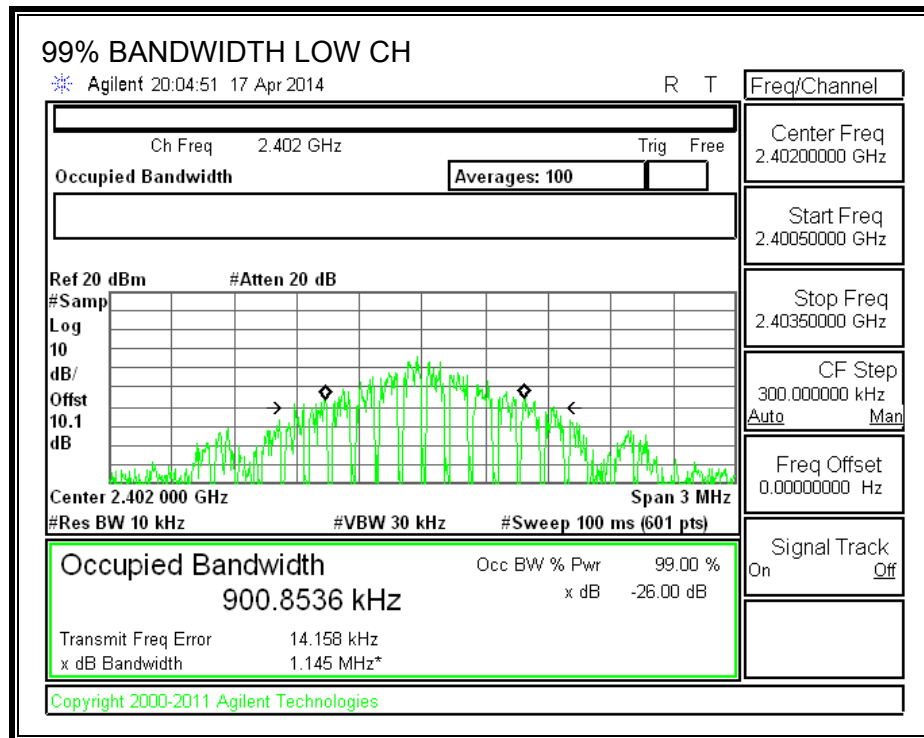


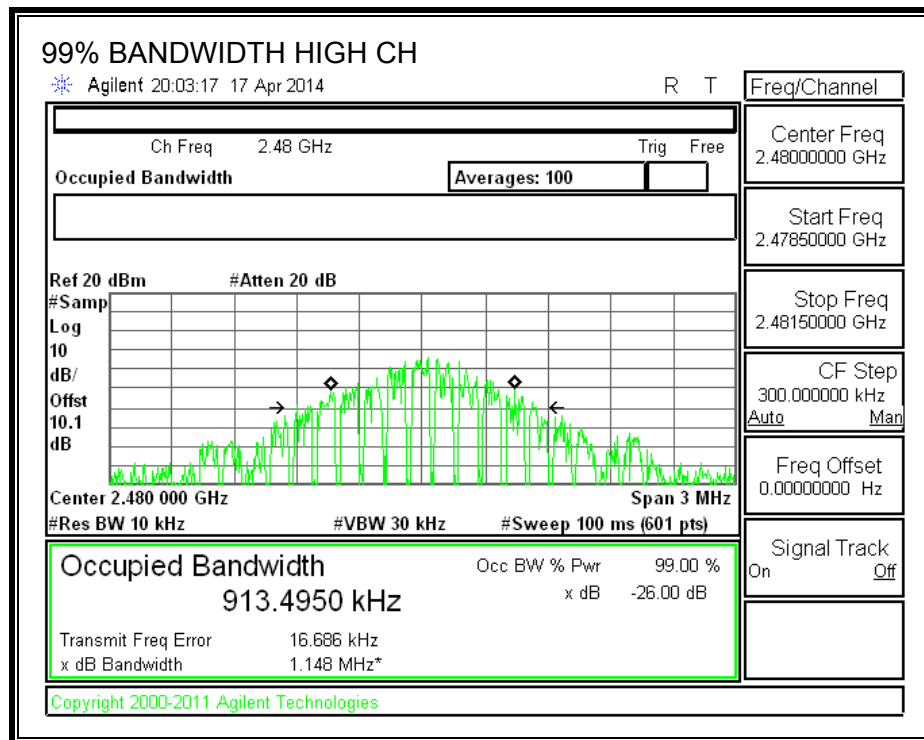



8PSK 20 dB BANDWIDTH

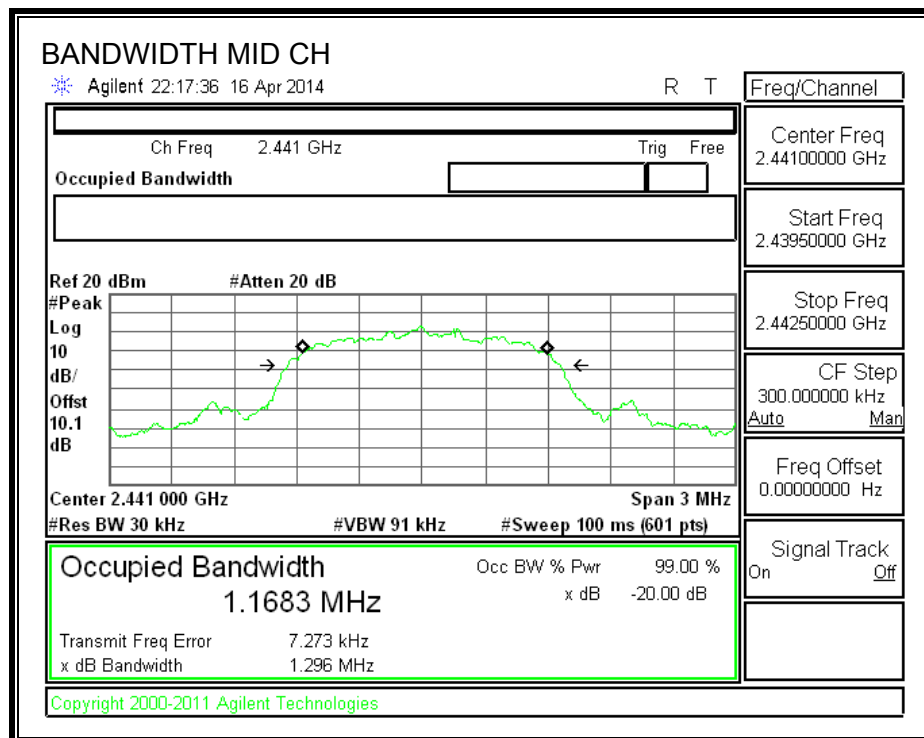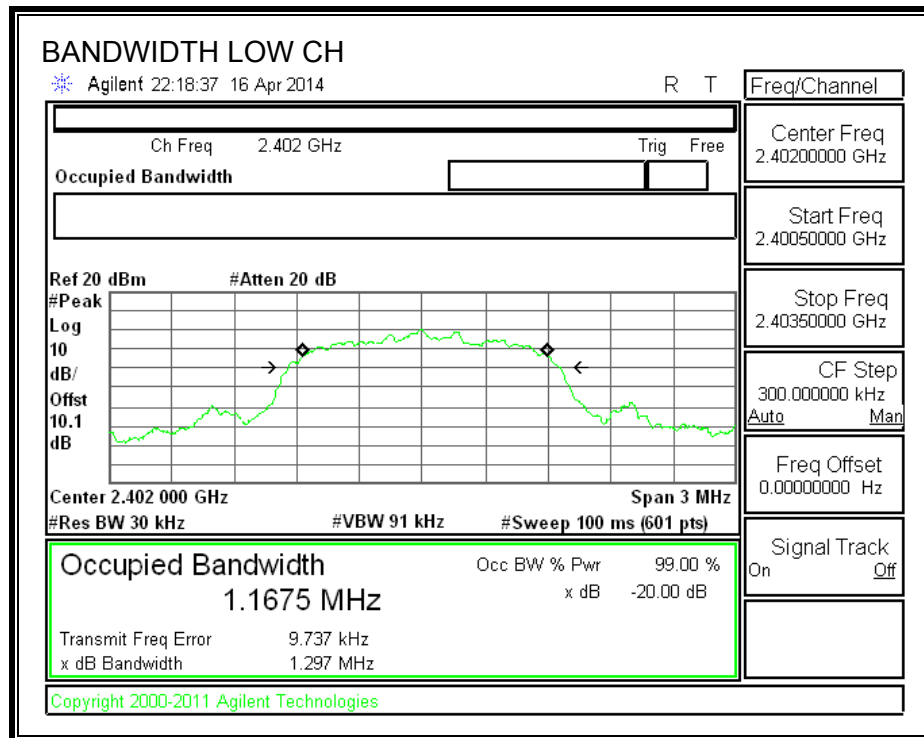

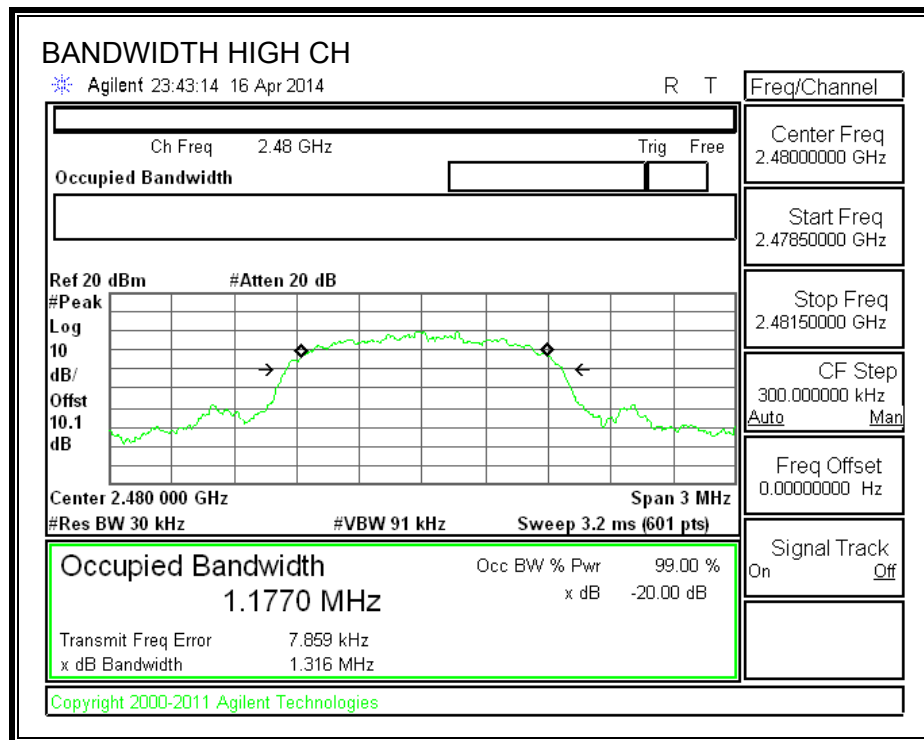

8PSK 99% BANDWIDTH

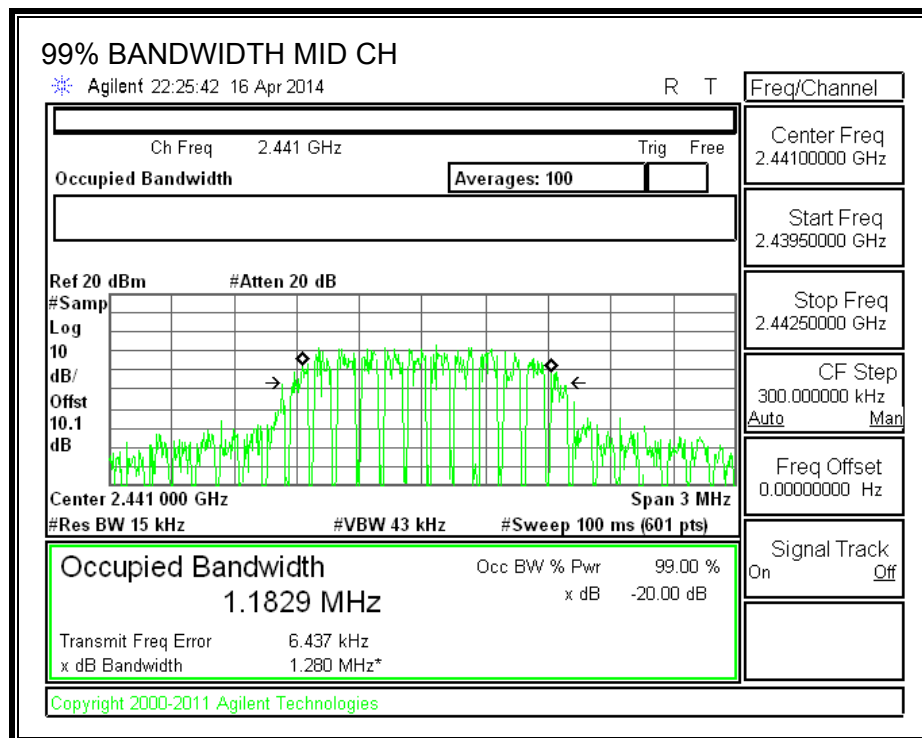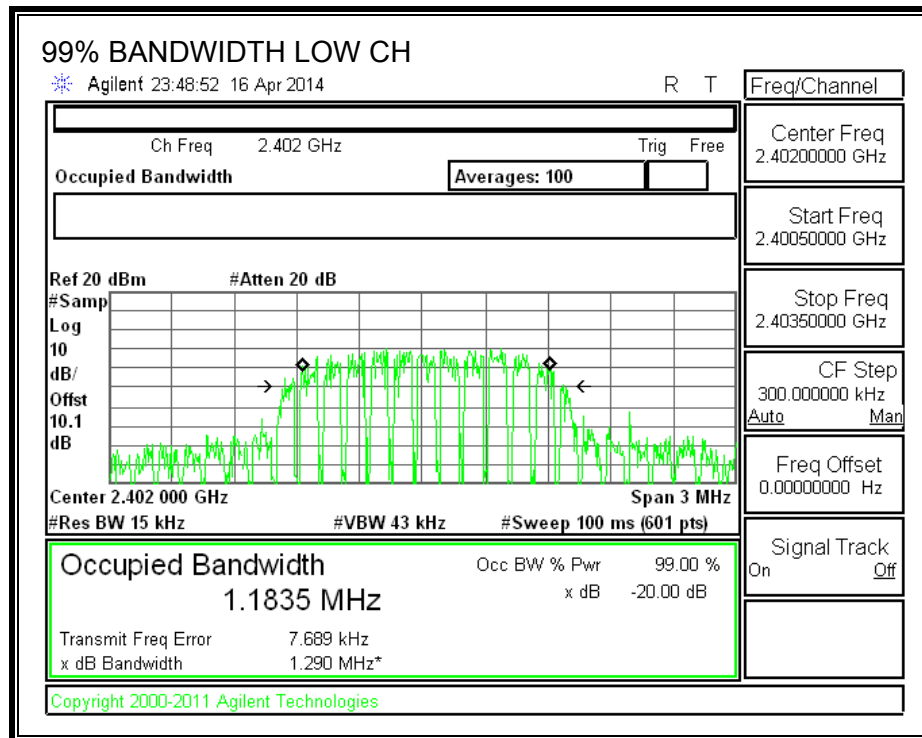

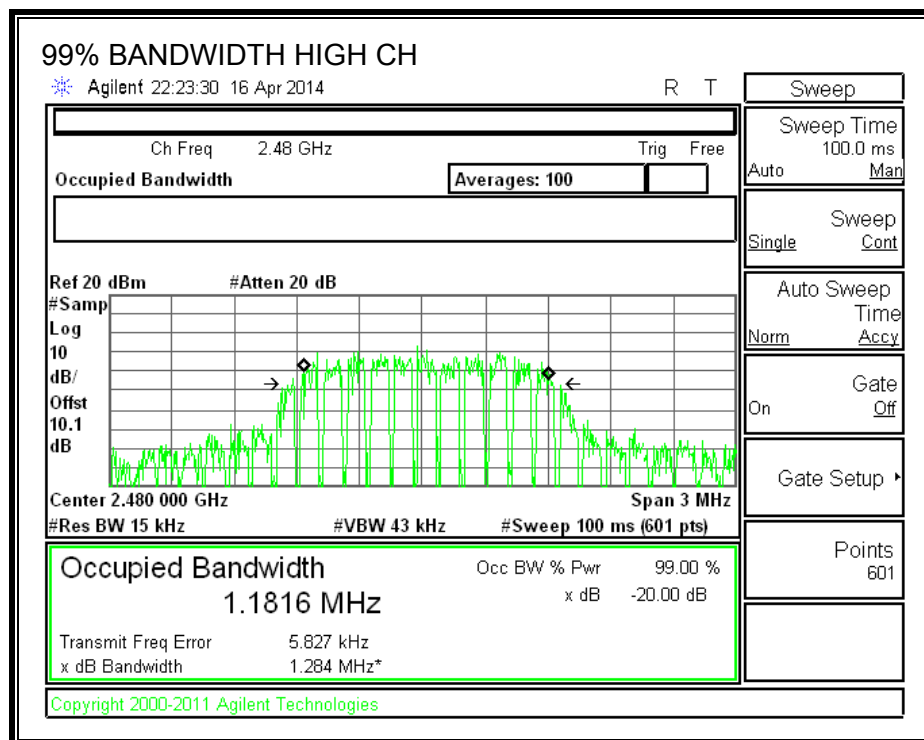

8.2. FOR GFSK HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

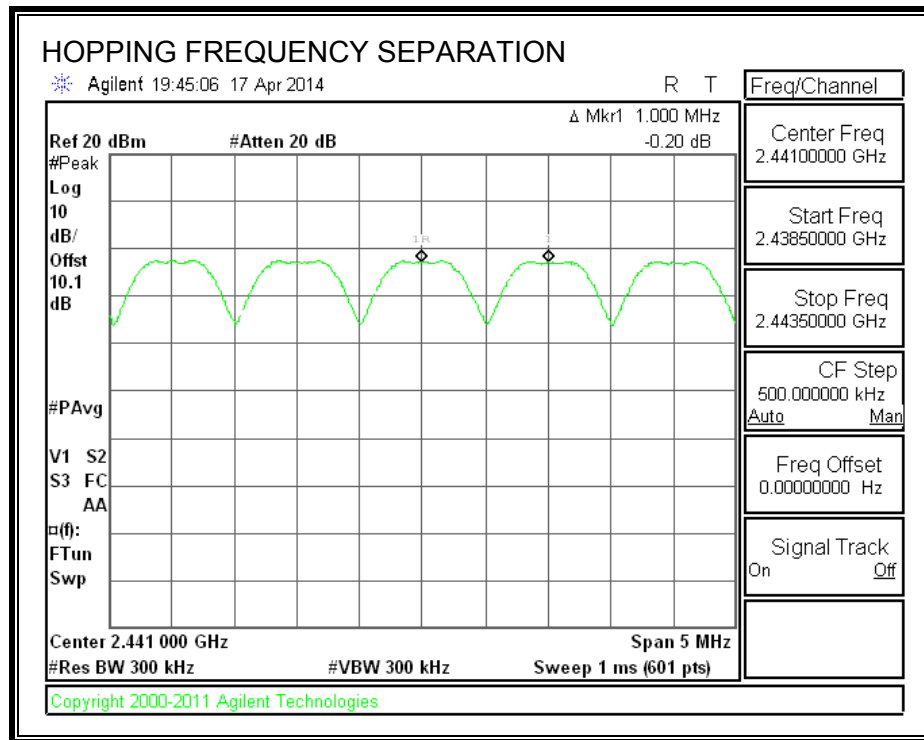

8.3. GFSK NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



TEST PROCEDURE



DA 00-705: The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

Normal Mode: 79 Channels observed.

NUMBER OF HOPPING CHANNELS

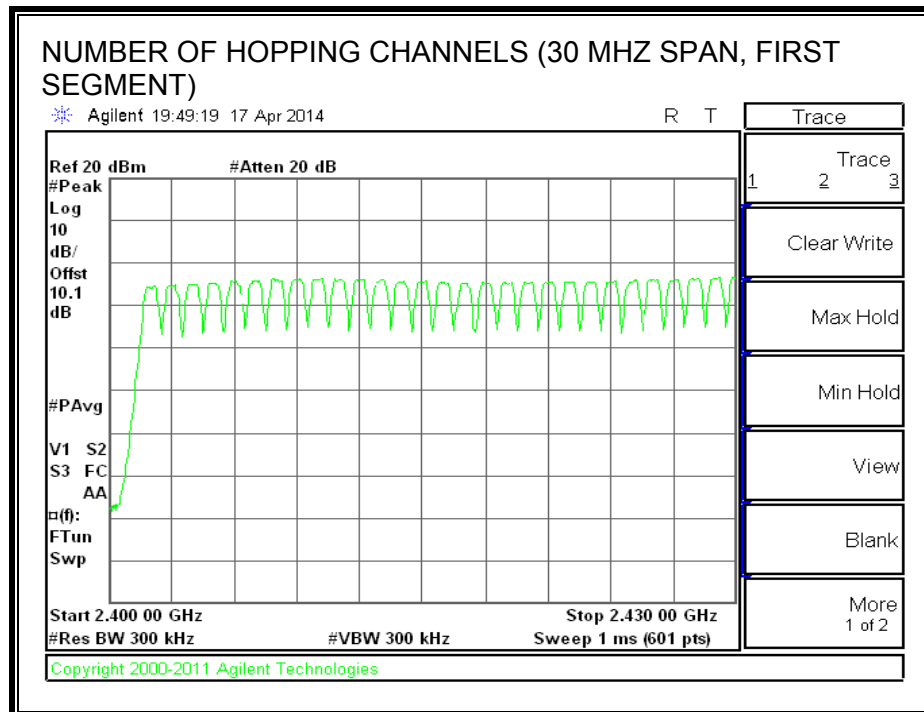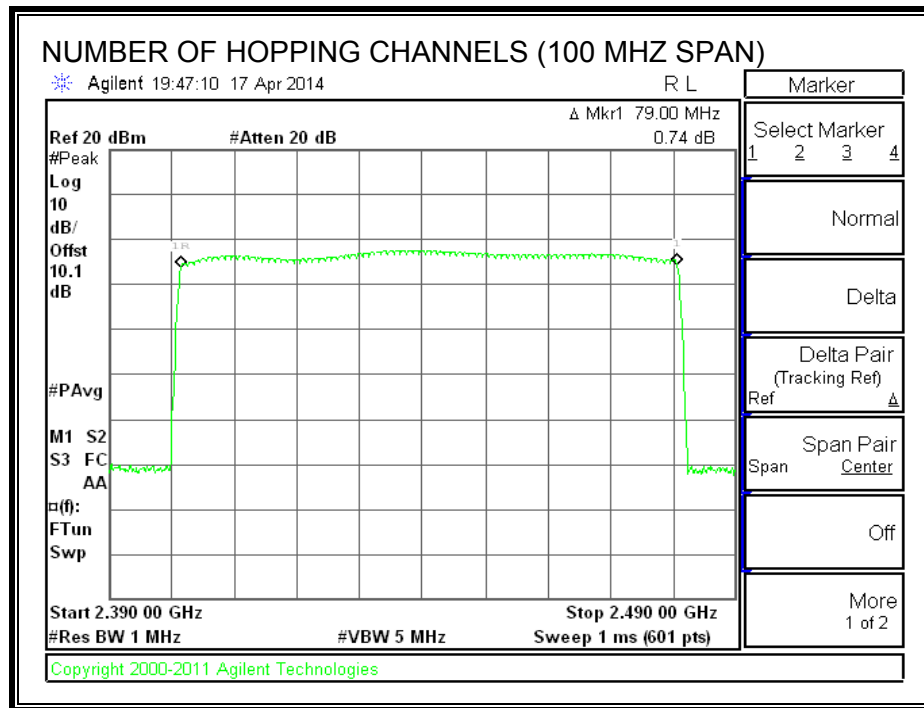

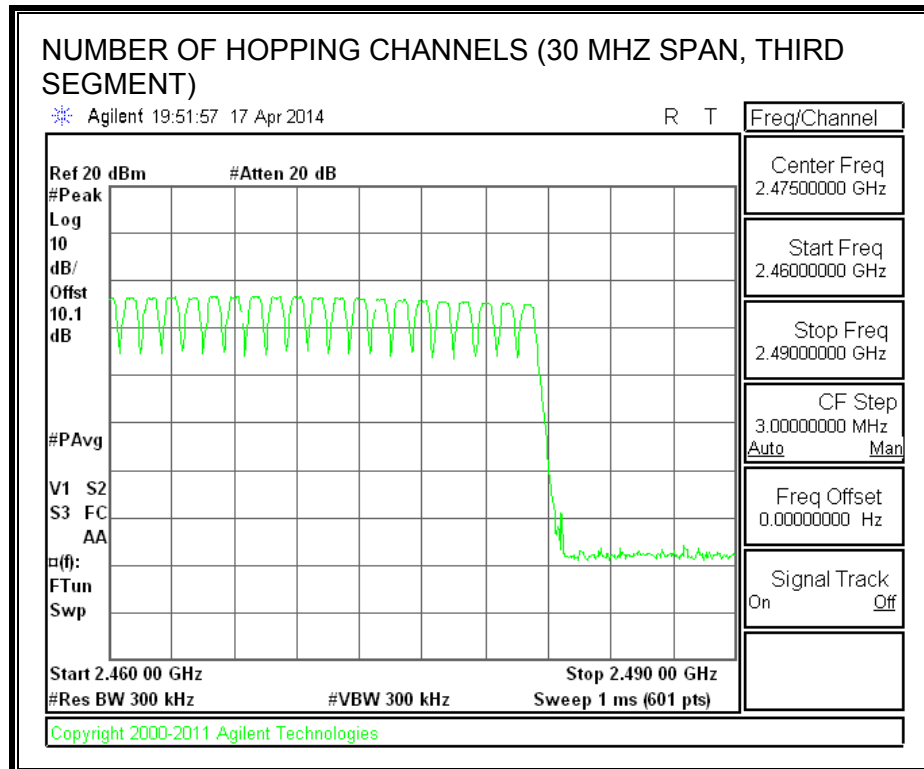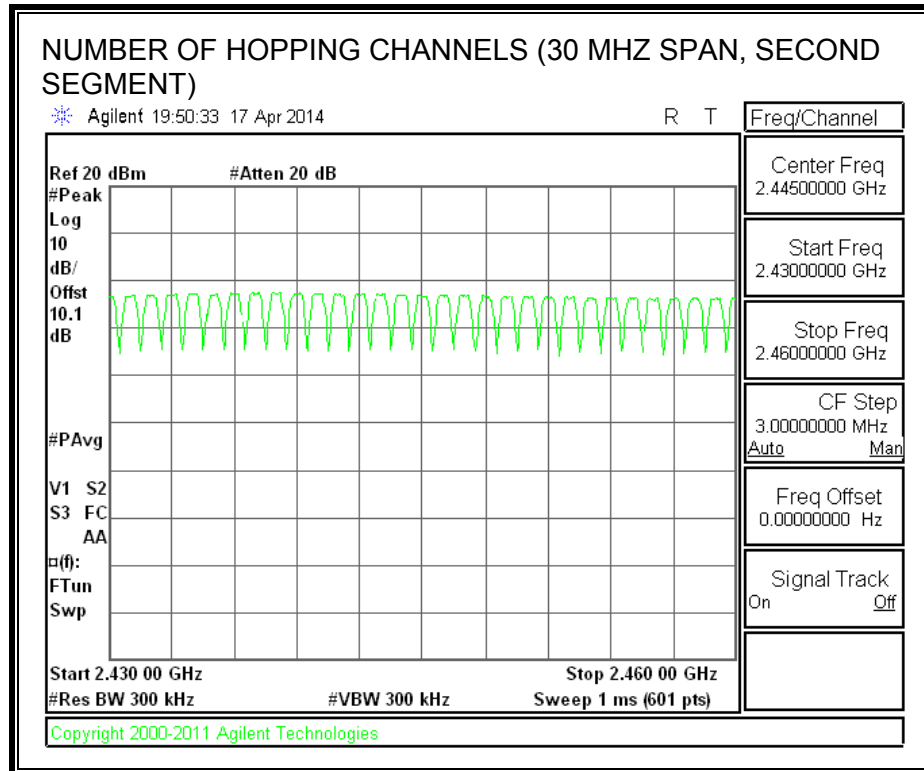

8.4. GFSK AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{pulse width}$.


RESULTS

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.378	30	0.113	0.4	-0.287
DH3	1.635	20	0.327	0.4	-0.073
DH5	2.89	8	0.231	0.4	-0.169
DH Packet	Pulse Width (msec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.378	7.5	0.028	0.4	-0.372
DH3	1.635	5	0.082	0.4	-0.318
DH5	2.89	2	0.058	0.4	-0.342


PULSE WIDTH - DH1

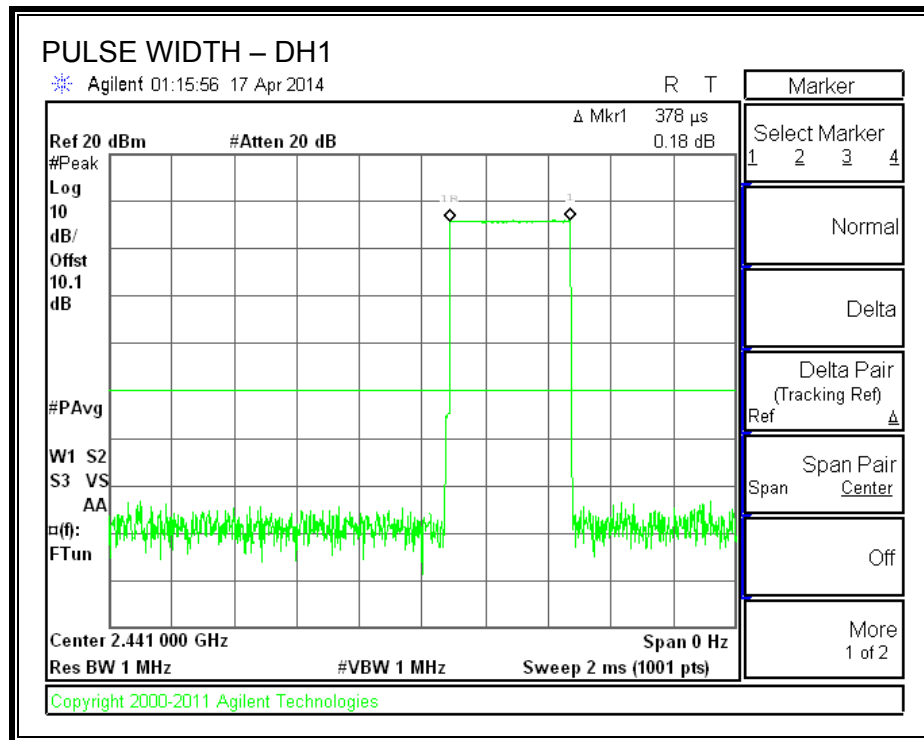


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD - DH1

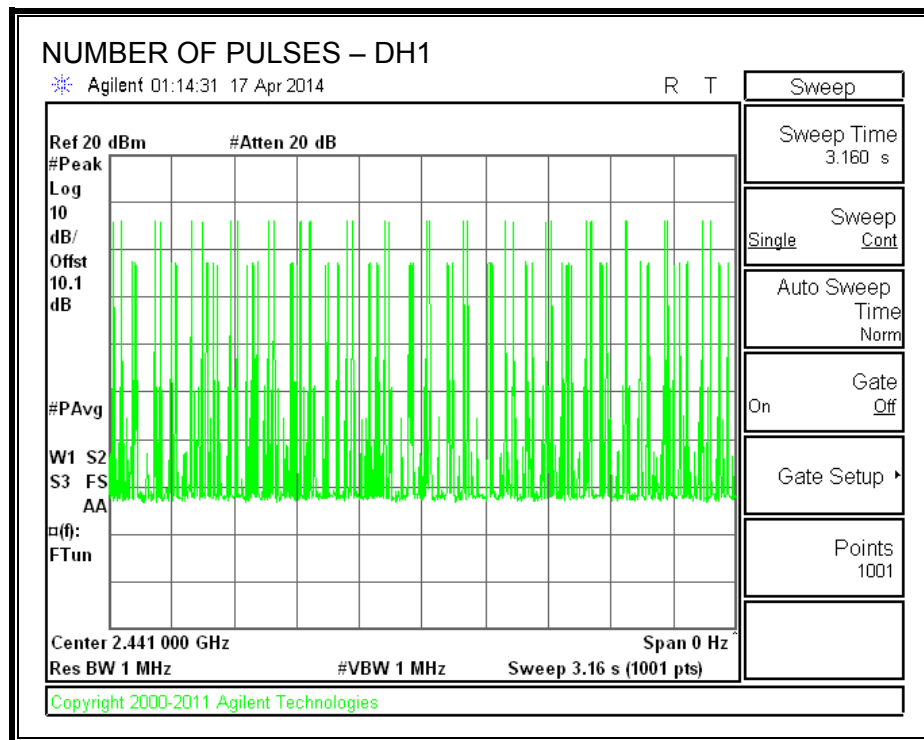


PULSE WIDTH – DH3

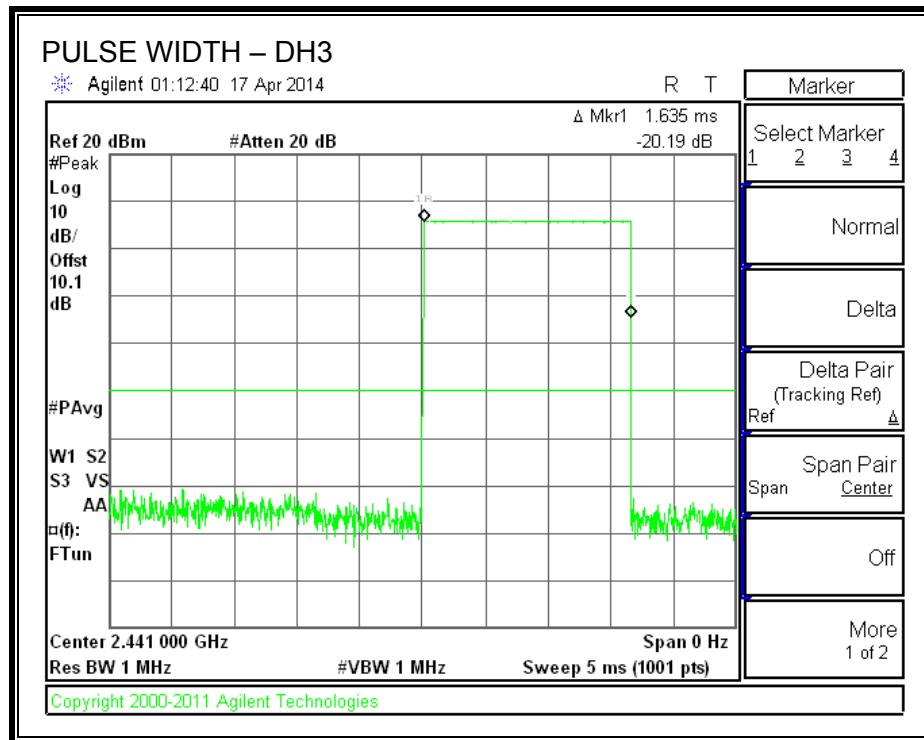


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH3

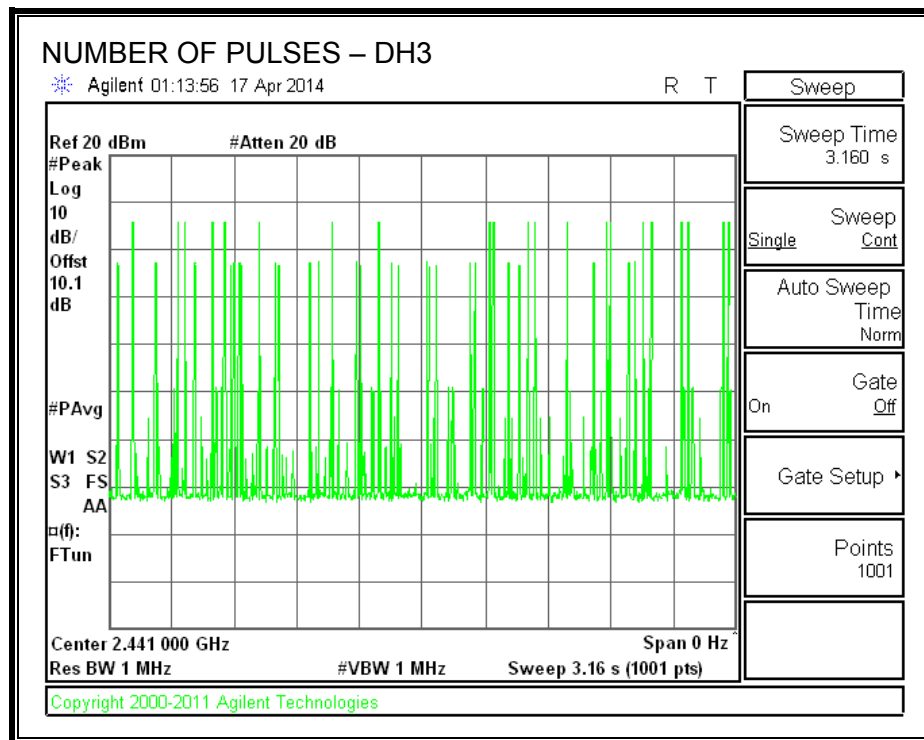

PULSE WIDTH – DH5

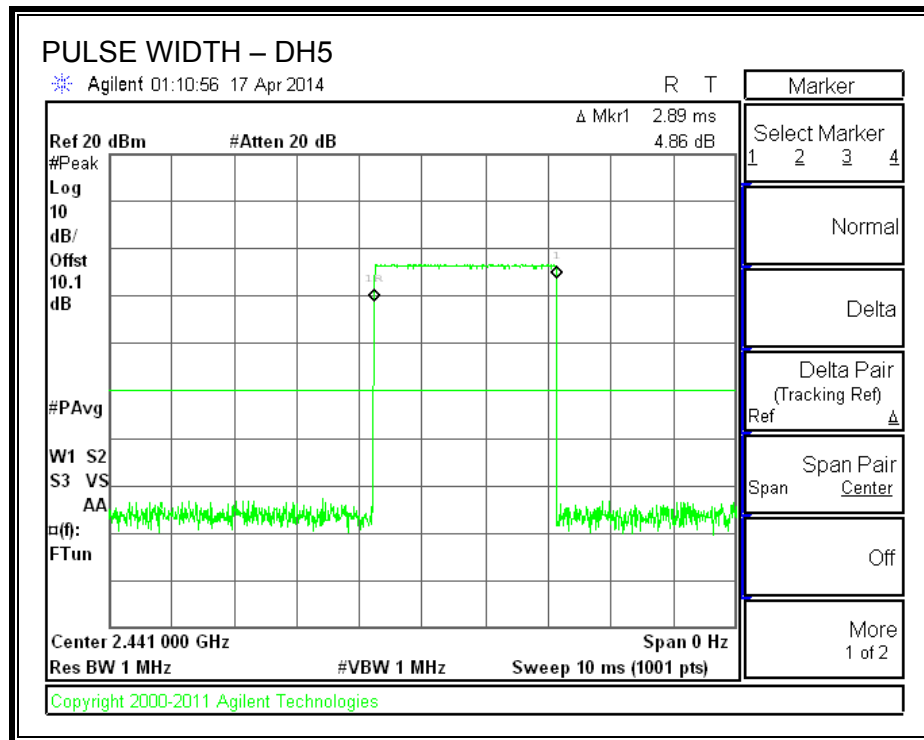

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH5

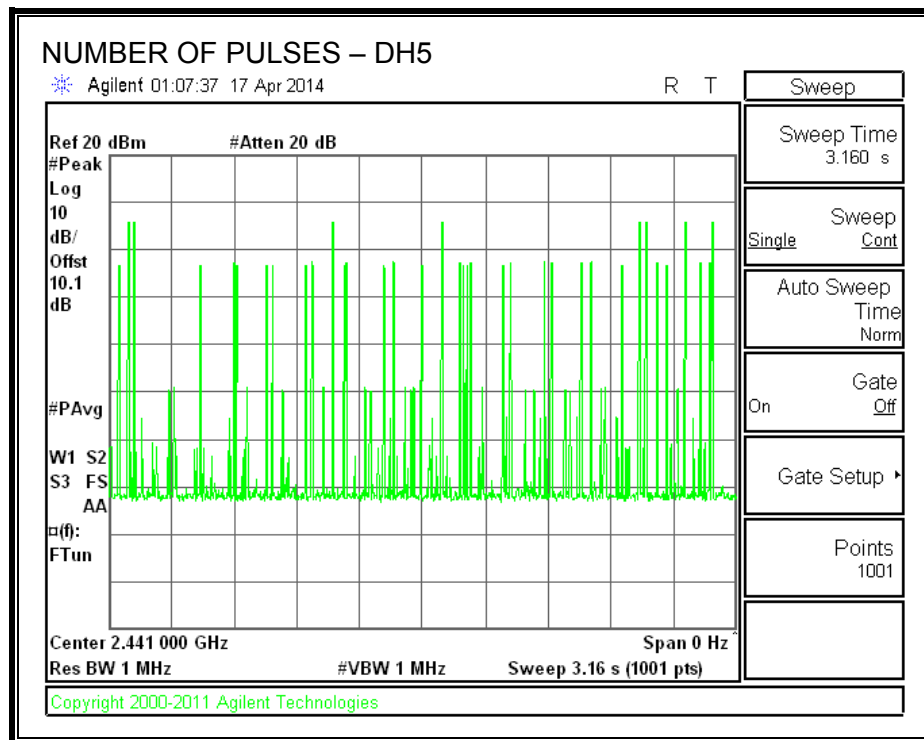

8.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 21 dBm.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS



8.5.1. BASIC DATA RATE GFSK MODULATION


Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	4.83	21	-16.17
Middle	2441	7.66	21	-13.34
High	2480	5.51	21	-15.49
Worst		7.66		-13.34

8.5.2. ENHANCED DATA RATE 8PSK MODULATION



Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	5.30	21	-15.70
Middle	2441	8.02	21	-12.98
High	2480	5.89	21	-15.11
Worst		8.02		-12.98


GFSK OUTPUT POWER

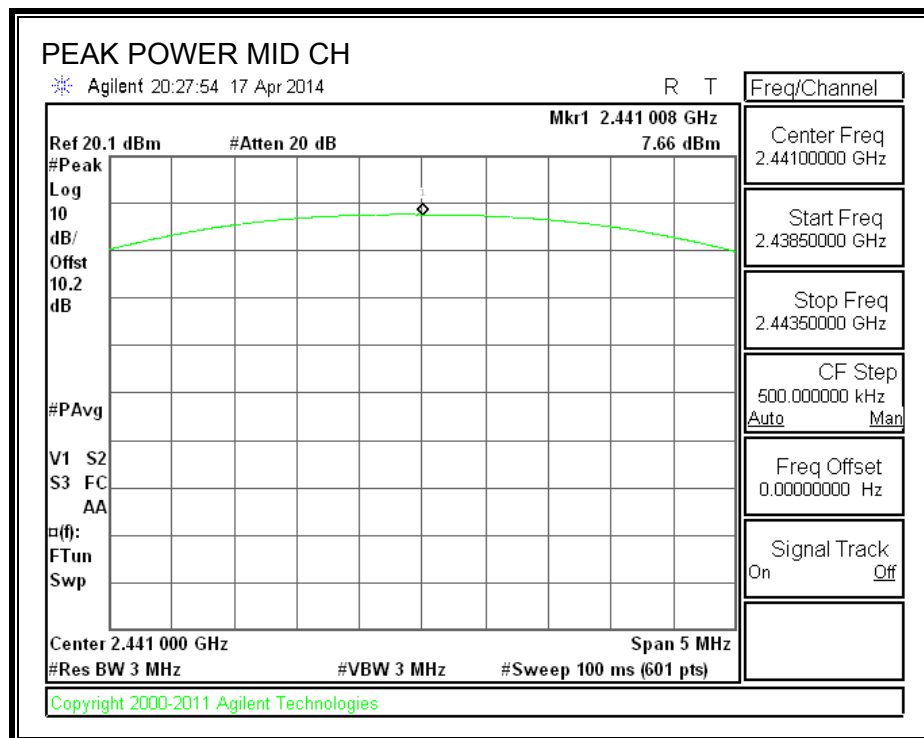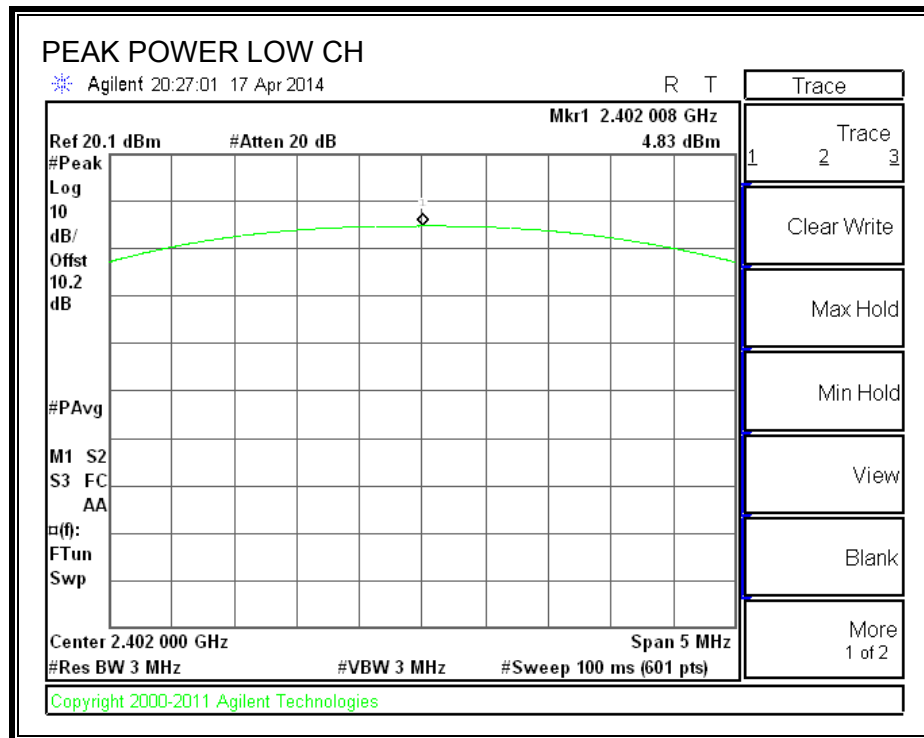

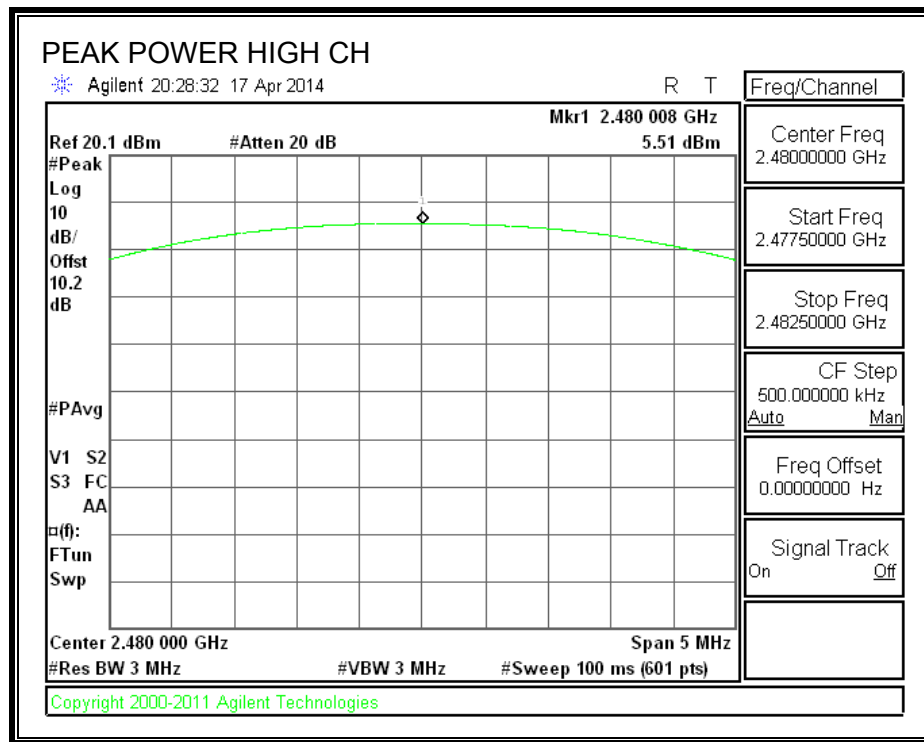

8PSK OUTPUT POWER

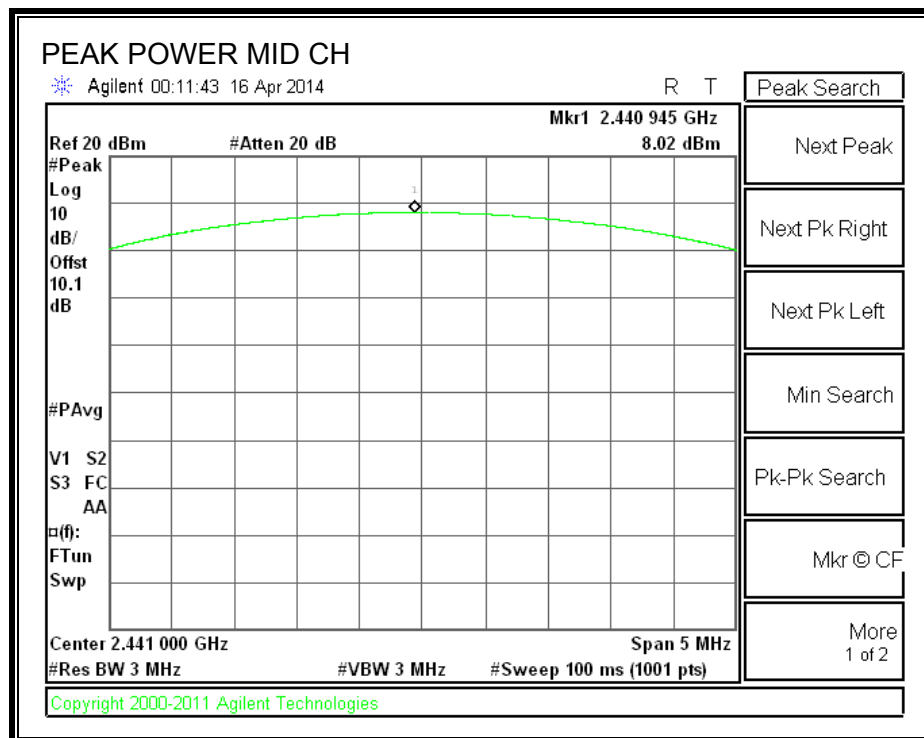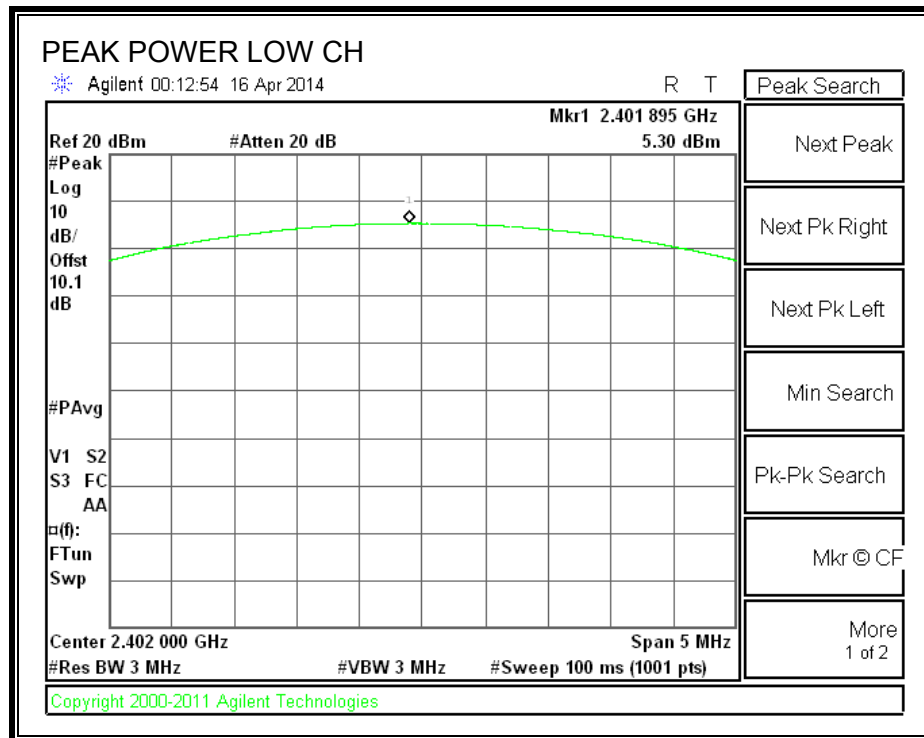

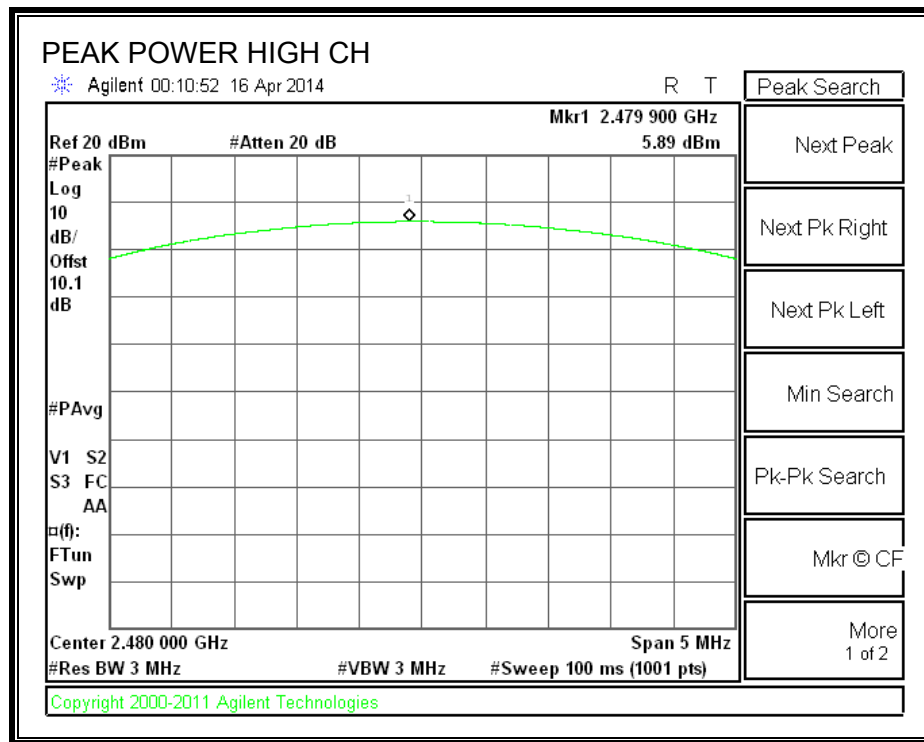

8.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 10.7 dB (including 10 dB pad and 0.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

8.6.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	4.61
Middle	2441	7.35
High	2480	5.24
Worst		7.35

8.6.2. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	2.60
Middle	2441	5.40
High	2480	3.30
Worst		5.40

8.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.



RESULTS

8.7.1. BASIC DATA RATE GFSK MODULATION



SPURIOUS EMISSIONS, LOW CHANNEL

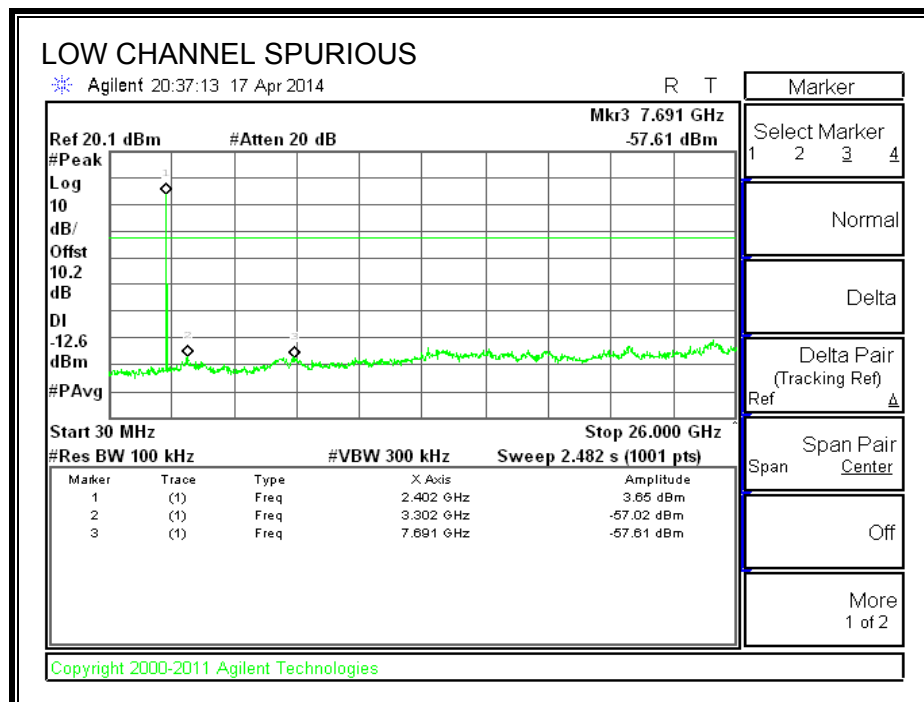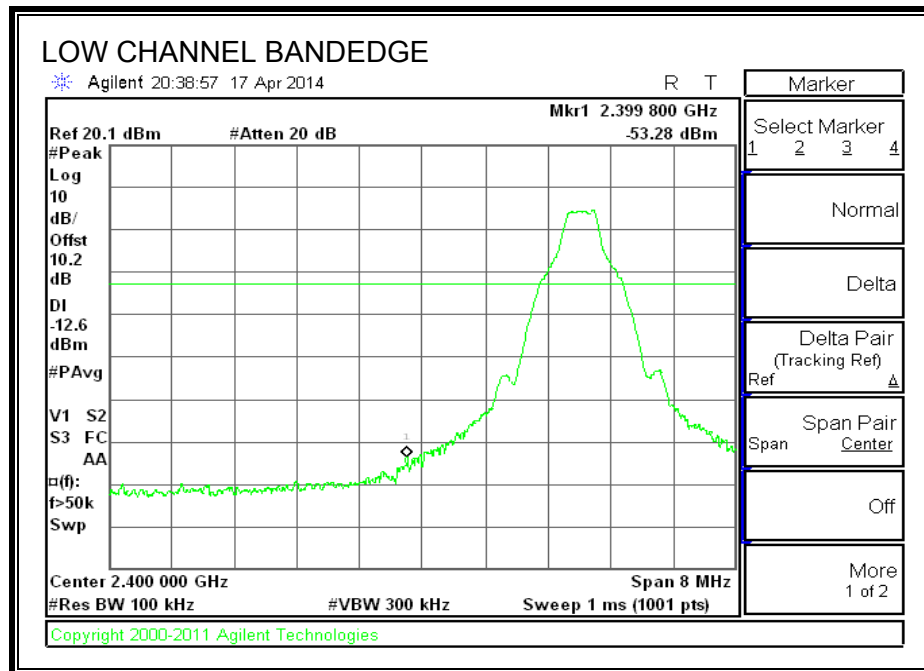



SPURIOUS EMISSIONS, MID CHANNEL

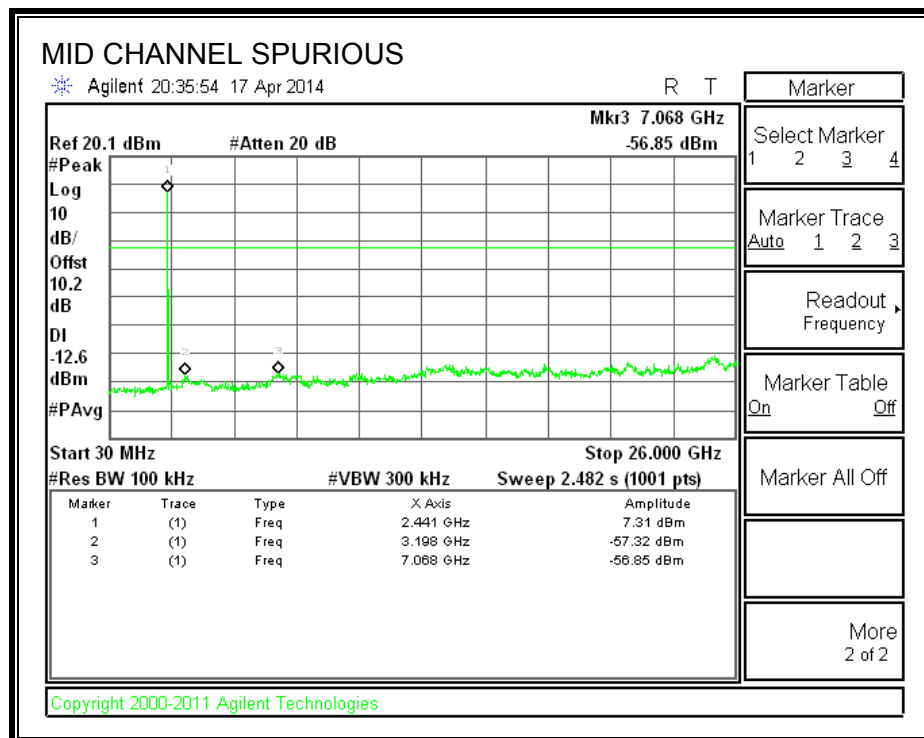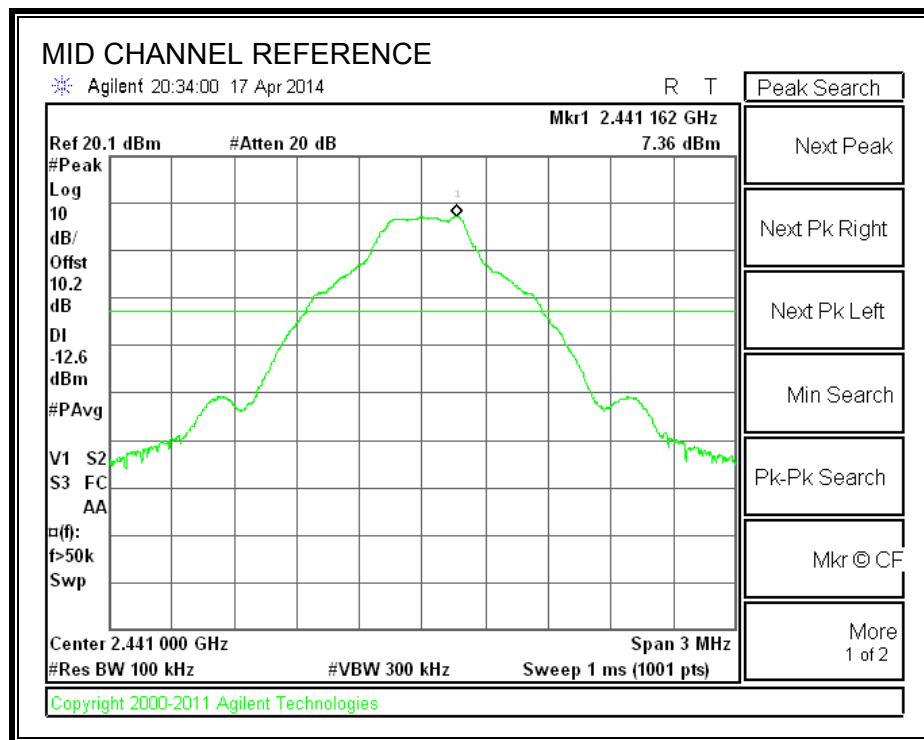

SPURIOUS EMISSIONS, HIGH CHANNEL

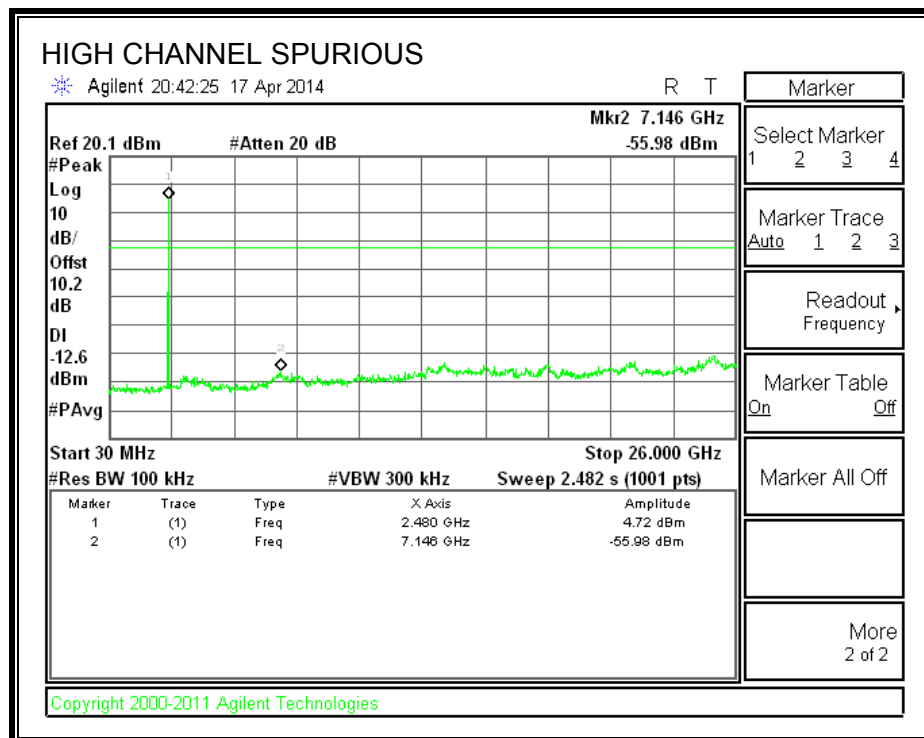
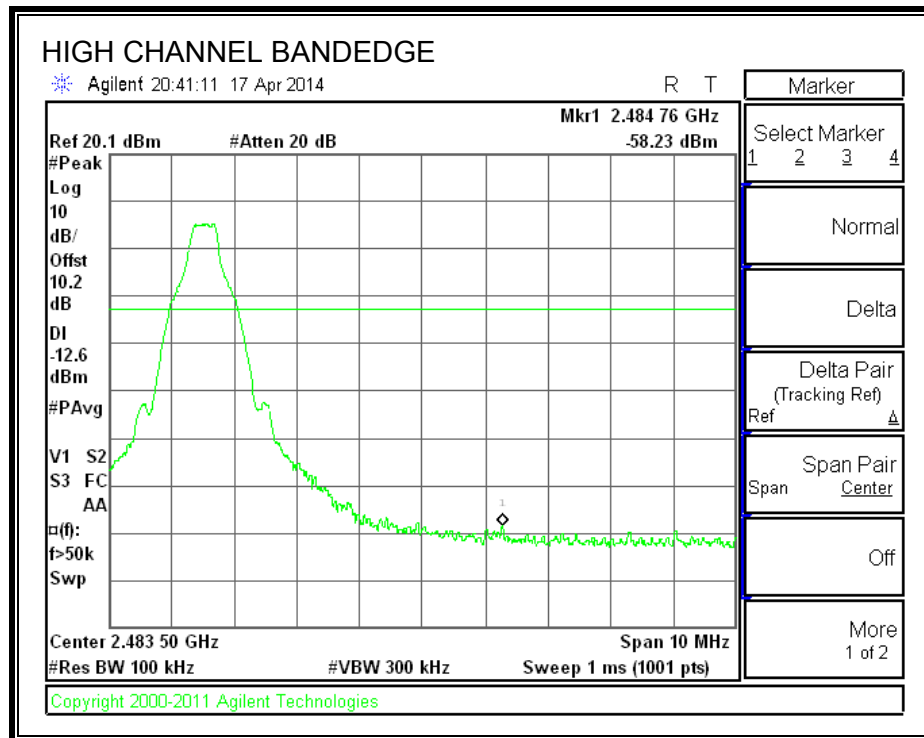


SPURIOUS BANDEDGE EMISSIONS WITH GFSK HOPPING ON

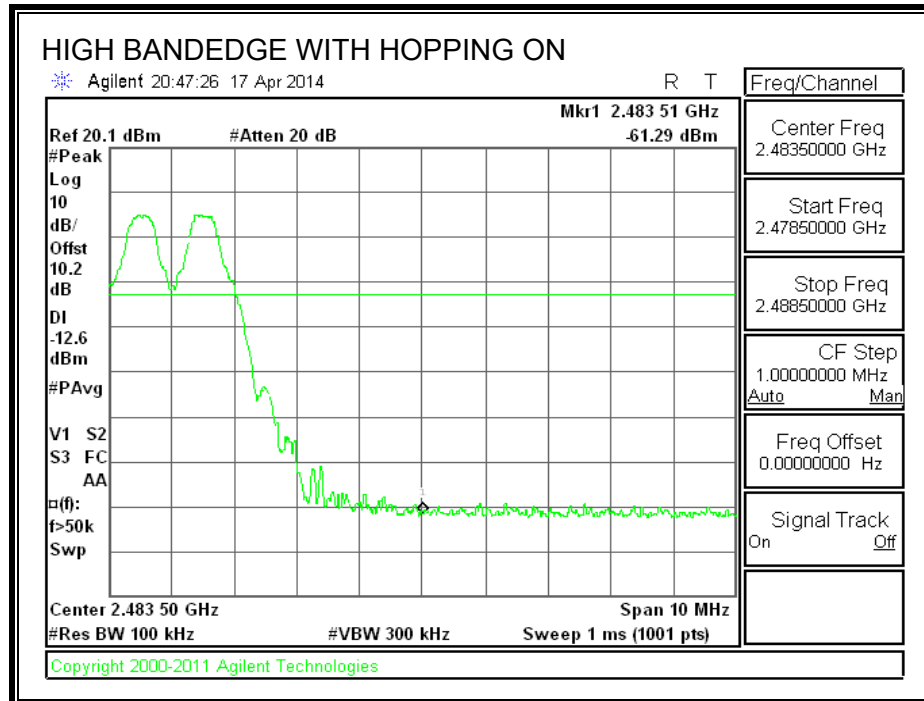
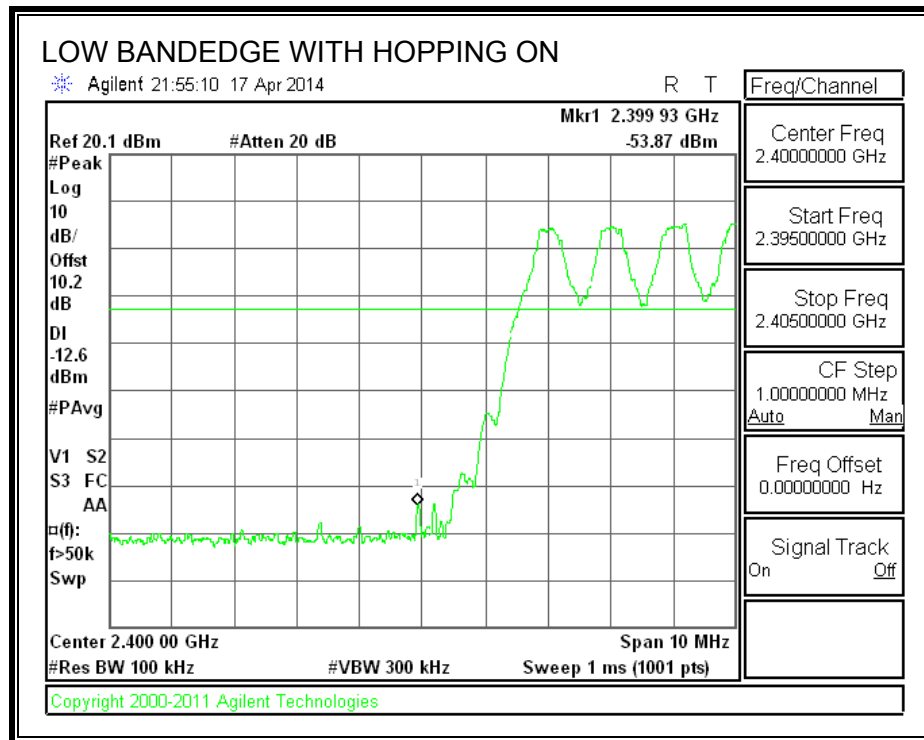


8.7.1. ENHANCED DATA RATE 8PSK MODULATION



SPURIOUS EMISSIONS, LOW CHANNEL

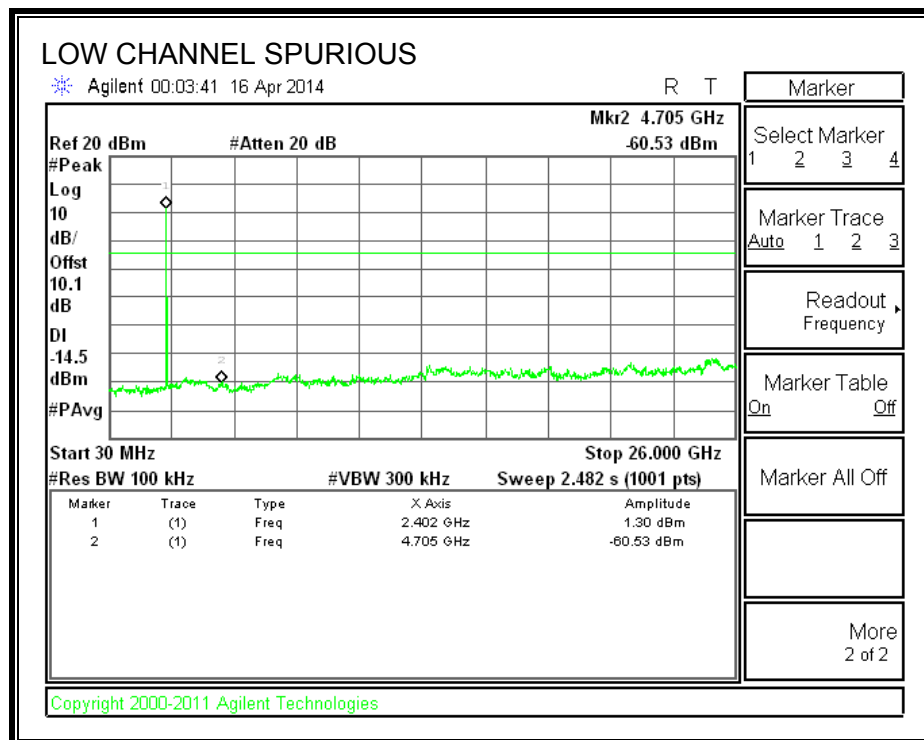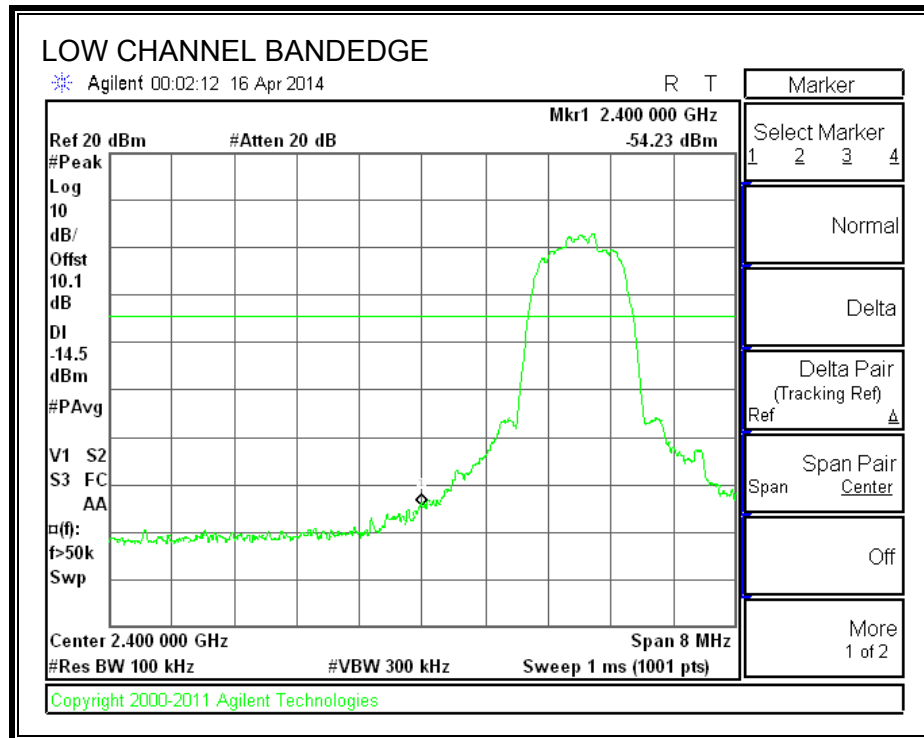



SPURIOUS EMISSIONS, MID CHANNEL

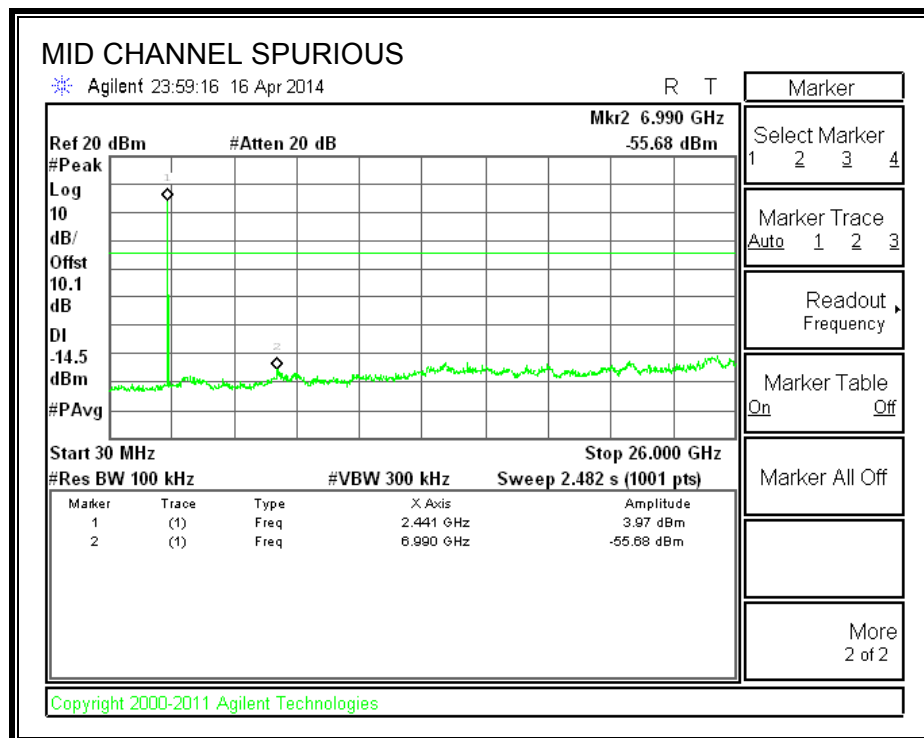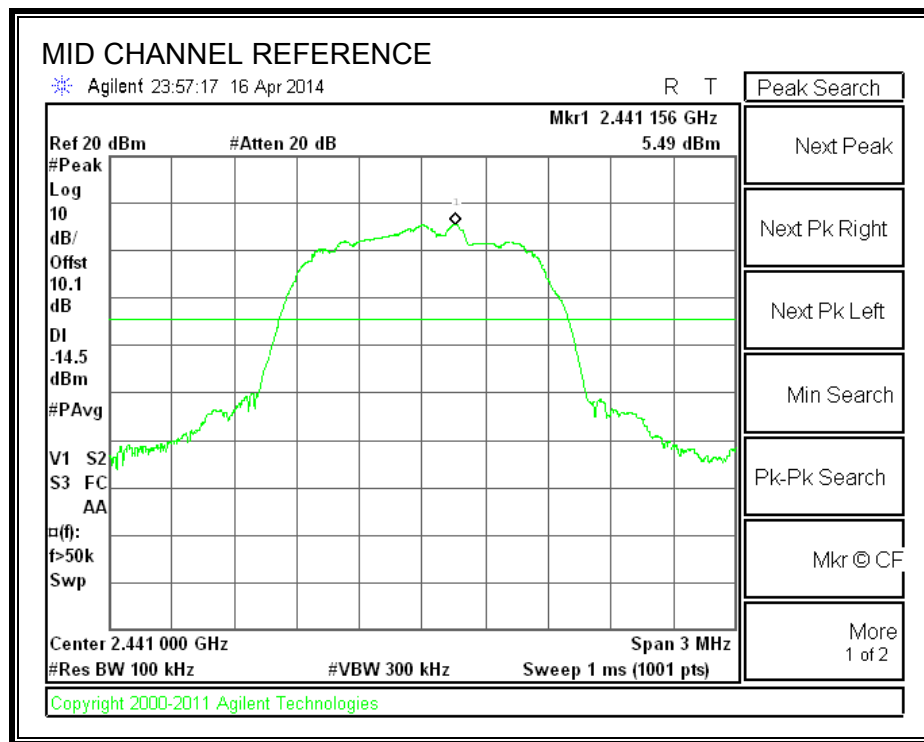

SPURIOUS EMISSIONS, HIGH CHANNEL

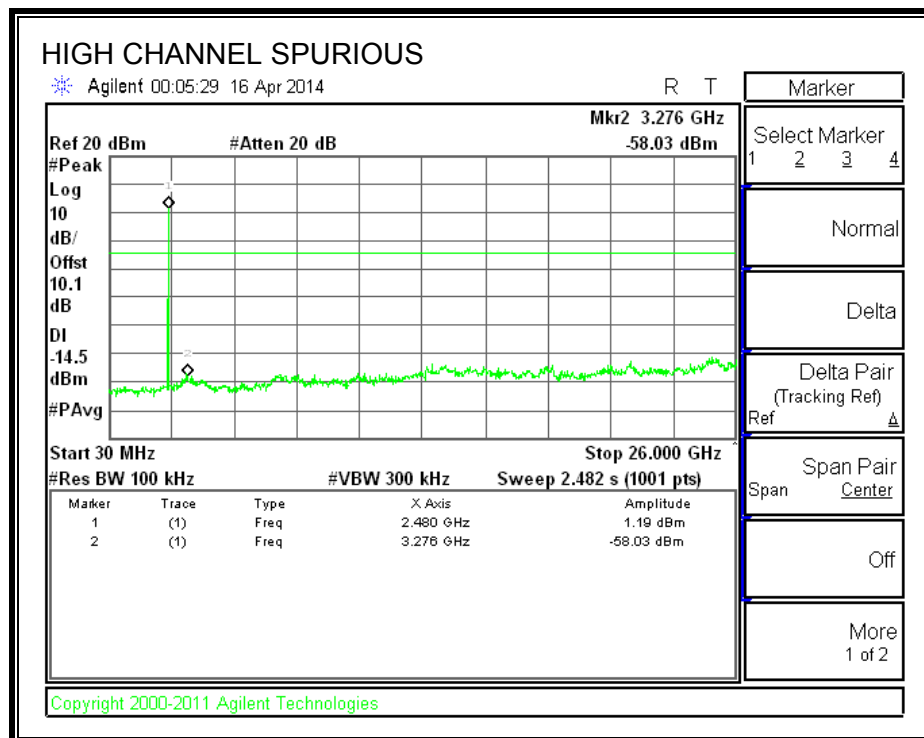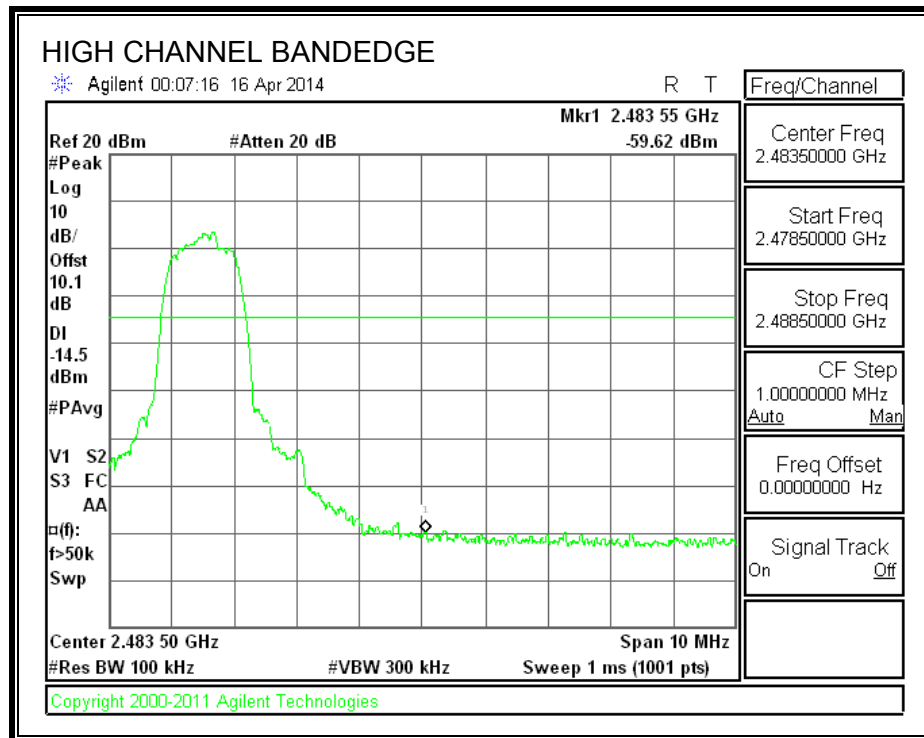

SPURIOUS BANDEDGE EMISSIONS WITH 8PSK HOPPING ON

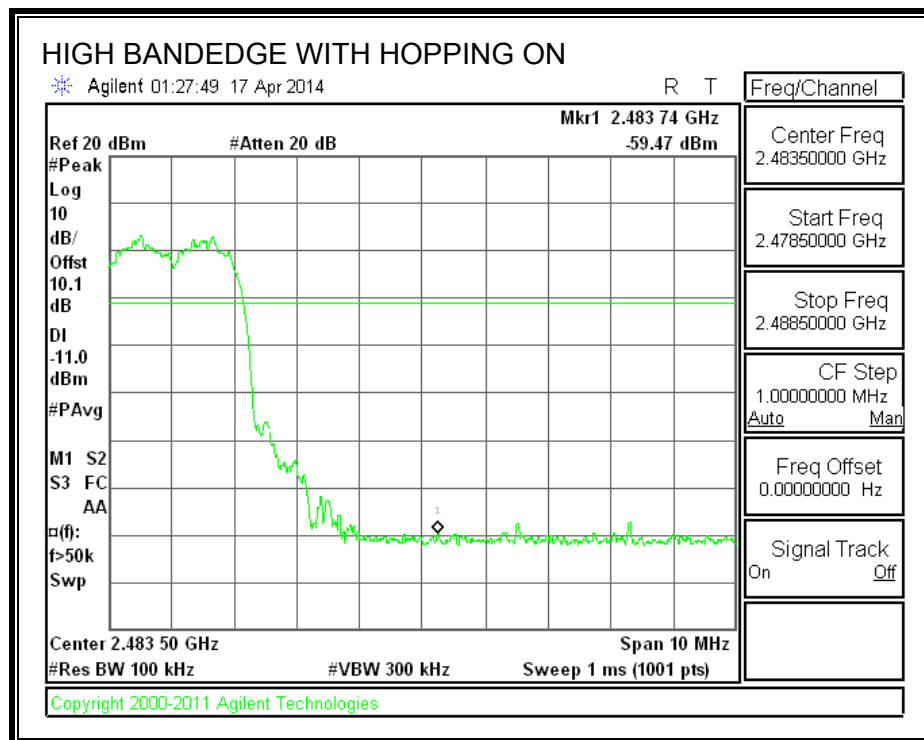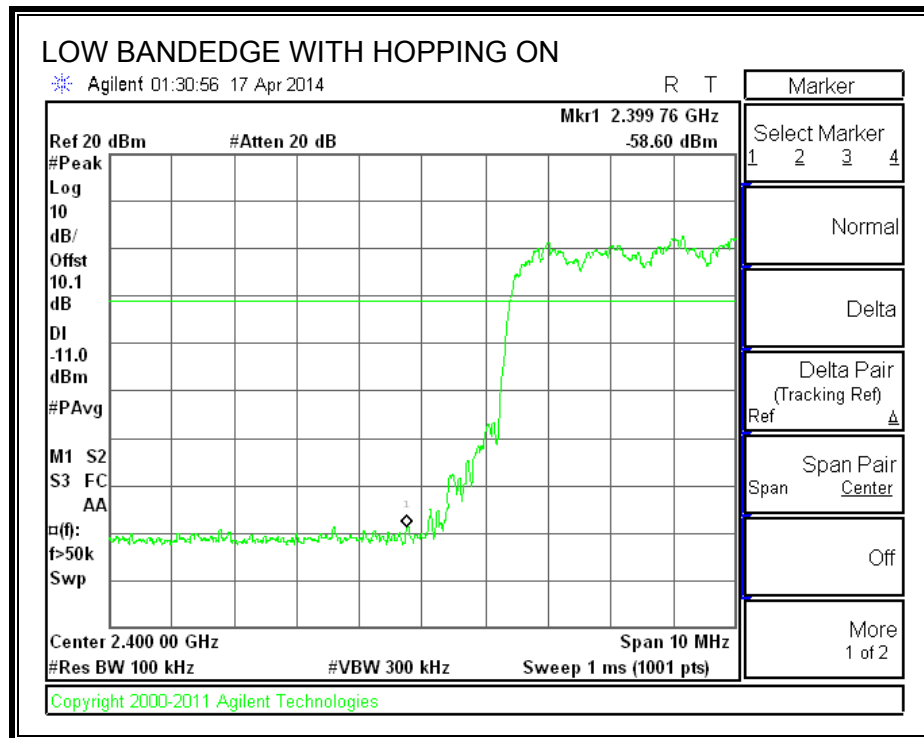

9. RADIATED TEST RESULTS

9.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For band edge measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 1/T (on time) for average measurement. $GFSK = 1/T = 1 / 0.0029S = 344Hz$.


The spectrum from 1GHzHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

9.2. TRANSMITTER ABOVE 1 GHz

9.2.1. BASIC DATA RATE GFSK MODULATION

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

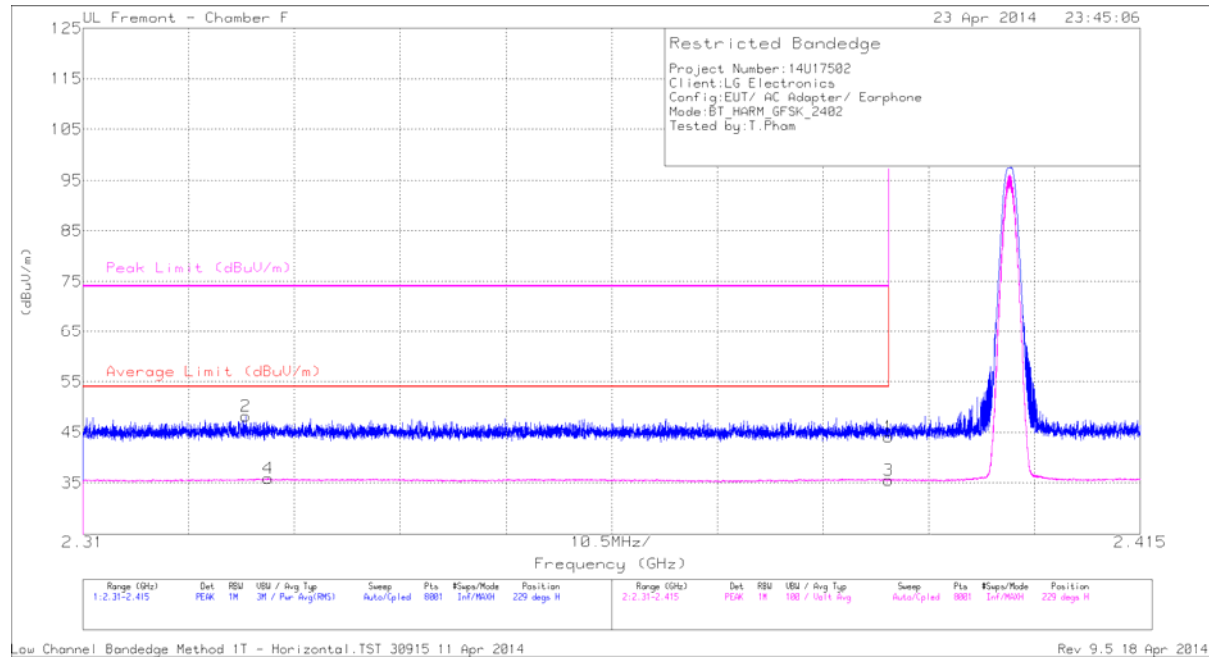

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	35.73	PK	32.2	-23.8	44.13	-	-	74	-29.87	229	281	H
2	* 2.326	39.79	PK	31.9	-23.5	48.19	-	-	74	-25.81	229	281	H
3	* 2.39	27.15	VB1T	32.2	-23.8	35.55	54	-18.45	-	-	229	281	H
4	* 2.328	27.44	VB1T	31.9	-23.5	35.84	54	-18.16	-	-	229	281	H


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

Low Channel Bandedge Method 1T - Horizontal.TST 30915 11 Apr 2014

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

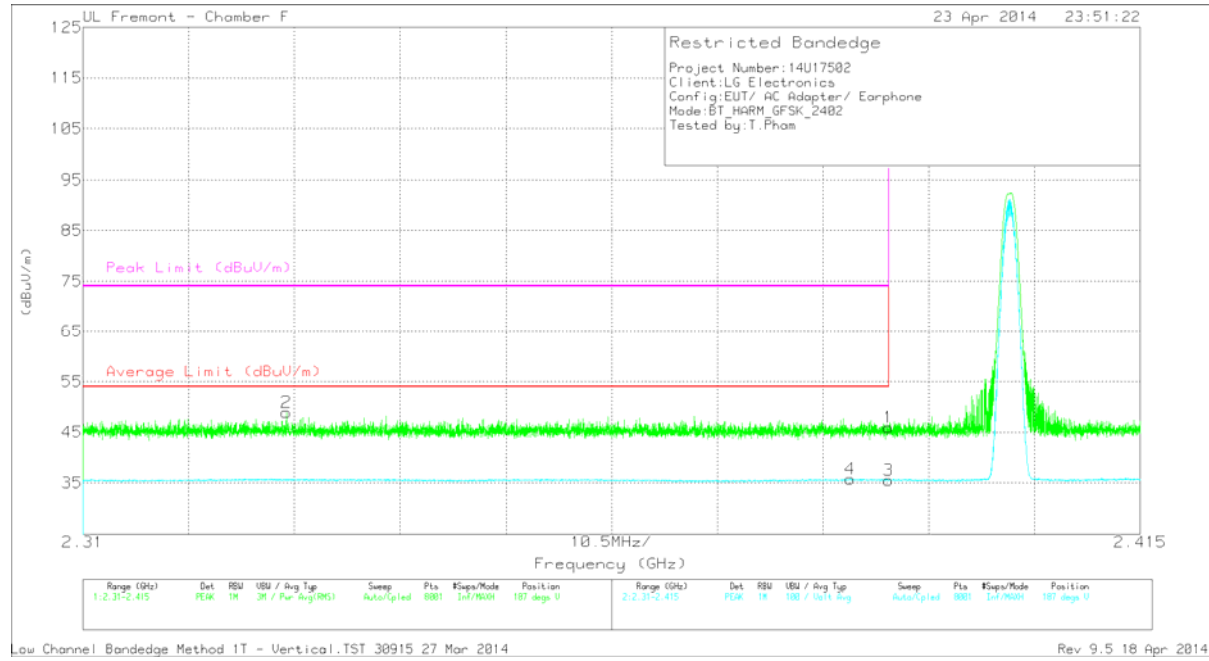

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	37.54	PK	32.2	-23.8	45.94	-	-	74	-28.06	187	281	V
2	* 2.33	40.57	PK	31.9	-23.5	48.97	-	-	74	-25.03	187	281	V
3	* 2.39	27.06	VB1T	32.2	-23.8	35.46	54	-18.54	-	-	187	281	V
4	* 2.386	27.41	VB1T	32.2	-23.8	35.81	54	-18.19	-	-	187	281	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

Low Channel Bandedge Method 1T - Vertical.TST 30915 27 Mar 2014

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

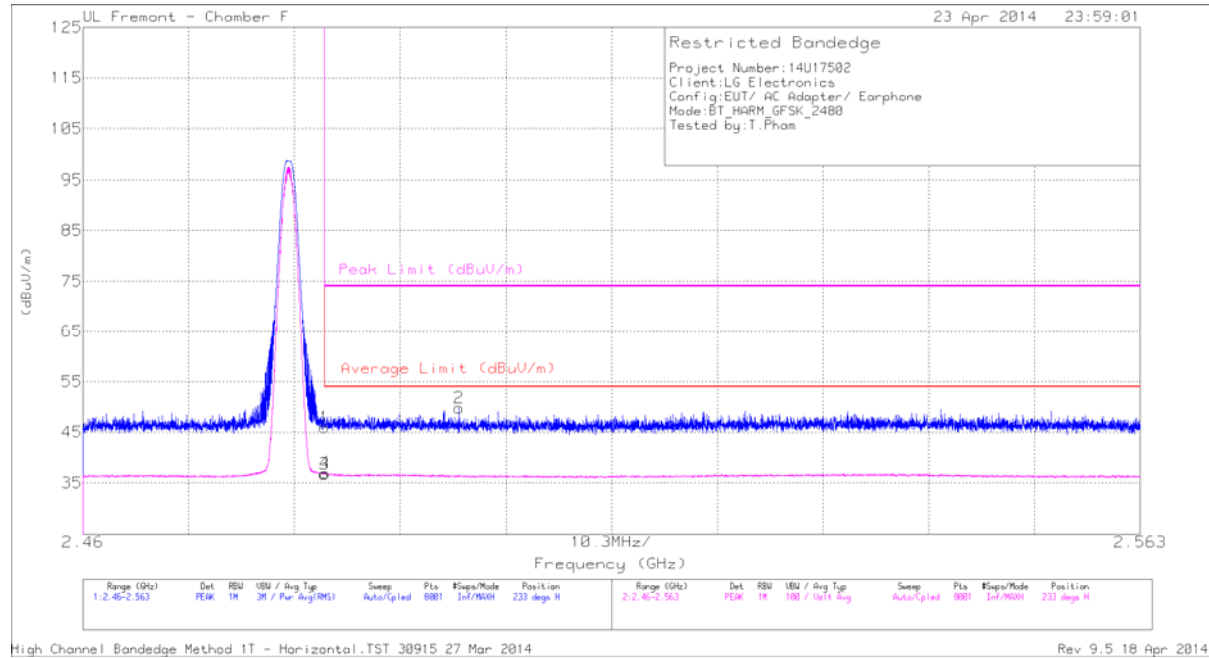

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	36.4	PK	32.6	-23	46	-	-	74	-28	233	263	H
2	* 2.497	40.21	PK	32.6	-23	49.81	-	-	74	-24.19	233	263	H
3	* 2.484	27.13	VB1T	32.6	-23	36.73	54	-17.27	-	-	233	263	H
4	* 2.484	27.34	VB1T	32.6	-23	36.94	54	-17.06	-	-	233	263	H


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

High Channel Bandedge Method 1T - Horizontal.TST 30915 27 Mar 2014

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

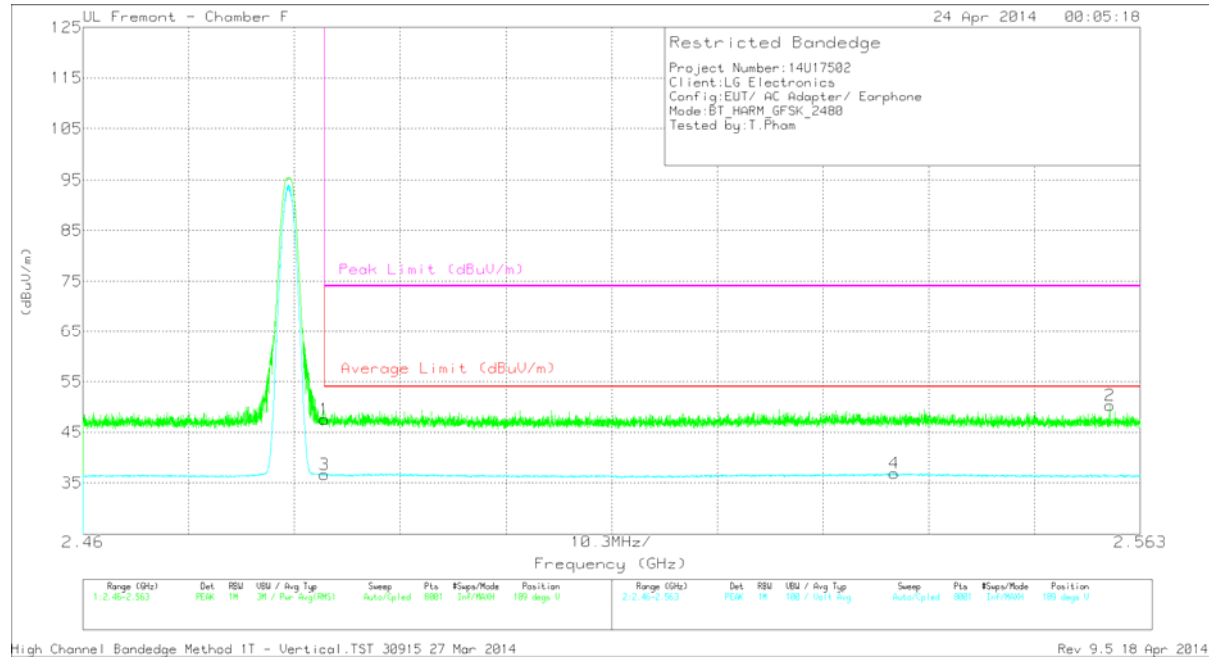

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	37.92	PK	32.6	-23	47.52	-	-	74	-26.48	189	272	V
2	2.56	40.82	PK	32.7	-23.2	50.32	-	-	74	-23.68	189	272	V
3	* 2.484	27.06	VB1T	32.6	-23	36.66	54	-17.34	-	-	189	272	V
4	2.539	26.96	VB1T	32.7	-22.8	36.86	54	-17.14	-	-	189	272	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

High Channel Bandedge Method 1T - Vertical.TST 30915 27 Mar 2014


HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

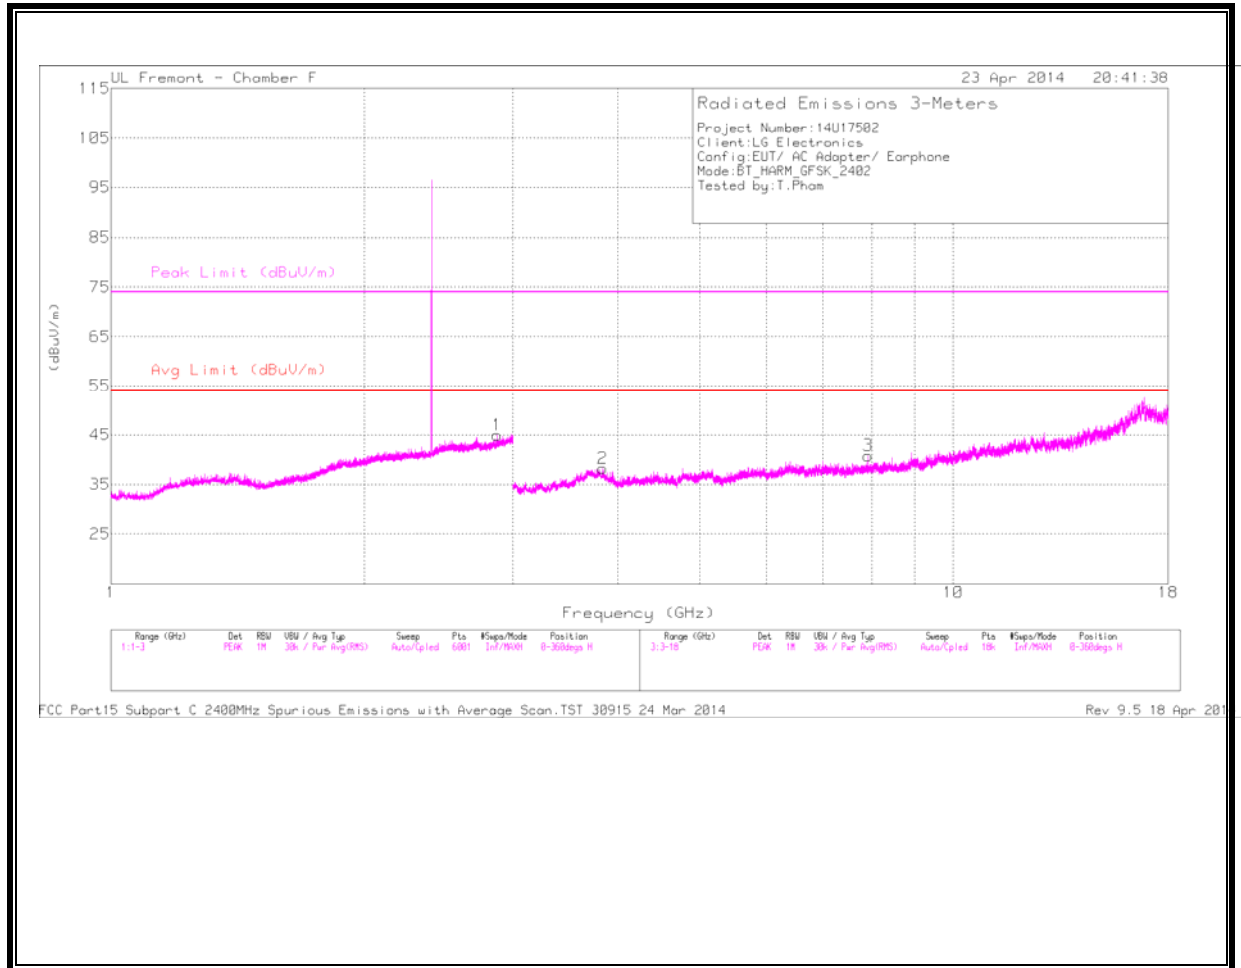

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

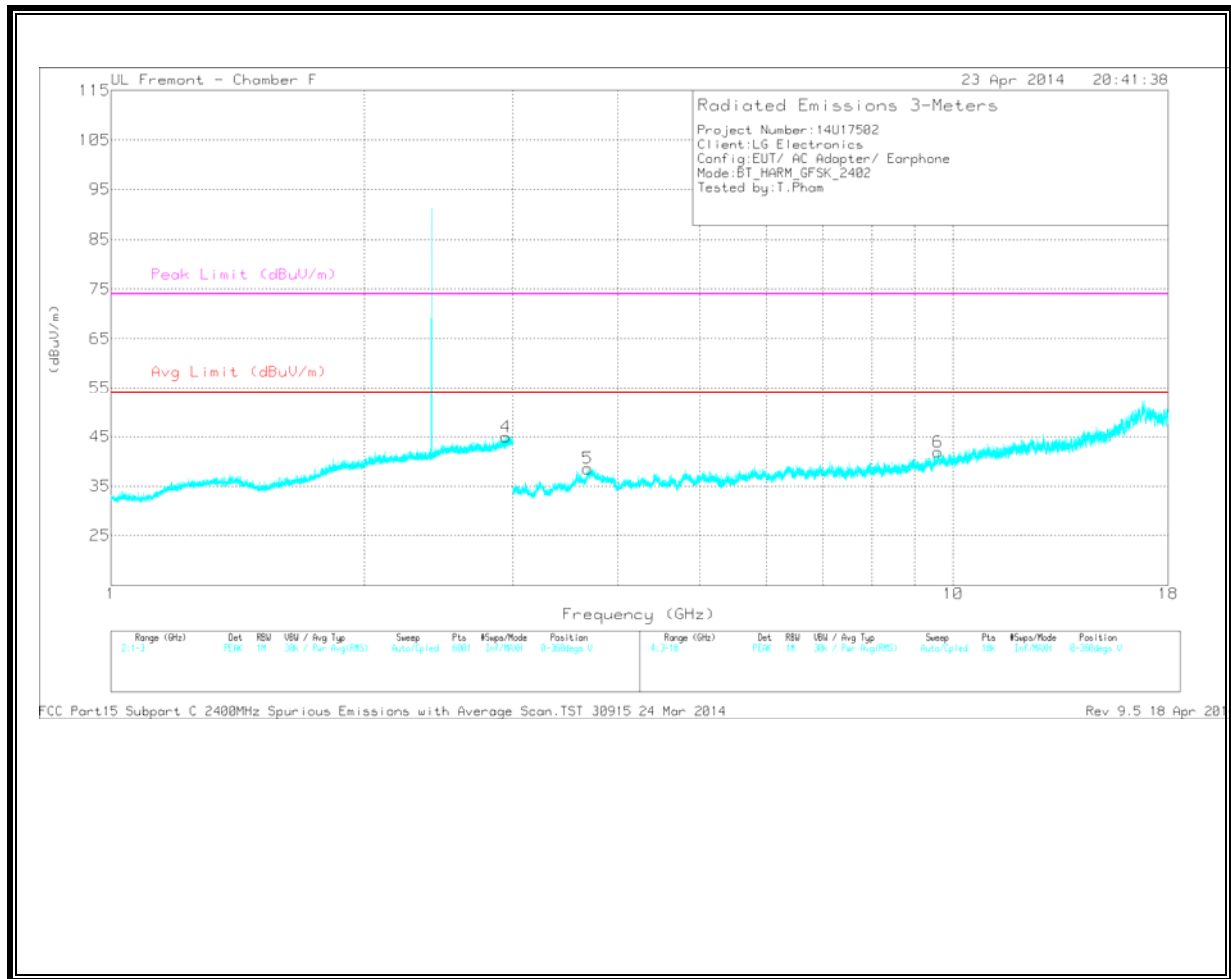

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.875	34.41	PK	33.1	-22.5	45.01	54	-8.99	74	-28.99	0-360	201	H
4	2.945	33.69	PK	33.3	-22	44.99	54	-9.01	74	-29.01	0-360	101	V
2	* 3.838	32.93	PK	34.2	-28.9	38.23	54	-15.77	74	-35.77	0-360	101	H
3	7.924	30.64	PK	35.7	-25.5	40.84	54	-13.16	74	-33.16	0-360	201	H
5	* 3.683	32.86	PK	34.9	-29.2	38.56	54	-15.44	74	-35.44	0-360	200	V
6	9.598	26.46	PK	36.9	-21.4	41.96	54	-12.04	74	-32.04	0-360	101	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.875	41.98	PK3	33.1	-22.5	52.58	54	-1.42	74	-21.42	0	100	H
* 3.839	39.38	PK3	34.2	-28.9	44.68	54	-9.32	74	-29.32	0	100	H
* 3.683	39.26	PK3	34.9	-29.2	44.96	54	-9.04	74	-29.04	0	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK3 - FHSS Method: Maximum Peak

MID CHANNEL
HORIZONTAL

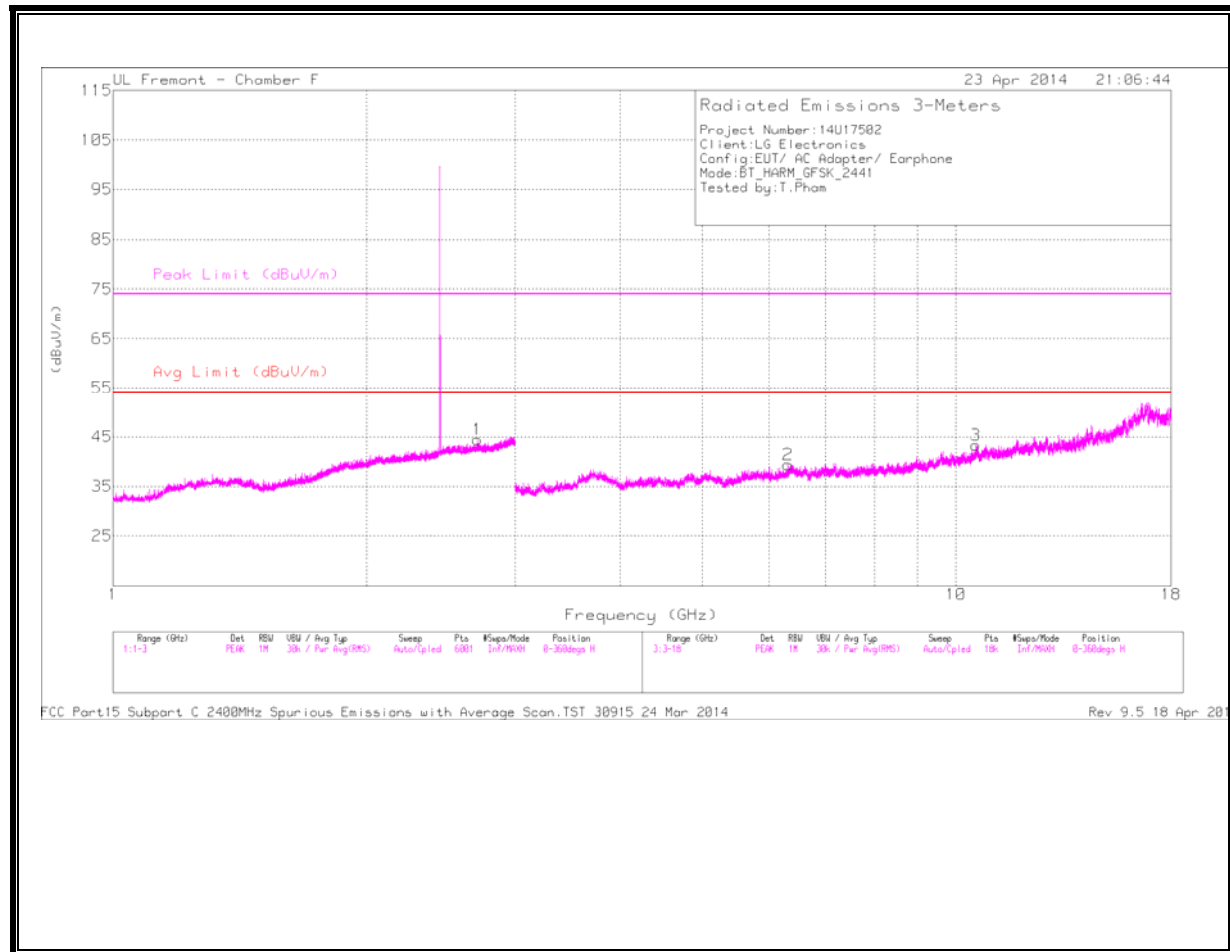

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

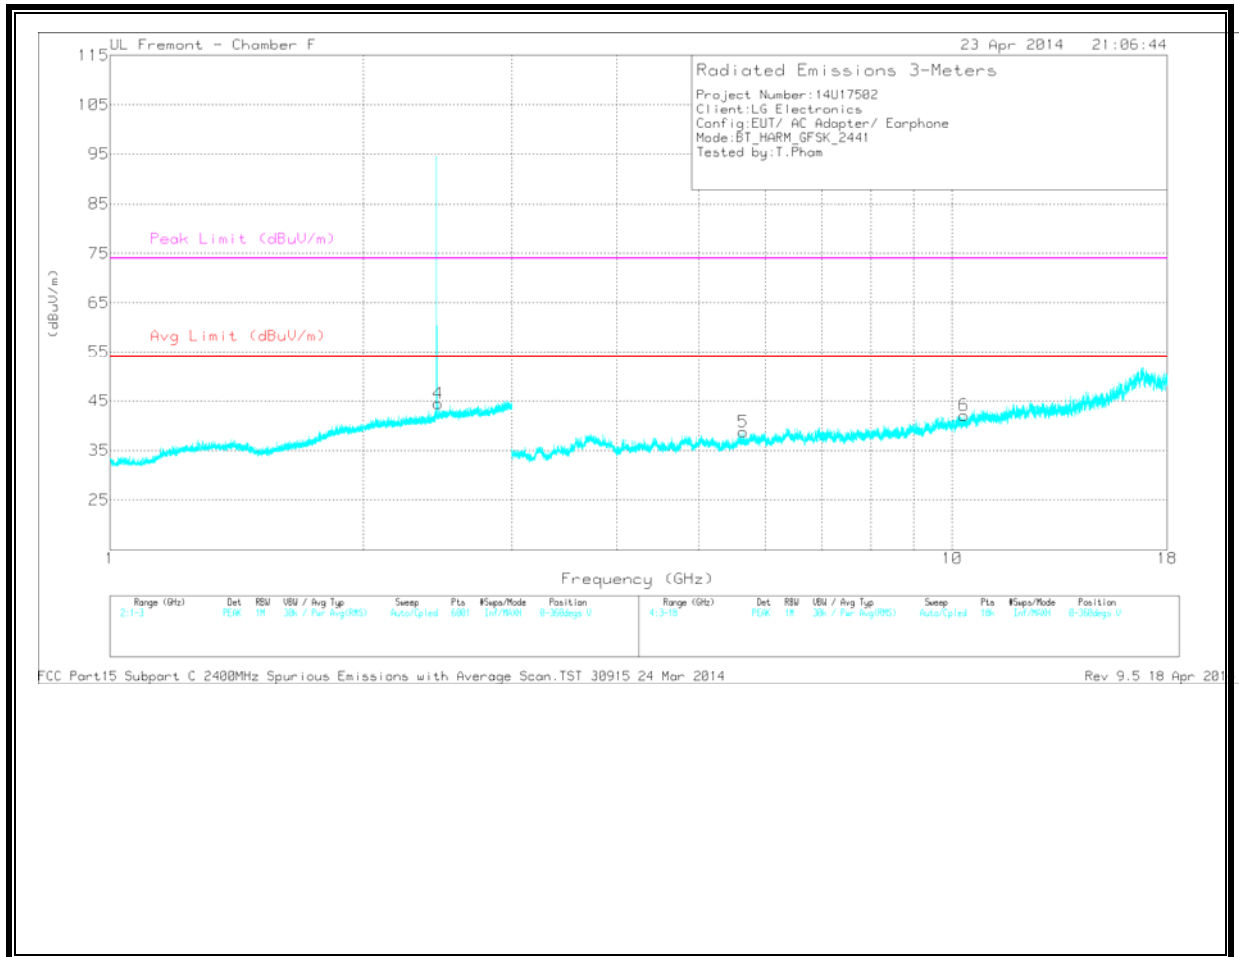

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.707	34.38	PK	32.7	-22.6	44.48	54	-9.52	74	-29.52	0-360	200	H
4	2.455	35.4	PK	32.4	-23.3	44.5	54	-9.5	74	-29.5	0-360	201	V
2	6.321	31.33	PK	35.5	-27.4	39.43	54	-14.57	74	-34.57	0-360	101	H
3	10.563	26.43	PK	37.8	-20.9	43.33	54	-10.67	74	-30.67	0-360	101	H
5	5.651	31.73	PK	34.7	-27.7	38.73	54	-15.27	74	-35.27	0-360	201	V
6	10.325	27.41	PK	37.2	-22.5	42.11	54	-11.89	74	-31.89	0-360	101	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.706	41.44	PK3	32.7	-22.5	51.64	54	-2.36	74	-22.36	360	101	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK3 - FHSS Method: Maximum Peak

HIGH CHANNEL
HORIZONTAL

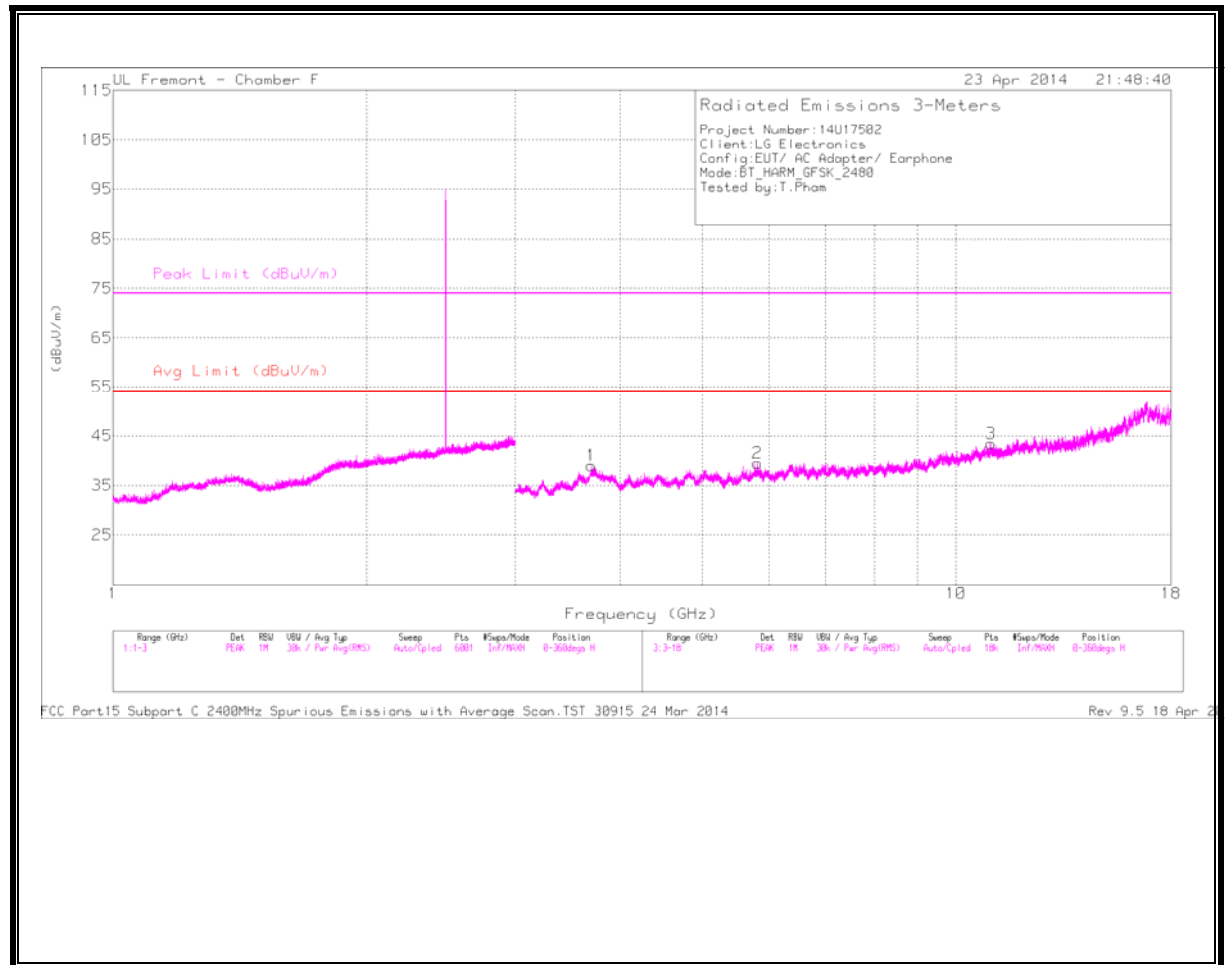

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

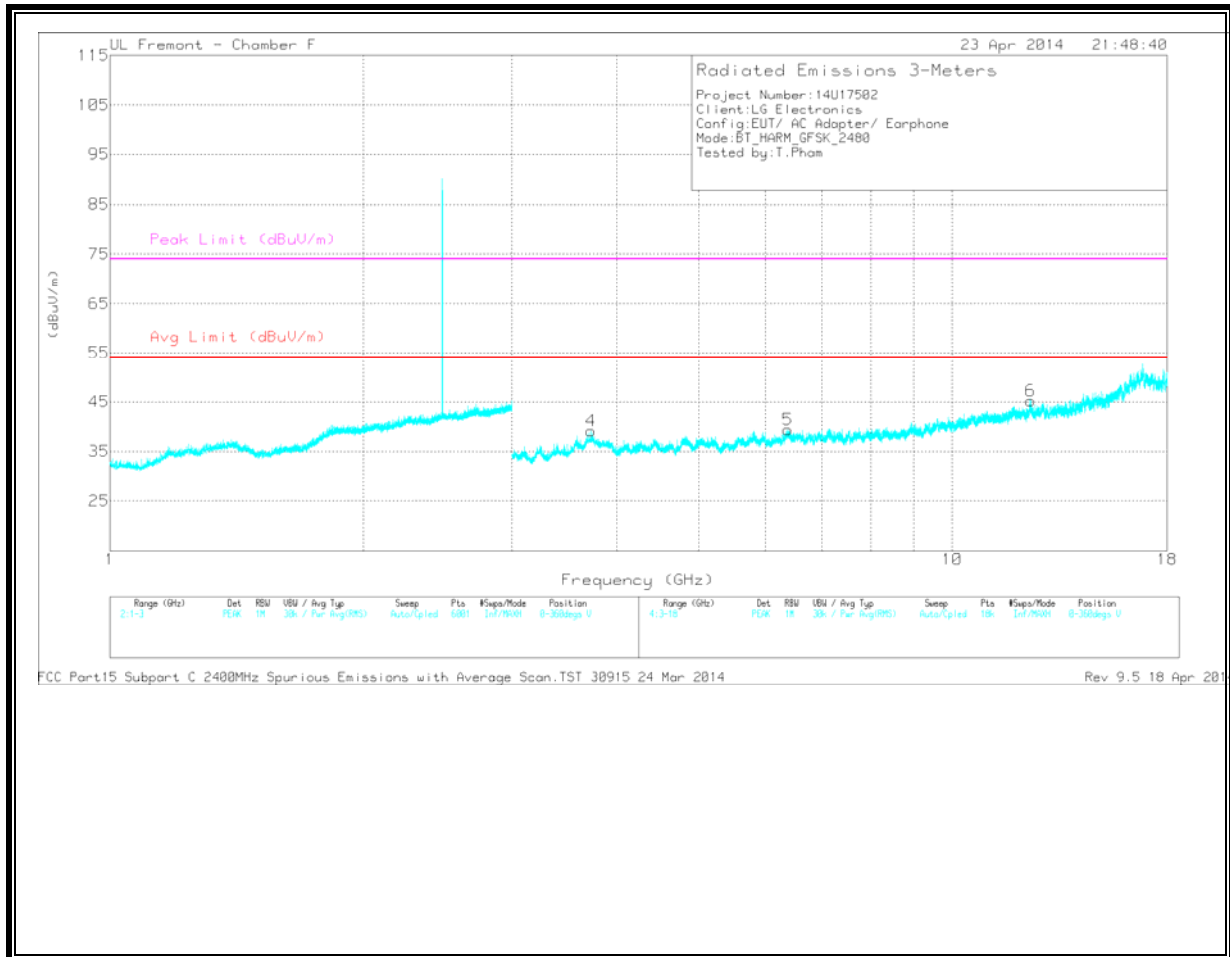

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.693	33.49	PK	34.9	-29.4	38.99	54	-15.01	74	-35.01	0-360	101	H
2	5.811	32.14	PK	35	-27.6	39.54	54	-14.46	74	-34.46	0-360	201	H
3	* 11	27.26	PK	38.1	-21.9	43.46	54	-10.54	74	-30.54	0-360	101	H
4	* 3.725	33.97	PK	34.7	-29.5	39.17	54	-14.83	74	-34.83	0-360	101	V
5	6.377	30.98	PK	35.6	-27.2	39.38	54	-14.62	74	-34.62	0-360	101	V
6	* 12.381	28.01	PK	38.9	-21.7	45.21	54	-8.79	74	-28.79	0-360	199	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.693	38.94	PK3	34.9	-29.4	44.44	54	-9.56	74	-29.56	360	100	H
* 11.001	33.8	PK3	38.1	-21.9	50	54	-4.0	74	-24	360	100	H
* 3.724	40.14	PK3	34.7	-29.5	45.34	54	-8.66	74	-28.66	360	100	V
* 12.381	35.96	PK3	38.9	-21.7	53.16	54	-10.84	74	-20.84	360	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK3 - FHSS Method: Maximum Peak

WORST CASE HARMONICS AND SPURIOUS EMISSIONS WITH WPC CHARGER AND COVER

HORIZONTAL

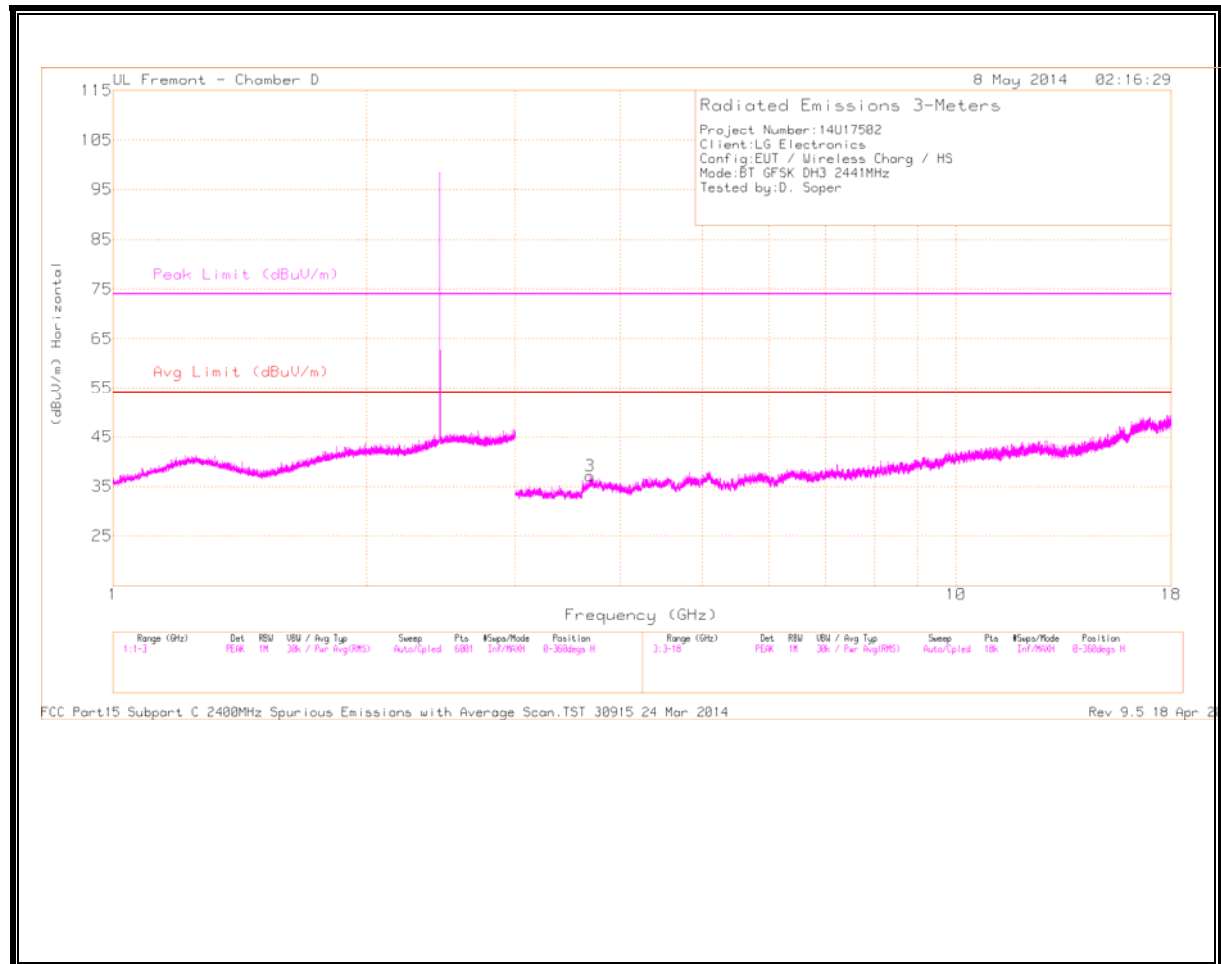

VERTICAL

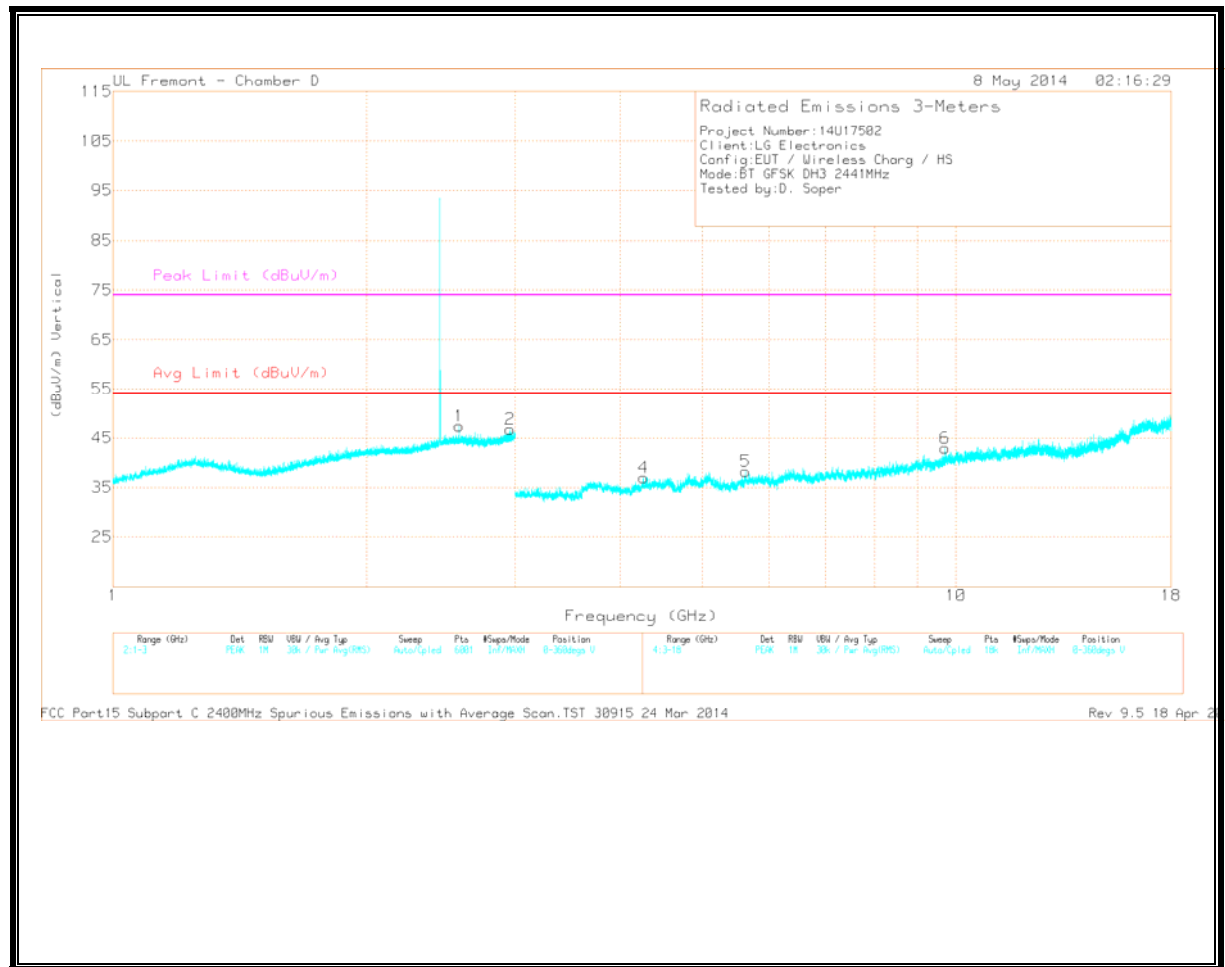

CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 3.683	32.51	PK	32.6	-28	37.11	-	-	74	-36.89	0-360	100	H
4	* 4.257	31.92	PK	32.9	-27.9	36.92	-	-	74	-37.08	0-360	100	V
1	2.574	35.72	PK	32	-20.4	47.32	-	-	-	-	0-360	201	V
2	2.961	34.54	PK	32.3	-20.1	46.74	-	-	-	-	0-360	100	V
5	5.626	30.82	PK	34.1	-26.7	38.22	-	-	-	-	0-360	201	V
6	9.714	27.51	PK	36.4	-21	42.91	-	-	-	-	0-360	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.68	38.89	PK3	32.6	-28	43.49	-	-	74	-30.51	0	100	H
* 3.684	26.2	VB1T	32.6	-28	30.8	54	-23.2	-	-	0	100	H


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

9.2.2. ENHANCED DATA RATE 8PSK MODULATION

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

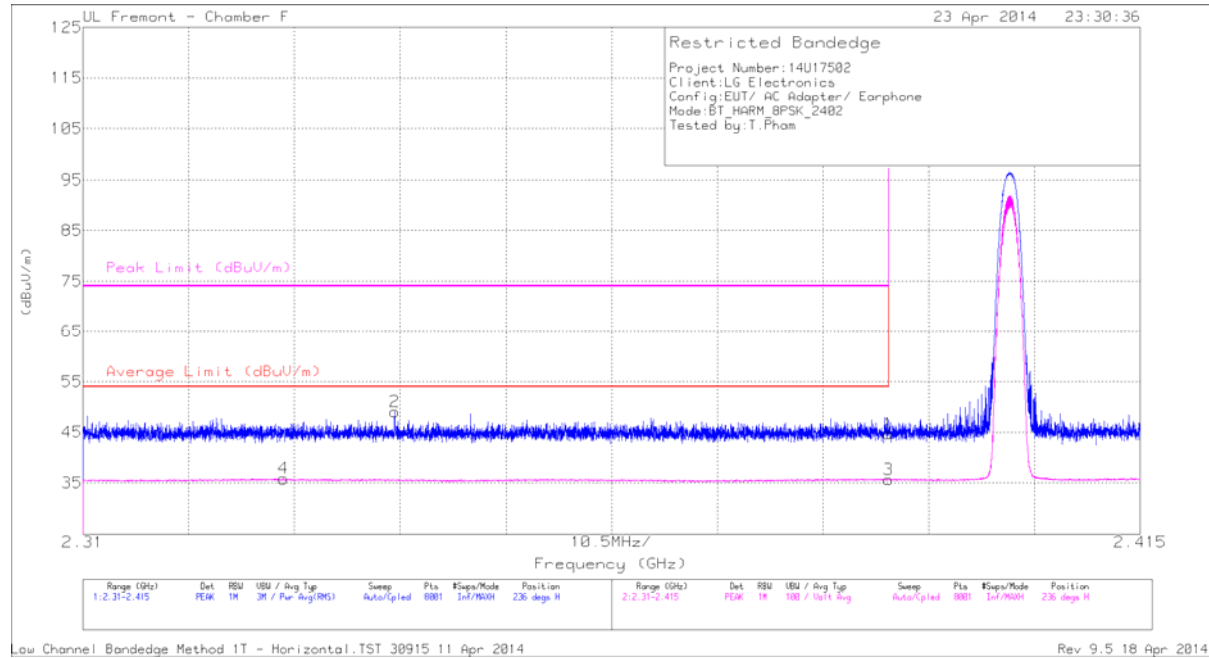

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	36.27	PK	32.2	-23.8	44.67	-	-	74	-29.33	236	286	H
2	* 2.341	40.61	PK	32	-23.6	49.01	-	-	74	-24.99	236	286	H
3	* 2.39	27.26	VB1T	32.2	-23.8	35.66	54	-18.34	-	-	236	286	H
4	* 2.33	27.43	VB1T	31.9	-23.5	35.83	54	-18.17	-	-	236	286	H


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

Low Channel Bandedge Method 1T - Horizontal.TST 30915 11 Apr 2014

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

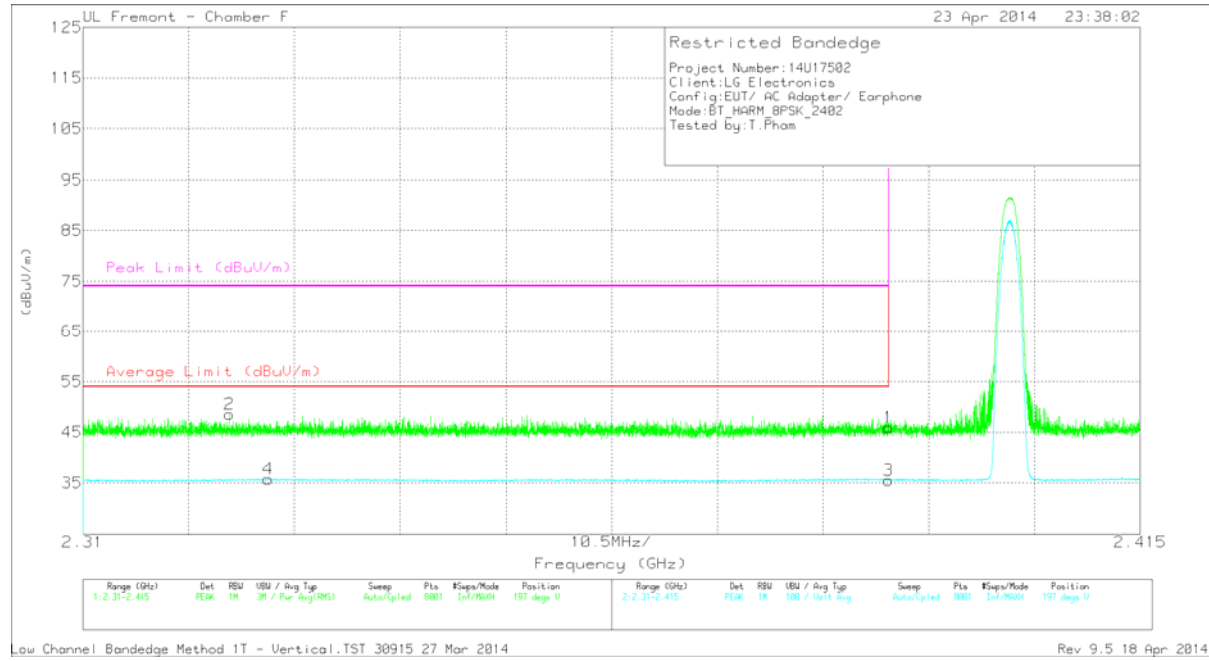

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	37.5	PK	32.2	-23.8	45.9	-	-	74	-28.1	197	369	V
2	* 2.325	40.16	PK	31.9	-23.5	48.56	-	-	74	-25.44	197	369	V
3	* 2.39	27.17	VB1T	32.2	-23.8	35.57	54	-18.43	-	-	197	369	V
4	* 2.328	27.4	VB1T	31.9	-23.5	35.8	54	-18.2	-	-	197	369	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

Low Channel Bandedge Method 1T - Vertical.TST 30915 27 Mar 2014

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

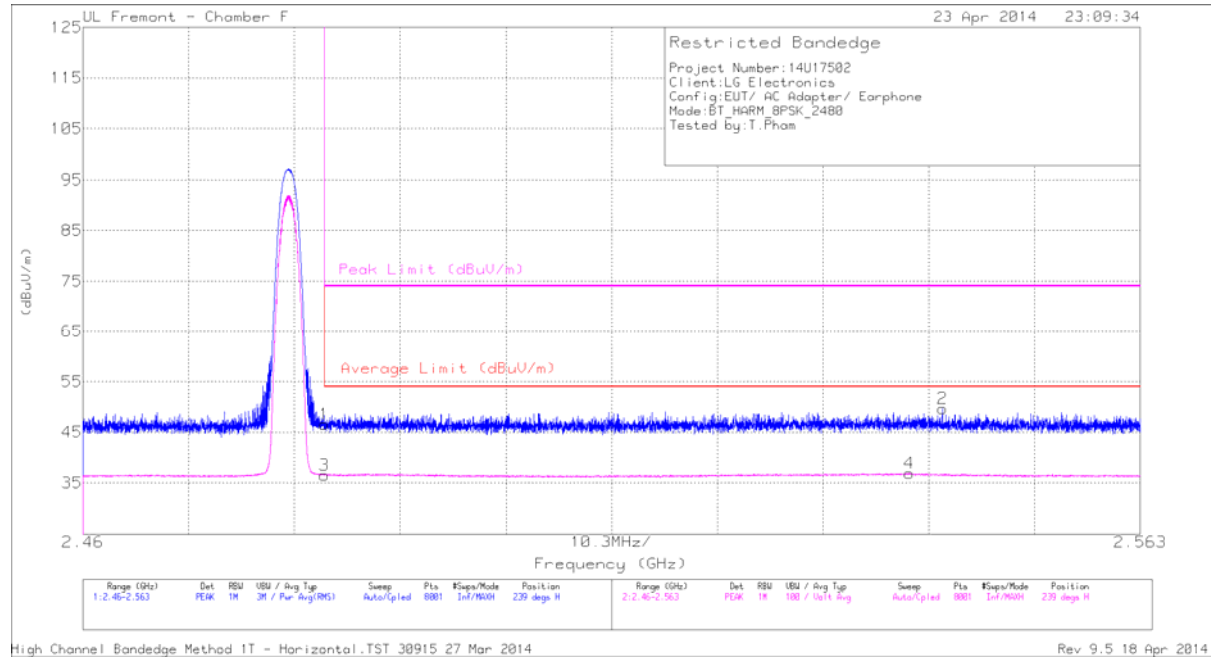

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	37.01	PK	32.6	-23	46.61	-	-	74	-27.39	239	266	H
2	2.544	39.84	PK	32.7	-22.9	49.64	-	-	74	-24.36	239	266	H
3	* 2.484	26.94	VB1T	32.6	-23	36.54	54	-17.46	-	-	239	266	H
4	2.54	26.95	VB1T	32.7	-22.8	36.85	54	-17.15	-	-	239	266	H


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

High Channel Bandedge Method 1T - Horizontal.TST 30915 27 Mar 2014

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

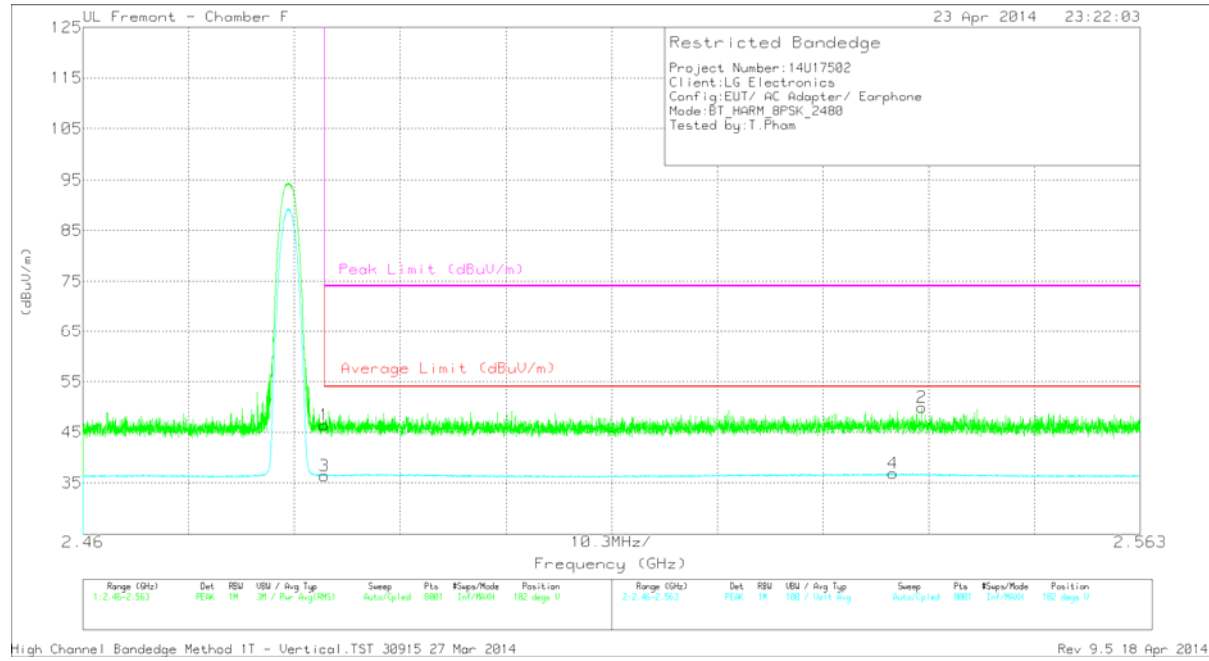

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	36.87	PK	32.6	-23	46.47	-	-	74	-27.53	182	278	V
2	2.542	40.07	PK	32.7	-22.9	49.87	-	-	74	-24.13	182	278	V
3	* 2.484	26.84	VB1T	32.6	-23	36.44	54	-17.56	-	-	182	278	V
4	2.539	26.94	VB1T	32.7	-22.8	36.84	54	-17.16	-	-	182	278	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

High Channel Bandedge Method 1T - Vertical.TST 30915 27 Mar 2014


HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

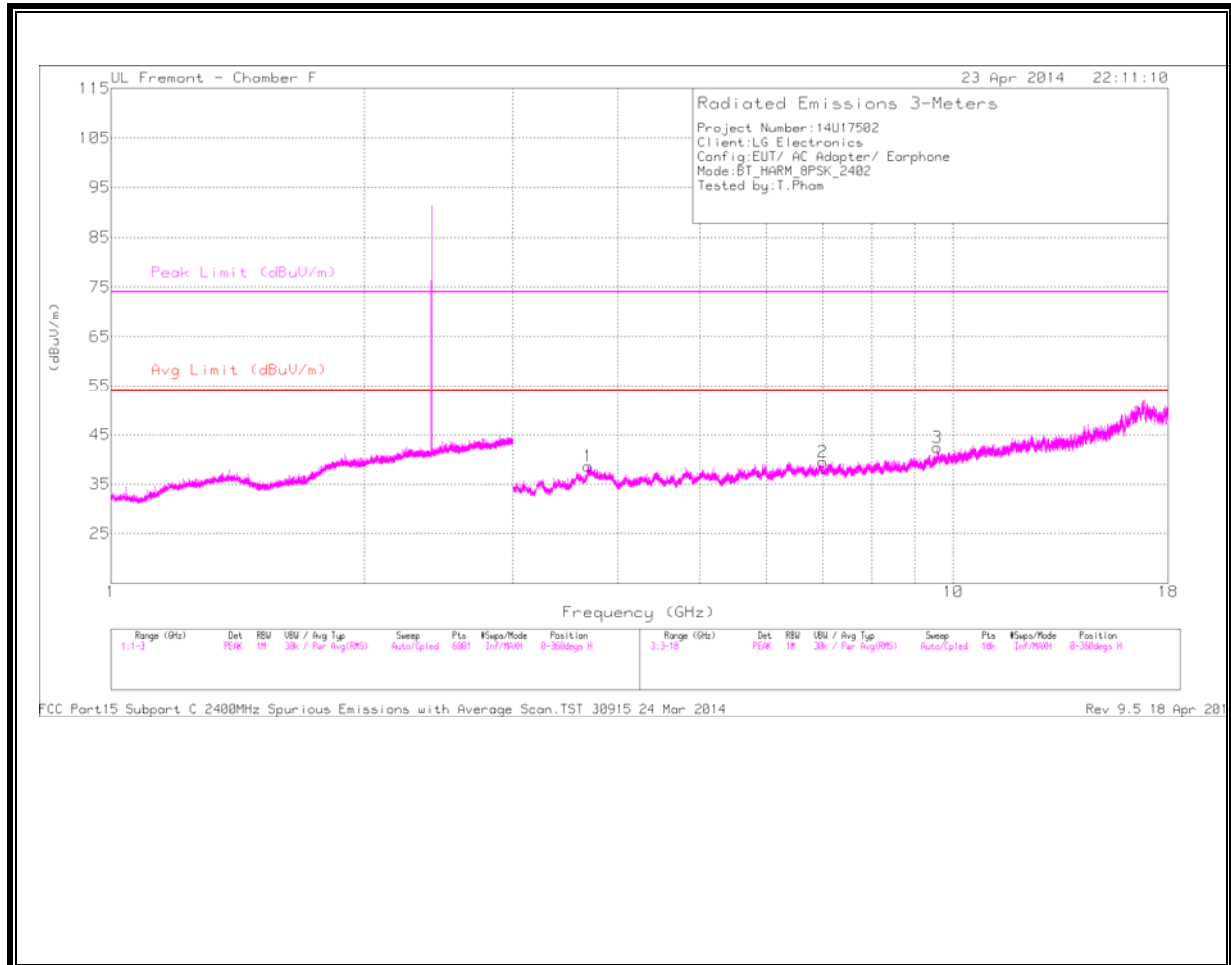

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

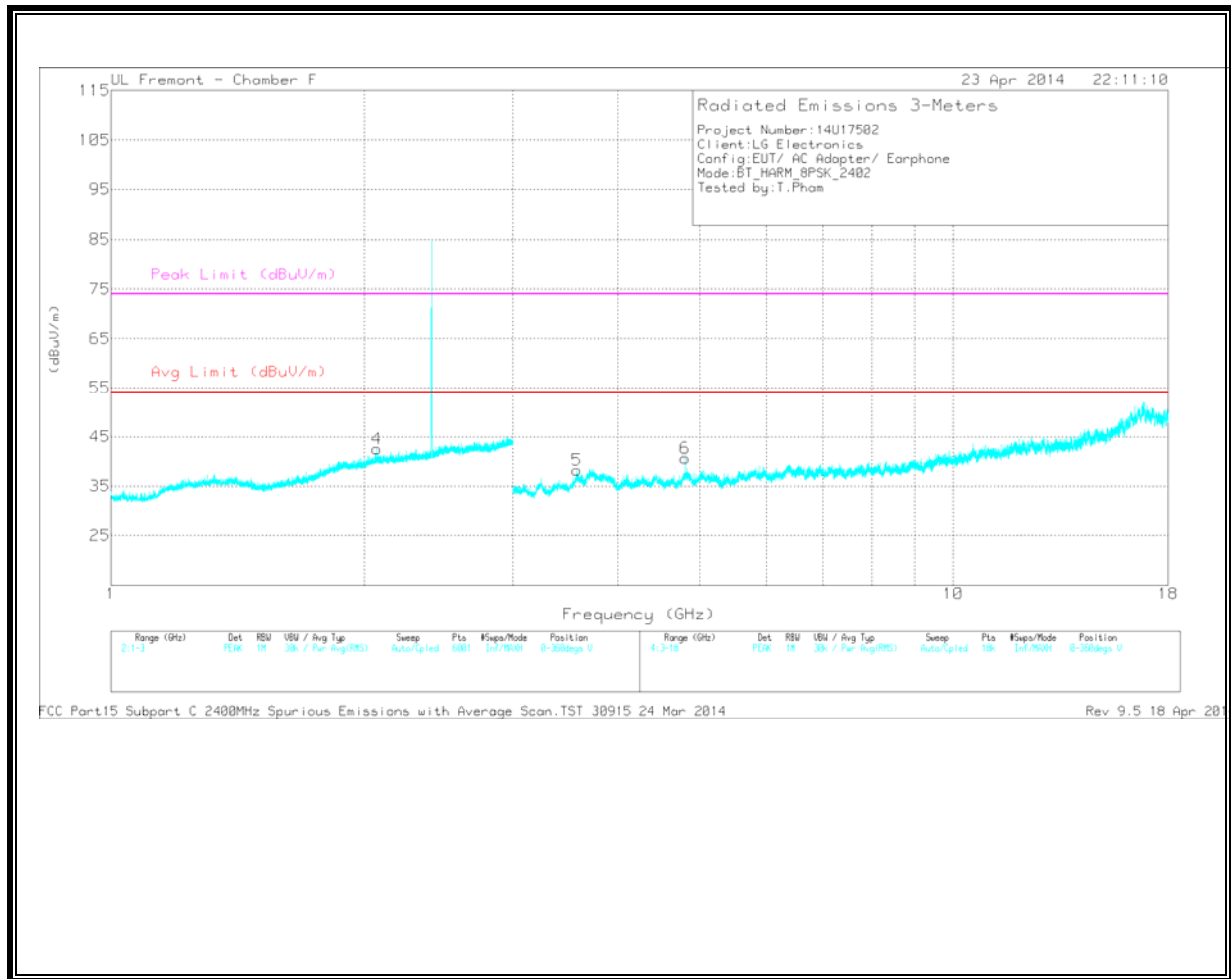

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	2.071	34.47	PK	31.8	-23.7	42.57	54	-11.43	74	-31.43	0-360	101	V
1	* 3.686	32.87	PK	34.9	-29.2	38.57	54	-15.43	74	-35.43	0-360	101	H
2	6.996	29.75	PK	35.5	-25.8	39.45	54	-14.55	74	-34.55	0-360	101	H
3	9.573	27.6	PK	36.9	-22.1	42.4	54	-11.6	74	-31.6	0-360	101	H
5	* 3.576	31.98	PK	34.8	-28.5	38.28	54	-15.72	74	-35.72	0-360	101	V
6	* 4.804	33.98	PK	34.1	-27.4	40.68	54	-13.32	74	-33.32	0-360	201	V

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.685	39.97	PK3	34.9	-29.2	45.67	54	-8.33	74	-28.33	360	101	H
* 3.575	39.5	PK3	34.8	-28.5	45.8	54	-8.2	74	-28.2	360	101	V
* 4.804	38.54	PK3	34.1	-27.4	45.24	54	-8.76	74	-28.76	360	101	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK3 - FHSS Method: Maximum Peak

MID CHANNEL
HORIZONTAL

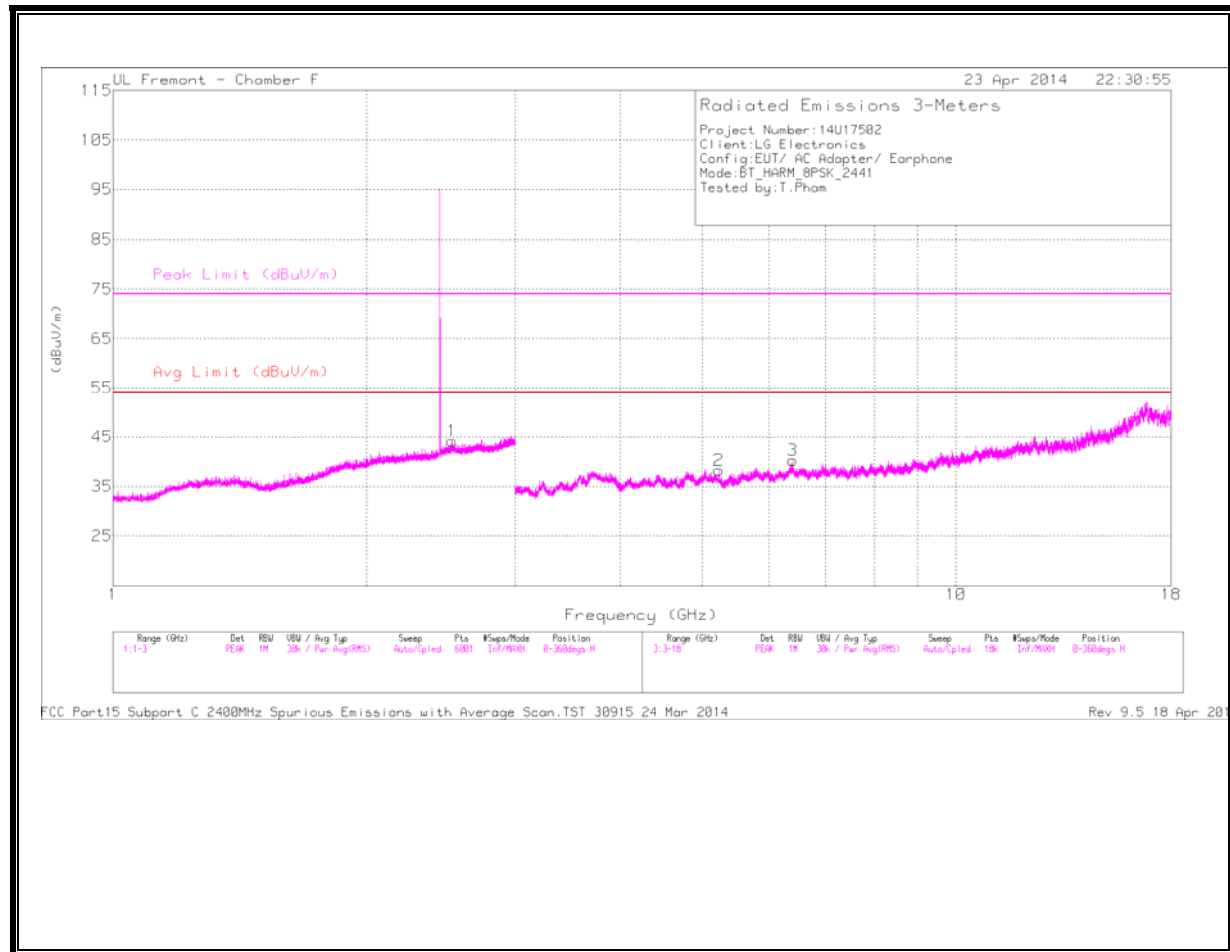

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

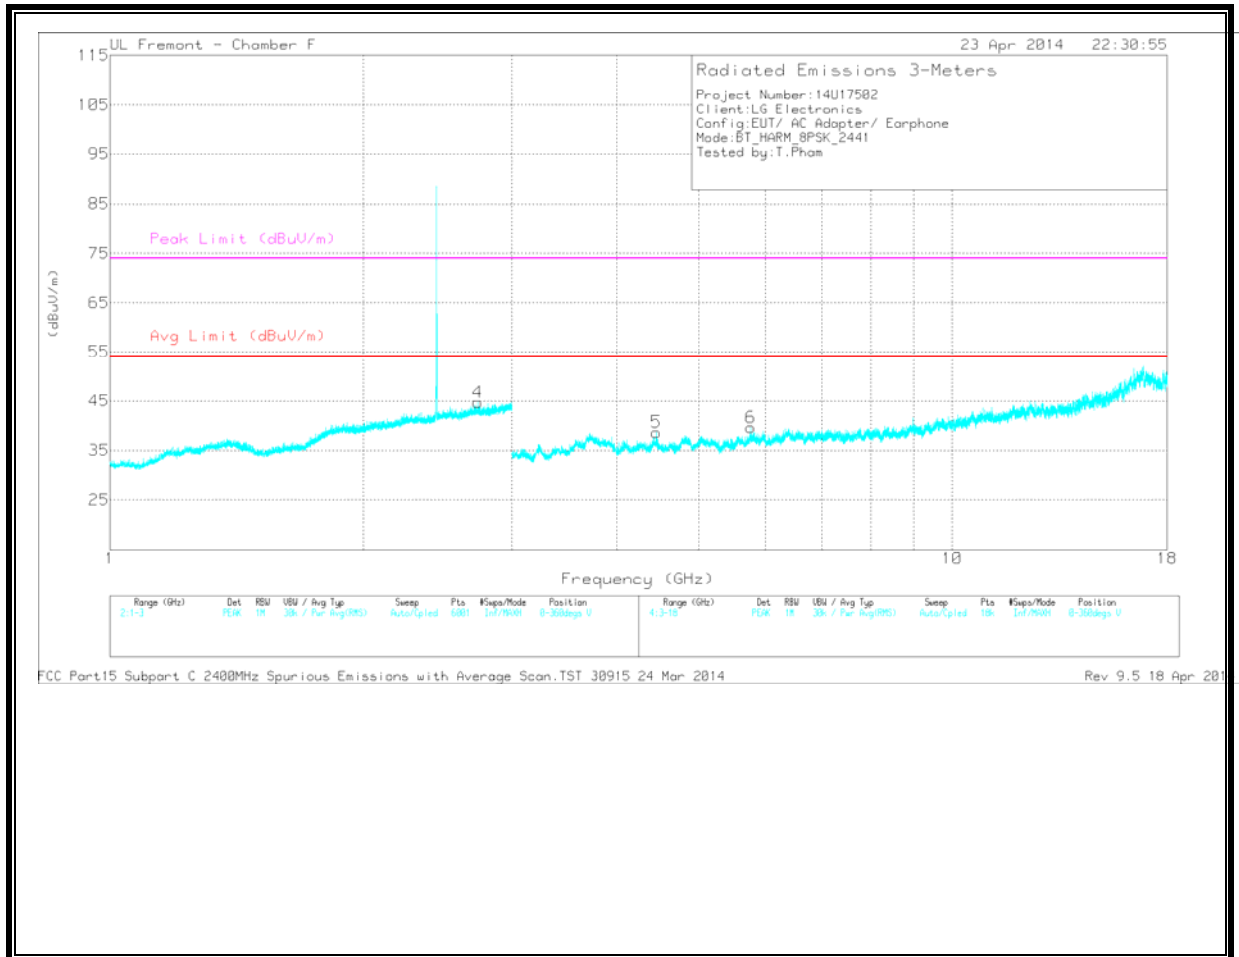

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.524	34.35	PK	32.7	-22.9	44.15	54	-9.85	74	-29.85	0-360	200	H
4	* 2.734	34.35	PK	32.8	-22.4	44.75	54	-9.25	74	-29.25	0-360	201	V
2	5.232	31.99	PK	34.5	-28.2	38.29	54	-15.71	74	-35.71	0-360	101	H
3	6.402	31.87	PK	35.6	-27.2	40.27	54	-13.73	74	-33.73	0-360	200	H
5	4.454	33.18	PK	33.9	-28.4	38.68	54	-15.32	74	-35.32	0-360	101	V
6	5.769	32.11	PK	34.9	-27.4	39.61	54	-14.39	74	-34.39	0-360	201	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK - Peak detector

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.734	41.6	PK3	32.8	-22.4	52	54	-2.0	74	-22	360	101	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK3 - FHSS Method: Maximum Peak

HIGH CHANNEL
HORIZONTAL

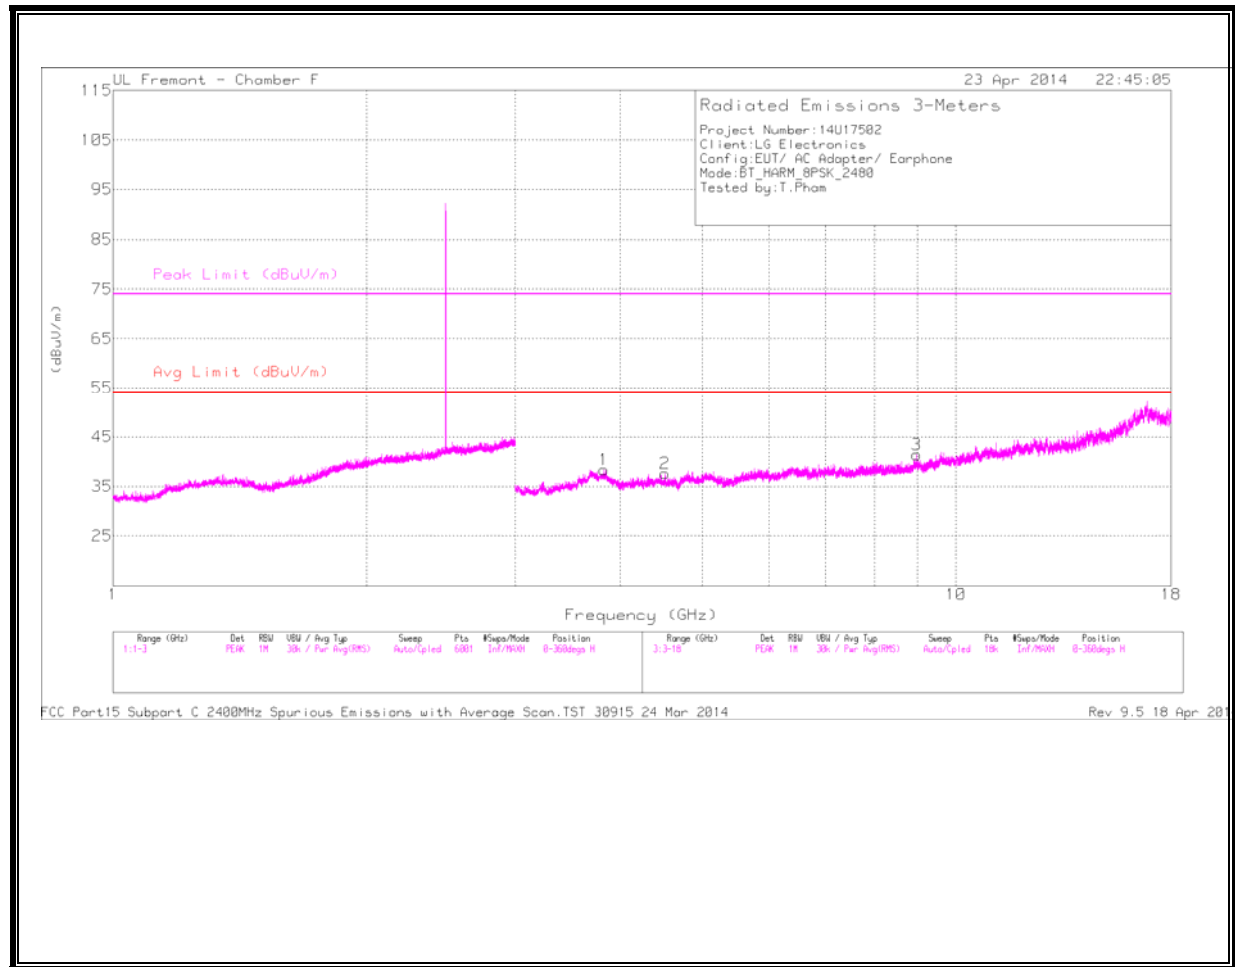

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

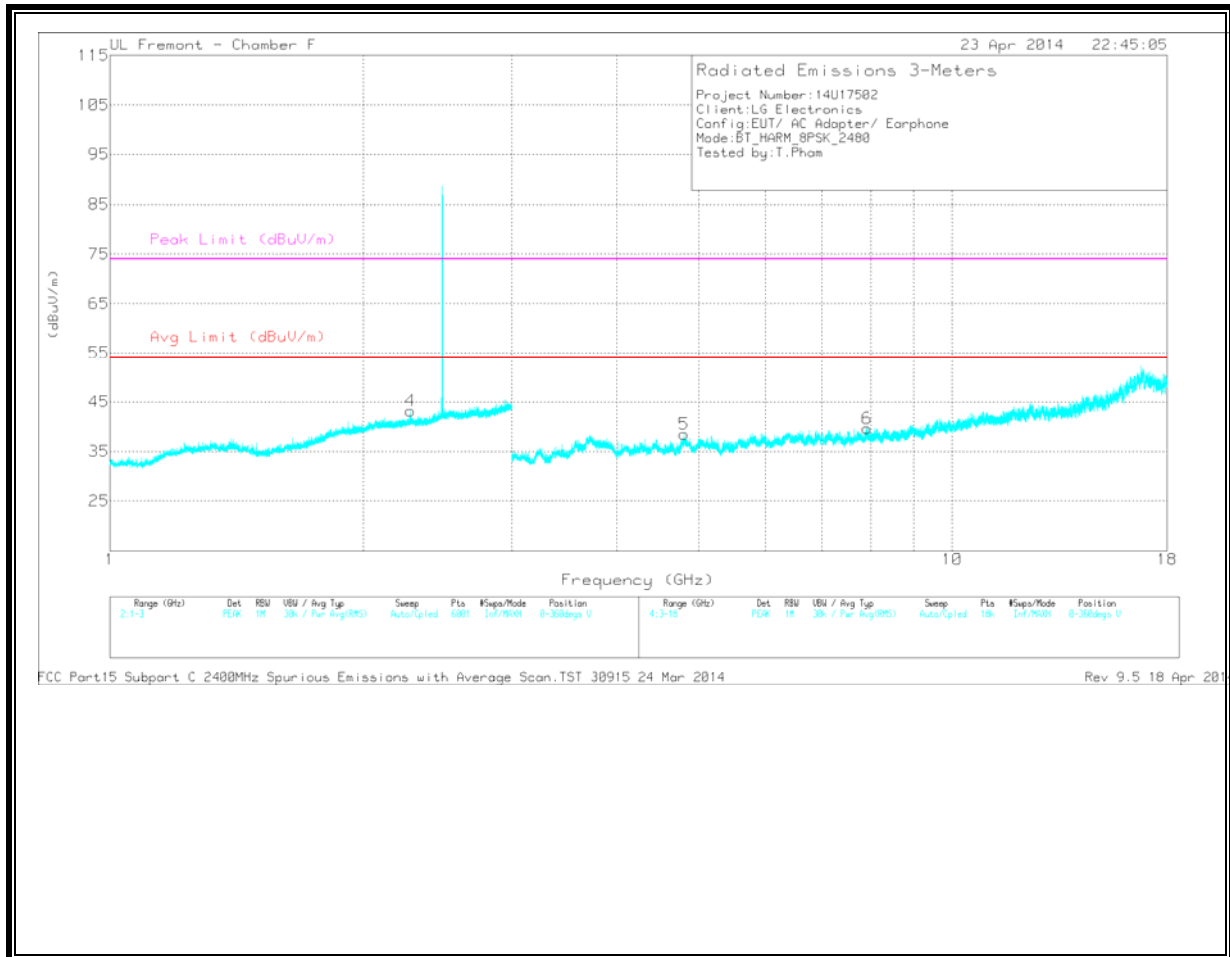

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 2.275	34.55	PK	31.8	-23.2	43.15	54	-10.85	74	-30.85	0-360	201	V
1	* 3.823	32.88	PK	34.3	-28.8	38.38	54	-15.62	74	-35.62	0-360	199	H
2	* 4.518	31.88	PK	34	-28.3	37.58	54	-16.42	74	-36.42	0-360	101	H
3	8.989	28.24	PK	36.1	-22.9	41.44	54	-12.56	74	-32.56	0-360	199	H
5	* 4.807	31.74	PK	34.1	-27.4	38.44	54	-15.56	74	-35.56	0-360	201	V
6	7.92	29.49	PK	35.7	-25.5	39.69	54	-14.31	74	-34.31	0-360	201	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.275	42.17	PK3	31.8	-23.2	50.77	54	-3.23	74	-23.23	360	132	V
* 3.824	38.65	PK3	34.3	-28.8	44.15	54	-9.85	74	-29.85	360	132	H
* 4.519	38.49	PK3	34	-28.3	44.19	54	-9.81	74	-29.81	360	132	H
* 4.807	38.69	PK3	34.1	-27.4	45.39	54	-8.61	74	-28.61	360	132	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK3 - FHSS Method: Maximum Peak

WORST CASE HARMONICS AND SPURIOUS EMISSIONS WITH WPC CHARGER AND COVER

HORIZONTAL

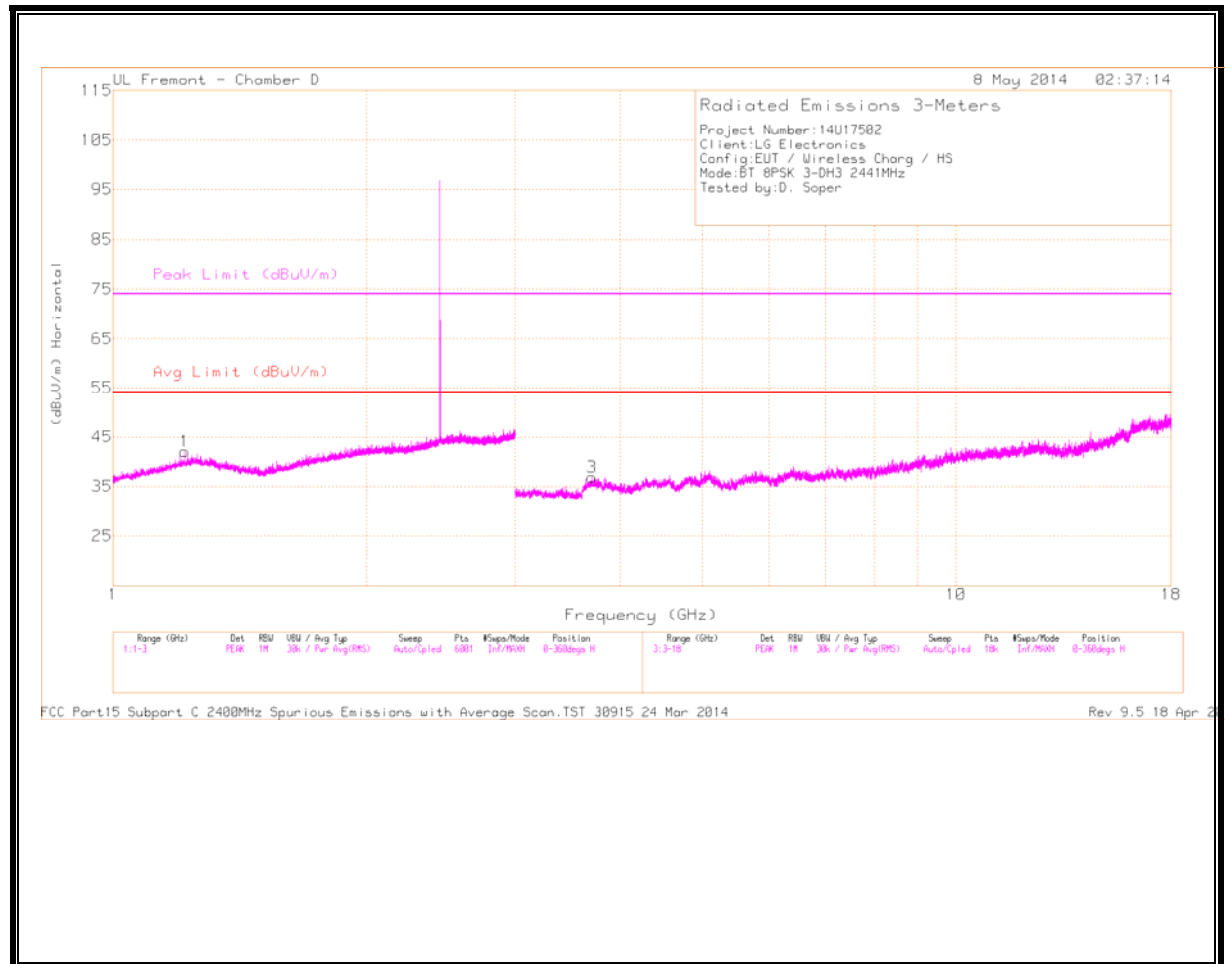

VERTICAL

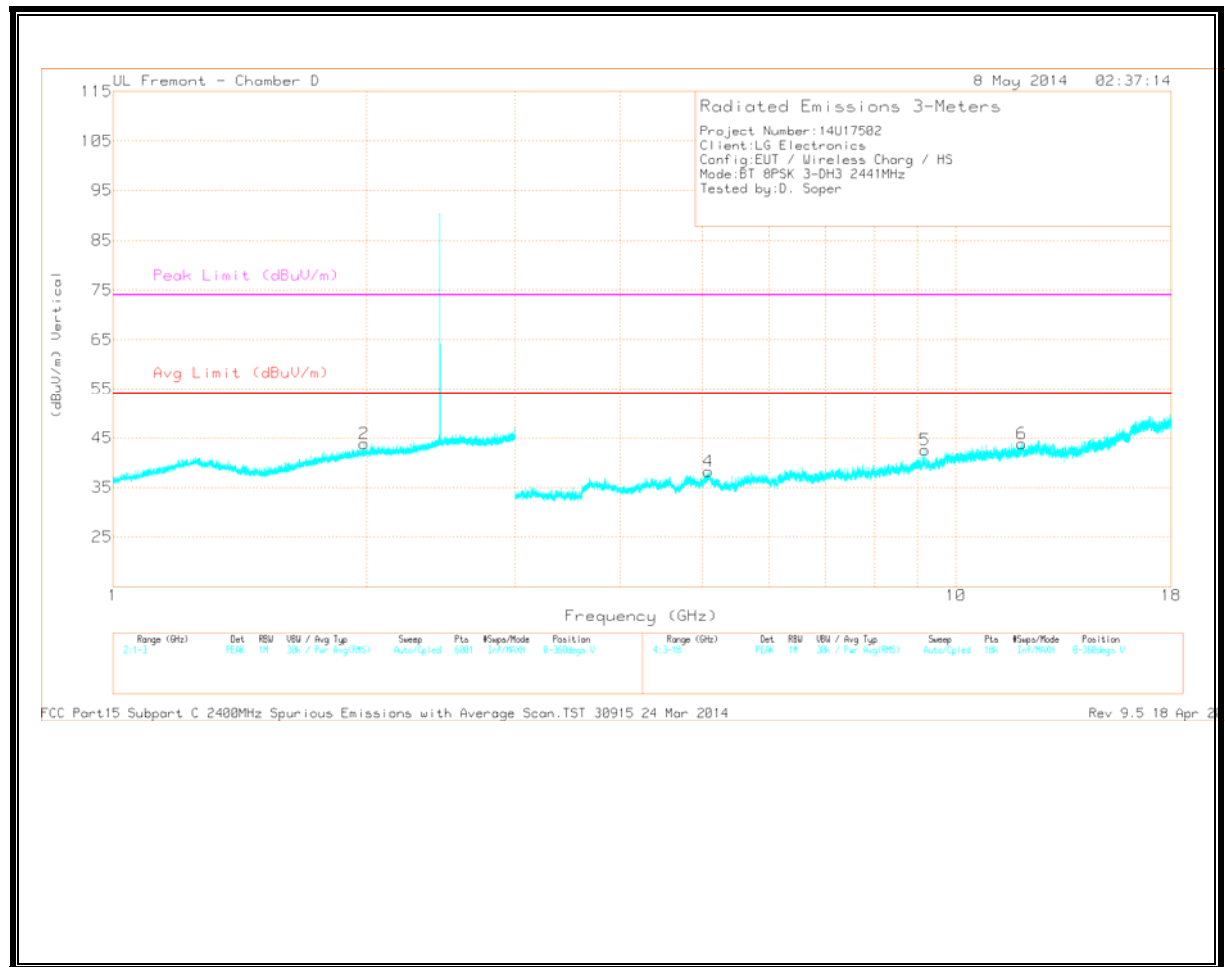

CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.216	34.97	PK	29.1	-22	42.07	-	-	74	-31.93	0-360	100	H
3	* 3.698	32.03	PK	32.6	-27.8	36.83	-	-	74	-37.17	0-360	201	H
4	* 5.088	30.61	PK	33.6	-26	38.21	-	-	74	-35.79	0-360	201	V
5	* 9.191	27.83	PK	35.9	-21.2	42.53	-	-	74	-31.47	0-360	201	V
6	* 11.978	26.28	PK	38.2	-20.7	43.78	-	-	74	-30.22	0-360	201	V
2	1.984	34.45	PK	30.6	-21.2	43.85	-	-	-	-	0-360	201	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.696	38.4	PK3	32.6	-27.9	43.1	-	-	74	-30.9	2	100	H
* 3.696	25.79	VB1T	32.6	-27.9	30.49	54	-23.51	-	-	2	100	H


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK3 - FHSS Method: Maximum Peak

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

9.3. WORST-CASE BELOW 1 GHz

GFSK SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

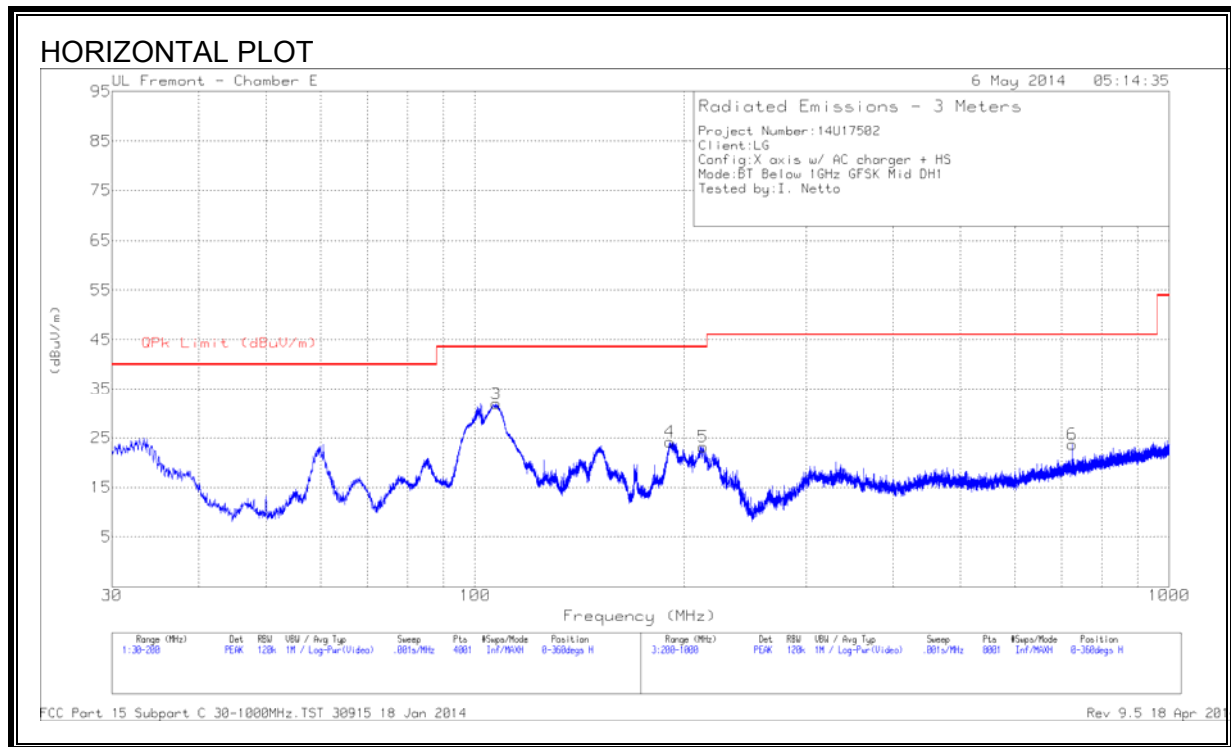

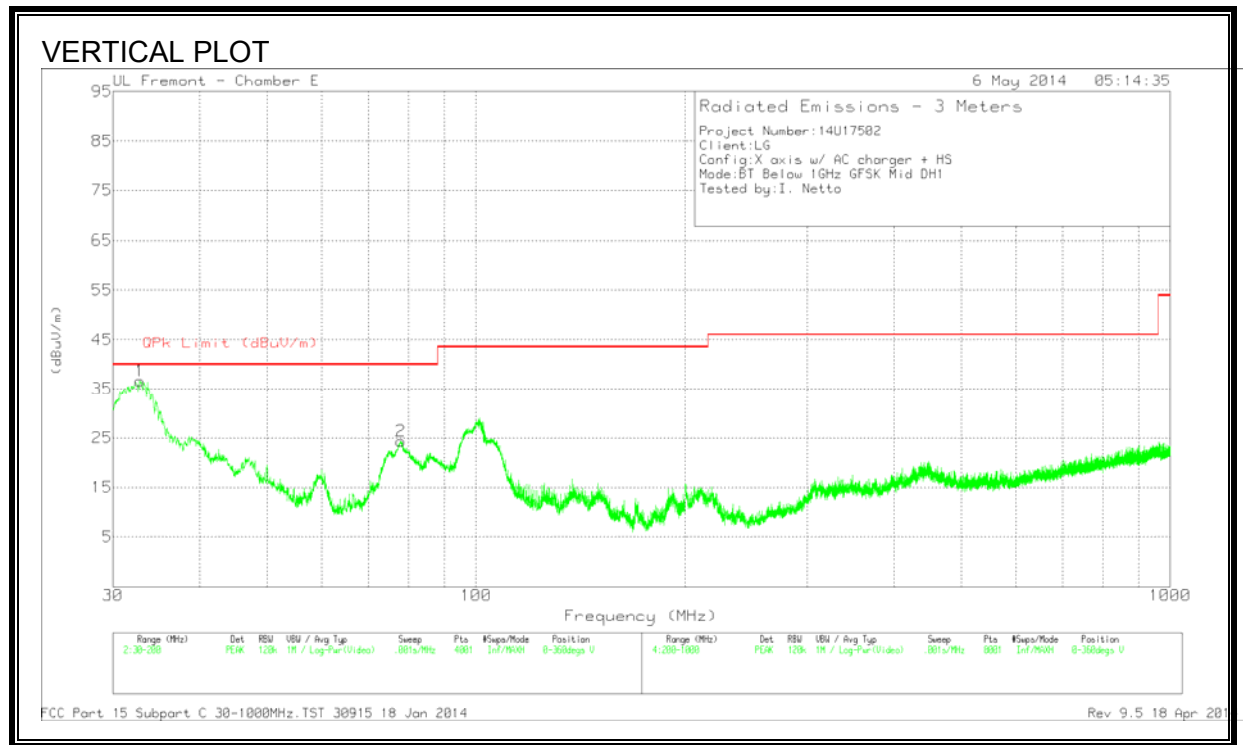


DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Hybrid	Amp/Cbl (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	32.805	49.05	PK	19.4	-31.8	0	36.65	40	-3.35	0-360	100	V
2	77.94	47.92	PK	7.8	-31.4	0	24.32	40	-15.68	0-360	100	V
3	107.2225	51.27	PK	12	-31.3	0	31.97	43.52	-11.55	0-360	300	H
4	190.82	43.72	PK	11.3	-30.8	0	24.22	43.52	-19.3	0-360	100	H
5	212.9	43.54	PK	10.4	-30.8	0	23.14	43.52	-20.38	0-360	100	H
6	725.6	32.35	PK	20.4	-29	0	23.75	46.02	-22.27	0-360	100	H


PK - Peak detector

WORST CASE HARMONICS AND SPURIOUS EMISSIONS WITH WPC CHARGER AND COVER

HORIZONTAL

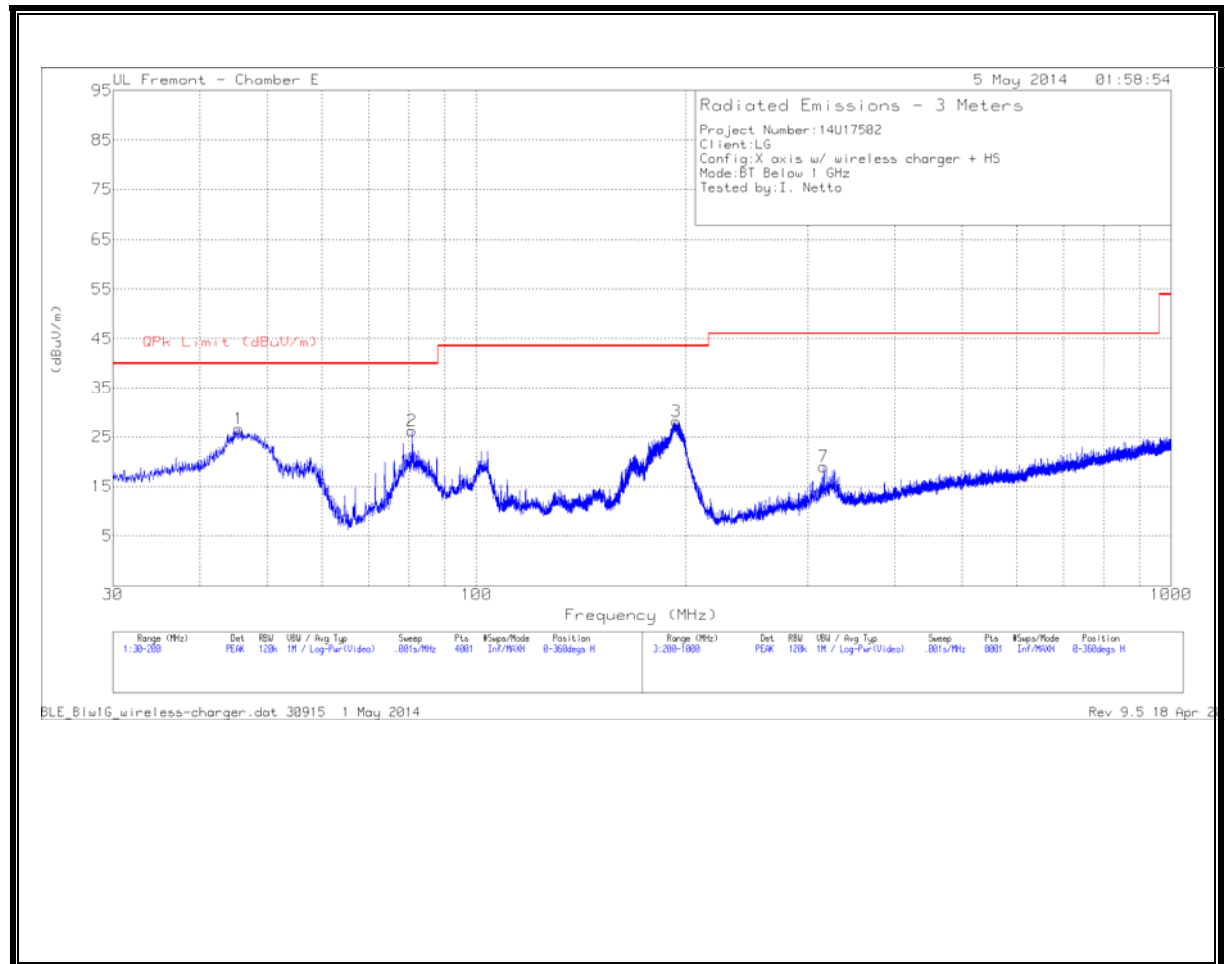

VERTICAL

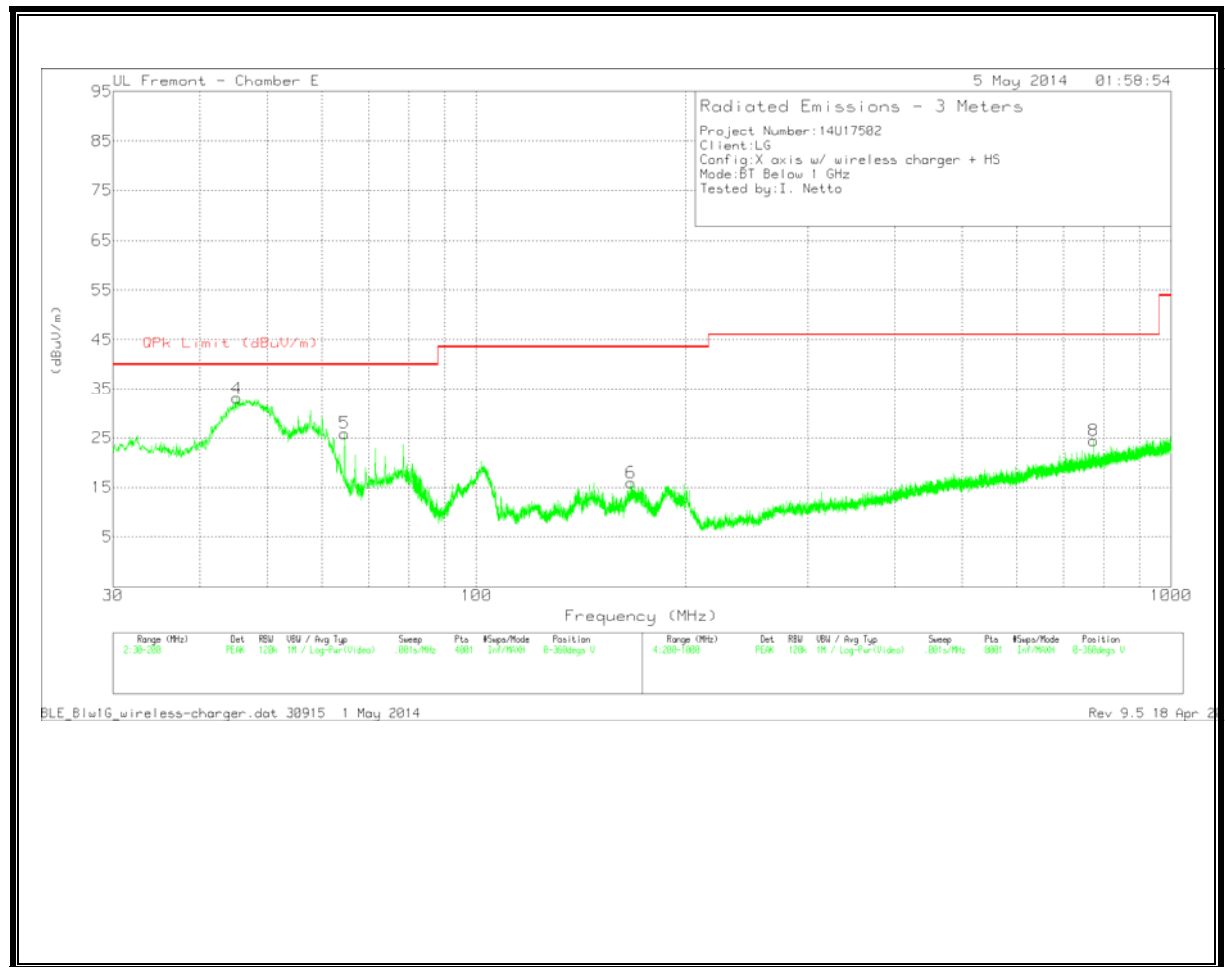

CHANNEL DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AFT130 (dB/m)	Amp/Cbl (dB/m)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 167.0625	34.07	PK	12	-30.1	15.97	43.52	-27.55	0-360	101	V
4	45.2575	53.47	PK	10.4	-30.8	33.07	40	-6.93	0-360	101	V
1	45.5125	47.18	PK	10.2	-30.8	26.58	40	-13.42	0-360	300	H
5	64.6375	48.52	PK	8.1	-30.7	25.92	40	-14.08	0-360	101	V
2	80.7875	49.28	PK	7.5	-30.6	26.18	40	-13.82	0-360	200	H
3	193.88	46.39	PK	11.8	-30	28.19	43.52	-15.33	0-360	100	H
7	315.9	34.2	PK	13.9	-29.1	19	46.02	-27.02	0-360	101	H
8	773.2	30.89	PK	21.3	-27.7	24.49	46.02	-21.53	0-360	300	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

6 WORST EMISSIONS

Line-L1 .15 - 30MHz

Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
1	.15	42.17	PK	1.4	0	43.57	66	-22.43	-	-
2	.15	23.14	Av	1.4	0	24.54	-	-	56	-31.46
3	.213	39	PK	.9	0	39.9	63.1	-23.2	-	-
4	.213	20.02	Av	.9	0	20.92	-	-	53.1	-32.18
5	.474	42.86	PK	.4	0	43.26	56.4	-13.14	-	-
6	.474	37.34	Av	.4	0	37.74	-	-	46.4	-8.66
7	.6495	41.33	PK	.3	0	41.63	56	-14.37	-	-
8	.6495	19.64	Av	.3	0	19.94	-	-	46	-26.06
9	1.284	23.92	PK	.2	.1	24.22	56	-31.78	-	-
10	1.284	11.94	Av	.2	.1	12.24	-	-	46	-33.76
11	3.354	26.23	PK	.2	.1	26.53	56	-29.47	-	-
12	3.354	7.8	Av	.2	.1	8.1	-	-	46	-37.9
13	4.8525	32.67	PK	.2	.1	32.97	56	-23.03	-	-
14	4.8525	16.73	Av	.2	.1	17.03	-	-	46	-28.97
15	5.0505	32.88	PK	.2	.1	33.18	60	-26.82	-	-
16	5.0505	21.5	Av	.2	.1	21.8	-	-	50	-28.2
17	5.3925	32.67	PK	.2	.1	32.97	60	-27.03	-	-
18	5.3925	20.59	Av	.2	.1	20.89	-	-	50	-29.11
19	18.4515	29.87	PK	.3	.2	30.37	60	-29.63	-	-
20	18.4515	17.07	Av	.3	.2	17.57	-	-	50	-32.43

Line-L2 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
21	.159	41.08	PK	1.4	0	42.48	65.5	-23.02	-	-
22	.159	19.35	Av	1.4	0	20.75	-	-	55.5	-34.75
23	.2085	41.07	PK	1	0	42.07	63.3	-21.23	-	-
24	.2085	17.92	Av	1	0	18.92	-	-	53.3	-34.38
25	.4785	35.38	PK	.4	0	35.78	56.4	-20.62	-	-
26	.4785	28.46	Av	.4	0	28.86	-	-	46.4	-17.54
27	.5055	28.52	PK	.4	0	28.92	56	-27.08	-	-
28	.5055	15.52	Av	.4	0	15.92	-	-	46	-30.08
29	.573	25.71	PK	.3	0	26.01	56	-29.99	-	-
30	.573	7.8	Av	.3	0	8.1	-	-	46	-37.9
31	.9645	25.54	PK	.3	0	25.84	56	-30.16	-	-
32	.9645	6.38	Av	.3	0	6.68	-	-	46	-39.32
33	1.734	25.53	PK	.2	.1	25.83	56	-30.17	-	-
34	1.734	9.33	Av	.2	.1	9.63	-	-	46	-36.37
35	2.274	24.99	PK	.2	.1	25.29	56	-30.71	-	-
36	2.274	9.52	Av	.2	.1	9.82	-	-	46	-36.18
37	4.9695	34.84	PK	.2	.1	35.14	56	-20.86	-	-
38	4.9695	17.98	Av	.2	.1	18.28	-	-	46	-27.72
39	5.6985	36.62	PK	.2	.1	36.92	60	-23.08	-	-
40	5.6985	15.48	Av	.2	.1	15.78	-	-	50	-34.22
41	16.4355	33.87	PK	.3	.2	34.37	60	-25.63	-	-
42	16.4355	16.58	Av	.3	.2	17.08	-	-	50	-32.92
43	24.486	25.56	PK	.3	.2	26.06	60	-33.94	-	-
44	24.486	7.67	Av	.3	.2	8.17	-	-	50	-41.83

LINE 1 RESULTS

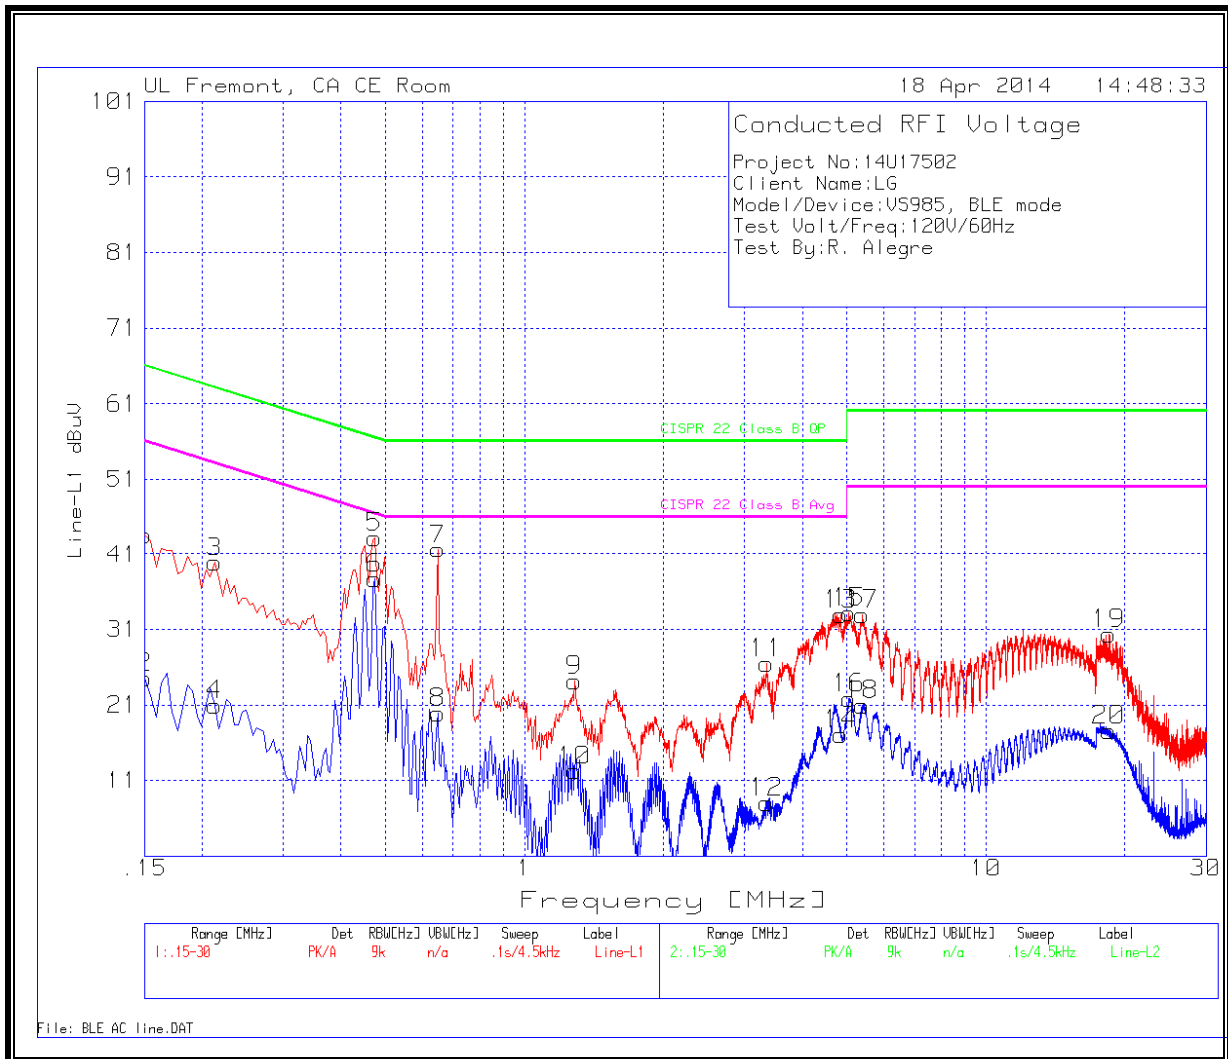

LINE 2 RESULTS

