



**FCC 47 CFR PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 8**

**C2PC CERTIFICATION TEST REPORT
FOR
SMART WATCH with 2.4 DTS b/g/n + BT and BLE
MODEL NUMBER: LG-W110, W110, LGW110**

**FCC ID: ZNFW110
IC ID: 2703C-W110**

REPORT NUMBER: 14U18512-E1

ISSUE DATE: SEPTEMBER 01, 2014

**Prepared for
LG ELECTRONICS MOBILECOMM U.S.A., INC
1000 SYLVAN AVENUE
ENGLEWOOD CLIFFS,
NEW JERSEY, 07632, U.S.A**

Prepared by
**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	09/01/14	Initial Issue	D. Corona

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. MEASURING INSTRUMENT CALIBRATION	5
4.2. SAMPLE CALCULATION	5
4.3. MEASUREMENT UNCERTAINTY.....	5
5. EQUIPMENT UNDER TEST	6
5.1. DESCRIPTION OF EUT	6
5.2. MAXIMUM OUTPUT POWER.....	6
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	6
5.4. WORST-CASE CONFIGURATION AND MODE.....	6
5.5. DESCRIPTION OF TEST SETUP.....	7
6. TEST AND MEASUREMENT EQUIPMENT	9
7. SUMMARY TABLE	10
8. ANTENNA PORT TEST RESULTS	11
8.1. 20 dB AND 99% BANDWIDTH	11
8.2. HOPPING FREQUENCY SEPARATION	12
8.3. NUMBER OF HOPPING CHANNELS.....	13
8.4. AVERAGE TIME OF OCCUPANCY.....	14
8.5. OUTPUT POWER.....	15
8.6. AVERAGE POWER	16
8.7. CONDUCTED SPURIOUS EMISSIONS.....	17
9. RADIATED TEST RESULTS.....	18
9.1. LIMITS AND PROCEDURE	18
9.2. TRANSMITTER ABOVE 1 GHz.....	19
9.2.1. BASIC DATA RATE GFSK MODULATION	19
9.2.1. ENHANCED DATA RATE 8PSK MODULATION	32
9.3. WORST-CASE BELOW 1 GHz.....	45
10. AC POWER LINE CONDUCTED EMISSIONS	47
11. SETUP PHOTOS	48

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: LG ELECTRONICS MOBILECOMM U.S.A., INC.
EUT DESCRIPTION: SMART WATCH with 2.4 DTS b/g/n + BT and BLE
MODEL: LG-W110, W110, LGW110
SERIAL NUMBER: 1E8PK
DATE TESTED: AUGUST 27 - 28, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 ISSUE 8	Pass
INDUSTRY CANADA RSS-GEN ISSUE 3	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Tested By:



DAN CORONIA
CONSUMER TECHNOLOGY DIVISION
PROJECT LEAD
UL Verification Services Inc.



VICKY NGUYEN
CONSUMER TECHNOLOGY DIVISION
LAB ENGINEER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

47173 Benicia Street	47266 Benicia Street
☒ Chamber A	☐ Chamber D
☐ Chamber B	☐ Chamber E
☐ Chamber C	☐ Chamber F
	☐ Chamber G
	☐ Chamber H

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a SMART WATCH with 2.4 DTS b/g/n + BT and BLE.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Please refer to project 14U18426 for details

Note: GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance. For average power data please refer to section 8.6.

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a metal antenna, with a maximum gain of -1.9 dBi.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y, and Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	LG	MCS-02WR	DB390078751	N/A
Cradle	LG	SDT-330	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A

TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests.
EUT was set in the hidden menu mode to enable BT communications.

SETUP DIAGRAM FOR TESTS

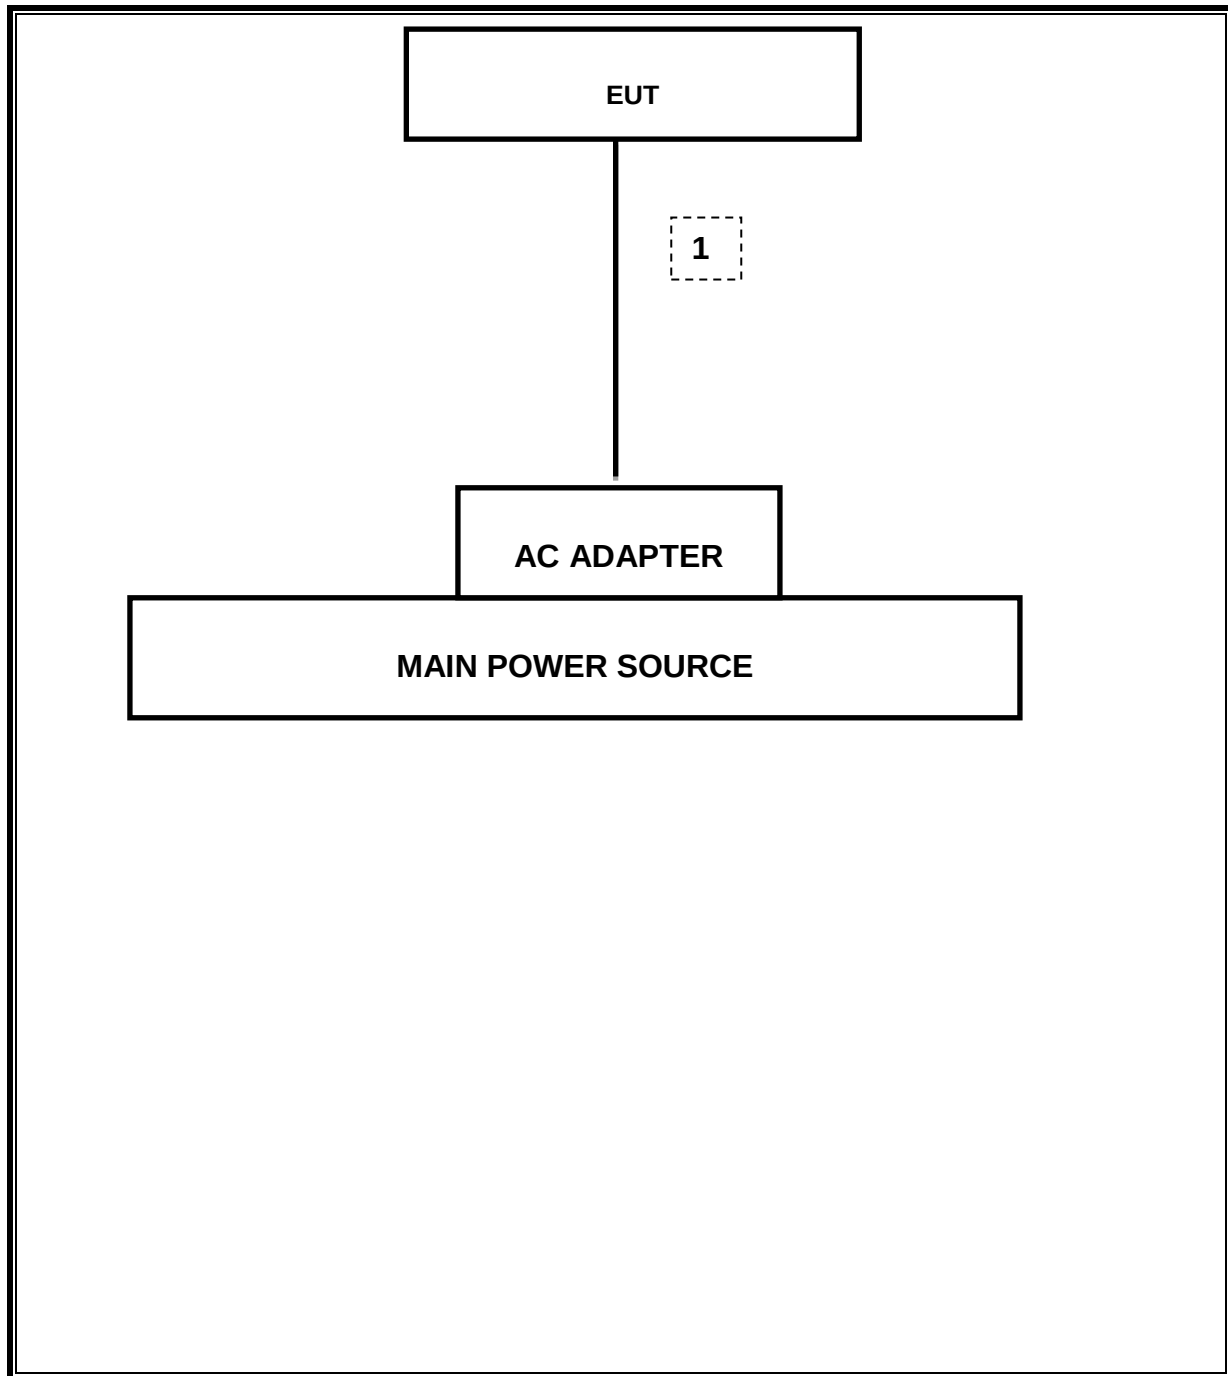

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Biconolog, 30MHz-1 GHz	Sunol Sciences	JB1	C01171	02/13/15
Antenna, Horn, 18GHz	EMCO	3115	C00783	10/25/14
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00589	12/17/14
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	01/28/15
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01052	10/22/14
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	12/20/14
CBT Bluetooth Tester	R & S	CBT	None	04/21/15
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/14
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/14
LISN, 30 MHz	FCC	50/250-25-2	C00626	01/14/15
Reject Filter, 2.4GHz	Micro-Tronics	BRM50702	N02684	CNR
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/14
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/14

7. SUMMARY TABLE

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
2.1049	RSS-GEN 4.6	Occupied Band width (99%)	N/A	Conducted	Pass	see original
2.1051, 15.247 (d)	RSS-210 A8.5	Band Edge / Conducted Spurious Emission	-20dBc		Pass	see original
15.247 (b)(1)	RSS-210 A8.4	TX conducted output power	<21dBm		Pass	see original
15.247 (a)(1)	RSS-210 A8.1(b)	Hopping frequency separation	> 25KHz		Pass	see original
15.247 (a)(1)(iii)	RSS-210 A8.1(d)	Number of Hopping channels	More than 15 non-overlapping channels		Pass	see original
15.247 (a)(1)(iii)	RSS-210 A8.1(d)	Avg Time of Occupancy	< 0.4sec		Pass	see original
15.207 (a)	RSS-GEN 7.2.2	AC Power Line conducted emissions	Section 10	Radiated	Pass	see original
15.205, 15.209	RSS-210 Clause 2.6, RSS-210 Clause 6	Radiated Spurious Emission	< 54dBuV/m		Pass	49.91dBuV/m

8. ANTENNA PORT TEST RESULTS

8.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to $\geq$ RBW. The sweep time is coupled.

RESULTS

Please refer to project 14U18426 for details.

8.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

Please refer to project 14U18426 for details.

8.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

Please refer to project 14U18426 for details.

8.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{pulse width}$.

RESULTS

Please refer to project 14U18426 for details.

8.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 21 dBm.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS

Please refer to project 14U18426 for details.

8.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 10.7 dB (including 10 dB pad and 0.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Please refer to project 14U18426 for details.

8.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS

Please refer to project 14U18426 for details.

9. RADIATED TEST RESULTS

9.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For band edge measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 1/T (on time) for average measurement. $GFSK = 1/T = 1 / 0.0029S = 350Hz$.

The spectrum from 1GHzHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

9.2. TRANSMITTER ABOVE 1 GHz

9.2.1. BASIC DATA RATE GFSK MODULATION

RESTRICTED BANDEDGE (LOW CHANNEL)


HORIZONTAL PEAK AND AVERAGE PLOT

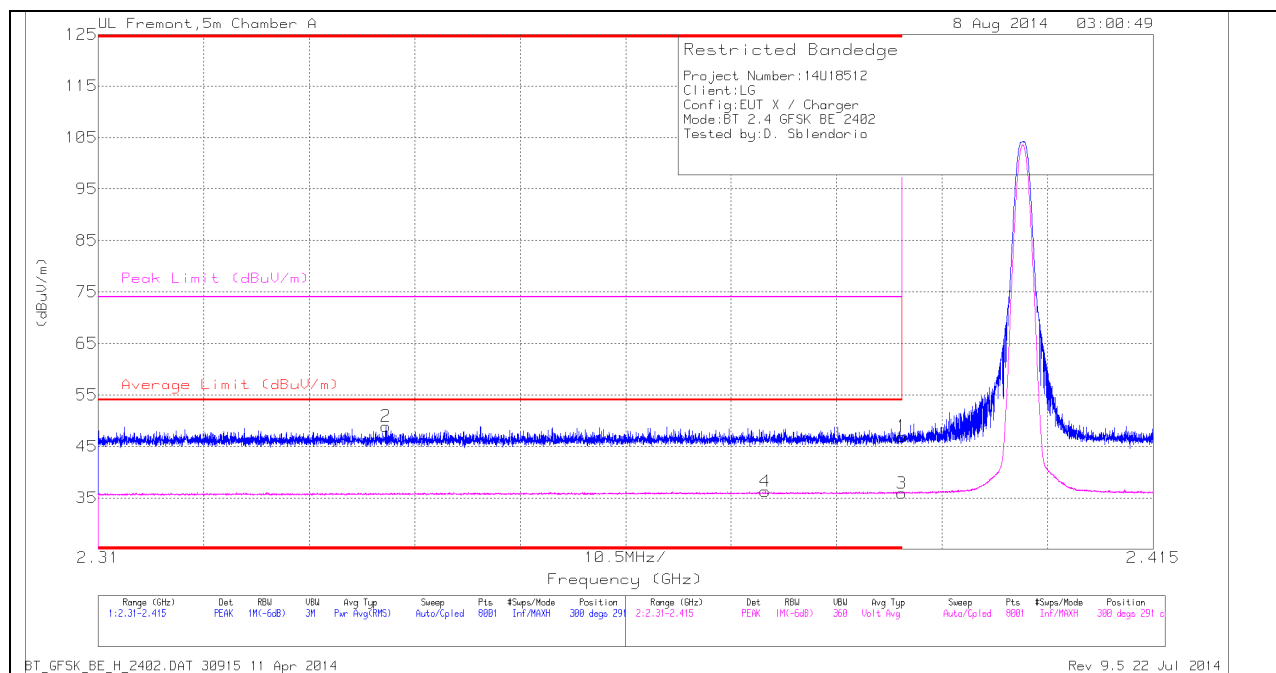

HORIZONTAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	40.05	PK	31.8	-24.9	46.95	-	-	74	-27.05	191	289	H
2	* 2.339	42.19	PK	31.7	-25	48.89	-	-	74	-25.11	191	289	H
3	* 2.39	29.02	VB1T	31.8	-24.9	35.92	54	-18.08	-	-	191	289	H
4	* 2.376	29.35	VB1T	31.8	-24.9	36.25	54	-17.75	-	-	191	289	H

VERTICAL PEAK AND AVERAGE PLOT

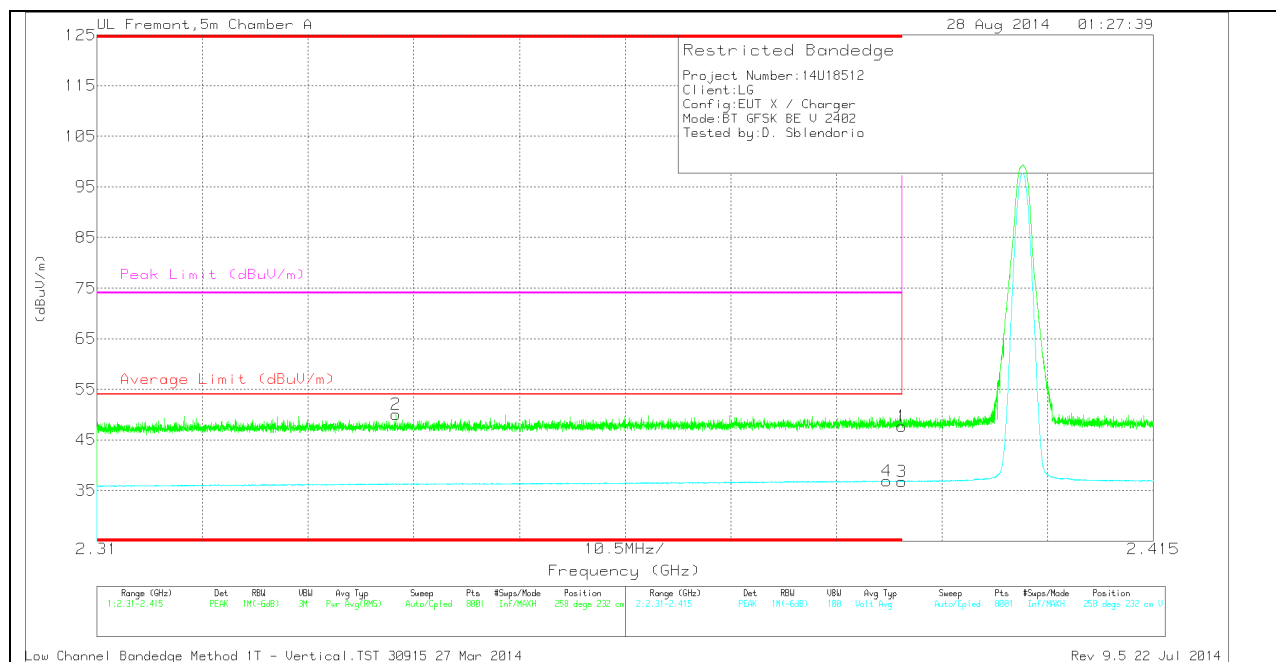


VERTICAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl /Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	39.58	PK	32.2	-24.1	47.68	-	-	74	-26.32	258	232	V
2	* 2.34	42.34	PK	31.8	-24.1	50.04	-	-	74	-23.96	258	232	V
3	* 2.39	28.69	VB1T	32.2	-24.1	36.79	54	-17.21	-	-	258	232	V
4	* 2.389	28.78	VB1T	32.2	-24.1	36.88	54	-17.12	-	-	258	232	V

AUTHORIZED BANDEDGE (HIGH CHANNEL)


HORIZONTAL PEAK AND AVERAGE PLOT

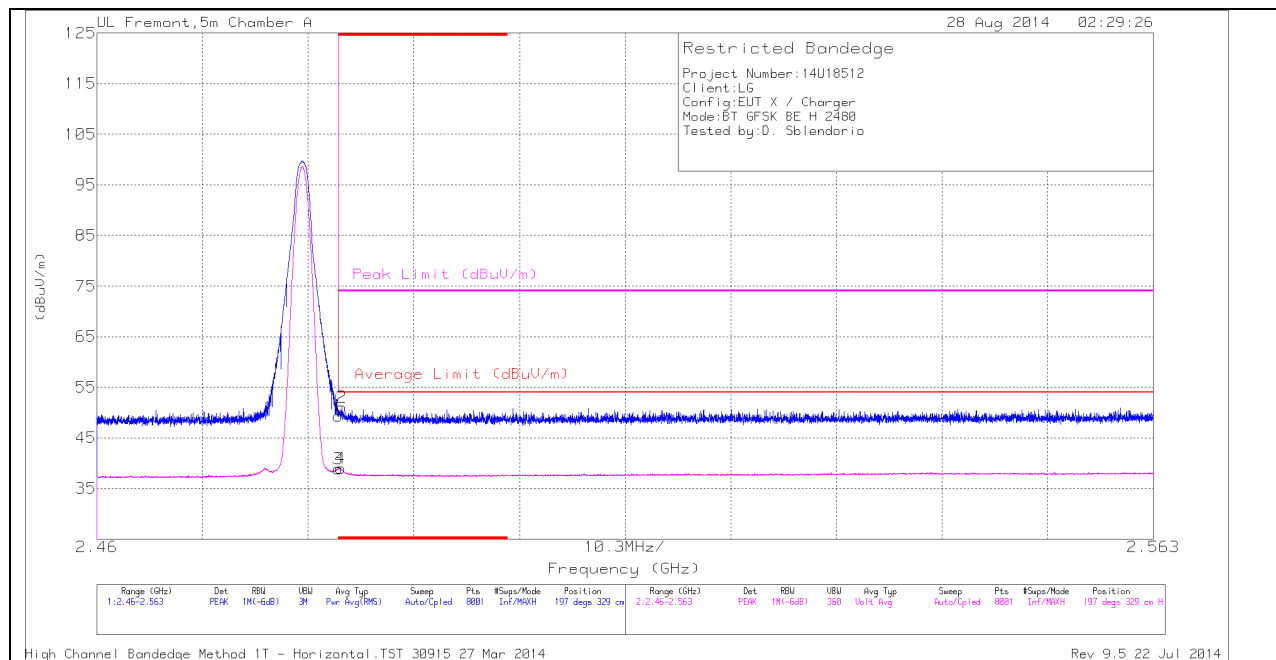

HORIZONTAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl /Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	40.86	PK	32.7	-24.2	49.36	-	-	74	-24.64	197	329	H
2	* 2.484	42.47	PK	32.7	-24.1	51.07	-	-	74	-22.93	197	329	H
3	* 2.484	30.33	VB1T	32.7	-24.2	38.83	54	-15.17	-	-	197	329	H
4	* 2.484	30.44	VB1T	32.7	-24.1	39.04	54	-14.96	-	-	197	329	H

VERTICAL PEAK AND AVERAGE PLOT

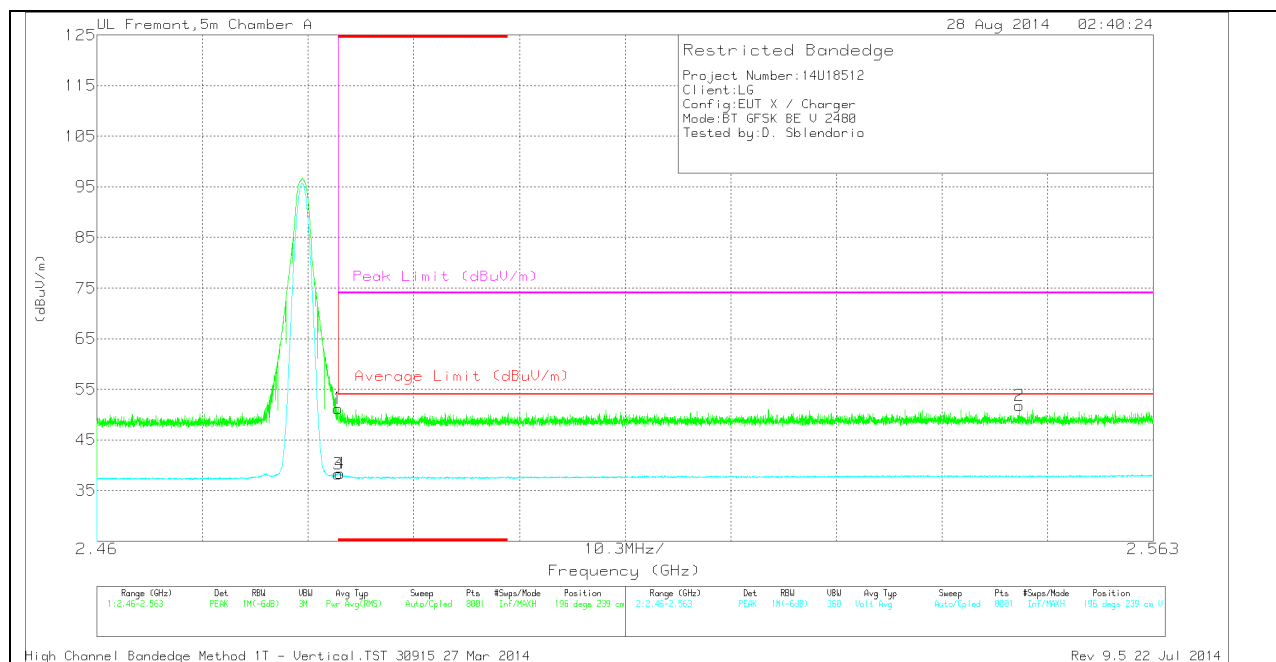


VERTICAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl /Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	47.04	PK	32.4	-22.7	56.74	-	-	74	-17.26	108	313	V
2	* 2.484	47.56	PK	32.4	-22.7	57.26	-	-	74	-16.74	108	313	V
3	* 2.484	30.75	VB1T	32.4	-22.7	40.45	54	-13.55	-	-	108	313	V
4	* 2.484	30.91	VB1T	32.4	-22.7	40.61	54	-13.39	-	-	108	313	V


HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

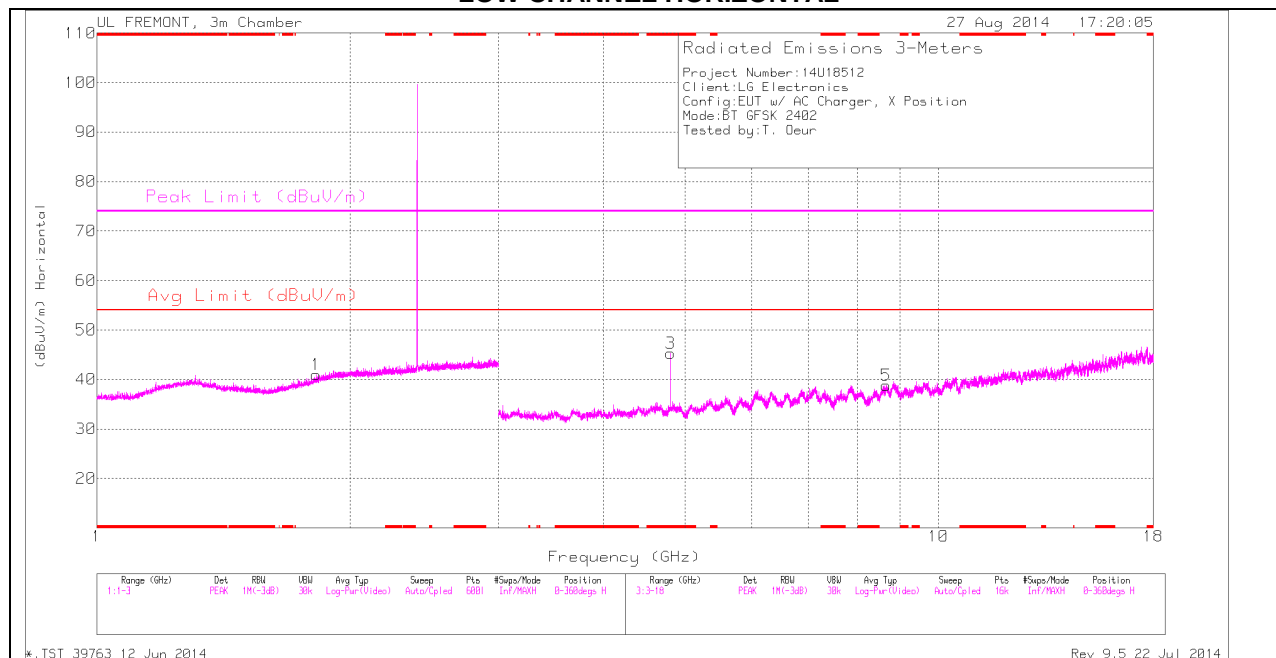

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL VERTICAL

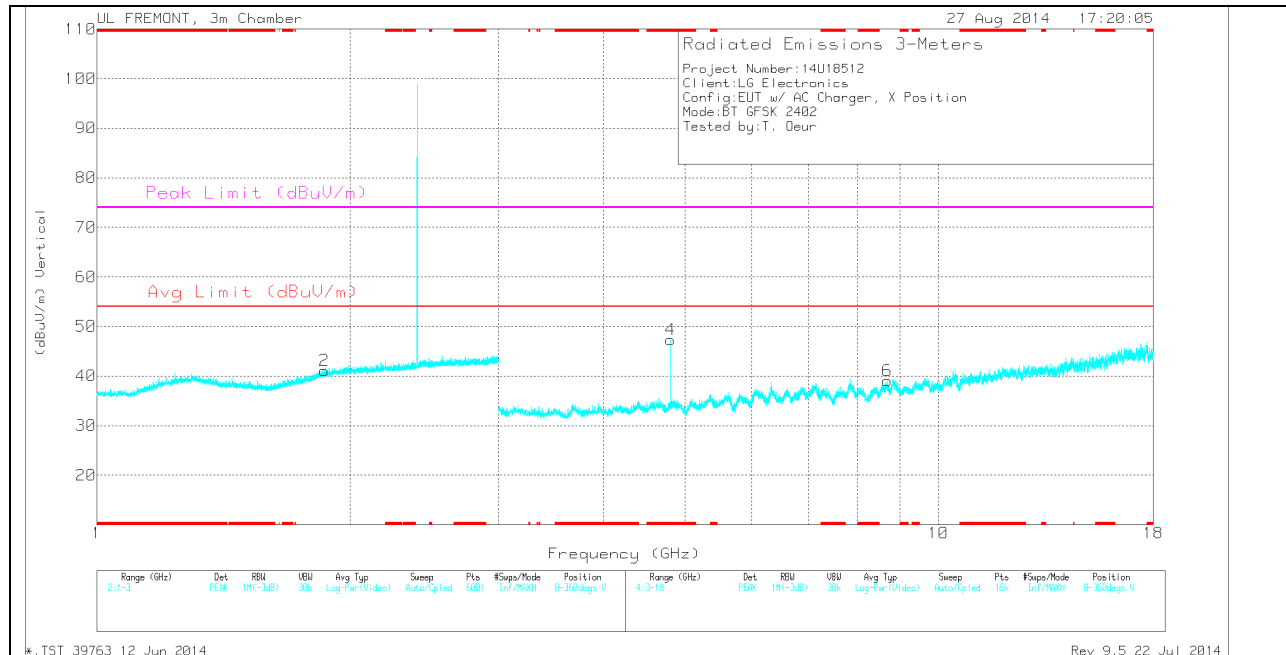

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 4.805	41.45	PK	34.1	-30.3	45.25	-	-	74	-28.75	0-360	200	H
4	* 4.805	43.57	PK	34.1	-30.3	47.37	-	-	74	-26.63	0-360	200	V
1	1.821	33.92	PK	30.4	-23.3	41.02	-	-	-	-	0-360	100	H
2	1.864	33.49	PK	30.9	-23.3	41.09	-	-	-	-	0-360	100	V
5	8.663	29.94	PK	35.8	-26.9	38.84	-	-	-	-	0-360	100	H
6	8.7	30.72	PK	35.9	-27.6	39.02	-	-	-	-	0-360	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.804	49.11	PK3	34.1	-30.3	52.91	-	-	74	-21.09	125	203	H
* 4.804	46.11	VB1T	34.1	-30.3	49.91	54	-4.09	-	-	125	203	H
* 4.804	41.87	PK3	34.1	-30.3	45.67	-	-	74	-28.33	86	201	V
* 4.804	32.25	VB1T	34.1	-30.3	36.05	54	-17.95	-	-	86	201	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak


VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

MID CHANNEL HORIZONTAL

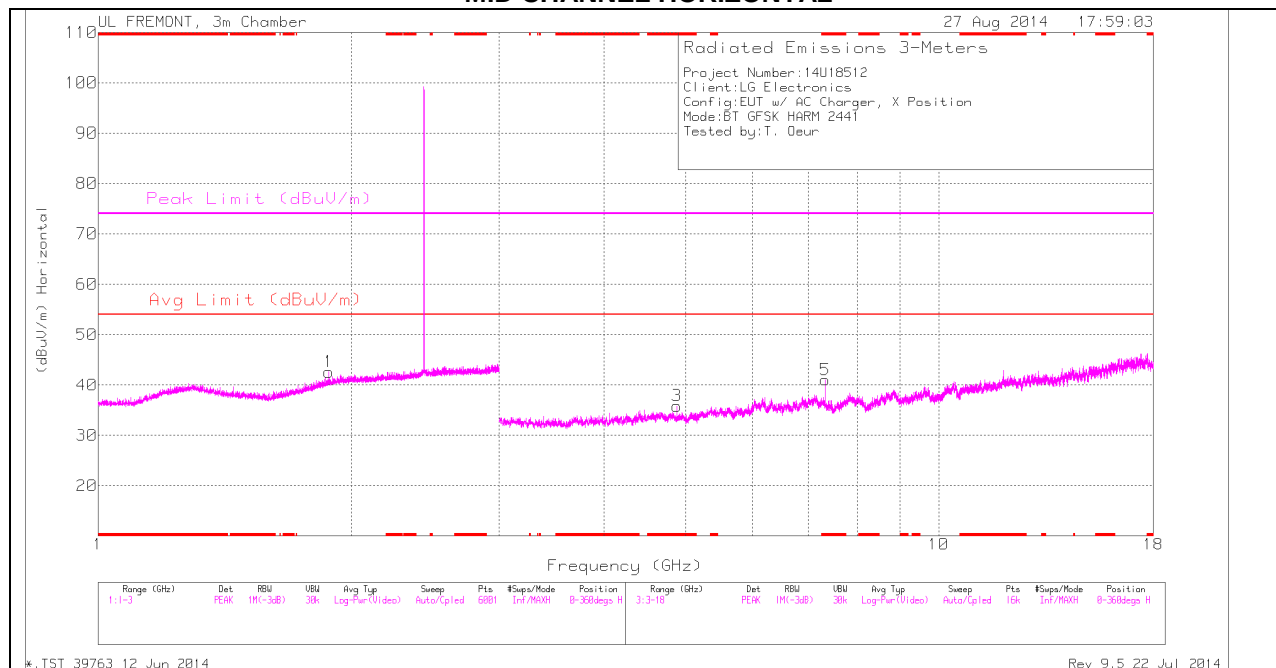

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL VERTICAL

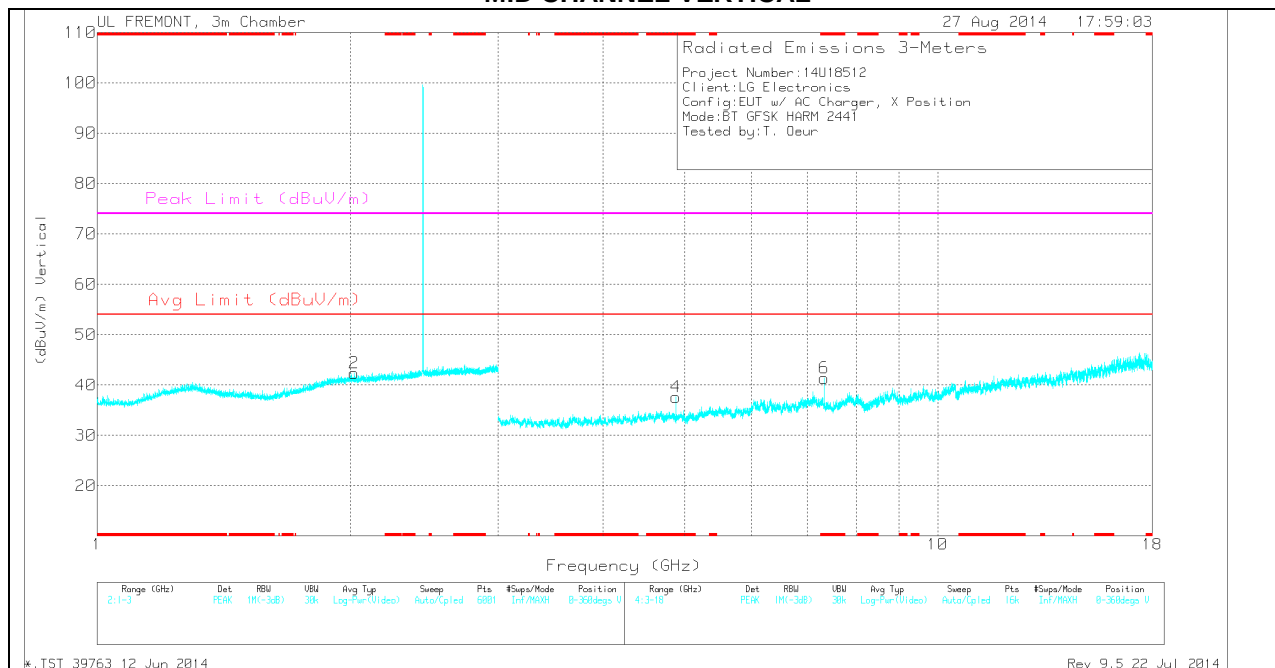

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 4.882	31.95	PK	34	-30.1	35.85	-	-	74	-38.15	0-360	200	H
5	* 7.323	33.82	PK	35.6	-28.4	41.02	-	-	74	-32.98	0-360	100	H
4	* 4.882	33.71	PK	34	-30.1	37.61	-	-	74	-36.39	0-360	100	V
6	* 7.323	34.16	PK	35.6	-28.4	41.36	-	-	74	-32.64	0-360	200	V
1	1.882	34.8	PK	31	-23.2	42.6	-	-	-	-	0-360	100	H
2	2.023	33.96	PK	31.6	-23.2	42.36	-	-	-	-	0-360	200	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band
PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.882	40.98	PK3	34	-30.1	44.88	-	-	74	-29.12	242	264	H
* 4.882	30.76	VB1T	34	-30.1	34.66	54	-19.34	-	-	242	264	H
* 7.323	41.71	PK3	35.6	-28.4	48.91	-	-	74	-25.09	350	165	H
* 7.323	34.26	VB1T	35.6	-28.4	41.46	54	-12.54	-	-	350	165	H
* 4.883	41.37	PK3	34	-30.1	45.27	-	-	74	-28.73	17	293	V
* 4.882	32.65	VB1T	34	-30.1	36.55	54	-17.45	-	-	17	293	V
* 7.323	40.99	PK3	35.6	-28.4	48.19	-	-	74	-25.81	168	240	V
* 7.324	33.8	VB1T	35.6	-28.4	41	54	-13	-	-	168	240	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band
PK3 - FHSS Method: Maximum Peak
VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

HIGH CHANNEL HORIZONTAL

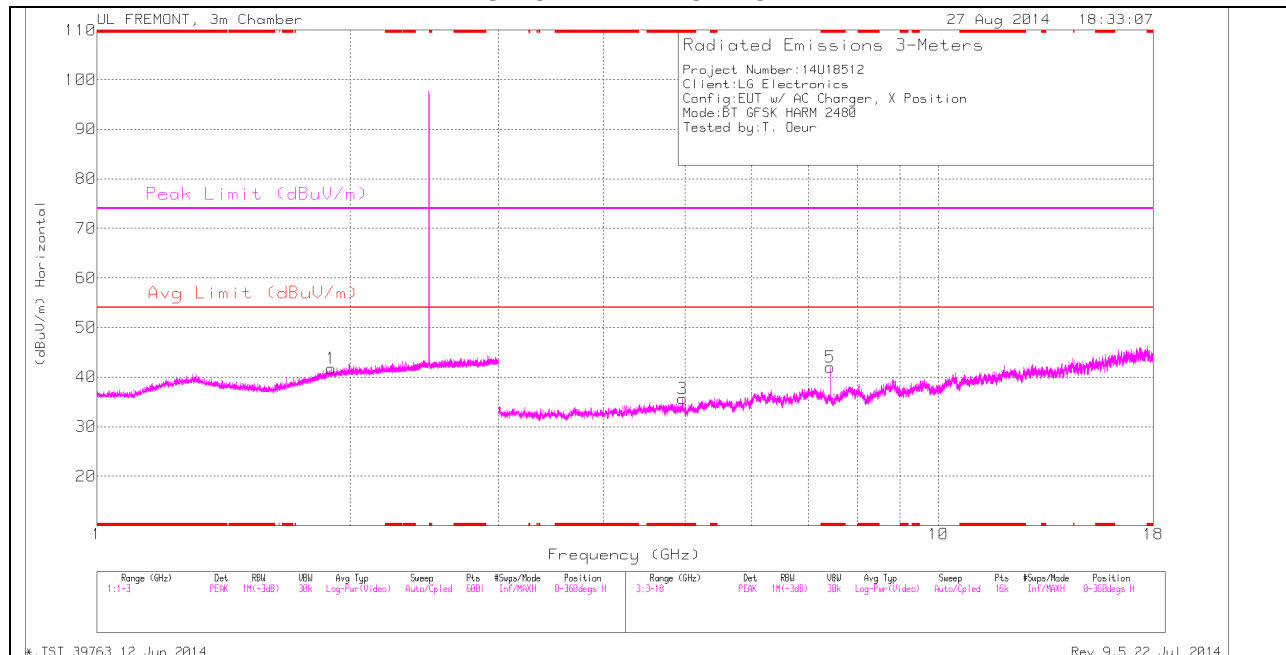

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL VERTICAL

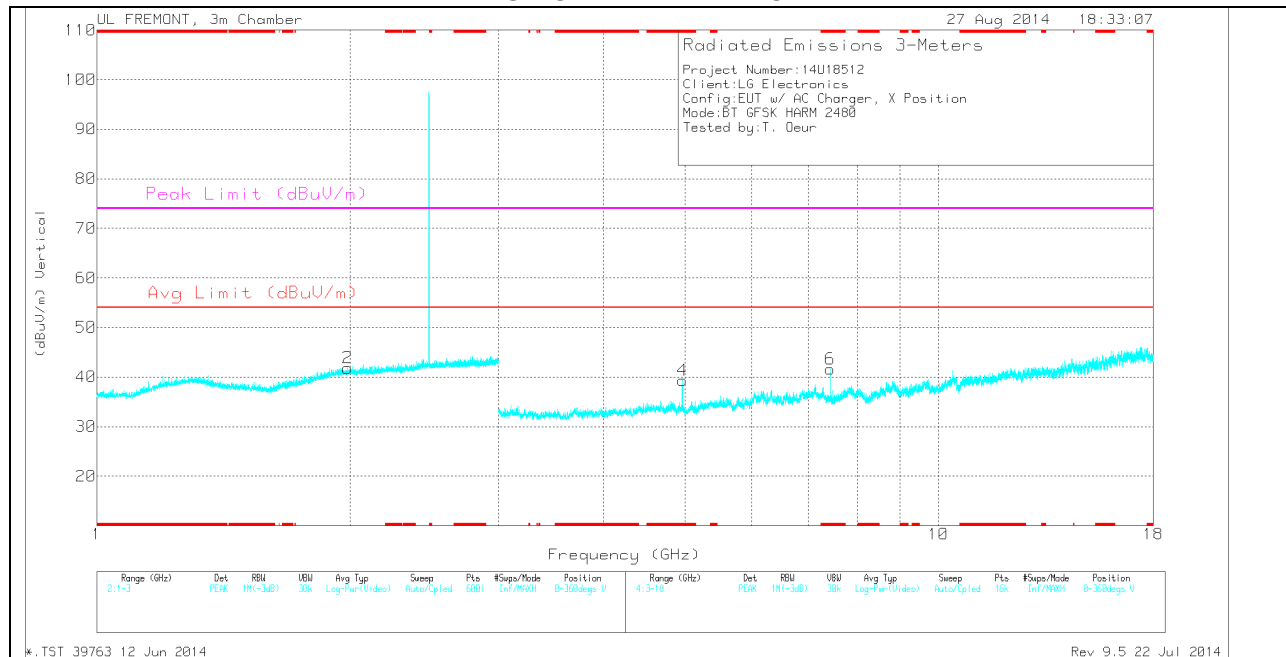

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 4.96	32.64	PK	34	-31	35.64	-	-	74	-38.36	0-360	100	H
5	* 7.44	35.17	PK	35.7	-28.9	41.97	-	-	74	-32.03	0-360	200	H
4	* 4.96	36.36	PK	34	-31	39.36	-	-	74	-34.64	0-360	100	V
6	* 7.441	34.81	PK	35.7	-28.9	41.61	-	-	74	-32.39	0-360	100	V
1	1.899	33.79	PK	31.2	-23.3	41.69	-	-	-	-	0-360	100	H
2	1.987	33.41	PK	31.6	-23.2	41.81	-	-	-	-	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band
PK - Peak detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.961	44.57	PK3	34	-31	47.57	-	-	74	-26.43	142	229	H
* 4.96	35.8	VB1T	34	-31	38.8	54	-15.2	-	-	142	229	H
* 7.441	41.05	PK3	35.7	-28.9	47.85	-	-	74	-26.15	4	298	H
* 7.44	32.81	VB1T	35.7	-28.9	39.61	54	-14.39	-	-	4	298	H
* 4.96	43.34	PK3	34	-31	46.34	-	-	74	-27.66	92	268	V
* 4.96	35.49	VB1T	34	-31	38.49	54	-15.51	-	-	92	268	V
* 7.44	43.25	PK3	35.7	-28.9	50.05	-	-	74	-23.95	189	265	V
* 7.441	37.1	VB1T	35.7	-28.9	43.9	54	-10.1	-	-	189	265	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band
PK3 - FHSS Method: Maximum Peak
VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

9.2.1. ENHANCED DATA RATE 8PSK MODULATION RESTRICTED BANDEDGE (LOW CHANNEL)


HORIZONTAL PEAK AND AVERAGE PLOT

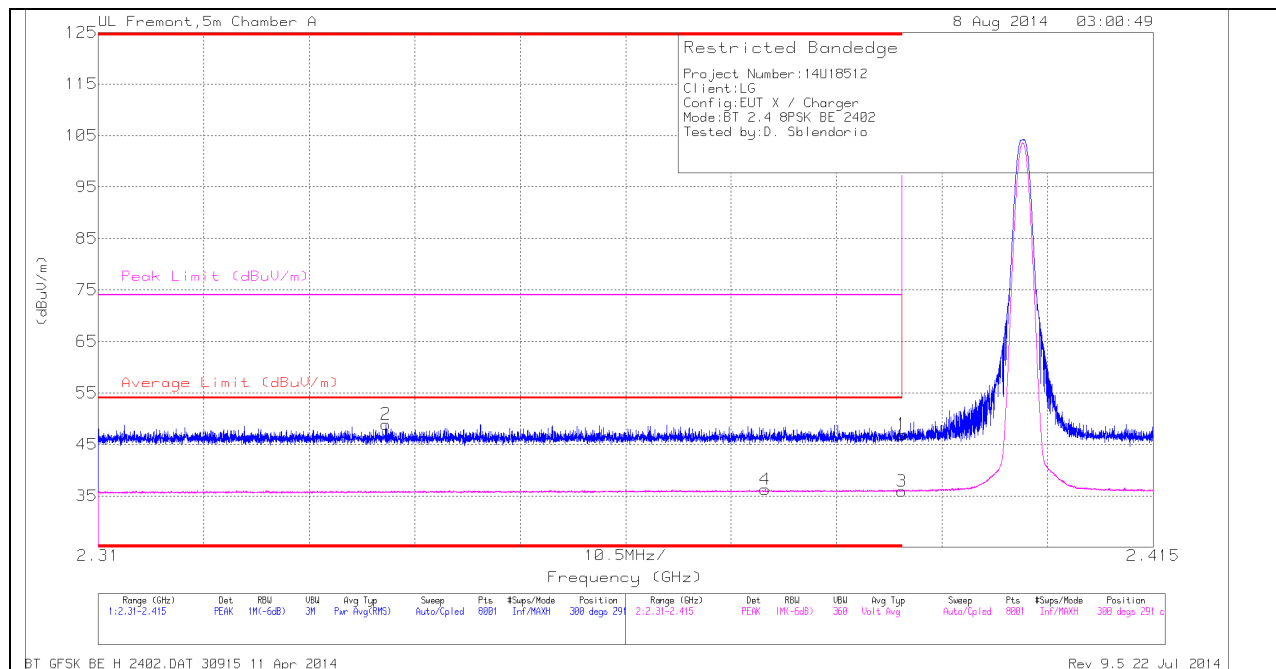

HORIZONTAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.339	42.19	PK	31.7	-25	48.89	-	-	74	-25.11	191	289	H
4	* 2.376	29.35	VB1T	31.8	-24.9	36.25	54	-17.75	-	-	191	289	H
1	* 2.39	40.05	PK	31.8	-24.9	46.95	-	-	74	-27.05	66	274	H
3	* 2.39	29.02	VB1T	31.8	-24.9	35.92	54	-18.08	-	-	66	274	H

VERTICAL PEAK AND AVERAGE PLOT

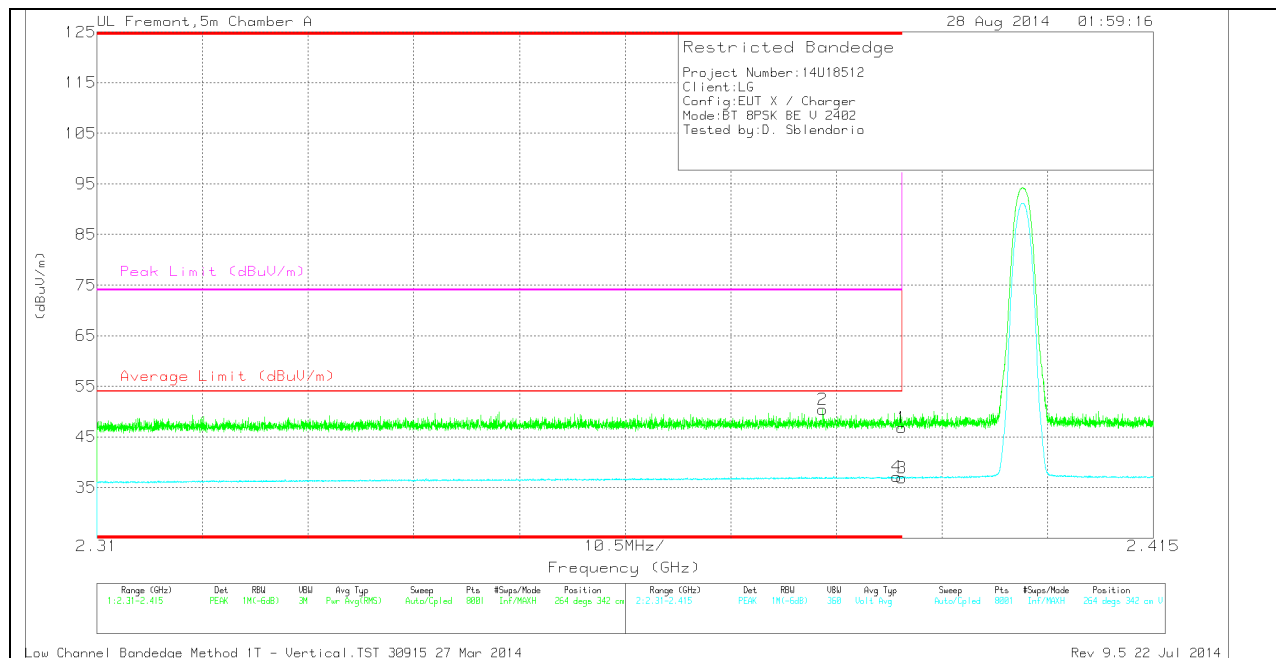


VERTICAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	38.72	PK	32.2	-24.1	46.82	-	-	74	-27.18	264	342	V
2	* 2.382	42.2	PK	32.2	-24	50.4	-	-	74	-23.6	264	342	V
3	* 2.39	28.74	VB1T	32.2	-24.1	36.84	54	-17.16	-	-	264	342	V
4	* 2.39	29.03	VB1T	32.2	-24.1	37.13	54	-16.87	-	-	264	342	V

AUTHORIZED BANDEDGE (HIGH CHANNEL)


HORIZONTAL PEAK AND AVERAGE PLOT

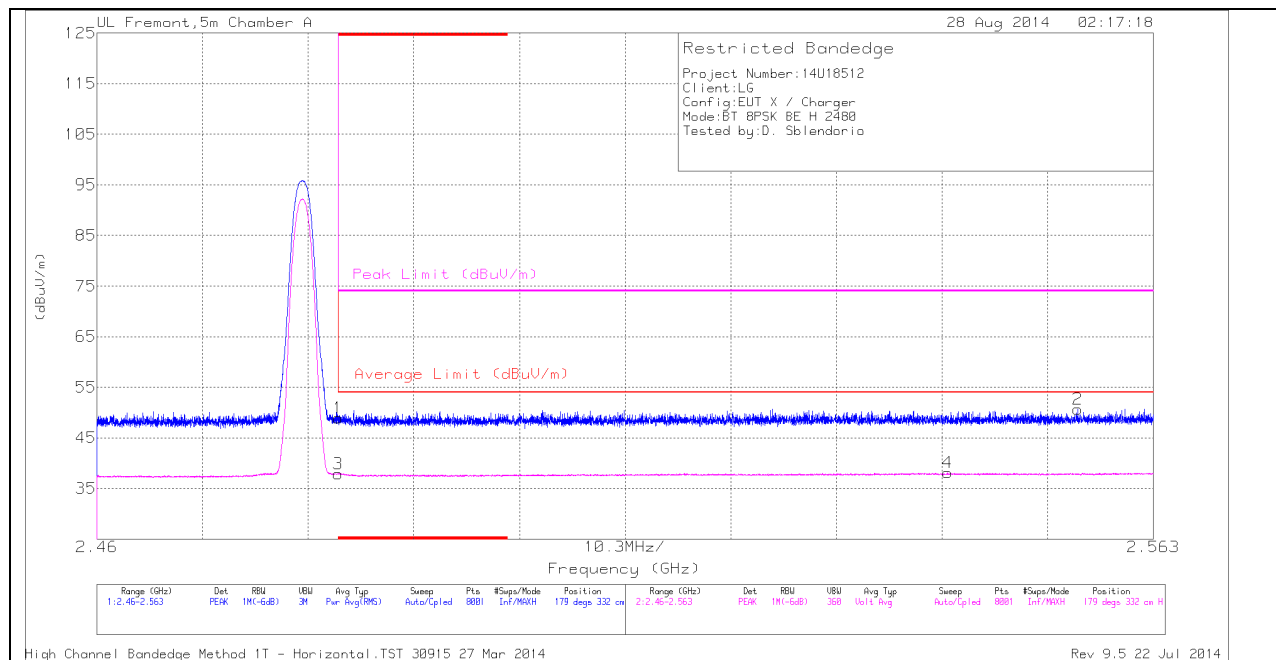

HORIZONTAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	40.37	PK	32.7	-24.2	48.87	-	-	74	-25.13	179	332	H
3	* 2.484	29.39	VB1T	32.7	-24.2	37.89	54	-16.11	-	-	179	332	H
4	2.543	28.99	VB1T	32.9	-23.8	38.09	54	-15.91	-	-	179	332	H
2	2.556	41.59	PK	32.9	-23.8	50.69	-	-	74	-23.31	179	332	H

VERTICAL PEAK AND AVERAGE PLOT

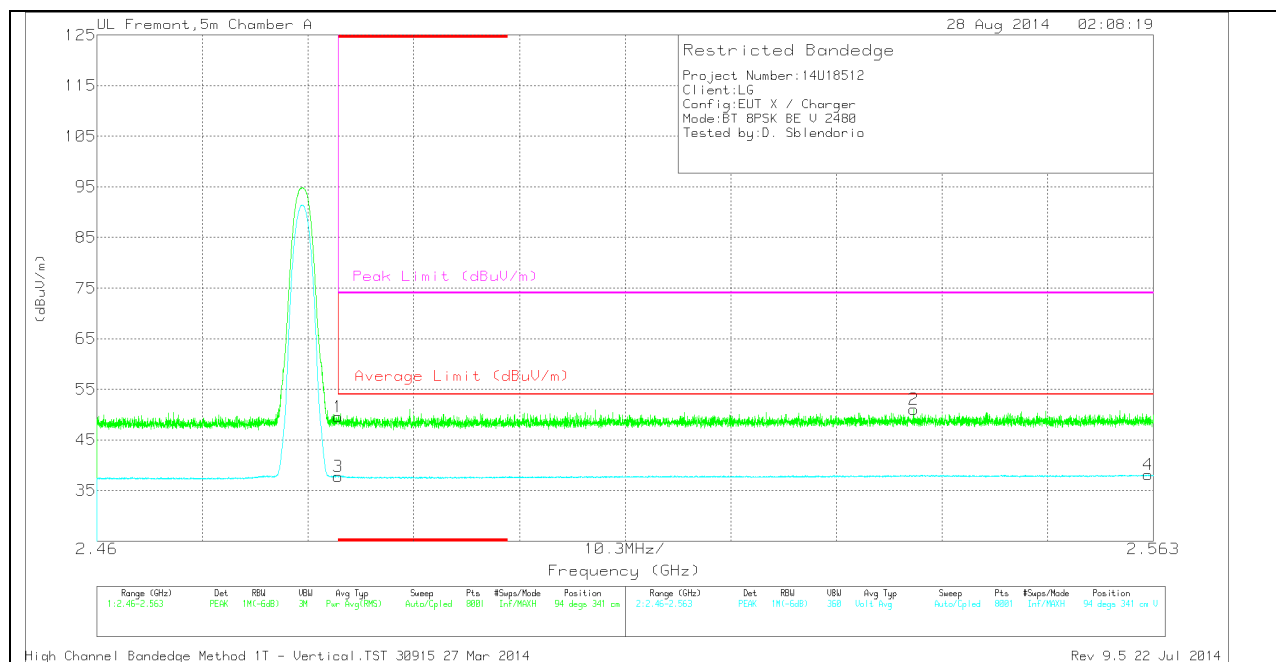


VERTICAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	41.05	PK	32.7	-24.2	49.55	-	-	74	-24.45	94	341	V
3	* 2.484	29.24	VB1T	32.7	-24.2	37.74	54	-16.26	-	-	94	341	V
2	2.54	41.98	PK	32.9	-23.8	51.08	-	-	74	-22.92	94	341	V
4	2.562	28.9	VB1T	32.9	-23.7	38.1	54	-15.9	-	-	94	341	V


HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

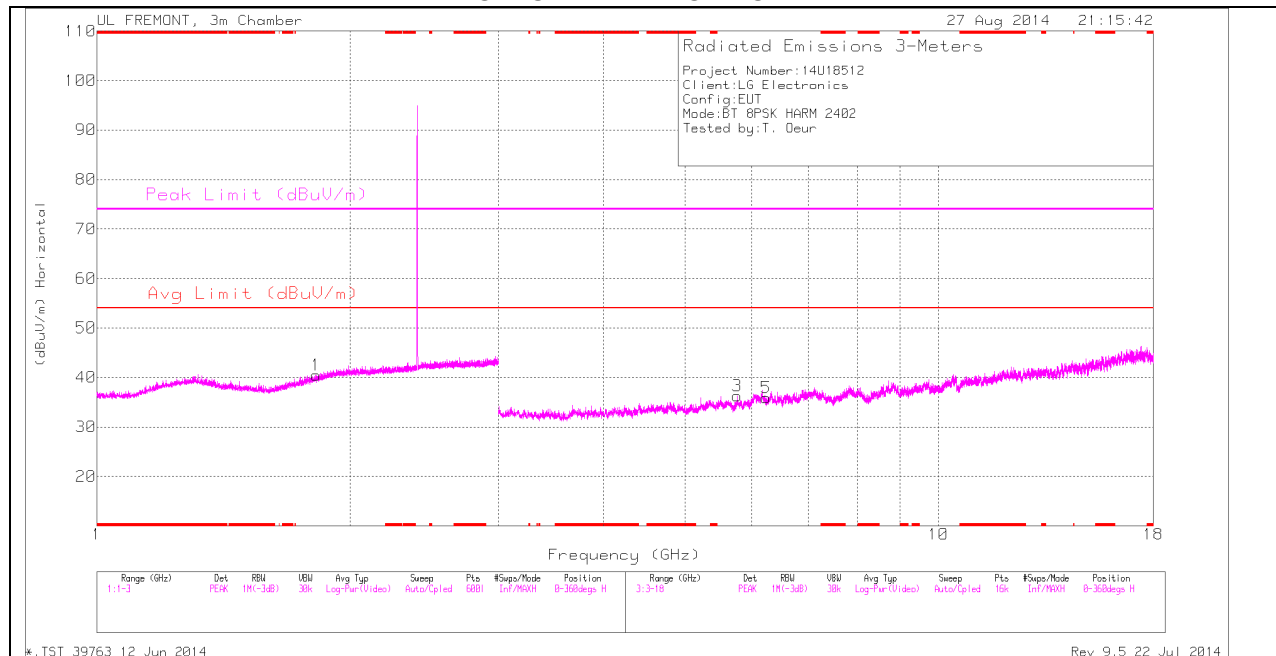

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL VERTICAL

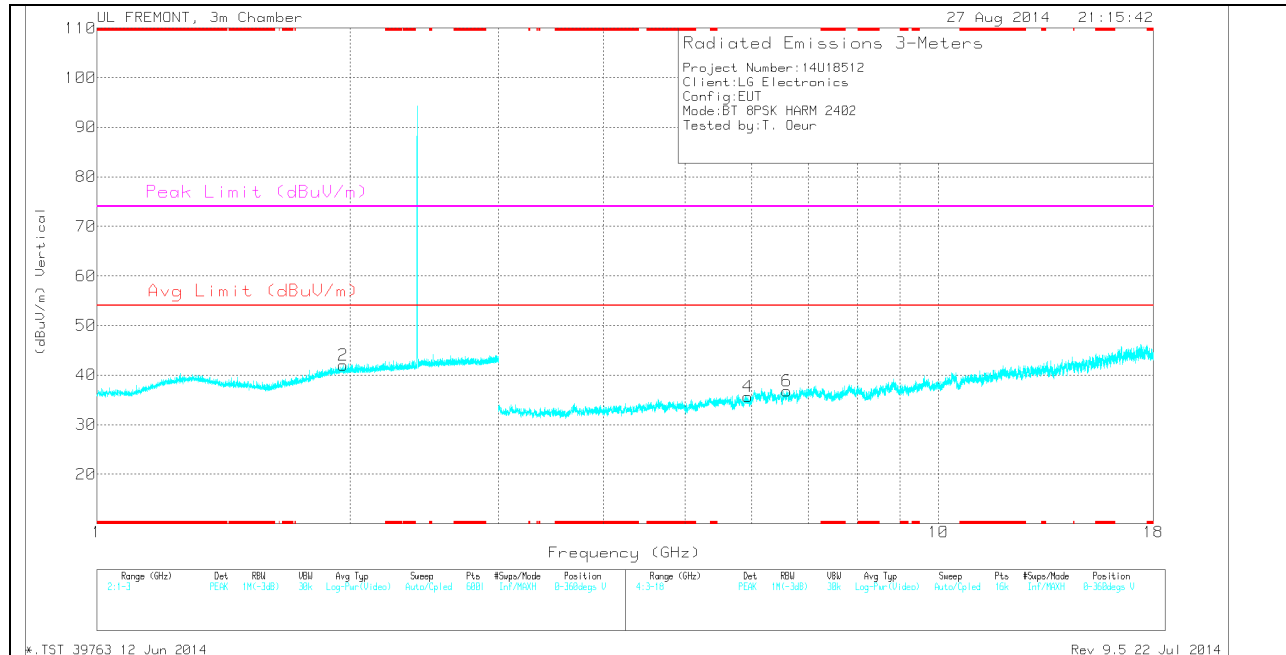

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


LOW CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.823	33.42	PK	30.4	-23.3	40.52	-	-	-	-	0-360	100	H
2	1.96	33.77	PK	31.5	-23.3	41.97	-	-	-	-	0-360	200	V
3	5.761	31.95	PK	34.8	-30.5	36.25	-	-	-	-	0-360	200	H
4	5.94	31.04	PK	35.2	-30.6	35.64	-	-	-	-	0-360	200	V
5	6.244	31.05	PK	35.3	-30.4	35.95	-	-	-	-	0-360	100	H
6	6.605	29.58	PK	35.6	-28.4	36.78	-	-	-	-	0-360	200	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band
PK - Peak detector

MID CHANNEL HORIZONTAL

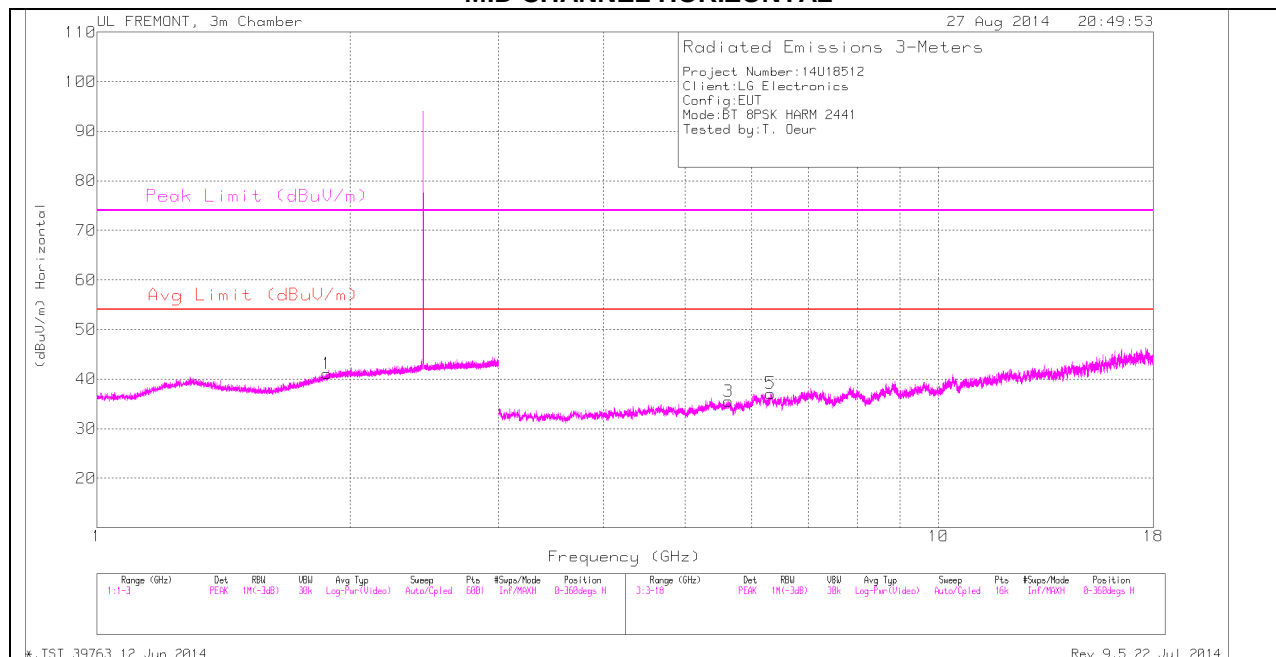

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL VERTICAL

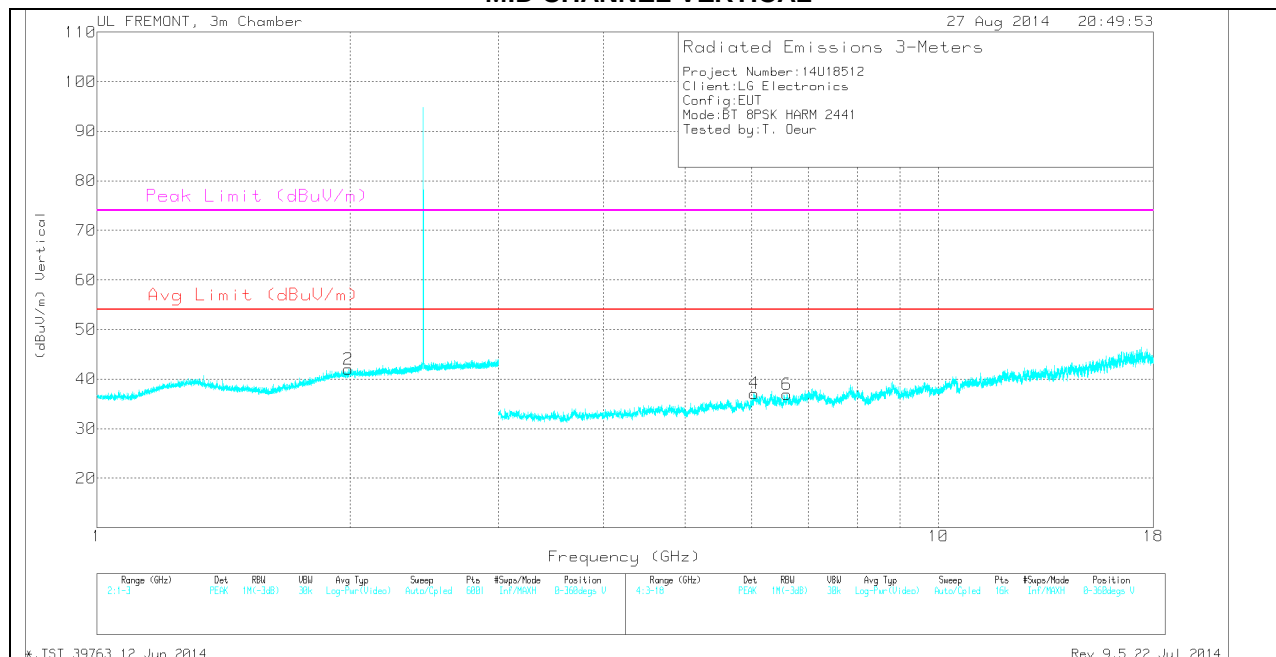

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.876	33.4	PK	31	-23.3	41.1	-	-	-	-	0-360	100	H
2	1.988	33.55	PK	31.6	-23.2	41.95	-	-	-	-	0-360	100	V
3	5.63	30.36	PK	34.7	-29.5	35.56	-	-	-	-	0-360	100	H
4	6.041	31.01	PK	35.3	-29.2	37.11	-	-	-	-	0-360	200	V
5	6.313	31.31	PK	35.4	-29.6	37.11	-	-	-	-	0-360	100	H
6	6.606	29.78	PK	35.6	-28.5	36.88	-	-	-	-	0-360	100	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band
PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6.314	40.42	PK3	35.4	-29.5	46.32	-	-	-	-	0	100	H


PK3 - FHSS Method: Maximum Peak

HIGH CHANNEL HORIZONTAL

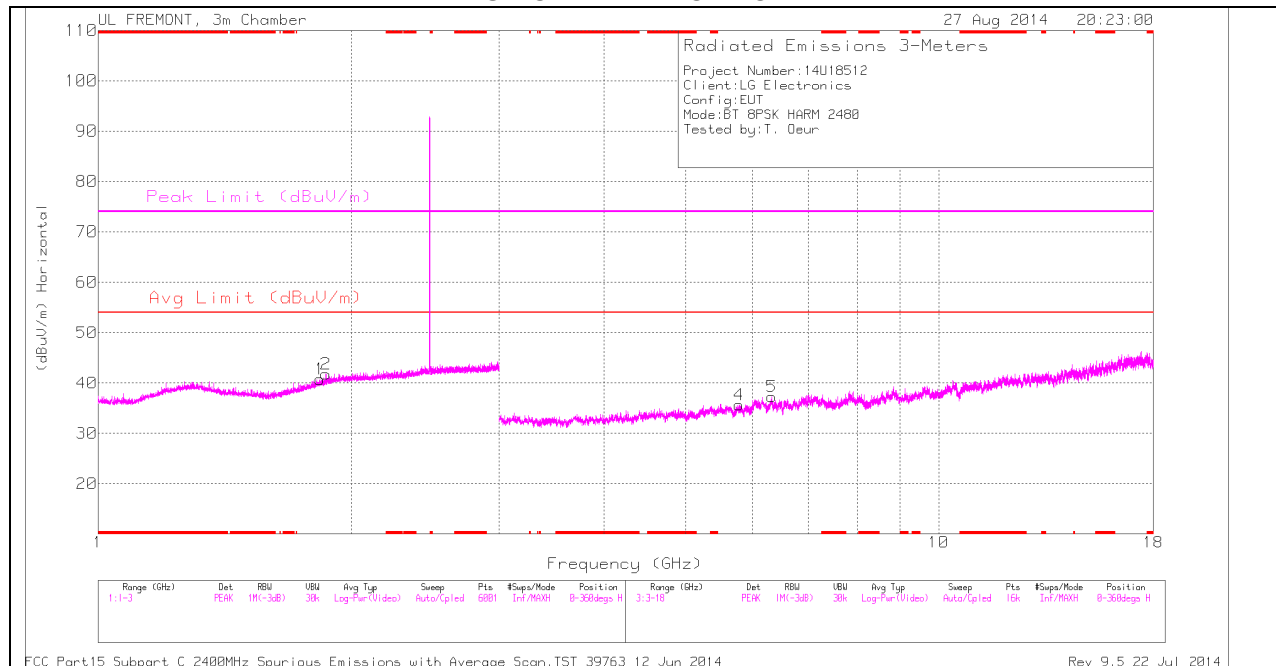

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL VERTICAL

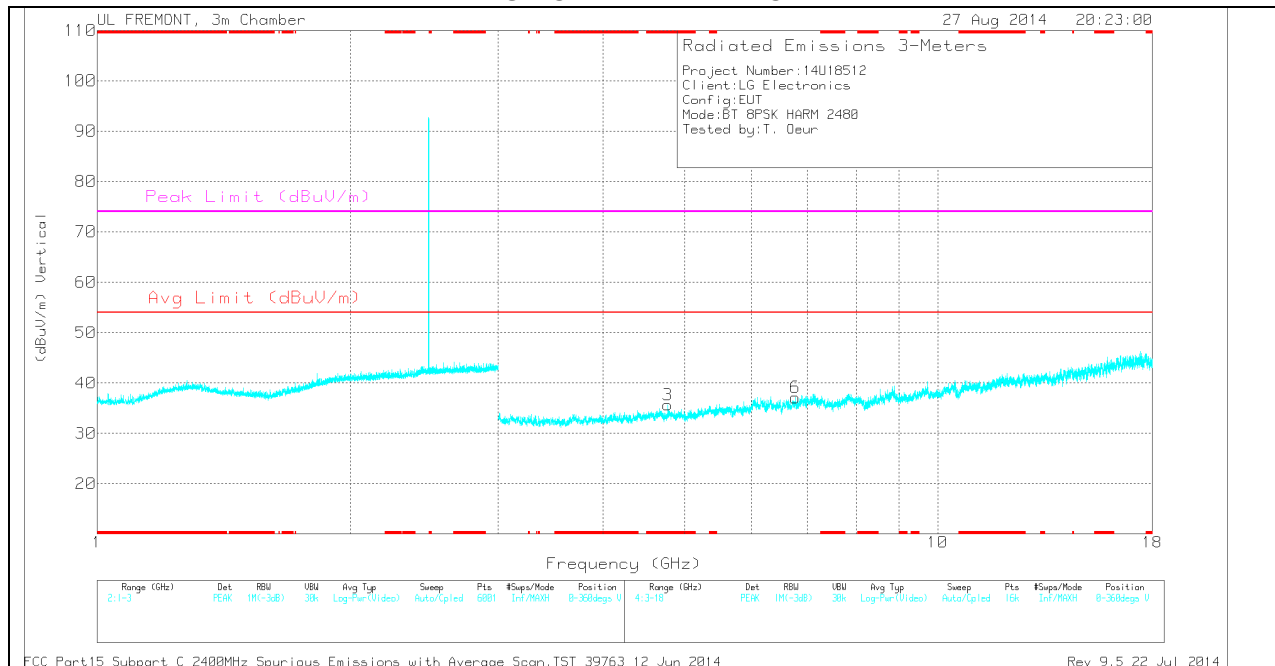

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 4.773	32.14	PK	34.1	-30.6	35.64	-	-	74	-38.36	0-360	200	V
1	1.836	33.54	PK	30.5	-23.3	40.74	-	-	-	-	0-360	200	H
2	1.866	34.18	PK	30.9	-23.3	41.78	-	-	-	-	0-360	100	H
4	5.79	30.66	PK	34.9	-29.9	35.66	-	-	-	-	0-360	100	H
5	6.333	30.97	PK	35.4	-29.1	37.27	-	-	-	-	0-360	100	H
6	6.773	31.01	PK	35.6	-29.5	37.11	-	-	-	-	0-360	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band
PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.775	40.23	PK3	34.1	-30.6	43.73	-	-	74	-30.27	51	121	H
* 4.772	28.16	VB1T	34.1	-30.6	31.66	54	-22.34	-	-	51	121	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band
PK3 - FHSS Method: Maximum Peak
VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet


9.3. WORST-CASE BELOW 1 GHz

GFSK SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL PLOT

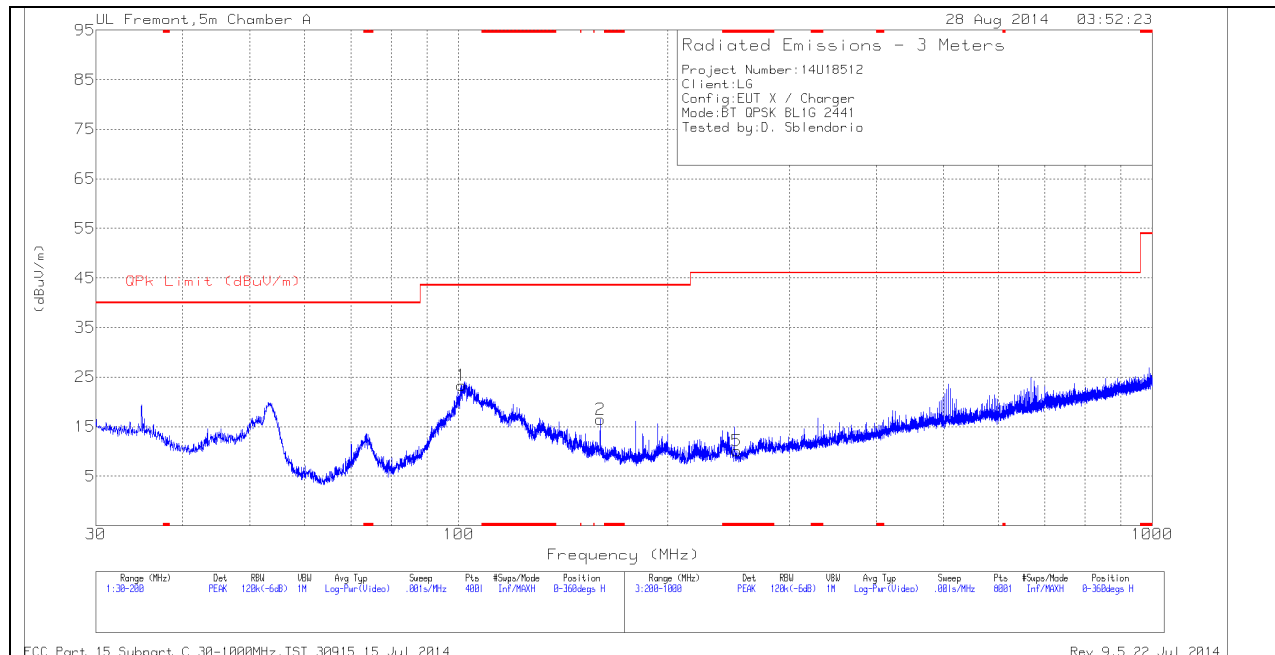

VERTICAL PLOT

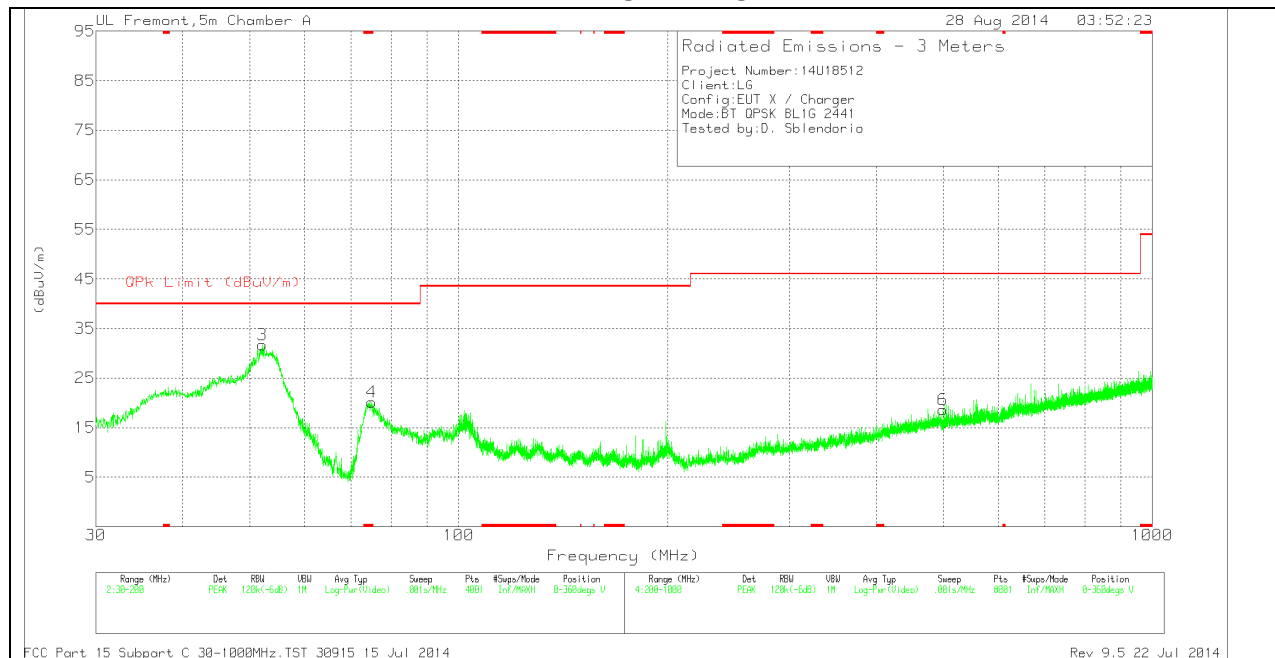

BELOW 1 GHz TABLE

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T477 (dB/m)	Amp/Cbl (dB/m)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 74.965	42.93	PK	8.1	-30.9	20.13	40	-19.87	0-360	101	V
5	* 251.7	28.18	PK	11.4	-29.5	10.08	46.02	-35.94	0-360	200	H
3	52.1425	55.04	PK	7.4	-30.7	31.74	40	-8.26	0-360	101	V
1	101.0175	43.11	PK	10.6	-30.4	23.31	43.52	-20.21	0-360	300	H
2	160.0075	34.22	PK	12.3	-30.1	16.42	43.52	-27.1	0-360	200	H
6	499.2	29.88	PK	17.4	-28.7	18.58	46.02	-27.44	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band
PK - Peak detector

10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

Please refer to project 14U18426 for details