



FCC CFR47 PART 15 SUBPART C

INDUSTRY CANADA RSS-210 ISSUE 8

**BLUETOOTH LOW ENERGY
CERTIFICATION TEST REPORT**

FOR

SMART WATCH WITH 2.4 DTS b/g/n + BT & BLE

MODEL NUMBER: LG-W150, W150, LGW150

FCC ID: ZNFW150

IC ID: 2703C-W150

REPORT NUMBER: 15I20081-E2

ISSUE DATE: FEBRUARY 23, 2015

Prepared for

LG ELECTRONICS MOBILECOMM U.S.A., INC.

1000 SYLVAN AVENUE

ENGLEWOOD CLIFFS,

NEW JERSEY, 07632, U.S.A

Prepared by

UL VERIFICATION SERVICES INC.

47173 BENICIA STREET

FREMONT, CA 94538, U.S.A.

TEL: (510) 771-1000

FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	02/23/15	Initial Issue	D. Corona

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. MEASURING INSTRUMENT CALIBRATION	5
4.2. SAMPLE CALCULATION	5
4.3. MEASUREMENT UNCERTAINTY	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT	7
5.2. MAXIMUM OUTPUT POWER.....	7
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	7
5.4. WORST-CASE CONFIGURATION AND MODE	8
5.5. DESCRIPTION OF TEST SETUP.....	9
6. TEST AND MEASUREMENT EQUIPMENT	11
7. SUMMARY ANTENNA PORT TEST RESULTS	12
7.1. 6 dB BANDWIDTH.....	13
7.2. 99% BANDWIDTH	17
7.3. OUTPUT POWER.....	21
7.4. AVERAGE POWER	25
7.5. POWER SPECTRAL DENSITY	26
7.6. CONDUCTED SPURIOUS EMISSIONS.....	30
8. RADIATED TEST RESULTS.....	37
8.1. LIMITS AND PROCEDURE	37
8.2. TRANSMITTER ABOVE 1 GHz	38
8.3. WORST-CASE BELOW 1 GHz.....	48
9. AC POWER LINE CONDUCTED EMISSIONS	50
10. SETUP PHOTOS	53

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: LG ELECTRONICS MOBILECOMM U.S.A., INC
EUT DESCRIPTION: SMART WATCH WITH 2.4 DTS b/g/n + BT & BLE
MODEL: LG-W150, W150, LGW150)
SERIAL NUMBER: 1PRQQ (Radiated), 1PRH3 (Conducted)
DATE TESTED: FEBRUARY 16-19, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 ISSUE 8 Annex 8	Pass
INDUSTRY CANADA RSS-GEN ISSUE 4	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



DAN CORONIA
CONSUMER TECHNOLOGY DIVISION
WISE PROJECT LEAD
UL VERIFICATION SERVICES INC

Tested By:



STEVEN TRAN
CONSUMER TECHNOLOGY DIVISION
WISE LAB ENGINEER
UL VERIFICATION SERVICES INC

TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 4, and RSS-210 Issue 8.

2. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A(IC: 2324B-1)	☐ Chamber D(IC: 2324B-4)
☐ Chamber B(IC: 2324B-2)	☐ Chamber E(IC: 2324B-5)
☐ Chamber C(IC: 2324B-3)	☐ Chamber F(IC: 2324B-6)
	☒ Chamber G(IC: 2324B-7)
	☐ Chamber H(IC: 2324B-8)

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

3. CALIBRATION AND UNCERTAINTY

3.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

3.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned}\text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable} \\ &\text{Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m}\end{aligned}$$

3.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

4. EQUIPMENT UNDER TEST

4.1. DESCRIPTION OF EUT

The EUT is a SMART WATCH WITH 2.4 DTS b/g/n + BT & BLE

4.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402-2480	BLE	9.37	8.65

4.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes metal antenna (using metal frame (Front) around the W150), with a maximum gain of -2.8 dBi.

4.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y, Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

4.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	LG	MCS-02WD	N/A	N/A
Charger	LG	SDT-330	N/A	N/A

I/O CABLES


I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A

TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests.

EUT was set in the Hidden menu mode to enable BLE communications.

SETUP DIAGRAM FOR TESTS

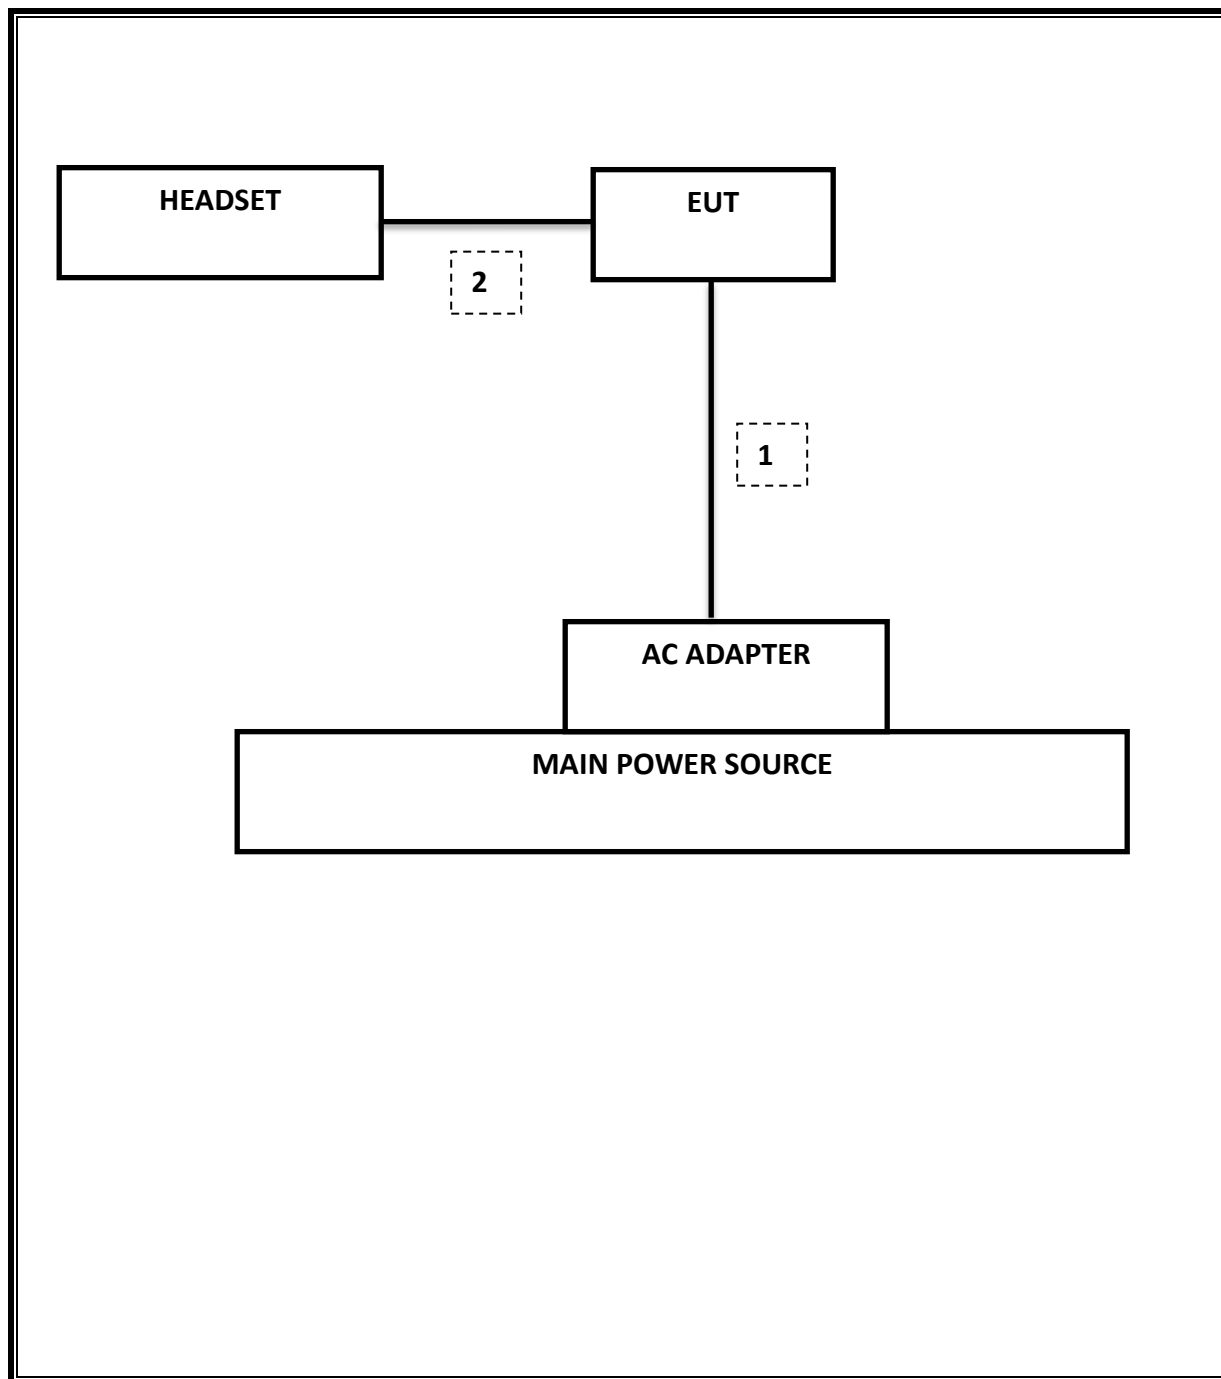

5. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	12/20/15
Spectrum Analyzer, 9KHz-40GHz	HP	8564E	C00986	04/01/15
EMI Test Receiver, 9 kHz-7 GHz	R & S	ESCI 7	1000741	08/13/15
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	08/18/15
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/15
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/15
Antenna, Horn, 1-18 GHz	ETS	3117	C01022	02/21/15
Antenna, Horn, 18- 26 GHz	ARA	MWH-1826/B	C00946	11/12/15
Antenna, Horn, 26-40 GHz	ARA	MWH-2640	C00891	06/28/15
Antenna, Bilog, 30MHz-1 GHz	Sunol Sciences	JB1	T243	03/06/15
RF Preamplifier, 100KHz -> 1300MHz	HP	TBD	C00825	06/01/15
RF Preamplifier, 1GHz - 18GHz	Miteq	NSP4000-SP2	924343	03/23/15
RF Preamplifier, 1GHz - 26.5GHz	HP	8449B	F00351	06/27/15
AC Power Supply, 2,500VA 45-500Hz	Elgar-Ametek	CW2501M	F00013	CNR
RF Preamplifier, 1GHz - 40GHz	Miteq	NSP4000-SP2	C00990	08/20/15
Attenuator / Switch driver	HP	11713A	F00204	CNR
Low Pass Filter 3GHz	Micro-Tronics	LPS17541	F00219	05/23/15
High Pass Filter 5GHz	Micro-Tronics	HPS17542	F00222	05/22/15
High Pass Filter 6GHz	Micro-Tronics	HPM17543	F00224	05/22/15

Test Software List			
Description	Manufacturer	Model	Version
Radiated Software	UL	UL EMC	Version 9.5, 07/22/14
Conducted Software	UL	UL EMC	Version 9.5, 05/17/14
CLT Software	UL	UL RF	Version 1.0, 02/02/15
Antenna Port Software	UL	UL RF	Version 2.1.1.1, 1/20/15

6. SUMMARY TABLE

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
15.247 (a)(2)	RSS-210 A8.2(a)	Occupied Band width (6dB)	>500KHz	Conducted	Pass	754 kHz
2.1051, 15.247 (d)	RSS-210 A8.5	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-39.2 dBm
15.247	RSS-210 A8.4	TX conducted output power	<30dBm		Pass	9.4 dBm
15.247	RSS-210 A8.2	PSD	<8dBm		Pass	-4.8 dBm
15.207 (a)	RSS-GEN 8.8	AC Power Line conducted emissions	Section 10	Radiated	Pass	51.5 dBuV(AV)
15.205, 15.209	RSS-GEN 8.9	Radiated Spurious Emission	< 54dBuV/m		Pass	44 dBuV/m

7. ANTENNA PORT TEST RESULTS

7.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	0.7770	0.5
Middle	2440	0.7680	0.5
High	2480	0.7540	0.5

6 dB BANDWIDTH PLOTS


LOW CHANNEL

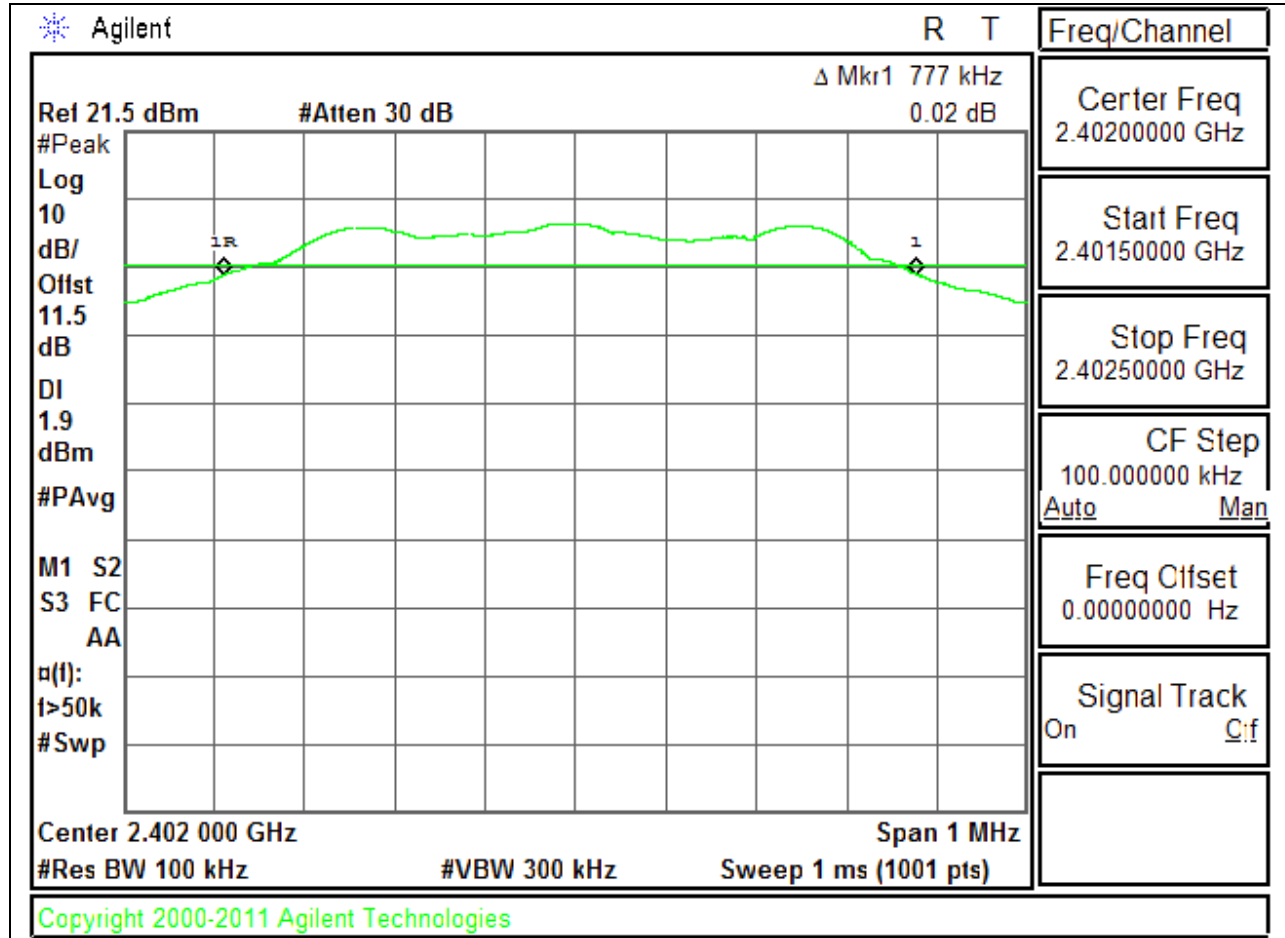

MID CHANNEL

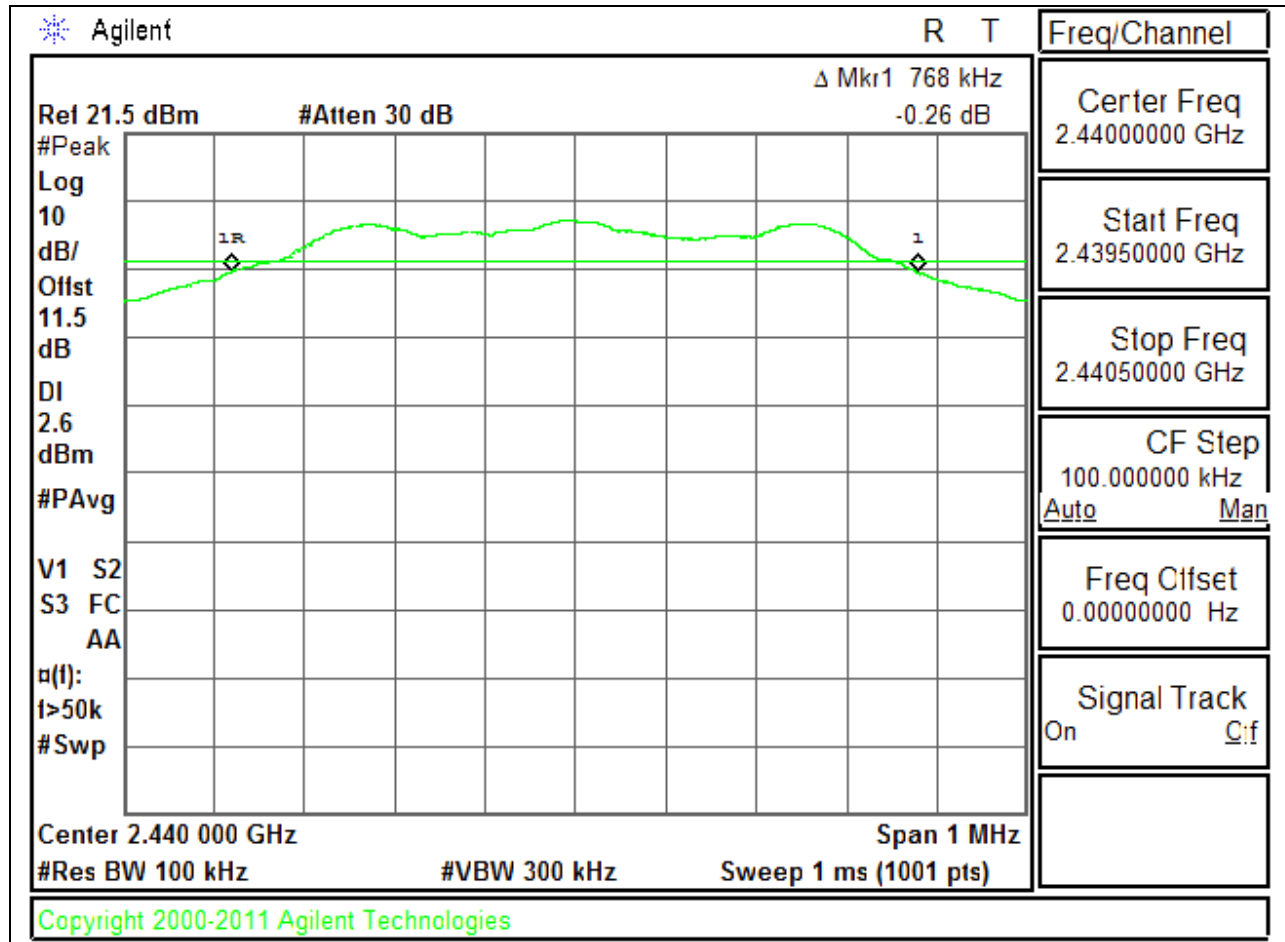

HIGH CHANNEL

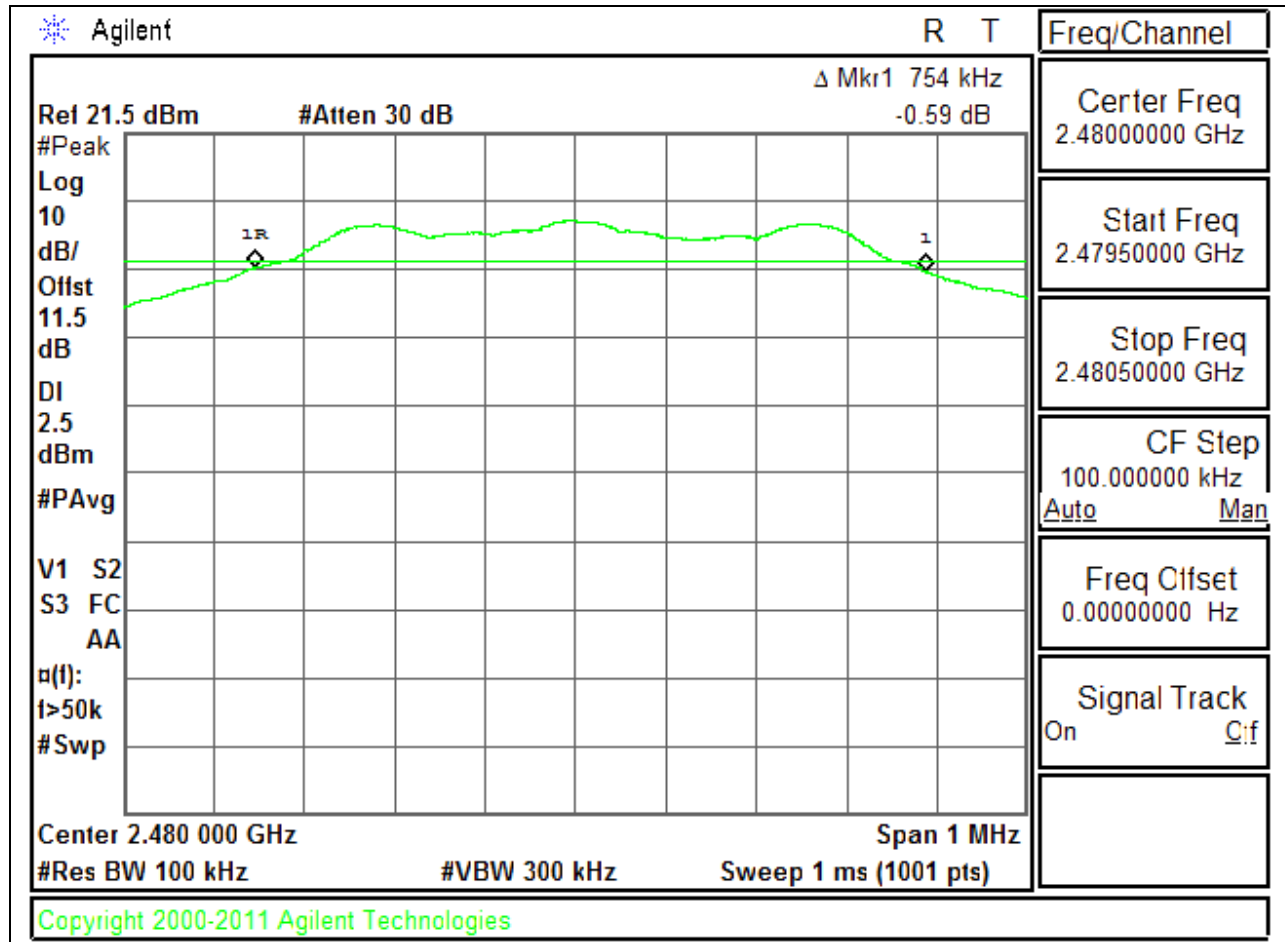

7.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.


TEST PROCEDURE

Reference to KDB558074 D01 DTS Meas Guidance v03r01: The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth and to 1% of the span. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.


RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.0293
Middle	2440	1.0099
High	2480	1.0306


99% BANDWIDTH PLOTS

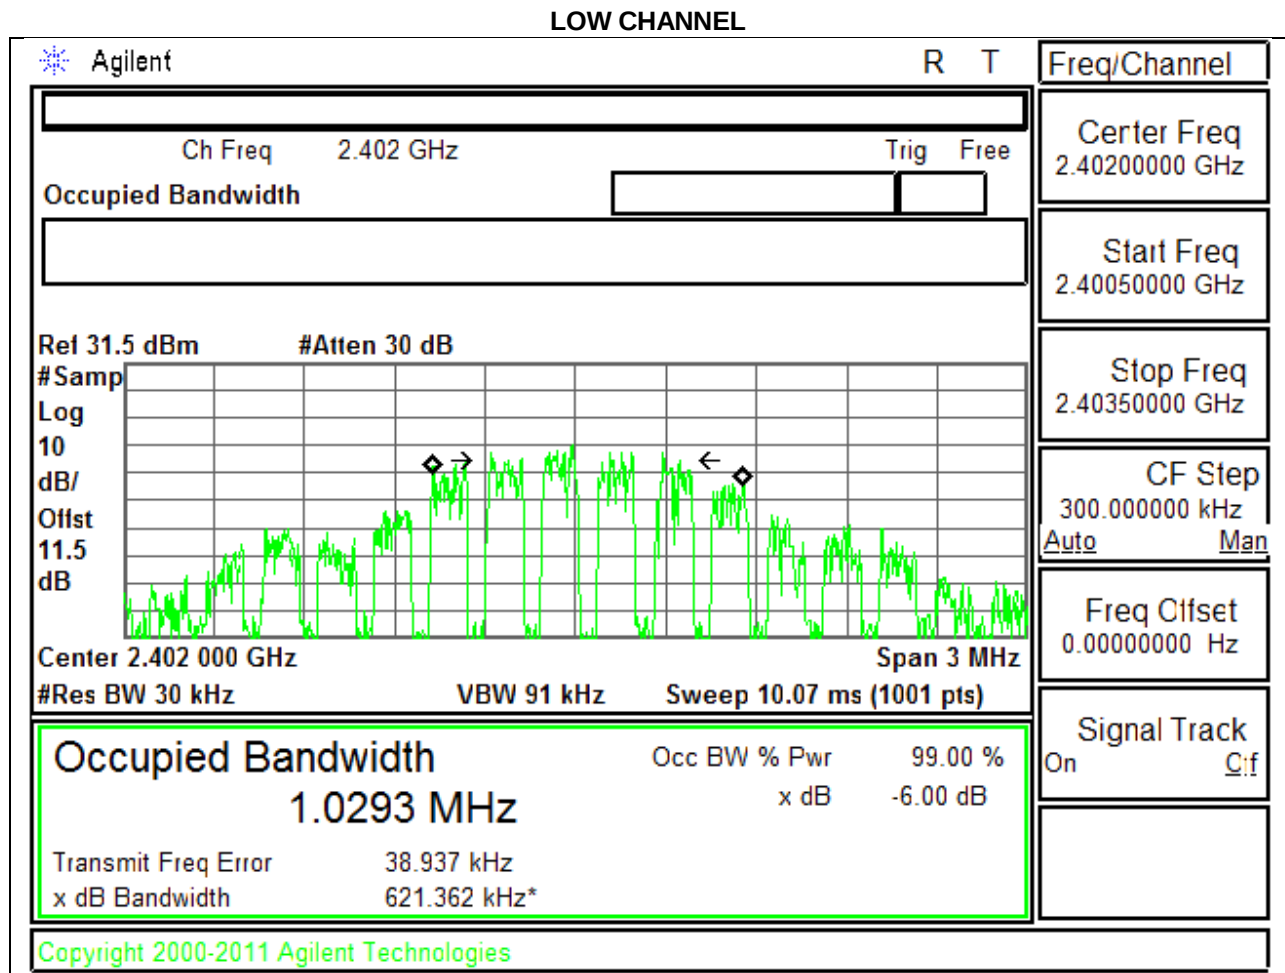

MID CHANNEL

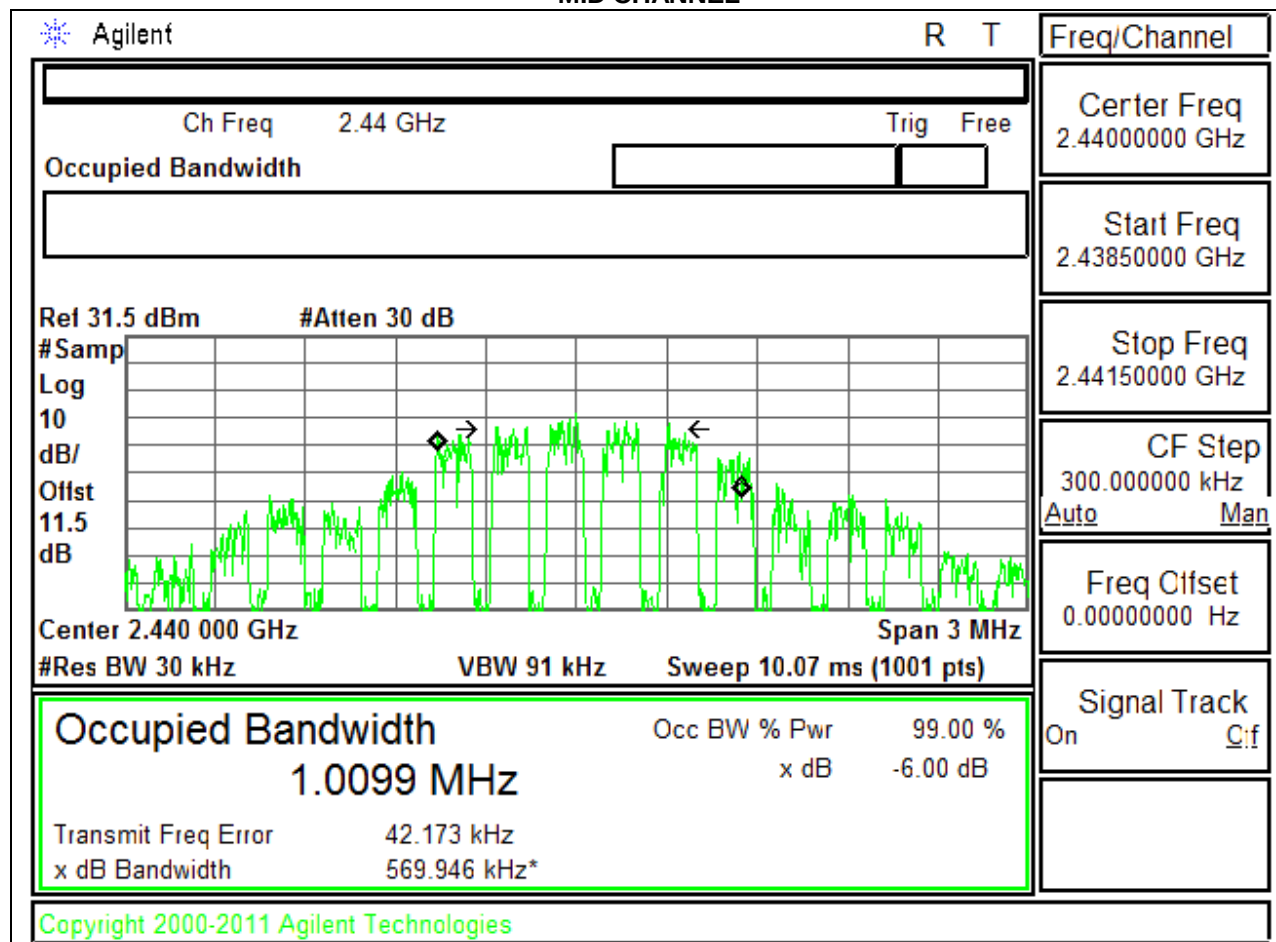

HIGH CHANNEL

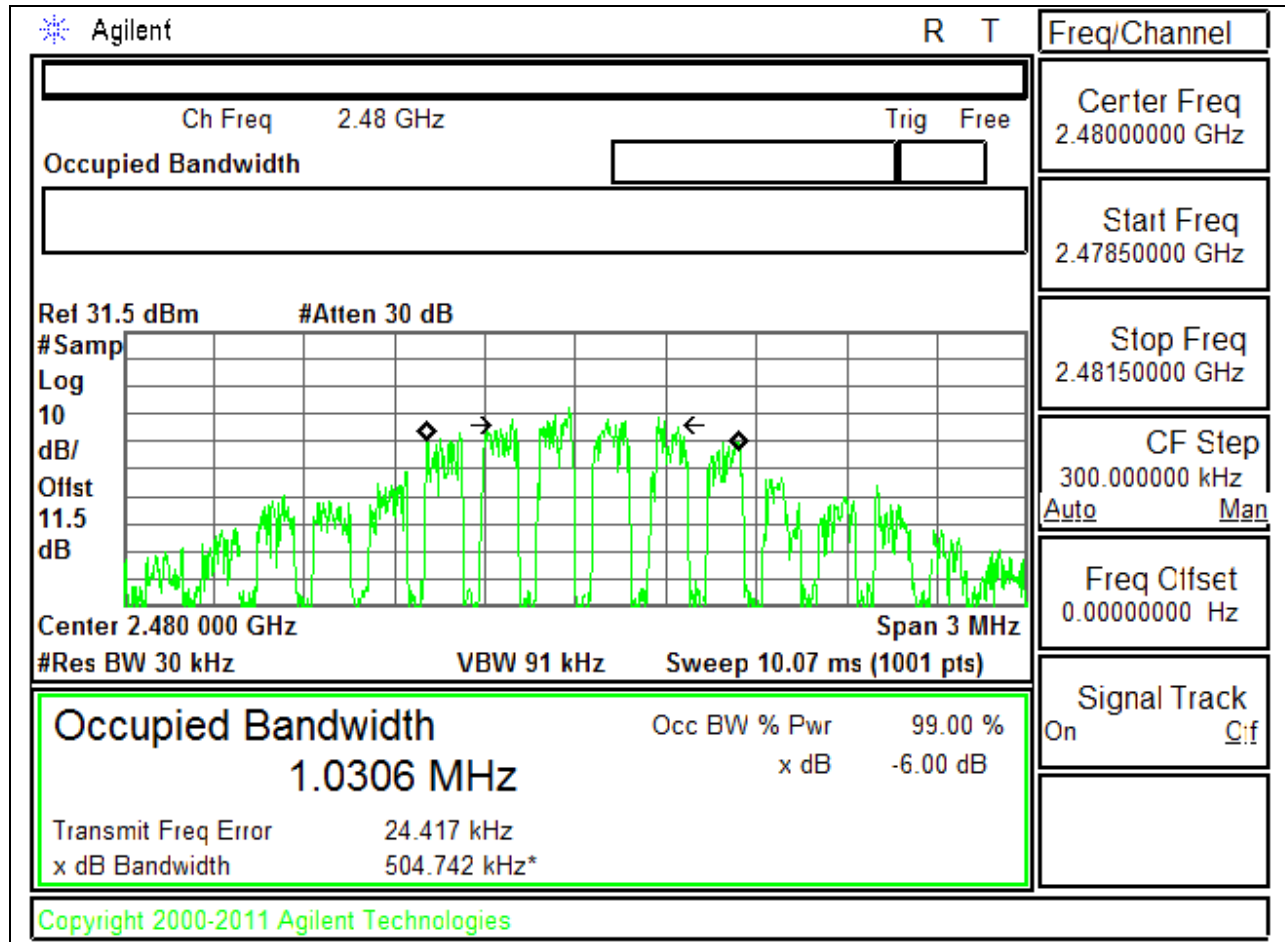

7.3. OUTPUT POWER

LIMITS

FCC §15.247 (b)

IC RSS-210 A8.4

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE

Peak power is measured using KDB558074 D01 DTS Meas Guidance v03r01 April 9, 2013 under section 9.1.1 utilizing spectrum analyzer.


RESULTS

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	8.550	30	-21.450
Middle	2440	9.370	30	-20.630
High	2480	9.370	30	-20.630


OUTPUT POWER PLOTS

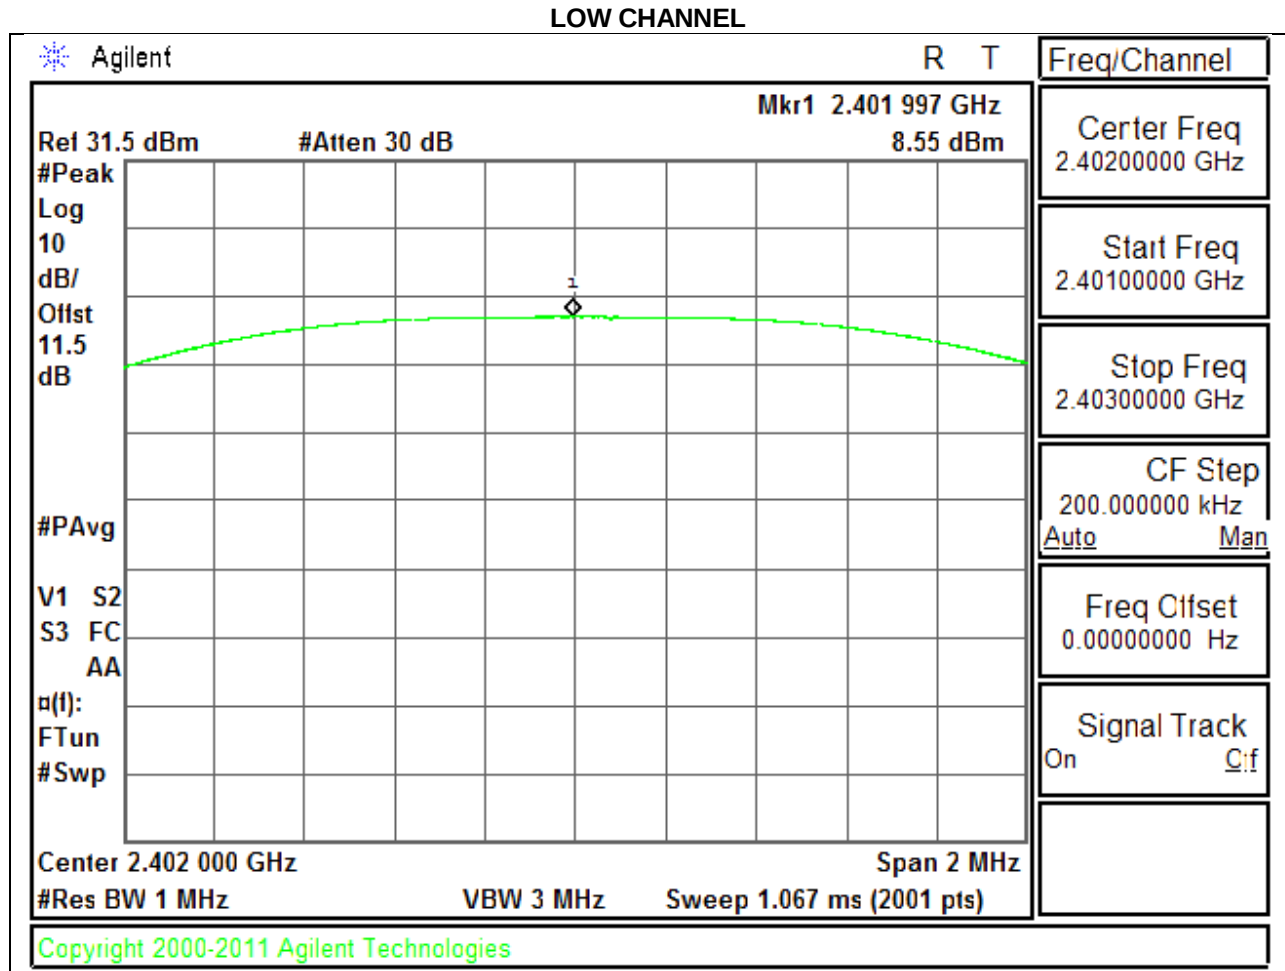

MID CHANNEL

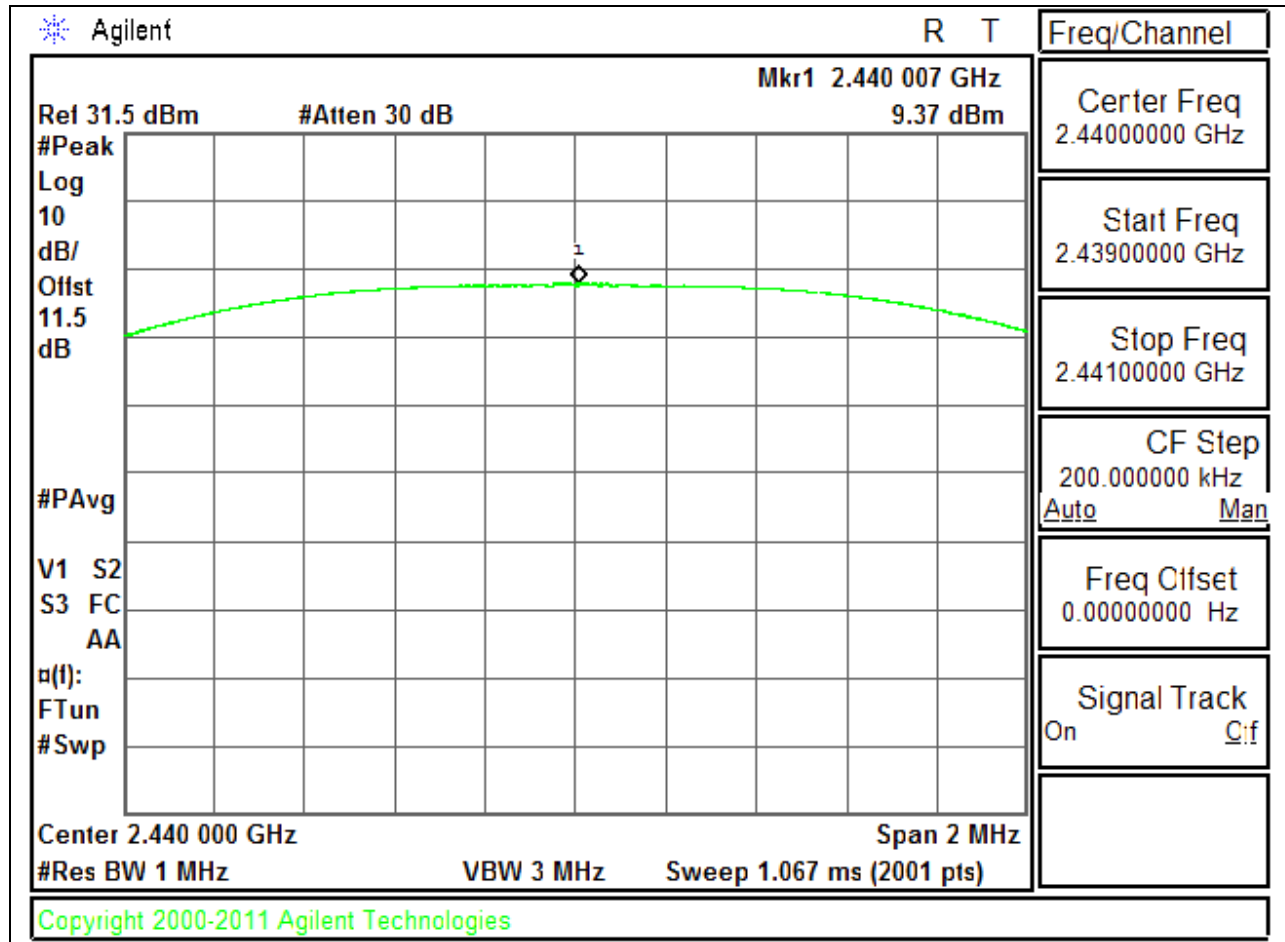

HIGH CHANNEL

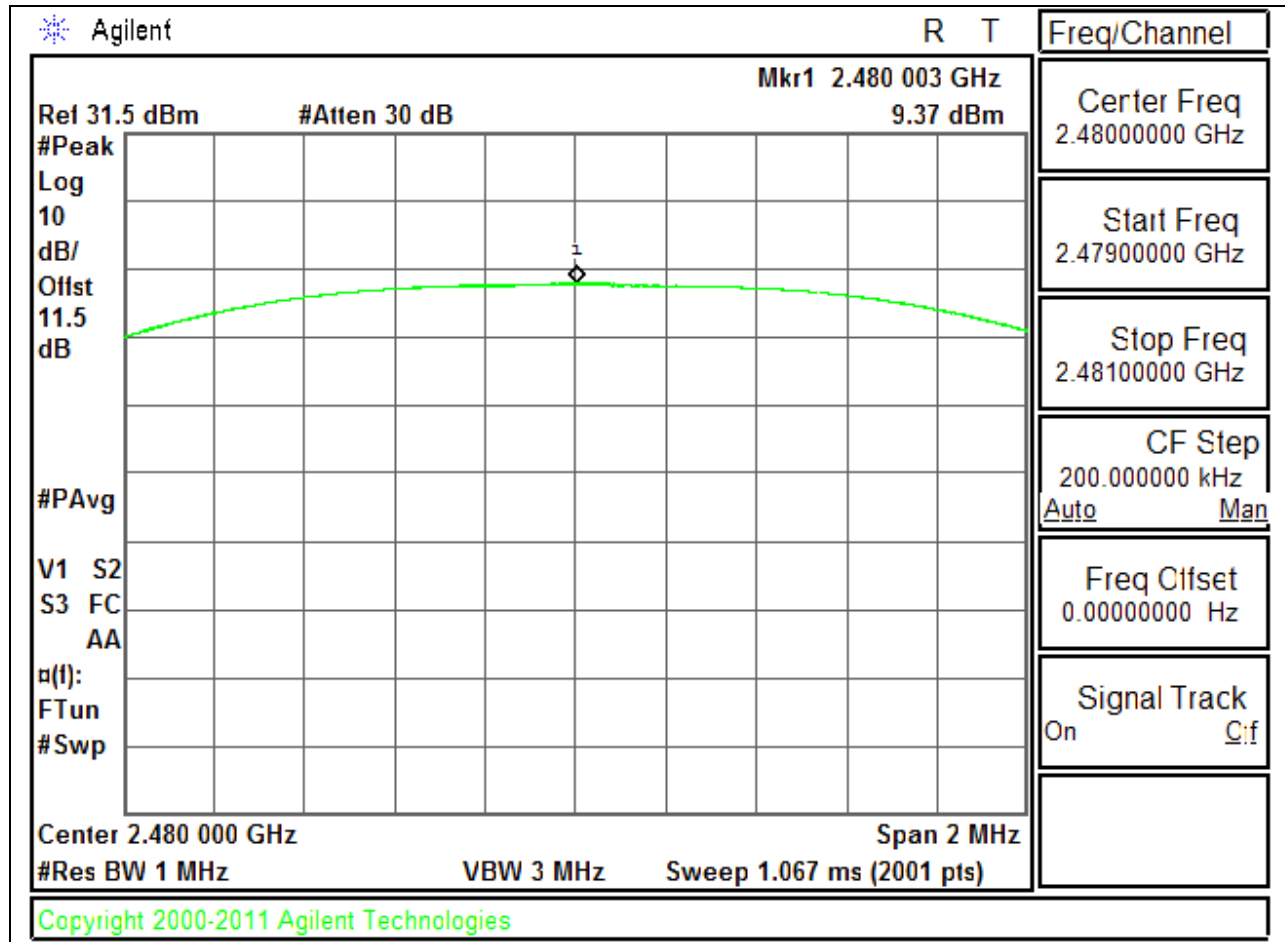

7.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	7.4
Middle	2440	8.2
High	2480	8.4

7.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


TEST PROCEDURE

Power Spectral Density was performed utilizing the “Method PKPSD (Peak PSD)” under KDB558074 D01 DTS Meas Guidance v03r01, April 9, 2013


RESULTS

Channel	Frequency (MHz)	PSD (dBm)	Limit (dBm)	Margin (dB)
Low	2402	-5.57	8	-13.57
Middle	2440	-4.76	8	-12.76
High	2480	-4.90	8	-12.90


POWER SPECTRAL DENSITY PLOTS

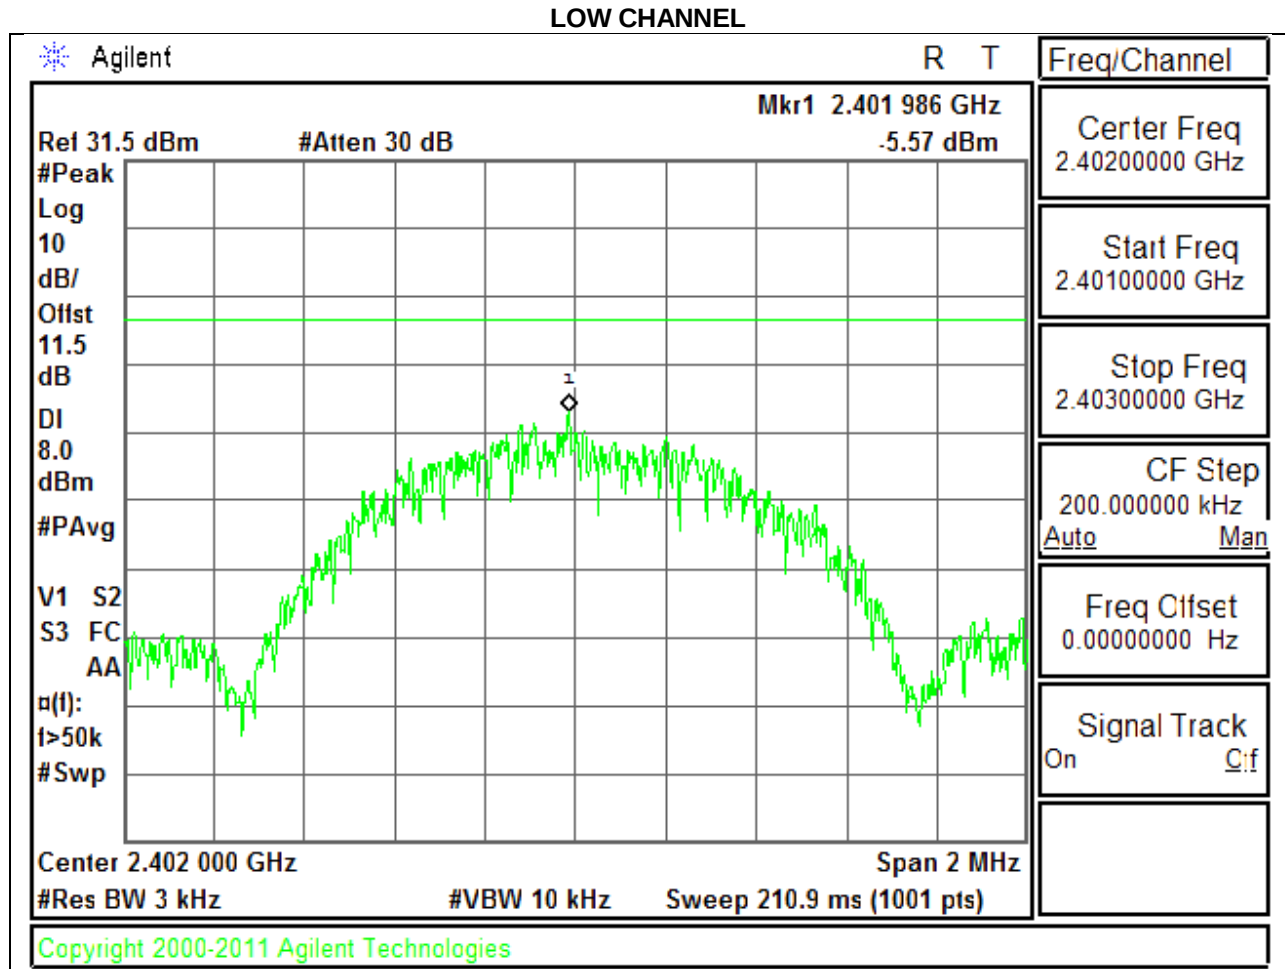

MID CHANNEL

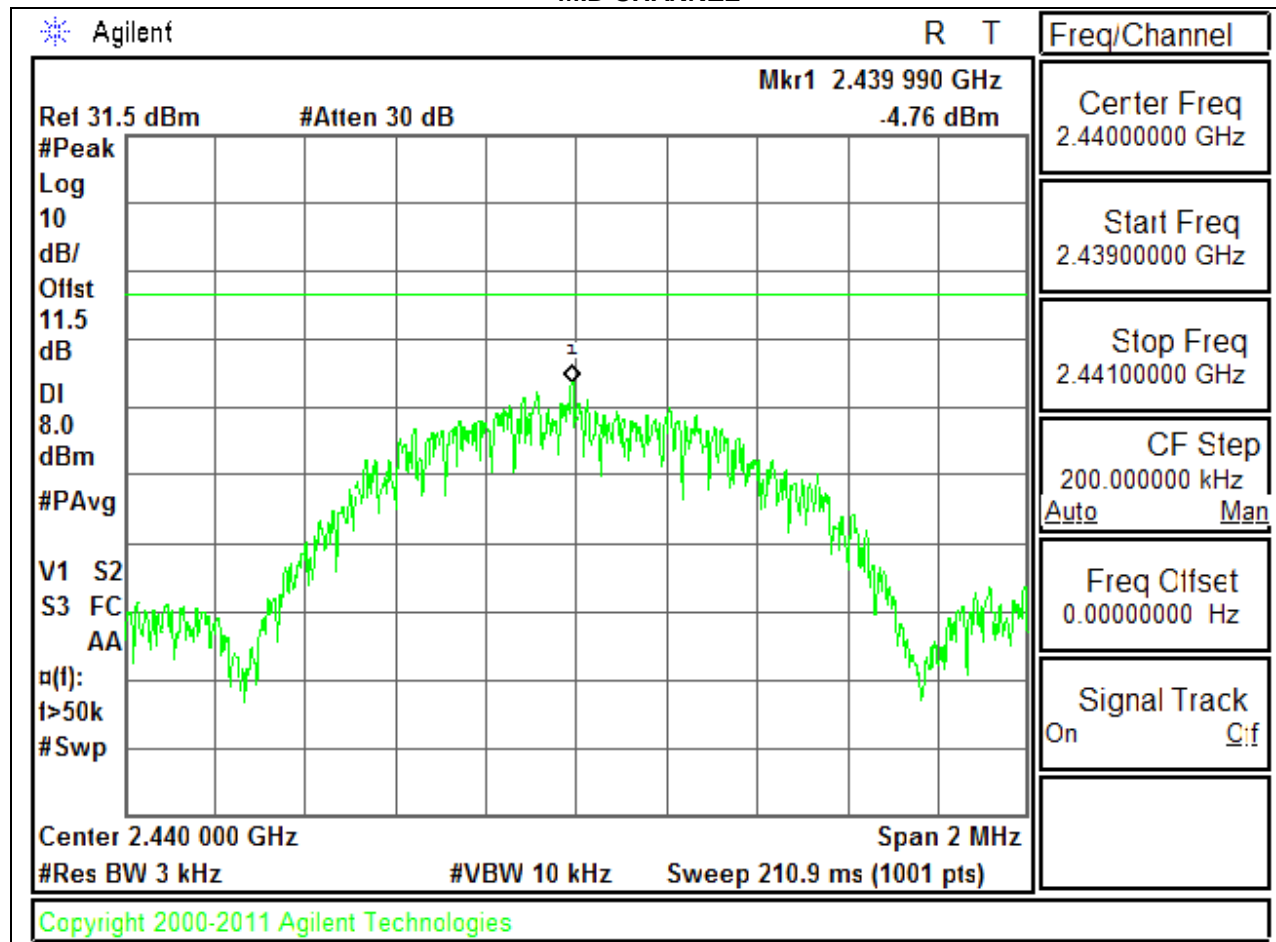

HIGH CHANNEL

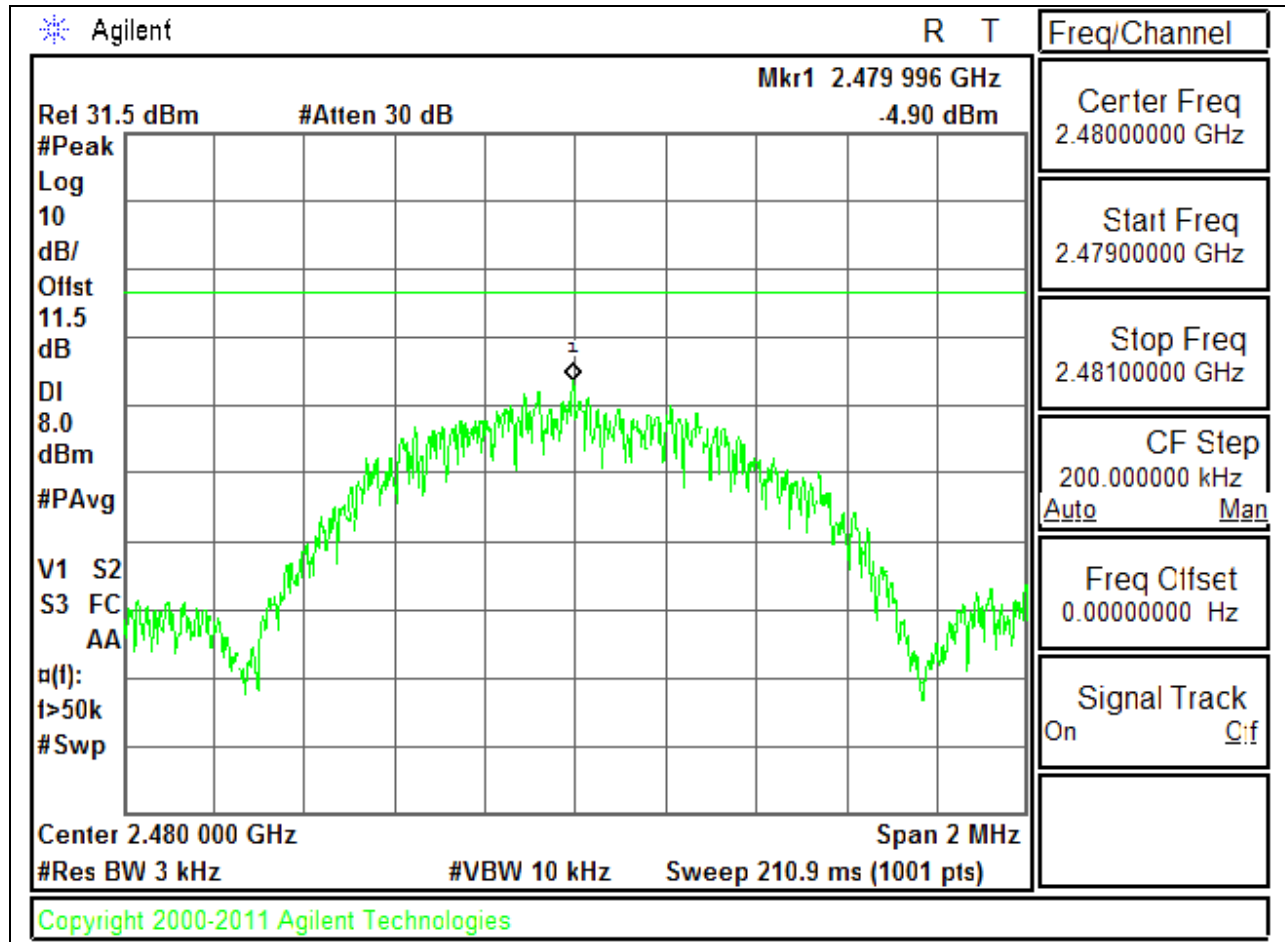

7.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.


TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

RESULTS


SPURIOUS EMISSIONS, LOW CHANNEL

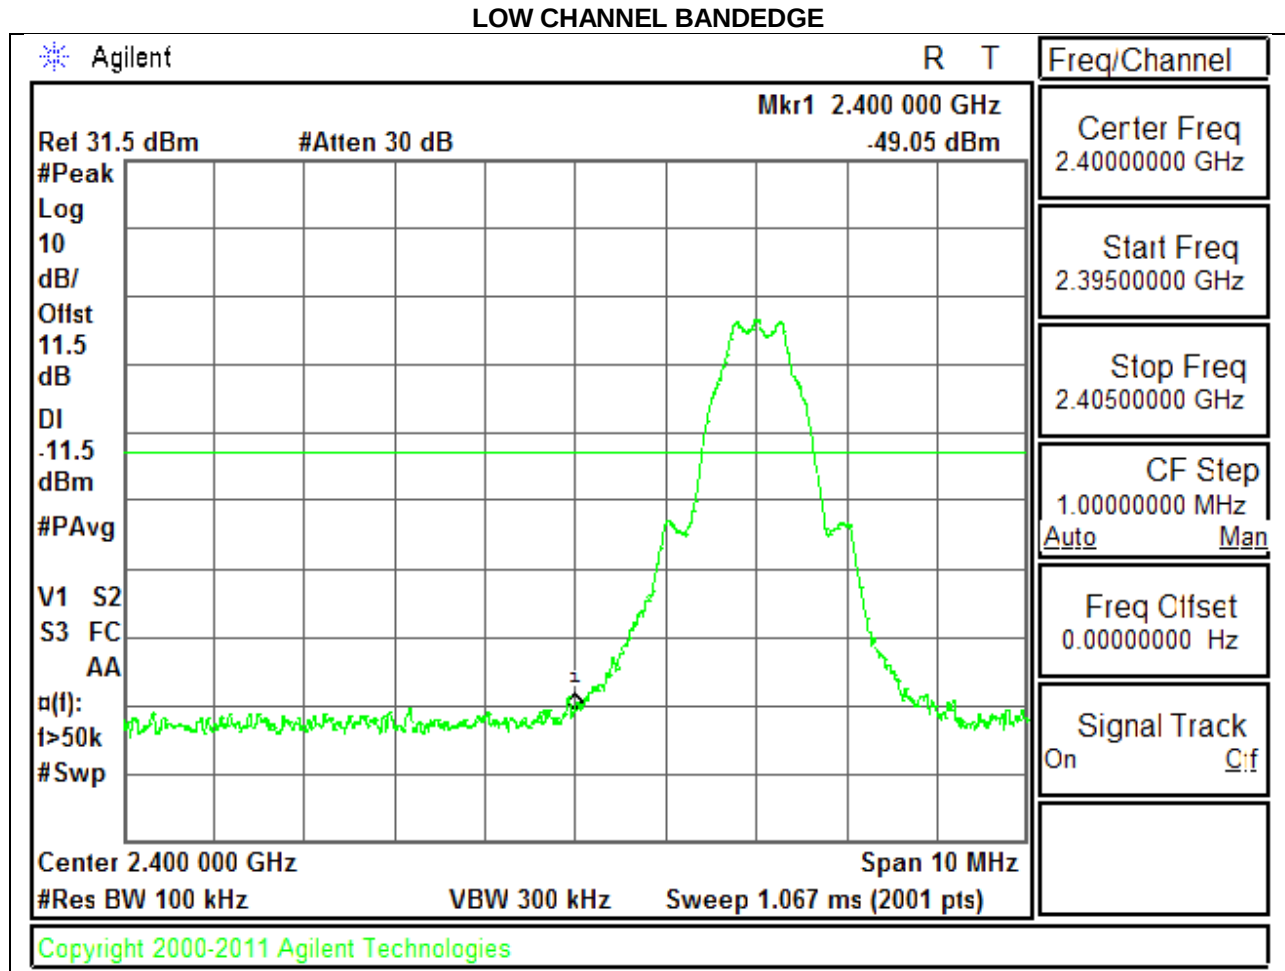


LOW CHANNEL SPURIOUS

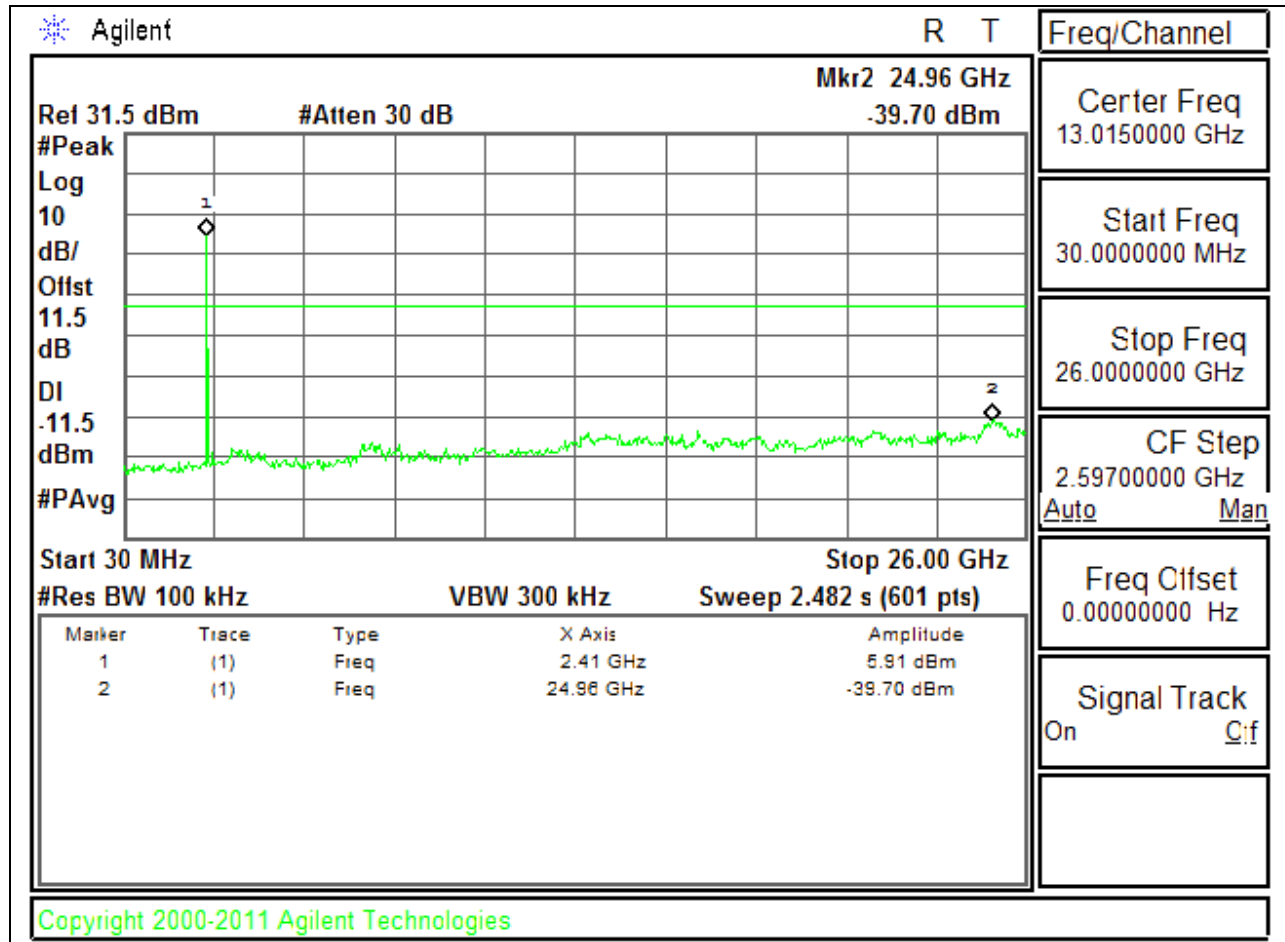


SPURIOUS EMISSIONS, MID CHANNEL

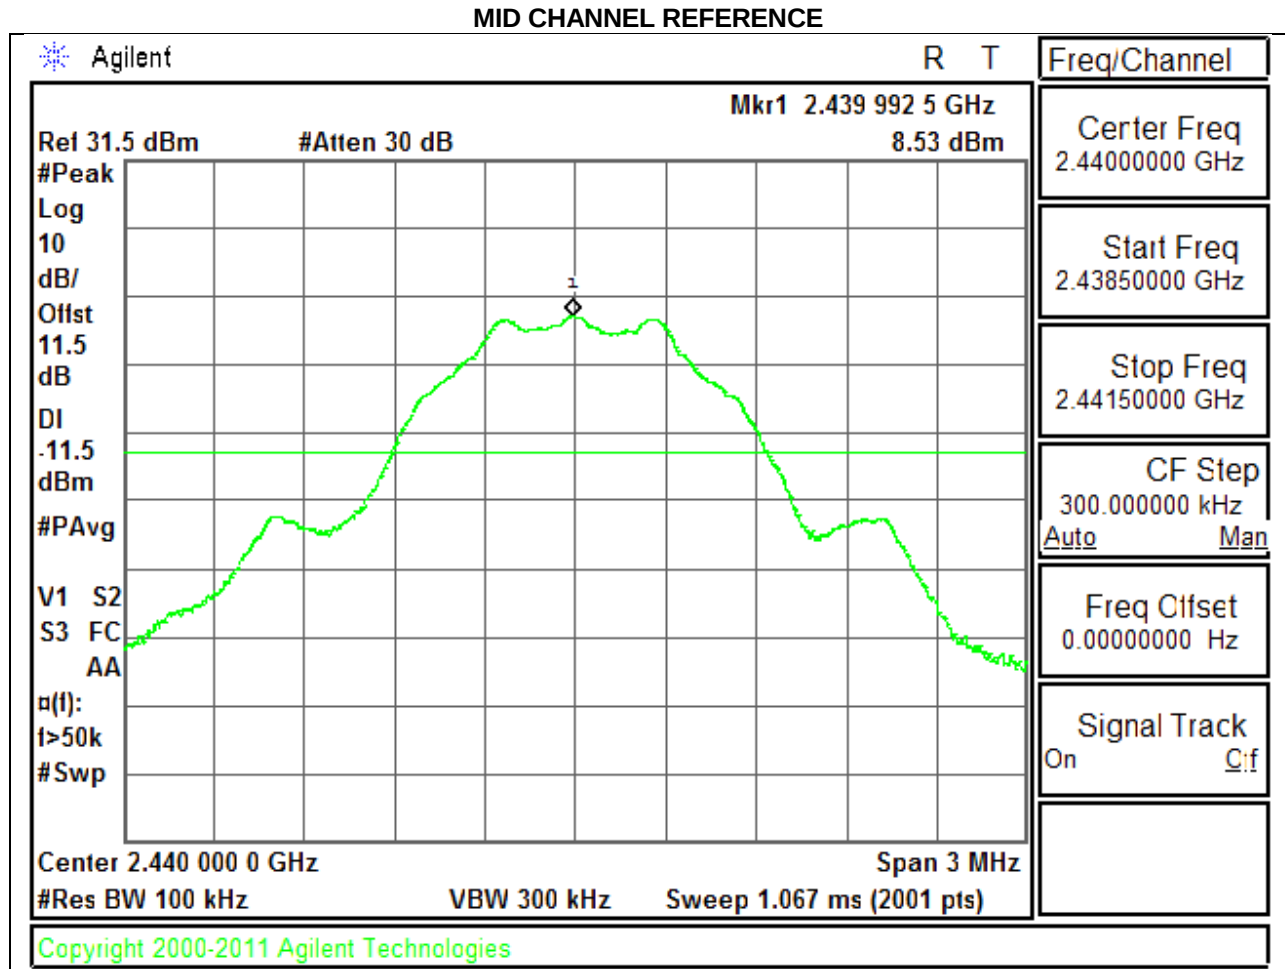


MID CHANNEL SPURIOUS

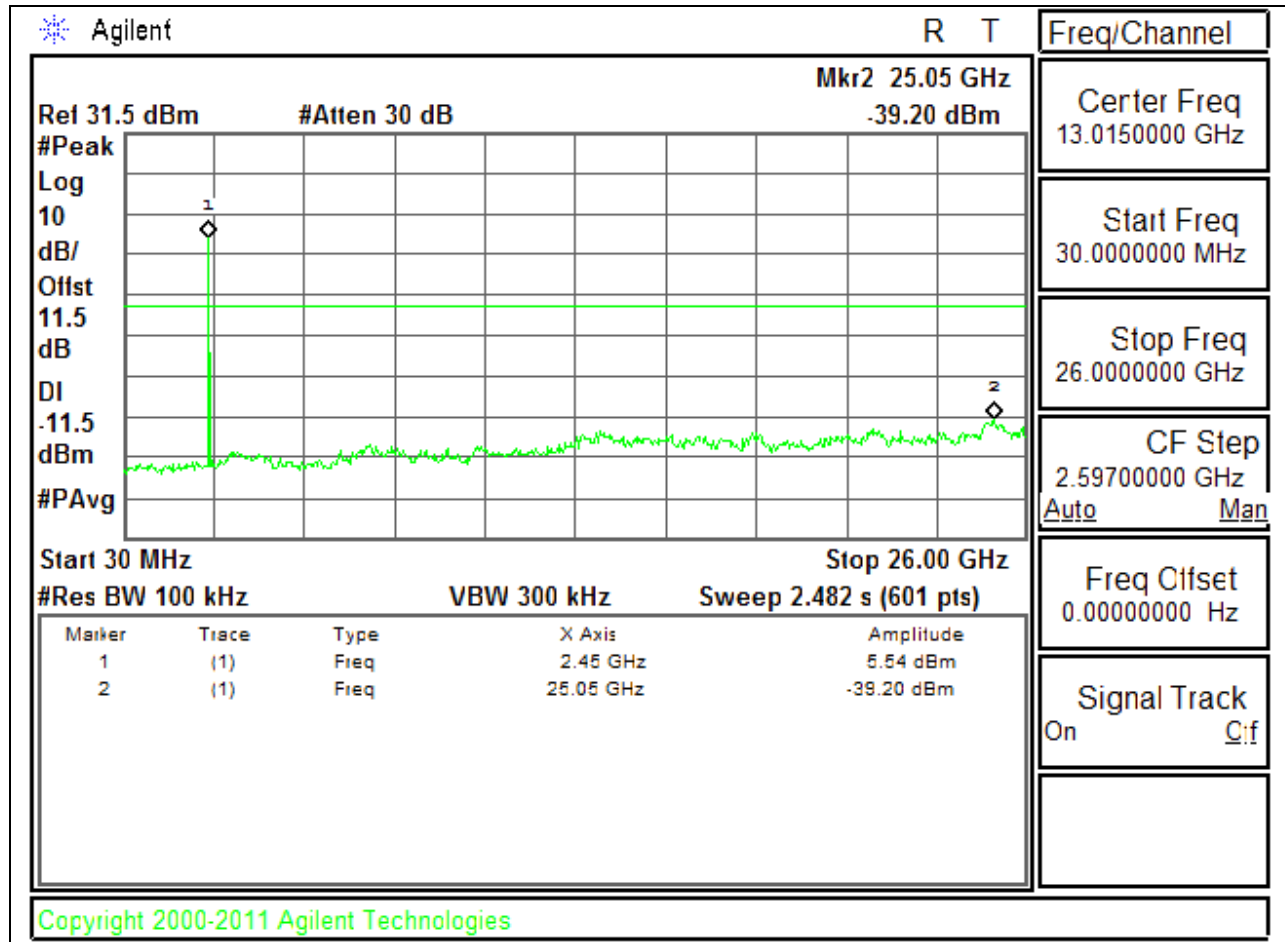

SPURIOUS EMISSIONS, HIGH CHANNEL

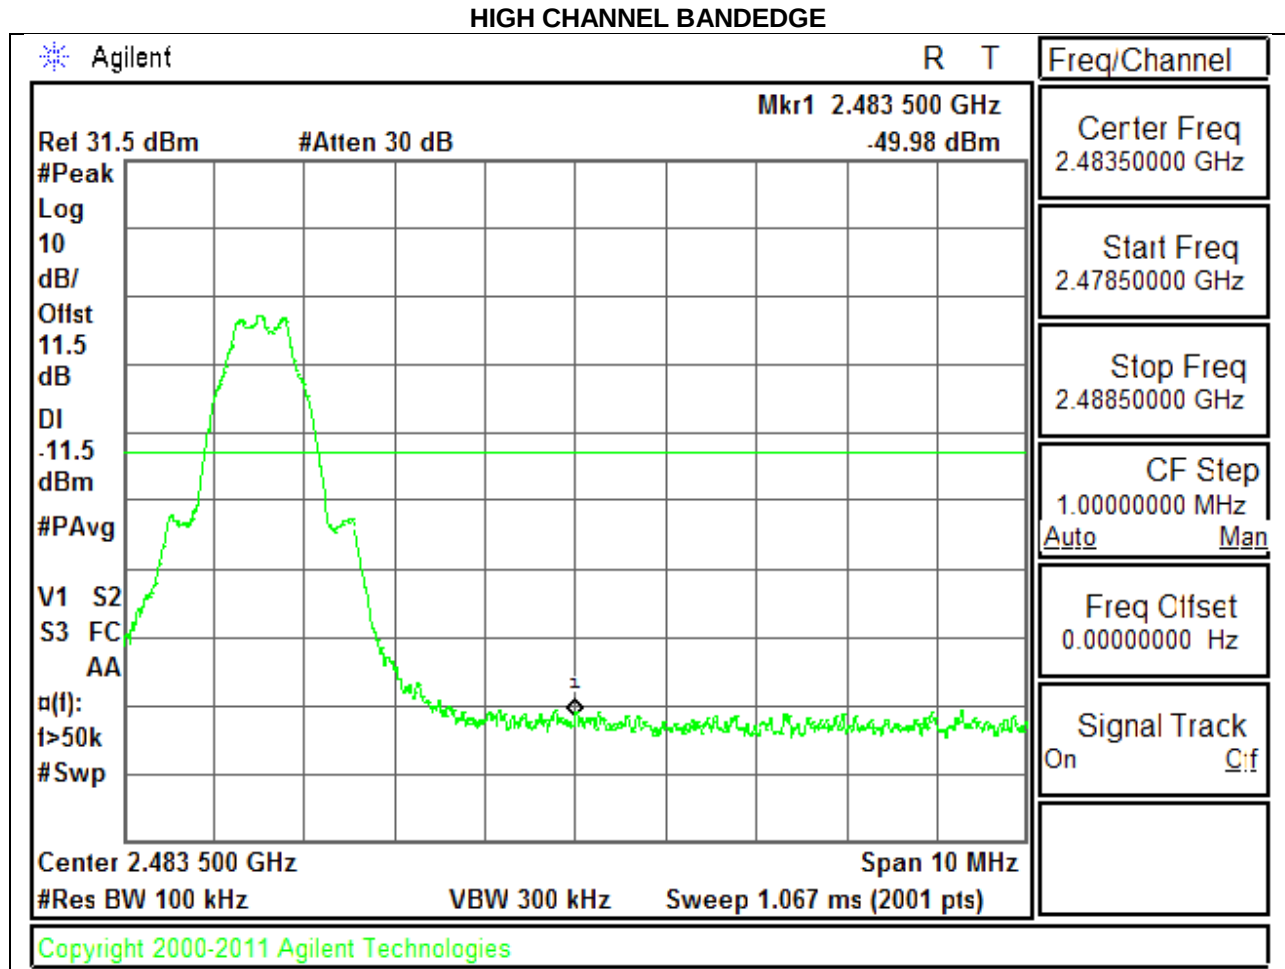

HIGH CHANNEL SPURIOUS

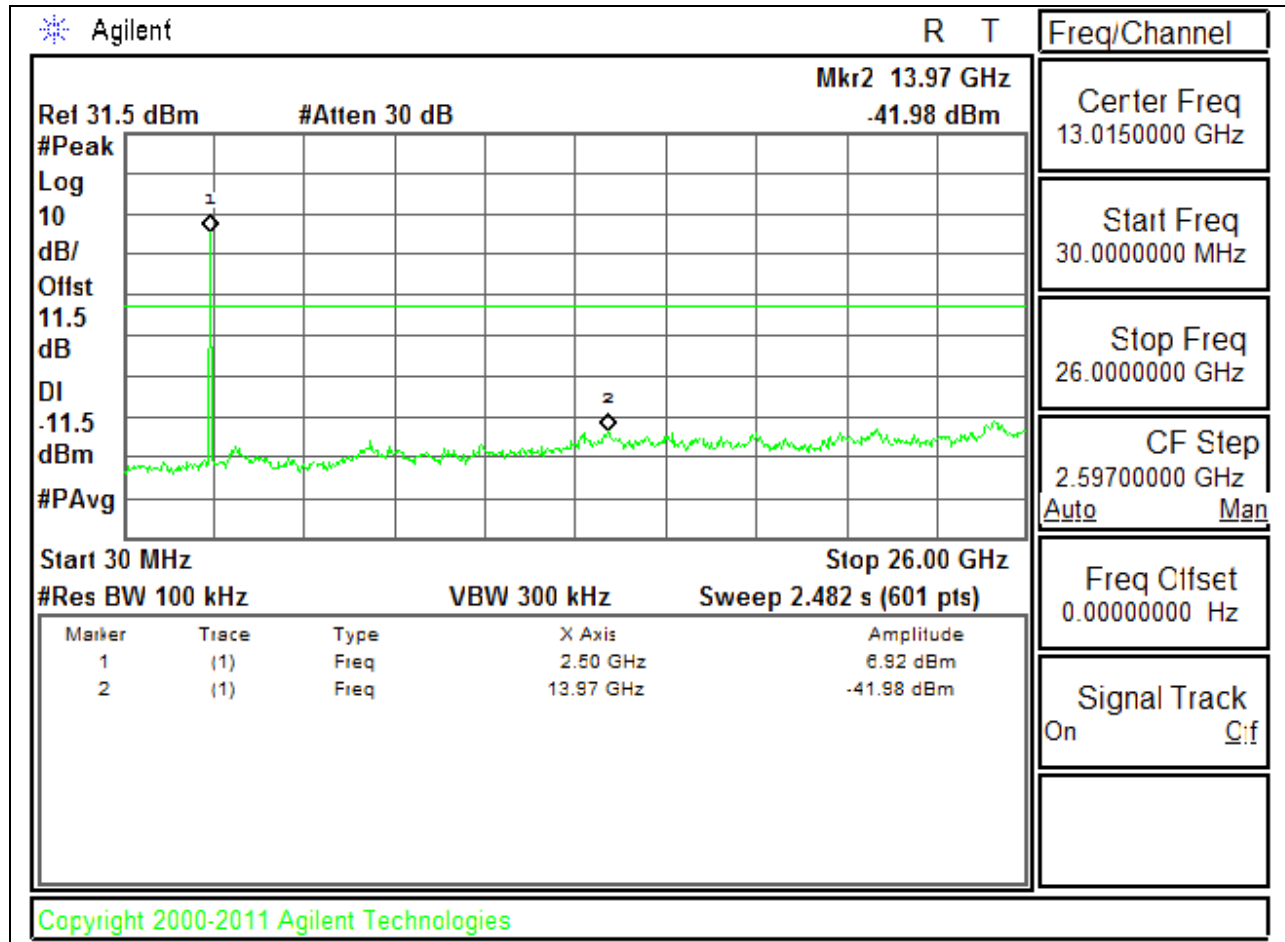

8. RADIATED TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit ($\mu\text{V/m}$) at 3 m	Field Strength Limit (dB $\mu\text{V/m}$) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4 - 2009. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and add duty cycle factor for average measurements. Duty cycle factor = $10 \log (1/x)$. For this sample: DCF = $10 \log (1/0.62) = 2.06 \text{ dB}$
(Spectrum Analyzer round it up to 2.1 dB)


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

8.2. TRANSMITTER ABOVE 1 GHz RESTRICTED BANDEDGE (LOW CHANNEL)


HORIZONTAL PEAK AND AVERAGE PLOT

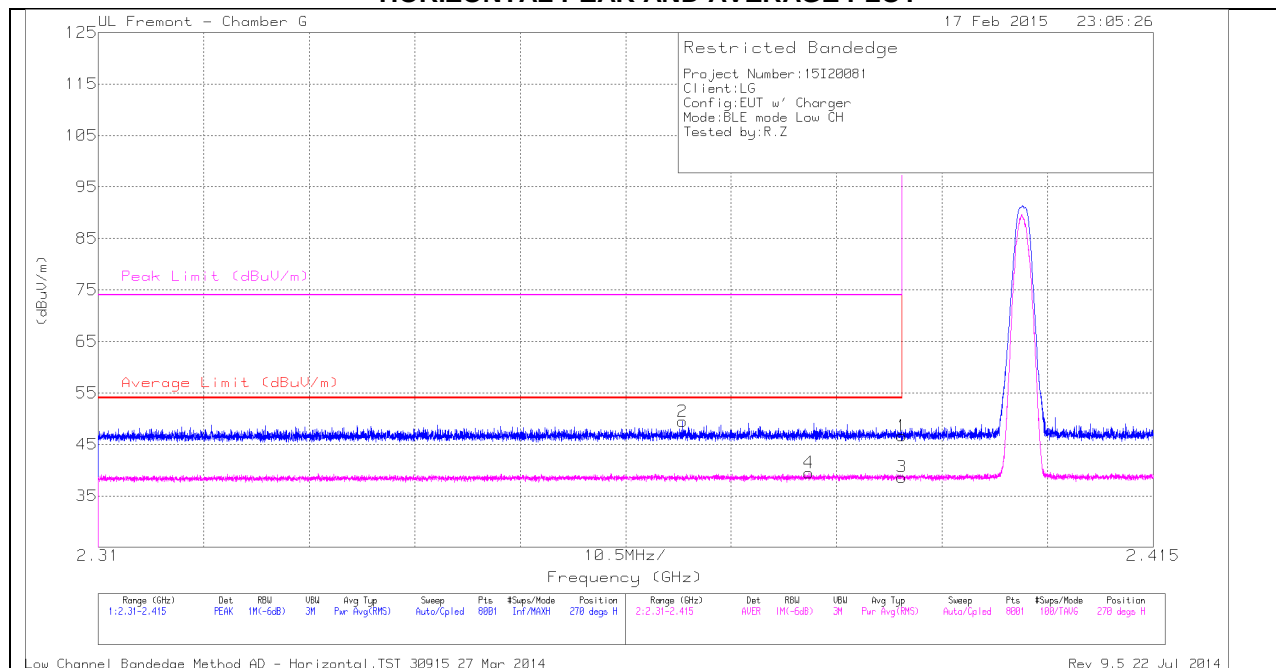

HORIZONTAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	39.75	PK	31.8	-24.9	0	46.65	-	-	74	-27.35	270	108	H
2	* 2.368	42.64	PK	31.7	-24.9	0	49.44	-	-	74	-24.56	270	108	H
3	* 2.39	29.7	RMS	31.8	-24.9	2.06	38.66	54	-15.34	-	-	270	108	H
4	* 2.381	30.53	RMS	31.8	-24.9	2.06	39.49	54	-14.51	-	-	270	108	H

VERTICAL PEAK AND AVERAGE PLOT

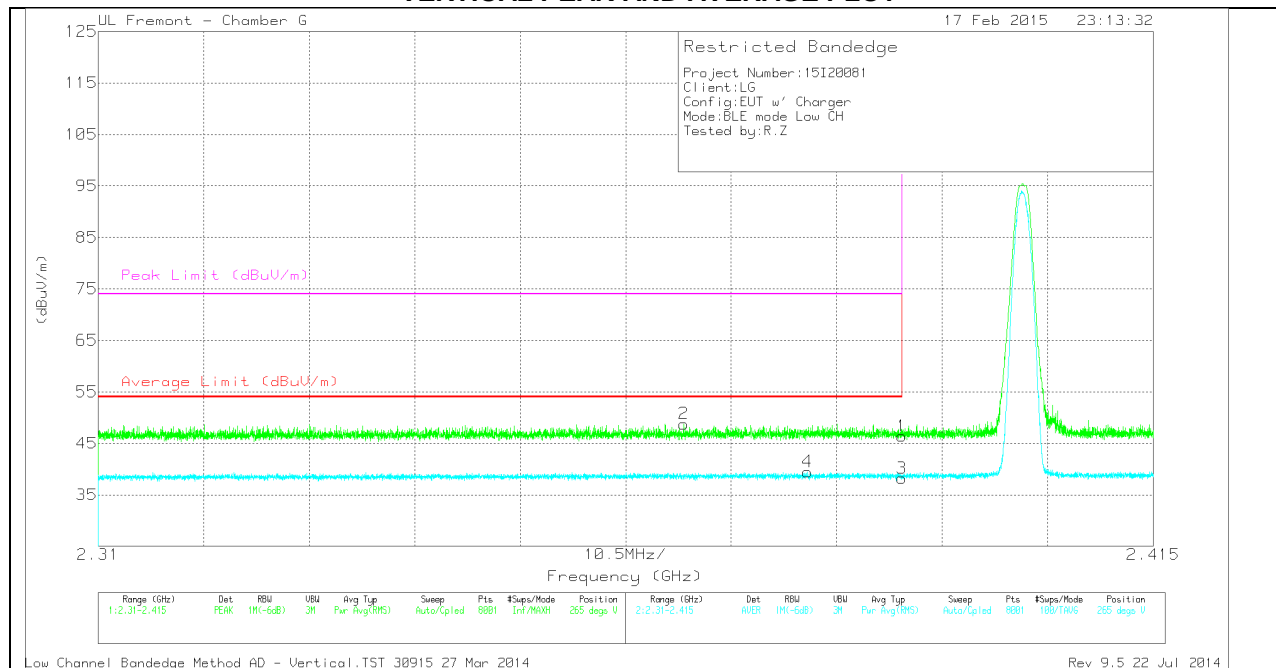


VERTICAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fitter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	39.53	PK	31.8	-24.9	0	46.43	-	-	74	-27.57	265	104	V
2	* 2.368	42	PK	31.7	-24.9	0	48.8	-	-	74	-25.2	265	104	V
3	* 2.39	29.24	RMS	31.8	-24.9	2.06	38.2	54	-15.8	-	-	265	104	V
4	* 2.381	30.53	RMS	31.8	-24.9	2.06	39.49	54	-14.51	-	-	265	104	V

AUTHORIZED BANDEDGE (HIGH CHANNEL)


HORIZONTAL PEAK AND AVERAGE PLOT

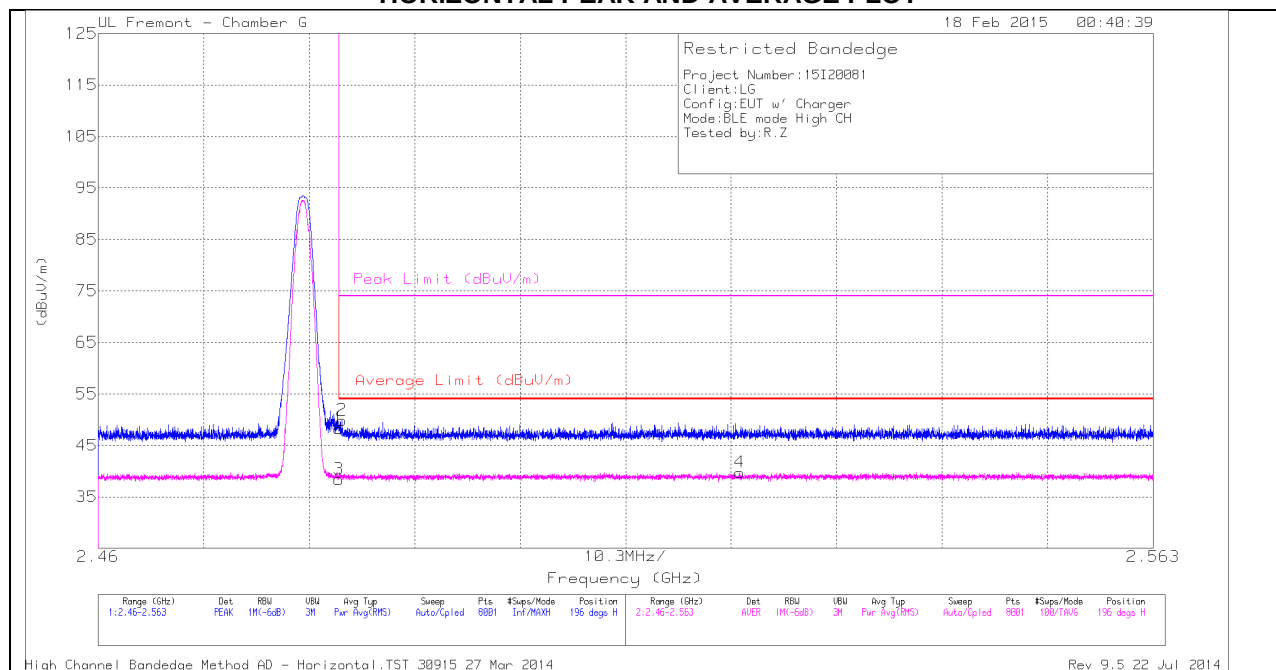

HORIZONTAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Filt r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	41.21	PK	32	-24.9	0	48.31	-	-	74	-25.69	196	103	H
2	* 2.484	42.78	PK	32	-24.9	0	49.88	-	-	74	-24.12	196	103	H
3	* 2.484	29.27	RMS	32	-24.9	2.06	38.43	54	-15.57	-	-	196	103	H
4	2.523	30.59	RMS	32	-24.9	2.06	39.75	54	-14.25	-	-	196	103	H


VERTICAL PEAK AND AVERAGE PLOT

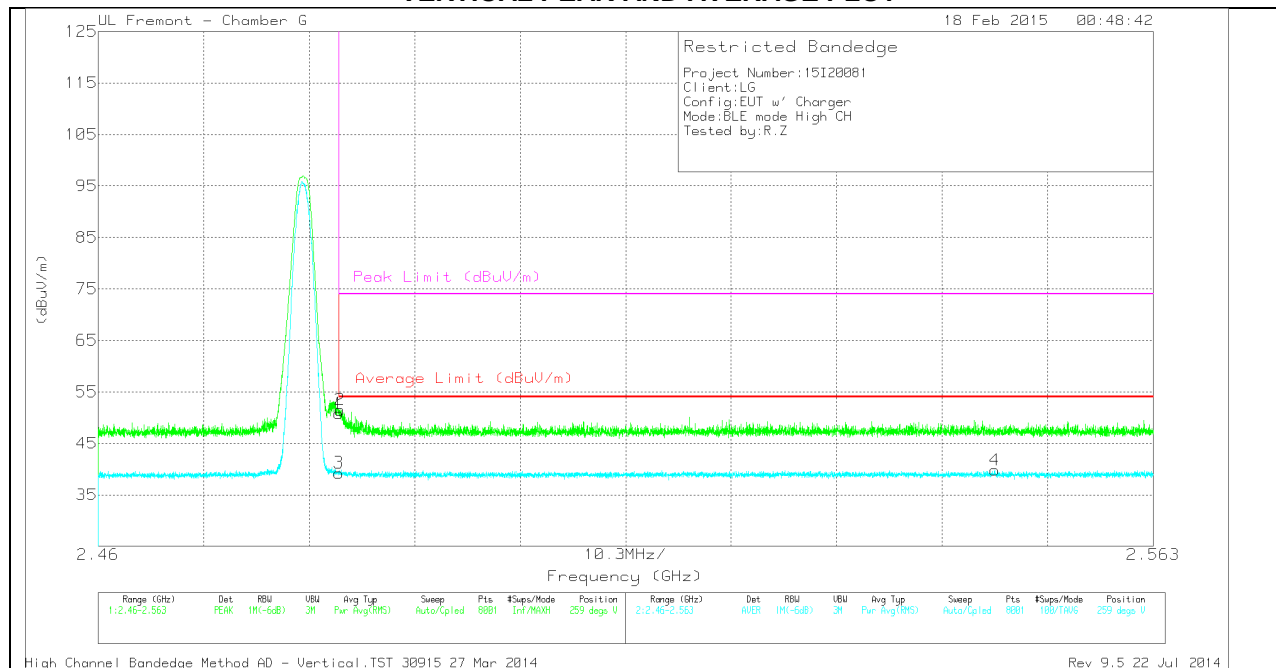

VERTICAL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fitter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	43.71	PK	32	-24.9	0	50.81	-	-	74	-23.19	259	104	V
2	* 2.484	44.41	PK	32	-24.9	0	51.51	-	-	74	-22.49	259	104	V
3	* 2.484	30.1	RMS	32	-24.9	2.06	39.26	54	-14.74	-	-	259	104	V
4	2.548	30.66	RMS	32	-24.9	2.06	39.82	54	-14.18	-	-	259	104	V

HARMONICS AND SPURIOUS EMISSIONS

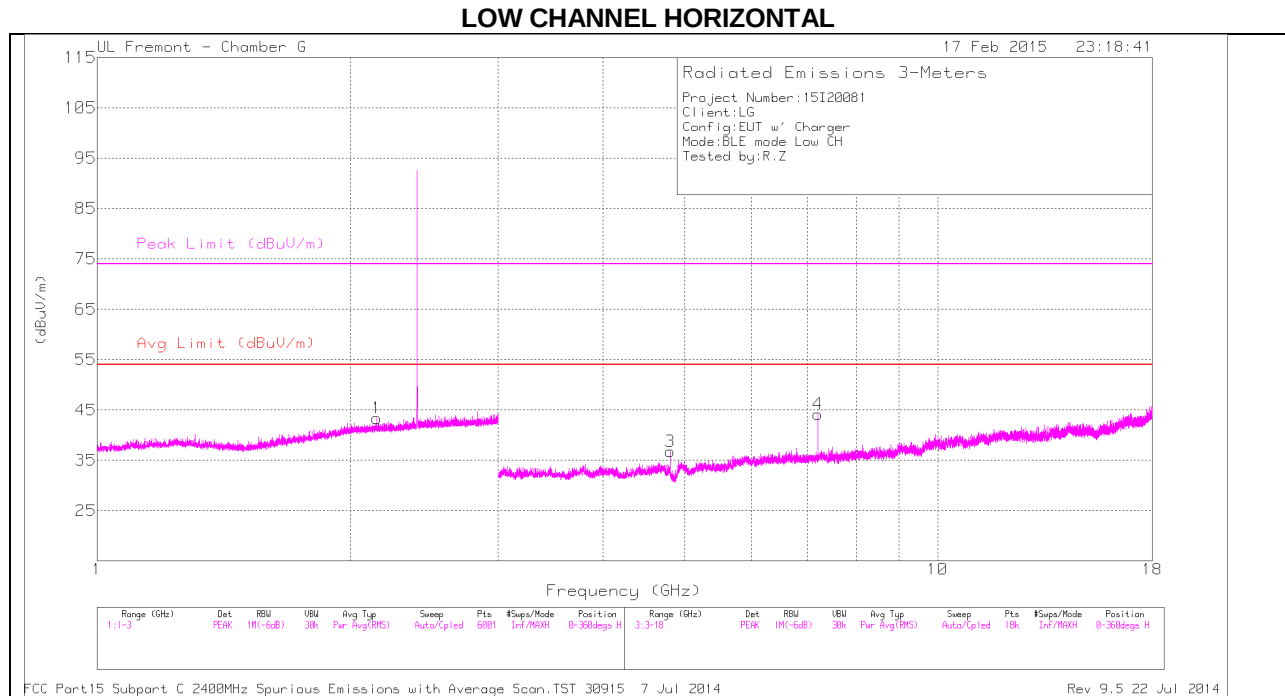

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL VERTICAL

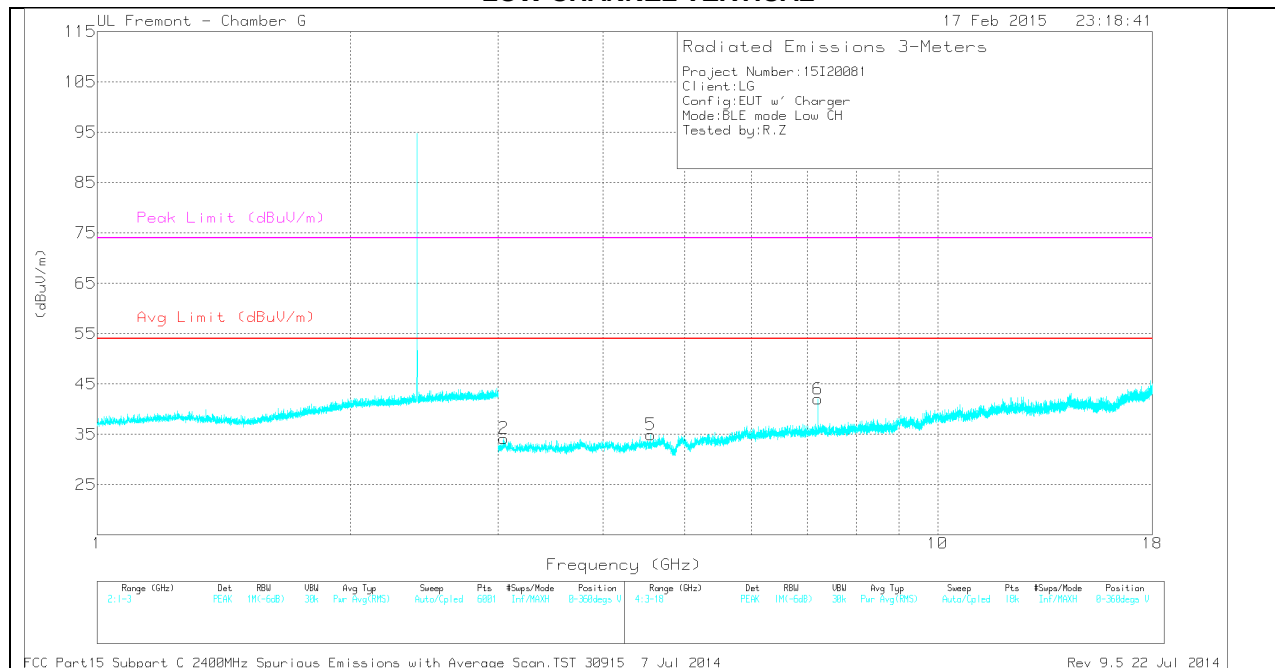

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

TRACE MARKERS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Ftr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 4.804	35.87	PK	34.1	-33.2	0	36.77	-	-	74	-37.23	0-360	101	H
5	* 4.556	34.45	PK	33.8	-33.3	0	34.95	-	-	74	-39.05	0-360	101	V
1	2.152	37.05	PK	31.4	-25.1	0	43.35	-	-	-	-	0-360	101	H
2	3.044	34.1	PK	32.5	-32.4	0	34.2	-	-	-	-	0-360	201	V
6	7.205	37.5	PK	35.6	-31.1	0	42	-	-	-	-	0-360	101	V
4	7.206	39.68	PK	35.6	-31.1	0	44.18	-	-	-	-	0-360	101	H

PK - Peak detector

RADIATED EMISSIONS


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Ftr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.804	44.5	PK2	34.1	-33.2	0	45.4	-	-	74	-28.6	358	133	H
* 4.804	35.05	MAV1	34.1	-33.2	2.06	38.01	54	-15.99	-	-	358	133	H
* 4.554	41.31	PK2	33.8	-33.3	0	41.81	-	-	74	-32.19	358	102	V
* 4.557	30.05	MAV1	33.8	-33.3	2.06	32.61	54	-21.39	-	-	358	102	V

MID CHANNEL HORIZONTAL

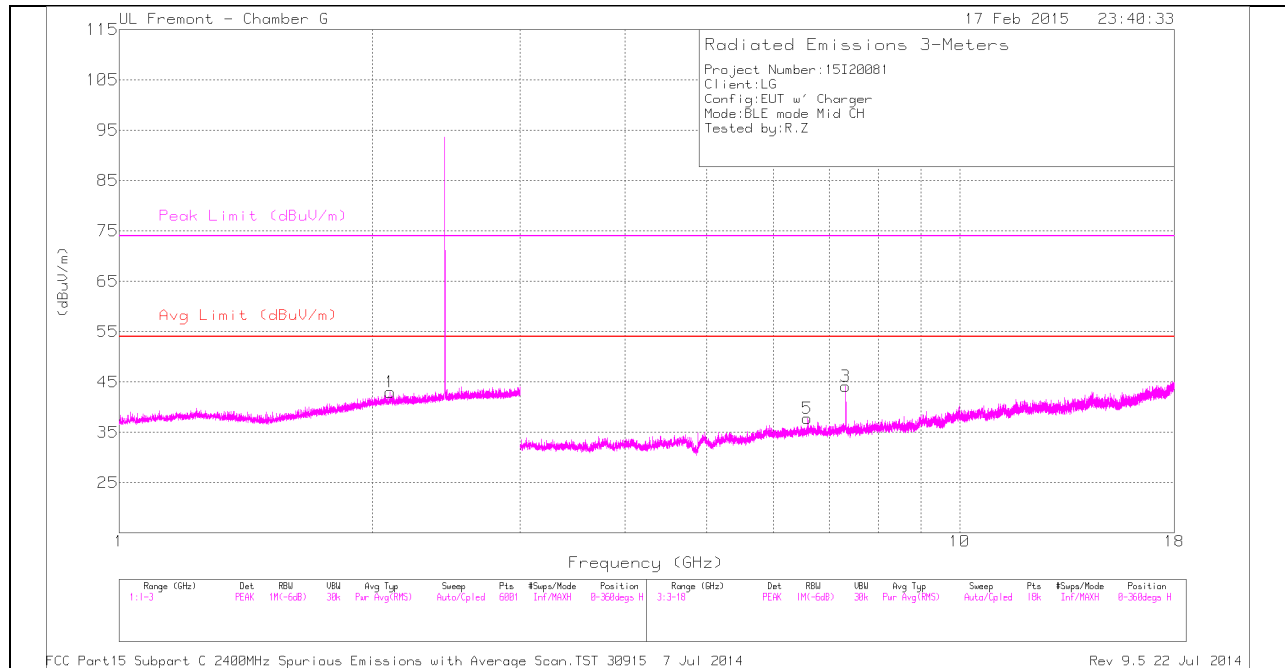

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL VERTICAL

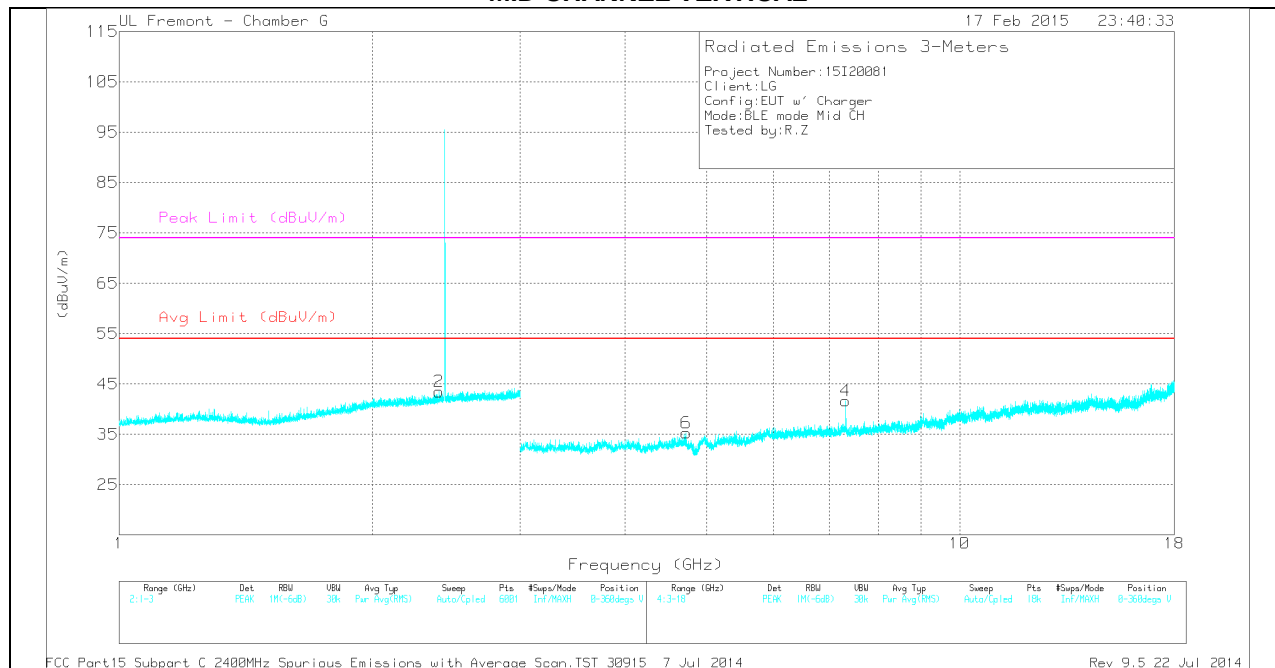

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

TRACE MARKERS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fitr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 7.319	39.62	PK	35.6	-31.1	0	44.12	-	-	74	-29.88	0-360	201	H
4	* 7.319	37.12	PK	35.6	-31.1	0	41.62	-	-	74	-32.38	0-360	101	V
6	* 4.728	34.39	PK	34.1	-33.2	0	35.29	-	-	74	-38.71	0-360	201	V
1	2.102	36.68	PK	31.4	-25.1	0	42.98	-	-	-	-	0-360	102	H
2	2.402	36.59	PK	31.8	-24.9	0	43.49	-	-	-	-	0-360	101	V
5	6.589	33.65	PK	35.6	-31.5	0	37.75	-	-	-	-	0-360	101	H

PK - Peak detector

RADIATED EMISSIONS


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fitr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 7.321	39.85	PK2	35.6	-31.1	0	44.35	-	-	74	-29.65	360	202	H
* 7.32	29.28	MAV1	35.6	-31.1	2.06	35.84	54	-18.16	-	-	360	202	H
* 7.319	43.31	PK2	35.6	-31.1	0	47.81	-	-	74	-26.19	81	137	V
* 7.32	33.48	MAV1	35.6	-31.1	2.06	40.04	54	-13.96	-	-	81	137	V
* 4.727	41.25	PK2	34.1	-33.2	0	42.15	-	-	74	-31.85	81	202	V
* 4.726	30.26	MAV1	34.1	-33.2	2.06	33.22	54	-20.78	-	-	81	202	V

HIGH CHANNEL HORIZONTAL

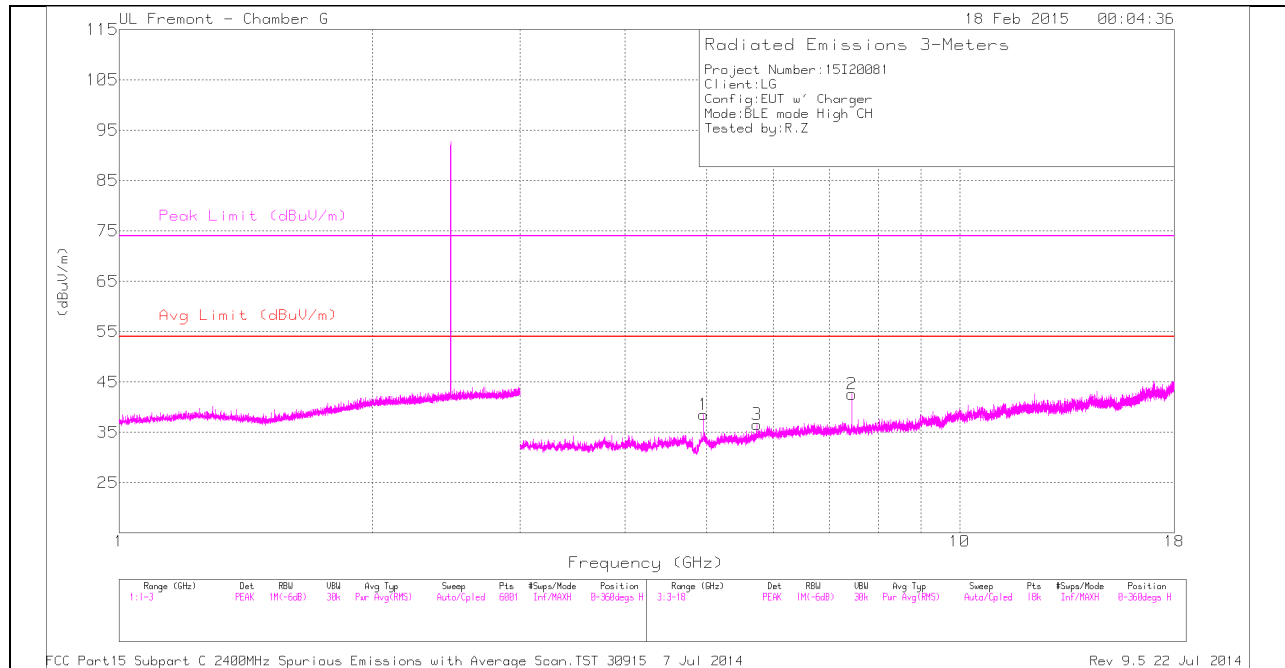

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL VERTICAL

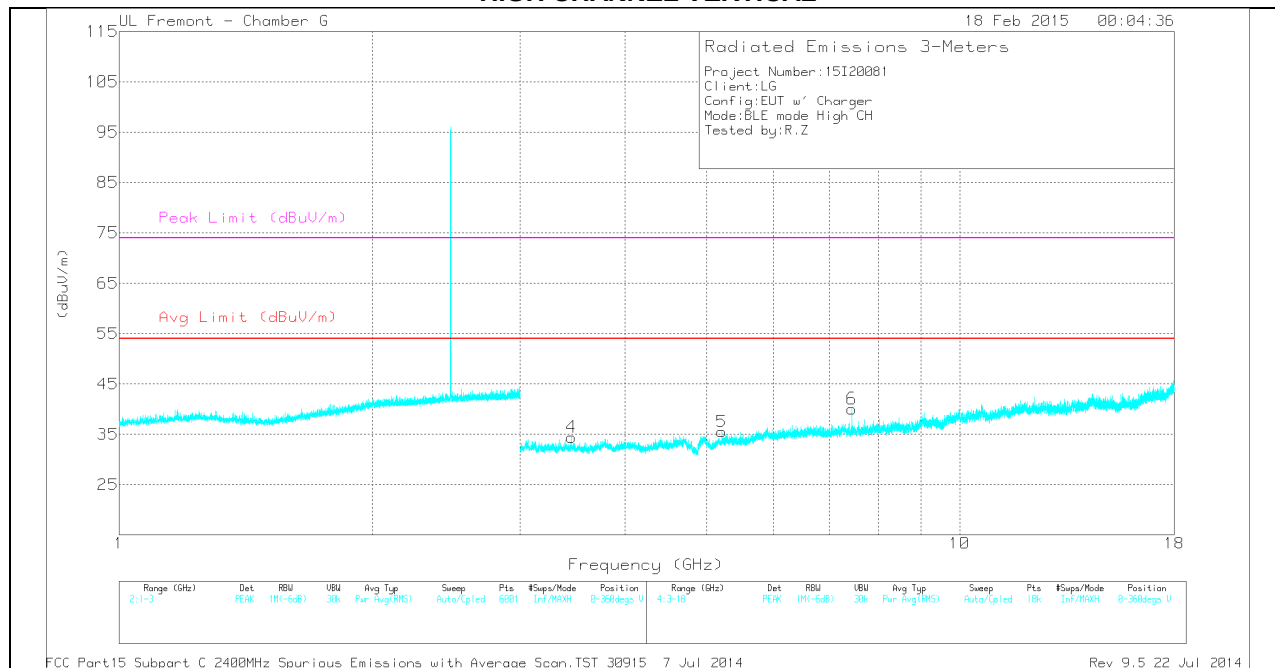

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Ftr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.96	37.3	PK	34.1	-32.9	0	38.5	-	-	74	-35.5	0-360	101	H
2	* 7.441	38.41	PK	35.6	-31.4	0	42.61	-	-	74	-31.39	0-360	101	H
6	* 7.44	35.85	PK	35.6	-31.4	0	40.05	-	-	74	-33.95	0-360	101	V
4	3.452	34.65	PK	32.8	-33	0	34.45	-	-	-	-	0-360	201	V
5	5.211	34.43	PK	34.4	-33.3	0	35.53	-	-	-	-	0-360	101	V
3	5.739	34.16	PK	34.8	-32.4	0	36.56	-	-	-	-	0-360	101	H

PK - Peak detector


RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Ftr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.961	43.93	PK2	34.1	-32.9	0	45.13	-	-	74	-28.87	348	106	H
* 4.96	34.15	MAV1	34.1	-32.9	2.06	37.41	54	-16.59	-	-	348	106	H
* 7.441	45.7	PK2	35.6	-31.4	0	49.9	-	-	74	-24.1	49	276	H
* 7.439	37.76	MAV1	35.6	-31.4	2.06	44.02	54	-9.98	-	-	49	276	H
* 7.44	42.64	PK2	35.6	-31.4	0	46.84	-	-	74	-27.16	87	147	V
* 7.439	33.18	MAV1	35.6	-31.4	2.06	39.44	54	-14.56	-	-	87	147	V


8.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

HORIZONTAL PLOT

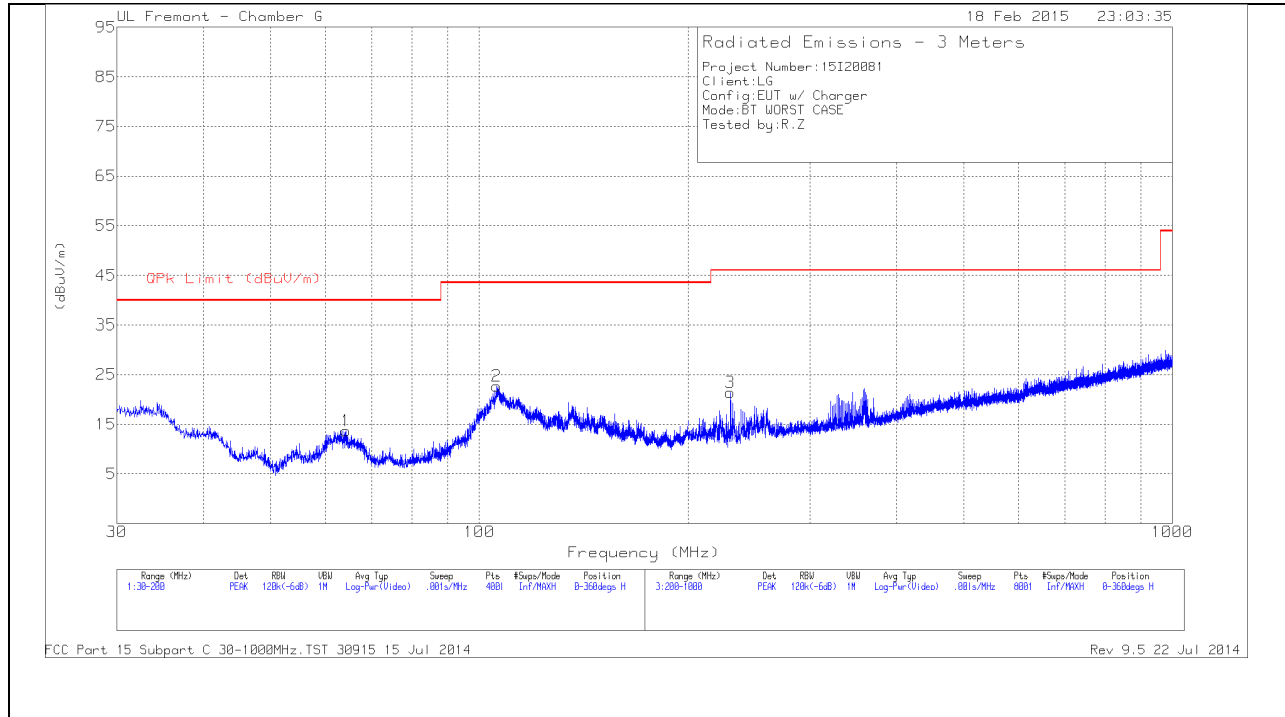

VERTICAL PLOT

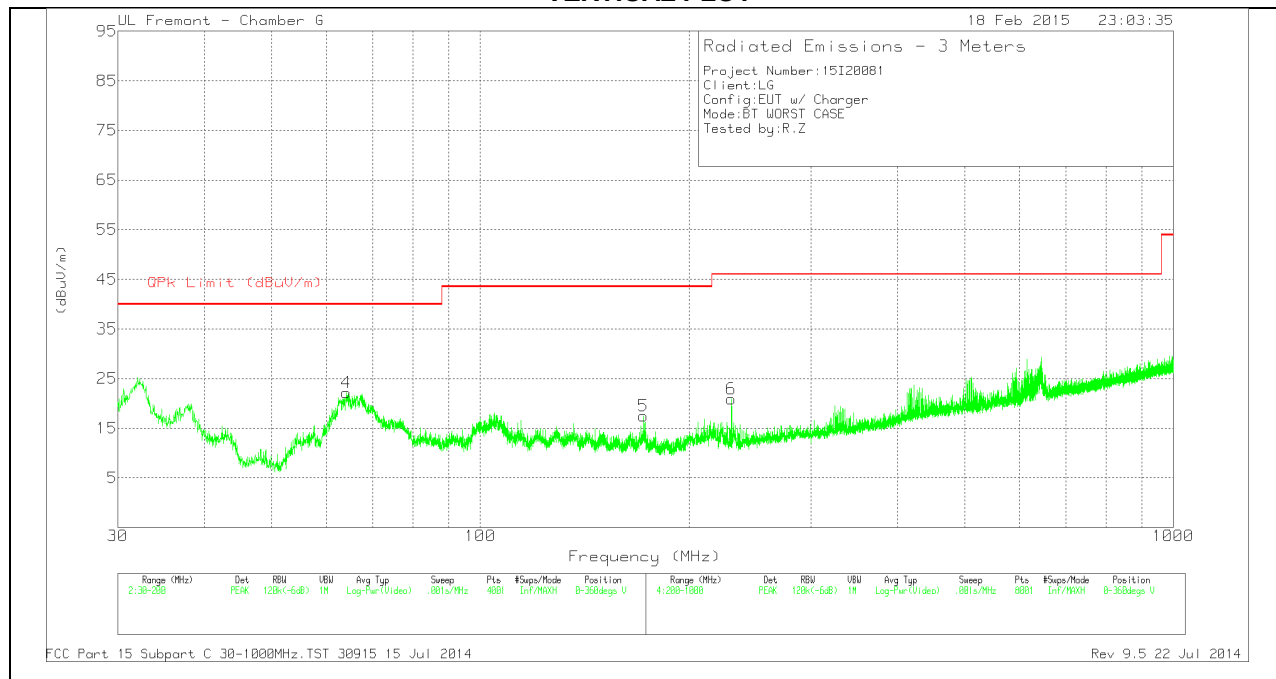

BELOW 1 GHz TABLE

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Hybrid	Amp Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 171.865	32.54	PK	14.8	-29.9	17.44	43.52	-26.08	0-360	100	V
4	64.1275	41.83	PK	11.1	-30.8	22.13	40	-17.87	0-360	100	V
1	64.17	33.42	PK	11.1	-30.8	13.72	40	-26.28	0-360	401	H
2	106.0325	38.45	PK	14.7	-30.5	22.65	43.52	-20.87	0-360	301	H
3	230.4	36.8	PK	14	-29.4	21.4	46.02	-24.62	0-360	100	H
6	230.4	36.36	PK	14	-29.4	20.96	46.02	-25.06	0-360	100	V

PK - Peak detector

9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.


TEST PROCEDURE

ANSI C63.4 - 2009

RESULTS

6 WORST EMISSIONS

LINE 1 PLOT

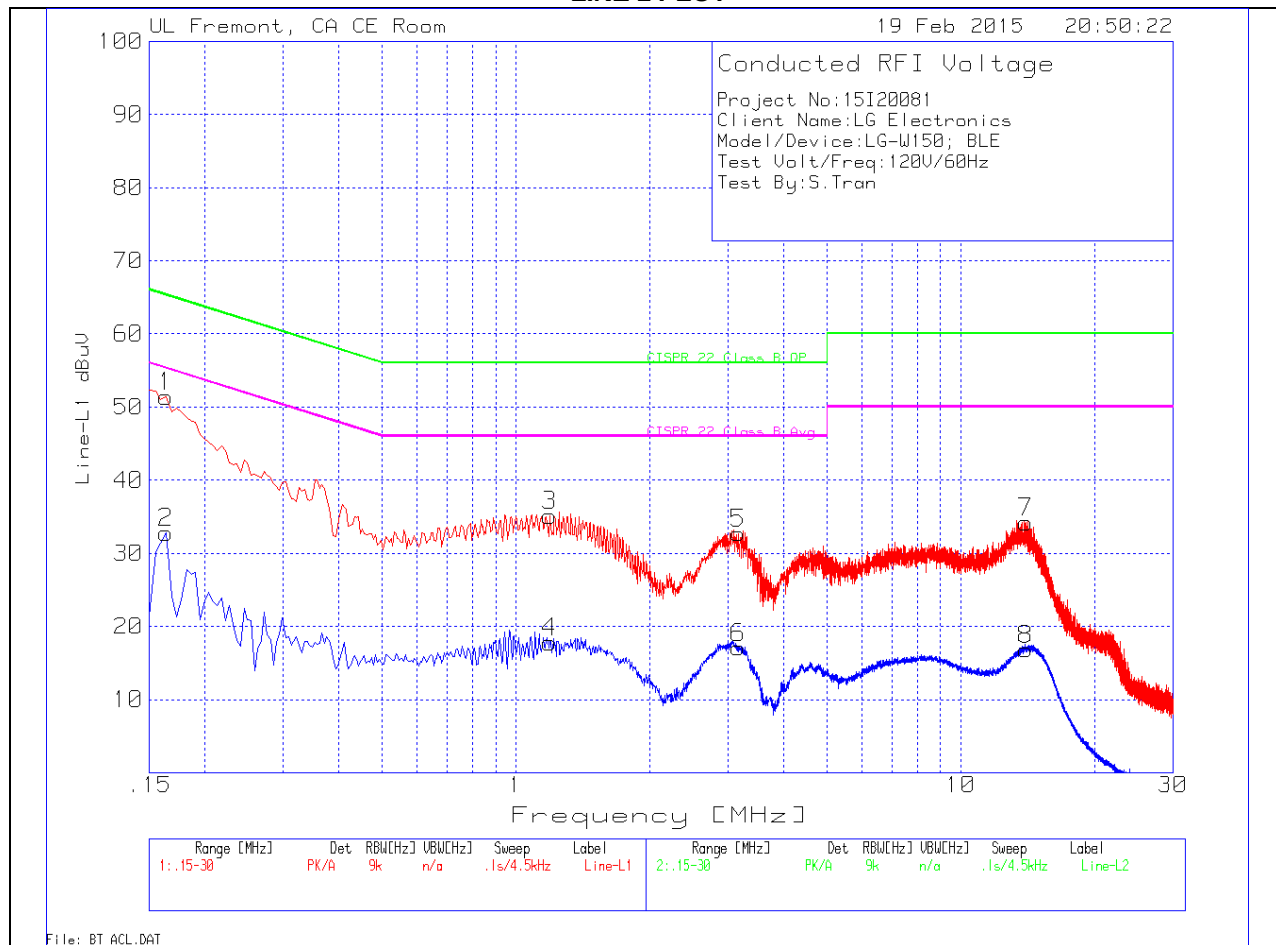


LINE 1 RESULTS

Line-L1 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
1	.1635	50.26	PK	1.2	0	51.46	65.3	-13.84	-	-
2	.1635	31.57	Av	1.2	0	32.77	-	-	55.3	-22.53
3	1.1895	34.84	PK	.2	.1	35.14	56	-20.86	-	-
4	1.1895	17.5	Av	.2	.1	17.8	-	-	46	-28.2
5	3.165	32.44	PK	.2	.1	32.74	56	-23.26	-	-
6	3.165	16.81	Av	.2	.1	17.11	-	-	46	-28.89
7	13.983	33.83	PK	.2	.2	34.23	60	-25.77	-	-
8	13.983	16.45	Av	.2	.2	16.85	-	-	50	-33.15

LINE 2 PLOT

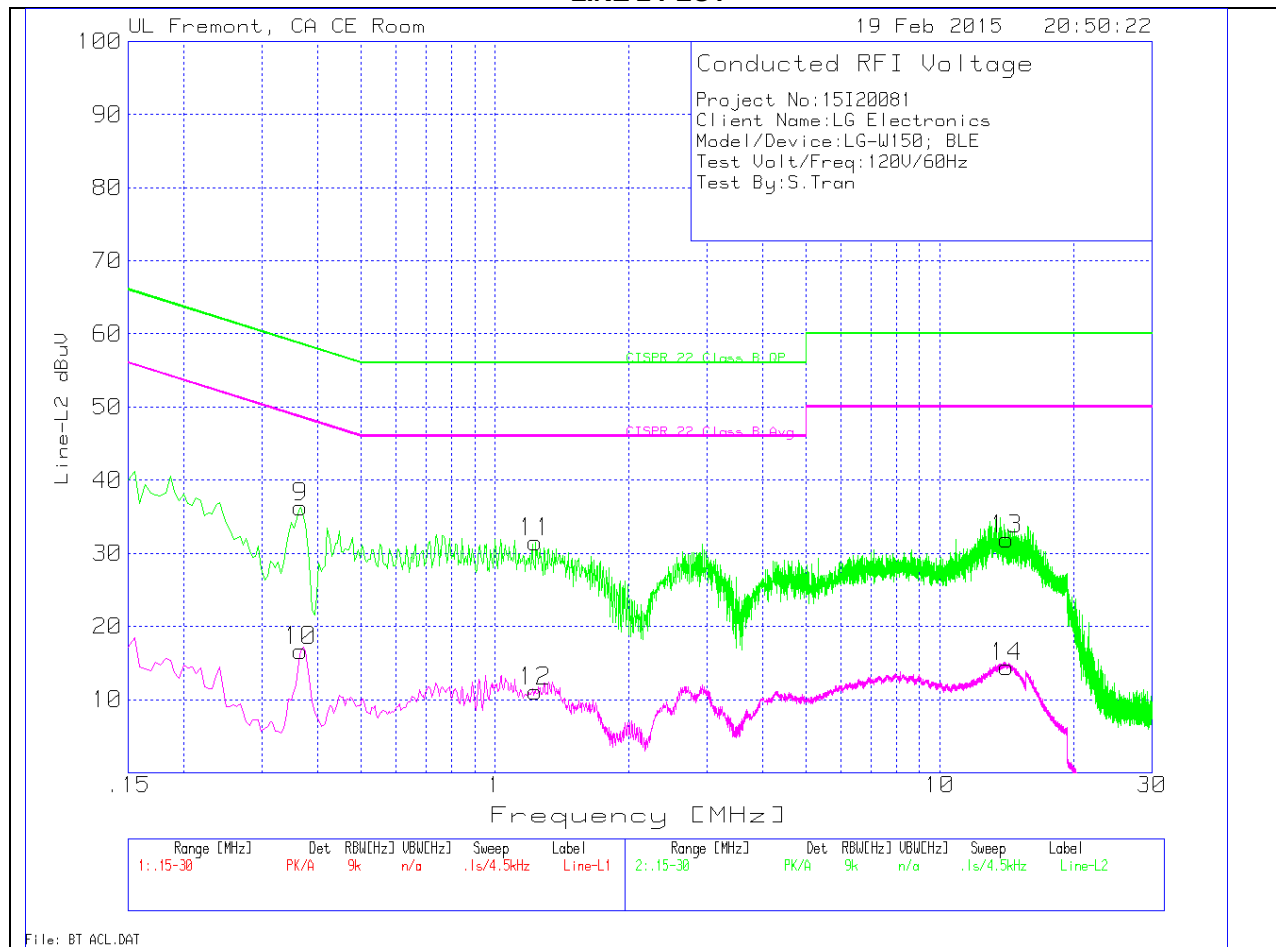

LINE 2 RESULTS

Line-L2 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
9	.366	35.78	PK	.5	0	36.28	58.6	-22.32	-	-
10	.366	16.2	Av	.5	0	16.7	-	-	48.6	-31.9
11	1.2345	31.22	PK	.2	.1	31.52	56	-24.48	-	-
12	1.2345	10.79	Av	.2	.1	11.09	-	-	46	-34.91
13	14.1585	31.5	PK	.2	.2	31.9	60	-28.1	-	-
14	14.1585	14.05	Av	.2	.2	14.45	-	-	50	-35.55