

| <b>FCC TEST REPORT</b><br><b>FCC 47 CFR Part 15C</b><br><b>Industry Canada RSS-210</b><br><b>Digital transmission systems operating within the 2400 – 2483.5 MHz band</b> |                                                                                                                                                                                                                                                                                                                          |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Report Reference No.</b> .....                                                                                                                                         | G0M-1310-3347-TFC247Z-V01                                                                                                                                                                                                                                                                                                |
| <b>Testing Laboratory</b> .....                                                                                                                                           | Eurofins Product Service GmbH                                                                                                                                                                                                                                                                                            |
| <b>Address</b> .....                                                                                                                                                      | Storkower Str. 38c<br>15526 Reichenwalde<br>Germany                                                                                                                                                                                                                                                                      |
| <b>Accreditation</b> .....                                                                                                                                                |  <br>A2LA Accredited Testing Laboratory, Certificate No.: 1983.01<br>FCC Filed Test Laboratory, Reg.-No.: 96970<br>IC OATS Filing assigned code: 3470A |
| <b>Applicant's name</b> .....                                                                                                                                             | Saxonar GmbH                                                                                                                                                                                                                                                                                                             |
| <b>Address</b> .....                                                                                                                                                      | Hauptstr. 54<br>02906 Waldhufen OT Nieder Seifersdorf<br>GERMANY                                                                                                                                                                                                                                                         |
| <b>Test specification:</b>                                                                                                                                                |                                                                                                                                                                                                                                                                                                                          |
| <b>Standard</b> .....                                                                                                                                                     | 47 CFR Part 15C<br>KDB Publication No. 558074<br>RSS-210, Issue 8, 2010-12<br>RSS-Gen, Issue 3, 2010-12<br>ANSI C63.4:2009                                                                                                                                                                                               |
| <b>Equipment under test (EUT):</b>                                                                                                                                        |                                                                                                                                                                                                                                                                                                                          |
| Product description                                                                                                                                                       | powermeter for bicycle                                                                                                                                                                                                                                                                                                   |
| Model No.                                                                                                                                                                 | power2max / P0004-7-C                                                                                                                                                                                                                                                                                                    |
| Hardware version                                                                                                                                                          | BG0004-7-C                                                                                                                                                                                                                                                                                                               |
| Firmware / Software version                                                                                                                                               | None                                                                                                                                                                                                                                                                                                                     |
|                                                                                                                                                                           | FCC-ID: ZQ2-P0004-7-C      IC: 9766A-P000407C                                                                                                                                                                                                                                                                            |
| <b>Test result</b>                                                                                                                                                        | <b>Passed</b>                                                                                                                                                                                                                                                                                                            |

**Possible test case verdicts:**

- neither assessed nor tested .....: N/N
- required by standard but not appl. to test object.....: N/A
- required by standard but not tested.....: N/T
- not required by standard for the test object .....: N/R
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement.....: F (Fail)

**Testing:**

Date of receipt of test item .....: 2013-12-11

Date (s) of performance of tests .....: 2013-12-11

Compiled by .....: Antje Bartusch

Tested by (+ signature).....: Wilfried Treffke

.....*W. Treffke*.....

Approved by (+ signature) .....: Christian Weber

.....*C. Weber*.....

Date of issue .....: 2014-01-10

Total number of pages.....: 50

**General remarks:**

**The test results presented in this report relate only to the object tested.**

**The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.**

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

**Additional comments:**

---

## Version History

| Version | Issue Date | Remarks         | Revised by |
|---------|------------|-----------------|------------|
| 01      | 2014-01-10 | Initial Release |            |

## REPORT INDEX

|          |                                                              |           |
|----------|--------------------------------------------------------------|-----------|
| <b>1</b> | <b>EQUIPMENT (TEST ITEM) DESCRIPTION</b>                     | <b>5</b>  |
| 1.1      | Photos – Equipment External                                  | 6         |
| 1.2      | Photos – Equipment internal                                  | 7         |
| 1.3      | Photos – Test setup                                          | 8         |
| 1.4      | Supporting Equipment Used During Testing                     | 9         |
| 1.5      | Test Modes                                                   | 10        |
| 1.6      | Test Equipment Used During Testing                           | 11        |
| 1.7      | Sample emission level calculation                            | 12        |
| <b>2</b> | <b>RESULT SUMMARY</b>                                        | <b>13</b> |
| <b>3</b> | <b>TEST CONDITIONS AND RESULTS</b>                           | <b>14</b> |
| 3.1      | Test Conditions and Results – Occupied Bandwidth             | 14        |
| 3.2      | Test Conditions and Results – 6 dB Bandwidth                 | 16        |
| 3.3      | Test Conditions and Results – Maximum peak conducted power   | 18        |
| 3.4      | Test Conditions and Results – Power spectral density         | 19        |
| 3.5      | Test Conditions and Results – Band edge compliance           | 20        |
| 3.6      | Test Conditions and Results – Conducted spurious emissions   | 21        |
| 3.7      | Test Conditions and Results – Transmitter radiated emissions | 23        |
| 3.8      | Test Conditions and Results – Receiver radiated emissions    | 25        |
| ANNEX A  | Transmitter radiated spurious emissions                      | 27        |
| ANNEX B  | Receiver radiated spurious emissions                         | 43        |

## 1 Equipment (Test item) Description

|                             |                                                                                  |                                     |
|-----------------------------|----------------------------------------------------------------------------------|-------------------------------------|
| Description                 | powermeter for bicycle                                                           |                                     |
| Model                       | power2max / P0004-7-C                                                            |                                     |
| Serial number               | 3.3.0.83                                                                         |                                     |
| Hardware version            | BG0004-7-C                                                                       |                                     |
| Software / Firmware version | None                                                                             |                                     |
| FCC-ID                      | ZQ2-P0004-7-C                                                                    |                                     |
| IC                          | 9766A-P000407C                                                                   |                                     |
| Equipment type              | End product                                                                      |                                     |
| Radio type                  | Transceiver                                                                      |                                     |
| Radio technology            | ANT+                                                                             |                                     |
| Operating frequency range   | 2457 MHz                                                                         |                                     |
| Assigned frequency band     | 2400 - 2483.5 MHz                                                                |                                     |
| Main test frequencies       | F <sub>MID</sub>                                                                 | 2457 MHz                            |
| Spreading                   | None                                                                             |                                     |
| Modulations                 | GFSK                                                                             |                                     |
| Number of channels          | 1                                                                                |                                     |
| Channel spacing             | N/A                                                                              |                                     |
| Number of antennas          | 1                                                                                |                                     |
| Antenna                     | Type                                                                             | integrated                          |
|                             | Model                                                                            | printed inverted F-Antenna          |
|                             | Manufacturer                                                                     | unspecified                         |
|                             | Gain                                                                             | -5.0 dBi (manufacturer declaration) |
| Manufacturer                | Saxonar GmbH<br>Hauptstr. 54<br>02906 Waldhufen OT Nieder Seifersdorf<br>GERMANY |                                     |
| Power supply                | V <sub>NOM</sub>                                                                 | 3.0 VDC                             |
|                             | V <sub>MIN</sub>                                                                 | 2.7 VDC                             |
|                             | V <sub>MAX</sub>                                                                 | 3.3 VDC                             |
| AC/DC-Adaptor               | Model                                                                            | N/A                                 |
|                             | Vendor                                                                           | N/A                                 |
|                             | Input                                                                            | N/A                                 |
|                             | Output                                                                           | N/A                                 |

#### 1.4 Supporting Equipment Used During Testing

| Product Type*                                                                                                                                                                       | Device | Manufacturer | Model No. | Comments |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|--------------|-----------|----------|
| None                                                                                                                                                                                |        |              |           |          |
| <p><b>*Note:</b> Use the following abbreviations:</p> <p>AE : Auxiliary/Associated Equipment, or</p> <p>SIM : Simulator (Not Subjected to Test)</p> <p>CABL : Connecting cables</p> |        |              |           |          |

## 1.5 Test Modes

| Mode    | Description         |                                                                                               |
|---------|---------------------|-----------------------------------------------------------------------------------------------|
| GFSK    | General conditions: | EUT powered by laboratory power supply.                                                       |
|         | Radio conditions:   | Mode = standalone transmit<br>Modulation = GFSK<br>Duty cycle = 78 %<br>Power level = Maximum |
| Receive | General conditions: | EUT powered by laboratory power supply.                                                       |
|         | Radio conditions:   | Mode = standalone receive                                                                     |

## 1.6 Test Equipment Used During Testing

| Occupied Bandwidth |              |        |            |           |          |
|--------------------|--------------|--------|------------|-----------|----------|
| Description        | Manufacturer | Model  | Identifier | Cal. Date | Cal. Due |
| Spectrum Analyzer  | R&S          | FSP 30 | EF00312    | 2013-01   | 2014-01  |

| 6dB Bandwidth     |              |        |            |           |          |
|-------------------|--------------|--------|------------|-----------|----------|
| Description       | Manufacturer | Model  | Identifier | Cal. Date | Cal. Due |
| Spectrum Analyzer | R&S          | FSP 30 | EF00312    | 2013-01   | 2014-01  |

| Maximum peak conducted power |              |        |            |           |          |
|------------------------------|--------------|--------|------------|-----------|----------|
| Description                  | Manufacturer | Model  | Identifier | Cal. Date | Cal. Due |
| Spectrum Analyzer            | R&S          | FSP 30 | EF00312    | 2013-01   | 2014-01  |

| Power spectral density |              |        |            |           |          |
|------------------------|--------------|--------|------------|-----------|----------|
| Description            | Manufacturer | Model  | Identifier | Cal. Date | Cal. Due |
| Spectrum Analyzer      | R&S          | FSP 30 | EF00312    | 2013-01   | 2014-01  |

| Band edge compliance |              |        |            |           |          |
|----------------------|--------------|--------|------------|-----------|----------|
| Description          | Manufacturer | Model  | Identifier | Cal. Date | Cal. Due |
| Spectrum Analyzer    | R&S          | FSP 30 | EF00312    | 2013-01   | 2014-01  |

| Conducted spurious emissions |              |        |            |           |          |
|------------------------------|--------------|--------|------------|-----------|----------|
| Description                  | Manufacturer | Model  | Identifier | Cal. Date | Cal. Due |
| Spectrum Analyzer            | R&S          | FSP 30 | EF00312    | 2013-01   | 2014-01  |

| Radiated spurious emissions |              |        |            |           |          |
|-----------------------------|--------------|--------|------------|-----------|----------|
| Description                 | Manufacturer | Model  | Identifier | Cal. Date | Cal. Due |
| Semi-anechoic chamber       | Frankonia    | AC 5   | EF00395    | --        | --       |
| Spectrum Analyzer           | R&S          | FSIQ26 | EF00242    | 2013-06   | 2014-06  |
| Biconical Antenna           | R&S          | HK 116 | EF00012    | 2013-02   | 2016-02  |
| LPD Antenna                 | R&S          | HL 223 | EF00187    | 2011-02   | 2014-02  |
| LPD Antenna                 | R&S          | HL 025 | EF00327    | 2013-02   | 2016-02  |

## 1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBμV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBμV/m). The FCC limits are given in units of μV/m. The following formula is used to convert the units of μV/m to dBμV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

$$\begin{array}{rclclcl} \text{Reading} & + & \text{AF} & = & \text{Net Reading} & : & \text{Net reading - FCC limit} & = & \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} & + & 26 \text{ dB} & = & 47.5 \text{ dB}\mu\text{V/m} & : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} & = & -9.5 \text{ dB} \end{array}$$

## 2 Result Summary

| FCC 47 CFR Part 15C, IC RSS-210                                                          |                                         |                                          |        |                    |
|------------------------------------------------------------------------------------------|-----------------------------------------|------------------------------------------|--------|--------------------|
| Product Specific Standard Section                                                        | Requirement – Test                      | Reference Method                         | Result | Remarks            |
| RSS-Gen 4.6.1                                                                            | Occupied Bandwidth                      | RSS-Gen 4.6.1                            | N/R    | Informational only |
| FCC § 15.247(a)(2)<br>IC RSS-210 § A8.2                                                  | 6dB Bandwidth                           | KDB Publication No. 558074               | PASS   |                    |
| FCC § 15.247(b)(3)<br>IC RSS-210 § A8.4                                                  | Maximum peak conducted power            | KDB Publication No. 558074               | PASS   |                    |
| FCC § 15.247(e)<br>IC RSS-210 § A8.2                                                     | Power spectral density                  | KDB Publication No. 558074               | PASS   |                    |
| 47 CFR 15.207<br>RSS-Gen 7.2.4                                                           | AC power line conducted emissions       | KDB Publication No. 558074 / ANSI C63.4  | N/A    |                    |
| FCC § 15.247(d)<br>IC RSS-210 § A8.5                                                     | Band edge compliance                    | KDB Publication No. 558074               | PASS   |                    |
| FCC § 15.247(d)<br>IC RSS-210 § A8.5                                                     | Conducted spurious emissions            | KDB Publication No. 558074               | PASS   |                    |
| FCC § 15.247(d)<br>FCC § 15.209<br>IC RSS-210 A8.5<br>IC RSS-Gen 4.9<br>IC RSS-Gen 7.2.5 | Transmitter radiated spurious emissions | KDB Publication No. 558074 / ANSI C 63.4 | PASS   |                    |
| IC RSS-Gen 4.10<br>IC RSS-Gen 6.1                                                        | Receiver radiated spurious emissions    | ANSI C 63.4                              | PASS   |                    |
| Remarks:                                                                                 |                                         |                                          |        |                    |

### 3 Test Conditions and Results


#### 3.1 Test Conditions and Results – Occupied Bandwidth

| Occupied Bandwidth acc. IC RSS-Gen                                                                                                                                                                                                                                     |                    |      | Verdict: PASS            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|------|--------------------------|
| Test according to measurement reference                                                                                                                                                                                                                                | Reference Method   |      |                          |
|                                                                                                                                                                                                                                                                        | RSS-Gen 4.6.1      |      |                          |
| Test frequency range                                                                                                                                                                                                                                                   | Tested frequencies |      |                          |
|                                                                                                                                                                                                                                                                        | F <sub>MID</sub>   |      |                          |
| Limits                                                                                                                                                                                                                                                                 |                    |      |                          |
| None (Informational only)                                                                                                                                                                                                                                              |                    |      |                          |
| Test setup                                                                                                                                                                                                                                                             |                    |      |                          |
| <div><div>Spectrum Analyzer</div><div>EUT</div></div>                                                                                                                                                                                                                  |                    |      |                          |
| Test procedure                                                                                                                                                                                                                                                         |                    |      |                          |
| 1. EUT set to test mode (Communication tester is used if needed)<br>2. Span set to at least twice the emission spectrum<br>3. Resolution bandwidth set to 1 % of span<br>4. Occupied Bandwidth (99 %) measurement with spectrum analyzer built in measurement function |                    |      |                          |
| Test results                                                                                                                                                                                                                                                           |                    |      |                          |
| Channel                                                                                                                                                                                                                                                                | Frequency [MHz]    | Mode | Occupied Bandwidth [MHz] |
| F <sub>MID</sub>                                                                                                                                                                                                                                                       | 2457               | GFSK | 0.910                    |
| Comments:                                                                                                                                                                                                                                                              |                    |      |                          |

# Occupied Bandwidth – F<sub>MID</sub>

## RSS Gen Occupied Bandwidth

EUT powermeter for bicycle  
Model power2max  
Approval Holder Saxonar GmbH / Ord.: G0M-1310-3347  
Temperature / Voltage Tnom / Vnom  
Test Site / Operator Eurofins Product Service GmbH / Mr. Treffke  
Test Specification 4.4.1 Occupied Bandwidth  
Comment 1 Channel.: 2457 MHz  
Comment 2 A spectrum analyzer with an integrated 99% power bandwidth function is used  
Comment 3 GFSK

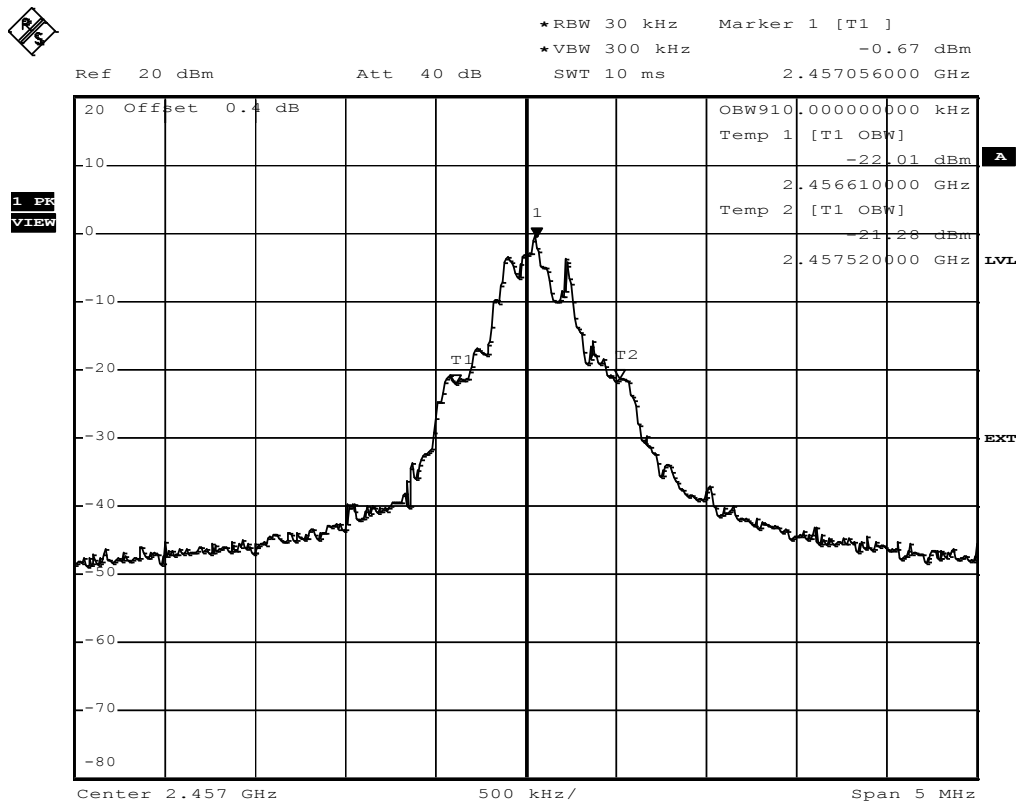

Comment: Occupied bandwidth: 952 KHz  
Date: 12.DEC.2013 11:29:24

### 3.2 Test Conditions and Results – 6 dB Bandwidth


| 6dB Bandwidth acc. FCC 15.247 / IC RSS-210                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                 |                                    |                      | Verdict: PASS |        |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|------------------------------------|----------------------|---------------|--------|
| EUT requirement<br>rule parts and clause                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                 | Reference                          |                      |               |        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                 | FCC 15.247(a)(2) / IC RSS-210 A8.2 |                      |               |        |
| Test according to<br>measurement reference                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                 | Reference Method                   |                      |               |        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                 | FCC KDB Publication No. 558074     |                      |               |        |
| Test frequency range                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                 | Tested frequencies                 |                      |               |        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                 | F <sub>MID</sub>                   |                      |               |        |
| Limits                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                 |                                    |                      |               |        |
| ≥ 500kHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                 |                                    |                      |               |        |
| Test setup                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                 |                                    |                      |               |        |
| <div><div>Spectrum Analyzer</div><div>EUT</div></div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                 |                                    |                      |               |        |
| Test procedure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                 |                                    |                      |               |        |
| <div>1. EUT set to test mode</div> <div>2. Span set to at least twice the emission spectrum</div> <div>3. Detector set to peak and max hold and RBW is set to 100 kHz</div> <div>4. Envelope peak value of emission spectrum is selected</div> <div>5. Marker on envelope of spectrum is set to level of -6 dB to the left of the peak</div> <div>6. Marker on envelope of spectrum is set to level of -6 dB to the right of the peak</div> <div>7. 6 dB Bandwidth is determined by marker frequency separation</div> |                 |                                    |                      |               |        |
| Test results                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                 |                                    |                      |               |        |
| Channel                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Frequency [MHz] | Mode                               | 6 dB Bandwidth [kHz] | Limit [kHz]   | Result |
| F <sub>MID</sub>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 2457            | GFSK                               | 500.4                | 500           | PASS   |
| Comments:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                 |                                    |                      |               |        |

6 dB Bandwidth – F<sub>MID</sub>

## FCC part 15.247 (a)2

## Minimum 6 dB Bandwidth

EUT powermeter for bicycle  
Model power2max  
Approval Holder Saxonar GmbH / Ord.: G0M-1310-3347  
Temperature / Voltage Tnom / Vnom  
Test Site / Operator Eurofins Product Service GmbH / Mr. Treffke  
Test Specification FCC part 15.247 (a)2  
Comment 1 Minimum 6 dB Bandwidth  
Comment 2 Channel 2457 MHz, GFSK  
Comment 3 procedure 8.1 DTS BW (558074 D01 DTS)

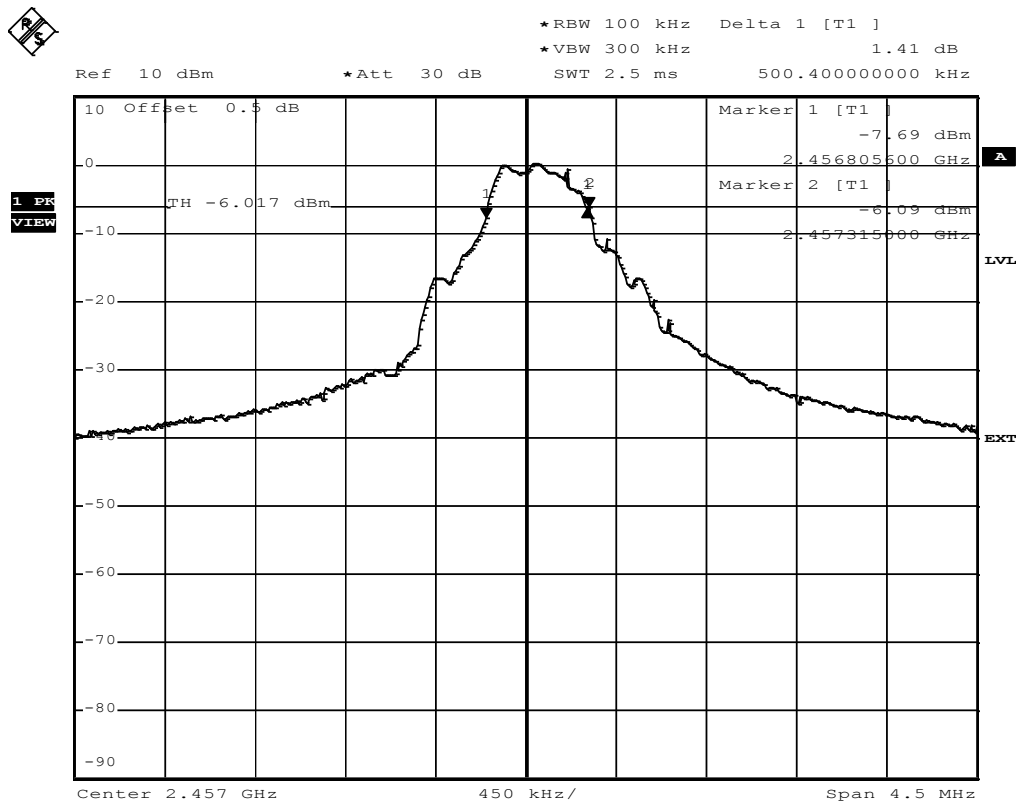

Comment: 6 dB bandwidth: 527.4 KHz > 500 KHz; verdict: PASS  
Date: 12.DEC.2013 10:41:47

### 3.3 Test Conditions and Results – Maximum peak conducted power

| Maximum peak conducted power acc. FCC 15.247 / IC RSS-210                                                                                                                                                                                                                                                                                                                                                               |                 |                        |                                    |                  |                 | Verdict: PASS |             |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|------------------------|------------------------------------|------------------|-----------------|---------------|-------------|
| EUT requirement<br>rule parts and clause                                                                                                                                                                                                                                                                                                                                                                                |                 |                        | Reference                          |                  |                 |               |             |
|                                                                                                                                                                                                                                                                                                                                                                                                                         |                 |                        | FCC 15.247(b)(3) / IC RSS-210 A8.4 |                  |                 |               |             |
| Test according to<br>measurement reference                                                                                                                                                                                                                                                                                                                                                                              |                 |                        | Reference Method                   |                  |                 |               |             |
|                                                                                                                                                                                                                                                                                                                                                                                                                         |                 |                        | FCC KDB Publication No. 558074     |                  |                 |               |             |
| Test frequency range                                                                                                                                                                                                                                                                                                                                                                                                    |                 |                        | Tested frequencies                 |                  |                 |               |             |
|                                                                                                                                                                                                                                                                                                                                                                                                                         |                 |                        | F <sub>MID</sub>                   |                  |                 |               |             |
| Measurement mode                                                                                                                                                                                                                                                                                                                                                                                                        |                 |                        | Peak                               |                  |                 |               |             |
| Maximum antenna gain                                                                                                                                                                                                                                                                                                                                                                                                    |                 |                        | -5 dBi ⇒ Limit correction = 0 dB   |                  |                 |               |             |
| Limits                                                                                                                                                                                                                                                                                                                                                                                                                  |                 |                        |                                    |                  |                 |               |             |
| 1 W (30 dBm)                                                                                                                                                                                                                                                                                                                                                                                                            |                 |                        |                                    |                  |                 |               |             |
| The conducted output power limit specified above is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in the table, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi. |                 |                        |                                    |                  |                 |               |             |
| Test setup                                                                                                                                                                                                                                                                                                                                                                                                              |                 |                        |                                    |                  |                 |               |             |
| <div><div>Spectrum Analyzer</div><div>EUT</div></div>                                                                                                                                                                                                                                                                                                                                                                   |                 |                        |                                    |                  |                 |               |             |
| Test procedure                                                                                                                                                                                                                                                                                                                                                                                                          |                 |                        |                                    |                  |                 |               |             |
| <div>1. EUT set to test mode (Communication tester is used if needed)</div> <div>2. Center frequency set to test channel center frequency</div> <div>3. Span set to twice the 20 dB bandwidth and detector to peak and max hold</div> <div>4. Resolution bandwidth is set to 3 MHz</div> <div>5. Peak conducted power is determined from peak of spectrum envelope</div>                                                |                 |                        |                                    |                  |                 |               |             |
| Test results                                                                                                                                                                                                                                                                                                                                                                                                            |                 |                        |                                    |                  |                 |               |             |
| Channel                                                                                                                                                                                                                                                                                                                                                                                                                 | Frequency [MHz] | Voltage [VDC]          | Mode                               | Peak power [dbm] | Peak power [mW] | Limit [dBm]   | Margin [dB] |
| F <sub>MID</sub>                                                                                                                                                                                                                                                                                                                                                                                                        | 2457            | V <sub>NOM</sub> = 2.7 | GFSK                               | 0.03             | 1.01            | 30            | -29.97      |
| Comments:                                                                                                                                                                                                                                                                                                                                                                                                               |                 |                        |                                    |                  |                 |               |             |

### 3.4 Test Conditions and Results – Power spectral density

| Power spectral density acc. FCC 15.247 / IC RSS-210                                                                                                                                                                                                                                            |                 |           |                                 |                          |                  | Verdict: PASS |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------|---------------------------------|--------------------------|------------------|---------------|
| EUT requirement<br>rule parts and clause                                                                                                                                                                                                                                                       |                 |           | Reference                       |                          |                  |               |
|                                                                                                                                                                                                                                                                                                |                 |           | FCC 15.247(e) / IC RSS-210 A8.2 |                          |                  |               |
| Test according to<br>measurement reference                                                                                                                                                                                                                                                     |                 |           | Reference Method                |                          |                  |               |
|                                                                                                                                                                                                                                                                                                |                 |           | FCC KDB Publication No. 558074  |                          |                  |               |
| Test frequency range                                                                                                                                                                                                                                                                           |                 |           | Tested frequencies              |                          |                  |               |
|                                                                                                                                                                                                                                                                                                |                 |           | F <sub>MID</sub>                |                          |                  |               |
| Measurement mode                                                                                                                                                                                                                                                                               |                 |           | Peak                            |                          |                  |               |
| Limits                                                                                                                                                                                                                                                                                         |                 |           |                                 |                          |                  |               |
| 8 dBm / 3 kHz                                                                                                                                                                                                                                                                                  |                 |           |                                 |                          |                  |               |
| Test setup                                                                                                                                                                                                                                                                                     |                 |           |                                 |                          |                  |               |
| <div><div>Spectrum Analyzer</div><div>EUT</div></div>                                                                                                                                                                                                                                          |                 |           |                                 |                          |                  |               |
| Test procedure                                                                                                                                                                                                                                                                                 |                 |           |                                 |                          |                  |               |
| 1. EUT set to test mode (Communication tester is used if needed)<br>2. Center frequency set to test channel center frequency<br>3. Span is set large enough to capture maximum emissions in passband, RBW is set to 3kHz<br>4. Peak power density is determined from peak emission of envelope |                 |           |                                 |                          |                  |               |
| Test results                                                                                                                                                                                                                                                                                   |                 |           |                                 |                          |                  |               |
| Channel                                                                                                                                                                                                                                                                                        | Frequency [MHz] | Test mode | Peak frequency [MHz]            | Peak power density [dBm] | Limit [dBm/3kHz] | Margin [dB]   |
| F <sub>MID</sub>                                                                                                                                                                                                                                                                               | 2457            | GFSK      | 2457.048                        | -0.06                    | 8.0              | -08.06        |
| Comments:                                                                                                                                                                                                                                                                                      |                 |           |                                 |                          |                  |               |

### 3.5 Test Conditions and Results – Band edge compliance

| Band-edge compliance acc. FCC 15.247 / IC RSS-210                                                                                                                                                                                                                                                                                                           |                 |                                      |                                        |             | Verdict: PASS |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|--------------------------------------|----------------------------------------|-------------|---------------|
| EUT requirement<br>rule parts and clause                                                                                                                                                                                                                                                                                                                    |                 | Reference                            |                                        |             |               |
|                                                                                                                                                                                                                                                                                                                                                             |                 | FCC 15.247(d) / IC RSS-210 A8.5      |                                        |             |               |
| Test according to<br>measurement reference                                                                                                                                                                                                                                                                                                                  |                 | Reference Method                     |                                        |             |               |
|                                                                                                                                                                                                                                                                                                                                                             |                 | FCC KDB Publication No. 558074       |                                        |             |               |
| Test frequency range                                                                                                                                                                                                                                                                                                                                        |                 | Tested frequencies                   |                                        |             |               |
|                                                                                                                                                                                                                                                                                                                                                             |                 | F <sub>LOW</sub> / F <sub>HIGH</sub> |                                        |             |               |
| Measurement mode                                                                                                                                                                                                                                                                                                                                            |                 | Peak                                 |                                        |             |               |
| Limits                                                                                                                                                                                                                                                                                                                                                      |                 |                                      |                                        |             |               |
| Limit                                                                                                                                                                                                                                                                                                                                                       |                 |                                      | Condition                              |             |               |
| ≤ -20 dB / 100 kHz                                                                                                                                                                                                                                                                                                                                          |                 |                                      | Peak power measurement detector = Peak |             |               |
| ≤ -30 dB / 100 kHz                                                                                                                                                                                                                                                                                                                                          |                 |                                      | Peak power measurement detector = RMS  |             |               |
| Test setup                                                                                                                                                                                                                                                                                                                                                  |                 |                                      |                                        |             |               |
| <div><div>Spectrum Analyzer</div><div>EUT</div></div>                                                                                                                                                                                                                                                                                                       |                 |                                      |                                        |             |               |
| Test procedure                                                                                                                                                                                                                                                                                                                                              |                 |                                      |                                        |             |               |
| 1. EUT set to test mode (Communication tester is used if needed)<br>2. Span set around lower band edge and detector is set to peak and max hold<br>3. Resolution bandwidth is set to 100 kHz<br>4. Markers are set to peak emission levels within frequency band and outside frequency band<br>5. Band edge attenuation is determined from level difference |                 |                                      |                                        |             |               |
| Test results                                                                                                                                                                                                                                                                                                                                                |                 |                                      |                                        |             |               |
| Channel                                                                                                                                                                                                                                                                                                                                                     | Frequency [MHz] | Mode                                 | Level [dBc]                            | Limit [dBc] | Margin [dB]   |
| F <sub>LOW</sub>                                                                                                                                                                                                                                                                                                                                            | 2457            | GFSK                                 | -41.93                                 | -20         | -21.93        |
| F <sub>HIGH</sub>                                                                                                                                                                                                                                                                                                                                           | 2457            | GFSK                                 | -33.25                                 | -20         | -13.25        |
| Comments:                                                                                                                                                                                                                                                                                                                                                   |                 |                                      |                                        |             |               |


### 3.6 Test Conditions and Results – Conducted spurious emissions

| Conducted spurious emissions acc. FCC 15.247 / IC RSS-210                                                                                                                                                                                                                                                                                                                                                                                          |                 |      |                                    |                                        |                  | Verdict: PASS |             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|------|------------------------------------|----------------------------------------|------------------|---------------|-------------|
| EUT requirement<br>rule parts and clause                                                                                                                                                                                                                                                                                                                                                                                                           |                 |      | Reference                          |                                        |                  |               |             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                 |      | FCC 15.247(d) / IC RSS-210 A8.5    |                                        |                  |               |             |
| Test according to<br>measurement reference                                                                                                                                                                                                                                                                                                                                                                                                         |                 |      | Reference Method                   |                                        |                  |               |             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                 |      | FCC KDB Publication No. 558074     |                                        |                  |               |             |
| Test frequency range                                                                                                                                                                                                                                                                                                                                                                                                                               |                 |      | Tested frequencies                 |                                        |                  |               |             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                 |      | 10 MHz – 10 <sup>th</sup> Harmonic |                                        |                  |               |             |
| Measurement mode                                                                                                                                                                                                                                                                                                                                                                                                                                   |                 |      | Peak                               |                                        |                  |               |             |
| Limits                                                                                                                                                                                                                                                                                                                                                                                                                                             |                 |      |                                    |                                        |                  |               |             |
| Limit                                                                                                                                                                                                                                                                                                                                                                                                                                              |                 |      |                                    | Condition                              |                  |               |             |
| ≤ -20 dB / 100 kHz                                                                                                                                                                                                                                                                                                                                                                                                                                 |                 |      |                                    | Peak power measurement detector = Peak |                  |               |             |
| ≤ -30 dB /100 kHz                                                                                                                                                                                                                                                                                                                                                                                                                                  |                 |      |                                    | Peak power measurement detector = RMS  |                  |               |             |
| Test setup                                                                                                                                                                                                                                                                                                                                                                                                                                         |                 |      |                                    |                                        |                  |               |             |
| <div><div>Spectrum Analyzer</div><div>EUT</div></div>                                                                                                                                                                                                                                                                                                                                                                                              |                 |      |                                    |                                        |                  |               |             |
| Test procedure                                                                                                                                                                                                                                                                                                                                                                                                                                     |                 |      |                                    |                                        |                  |               |             |
| <div>1. EUT set to test mode (Communication tester is used if needed)</div> <div>2. Span it set according to measurement range</div> <div>3. Resolution bandwidth is set to 100 kHz and detector to peak and max hold</div> <div>4. Markers are set to peak emission levels within frequency band</div> <div>5. Emission level is determined by second marker on emission peak</div> <div>6. Attenuation is determined from level difference</div> |                 |      |                                    |                                        |                  |               |             |
| Test results                                                                                                                                                                                                                                                                                                                                                                                                                                       |                 |      |                                    |                                        |                  |               |             |
| Channel                                                                                                                                                                                                                                                                                                                                                                                                                                            | Frequency [MHz] | Mode | Emission [MHz]                     | Emission Level [dbm]                   | Peak power [dBm] | Limit [dBm]   | Margin [dB] |
| F <sub>MID</sub>                                                                                                                                                                                                                                                                                                                                                                                                                                   | 2457            | GFSK | 4916.98                            | -47.65                                 | -10.98           | -20           | -27.65      |
| Comments:                                                                                                                                                                                                                                                                                                                                                                                                                                          |                 |      |                                    |                                        |                  |               |             |

Conducted spurious emissions – F<sub>MID</sub>


FCC part 15.247 (d)  
Spurious Emissions

EUT powermeter for bicycle  
Model power2max  
Approval Holder Saxonar GmbH / Ord.: G0M-1310-3347  
Temperature / Voltage Tnom / Vnom  
Test Site / Operator Eurofins Product Service GmbH / Mr. Treffke  
Test Specification FCC part 15.247 (d)  
Comment 1 Spurious Emissions conducted  
Comment 2 Channel 2457 MHz  
Comment 3 Emissions in non-restricted frequency bands 558074 D01 Meas. Guidance

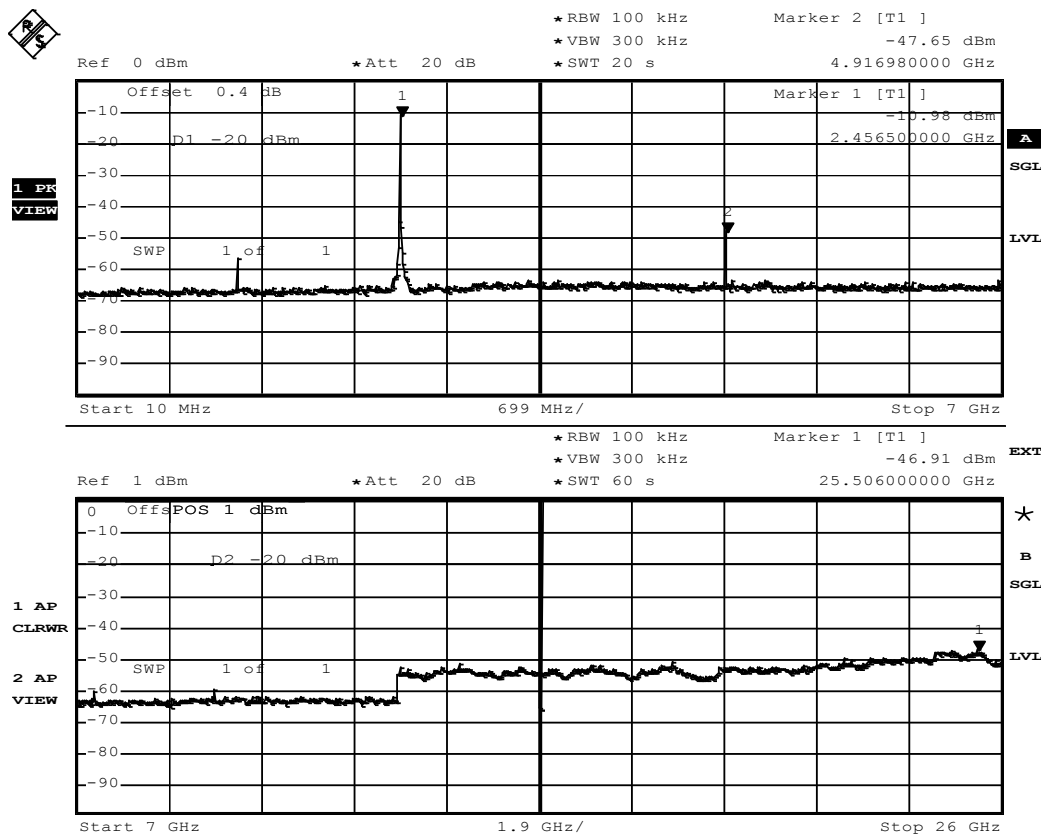


Date: 12.DEC.2013 11:13:20

### 3.7 Test Conditions and Results – Transmitter radiated emissions
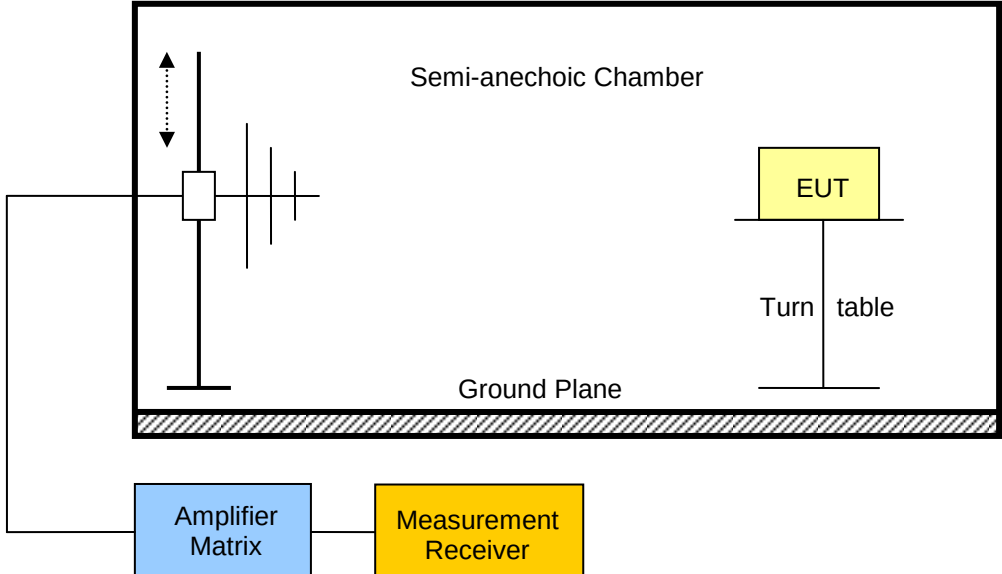
| Transmitter radiated emissions acc. FCC 47 CFR 15.247 / IC RSS-210                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                             |              |                | Verdict: PASS      |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|--------------|----------------|--------------------|
| Test according referenced standards                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Reference Method                            |              |                |                    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | FCC 15.247(d) / IC RSS-210 A8.5             |              |                |                    |
| Test according to measurement reference                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Reference Method                            |              |                |                    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | FCC KDB Publication No. 558074 / ANSI C63.4 |              |                |                    |
| Test frequency range                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Tested frequencies                          |              |                |                    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 30 MHz – 10 <sup>th</sup> Harmonic          |              |                |                    |
| Limits                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                             |              |                |                    |
| Frequency range [MHz]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Detector                                    | Limit [μV/m] | Limit [dBμV/m] | Limit Distance [m] |
| 30 – 88                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Quasi-Peak                                  | 100          | 40             | 3                  |
| 88 – 216                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Quasi-Peak                                  | 150          | 43.5           | 3                  |
| 216 – 960                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Quasi-Peak                                  | 200          | 46             | 3                  |
| 960 – 1000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Quasi-Peak                                  | 500          | 54             | 3                  |
| > 1000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Average                                     | 500          | 54             | 3                  |
| <p>Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).</p> <p>When average radiated emission measurements are specified, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.</p> |                                             |              |                |                    |
| Test setup                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                             |              |                |                    |
| <div></div>                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                             |              |                |                    |

| Test procedure                                                                                                                                                                                                                                                                                                                                                                                                                |                 |      |                |                |      |      |                |                  |             |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|------|----------------|----------------|------|------|----------------|------------------|-------------|
| <ol style="list-style-type: none"> <li>1. EUT set to test mode (Communication tester is used if needed)</li> <li>2. Span it set according to measurement range</li> <li>3. Resolution bandwidth below 1 GHz is set according to CISPR 16 with peak/quasi-peak detector and RBW of 1 MHz with peak/average detector is used above 1 GHz</li> <li>4. Markers are set to peak emission levels within restricted bands</li> </ol> |                 |      |                |                |      |      |                |                  |             |
| Test results – Internal Antenna                                                                                                                                                                                                                                                                                                                                                                                               |                 |      |                |                |      |      |                |                  |             |
| Channel                                                                                                                                                                                                                                                                                                                                                                                                                       | Frequency [MHz] | Mode | Emission [MHz] | Level [dBμV/m] | Det. | Pol. | Limit [dBμV/m] | Limit dist. [m]* | Margin [dB] |
| F <sub>MID</sub>                                                                                                                                                                                                                                                                                                                                                                                                              | 2457            | GFSK | 2389           | 42.32          | pk   | hor  | 74             | 3                | -31.68      |
| F <sub>MID</sub>                                                                                                                                                                                                                                                                                                                                                                                                              | 2457            | GFSK | 2389           | 24.56          | RMS  | hor  | 54             | 3                | -29.44      |
| F <sub>MID</sub>                                                                                                                                                                                                                                                                                                                                                                                                              | 2457            | GFSK | 2483.8         | 51.00          | pk   | hor  | 74             | 3                | -23.00      |
| F <sub>MID</sub>                                                                                                                                                                                                                                                                                                                                                                                                              | 2457            | GFSK | 2483.8         | 25.96          | RMS  | hor  | 54             | 3                | -28.04      |
| F <sub>MID</sub>                                                                                                                                                                                                                                                                                                                                                                                                              | 2457            | GFSK | 4914           | 56.06          | pk   | ver  | 74             | 3                | -17.94      |
| F <sub>MID</sub>                                                                                                                                                                                                                                                                                                                                                                                                              | 2457            | GFSK | 4914           | 51.85          | avg  | ver  | 54             | 3                | -02.15      |
| F <sub>MID</sub>                                                                                                                                                                                                                                                                                                                                                                                                              | 2457            | GFSK | 4915           | 54.80          | pk   | hor  | 74             | 3                | -19.20      |
| F <sub>MID</sub>                                                                                                                                                                                                                                                                                                                                                                                                              | 2457            | GFSK | 4915           | 49.58          | avg  | hor  | 54             | 3                | -04.42      |
| Comments: * Physical distance between EUT and measurement antenna.                                                                                                                                                                                                                                                                                                                                                            |                 |      |                |                |      |      |                |                  |             |

### 3.8 Test Conditions and Results – Receiver radiated emissions
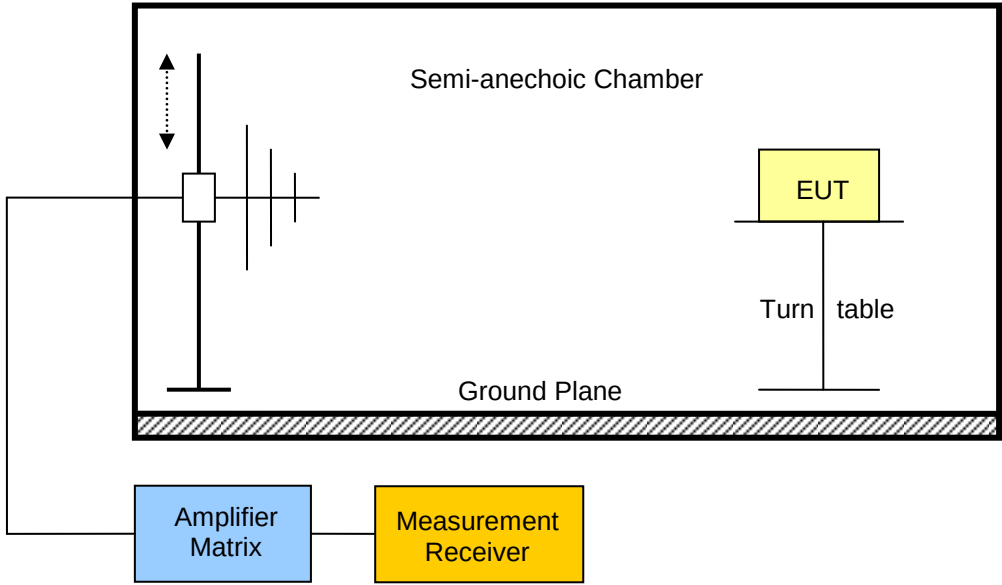
| Receiver radiated emissions acc. IC RSS-210                                          |                                   |              |                | Verdict: PASS      |
|--------------------------------------------------------------------------------------|-----------------------------------|--------------|----------------|--------------------|
| Test according referenced standards                                                  | Reference Method                  |              |                |                    |
|                                                                                      | IC RSS-210 A8.5                   |              |                |                    |
| Test according to measurement reference                                              | Reference Method                  |              |                |                    |
|                                                                                      | ANSI C63.4                        |              |                |                    |
| Test frequency range                                                                 | Tested frequencies                |              |                |                    |
|                                                                                      | 30 MHz – 3 <sup>th</sup> Harmonic |              |                |                    |
| EUT test mode                                                                        | Receive                           |              |                |                    |
| Limits                                                                               |                                   |              |                |                    |
| Frequency range [MHz]                                                                | Detector                          | Limit [μV/m] | Limit [dBμV/m] | Limit Distance [m] |
| 30 – 88                                                                              | Quasi-Peak                        | 100          | 40             | 3                  |
| 88 – 216                                                                             | Quasi-Peak                        | 150          | 43.5           | 3                  |
| 216 – 960                                                                            | Quasi-Peak                        | 200          | 46             | 3                  |
| 960 – 1000                                                                           | Quasi-Peak                        | 500          | 54             | 3                  |
| > 1000                                                                               | Average                           | 500          | 54             | 3                  |
| Test setup                                                                           |                                   |              |                |                    |
|  |                                   |              |                |                    |

| Test procedure                                                                                                                                                                                                                                                                                                                                                                                           |                 |                |                               |                             |      |                    |                     |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------|-------------------------------|-----------------------------|------|--------------------|---------------------|
| <ol style="list-style-type: none"> <li>1. EUT set to receive mode (Communication tester is used if needed)</li> <li>2. Span it set according to measurement range</li> <li>3. Resolution bandwidth below 1 GHz is set according to CISPR 16 with peak/quasi-peak detector and RBW of 1 MHz with peak/average detector is used above 1 GHz</li> <li>4. Markers are set to peak emission levels</li> </ol> |                 |                |                               |                             |      |                    |                     |
| Test results                                                                                                                                                                                                                                                                                                                                                                                             |                 |                |                               |                             |      |                    |                     |
| Channel                                                                                                                                                                                                                                                                                                                                                                                                  | Frequency [MHz] | Emission [MHz] | Emission Level [db $\mu$ V/m] | Emission Level [ $\mu$ V/m] | Det. | Limit [ $\mu$ V/m] | Margin [ $\mu$ V/m] |
| F <sub>MID</sub>                                                                                                                                                                                                                                                                                                                                                                                         | 2457            | 2806           | 39.16                         | 90.78                       | pk   | 500                | 409.22              |
| Comments:<br>* Physical distance between EUT and measurement antenna.<br>** Emission level corresponds to ambient noise floor                                                                                                                                                                                                                                                                            |                 |                |                               |                             |      |                    |                     |


## ANNEX A Transmitter radiated spurious emissions

### Spurious emissions according to FCC 15.247

Project number: G0M-1310-3347

|                       |                                    |
|-----------------------|------------------------------------|
| Manufacturer:         | Saxonar GmbH                       |
| EUT Name:             | powermeter for bicycle             |
| Model:                | power2max typ: p2mFSA24110-4       |
| Test Site:            | Eurofins Product Service GmbH      |
| Operator:             | Mr. Treffke                        |
| Test Conditions:      | Tnom: 24°C, Vnom: 3.0 V DC         |
| Antenna:              | Rohde & Schwarz HK 116, Horizontal |
| Measurement distance: | 3 m                                |
| Mode:                 | TX; GFSK, 2457 MHz                 |
| Test Date:            | 2013-12-11                         |
| Note:                 | worst case                         |

Index 17

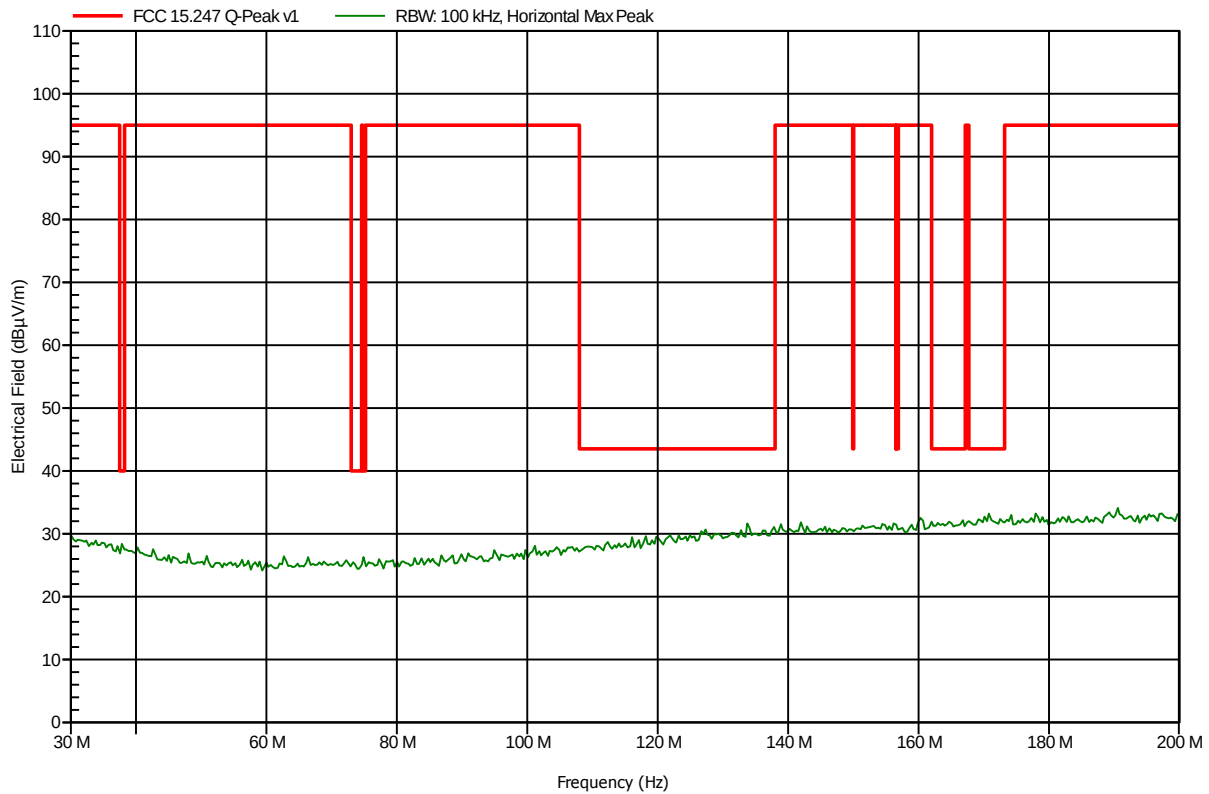


**Spurious emissions according to FCC 15.247**

Project number: G0M-1310-3347

|                       |                                  |
|-----------------------|----------------------------------|
| Manufacturer:         | Saxonar GmbH                     |
| EUT Name:             | powermeter for bicycle           |
| Model:                | power2max typ: p2mFSA24110-4     |
| Test Site:            | Eurofins Product Service GmbH    |
| Operator:             | Mr. Treffke                      |
| Test Conditions:      | Tnom: 24°C, Vnom: 3.0 V DC       |
| Antenna:              | Rohde & Schwarz HK 116, Vertical |
| Measurement distance: | 3 m                              |
| Mode:                 | TX; GFSK, 2457 MHz               |
| Test Date:            | 2013-12-11                       |
| Note:                 | worst case                       |

Index 18

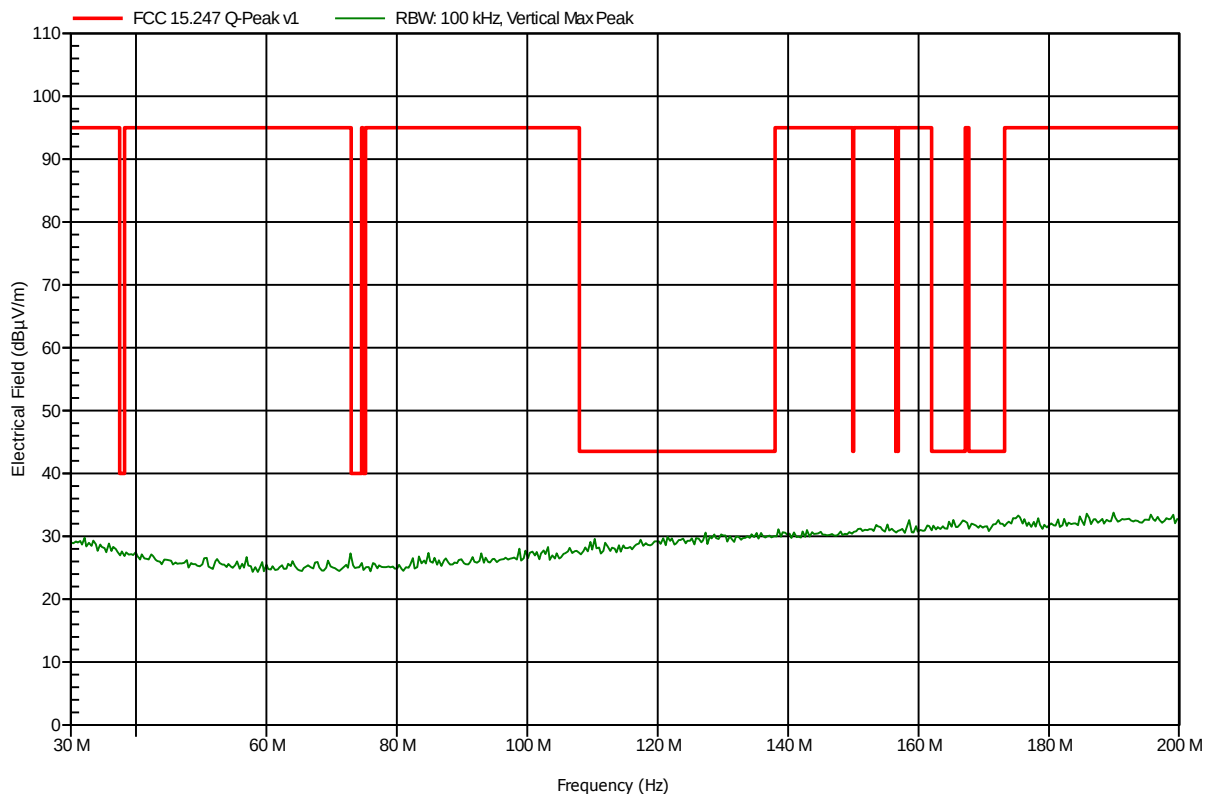


## Spurious emissions according to FCC 15.247

Project number: G0M-1310-3347

|                       |                                    |
|-----------------------|------------------------------------|
| Manufacturer:         | Saxonar GmbH                       |
| EUT Name:             | powermeter for bicycle             |
| Model:                | power2max typ: p2mFSA24110-4       |
| Test Site:            | Eurofins Product Service GmbH      |
| Operator:             | Mr. Treffke                        |
| Test Conditions:      | Tnom: 24°C, Vnom: 3.0 V DC         |
| Antenna:              | Rohde & Schwarz HL 223, Horizontal |
| Measurement distance: | 3 m                                |
| Mode:                 | TX; GFSK, 2457 MHz                 |
| Test Date:            | 2013-12-11                         |
| Note:                 | worst case                         |

Index 15

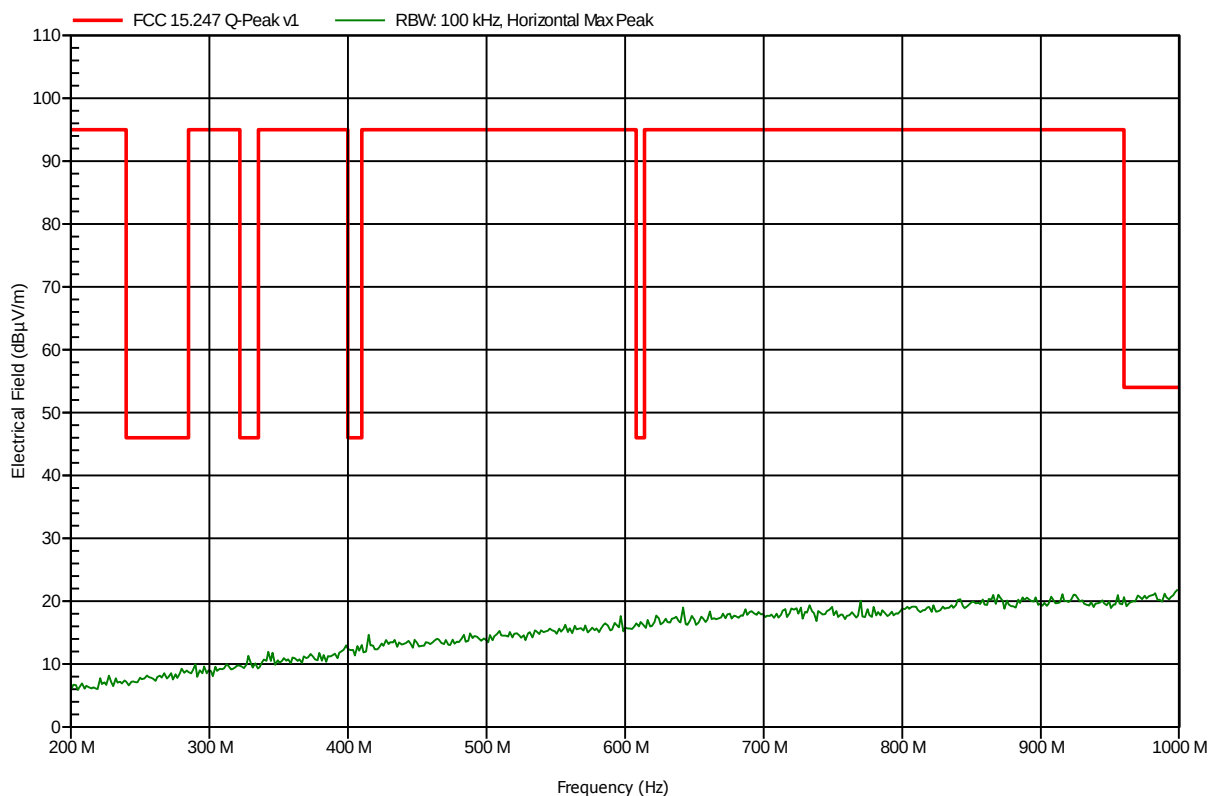


## Spurious emissions according to FCC 15.247

Project number: G0M-1310-3347

|                       |                                  |
|-----------------------|----------------------------------|
| Manufacturer:         | Saxonar GmbH                     |
| EUT Name:             | powermeter for bicycle           |
| Model:                | power2max typ: p2mFSA24110-4     |
| Test Site:            | Eurofins Product Service GmbH    |
| Operator:             | Mr. Treffke                      |
| Test Conditions:      | Tnom: 24°C, Vnom: 3.0 V DC       |
| Antenna:              | Rohde & Schwarz HL 223, Vertical |
| Measurement distance: | 3 m                              |
| Mode:                 | TX; GFSK, 2457 MHz               |
| Test Date:            | 2013-12-11                       |
| Note:                 | worst case                       |

Index 16

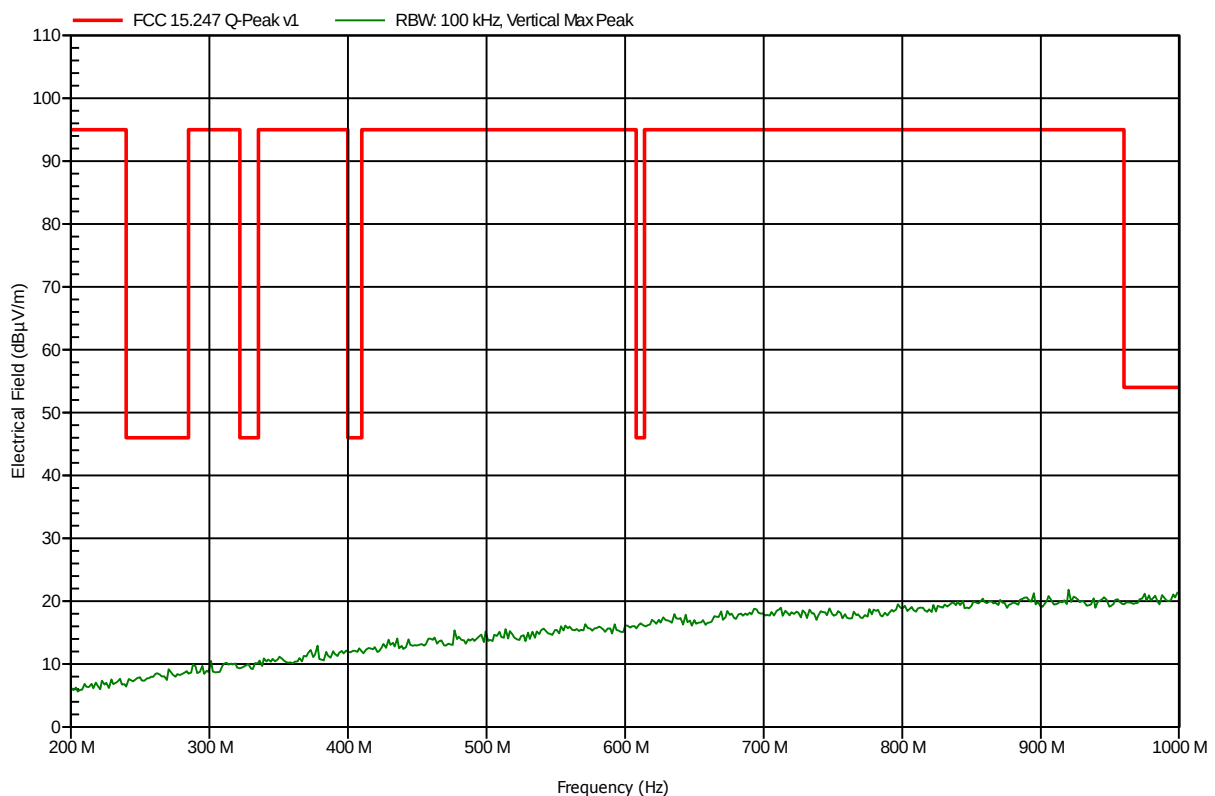

Test Report No.: G0M-1310-3347-TFC247Z-V01


Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

## Spurious emissions according to FCC 15.247

Project number: G0M-1310-3347

Manufacturer: Saxonar GmbH  
 EUT Name: powermeter for bicycle  
 Model: power2max typ: p2mFSA24110-4  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 24°C, Vnom: 3.0 V DC  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; GFSK, 2457 MHz  
 Test Date: 2013-12-11  
 Note:

Index 3

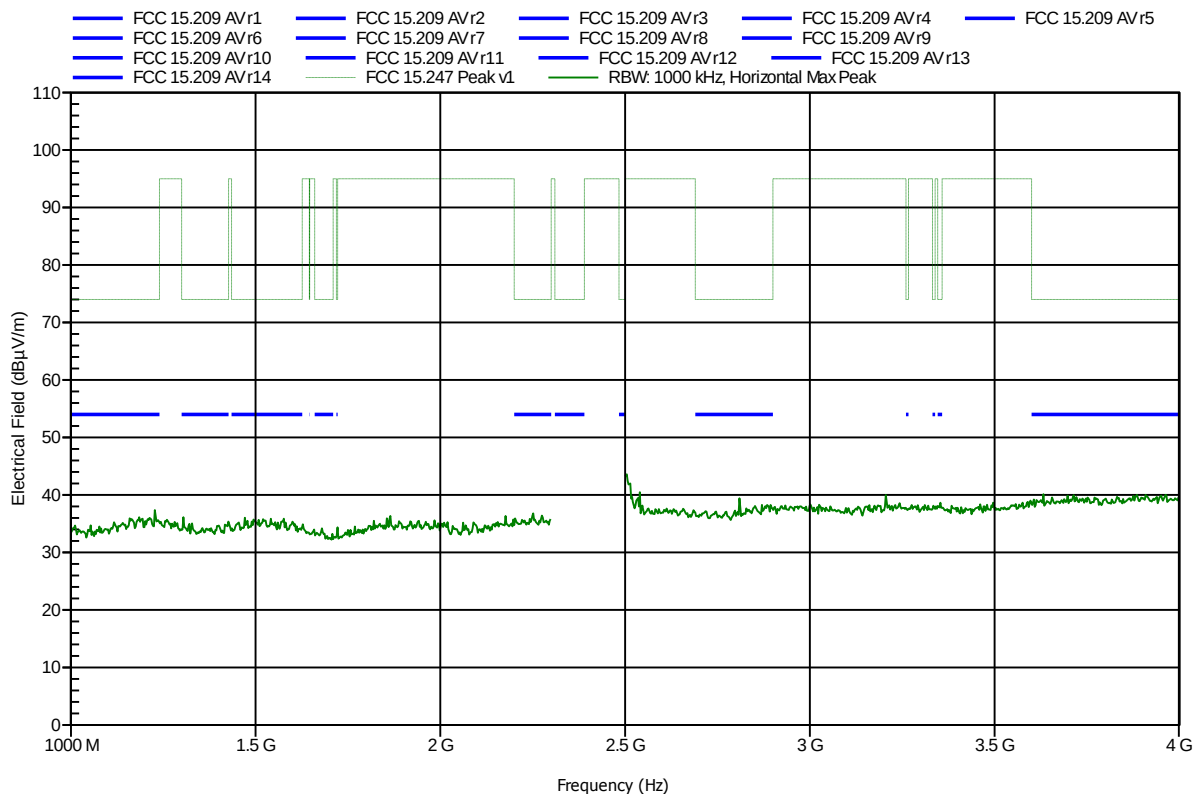


## Spurious emissions according to FCC 15.247

Project number: G0M-1310-3347

Manufacturer: Saxonar GmbH  
 EUT Name: powermeter for bicycle  
 Model: power2max typ: p2mFSA24110-4  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 24°C, Vnom: 3.0 V DC  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: TX; GFSK, 2457 MHz  
 Test Date: 2013-12-11  
 Note:

Index 7

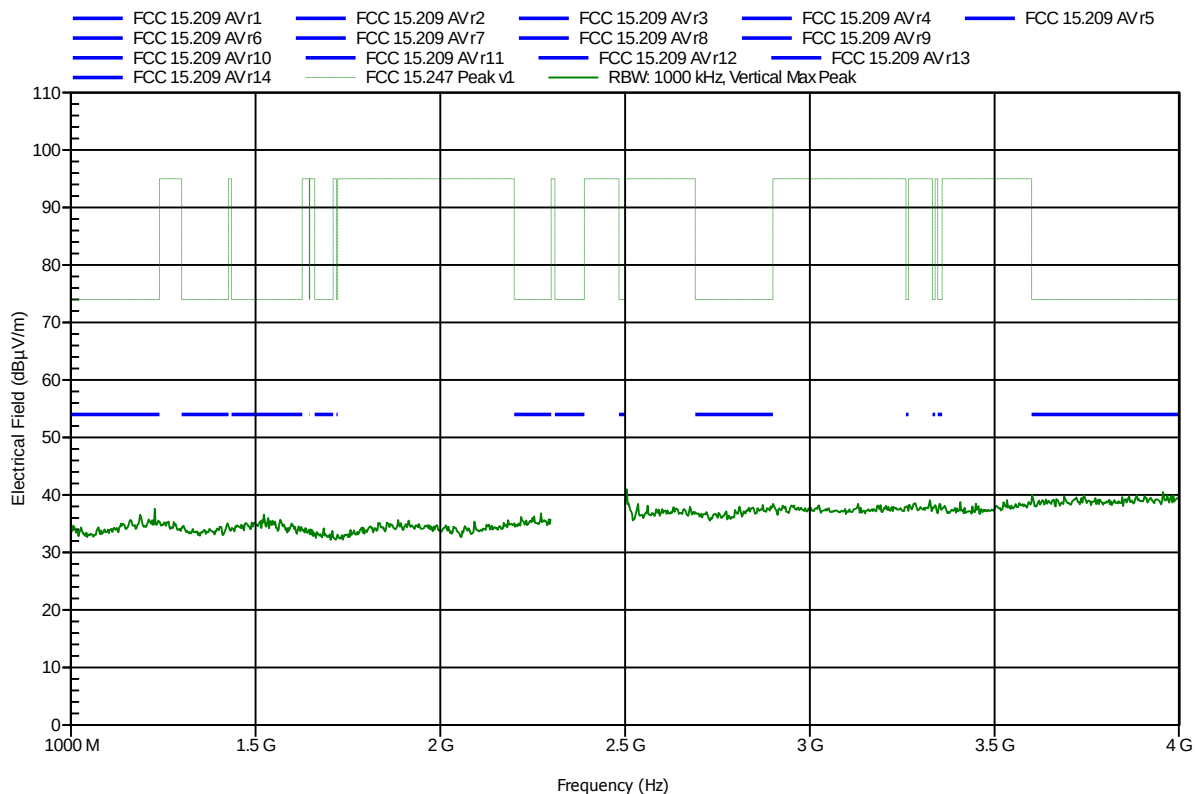


## Spurious emissions according to FCC 15.247

Project number: G0M-1310-3347

Manufacturer: Saxonar GmbH  
 EUT Name: powermeter for bicycle  
 Model: power2max typ: p2mFSA24110-4  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 24°C, Vnom: 3.0 V DC  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; GFSK, 2457 MHz  
 Test Date: 2013-12-11  
 Note: lower bandedge

Index 4

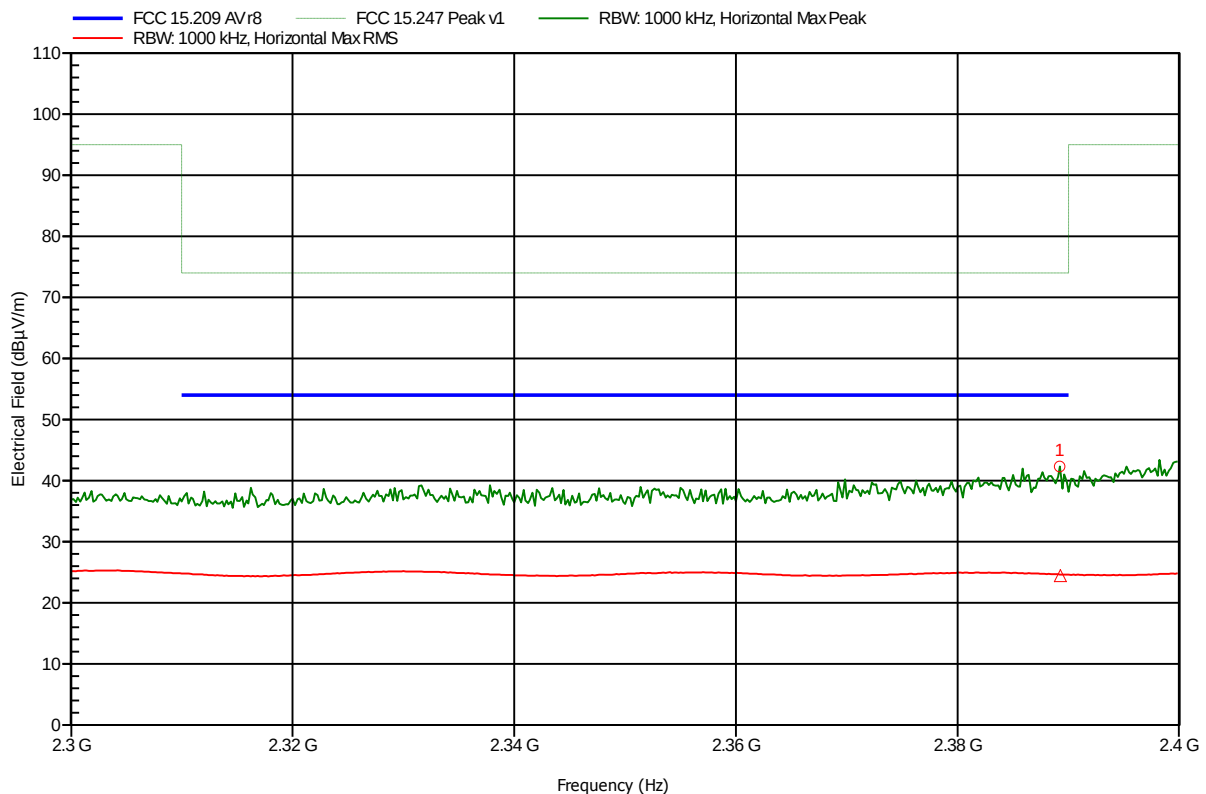


|                        |                      |                         |                              |                     |
|------------------------|----------------------|-------------------------|------------------------------|---------------------|
| Frequency<br>2.389 GHz | Peak<br>42.32 dBµV/m | Peak Limit<br>74 dBµV/m | Peak Difference<br>-31.68 dB | Peak Status<br>Pass |
| Frequency<br>2.389 GHz | RMS<br>24.56 dBµV/m  | RMS Limit<br>54 dBµV/m  | RMS Difference<br>-29.44 dB  | RMS Status<br>Pass  |

## Spurious emissions according to FCC 15.247

Project number: G0M-1310-3347

Manufacturer: Saxonar GmbH  
 EUT Name: powermeter for bicycle  
 Model: power2max typ: p2mFSA24110-4  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 24°C, Vnom: 3.0 V DC  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: TX; GFSK, 2457 MHz  
 Test Date: 2013-12-11  
 Note: lower bandedge

Index 8

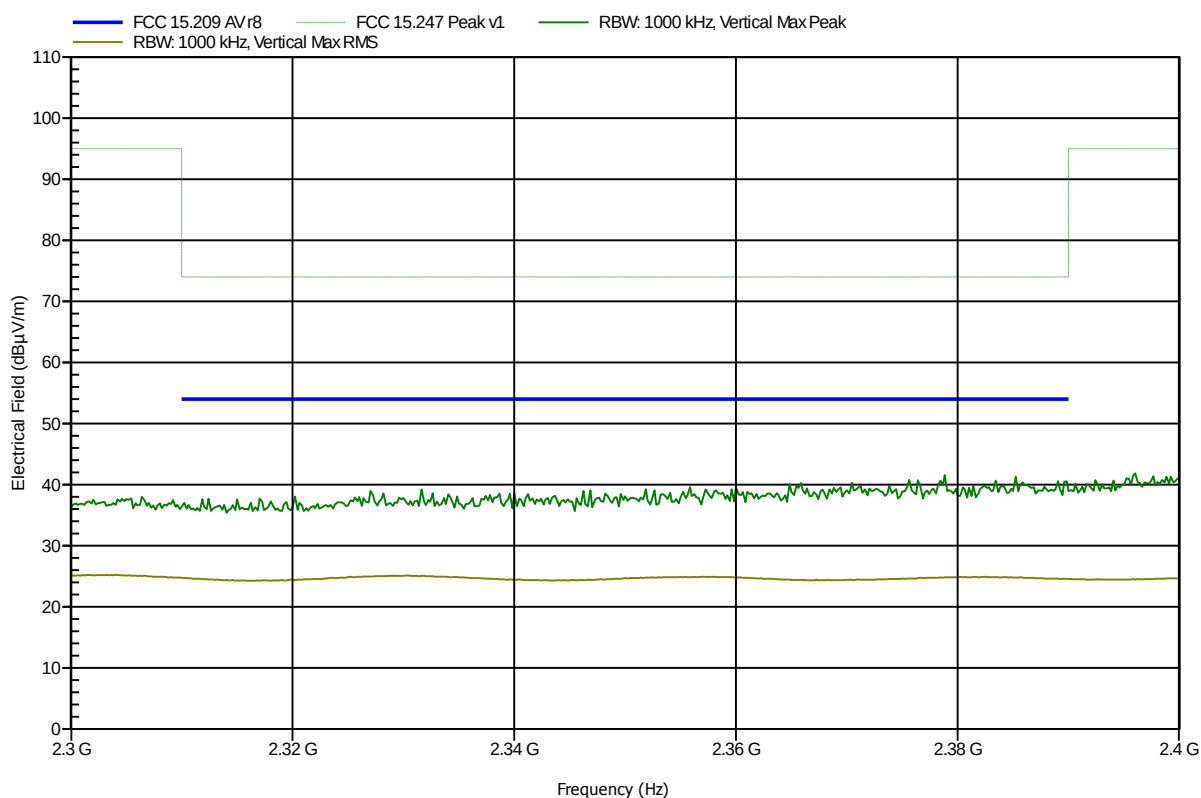


## Spurious emissions according to FCC 15.247

Project number: G0M-1310-3347

Manufacturer: Saxonar GmbH  
 EUT Name: powermeter for bicycle  
 Model: power2max typ: p2mFSA24110-4  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 24°C, Vnom: 3.0 V DC  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; GFSK, 2457 MHz  
 Test Date: 2013-12-11  
 Note: upper bandedge

Index 5

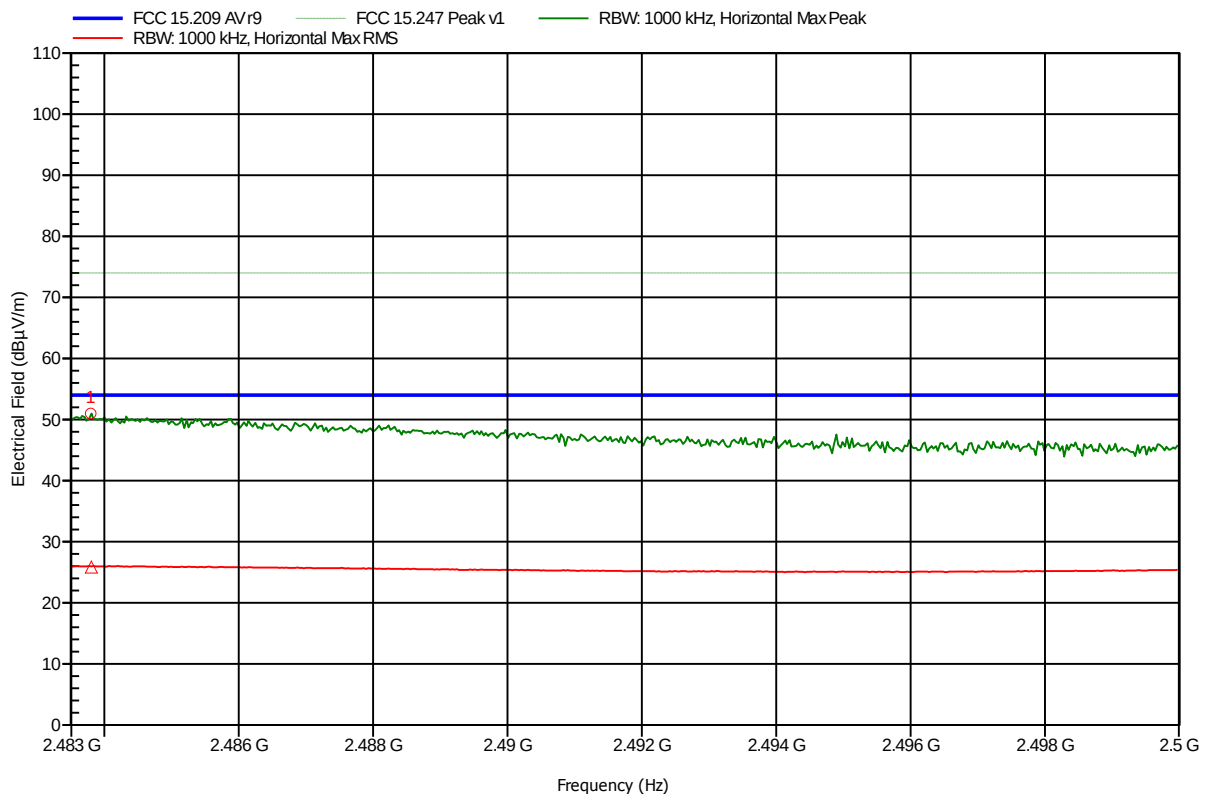


|                         |                     |                         |                             |                     |
|-------------------------|---------------------|-------------------------|-----------------------------|---------------------|
| Frequency<br>2.4838 GHz | Peak<br>51 dBµV/m   | Peak Limit<br>74 dBµV/m | Peak Difference<br>-23 dB   | Peak Status<br>Pass |
| Frequency<br>2.4838 GHz | RMS<br>25.96 dBµV/m | RMS Limit<br>54 dBµV/m  | RMS Difference<br>-28.04 dB | RMS Status<br>Pass  |

## Spurious emissions according to FCC 15.247

Project number: G0M-1310-3347

Manufacturer: Saxonar GmbH  
 EUT Name: powermeter for bicycle  
 Model: power2max typ: p2mFSA24110-4  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 24°C, Vnom: 3.0 V DC  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: TX; GFSK, 2457 MHz  
 Test Date: 2013-12-11  
 Note: upper bandedge

Index 9

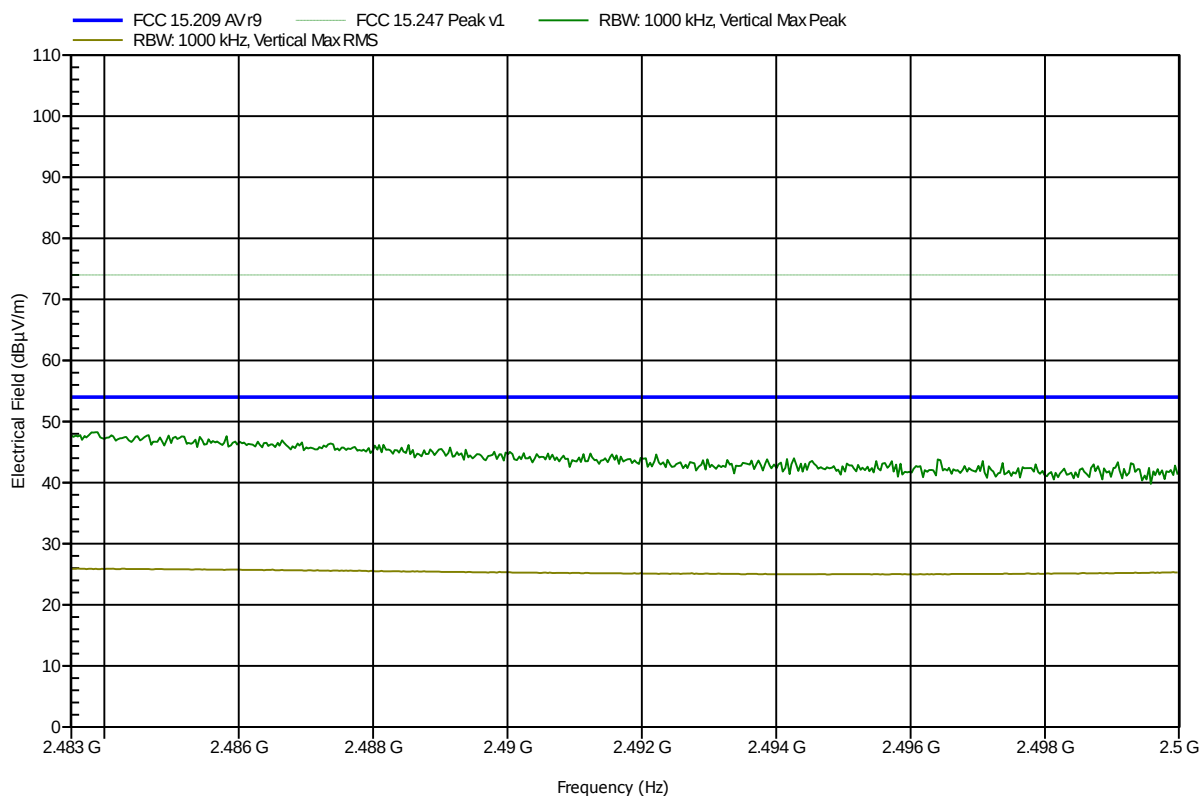

Test Report No.: G0M-1310-3347-TFC247Z-V01


Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

## Spurious emissions according to FCC 15.247

Project number: G0M-1310-3347

Manufacturer: Saxonar GmbH  
 EUT Name: powermeter for bicycle  
 Model: power2max typ: p2mFSA24110-4  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 24°C, Vnom: 3.0 V DC  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; GFSK, 2457 MHz  
 Test Date: 2013-12-11  
 Note:

Index 6

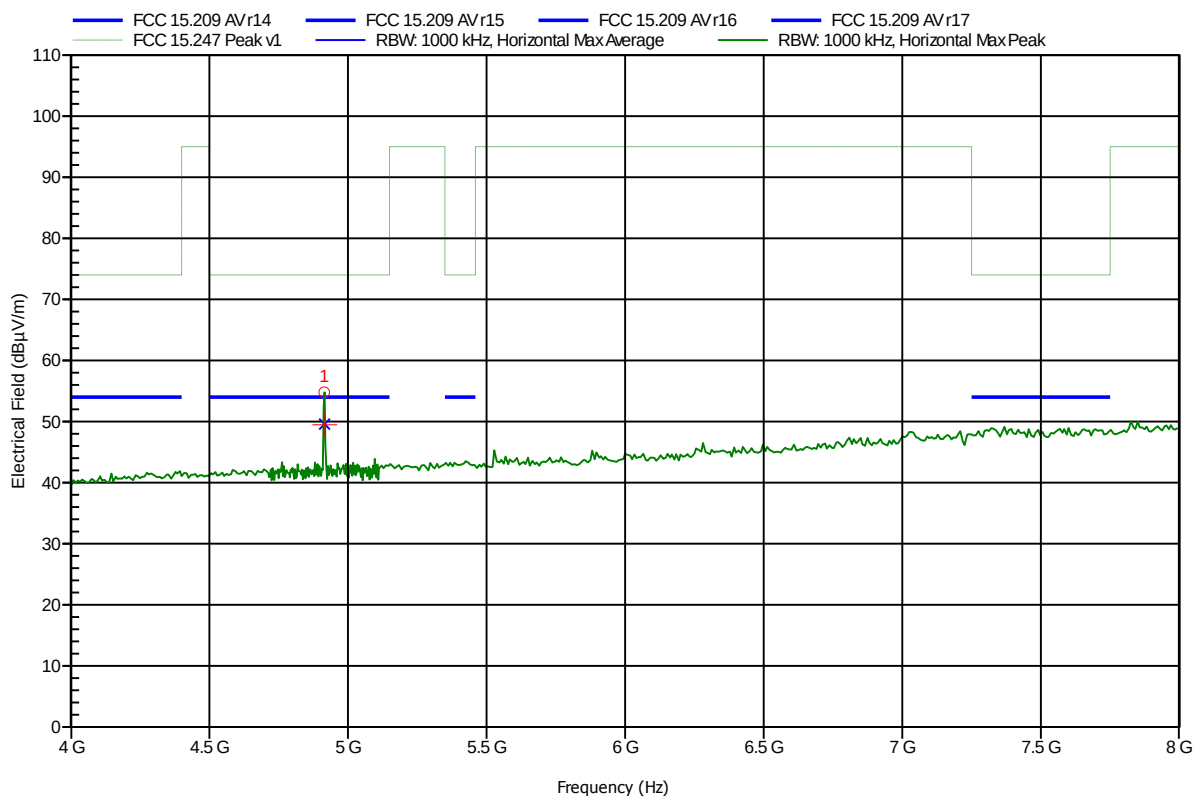

|                        |                         |                            |                                |                        |
|------------------------|-------------------------|----------------------------|--------------------------------|------------------------|
| Frequency<br>4.915 GHz | Peak<br>54.8 dBμV/m     | Peak Limit<br>74 dBμV/m    | Peak Difference<br>-19.2 dB    | Peak Status<br>Pass    |
| Frequency<br>4.915 GHz | Average<br>49.58 dBμV/m | Average Limit<br>54 dBμV/m | Average Difference<br>-4.42 dB | Average Status<br>Pass |

Test Report No.: G0M-1310-3347-TFC247Z-V01


Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

## Spurious emissions according to FCC 15.247

Project number: G0M-1310-3347

Manufacturer: Saxonar GmbH  
 EUT Name: powermeter for bicycle  
 Model: power2max typ: p2mFSA24110-4  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 24°C, Vnom: 3.0 V DC  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: TX; GFSK, 2457 MHz  
 Test Date: 2013-12-11  
 Note:

Index 10

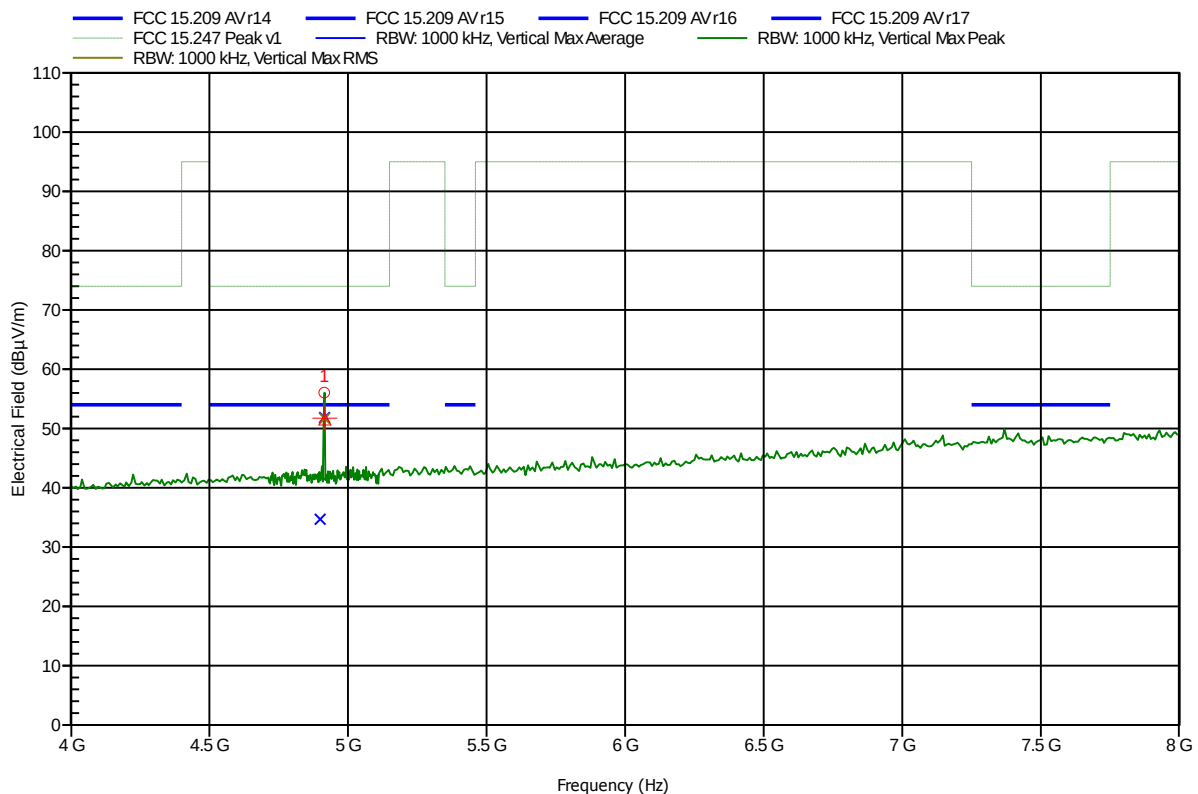


|                        |                         |                            |                                |                        |
|------------------------|-------------------------|----------------------------|--------------------------------|------------------------|
| Frequency<br>4.914 GHz | Peak<br>56.06 dBμV/m    | Peak Limit<br>74 dBμV/m    | Peak Difference<br>-17.94 dB   | Peak Status<br>Pass    |
| Frequency<br>4.914 GHz | Average<br>51.85 dBμV/m | Average Limit<br>54 dBμV/m | Average Difference<br>-2.15 dB | Average Status<br>Pass |

## Spurious emissions according to FCC 15.247

Project number: G0M-1310-3347

Manufacturer: Saxonar GmbH  
 EUT Name: powermeter for bicycle  
 Model: power2max typ: p2mFSA24110-4  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 24°C, Vnom: 3.0 V DC  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 100 cm converted to 3m  
 Mode: TX; GFSK, 2457 MHz  
 Test Date: 2013-12-11  
 Note:

Index 11

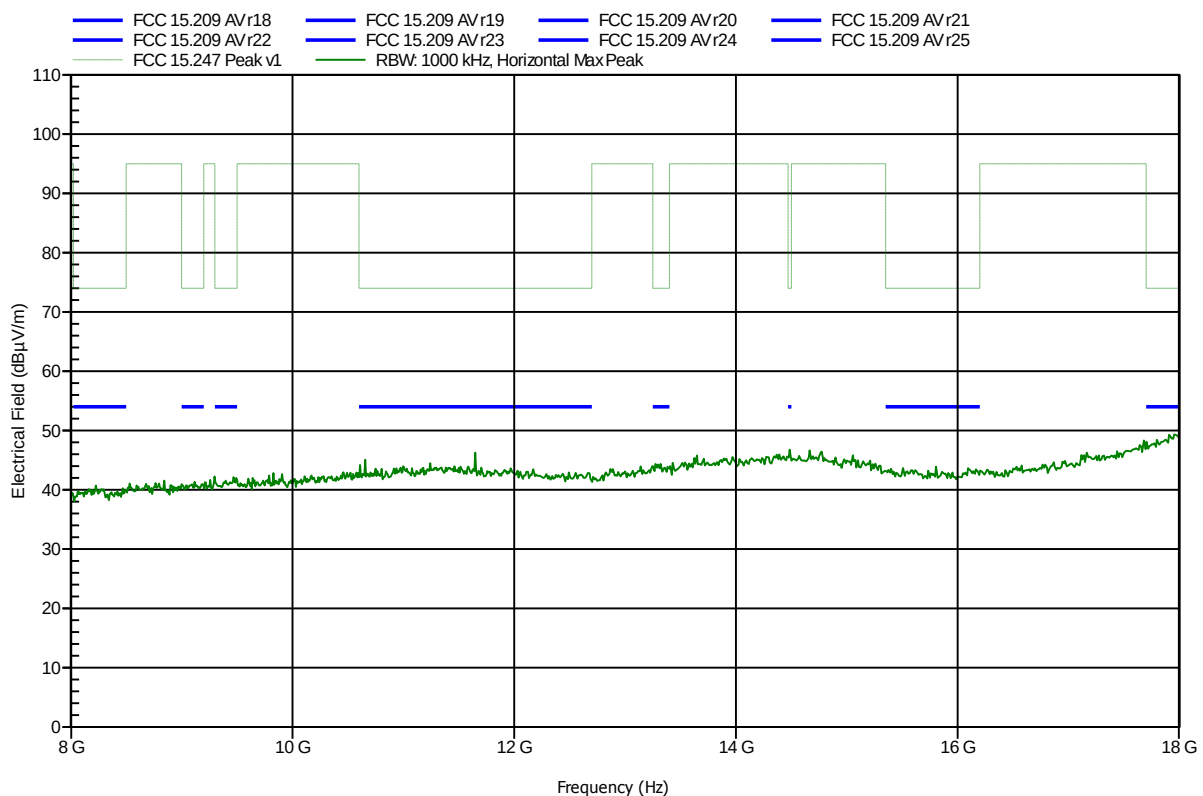

Test Report No.: G0M-1310-3347-TFC247Z-V01


Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

## Spurious emissions according to FCC 15.247

Project number: G0M-1310-3347

Manufacturer: Saxonar GmbH  
 EUT Name: powermeter for bicycle  
 Model: power2max typ: p2mFSA24110-4  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 24°C, Vnom: 3.0 V DC  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 100 cm converted to 3m  
 Mode: TX; GFSK, 2457 MHz  
 Test Date: 2013-12-11  
 Note:

Index 13

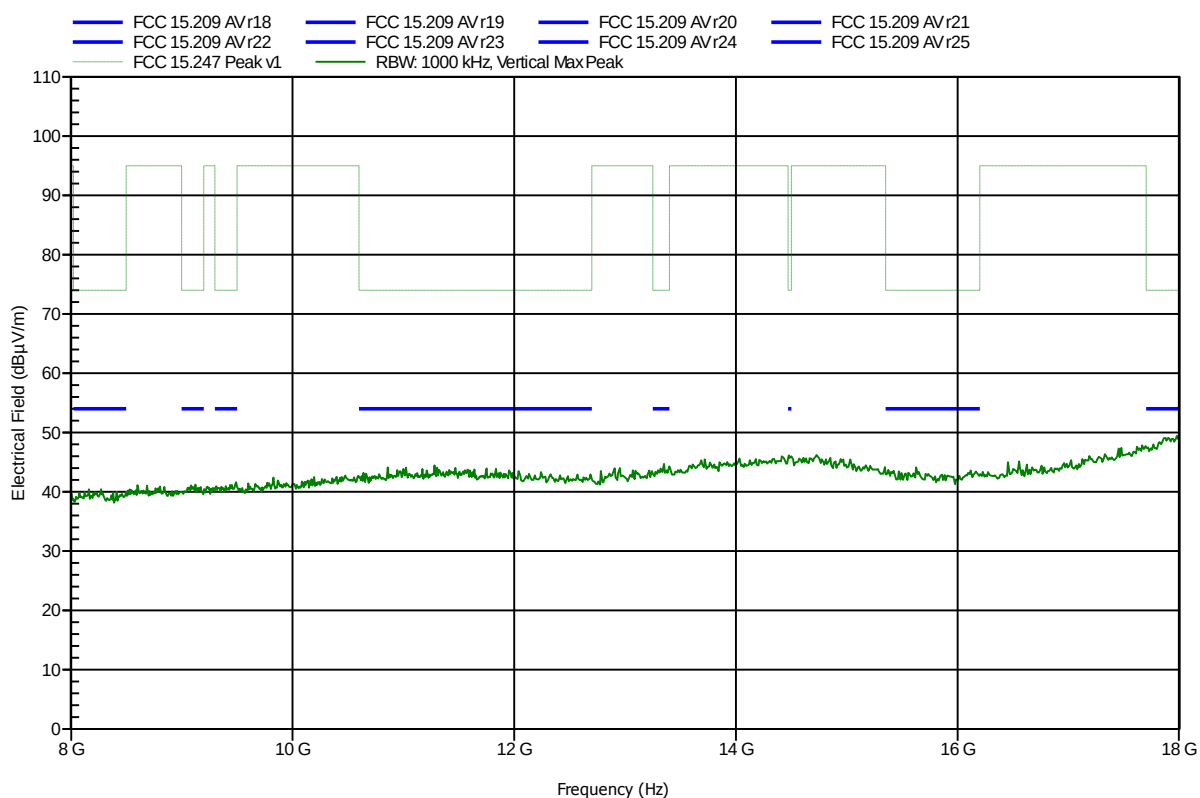

Test Report No.: G0M-1310-3347-TFC247Z-V01


Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

## Spurious emissions according to FCC 15.247

Project number: G0M-1310-3347

Manufacturer: Saxonar GmbH  
 EUT Name: powermeter for bicycle  
 Model: power2max typ: p2mFSA24110-4  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 24°C, Vnom: 3.0 V DC  
 Antenna: Rohde & Schwarz HL 025, Horizontal  
 Measurement distance: 100 cm  
 Mode: TX; GFSK, 2457 MHz  
 Test Date: 2013-12-11  
 Note:

Index 12

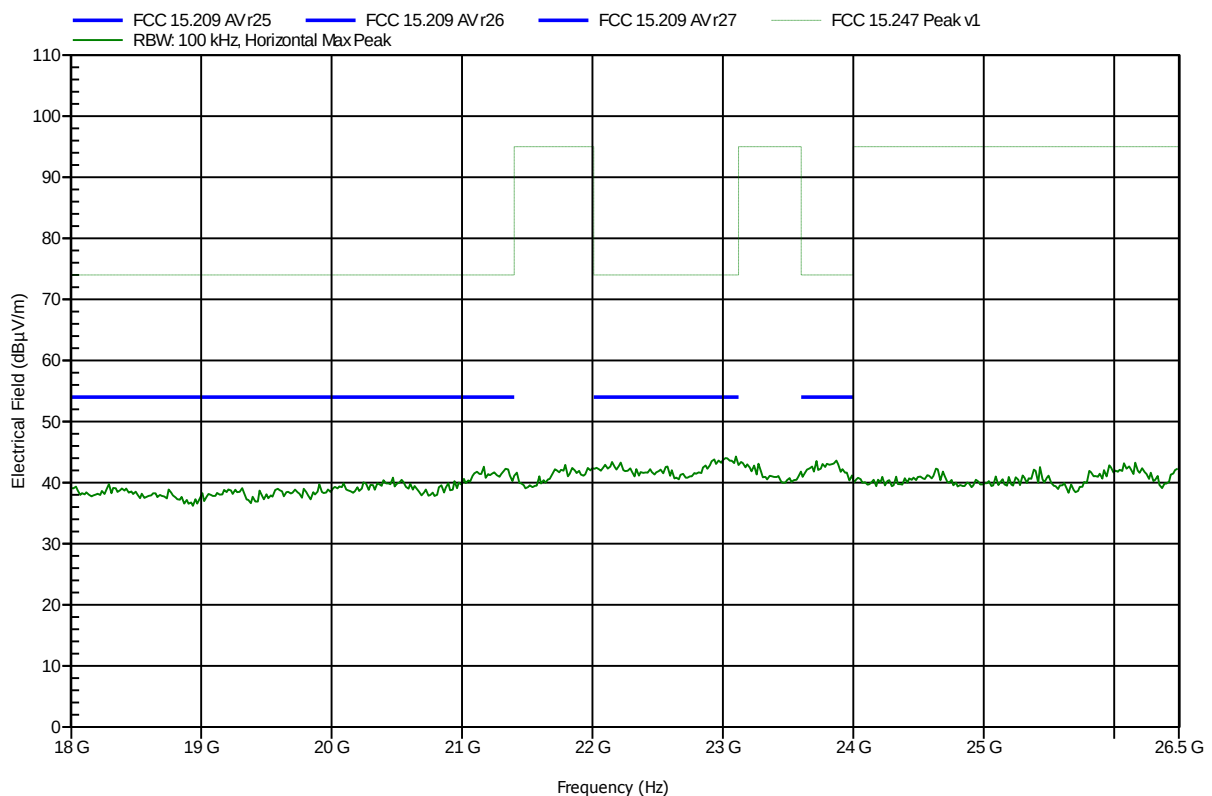

Test Report No.: G0M-1310-3347-TFC247Z-V01


Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

## Spurious emissions according to FCC 15.247

Project number: G0M-1310-3347

Manufacturer: Saxonar GmbH  
 EUT Name: powermeter for bicycle  
 Model: power2max typ: p2mFSA24110-4  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 24°C, Vnom: 3.0 V DC  
 Antenna: Rohde & Schwarz HL 025, Vertical  
 Measurement distance: 100 cm  
 Mode: TX; GFSK, 2457 MHz  
 Test Date: 2013-12-11  
 Note:

Index 14

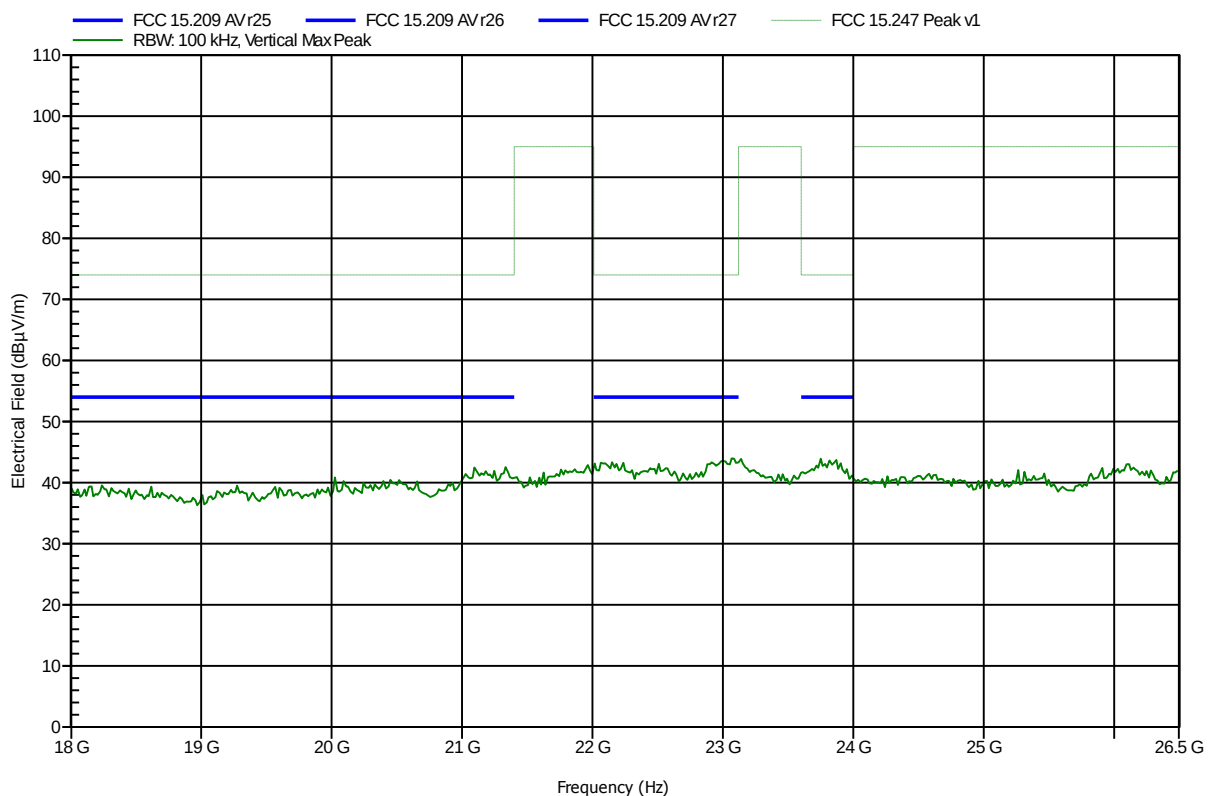

Test Report No.: G0M-1310-3347-TFC247Z-V01

Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany


## ANNEX B Receiver radiated spurious emissions

### Spurious emissions according to RSS-GEN

Project number: G0M-1310-3347

Manufacturer: Saxonar GmbH  
 EUT Name: powermeter for bicycle  
 Model: power2max, typ: p2mFSA24110-4  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.0 V DC  
 Antenna: Rohde & Schwarz HK 116, Horizontal  
 Measurement distance: 3 m  
 Mode: RX; 2457 MHz  
 Test Date: 2013-12-11  
 Note:

Index 8

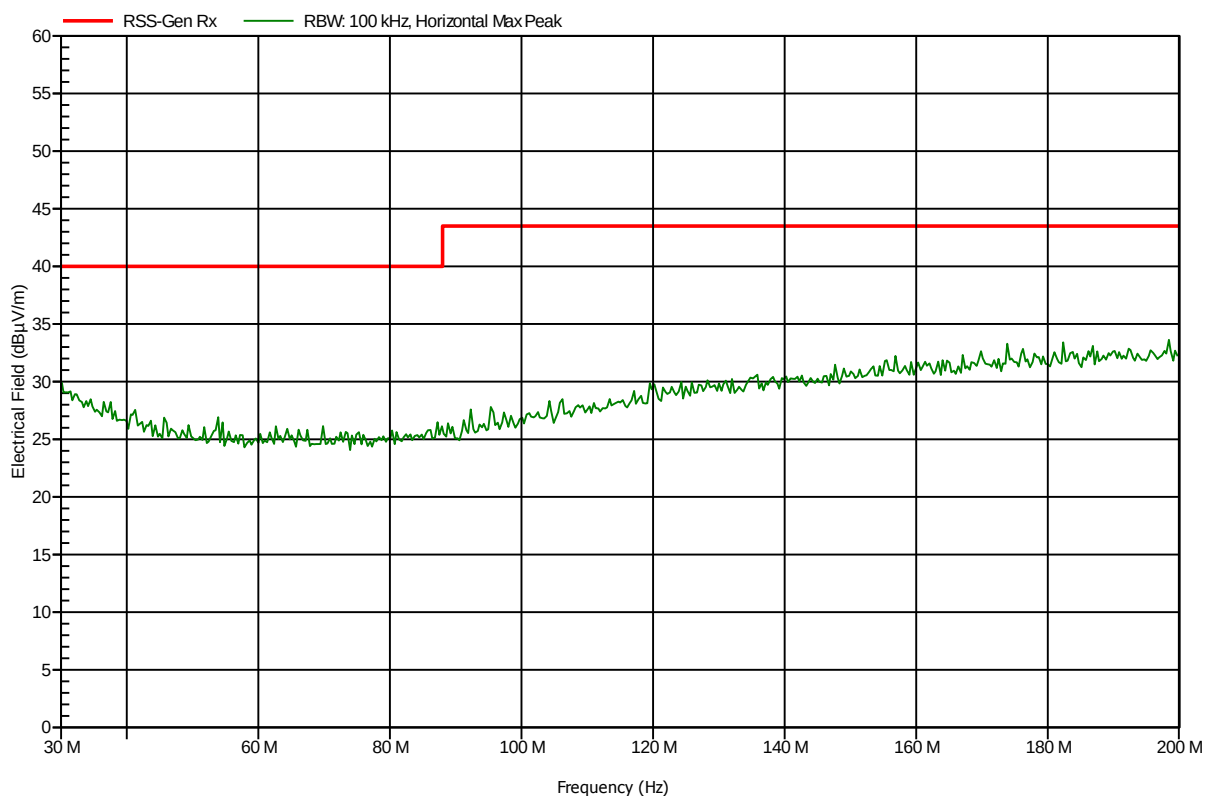


## Spurious emissions according to RSS-GEN

Project number: G0M-1310-3347

Manufacturer: Saxonar GmbH  
 EUT Name: powermeter for bicycle  
 Model: power2max, typ: p2mFSA24110-4  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.0 V DC  
 Antenna: Rohde & Schwarz HK 116, Vertical  
 Measurement distance: 3 m  
 Mode: RX; 2457 MHz  
 Test Date: 2013-12-11  
 Note:

Index 9

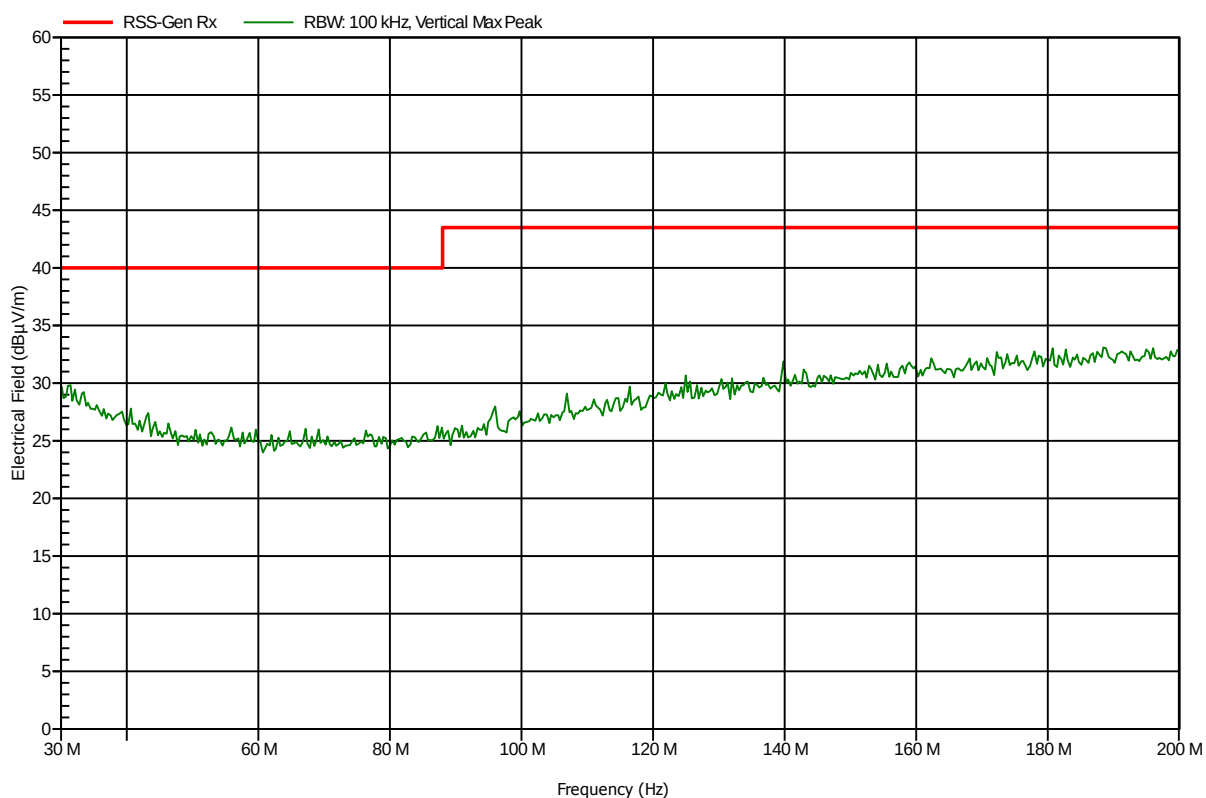


## Spurious emissions according to RSS-GEN

Project number: G0M-1310-3347

Manufacturer: Saxonar GmbH  
 EUT Name: powermeter for bicycle  
 Model: power2max, typ: p2mFSA24110-4  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.0 V DC  
 Antenna: Rohde & Schwarz HL 223, Vertical  
 Measurement distance: 3 m  
 Mode: RX; 2457 MHz  
 Test Date: 2013-12-11  
 Note:

Index 7

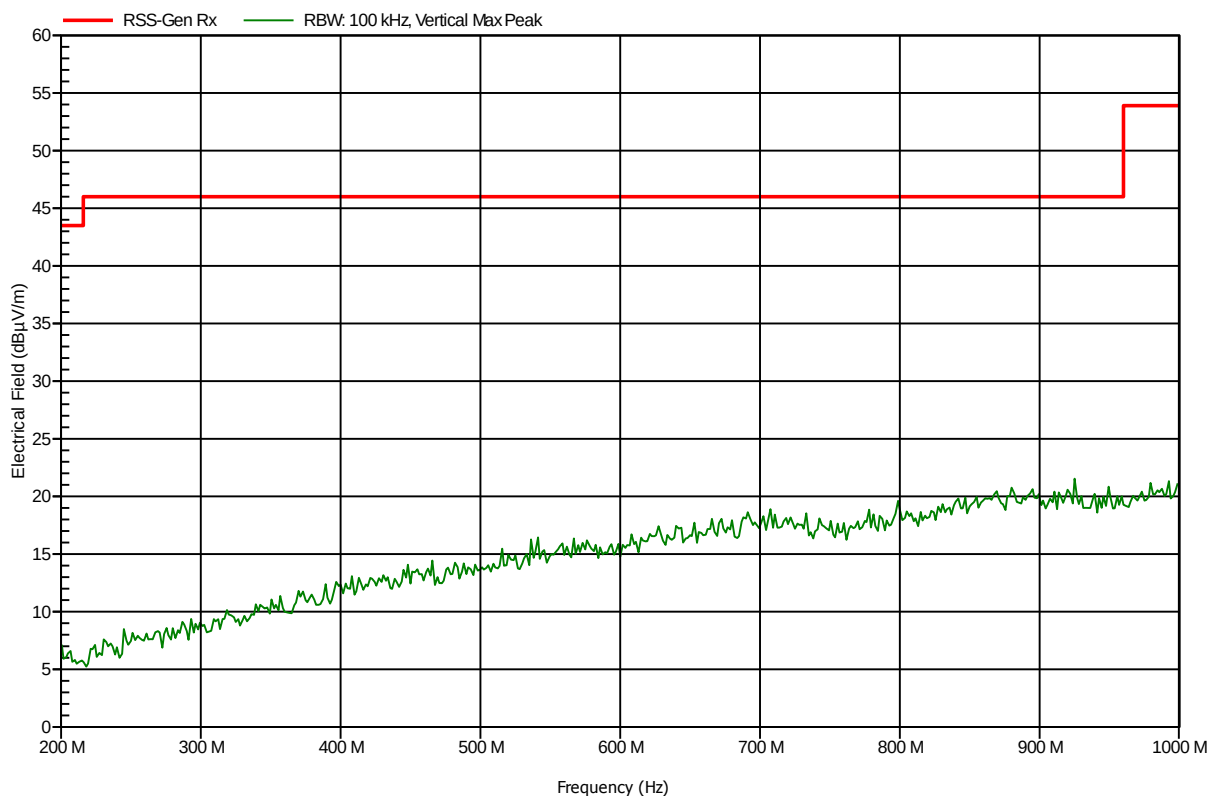


## Spurious emissions according to RSS-GEN

Project number: G0M-1310-3347

|                       |                                    |
|-----------------------|------------------------------------|
| Manufacturer:         | Saxonar GmbH                       |
| EUT Name:             | powermeter for bicycle             |
| Model:                | power2max, typ: p2mFSA24110-4      |
| Test Site:            | Eurofins Product Service GmbH      |
| Operator:             | Mr. Treffke                        |
| Test Conditions:      | Tnom: 25°C, Vnom: 3.0 V DC         |
| Antenna:              | Rohde & Schwarz HL 223, Horizontal |
| Measurement distance: | 3 m                                |
| Mode:                 | RX; 2457 MHz                       |
| Test Date:            | 2013-12-11                         |
| Note:                 |                                    |

Index 5

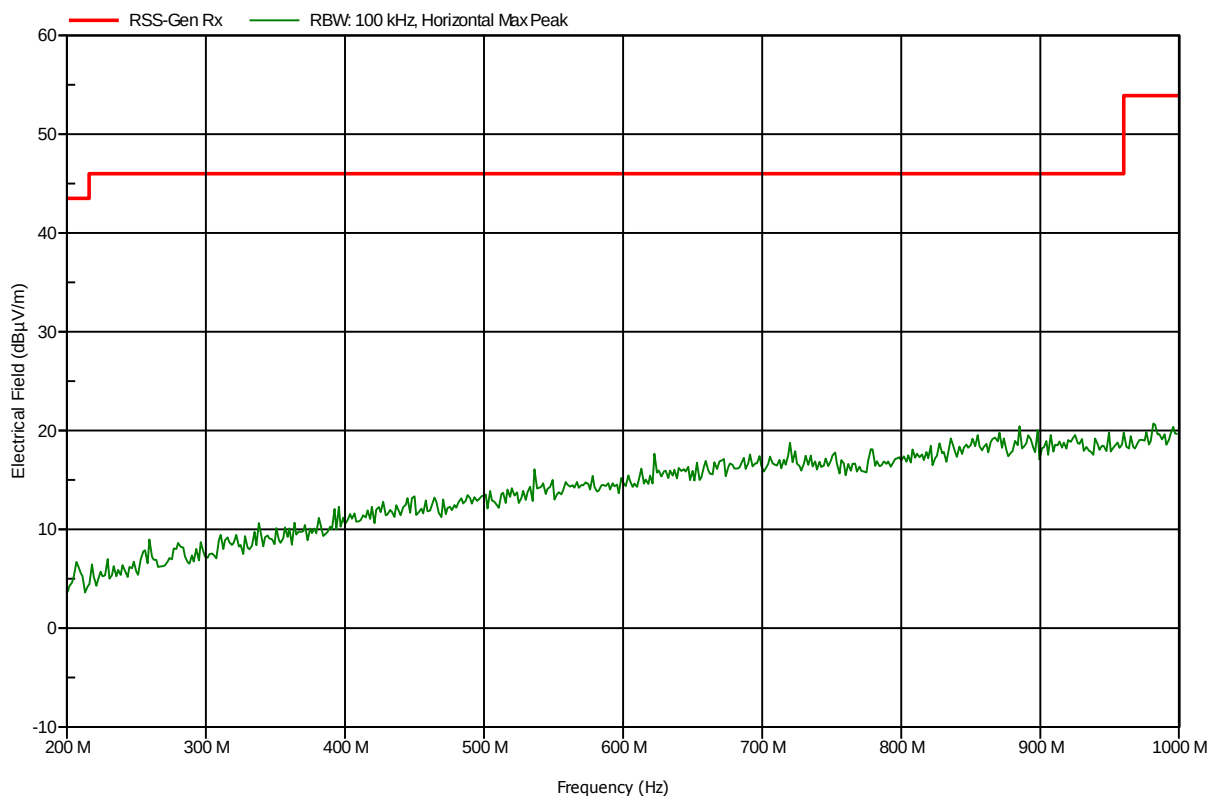

Test Report No.: G0M-1310-3347-TFC247Z-V01


Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

## Spurious emissions according to RSS-GEN

Project number: G0M-1310-3347

Manufacturer: Saxonar GmbH  
 EUT Name: powermeter for bicycle  
 Model: power2max, typ: p2mFSA24110-4  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.0 V DC  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: RX; 2457 MHz  
 Test Date: 2013-12-11  
 Note:

Index 1

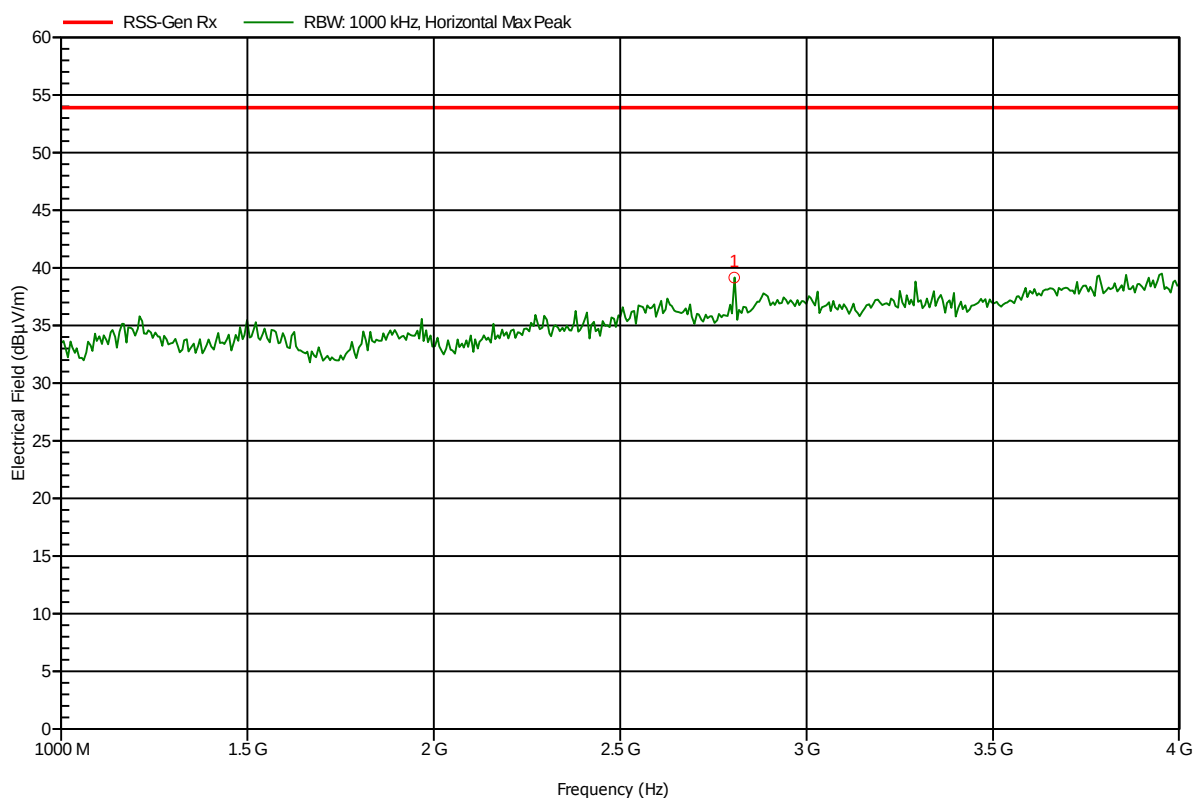

|           |              |             |                 |        |
|-----------|--------------|-------------|-----------------|--------|
| Frequency | Peak         | Peak Limit  | Peak Difference | Status |
| 2.806 GHz | 39.16 dBµV/m | 53.9 dBµV/m | -14.74 dB       | Pass   |

Test Report No.: G0M-1310-3347-TFC247Z-V01


Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

## Spurious emissions according to RSS-GEN

Project number: G0M-1310-3347

Manufacturer: Saxonar GmbH  
 EUT Name: powermeter for bicycle  
 Model: power2max, typ: p2mFSA24110-4  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.0 V DC  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: RX; 2457 MHz  
 Test Date: 2013-12-11  
 Note:

Index 3

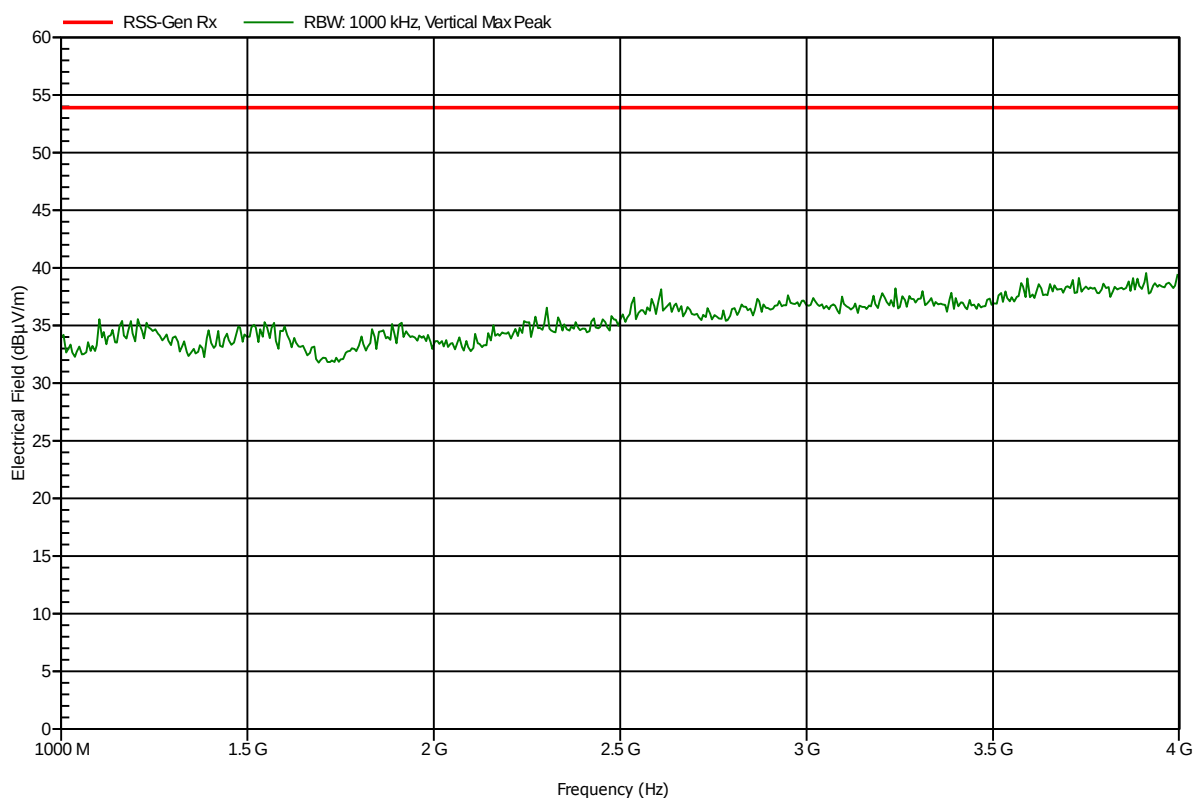


## Spurious emissions according to RSS-GEN

Project number: G0M-1310-3347

Manufacturer: Saxonar GmbH  
 EUT Name: powermeter for bicycle  
 Model: power2max, typ: p2mFSA24110-4  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.0 V DC  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: RX; 2457 MHz  
 Test Date: 2013-12-11  
 Note:

Index 2

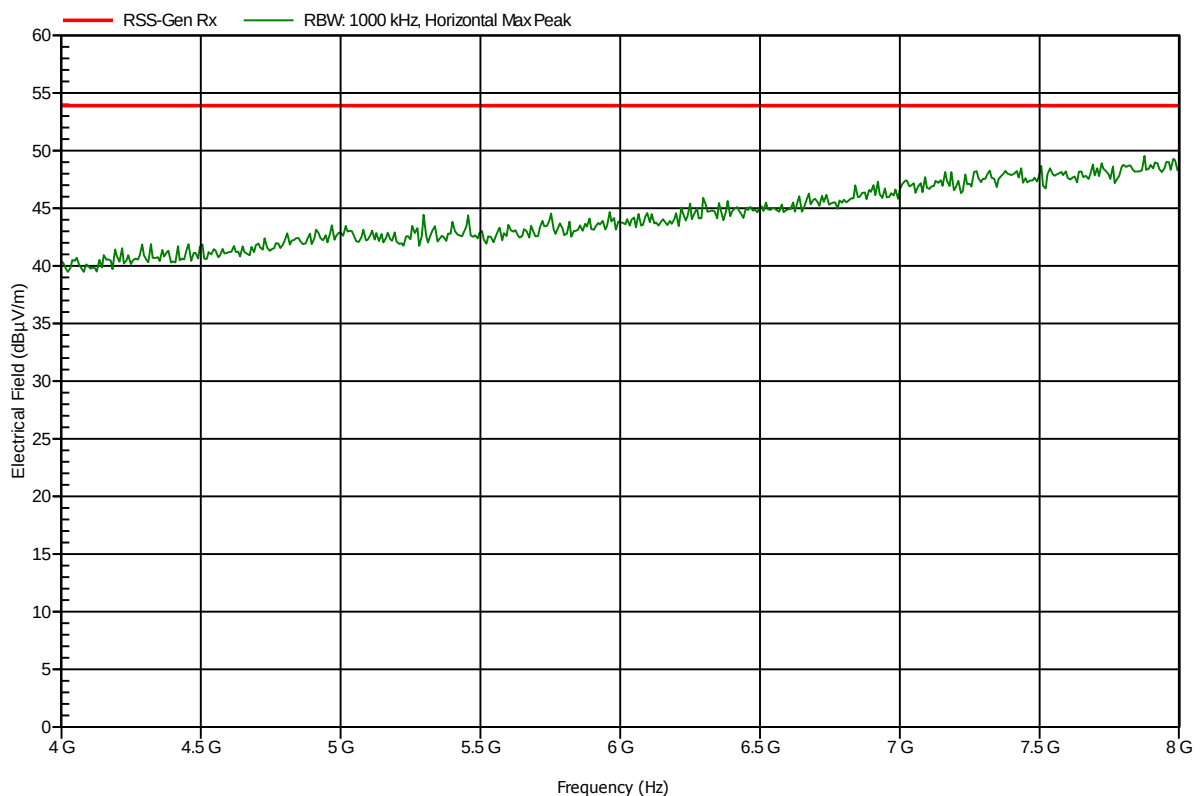

## Spurious emissions according to RSS-GEN

Project number: G0M-1310-3347

Manufacturer: Saxonar GmbH  
 EUT Name: powermeter for bicycle  
 Model: power2max, typ: p2mFSA24110-4  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Treffke  
 Test Conditions: Tnom: 25°C, Vnom: 3.0 V DC  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: RX; 2457 MHz  
 Test Date: 2013-12-11  
 Note:

Index 6

