

WiFi 2.4GHz_Rear_802.11b_Ch 11_0mm

Frequency: 2462 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 22.5°C; Liquid Temperature: 22.2°C
Medium parameters used: $f = 2462$ MHz; $\sigma = 1.828$ S/m; $\epsilon_r = 38.48$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 2024/11/18
- Probe: EX3DV4 - SN7515; ConvF(6.95, 6.84, 7.15) @ 2462 MHz; Calibrated: 2025/1/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI

Area Scan (101x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 1.10 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 22.60 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 0.698 W/kg; SAR(10 g) = 0.291 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 47.1%

Maximum value of SAR (measured) = 1.14 W/kg

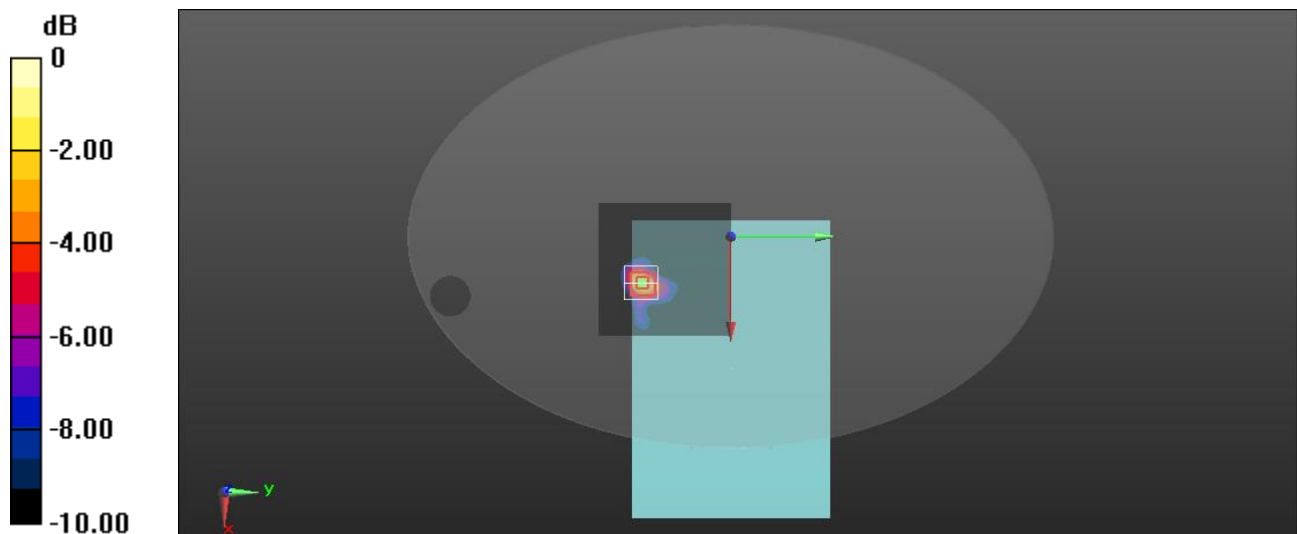

0 dB = 1.14 W/kg = 0.57 dBW/kg

WiFi 5.3GHz_Edge 1_802.11a_Ch 64_0mm


Frequency: 5320 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 22.4°C; Liquid Temperature: 22.1°C
Medium parameters used: $f = 5320 \text{ MHz}$; $\sigma = 4.897 \text{ S/m}$; $\epsilon_r = 36.954$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 2024/11/18
- Probe: EX3DV4 - SN7515; ConvF(5.29, 5.21, 5.45) @ 5320 MHz; Calibrated: 2025/1/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI

Area Scan (81x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
Maximum value of SAR (interpolated) = 1.74 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 14.57 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 3.60 W/kg
SAR(1 g) = 0.882 W/kg; SAR(10 g) = 0.305 W/kg
Smallest distance from peaks to all points 3 dB below = 7.9 mm
Ratio of SAR at M2 to SAR at M1 = 52.6%
Maximum value of SAR (measured) = 1.72 W/kg

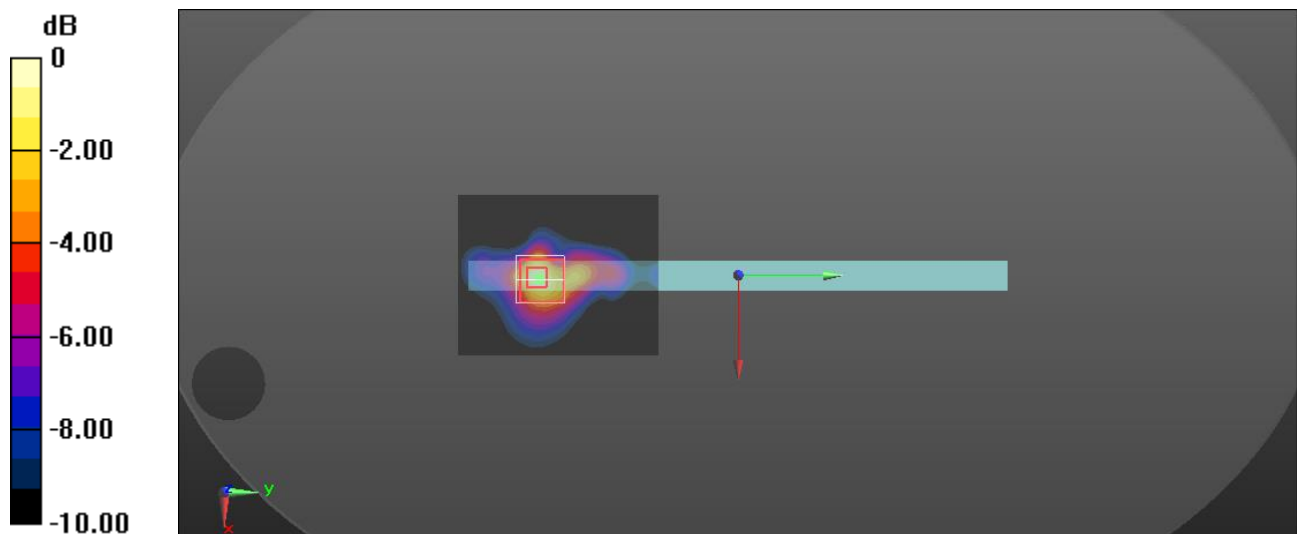

0 dB = 1.72 W/kg = 2.36 dBW/kg

WiFi 5.5GHz_Rear_802.11a_Ch 144_0mm


Frequency: 5720 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 22.4°C; Liquid Temperature: 22.1°C
Medium parameters used: $f = 5720$ MHz; $\sigma = 5.394$ S/m; $\epsilon_r = 35.821$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 2024/11/18
- Probe: EX3DV4 - SN7515; ConvF(4.82, 4.75, 4.96) @ 5720 MHz; Calibrated: 2025/1/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI

Area Scan (101x91x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.532 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 7.468 V/m; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 1.67 W/kg
SAR(1 g) = 0.301 W/kg; SAR(10 g) = 0.089 W/kg
Smallest distance from peaks to all points 3 dB below = 6.4 mm
Ratio of SAR at M2 to SAR at M1 = 46.3%
Maximum value of SAR (measured) = 0.630 W/kg

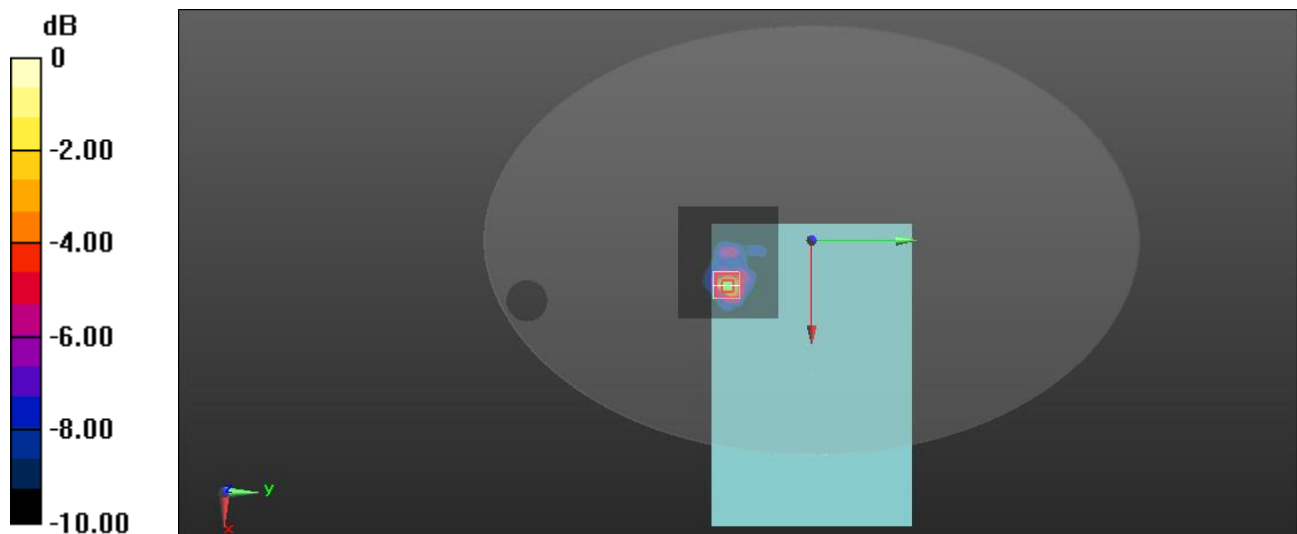

0 dB = 0.630 W/kg = -2.01 dBW/kg

WiFi 5.8GHz_Rear_802.11ac 80_Ch 155_0mm

Frequency: 5775 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 22.4°C; Liquid Temperature: 22.1°C
Medium parameters used (interpolated): $f = 5775$ MHz; $\sigma = 5.457$ S/m; $\epsilon_r = 35.698$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 2024/11/18
- Probe: EX3DV4 - SN7515; ConvF(4.82, 4.75, 4.96) @ 5775 MHz; Calibrated: 2025/1/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI

Area Scan (101x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 2.08 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 18.58 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 5.93 W/kg

SAR(1 g) = 1.22 W/kg; SAR(10 g) = 0.376 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 49.8%

Maximum value of SAR (measured) = 2.48 W/kg

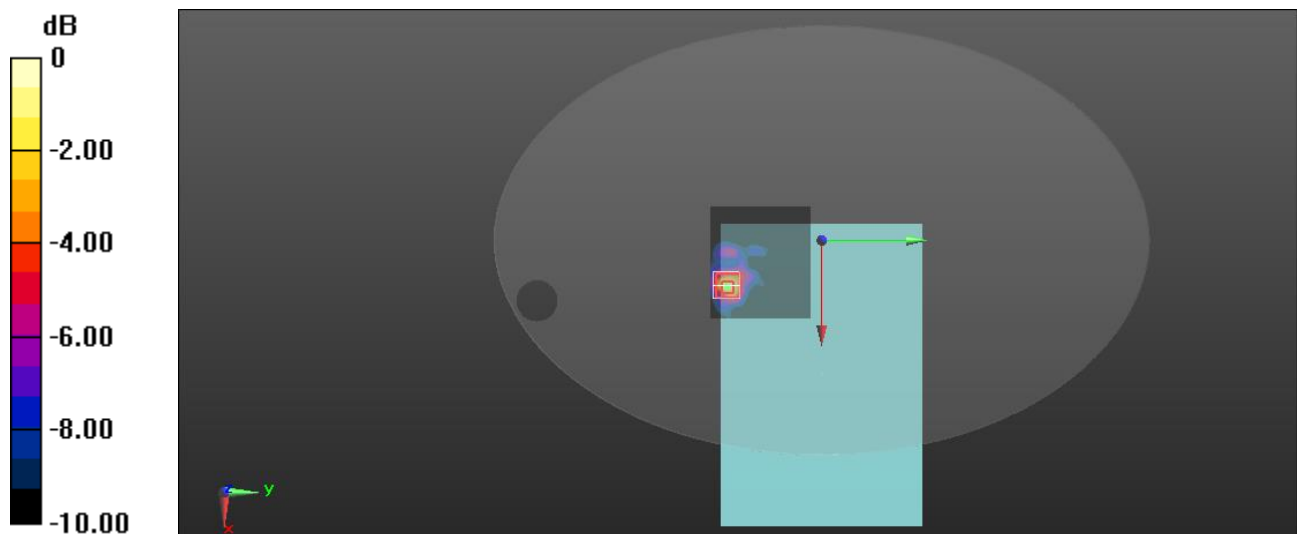

0 dB = 2.48 W/kg = 3.94 dBW/kg

WiFi 5.3GHz_Edge 1_802.11a_Ch 64_0mm_Repeated one


Frequency: 5320 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 22.4°C; Liquid Temperature: 22.1°C
Medium parameters used: $f = 5320$ MHz; $\sigma = 4.897$ S/m; $\epsilon_r = 36.954$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 2024/11/18
- Probe: EX3DV4 - SN7515; ConvF(5.29, 5.21, 5.45) @ 5320 MHz; Calibrated: 2025/1/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI

Area Scan (81x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.49 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 17.38 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 3.44 W/kg
SAR(1 g) = 0.843 W/kg; SAR(10 g) = 0.288 W/kg
Smallest distance from peaks to all points 3 dB below = 7.5 mm
Ratio of SAR at M2 to SAR at M1 = 52.3%
Maximum value of SAR (measured) = 1.66 W/kg

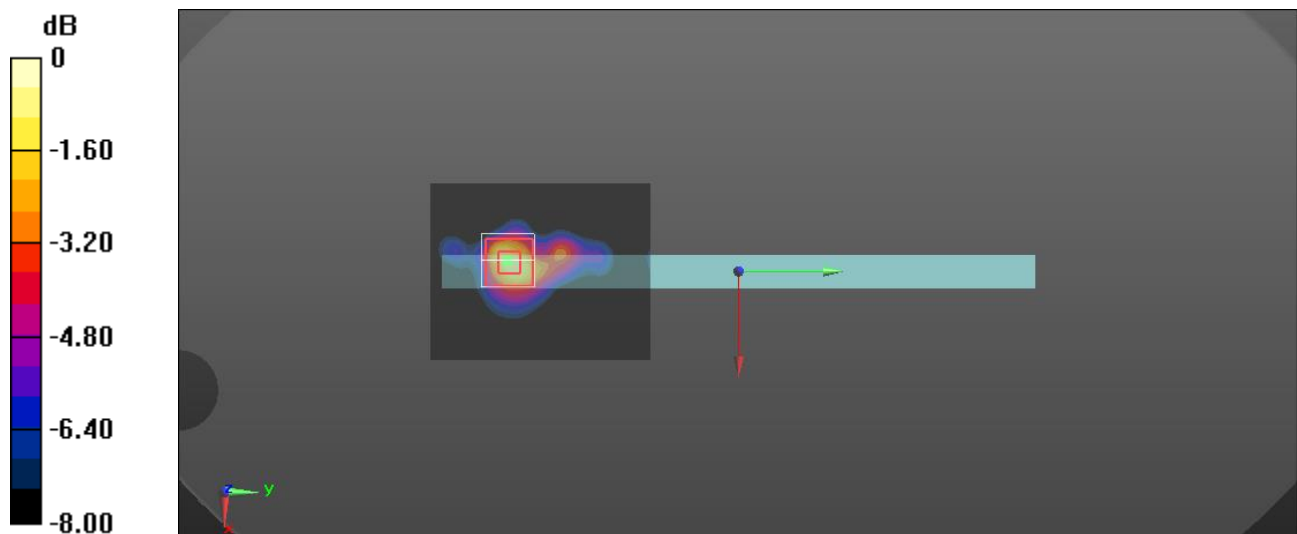

0 dB = 1.66 W/kg = 2.20 dBW/kg

WiFi 5.8GHz_Rear_802.11ac 80_Ch 155_0mm_Repeated one

Frequency: 5775 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 22.4°C; Liquid Temperature: 22.1°C
Medium parameters used (interpolated): $f = 5775$ MHz; $\sigma = 5.457$ S/m; $\epsilon_r = 35.698$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn558; Calibrated: 2024/11/18
- Probe: EX3DV4 - SN7515; ConvF(4.82, 4.75, 4.96) @ 5775 MHz; Calibrated: 2025/1/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI

Area Scan (101x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 2.07 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 19.50 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 5.83 W/kg

SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.366 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 49.6%

Maximum value of SAR (measured) = 2.45 W/kg

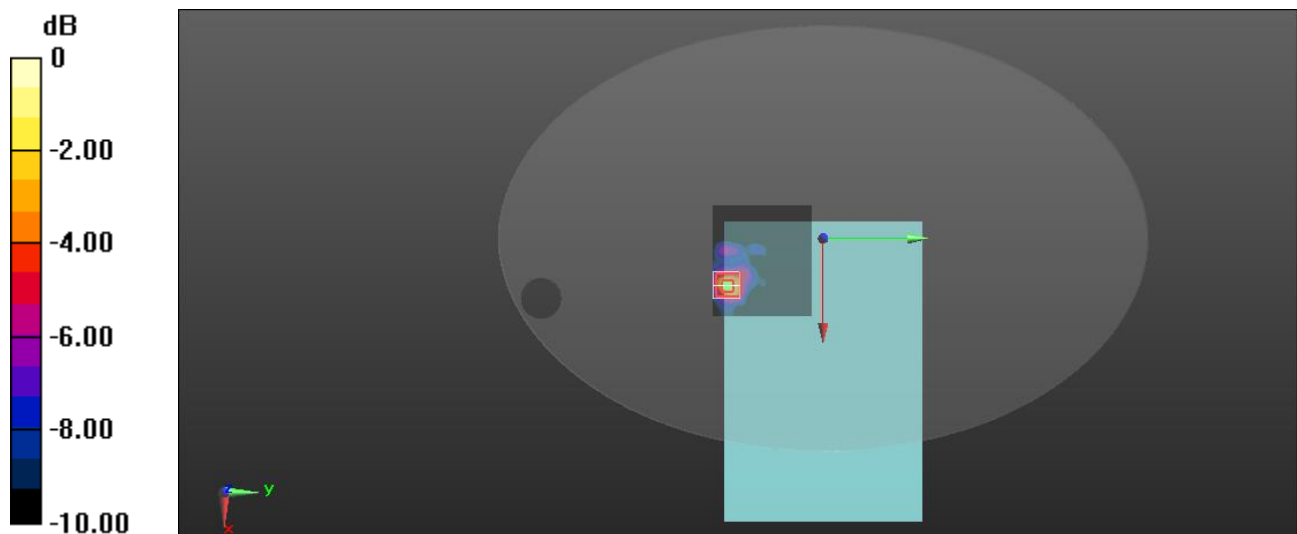

0 dB = 2.45 W/kg = 3.89 dBW/kg