



Wiring diagram

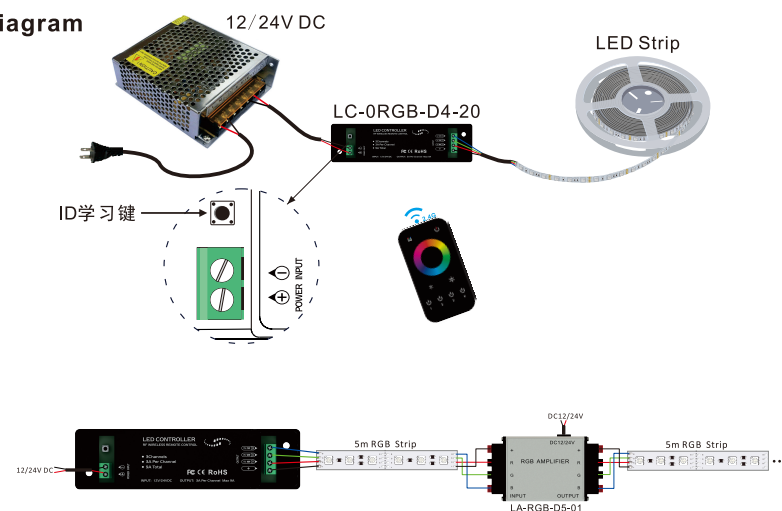

Dimension (unit:mm)

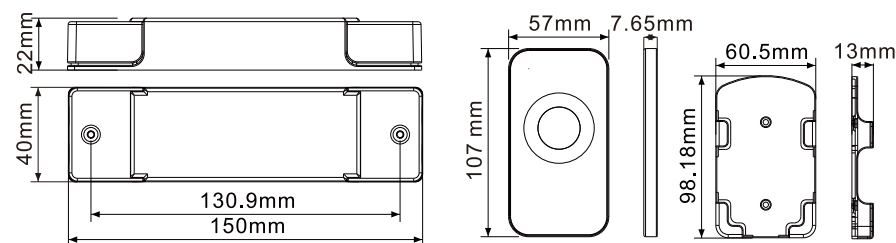

! Notice

- 1.The controller must be installed by professionals;
2. When installing the controller, first power off, then connect LED products with controller, after doing the right, then power on it;
- 3.Good cooling conditions will extend lifetime of controller, please install the product in well-ventilated environment;
- 4.Ensure input voltage conform to voltage range requirement of product;
- 5.Wire size used must be sufficiently load connected and make sure wires are securely connected;
- 6.Before power on, ensure that all the wiring is correct to avoid errors caused by wiring lamps damage;
- 7.If a failure occurs,don't repair without permission,please contact the manufacturer

©LED Controller

2.4G Wireless Grouping Controller INSTRUCTIONS

LC-0RGB-D4-20



Description

The controller adopt high performance processor,User can choose color, mode and change speed via 2.4G touch sliding ring wireless grouping remote controller; exquisite dimming, no flicker. A remote controller can control multiple sets of controller, and single set controller has synchronous function,can realized synchronous effect.

Features


- 1.Max. control distance of controller can be up to 100m(in open condition);
- 2.Automatic remember current change state;
- 3.Each remote controller can control multiple controllers.



To ensure properly use and install the light, please carefully read and keep this instrucion manual for future reference.

Function description of remote controller

1.Key description of remote controller



2. Matching steps of remote controller

After power on controller, short press , press any key of sliding ring on remote controller, then match success.

3.Grouping control steps of remote controller

- (1) Power on the first controller, short press  on controller, and touch  on remote controller, then remote controller and the first controller are matched the first group; if you want to add more controllers in the group, just repeat above operation.
- (2) Get the second controller, power on, short press  on controller, touch  on remote controller, then the remote controller and the second controller are matched the second group; if you want to add more controllers in the group, just repeat above operation.
- (3) There are 4 groups of controller, if you want to control the first group, only touch , then you can perform dimming operation on the first group; if you want to control the second group, only touch , then you can perform dimming operation on the second group; if you want to control group1, group2, group3, group4 together, touch , then you can perform dimming operation on all controllers of the 4 groups.

Color modes

● 2.4G wireless touch sliding ring remote controller(LR-ORGB-D1-03)

1. static red
2. static green
3. static blue
4. static yellow
5. static purple
6. static cyan
7. static white
8. red-green jump change
9. red-blue jump change
10. green-blue jump change
11. yellow-cyan jump change
12. yellow-purple jump change
13. cyan-purple jump change
14. red-green-blue jump change
15. yellow-purple-cyan jump change
16. red-green-blue-yellow-purple-cyan-white jump change
17. red gradual change
18. green gradual change
19. blue gradual change
20. yellow gradual change
21. purple gradual change
22. cyan gradual change
23. white gradual change
24. red-green gradual change
25. red-blue gradual change
26. green-blue gradual change
27. yellow-cyan gradual change
28. yellow-purple gradual change
29. cyan-purple gradual change
30. red-green-blue gradual change
31. yellow-purple-cyan gradual change
32. red-green-blue-yellow-purple-cyan-white gradual change
33. red-green mixed color gradual change
34. red-blue mixed color gradual change
35. green-blue mixed color gradual change
36. red-green-blue mixed color gradual change
37. red flicker change
38. green flicker change
39. blue flicker change
40. yellow flicker change
41. purple flicker change
42. cyan flicker change
43. white flicker change
44. red green flicker change
45. red blue flicker change
46. green blue flicker change
47. yellow cyan flicker change
48. yellow purple flicker change
49. cyan purple flicker change
50. red-green-blue flicker change
51. yellow-purple-cyan flicker change
52. red-green-blue-yellow-purple-cyan-white flicker change

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.