

RF TEST REPORT



Report No.: 15050004-FCC-R2

Supersede Report No.: N/A

Applicant	b mobile HK Limited	
Product Name	Mobile phone	
Model No.	AX710	
Serial No.	N/A	
Test Standard	FCC Part 15.247: 2014, ANSI C63.10: 2009	
Test Date	March 24 to March 30, 2015	
Issue Date	April 20, 2015	
Test Result	☒ Pass ☐ Fail	
Equipment complied with the specification ☒		
Equipment did not comply with the specification ☐		
		
Wiky Jam Test Engineer	Chris You Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	15050004-FCC-R2
Page	3 of 52

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	8
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	9
6.1 ANTENNA REQUIREMENT	9
6.2 CHANNEL SEPARATION	10
6.3 20DB BANDWIDTH	14
6.4 PEAK OUTPUT POWER	18
6.5 NUMBER OF HOPPING CHANNEL	22
6.6 TIME OF OCCUPANCY (DWEEL TIME)	24
6.7 BAND EDGE	28
6.8 AC POWER LINE CONDUCTED EMISSIONS	33
6.9 RADIATED SPURIOUS EMISSIONS	37
ANNEX A. TEST INSTRUMENT	42
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS	43
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT	48
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	51
ANNEX E. DECLARATION OF SIMILARITY	52

1. Report Revision History

Report No.	Report Version	Description	Issue Date
15050004-FCC-R2	NONE	Original	April 20, 2015

2. Customer information

Applicant Name	b mobile HK Limited
Applicant Add	Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street; Kwai Chung;New Territories; Hong Kong
Manufacturer	b mobile HK Limited
Manufacturer Add	Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street; Kwai Chung;New Territories; Hong Kong

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

4. Equipment under Test (EUT) Information

Description of EUT: Mobile phone

Main Model: AX710

Serial Model: N/A

Date EUT received: March 20, 2015

Test Date(s): March 24 to March 30, 2015

Equipment Category : DSS

Antenna Gain:

GSM850: 2.8 dBi
PCS1900: 3.2 dBi
UMTS-FDD Band V: 3.1 dBi
UMTS-FDD Band II: 3.1 dBi
Bluetooth: 3.1 dBi
WiFi: 3.2 dBi

Type of Modulation:

GSM / GPRS: GMSK
EGPRS: GMSK, 8PSK
UMTS-FDD: QPSK, 16QAM
802.11b/g/n: DSSS, OFDM
Bluetooth: GFSK, π /4DQPSK, 8DPSK

RF Operating Frequency (ies):

GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz
PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz
UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz
UMTS-FDD Band II TX: 1852.4 ~ 1907.6 MHz;
RX: 1932.4 ~ 1987.6 MHz
WiFi: 802.11b/g/n(20M): 2412-2462 MHz
Bluetooth: 2402-2480 MHz

Max. Output Power: GFSK: 7.227 dBm

Test Report	15050004-FCC-R2
Page	7 of 52

Number of Channels:	GSM 850: 124CH
	PCS1900: 299CH
	UMTS-FDD Band V : 102CH
	UMTS-FDD Band II : 277CH
	WIFI :802.11b/g/n(20M): 11CH
	Bluetooth: 79CH
Port:	Power Port, Earphone Port, USB Port
Input Power:	Battery:
	Model: 4502
	Spec: 3.7V 1600mAh 5.92Wh
	Limited charger voltage: 4.20V
	Adapter:
	Input: AC 100-240V; 50/60Hz 0.15A
	Output: DC 5.0V; 500mA
Trade Name :	Bmobile
GPRS/EGPRS Multi-slot class	8/10/12
FCC ID:	ZSW-30-008

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(b)(1)	Peak Output Power	Compliance
§15.247(a)(1)(iii)	Number of Hopping Channel	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(d)	Band Edge	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. Measurements, Examination And Derived Results

6.1 Antenna Requirement

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 2 antennas:

A permanently attached PIFA antenna for Bluetooth the gain is 3.1 dBi , for WIFI the gain is 3.2 dBi.

A permanently attached PIFA antenna for GSM and UMTS, the gain is 2.8 dBi for GSM850, the gain is 3.2 dBi for PCS1900, the gain is 3.1 dBi for UMTS-FDD Band V and UMTS-FDD Band II .


The antenna meets up with the ANTENNA REQUIREMENT.

Result: Compliance.

6.2 Channel Separation

Temperature	25°C
Relative Humidity	58%
Atmospheric Pressure	1008mbar
Test date :	March 27, 2015
Tested By :	Wiky Jam

Requirement(s):

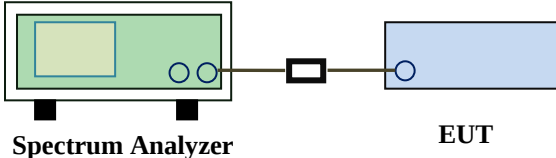Spec	Item	Requirement	Applicable
§ 15.247(a)(1)	a)	Channel Separation < 20dB BW and 20dB BW < 25KHz ; Channel Separation Limit=25KHz Chanel Separation < 20dB BW and 20dB BW > 25kHz ; Channel Separation Limit=2/3 20dB BW	
Test Setup	 Spectrum Analyzer EUT		
Test Procedure	The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings: - The EUT must have its hopping function enabled - Span = wide enough to capture the peaks of two adjacent channels - Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span - Video (or Average) Bandwidth (VBW) ≥ RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.		

Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Channel Separation measurement result

Type/ Modulation	CH	CH Freq (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation GFSK	Low Channel	2402	1.005	0.689	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.005	0.690	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.005	0.964	Pass
	Adjacency Channel	2479			
CH Separation $\pi/4$ DQPSK	Low Channel	2402	1.005	0.859	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.005	0.858	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.005	0.857	Pass
	Adjacency Channel	2479			
CH Separation 8DPSK	Low Channel	2402	1.005	0.861	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.005	0.861	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.005	0.863	Pass
	Adjacency Channel	2479			

Test Plots

Channel Separation measurement result



GFSK - Low Channel



GFSK - Middle Channel



GFSK - High Channel



$\pi/4$ DPSK - Low Channel



$\pi/4$ DQPSK - Middle Channel



$\pi/4$ DQPSK - High Channel



8DPSK - Low Channel



8DPSK - Middle Channel




8DPSK - High Channel

6.3 20dB Bandwidth

Temperature	25°C
Relative Humidity	58%
Atmospheric Pressure	1008mbar
Test date :	March 27, 2015
Tested By :	Wiky Jam

Requirement(s):

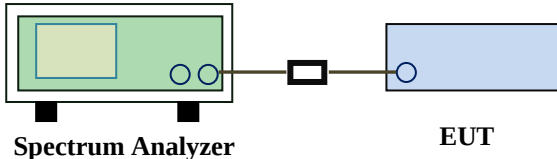Spec	Item	Requirement	Applicable
§15.247(a) (1)	a)	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.	☒
Test Setup	 Spectrum Analyzer EUT		
Test Procedure	The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings: - Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel - RBW $\geq$ 1% of the 20 dB bandwidth - VBW $\geq$ RBW - Sweep = auto - Detector function = peak - Trace = max hold. - The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference		

Test Report	15050004-FCC-R2
Page	15 of 52

	marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A


Test Plot ☒ Yes (See below) ☐ N/A


Measurement result

Modulation	CH	CH Freq (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
GFSK	Low	2402	1.034	0.903
	Mid	2441	1.035	0.901
	High	2480	0.964	0.898
$\pi/4$ DQPSK	Low	2402	1.288	1.1777
	Mid	2441	1.287	1.1723
	High	2480	1.285	1.1691
8-DPSK	Low	2402	1.291	1.1852
	Mid	2441	1.292	1.1850
	High	2480	1.294	1.1809

Test Plots

20dB Bandwidth measurement result

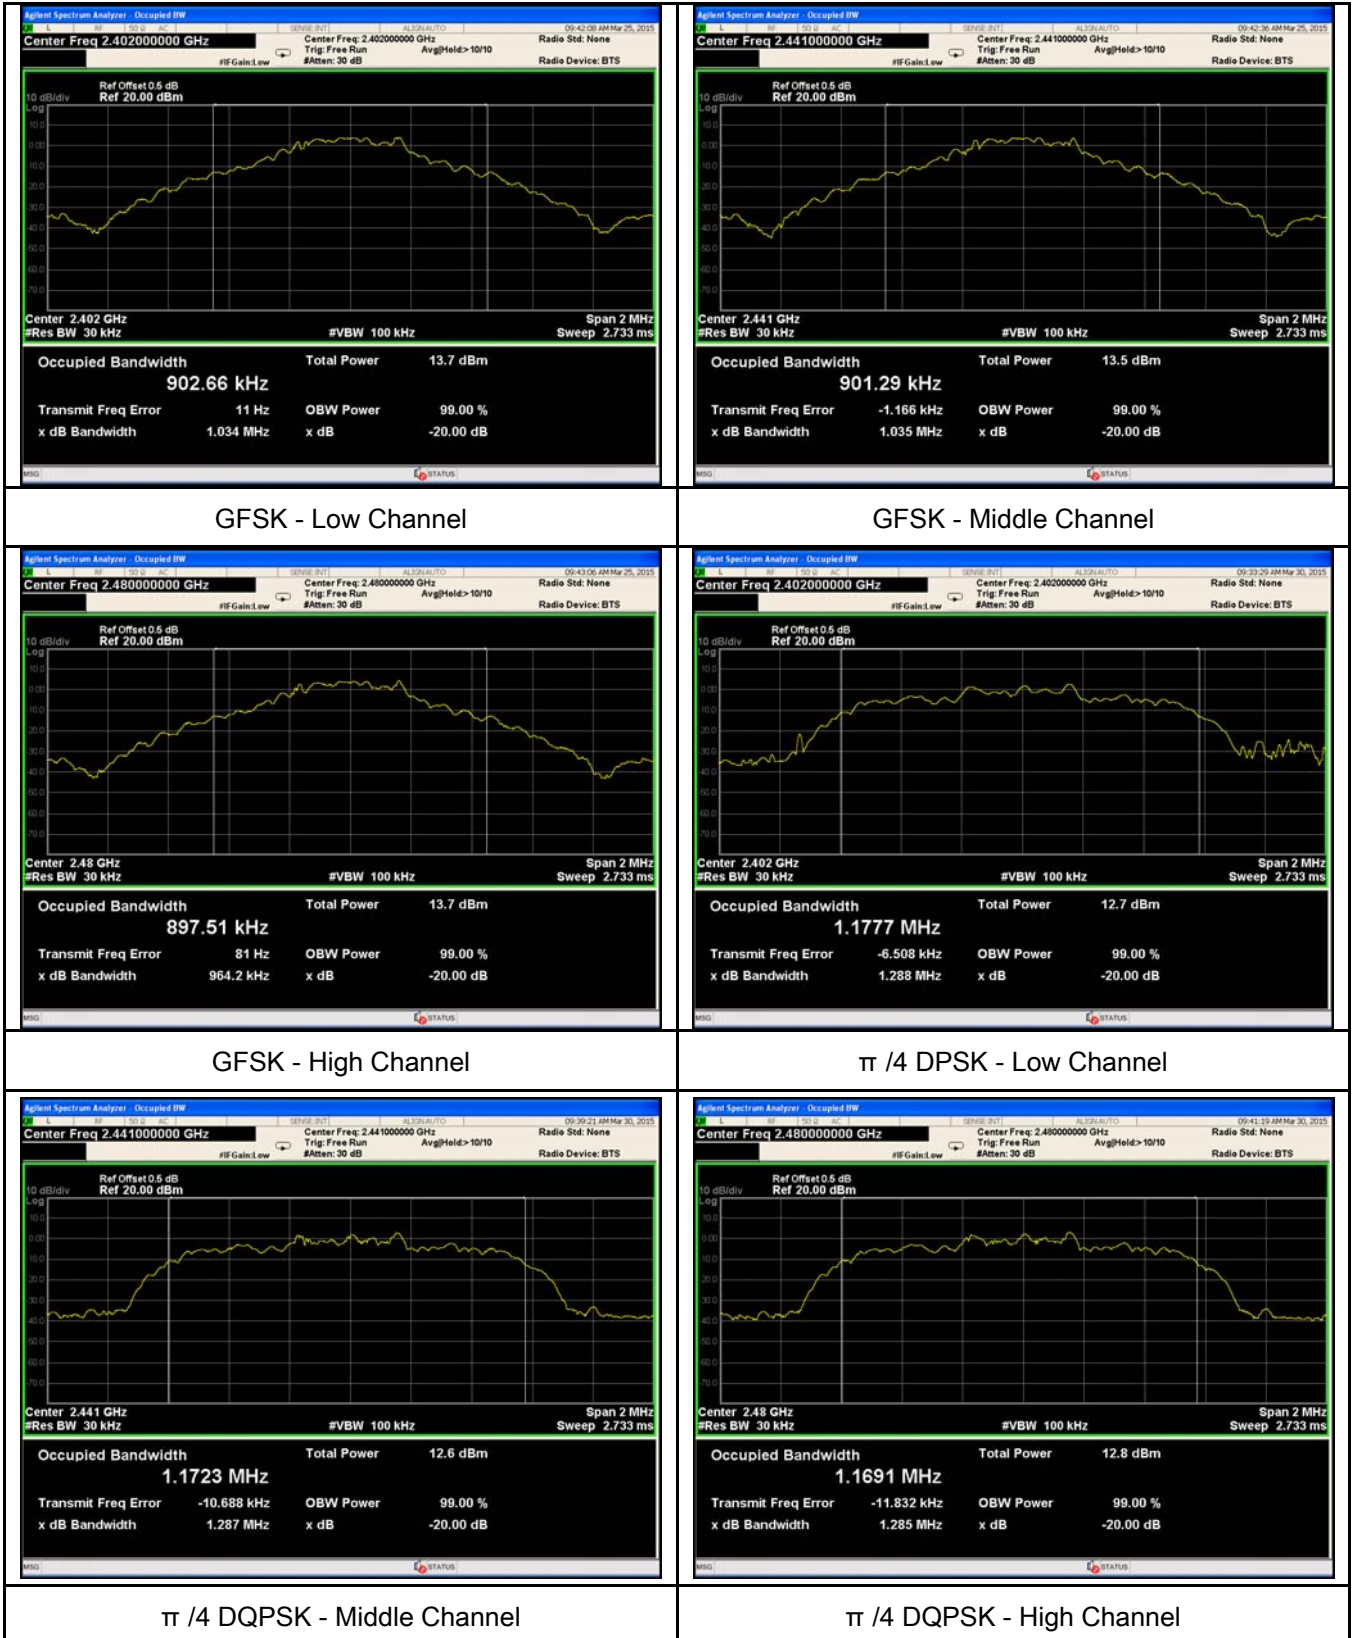


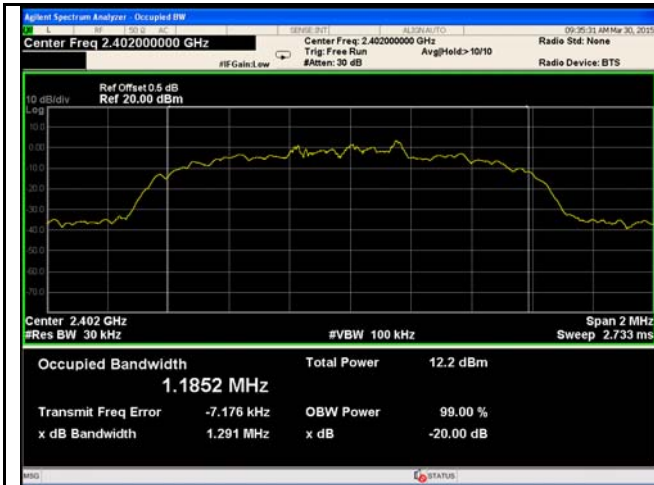

8DPSK - Low Channel



8DPSK - Middle Channel

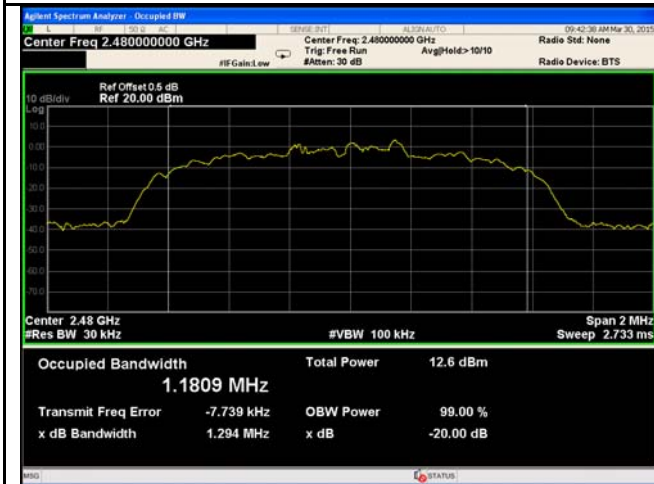


8DPSK - High Channel

6.4 Peak Output Power

Temperature	21°C
Relative Humidity	52%
Atmospheric Pressure	1011mbar
Test date :	March 30, 2015
Tested By :	Wiky Jam

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(b) (2)	a)	FHSS in 2400-2483.5MHz with ≥ 75 channels: ≤ 1 Watt	☒
	b)	FHSS in 5725-5850MHz: ≤ 1 Watt	☐
	c)	For all other FHSS in the 2400-2483.5MHz band: ≤ 0.125 Watt.	☒
	d)	FHSS in 902-928MHz with ≥ 50 channels: ≤ 1 Watt	☐
	e)	FHSS in 902-928MHz with ≥ 25 & < 50 channels: ≤ 0.25 Watt	☐
	f)	DSSS in 902-928MHz, 2400-2483.5MHz, 5725-5850MHz: ≤ 1 Watt	☐

Test Setup	 Spectrum Analyzer EUT
------------	--

Test Procedure	The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings: - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel - RBW $>$ the 20 dB bandwidth of the emission being measured - VBW $\geq$ RBW - Sweep = auto - Detector function = peak - Trace = max hold
----------------	--

Test Report	15050004-FCC-R2
Page	19 of 52

	- Allow the trace to stabilize. - Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (see the note above regarding external attenuation and cable loss). The limit is specified in one of the subparagraphs of this Section. Submit this plot. A peak responding power meter may be used instead of a spectrum analyzer.
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A
 Test Plot ☒ Yes (See below) ☐ N/A

Peak Output Power measurement result


Type	Modulation	CH	Freq (MHz)	Conducted Power (dBm)	Limit (mW)	Result
Output power	GFSK	Low	2402	6.813	125	Pass
		Mid	2441	7.117	125	Pass
		High	2480	7.215	1000	Pass
	$\pi/4$ DQPSK	Low	2402	6.651	125	Pass
		Mid	2441	6.964	125	Pass
		High	2480	7.106	125	Pass
	8-DPSK	Low	2402	6.742	125	Pass
		Mid	2441	7.068	125	Pass
		High	2480	7.227	125	Pass

Test Plots


Output Power measurement result




GFSK Output power - Low CH 2402

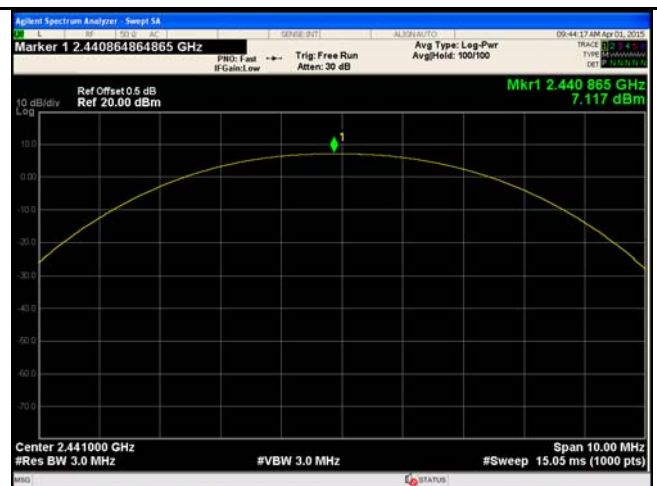

GFSK Output power - Mid CH 2441

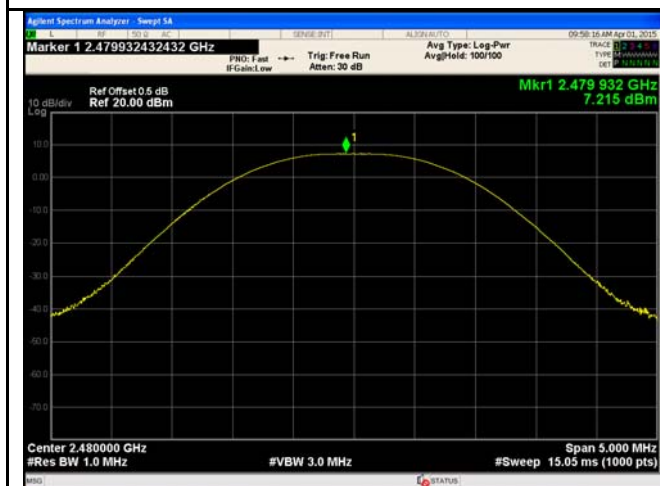


GFSK Output power - High CH 2480

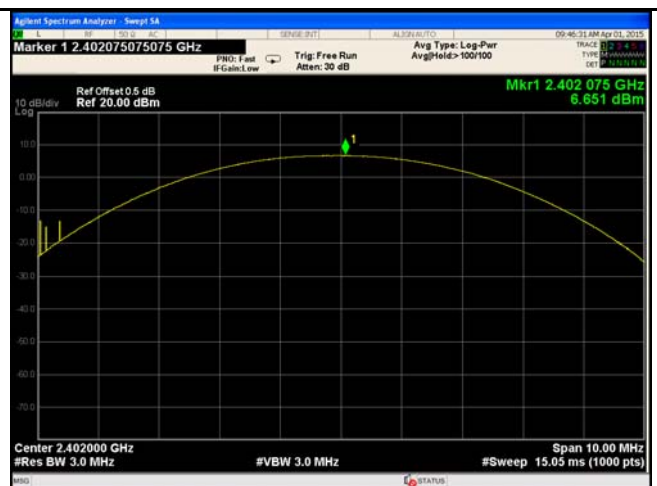


$\pi/4$ DQPSK Output power - Low CH 2402




$\pi/4$ DQPSK Output power - Mid CH 2441

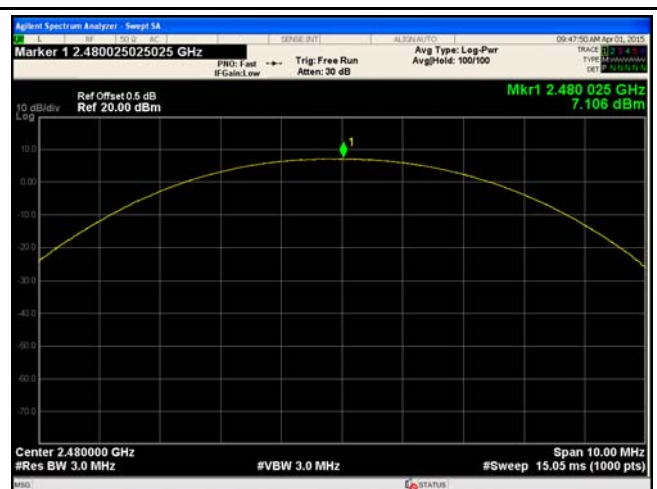


$\pi/4$ DQPSK Output power - High CH 2480

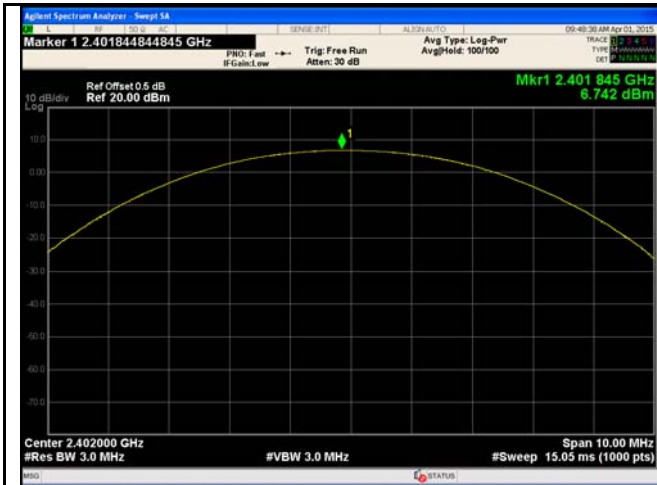

8DPSK Output power - Low CH 2402

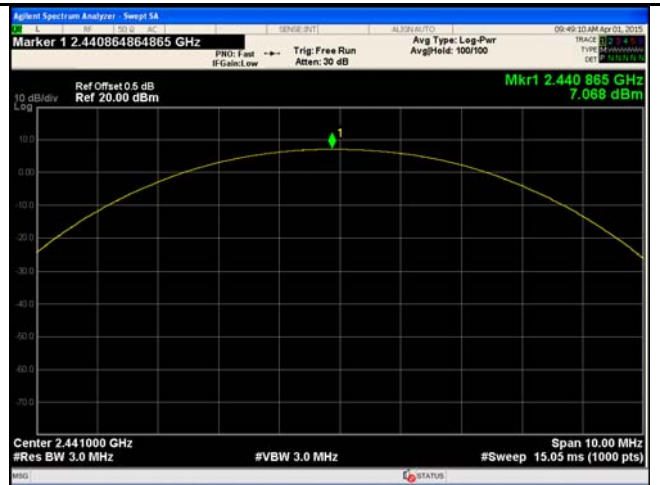

8DPSK Output power - Mid CH 2441

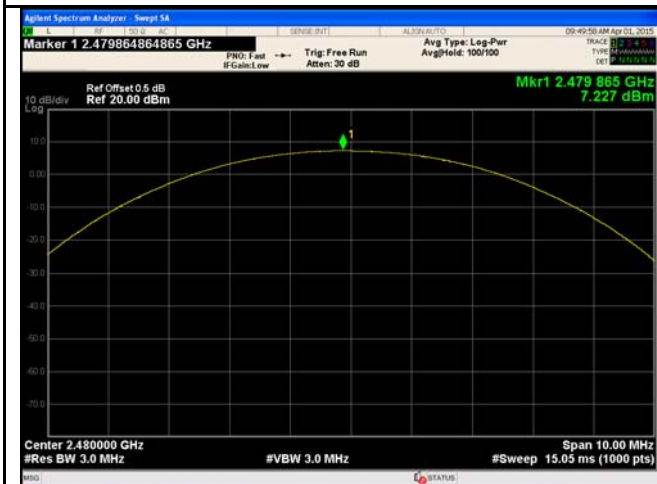


8DPSK Output power - High CH 2480

6.5 Number of Hopping Channel

Temperature	21°C
Relative Humidity	52%
Atmospheric Pressure	1011mbar
Test date :	March 30, 2015
Tested By :	Wiky Jam

Requirement(s):

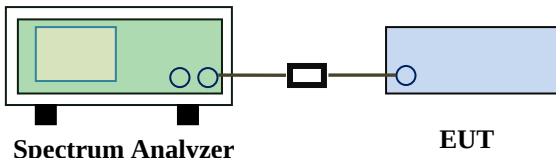Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	FHSS in 2400-2483.5MHz $\geq$ 15 channels	☒
Test Setup	 Spectrum Analyzer EUT		
Test Procedure	The test follows FCC Public Notice DA 00-705 Measurement Guidelines. <u>Use the following spectrum analyzer settings:</u> The EUT must have its hopping function enabled. - Span = the frequency band of operation - RBW $\geq$ 1% of the span - VBW $\geq$ RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow trace to fully stabilize. - It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).		
Remark			
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Number of Hopping Channel measurement result

Type	Modulation	Frequency Range	Number of Hopping Channel	Limit
Number of Hopping Channel	GFSK	2400-2483.5	79	15
	$\pi/4$ DQPSK	2400-2483.5	79	15
	8-DPSK	2400-2483.5	79	15

Test Plots


Number of Hopping Channels measurement result



6.6 Time of Occupancy (Dwell Time)

Temperature	21°C
Relative Humidity	52%
Atmospheric Pressure	1011mbar
Test date :	March 30, 2015
Tested By :	Wiky Jam

Requirement(s):

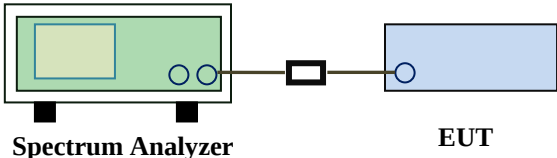Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	Dwell Time < 0.4s	☒
Test Setup	 Spectrum Analyzer EUT		
Test Procedure	The test follows FCC Public Notice DA 00-705 Measurement Guidelines. <u>Use the following spectrum analyzer</u> - Span = zero span, centered on a hopping channel - RBW = 1 MHz - VBW ≥ RBW - Sweep = as necessary to capture the entire dwell time per hopping channel - Detector function = peak - Trace = max hold - use the marker-delta function to determine the dwell time		
Remark			
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A


Type	Modulation	CH	Pulse Width (ms)	Dwell Time (ms)	Limit (ms)	Result
Dwell Time	GFSK	Low	2.923	311.787	400	Pass
		Mid	2.923	311.787	400	Pass
		High	2.923	311.787	400	Pass
	$\pi/4$ DQPSK	Low	2.923	311.787	400	Pass
		Mid	2.908	310.187	400	Pass
		High	2.908	310.187	400	Pass
	8-DPSK	Low	2.953	314.987	400	Pass
		Mid	2.923	311.787	400	Pass
		High	2.923	311.787	400	Pass
Note: Dwell time=Pulse Time (ms) $\times$ (1600 $\div$ 6 $\div$ 79) $\times$ 31.6						

Test Plots

Dwell Time measurement result




GFSK - Low CH 2402

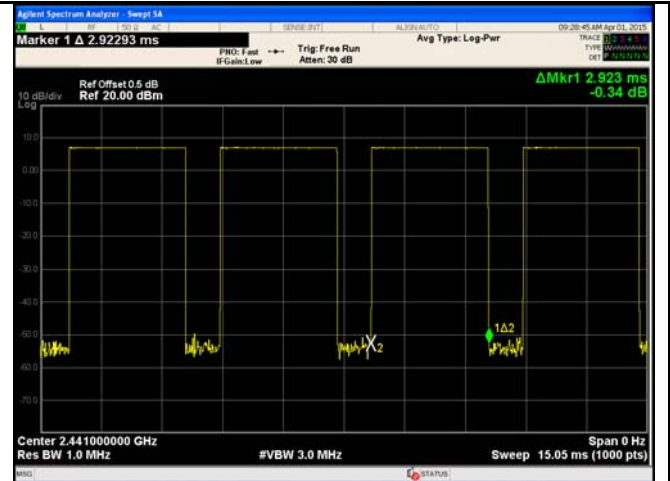

GFSK - Mid CH 2441



GFSK - High CH 2480

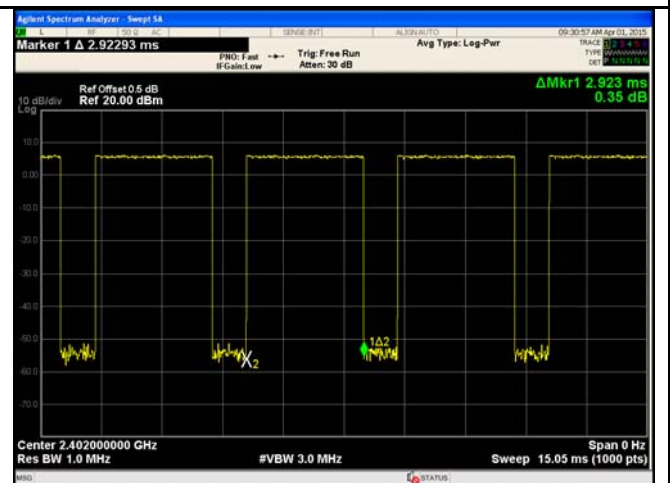


$\pi/4$ DQPSK - Low CH 2402




$\pi/4$ DQPSK - Mid CH 2441




$\pi/4$ DQPSK - High CH 2441

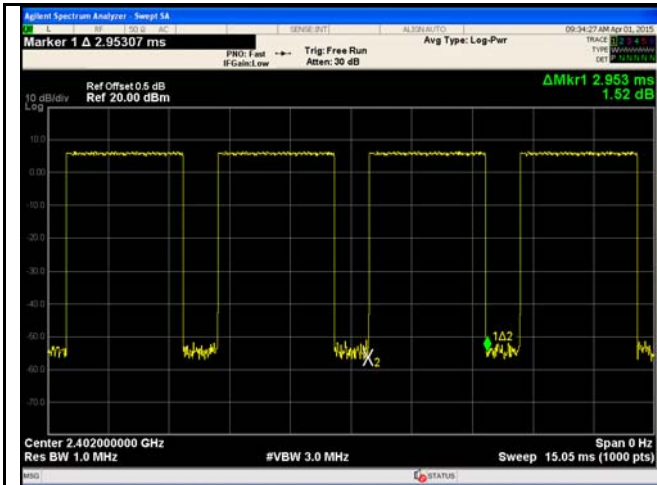

8DPSK - Low CH 2402

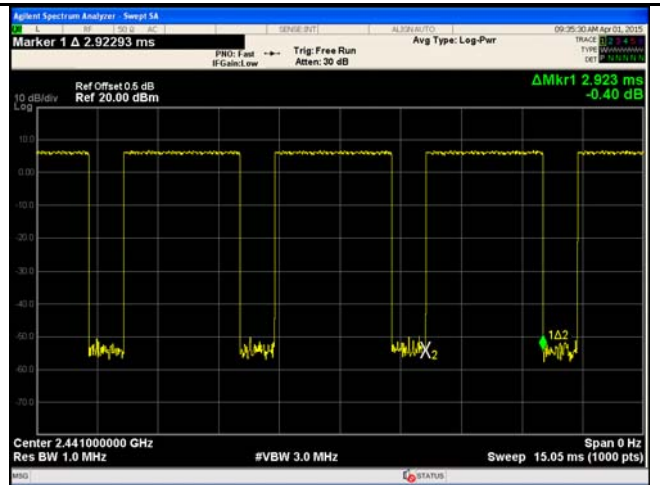

8DPSK - Mid CH 2441

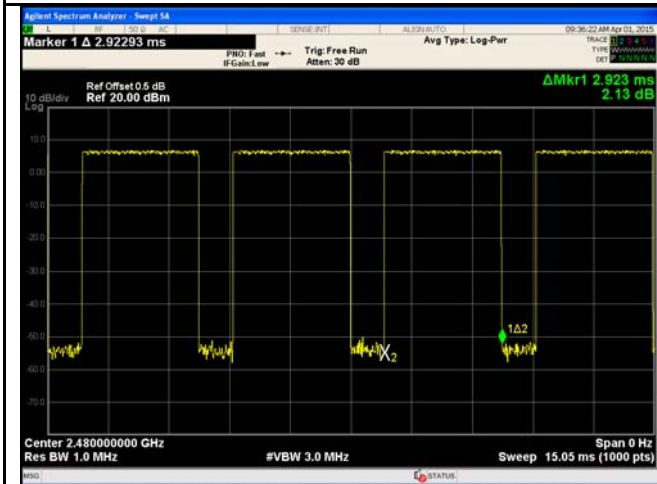


8DPSK - High CH 2480

6.7 Band Edge

Temperature	22°C
Relative Humidity	55%
Atmospheric Pressure	1005mbar
Test date :	March 24, 2015
Tested By :	Wiky Jam

Requirement(s):

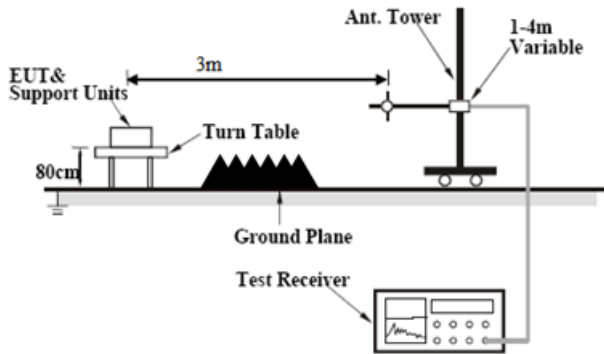Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	☒
Test Setup			
Test Procedure	The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Radiated Method Only 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range. 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a		

Test Report	15050004-FCC-R2
Page	29 of 52


	convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below: a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz. b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. - 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency. - 5. Repeat above procedures until all measured frequencies were complete.
Remark	
Result	☒ Pass ☐ Fail

Test Data ☐ Yes ☒ N/A


Test Plot ☒ Yes (See below) ☐ N/A

Test Plots

GFSK Mode:

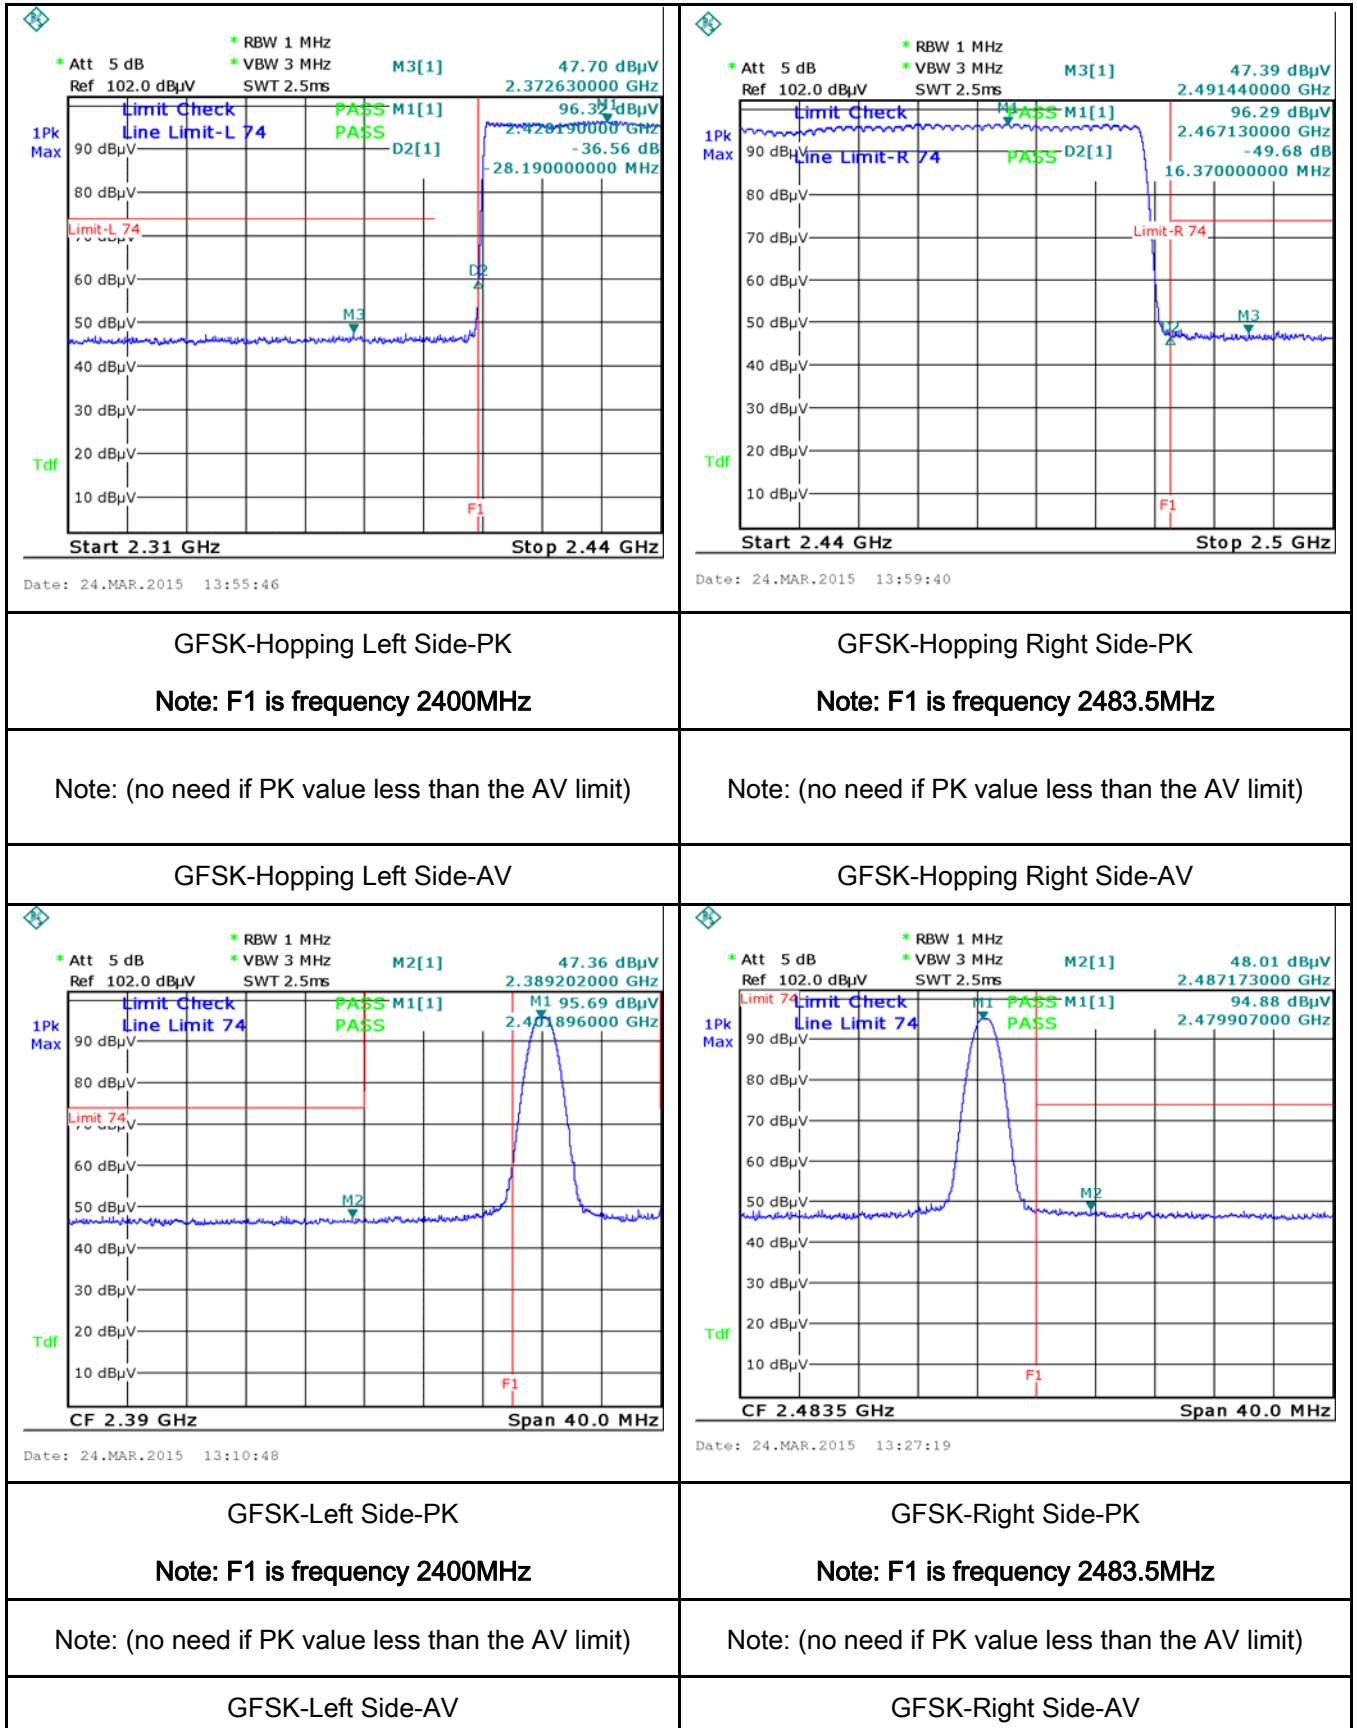

$\pi/4$ DQPSK Mode:

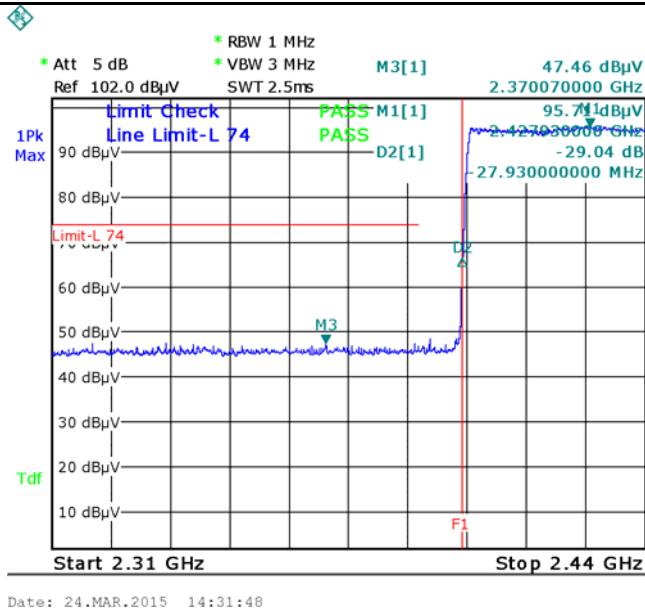


$\pi/4$ DQPSK-Hopping Left Side-PK

Note: F1 is frequency 2400MHz

Note: (no need if PK value less than the AV limit)

$\pi/4$ DQPSK-Hopping Left-AV

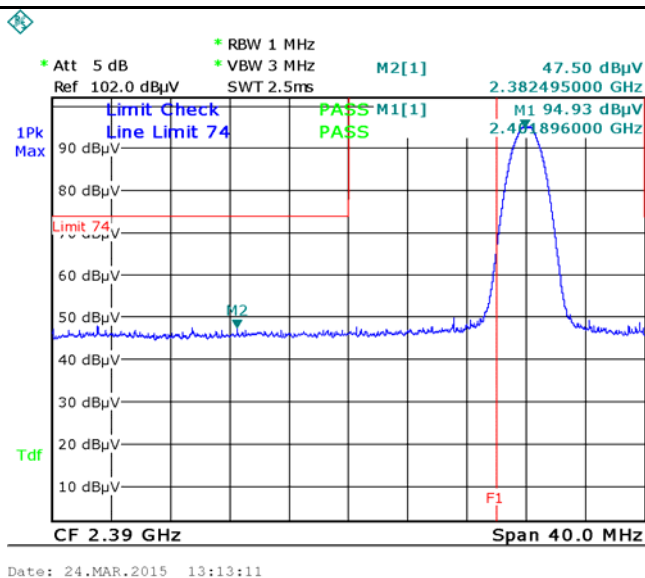


$\pi/4$ DQPSK-Left Side-PK

Note: F1 is frequency 2400MHz

Note: (no need if PK value less than the AV limit)

$\pi/4$ DQPSK-Left Side-AV

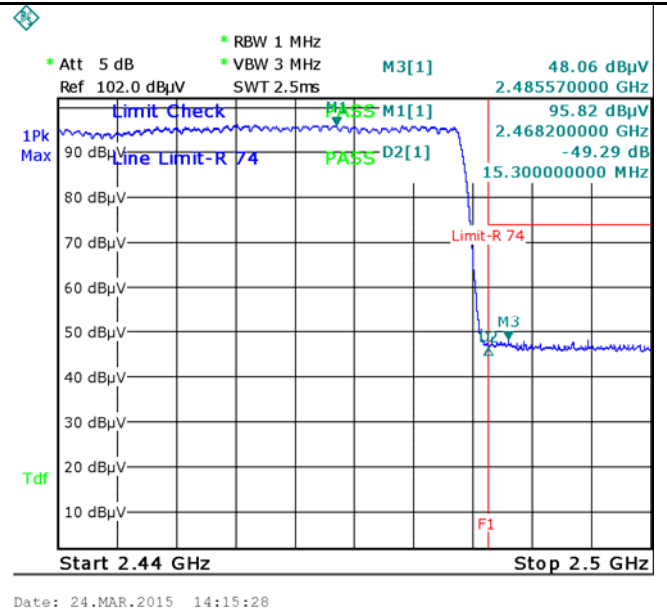


$\pi/4$ DQPSK-Hopping Right Side-PK

Note: F1 is frequency 2483.5MHz

Note: (no need if PK value less than the AV limit)

$\pi/4$ DQPSK-Hopping Right-AV

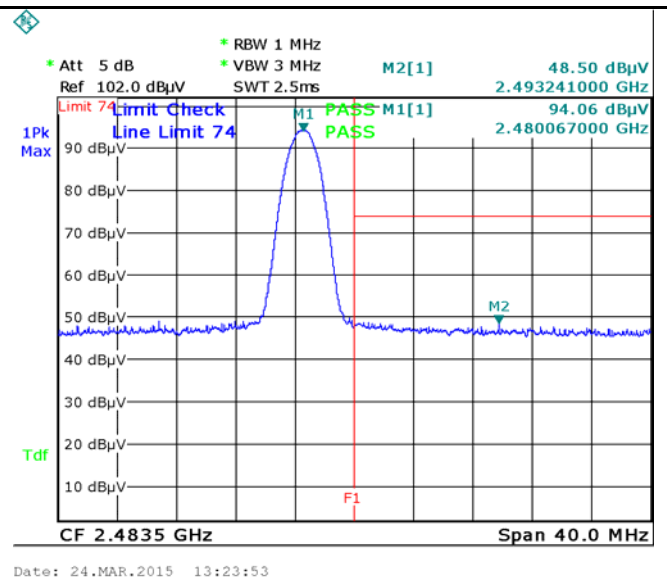


$\pi/4$ DQPSK-Right Side-PK

Note: F1 is frequency 2483.5MHz

Note: (no need if PK value less than the AV limit)

$\pi/4$ DQPSK-Right Side-AV

8-DPSK Mode:

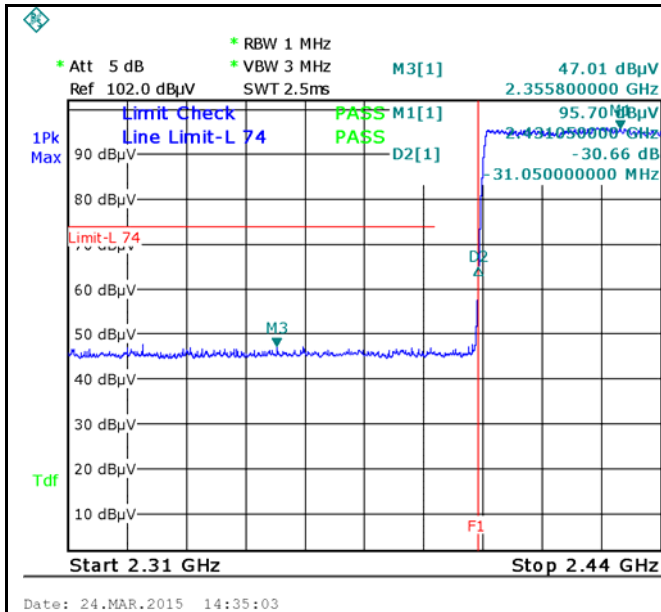


8DPSK-Hopping Left Side-PK

Note: F1 is frequency 2400MHz

Note: (no need if PK value less than the AV limit)

8DPSK-Hopping Left-AV

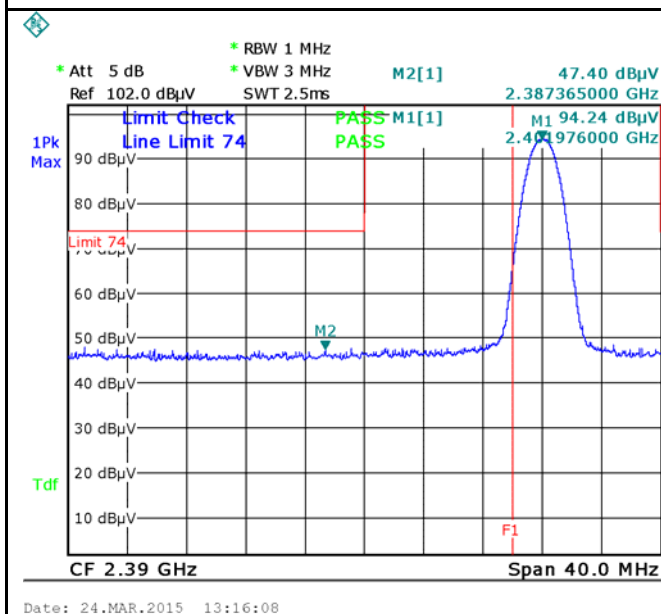


8DPSK-Left Side-PK

Note: F1 is frequency 2400MHz

Note: (no need if PK value less than the AV limit)

8DPSK-Left Side-AV

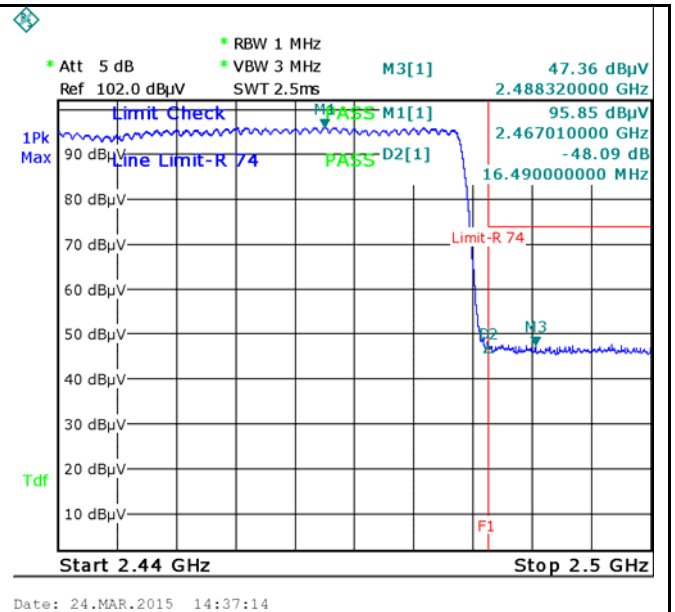


8DPSK-Hopping Right Side-PK

Note: F1 is frequency 2483.5MHz

Note: (no need if PK value less than the AV limit)

8DPSK-Hopping Right-AV

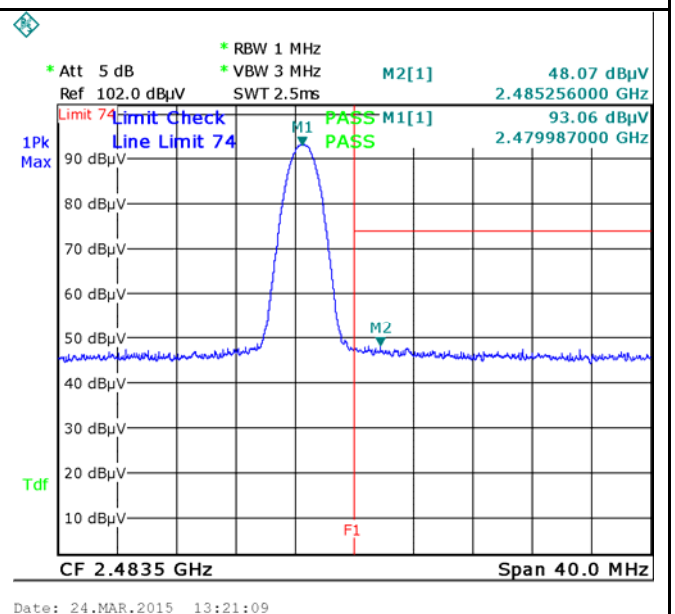

8DPSK-Right Side-PK

Note: F1 is frequency 2483.5MHz

Note: (no need if PK value less than the AV limit)


8DPSK-Right Side-AV

6.8 AC Power Line Conducted Emissions

Temperature	24°C
Relative Humidity	57%
Atmospheric Pressure	1007mbar
Test date :	March 26, 2015
Tested By :	Wiky Jam

Requirement(s):

Spec	Item	Requirement	Applicable													
47CFR§15.207, RSS210 (A8.1)	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.	☒													
		<table><tr><th rowspan="2">Frequency ranges (MHz)</th><th colspan="2">Limit (dBµV)</th></tr><tr><th>QP</th><th>Average</th></tr><tr><td>0.15 ~ 0.5</td><td>66 – 56</td><td>56 – 46</td></tr><tr><td>0.5 ~ 5</td><td>56</td><td>46</td></tr><tr><td>5 ~ 30</td><td>60</td><td>50</td></tr></table>	Frequency ranges (MHz)	Limit (dBµV)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50
Frequency ranges (MHz)	Limit (dBµV)															
	QP	Average														
0.15 ~ 0.5	66 – 56	56 – 46														
0.5 ~ 5	56	46														
5 ~ 30	60	50														

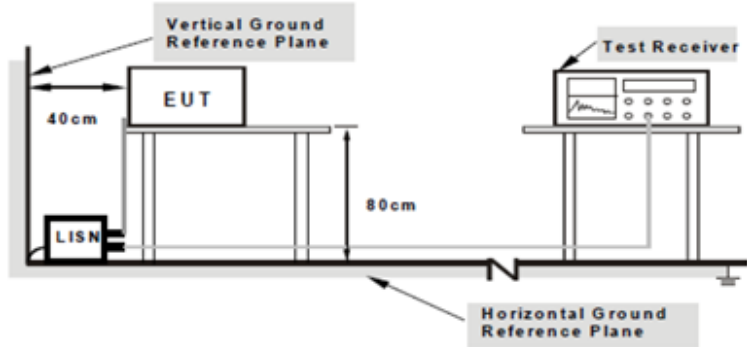Test Setup	 Note: 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.
------------	---

Procedure	- The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. - The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains. - The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss
-----------	---


Test Report	15050004-FCC-R2
Page	34 of 52

	coaxial cable. 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test Mode: Transmitting Mode

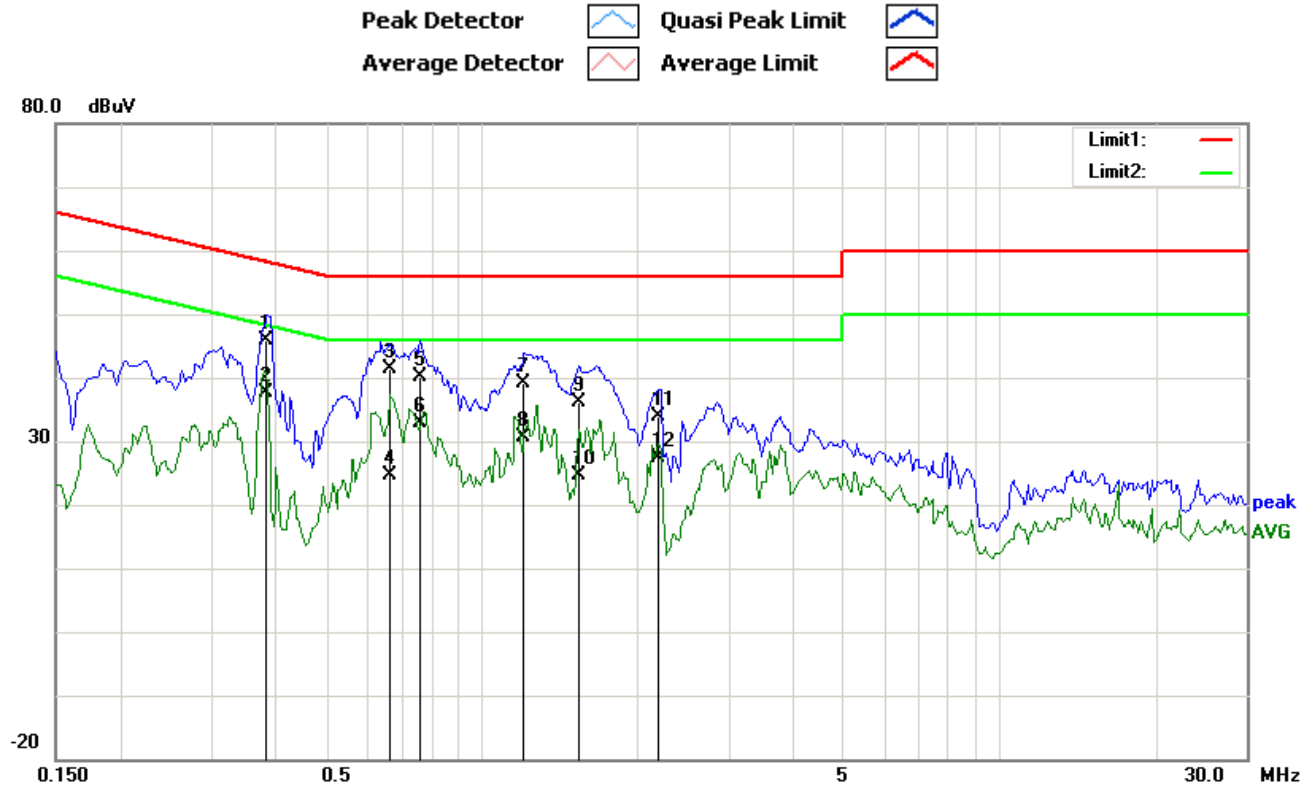


Test Data

Phase Line Plot at 230Vac, 50Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Comment
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)	
1	L1	0.3844	34.80	QP	11.19	45.99	58.18	-12.19	
2	L1	0.3844	26.48	AVG	11.19	37.67	48.18	-10.51	
3	L1	0.6617	30.35	QP	11.06	41.41	56.00	-14.59	
4	L1	0.6617	13.51	AVG	11.06	24.57	46.00	-21.43	
5	L1	0.7594	29.07	QP	11.01	40.08	56.00	-15.92	
6	L1	0.7594	21.87	AVG	11.01	32.88	46.00	-13.12	
7	L1	1.2086	28.12	QP	10.90	39.02	56.00	-16.98	
8	L1	1.2086	19.69	AVG	10.90	30.59	46.00	-15.41	
9	L1	1.5367	25.32	QP	10.90	36.22	56.00	-19.78	
10	L1	1.5367	13.68	AVG	10.90	24.58	46.00	-21.42	
11	L1	2.1930	23.09	QP	10.90	33.99	56.00	-22.01	
12	L1	2.1930	16.38	AVG	10.90	27.28	46.00	-18.72	

Test Mode: Transmitting Mode

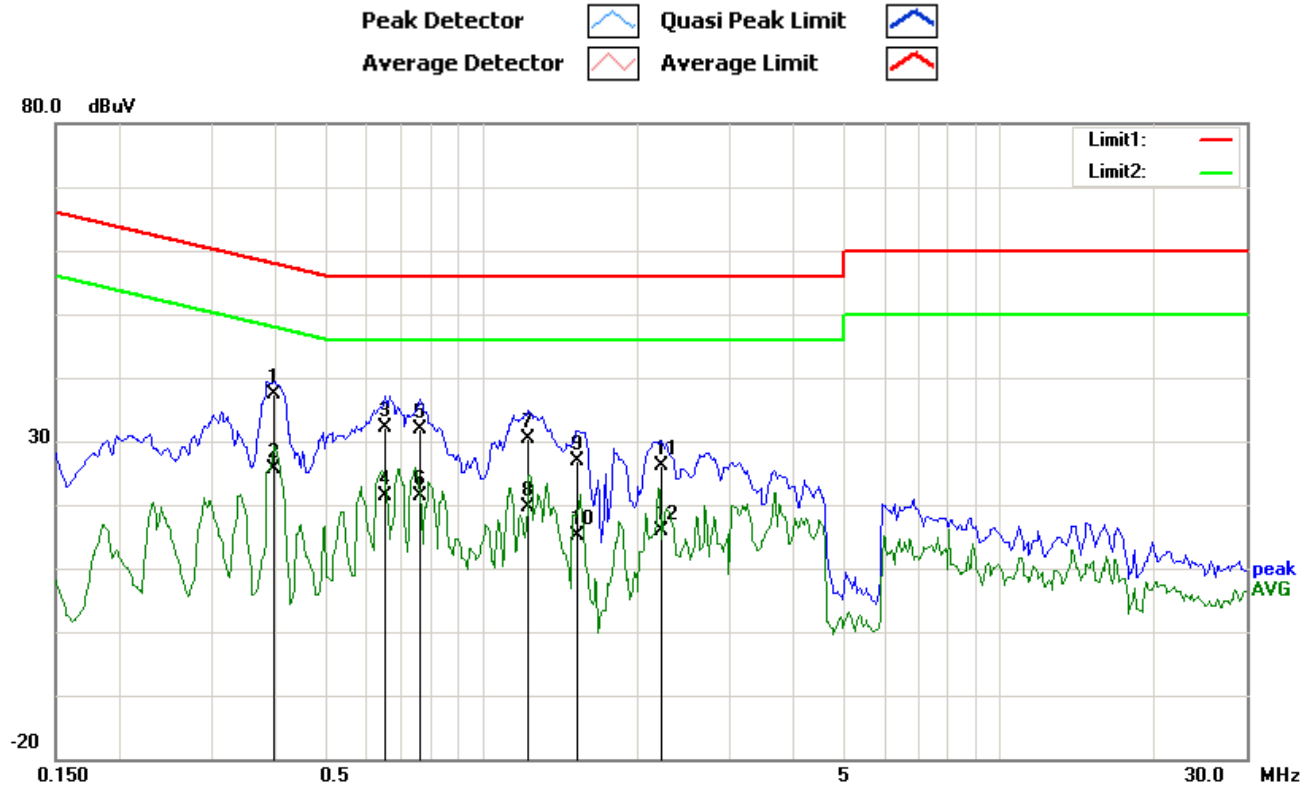

Test Data

Phase Neutral Plot at 230Vac, 50Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Comment
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)	
1	N	0.3961	37.42	QP	0.00	37.42	57.93	-20.51	
2	N	0.3961	25.74	AVG	0.00	25.74	47.93	-22.19	
3	N	0.6500	32.25	QP	0.00	32.25	56.00	-23.75	
4	N	0.6500	21.28	AVG	0.00	21.28	46.00	-24.72	
5	N	0.7594	31.99	QP	0.00	31.99	56.00	-24.01	
6	N	0.7594	21.50	AVG	0.00	21.50	46.00	-24.50	
7	N	1.2320	30.46	QP	0.00	30.46	56.00	-25.54	
8	N	1.2320	19.57	AVG	0.00	19.57	46.00	-26.43	
9	N	1.5274	26.97	QP	0.00	26.97	56.00	-29.03	
10	N	1.5274	15.10	AVG	0.00	15.10	46.00	-30.90	
11	N	2.2203	26.19	QP	0.00	26.19	56.00	-29.81	
12	N	2.2203	15.77	AVG	0.00	15.77	46.00	-30.23	

6.9 Radiated Spurious Emissions

Temperature	24°C
Relative Humidity	57%
Atmospheric Pressure	1007mbar
Test date :	March 26, 2015
Tested By :	Wiky Jam

Requirement(s):

Spec	Item	Requirement	Applicable											
47CFR§15.205, §15.209, §15.247(d)	a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges												
		<table><tr><th>Frequency range (MHz)</th><th>Field Strength (µV/m)</th></tr><tr><td>30 – 88</td><td>100</td></tr><tr><td>88 – 216</td><td>150</td></tr><tr><td>216 960</td><td>200</td></tr><tr><td>Above 960</td><td>500</td></tr></table>		Frequency range (MHz)	Field Strength (µV/m)	30 – 88	100	88 – 216	150	216 960	200	Above 960	500	
		Frequency range (MHz)		Field Strength (µV/m)										
		30 – 88		100										
		88 – 216		150										
		216 960		200										
Above 960	500													

Test Setup	
------------	--

Procedure	- The EUT was switched on and allowed to warm up to its normal operating condition. - The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
-----------	---

Test Report	15050004-FCC-R2
Page	38 of 52

	a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen. b. The EUT was then rotated to the direction that gave the maximum emission. c. Finally, the antenna height was adjusted to the height that gave the maximum emission. 3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz. 4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. 5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A


Test Plot ☒ Yes (See below) ☐ N/A

Test Mode: Transmitting Mode

Below 1GHz

Peak Detector 
Quasi Peak Limit 

80.0 dBuV/m

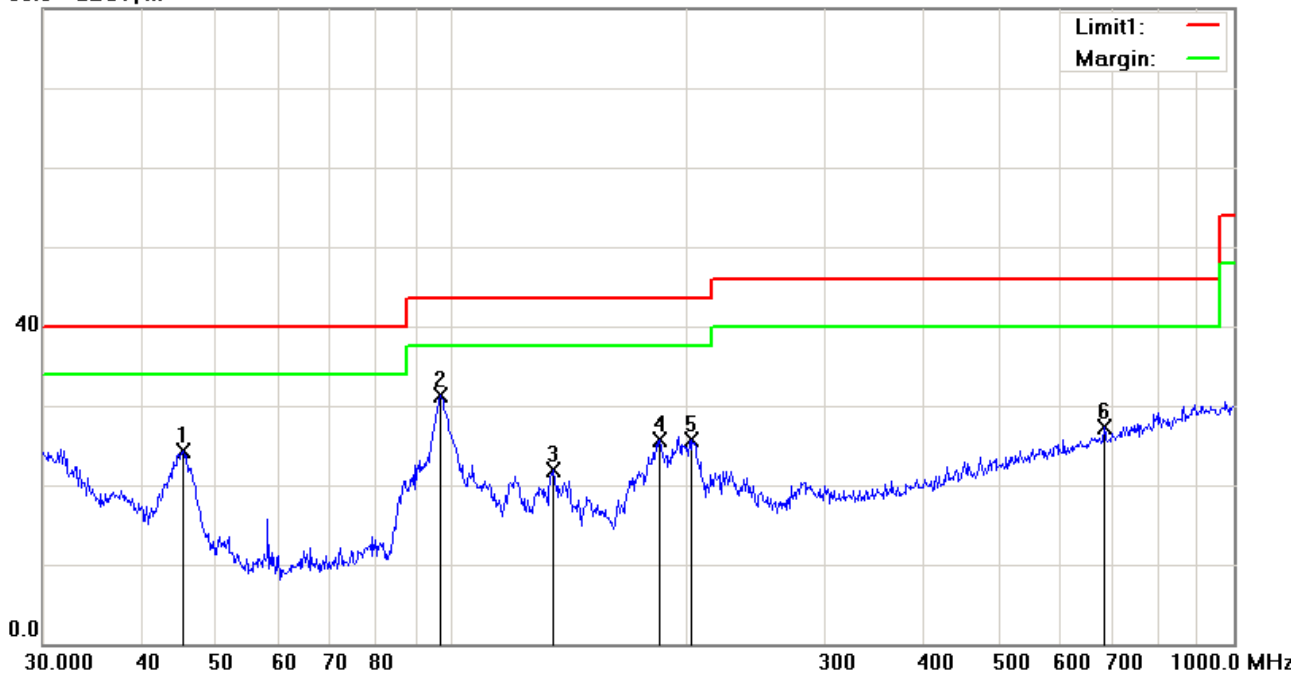

Test Data

Horizontal Polarity Plot @3m

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Height	Degree	Comment
		(MHz)	(dBuV/m)		(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	()	
1	H	45.3755	25.58	peak	-1.31	24.27	40.00	-15.73	100	51	
2	H	96.7749	42.99	peak	-11.65	31.34	43.50	-12.16	200	177	
3	H	135.0319	30.15	peak	-8.24	21.91	43.50	-21.59	200	210	
4	H	184.4898	35.30	peak	-9.59	25.71	43.50	-17.79	100	88	
5	H	202.8104	34.42	peak	-8.76	25.66	43.50	-17.84	100	107	
6	H	682.3485	26.04	peak	1.18	27.22	46.00	-18.78	200	293	


Above 1GHz

Note: The frequency that above 1GHz is mainly from the environment noise.

Below 1GHz

Peak Detector 
Quasi Peak Limit 

80.0 dBuV/m

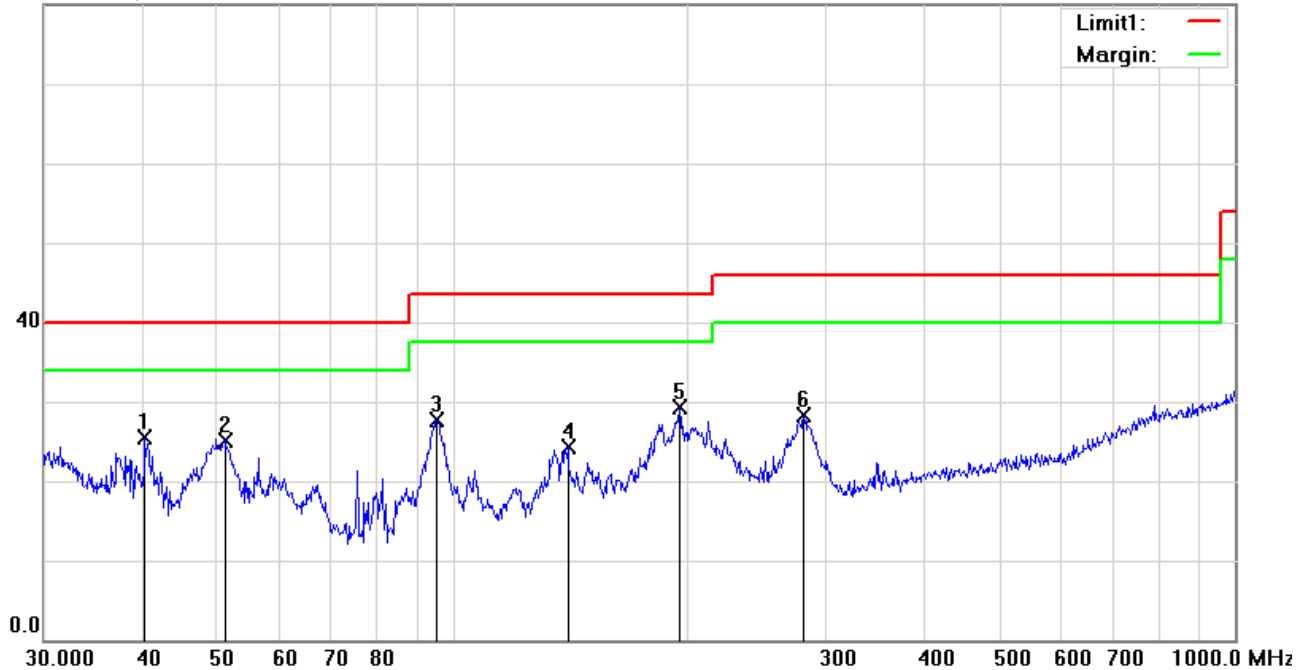

Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Height	Degree	Comment
		(MHz)	(dBuV/m)		(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	()	
1	V	40.4172	33.41	peak	-7.82	25.59	40.00	-14.41	100	269	
2	V	51.1209	39.16	peak	-14.08	25.08	40.00	-14.92	100	172	
3	V	95.4270	40.52	peak	-12.73	27.79	43.50	-15.71	100	89	
4	V	140.3421	31.27	peak	-7.06	24.21	43.50	-19.29	200	138	
5	V	195.1365	37.53	peak	-8.28	29.25	43.50	-14.25	200	190	
6	V	281.0075	35.05	peak	-6.84	28.21	46.00	-17.79	200	198	

Note: The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not recorded.

Test Mode:	Transmitting Mode
------------	-------------------

Note: Other modes were verified, only the result of worst case basic rate mode was presented.

Above 1GHz

Mode: GFSK (Worst Case)

Low Channel (2402 MHz)

Frequency (MHz)	S.A. Reading (dBμV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4804	29.01	AV	V	33.83	4.87	27.32	40.39	54	-13.61
4804	31.45	AV	H	33.83	4.87	27.32	42.83	54	-11.17
4804	43.18	PK	V	33.83	4.87	27.32	54.56	74	-19.44
4804	43.31	PK	H	33.83	4.87	27.32	54.69	74	-19.31

Middle Channel (2441 MHz)

Frequency (MHz)	S.A. Reading (dBμV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4882	29.93	AV	V	33.86	4.87	26.32	42.34	54	-11.66
4882	31.91	AV	H	33.86	4.87	26.32	44.32	54	-9.68
4882	43.68	PK	V	33.86	4.87	26.32	56.09	74	-17.91
4882	43.79	PK	H	33.86	4.87	26.32	56.2	74	-17.8

High Channel (2480 MHz)

Frequency (MHz)	S.A. Reading (dBμV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4960	31.13	AV	V	33.9	4.87	26.72	43.18	54	-10.82
4960	36.31	AV	H	33.9	4.87	26.72	48.36	54	-5.64
4960	44.39	PK	V	33.9	4.87	26.72	56.44	74	-17.56
4960	45.58	PK	H	33.9	4.87	26.72	57.63	74	-16.37

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted					
EMI test receiver	ESCS30	8471241027	09/18/2014	09/17/2015	☒
Line Impedance	LI-125A	191106	09/26/2014	09/25/2015	☒
Line Impedance	LI-125A	191107	09/26/2014	09/25/2015	☒
LISN	ISN T800	34373	09/26/2014	09/25/2015	☒
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/25/2014	09/24/2015	☒
Transient Limiter	LIT-153	531118	09/02/2014	09/01/2015	☒
RF conducted test					
Agilent ESA-E SERIES	E4407B	MY45108319	09/18/2014	09/17/2015	☒
Power Splitter	1#	1#	09/02/2014	09/01/2015	☒
DC Power Supply	E3640A	MY40004013	09/18/2014	09/17/2015	☒
Radiated Emissions					
EMI test receiver	ESL6	100262	09/18/2014	09/17/2015	☒
Positioning Controller	UC3000	MF780208282	11/20/2014	11/19/2015	☒
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/02/2014	09/01/2015	☒
Microwave Preamplifier (0.5 ~ 18GHz)	PAM-118	443008	09/02/2014	09/01/2015	☒
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/22/2014	09/21/2015	☒
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/25/2014	09/24/2015	☒
Universal Radio Communication Tester	CMU200	121393	09/26/2014	09/25/2015	☒

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo



Whole Package - Top View



Adapter - Front View



EUT - Front View



EUT - Rear View


Test Report	15050004-FCC-R2
Page	44 of 52



EUT - Top View



EUT - Bottom View

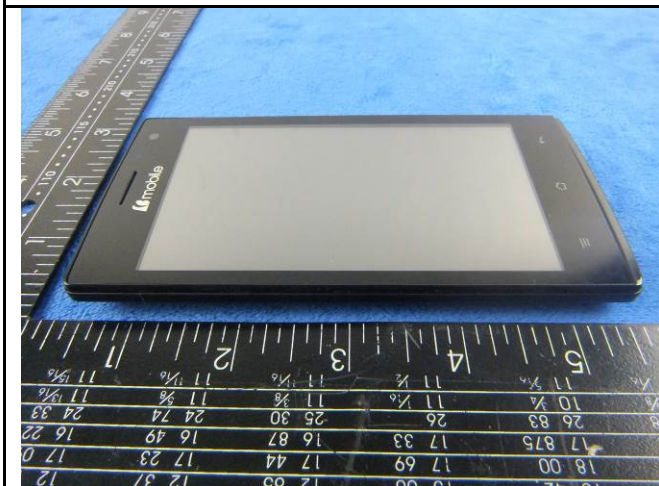

EUT - Left View




EUT - Right View

Annex B.ii. Photograph: EUT Internal Photo



Cover Off - Top View 1

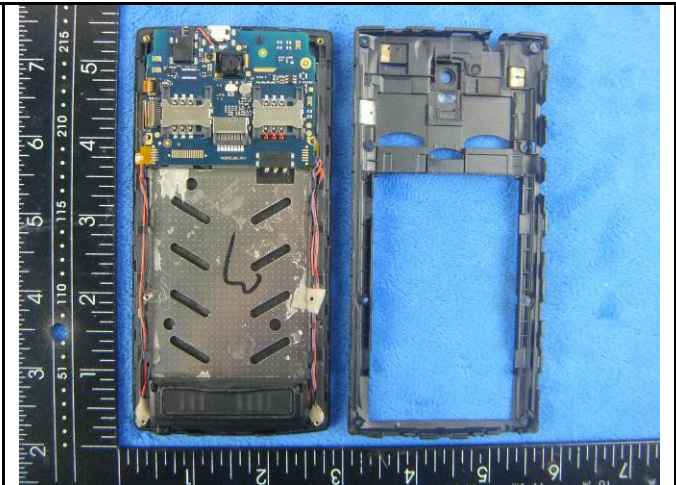

Cover Off - Top View 2




Battery - Front View



Battery - Rear View




LCD - Front View

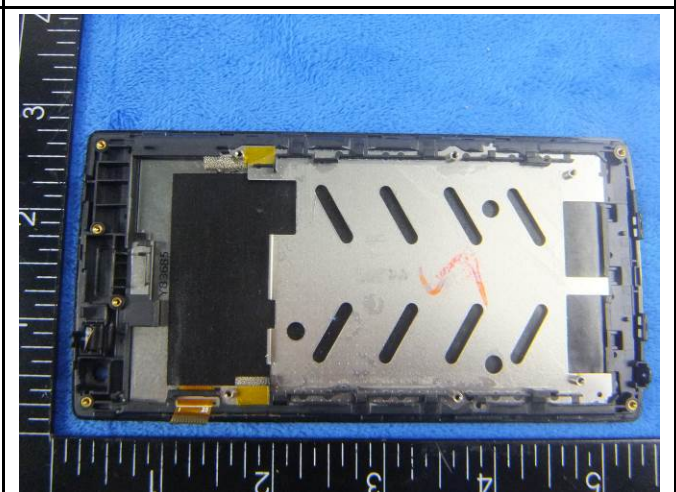


LCD - Rear View



Mainborad With Shielding - Front View

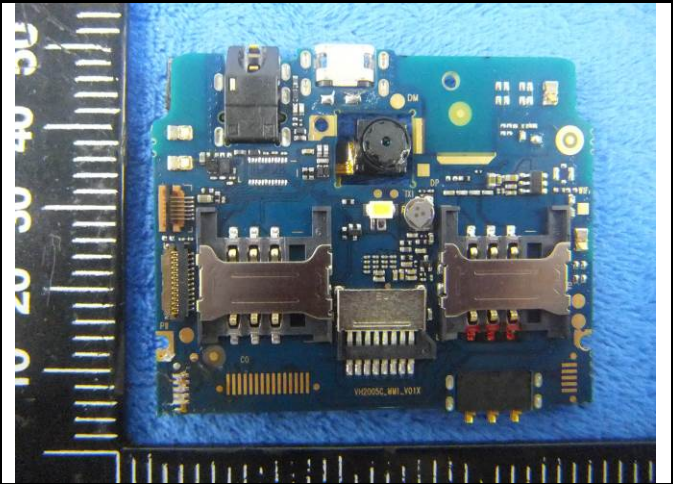

Mainborad Without Shielding - Front View

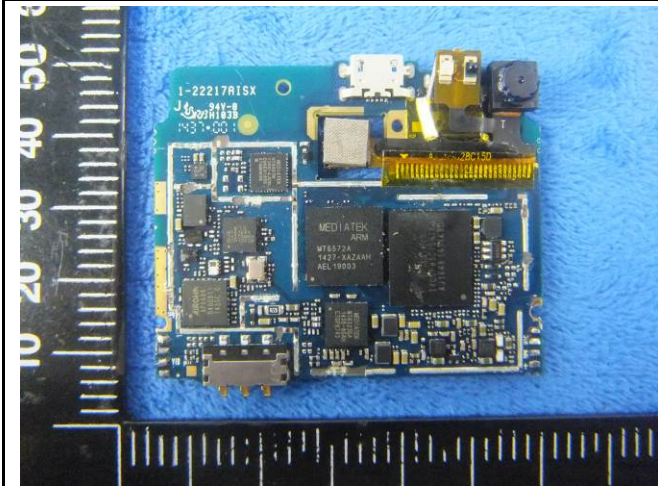

Mainborad - Rear View



GSM/PCS/UMTS/-FDD Antenna View



BT/WIFI Antenna View


Annex B.iii. Photograph: Test Setup Photo




Conducted Emissions Test Setup Front View



Conducted Emissions Test Setup Side View

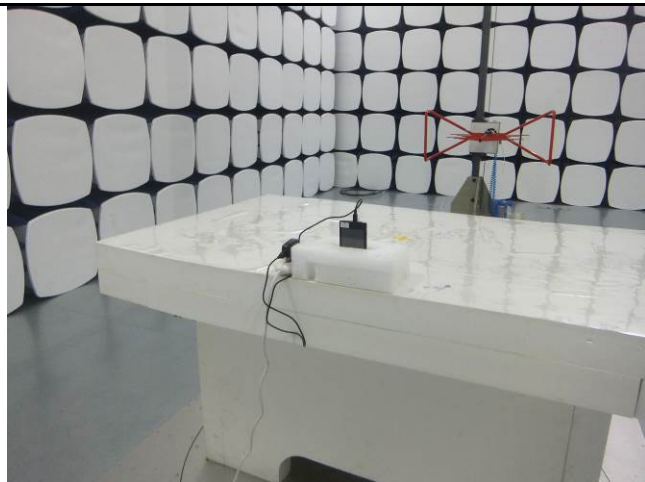

Radiated Spurious Emissions Test Setup Below 1GHz

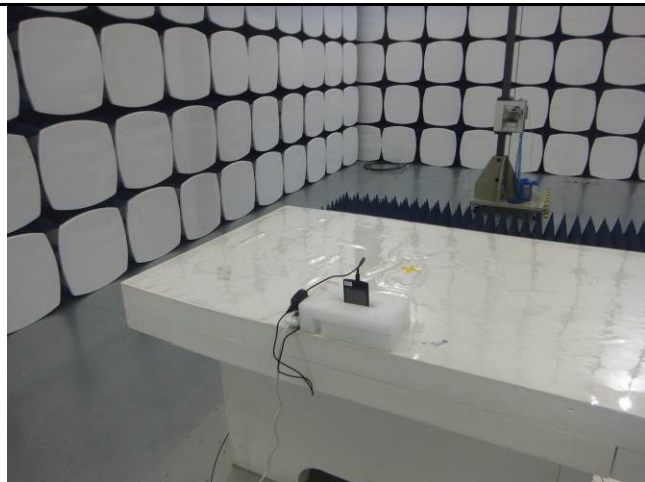


Radiated Spurious Emissions Test Setup Above
1GHz


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for AC Line Conducted Emissions

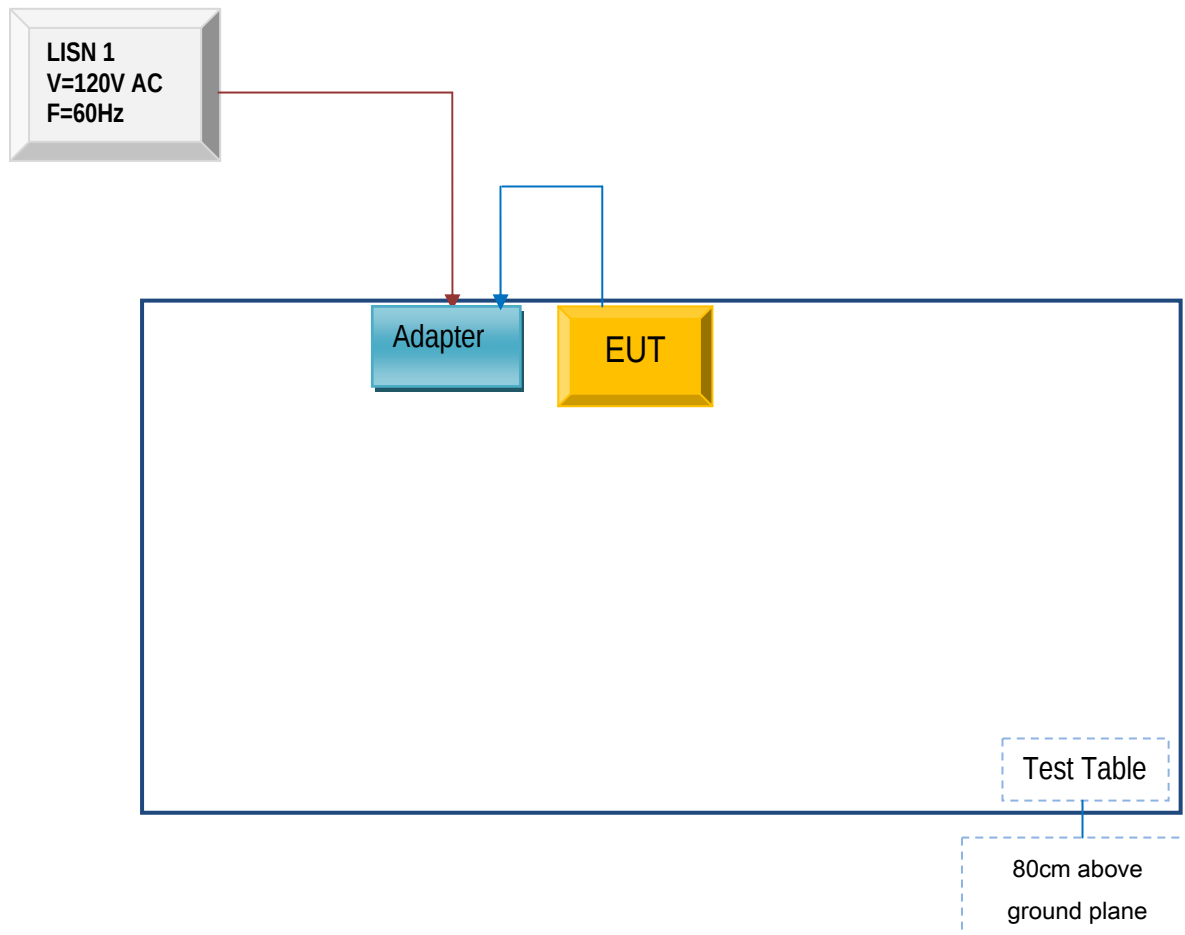

Block Configuration Diagram for Radiated Emissions

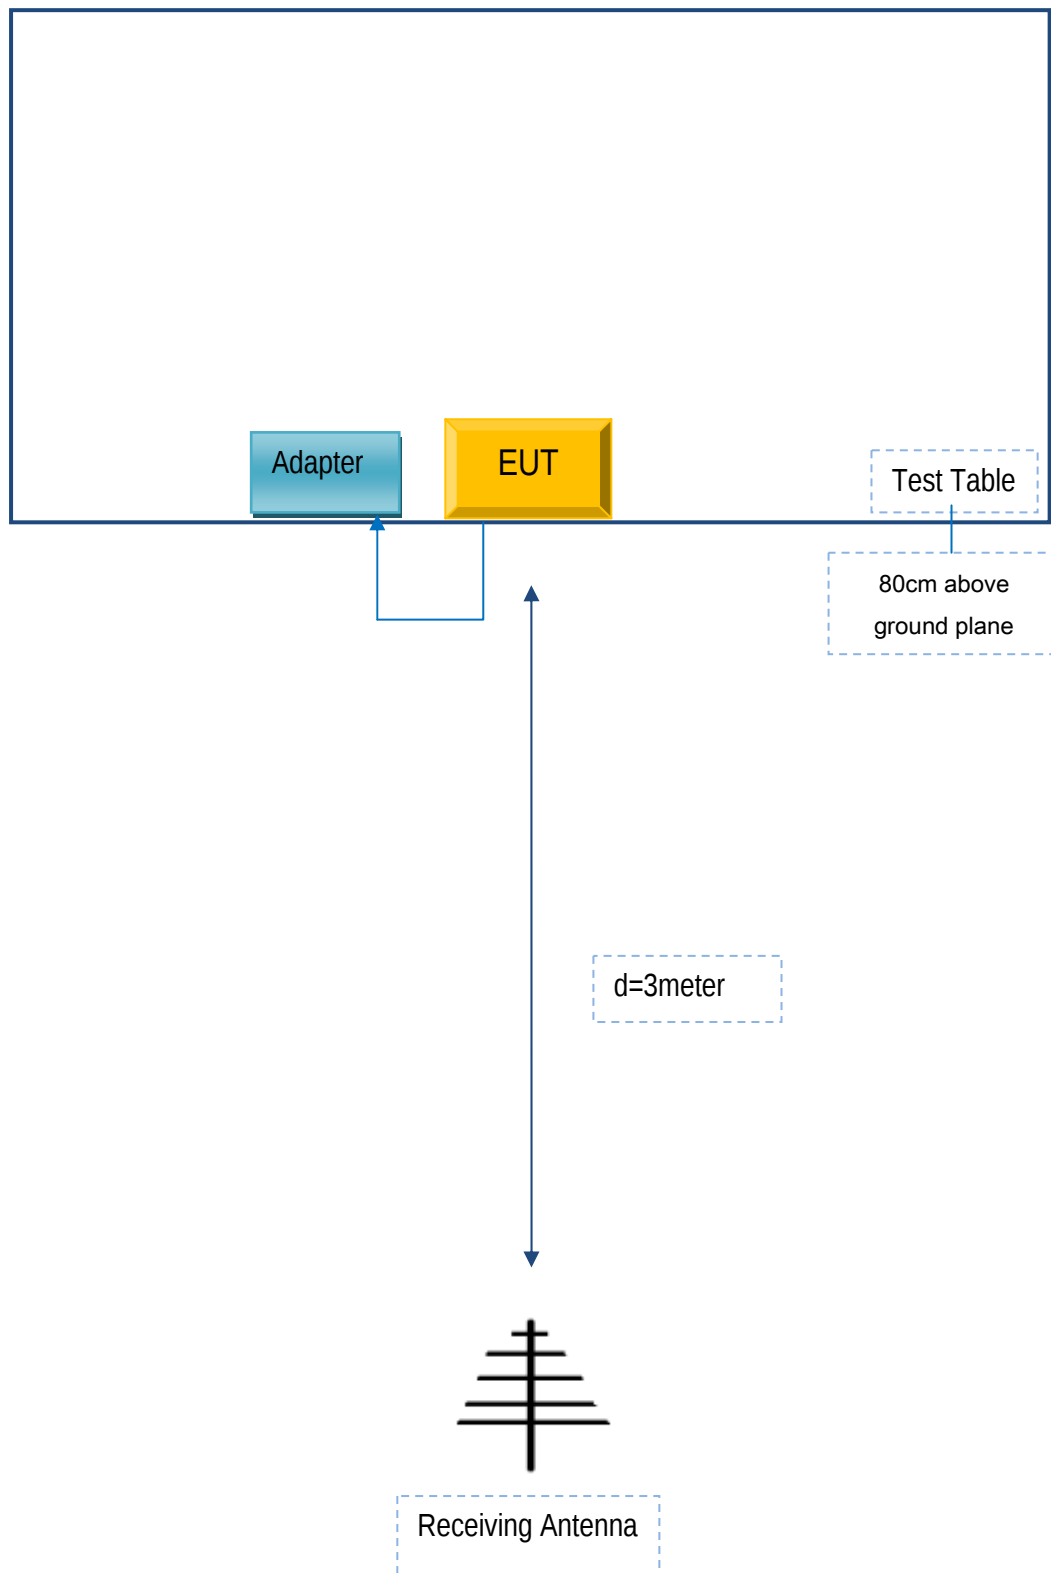

Test Report	15050004-FCC-R2
Page	50 of 52

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Manufacturer	Equipment Description	Model	Calibration Date	Calibration Due Date
N/A	N/A	N/A	N/A	N/A

Test Report	15050004-FCC-R2
Page	51 of 52

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see attachment

Test Report	15050004-FCC-R2
Page	52 of 52

Annex E. DECLARATION OF SIMILARITY

N/A