

# RF TEST REPORT



Report No.: 15050034-FCC-R1

Supersede Report No.: N/A

|                                                                                                                                      |                                                                                     |  |
|--------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--|
| Applicant                                                                                                                            | b mobile HK Limited                                                                 |  |
| Product Name                                                                                                                         | Mobile Phone                                                                        |  |
| Model No.                                                                                                                            | AX1050                                                                              |  |
| Serial No.                                                                                                                           | L50                                                                                 |  |
| Test Standard                                                                                                                        | FCC Part 22(H):2014 ;FCC Part 24(E):2014; FCC Part 27:2014;<br>ANSI/TIAC603 D: 2010 |  |
| Test Date                                                                                                                            | August 13 to September 08, 2015                                                     |  |
| Issue Date                                                                                                                           | September 28.2015                                                                   |  |
| Test Result                                                                                                                          | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail              |  |
| Equipment complied with the specification                                                                                            | <input checked="" type="checkbox"/>                                                 |  |
| Equipment did not comply with the specification                                                                                      | <input type="checkbox"/>                                                            |  |
| <i>Winnie Zhang</i>                                                                                                                  | <i>David Huang</i>                                                                  |  |
| Winnie Zhang<br>Test Engineer                                                                                                        | David Huang<br>Checked By                                                           |  |
| This test report may be reproduced in full only<br>Test result presented in this test report is applicable to the tested sample only |                                                                                     |  |

Issued by:

**SIEMIC (SHENZHEN-CHINA) LABORATORIES**

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: [China@siemic.com.cn](mailto:China@siemic.com.cn)

## Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

| Country/Region | Scope                              |
|----------------|------------------------------------|
| USA            | EMC, RF/Wireless, SAR, Telecom     |
| Canada         | EMC, RF/Wireless, SAR, Telecom     |
| Taiwan         | EMC, RF, Telecom, SAR, Safety      |
| Hong Kong      | RF/Wireless, SAR, Telecom          |
| Australia      | EMC, RF, Telecom, SAR, Safety      |
| Korea          | EMI, EMS, RF, SAR, Telecom, Safety |
| Japan          | EMI, RF/Wireless, SAR, Telecom     |
| Singapore      | EMC, RF, SAR, Telecom              |
| Europe         | EMC, RF, SAR, Telecom, Safety      |

|             |                 |
|-------------|-----------------|
| Test Report | 15050034-FCC-R1 |
| Page        | 3 of 60         |

This page has been left blank intentionally.

## CONTENTS

|                                                                    |    |
|--------------------------------------------------------------------|----|
| 1. REPORT REVISION HISTORY .....                                   | 5  |
| 2. CUSTOMER INFORMATION .....                                      | 5  |
| 3. TEST SITE INFORMATION .....                                     | 5  |
| 4. EQUIPMENT UNDER TEST (EUT) INFORMATION .....                    | 6  |
| 5. TEST SUMMARY .....                                              | 9  |
| 6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS .....             | 10 |
| 6.1 RF EXPOSURE (SAR).....                                         | 10 |
| 6.2 RF OUTPUT POWER .....                                          | 11 |
| 6.3 PEAK-AVERAGE RATIO.....                                        | 20 |
| 6.4 MODULATION CHARACTERISTIC.....                                 | 22 |
| 6.5 OCCUPIED BANDWIDTH.....                                        | 23 |
| 6.6 SPURIOUS EMISSIONS AT ANTENNA TERMINALS .....                  | 28 |
| 6.7 SPURIOUS RADIATED EMISSIONS .....                              | 34 |
| 6.8 BAND EDGE.....                                                 | 40 |
| 6.9 FREQUENCY STABILITY .....                                      | 45 |
| ANNEX A. TEST INSTRUMENT.....                                      | 50 |
| ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....                       | 51 |
| ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....                  | 56 |
| ANNEX C.II. EUT OPERATING CONKITIONS .....                         | 58 |
| ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST ..... | 59 |
| ANNEX E. DECLARATION OF SIMILARITY .....                           | 60 |

## 1. Report Revision History

| Report No.      | Report Version | Description | Issue Date        |
|-----------------|----------------|-------------|-------------------|
| 15050034-FCC-R1 | NONE           | Original    | September 28.2015 |
|                 |                |             |                   |
|                 |                |             |                   |
|                 |                |             |                   |
|                 |                |             |                   |
|                 |                |             |                   |

## 2. Customer information

|                  |                                                                                                                |
|------------------|----------------------------------------------------------------------------------------------------------------|
| Applicant Name   | b mobile HK Limited                                                                                            |
| Applicant Add    | Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street; Kwai Chung;New Territories; Hong Kong |
| Manufacturer     | b mobile HK Limited                                                                                            |
| Manufacturer Add | Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street; Kwai Chung;New Territories; Hong Kong |

## 3. Test site information

|                      |                                                                                                                                              |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| Lab performing tests | SIEMIC (Shenzhen-China) LABORATORIES                                                                                                         |
| Lab Address          | Zone A, Floor 1, Building 2 Wan Ye Long Technology Park<br>South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong<br>China 518108 |
| FCC Test Site No.    | 718246                                                                                                                                       |
| IC Test Site No.     | 4842E-1                                                                                                                                      |
| Test Software        | Radiated Emission Program-To Shenzhen v2.0                                                                                                   |

|                               |                                                                                                                                                                                                                                                         |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description of EUT:           | Mobile Phone                                                                                                                                                                                                                                            |
| Main Model:                   | AX1050                                                                                                                                                                                                                                                  |
| Serial Model:                 | L50                                                                                                                                                                                                                                                     |
| Date EUT received:            | August 12, 2015                                                                                                                                                                                                                                         |
| Test Date(s):                 | August 13 to September 08, 2015                                                                                                                                                                                                                         |
| Equipment Category :          | PCE                                                                                                                                                                                                                                                     |
| Antenna Gain:                 | GSM850: -1.28dBi<br>PCS1900: -0.93dBi<br>UMTS-FDD Band V: -1.28dBi<br>UMTS-FDD Band IV: -0.88dBi<br>UMTS-FDD Band II: -0.93dBi<br>Bluetooth/BLE: 0.977dBi<br>WIFI: 0.977dB<br>LTE Band 2:-0.93Bi<br>LTE Band 4:-0.88dBi<br>LTE Band 12:-1.35dBi         |
| Type of Modulation:           | GSM / GPRS: GMSK<br>EGPRS: GMSK, 8PSK<br>UMTS-FDD: QPSK, 16QAM<br>802.11b/g/n: DSSS, OFDM<br>Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK<br>BLE: GFSK<br>LTE Band: QPSK, 16QAM<br>GPS:BPSK                                                                    |
| RF Operating Frequency (ies): | GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz<br>PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz<br>UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz<br>UMTS-FDD Band IV TX:1712.4 ~ 1752.6 MHz;<br>RX : 2112.4 ~ 2152.6 MHz |

UMTS-FDD Band II TX:1852.4 ~ 1907.6 MHz;

RX: 1932.4 ~ 1987.6 MHz

WIFI:802.11b/g/n(20M): 2412-2472 MHz

WIFI:802.11n(40M): 2422-2462 MHz

Bluetooth& BLE: 2402-2480 MHz

LTE Band 2 TX: 1852.5 ~ 1907.5 MHz; RX : 1932.5 ~ 1987.5 MHz

LTE Band 4 TX: 1712.5 ~ 1752.5 MHz; RX : 2112.5 ~ 2152.5 MHz

LTE Band 12 TX:699.7 ~ 715.3 MHz; RX : 729.7~ 745.3MHz

GPS RX:1575.42 MHz

GSM850: 33.04dBm

PCS1900: 30.79dBm

Maximum Conducted

UMTS-FDD Band V : 23.70dBm

AV Power to Antenna:

UMTS-FDD Band IV: 22.57dBm

UMTS-FDD Band II : 23.23Bm

GSM850: 25.80dBm / ERP

PCS1900: 22.57dBm / EIRP

ERP/EIRP:

UMTS-FDD Band V : 19.26dBm / ERP

UMTS-FDD Band IV: 18.49dBm/ EIRP

UMTS-FDD Band II : 19.30dBm / EIRP

GSM 850: 124CH

PCS1900: 299CH

UMTS-FDD Band V : 102CH

UMTS-FDD Band IV: 202CH

UMTS-FDD Band II : 277CH

Number of Channels:

WIFI :802.11b/g/n(20M): 13CH

WIFI :802.11n(40M): 9CH

Bluetooth: 79CH

BLE: 40CH

GPS:1CH

Port:

Power Port, Earphone Port, USB Port

Input Power:

Adapter:

|             |                 |
|-------------|-----------------|
| Test Report | 15050034-FCC-R1 |
| Page        | 8 of 60         |

Model: A98A-050100U-US1

Input: 100-240V; 50/60Hz;0.2A

Output: DC 5V,1000mA

Battery:

Model: AX1050

Spec:2000mAh, 7.6Wh

Voltage:3.8Vdc

Trade Name : Bmobile

GPRS/EGPRS Multi-slot class 8/10/12

FCC ID: ZSW-30-017

## 5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

| FCC Rules                                                          | Description of Test                                                    | Result     |
|--------------------------------------------------------------------|------------------------------------------------------------------------|------------|
| § 1.1307; § 2.1093                                                 | RF Exposure (SAR)                                                      | Compliance |
| §2.1046; § 22.913(a); § 24.232(c);<br>§ 27.50(c.10) ; § 27.50(d.4) | RF Output Power                                                        | Compliance |
| § 24.232 (d) ; § 27.50(d)                                          | Peak-Average Ratio                                                     | Compliance |
| § 2.1047                                                           | Modulation Characteristics                                             | N/A        |
| § 2.1049; § 22.905; § 22.917;<br>§ 24.238; § 27.53(a.5)            | 99% & -26 dB Occupied Bandwidth                                        | Compliance |
| § 2.1051; § 22.917(a);<br>§ 24.238(a); § 27.53(h)                  | Spurious Emissions at Antenna Terminal                                 | Compliance |
| § 2.1053; § 22.917(a);<br>§ 24.238(a); § 27.53(h)                  | Field Strength of Spurious Radiation                                   | Compliance |
| § 22.917(a); § 24.238(a);<br>§ 27.53(h)                            | Out of band emission, Band Edge                                        | Compliance |
| § 2.1055; § 22.355; § 24.235;<br>§ 27.5(h); § 27.54                | Frequency stability vs. temperature<br>Frequency stability vs. voltage | Compliance |

Note: Testing was performed by configuring EUT to maximum output power status, the declared output power class for different

### Measurement Uncertainty

| Emissions                                    |                                                                                                                                                 |               |
|----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| Test Item                                    | Description                                                                                                                                     | Uncertainty   |
| Band Edge and Radiated<br>Spurious Emissions | Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m) | +5.6dB/-4.5dB |
| -                                            | -                                                                                                                                               | -             |

## **6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS**

### **6.1 RF Exposure (SAR)**

Test Result: Pass


The EUT is a portable device, thus requires SAR evaluation;  
Please refer to RF Exposure Evaluation Report: 15050034-FCC-H.

## 6.2 RF Output Power

|                      |                    |
|----------------------|--------------------|
| Temperature          | 23°C               |
| Relative Humidity    | 58%                |
| Atmospheric Pressure | 1006mbar           |
| Test date :          | September 01, 2015 |
| Tested By :          | Winnie Zhang       |

### Requirement(s):

| Spec        | Item | Requirement  | Applicable                          |
|-------------|------|--------------|-------------------------------------|
| §22.913 (a) | a)   | ERP:38.45dBm | <input checked="" type="checkbox"/> |
| §24.232 (c) | b)   | EIRP:33dBm   | <input checked="" type="checkbox"/> |
| §27.50 (c)  | c)   | EIRP: 30dBm  | <input checked="" type="checkbox"/> |

|            |                                                                                                                                                              |
|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Setup |  <p style="text-align: center;">Base Station                      EUT</p> |
|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|

|                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Procedure | <p>For Conducted Power:</p> <ul style="list-style-type: none"> <li>- The transmitter output port was connected to base station.</li> <li>- Set EUT at maximum power through base station.</li> <li>- Select lowest, middle, and highest channels for each band and different test mode.</li> </ul> <p>For ERP/EIRP:</p> <ul style="list-style-type: none"> <li>- The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.</li> <li>- The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.</li> <li>- The frequency range up to tenth harmonic of the fundamental frequency was investigated.</li> <li>- Remove the EUT and replace it with substitution antenna. A signal</li> </ul> |
|----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|             |                 |
|-------------|-----------------|
| Test Report | 15050034-FCC-R1 |
| Page        | 12 of 60        |

|        |                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|        | <p>generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.</p> <ul style="list-style-type: none"> <li>- Spurious emissions in dB = <math>10 \log (\text{TX power in Watts}/0.001)</math> – the absolute level</li> <li>- Spurious attenuation limit in dB = <math>43 + 10 \text{ Log}_{10} (\text{power out in Watts})</math>.</li> </ul> |
| Remark |                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Result | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail                                                                                                                                                                                                                                                                                                                                                                           |

Test Data ☒ Yes ☐ N/A

Test Plot ☐ Yes (See below) ☒ N/A

## Conducted Power

### GSM Mode:

| Burst Average Power (dBm);                           |              |       |       |                              |         |       |              |                              |
|------------------------------------------------------|--------------|-------|-------|------------------------------|---------|-------|--------------|------------------------------|
| Band                                                 | GSM850       |       |       |                              | PCS1900 |       |              |                              |
| Channel                                              | 128          | 190   | 251   | Tune up<br>Power<br>tolerant | 512     | 661   | 810          | Tune up<br>Power<br>tolerant |
| Frequency (MHz)                                      | 824.2        | 836.6 | 848.8 | /                            | 1850.2  | 1880  | 1909.8       | /                            |
| GSM Voice<br>(1 uplink),GMSK                         | <b>33.04</b> | 32.88 | 33.01 | 33±1                         | 30.21   | 30.49 | <b>30.79</b> | 30±1                         |
| GPRS Multi-Slot Class<br>8 (1 uplink),GMSK           | 33.02        | 32.84 | 32.98 | 33±1                         | 30.18   | 30.45 | 30.65        | 30±1                         |
| GPRS Multi-Slot Class<br>10 (2 uplink) GMSK          | 32.18        | 31.97 | 32.11 | 32±1                         | 29.48   | 29.87 | 30.24        | 30±1                         |
| GPRS Multi-Slot Class<br>12 (4 uplink) GMSK          | 29.51        | 29.28 | 29.44 | 29±1                         | 26.28   | 26.92 | 27.57        | 27±1                         |
| EGPRS Multi-Slot<br>Class 8 (1 uplink)<br>GMSK MCS1  | 32.95        | 32.83 | 32.96 | 32±1                         | 30.14   | 30.36 | 30.68        | 30±1                         |
| EGPRS Multi-Slot<br>Class 10 (2 uplink)<br>GMSK MCS1 | 32.31        | 32.14 | 32.27 | 32±1                         | 29.47   | 29.86 | 30.25        | 30±1                         |
| EGPRS Multi-Slot<br>Class 12 (4 uplink)<br>GMSK MCS1 | 29.52        | 29.34 | 29.46 | 29±1                         | 26.25   | 26.92 | 27.43        | 27±1                         |
| EGPRS Multi-Slot<br>Class 8 (1 uplink),<br>MCS5      | 26.18        | 26.19 | 26.22 | 26±1                         | 25.94   | 26.12 | 26.19        | 26±1                         |
| EGPRS Multi-Slot<br>Class 10 (2 uplink),<br>MCS5     | 25.27        | 25.24 | 25.26 | 25±1                         | 24.93   | 25.18 | 25.22        | 25±1                         |
| EGPRS Multi-Slot<br>Class 12 (4 uplink),<br>MCS5     | 22.35        | 22.33 | 22.31 | 22±1                         | 21.68   | 21.83 | 21.92        | 21±1                         |

|             |                 |
|-------------|-----------------|
| Test Report | 15050034-FCC-R1 |
| Page        | 14 of 60        |

Remark :

GPRS, CS1 coding scheme.

EGPRS, MCS1 coding scheme.

EGPRS, MCS5 coding scheme.

Multi-Slot Class 8 , Support Max 4 downlink, 1 uplink , 5 working link

Multi-Slot Class 10 , Support Max 4 downlink, 2 uplink , 5 working link

Multi-Slot Class 12 , Support Max 4 downlink, 4 uplink , 5 working link

**Note: Since GSM mode has higher power, so the test items below were not performed to GPRS and EGPRS mode.**

## UMTS Mode:

### UMTS-FDD Band V

| Band/ Time Slot configuration | Channel | Frequency | Average power (dBm) | Tune up Power tolerant |
|-------------------------------|---------|-----------|---------------------|------------------------|
| RMC<br>12.2kbps               | 4132    | 826.4     | <b>23.70</b>        | 23±1                   |
|                               | 4175    | 835       | 23.13               | 23±1                   |
|                               | 4233    | 846.6     | 23.07               | 23±1                   |
| HSDPA<br>Subtest1             | 4132    | 826.4     | 22.15               | 23±1                   |
|                               | 4175    | 835       | 22.12               | 23±1                   |
|                               | 4233    | 846.6     | 22.08               | 23±1                   |
| HSDPA<br>Subtest2             | 4132    | 826.4     | 22.81               | 23±1                   |
|                               | 4175    | 835       | 22.64               | 23±1                   |
|                               | 4233    | 846.6     | 22.10               | 23±1                   |
| HSDPA<br>Subtest3             | 4132    | 826.4     | 22.26               | 23±1                   |
|                               | 4175    | 835       | 22.21               | 23±1                   |
|                               | 4233    | 846.6     | 22.04               | 23±1                   |
| HSDPA<br>Subtest4             | 4132    | 826.4     | 22.15               | 23±1                   |
|                               | 4175    | 835       | 22.19               | 23±1                   |
|                               | 4233    | 846.6     | 22.72               | 23±1                   |
| HSUPA<br>Subtest1             | 4132    | 826.4     | 22.68               | 23±1                   |
|                               | 4175    | 835       | 22.51               | 23±1                   |
|                               | 4233    | 846.6     | 22.41               | 23±1                   |
| HSUPA<br>Subtest2             | 4132    | 826.4     | 22.05               | 23±1                   |
|                               | 4175    | 835       | 22.16               | 23±1                   |
|                               | 4233    | 846.6     | 22.71               | 23±1                   |
| HSUPA<br>Subtest3             | 4132    | 826.4     | 22.63               | 23±1                   |
|                               | 4175    | 835       | 22.42               | 23±1                   |
|                               | 4233    | 846.6     | 22.08               | 23±1                   |
| HSUPA<br>Subtest4             | 4132    | 826.4     | 22.28               | 23±1                   |
|                               | 4175    | 835       | 22.65               | 23±1                   |
|                               | 4233    | 846.6     | 22.41               | 23±1                   |
| HSUPA<br>Subtest5             | 4132    | 826.4     | 22.45               | 23±1                   |
|                               | 4175    | 835       | 22.15               | 23±1                   |
|                               | 4233    | 846.6     | 22.36               | 23±1                   |

## UMTS-FDD Band II

| Band/ Time Slot configuration | Channel | Frequency | Average power (dBm) | Tune up Power tolerant |
|-------------------------------|---------|-----------|---------------------|------------------------|
| RMC<br>12.2kbps               | 9262    | 1852.4    | 21.91               | 22±1                   |
|                               | 9400    | 1880      | 22.19               | 22±1                   |
|                               | 9538    | 1907.6    | <b>22.57</b>        | 22±1                   |
| HSDPA<br>Subtest1             | 9262    | 1852.4    | 20.98               | 21.3±1                 |
|                               | 9400    | 1880      | 21.35               | 21.3±1                 |
|                               | 9538    | 1907.6    | 21.31               | 21.3±1                 |
| HSDPA<br>Subtest2             | 9262    | 1852.4    | 21.19               | 21.3±1                 |
|                               | 9400    | 1880      | 21.64               | 21.3±1                 |
|                               | 9538    | 1907.6    | 20.92               | 21.3±1                 |
| HSDPA<br>Subtest3             | 9262    | 1852.4    | 21.63               | 21.3±1                 |
|                               | 9400    | 1880      | 21.58               | 21.3±1                 |
|                               | 9538    | 1907.6    | 20.89               | 21.3±1                 |
| HSDPA<br>Subtest4             | 9262    | 1852.4    | 21.51               | 21.3±1                 |
|                               | 9400    | 1880      | 21.36               | 21.3±1                 |
|                               | 9538    | 1907.6    | 21.51               | 21.3±1                 |
| HSUPA<br>Subtest1             | 9262    | 1852.4    | 21.45               | 21.3±1                 |
|                               | 9400    | 1880      | 21.33               | 21.3±1                 |
|                               | 9538    | 1907.6    | 21.29               | 21.3±1                 |
| HSUPA<br>Subtest2             | 9262    | 1852.4    | 21.17               | 21.3±1                 |
|                               | 9400    | 1880      | 20.97               | 21.3±1                 |
|                               | 9538    | 1907.6    | 20.84               | 21.3±1                 |
| HSUPA<br>Subtest3             | 9262    | 1852.4    | 21.38               | 21.3±1                 |
|                               | 9400    | 1880      | 21.36               | 21.3±1                 |
|                               | 9538    | 1907.6    | 21.61               | 21.3±1                 |
| HSUPA<br>Subtest4             | 9262    | 1852.4    | 21.62               | 21.3±1                 |
|                               | 9400    | 1880      | 21.35               | 21.3±1                 |
|                               | 9538    | 1907.6    | 21.24               | 21.3±1                 |
| HSUPA<br>Subtest5             | 9262    | 1852.4    | 21.29               | 21.3±1                 |
|                               | 9400    | 1880      | 20.95               | 21.3±1                 |
|                               | 9538    | 1907.6    | 21.56               | 21.3±1                 |

## UMTS-FDD Band IV

| Band/ Time Slot configuration | Channel | Frequency | Average power (dBm) | Tune up Power tolerant |
|-------------------------------|---------|-----------|---------------------|------------------------|
| RMC<br>12.2kbps               | 1313    | 1712.6    | 23.19               | 23±1                   |
|                               | 1413    | 1732.6    | <b>23.23</b>        | 23±1                   |
|                               | 1512    | 1752.4    | 22.81               | 23±1                   |
| HSDPA<br>Subtest1             | 1313    | 1712.6    | 22.15               | 23±1                   |
|                               | 1413    | 1732.6    | 22.23               | 22±1                   |
|                               | 1512    | 1752.4    | 21.79               | 22±1                   |
| HSDPA<br>Subtest2             | 1313    | 1712.6    | 22.09               | 22±1                   |
|                               | 1413    | 1732.6    | 22.16               | 22±1                   |
|                               | 1512    | 1752.4    | 22.29               | 22±1                   |
| HSDPA<br>Subtest3             | 1313    | 1712.6    | 22.24               | 22±1                   |
|                               | 1413    | 1732.6    | 22.16               | 22±1                   |
|                               | 1512    | 1752.4    | 22.21               | 22±1                   |
| HSDPA<br>Subtest4             | 1313    | 1712.6    | 21.69               | 22±1                   |
|                               | 1413    | 1732.6    | 22.37               | 22±1                   |
|                               | 1512    | 1752.4    | 22.28               | 22±1                   |
| HSUPA<br>Subtest1             | 1313    | 1712.6    | 21.17               | 22±1                   |
|                               | 1413    | 1732.6    | 21.84               | 22±1                   |
|                               | 1512    | 1752.4    | 21.45               | 22±1                   |
| HSUPA<br>Subtest2             | 1313    | 1712.6    | 22.28               | 22±1                   |
|                               | 1413    | 1732.6    | 22.45               | 22±1                   |
|                               | 1512    | 1752.4    | 22.17               | 22±1                   |
| HSUPA<br>Subtest3             | 1313    | 1712.6    | 22.24               | 22±1                   |
|                               | 1413    | 1732.6    | 22.51               | 22±1                   |
|                               | 1512    | 1752.4    | 22.42               | 22±1                   |
| HSUPA<br>Subtest4             | 1313    | 1712.6    | 22.36               | 22±1                   |
|                               | 1413    | 1732.6    | 21.77               | 22±1                   |
|                               | 1512    | 1752.4    | 21.79               | 22±1                   |
| HSUPA<br>Subtest5             | 1313    | 1712.6    | 22.08               | 22±1                   |
|                               | 1413    | 1732.6    | 22.15               | 22±1                   |
|                               | 1512    | 1752.4    | 22.15               | 22±1                   |

## ERP & EIRP

### ERP for Cellular Band (Part 22H)

| Frequency (MHz) | Substituted level (dBm) | Antenna Polarization | Antenna Gain correction (dBi) | Cable Loss (dB) | Absolute Level (dBm) | Limit (dBm) |
|-----------------|-------------------------|----------------------|-------------------------------|-----------------|----------------------|-------------|
| 824.2           | 19.53                   | V                    | 6.8                           | 0.53            | <b>25.80</b>         | 38.45       |
| 824.2           | 18.29                   | H                    | 6.8                           | 0.53            | 24.56                | 38.45       |
| 836.6           | 19.28                   | V                    | 6.8                           | 0.53            | 25.55                | 38.45       |
| 836.6           | 18.23                   | H                    | 6.8                           | 0.53            | 24.50                | 38.45       |
| 848.8           | 19.41                   | V                    | 6.9                           | 0.53            | 25.78                | 38.45       |
| 848.8           | 18.15                   | H                    | 6.9                           | 0.53            | 24.52                | 38.45       |

### EIRP for PCS Band (Part 24E)

| Frequency (MHz) | Substituted level (dBm) | Antenna Polarization | Antenna Gain correction (dBi) | Cable Loss (dB) | Absolute Level (dBm) | Limit (dBm) |
|-----------------|-------------------------|----------------------|-------------------------------|-----------------|----------------------|-------------|
| 1850.2          | 15.36                   | V                    | 7.88                          | 0.85            | 22.39                | 33          |
| 1850.2          | 14.11                   | H                    | 7.88                          | 0.85            | 21.14                | 33          |
| 1880            | 15.54                   | V                    | 7.88                          | 0.85            | <b>22.57</b>         | 33          |
| 1880            | 14.29                   | H                    | 7.88                          | 0.85            | 21.32                | 33          |
| 1909.8          | 15.46                   | V                    | 7.86                          | 0.85            | 22.47                | 33          |
| 1909.8          | 14.32                   | H                    | 7.86                          | 0.85            | 21.33                | 33          |

### ERP for UMTS-FDD Band V (Part 22H)

| Frequency (MHz) | Substituted level (dBm) | Antenna Polarization | Antenna Gain correction (dBi) | Cable Loss (dB) | Absolute Level (dBm) | Limit (dBm) |
|-----------------|-------------------------|----------------------|-------------------------------|-----------------|----------------------|-------------|
| 826.4           | 12.83                   | V                    | 6.8                           | 0.53            | 19.10                | 38.45       |
| 826.4           | 12.51                   | H                    | 6.8                           | 0.53            | 18.78                | 38.45       |
| 835             | 12.77                   | V                    | 6.8                           | 0.53            | 19.04                | 38.45       |
| 835             | 12.24                   | H                    | 6.8                           | 0.53            | 18.51                | 38.45       |
| 846.6           | 12.89                   | V                    | 6.9                           | 0.53            | <b>19.26</b>         | 38.45       |
| 846.6           | 12.31                   | H                    | 6.9                           | 0.53            | 18.68                | 38.45       |

### EIRP for UMTS-FDD Band II (Part 24E)

| Frequency (MHz) | Substituted level (dBm) | Antenna Polarization | Antenna Gain correction (dBi) | Cable Loss (dB) | Absolute Level (dBm) | Limit (dBm) |
|-----------------|-------------------------|----------------------|-------------------------------|-----------------|----------------------|-------------|
| 1852.4          | 11.46                   | V                    | 7.88                          | 0.85            | <b>18.49</b>         | 33          |
| 1852.4          | 10.21                   | H                    | 7.88                          | 0.85            | 17.24                | 33          |
| 1880            | 11.39                   | V                    | 7.88                          | 0.85            | 18.42                | 33          |
| 1880            | 10.17                   | H                    | 7.88                          | 0.85            | 17.20                | 33          |
| 1907.6          | 11.42                   | V                    | 7.86                          | 0.85            | 18.43                | 33          |
| 1907.6          | 10.25                   | H                    | 7.86                          | 0.85            | 17.26                | 33          |


### EIRP for UMTS-FDD Band IV (Part 27H)

| Frequency (MHz) | Substituted level (dBm) | Antenna Polarization | Antenna Gain correction (dBi) | Cable Loss (dB) | Absolute Level (dBm) | Limit (dBm) |
|-----------------|-------------------------|----------------------|-------------------------------|-----------------|----------------------|-------------|
| 1712.4          | 12.36                   | V                    | 7.76                          | 0.82            | <b>19.30</b>         | 30          |
| 1712.4          | 11.81                   | H                    | 7.76                          | 0.82            | 18.75                | 30          |
| 1740            | 12.24                   | V                    | 7.76                          | 0.82            | 19.18                | 30          |
| 1740            | 11.77                   | H                    | 7.76                          | 0.82            | 18.71                | 30          |
| 1752.6          | 12.29                   | V                    | 7.74                          | 0.82            | 19.21                | 30          |
| 1752.6          | 11.64                   | H                    | 7.74                          | 0.82            | 18.56                | 30          |

### 6.3 Peak-Average Ratio

|                      |                 |
|----------------------|-----------------|
| Temperature          | 23°C            |
| Relative Humidity    | 58%             |
| Atmospheric Pressure | 1006mbar        |
| Test date :          | August 24, 2015 |
| Tested By :          | Winnie Zhang    |

Requirement(s):
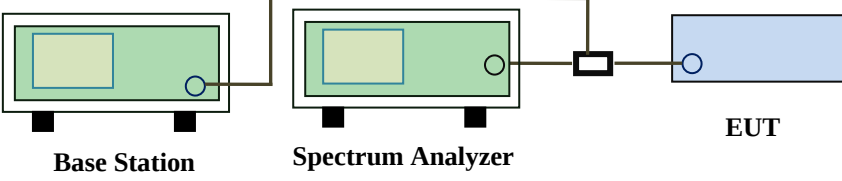
| Spec                     | Item                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Requirement                                                               | Applicable                          |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|-------------------------------------|
| §24.232(d)<br>§ 27.50(d) | a)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB. | <input checked="" type="checkbox"/> |
| Test Setup               |  <p style="text-align: center;">Base Station      Spectrum Analyzer      EUT</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                           |                                     |
| Test Procedure           | <p><b>According with KDB 971168</b></p> <ol style="list-style-type: none"> <li>1. The signal analyzer' s CCDF measurement profile is enabled</li> <li>2. Frequency = carrier center frequency</li> <li>3. Measurement BW &gt; Emission bandwidth of signal</li> <li>4. The signal analyzer was set to collect one million samples to generate the CCDF curve</li> <li>5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (&gt;98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal “ RF Burst” trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the “ on time” of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power</li> </ol> |                                                                           |                                     |
| Remark                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                           |                                     |
| Result                   | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                           |                                     |

Test Data    ☒ Yes      ☐ N/A

Test Plot    ☐ Yes (See below)      ☒ N/A

#### GSM 1900 PK-AV POWER(PART 22H)

| Frequency<br>(MHz) | Conducted power(dBm) |         | Peak-Average<br>Ratio(PAR) |
|--------------------|----------------------|---------|----------------------------|
|                    | Peak                 | Average |                            |
| 1850.2             | 30.54                | 30.21   | 0.33                       |
| 1880               | 30.65                | 30.49   | 0.16                       |
| 1909.8             | 31.26                | 30.79   | 0.47                       |

#### UMTS-FDD BandII PK-AV POWER(PART 24E)

| Frequency<br>(MHz) | Conducted power(dBm) |         | Peak-Average<br>Ratio(PAR) |
|--------------------|----------------------|---------|----------------------------|
|                    | Peak                 | Average |                            |
| 1852.4             | 24.73                | 21.91   | 2.82                       |
| 1880               | 25.49                | 22.19   | 3.3                        |
| 1907.6             | 25.56                | 22.57   | 2.99                       |

#### UMTS-FDD BandIV PK-AV POWER (PART 27)

| Frequency<br>(MHz) | Conducted power(dBm) |         | Peak-Average<br>Ratio(PAR) |
|--------------------|----------------------|---------|----------------------------|
|                    | Peak                 | Average |                            |
| 1712.6             | 26.34                | 23.19   | 3.15                       |
| 1732.6             | 26.38                | 23.23   | 3.15                       |
| 1752.4             | 25.95                | 22.81   | 3.14                       |

## 6.4 Modulation Characteristic

According to FCC § 2.1047(d), Part 22H, 24E& Part 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

## 6.5 Occupied Bandwidth

|                      |                 |
|----------------------|-----------------|
| Temperature          | 22°C            |
| Relative Humidity    | 53%             |
| Atmospheric Pressure | 1029mbar        |
| Test date :          | August 29, 2015 |
| Tested By :          | Winnie Zhang    |

### Requirement(s):

| Spec                                                    | Item                                                                                                                                                                                                                                     | Requirement                 | Applicable                          |
|---------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|-------------------------------------|
| §2.1049,<br>§22.917,<br>§22.905<br>§24.238<br>§27.53(a) | a)                                                                                                                                                                                                                                       | 99% Occupied Bandwidth(kHz) | <input checked="" type="checkbox"/> |
|                                                         | b)                                                                                                                                                                                                                                       | 26 dB Bandwidth(kHz)        | <input checked="" type="checkbox"/> |
| Test Setup                                              | <p>Base Station      Spectrum Analyzer      EUT</p>                                                                                                                                                                                      |                             |                                     |
| Test Procedure                                          | <ul style="list-style-type: none"> <li>- The EUT was connected to Spectrum Analyzer and Base Station via power divider.</li> <li>- The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers.</li> </ul> |                             |                                     |
| Remark                                                  |                                                                                                                                                                                                                                          |                             |                                     |
| Result                                                  | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail                                                                                                                                                                   |                             |                                     |

Test Data    ☒ Yes      ☐ N/A

Test Plot    ☒ Yes (See below)      ☐ N/A

### Cellular Band (Part 22H) result

| Channel | Frequency (MHz) | 99% Occupied Bandwidth (kHz) | 26 dB Bandwidth (kHz) |
|---------|-----------------|------------------------------|-----------------------|
| 128     | 824.2           | 244.1720                     | 318.098               |
| 190     | 836.6           | 245.4366                     | 318.798               |
| 251     | 848.8           | 245.4553                     | 307.823               |

### PCS Band (Part 24E) result

| Channel | Frequency (MHz) | 99% Occupied Bandwidth (kHz) | 26 dB Bandwidth (kHz) |
|---------|-----------------|------------------------------|-----------------------|
| 512     | 1850.2          | 247.5076                     | 317.343               |
| 661     | 1880.0          | 246.3909                     | 318.396               |
| 810     | 1909.8          | 242.4358                     | 314.493               |

### UMTS-FDD Band V (Part 22H)

| Channel | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | 26 dB Bandwidth (MHz) |
|---------|-----------------|------------------------------|-----------------------|
| 4132    | 826.4           | 4.2053                       | 4.906                 |
| 4175    | 835.0           | 4.2247                       | 4.883                 |
| 4233    | 846.6           | 4.2150                       | 4.885                 |


### UMTS-FDD Band II (Part 24E)


| Channel | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | 26 dB Bandwidth (MHz) |
|---------|-----------------|------------------------------|-----------------------|
| 9262    | 1852.4          | 4.2133                       | 4.860                 |
| 9400    | 1880.0          | 4.2060                       | 4.862                 |
| 9538    | 1907.6          | 4.1997                       | 4.883                 |

### UMTS-FDD Band IV (Part 27E)


| Channel | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | 26 dB Bandwidth (MHz) |
|---------|-----------------|------------------------------|-----------------------|
| 9262    | 1852.4          | 4.2114                       | 4.846                 |
| 9400    | 1880.0          | 4.2130                       | 4.841                 |
| 9538    | 1907.6          | 4.2099                       | 4.888                 |

## Test Plots

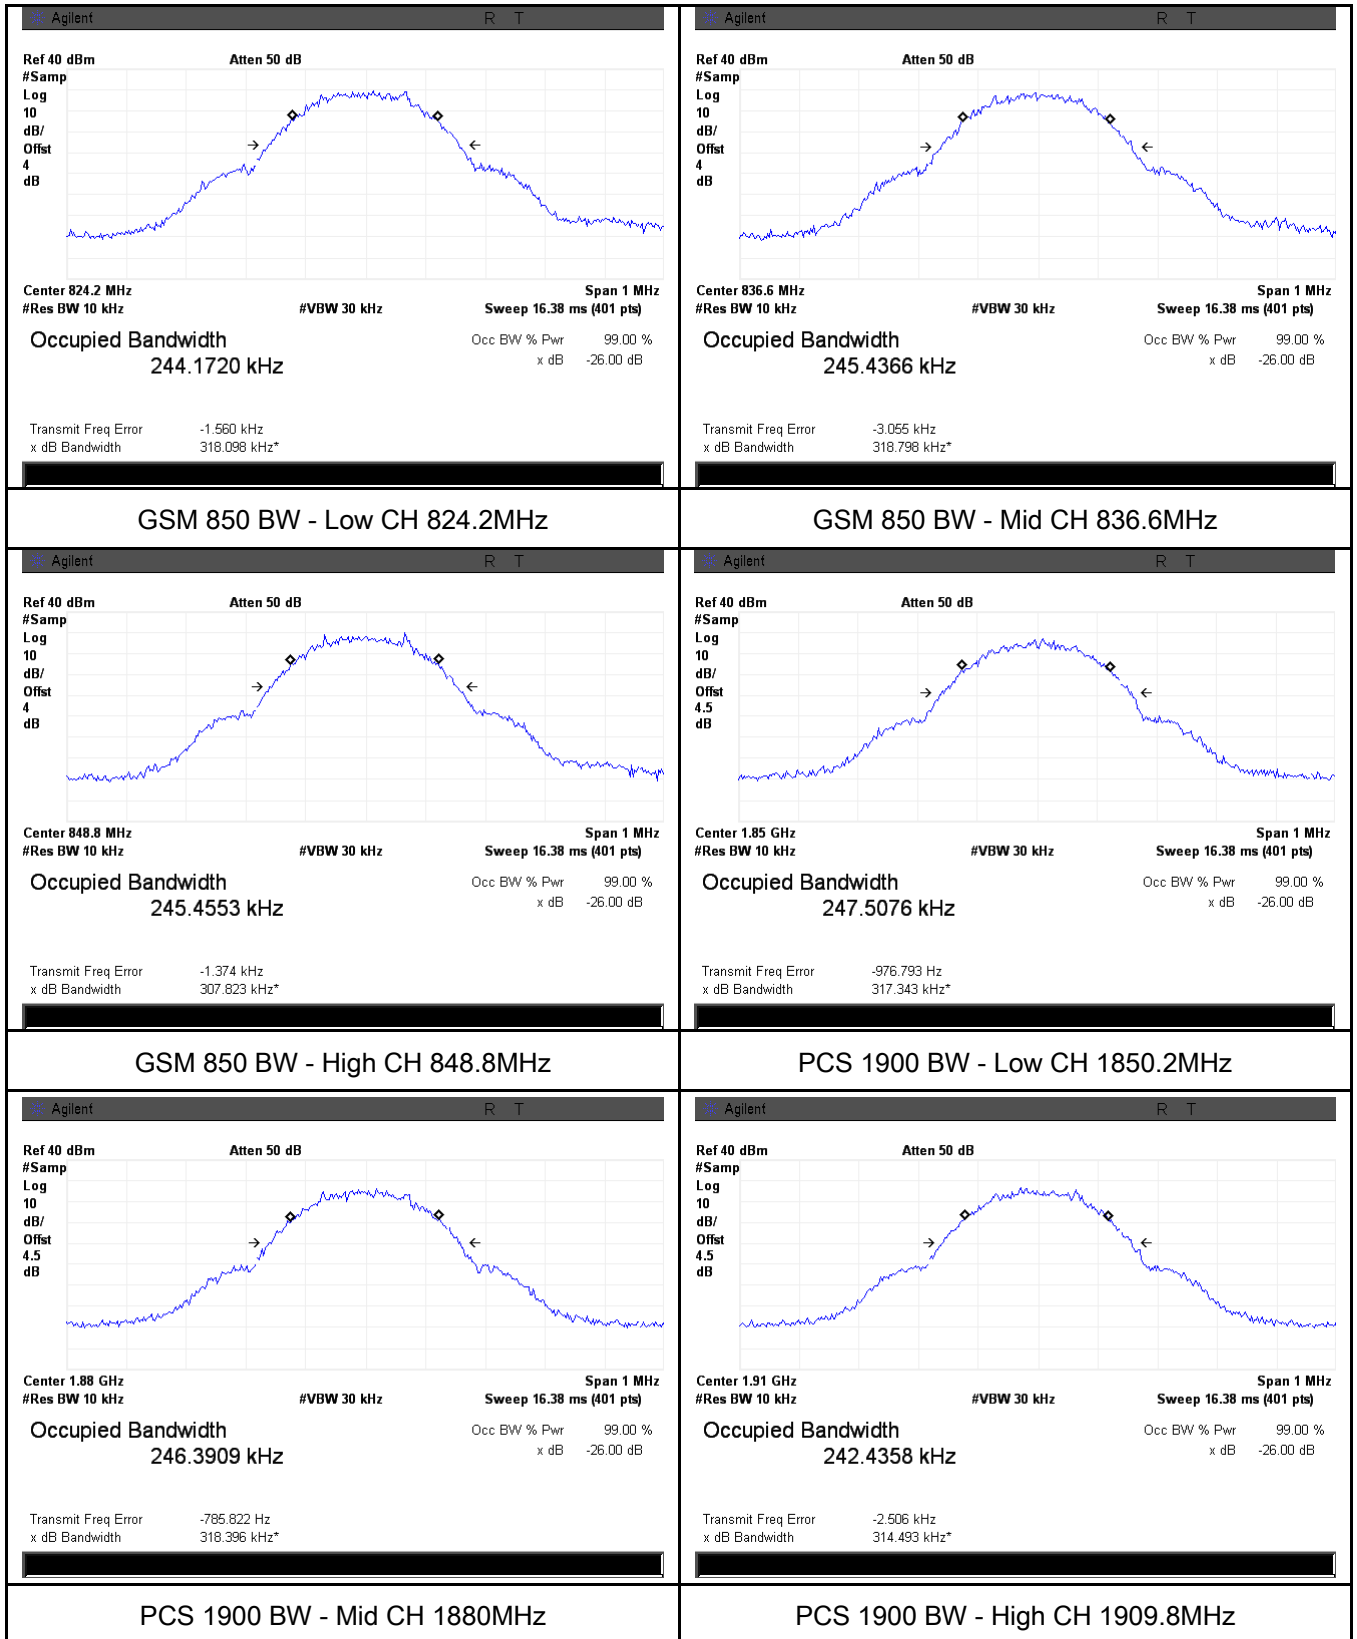


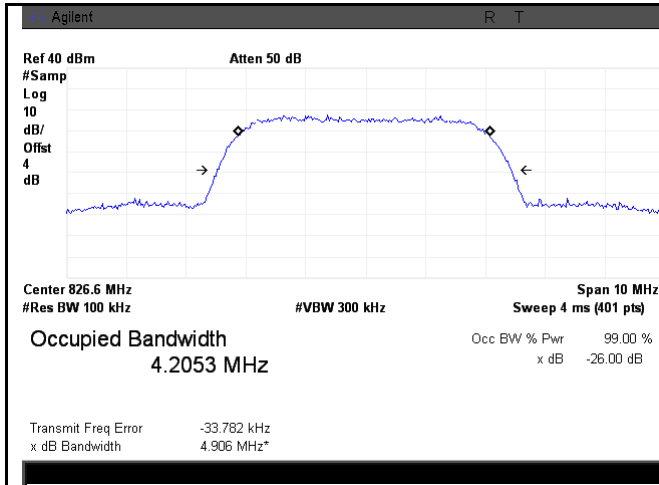


Band V BW - Low CH 826.6 MHz

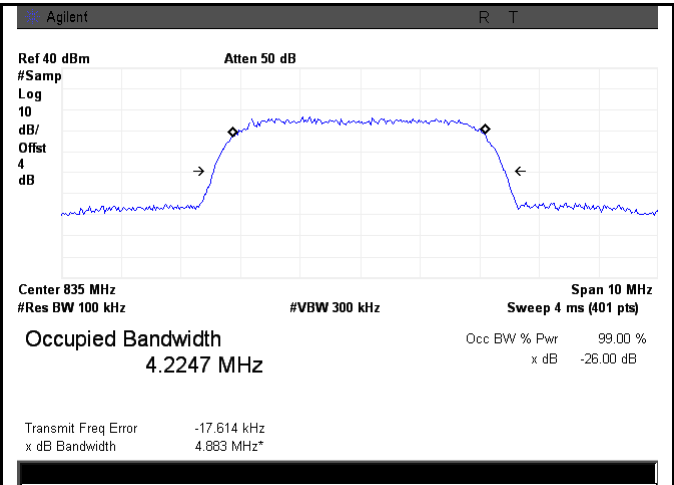


Band V BW - Mid CH 835.0 MHz

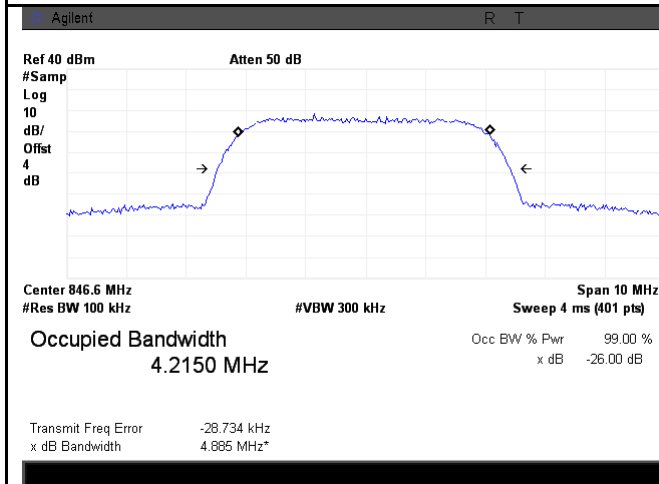


Band V BW - High CH 846.4 MHz

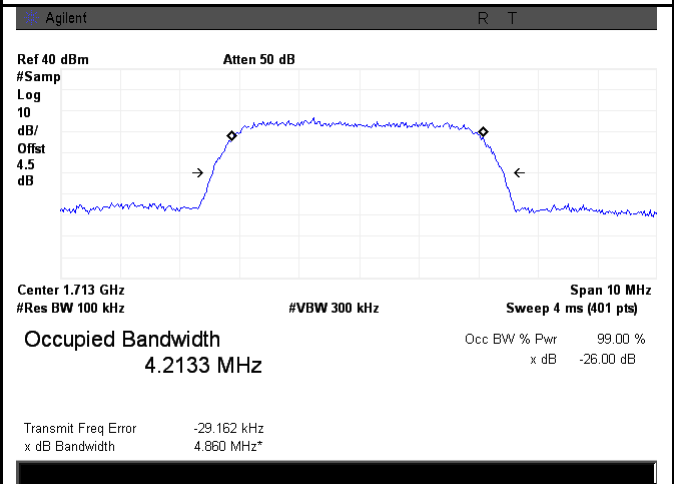

Band II BW - Low CH 1852.4MHz

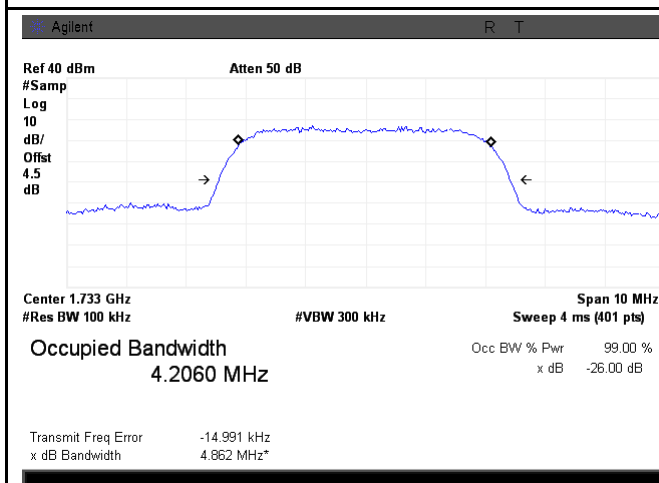


Band II BW - Mid CH 1880MHz

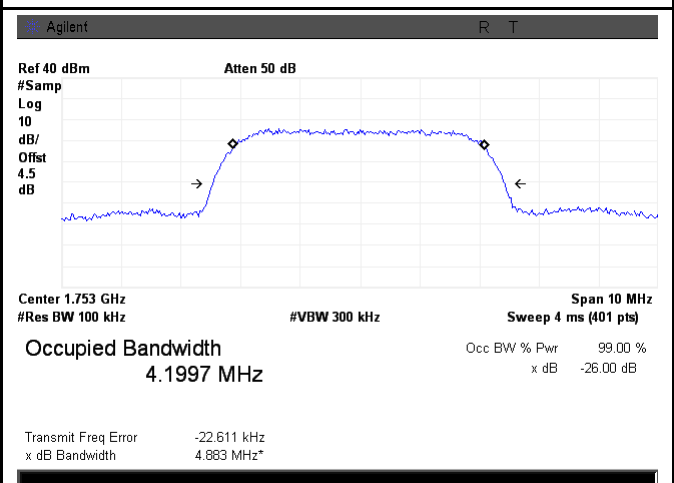


Band II BW - High CH 1907.6MHz


|             |                 |
|-------------|-----------------|
| Test Report | 15050034-FCC-R1 |
| Page        | 27 of 60        |

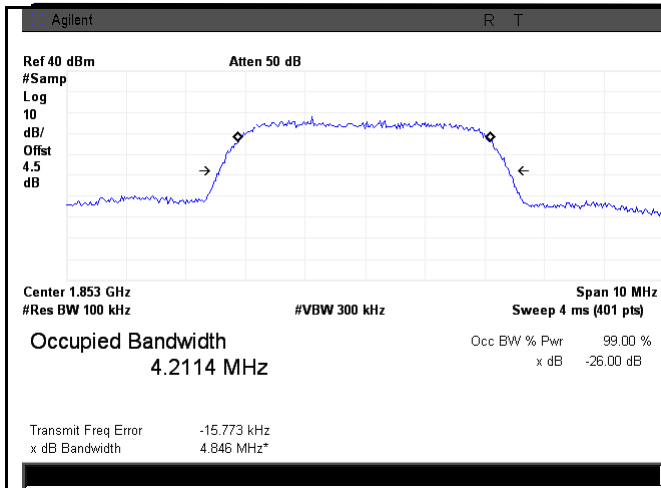

Band IV BW - Low CH 1852.4MHz

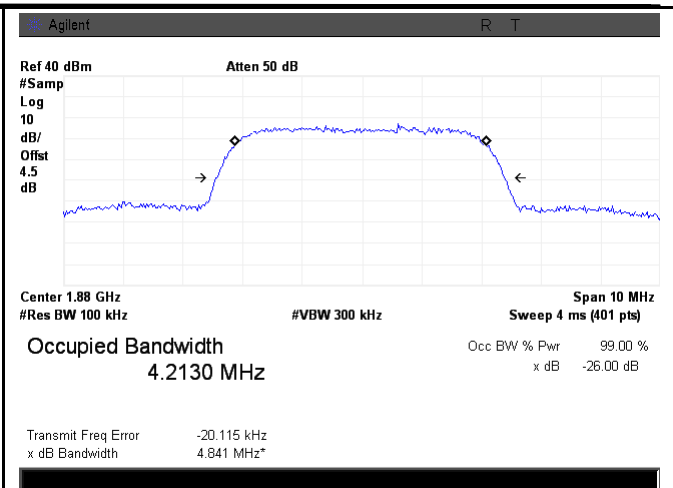

Band IVBW - Mid CH 1880MHz

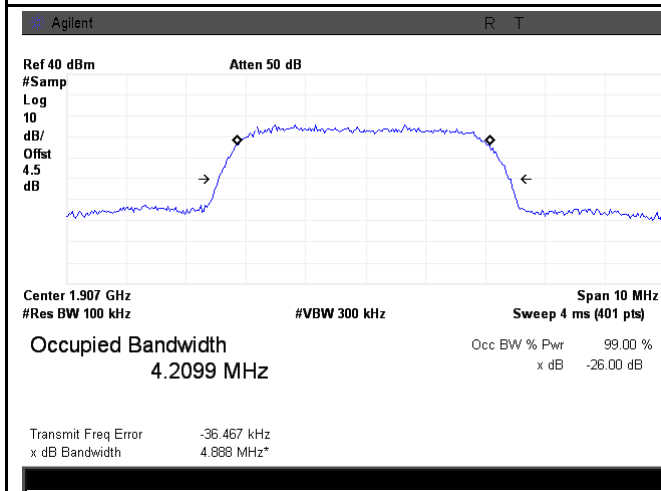


Band IV BW - High CH 1907.6MHz

## 6.6 Spurious Emissions at Antenna Terminals

|                      |                 |
|----------------------|-----------------|
| Temperature          | 22°C            |
| Relative Humidity    | 53%             |
| Atmospheric Pressure | 1029mbar        |
| Test date :          | August 29, 2015 |
| Tested By :          | Winnie Zhang    |

### Requirement(s):

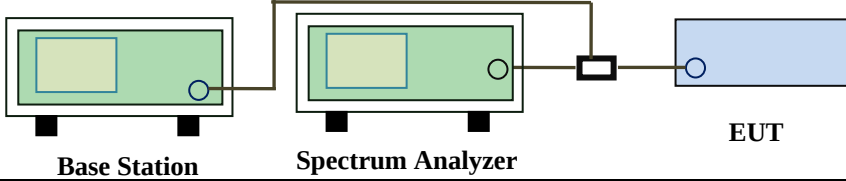
| Spec                                                | Item                                                                                                                                                                                                                                                                     | Requirement                                                                                                                                                               | Applicable                          |
|-----------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| §2.1051,<br>§22.917(a)&<br>§24.238(a)<br>§ 27.53(h) | a)                                                                                                                                                                                                                                                                       | The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB | <input checked="" type="checkbox"/> |
| Test Setup                                          |  <p style="text-align: center;">Base Station      Spectrum Analyzer      EUT</p>                                                                                                     |                                                                                                                                                                           |                                     |
| Test Procedure                                      | <ul style="list-style-type: none"> <li>- The EUT was connected to Spectrum Analyzer and Base Station via power divider.</li> <li>- The Band Edges of low and high channels for the highest RF powers were measured.</li> <li>- Setting RBW as roughly BW/100.</li> </ul> |                                                                                                                                                                           |                                     |
| Remark                                              |                                                                                                                                                                                                                                                                          |                                                                                                                                                                           |                                     |
| Result                                              | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail                                                                                                                                                                                                   |                                                                                                                                                                           |                                     |

Test Data    ☒ Yes      ☐ N/A


Test Plot    ☒ Yes (See below)      ☐ N/A

## Test Plots


### Cellular Band (Part 22H) result

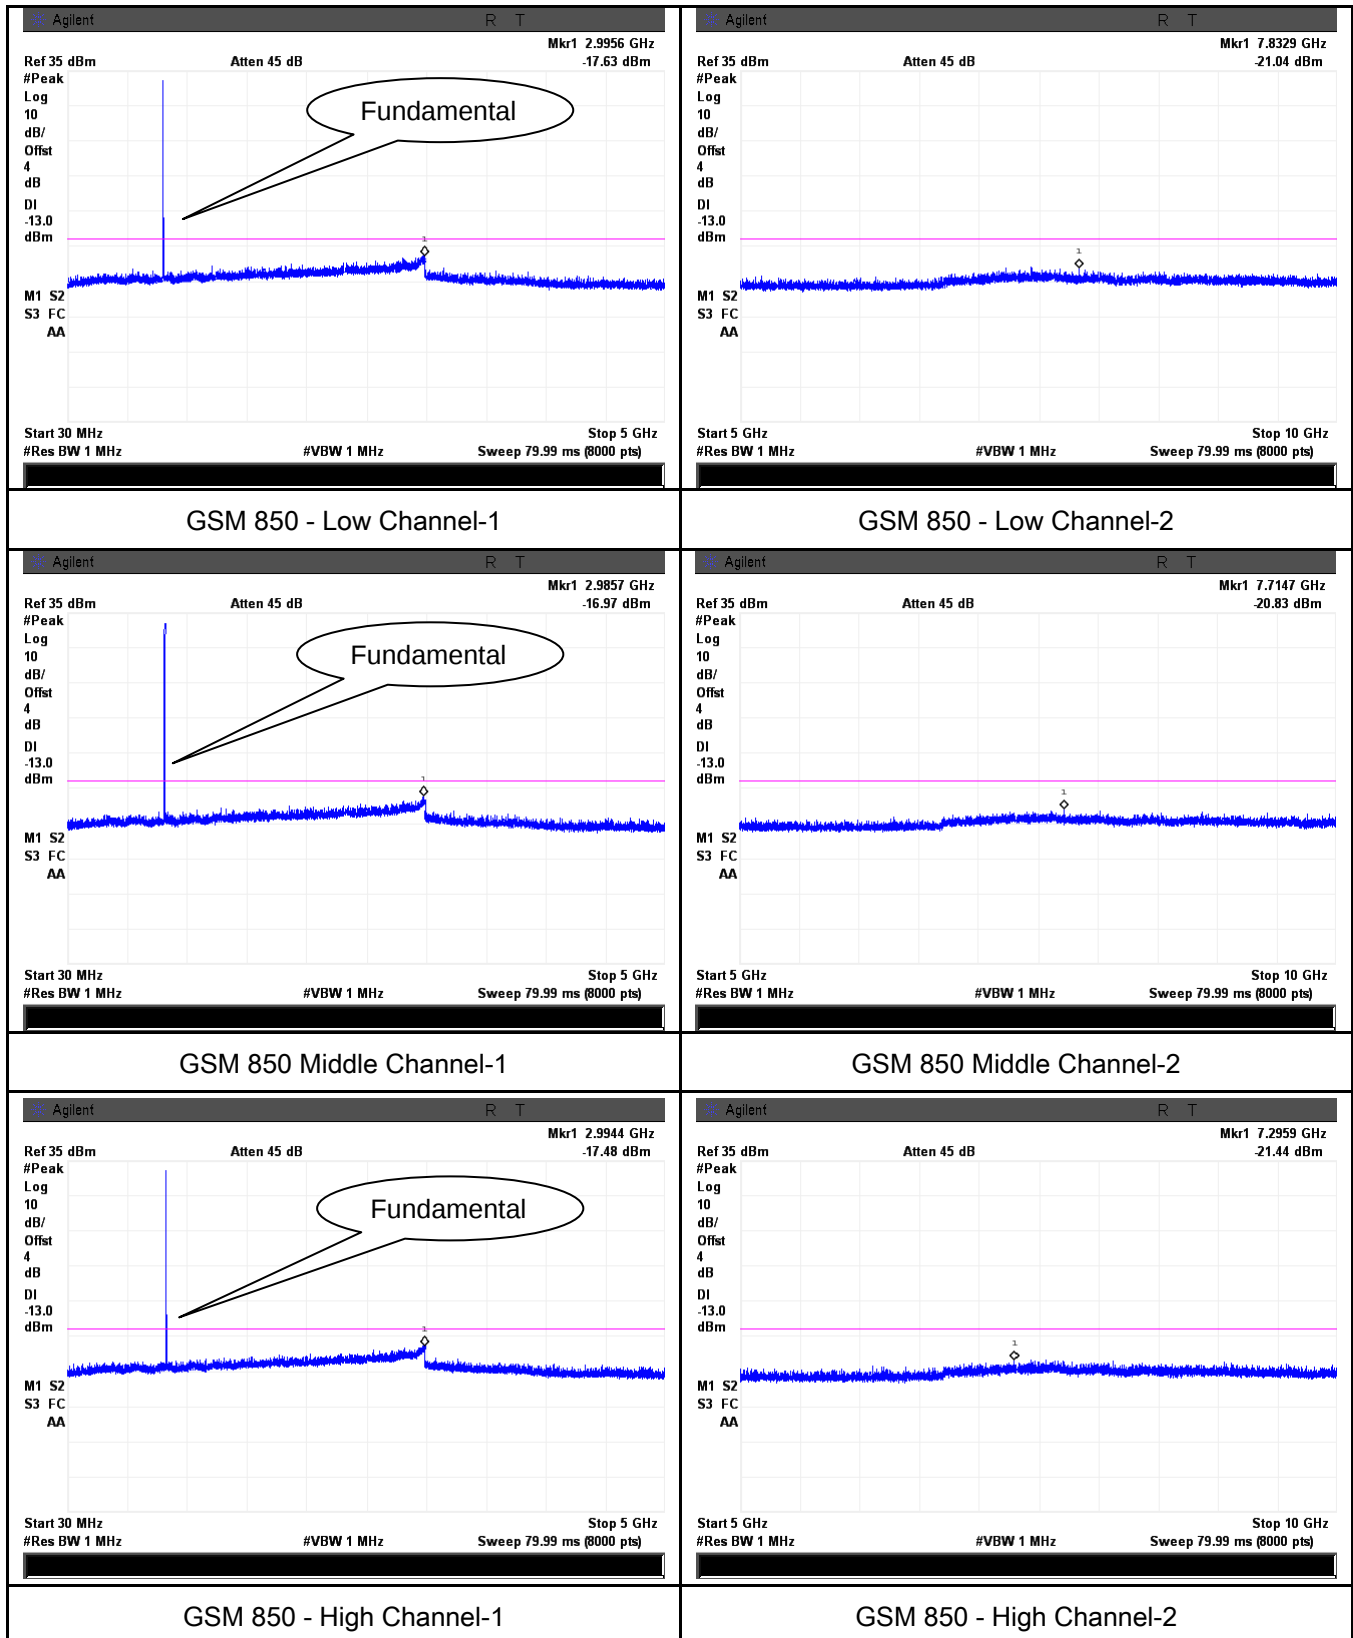


## PCS Band (Part24E) result

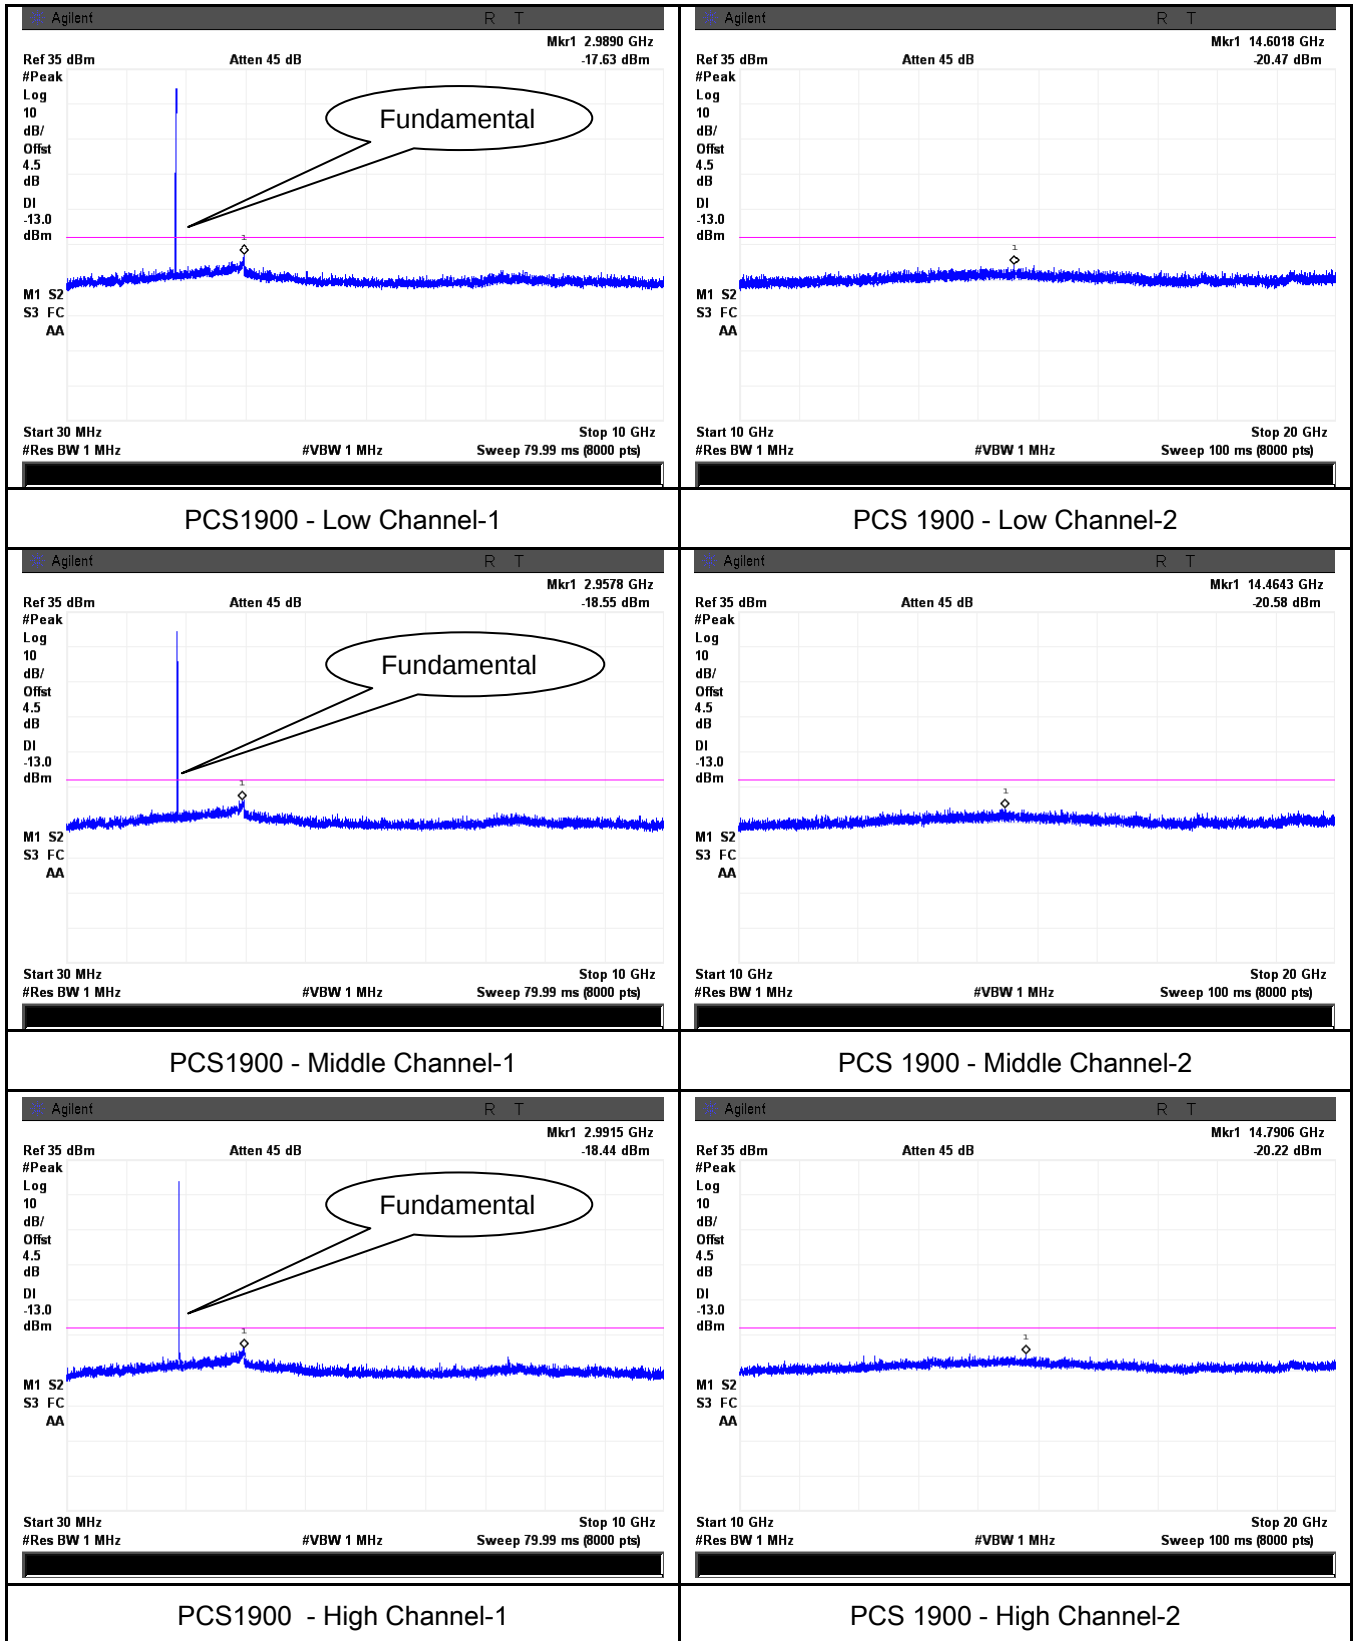


## UMTS-FDD Band V (Part 22H)

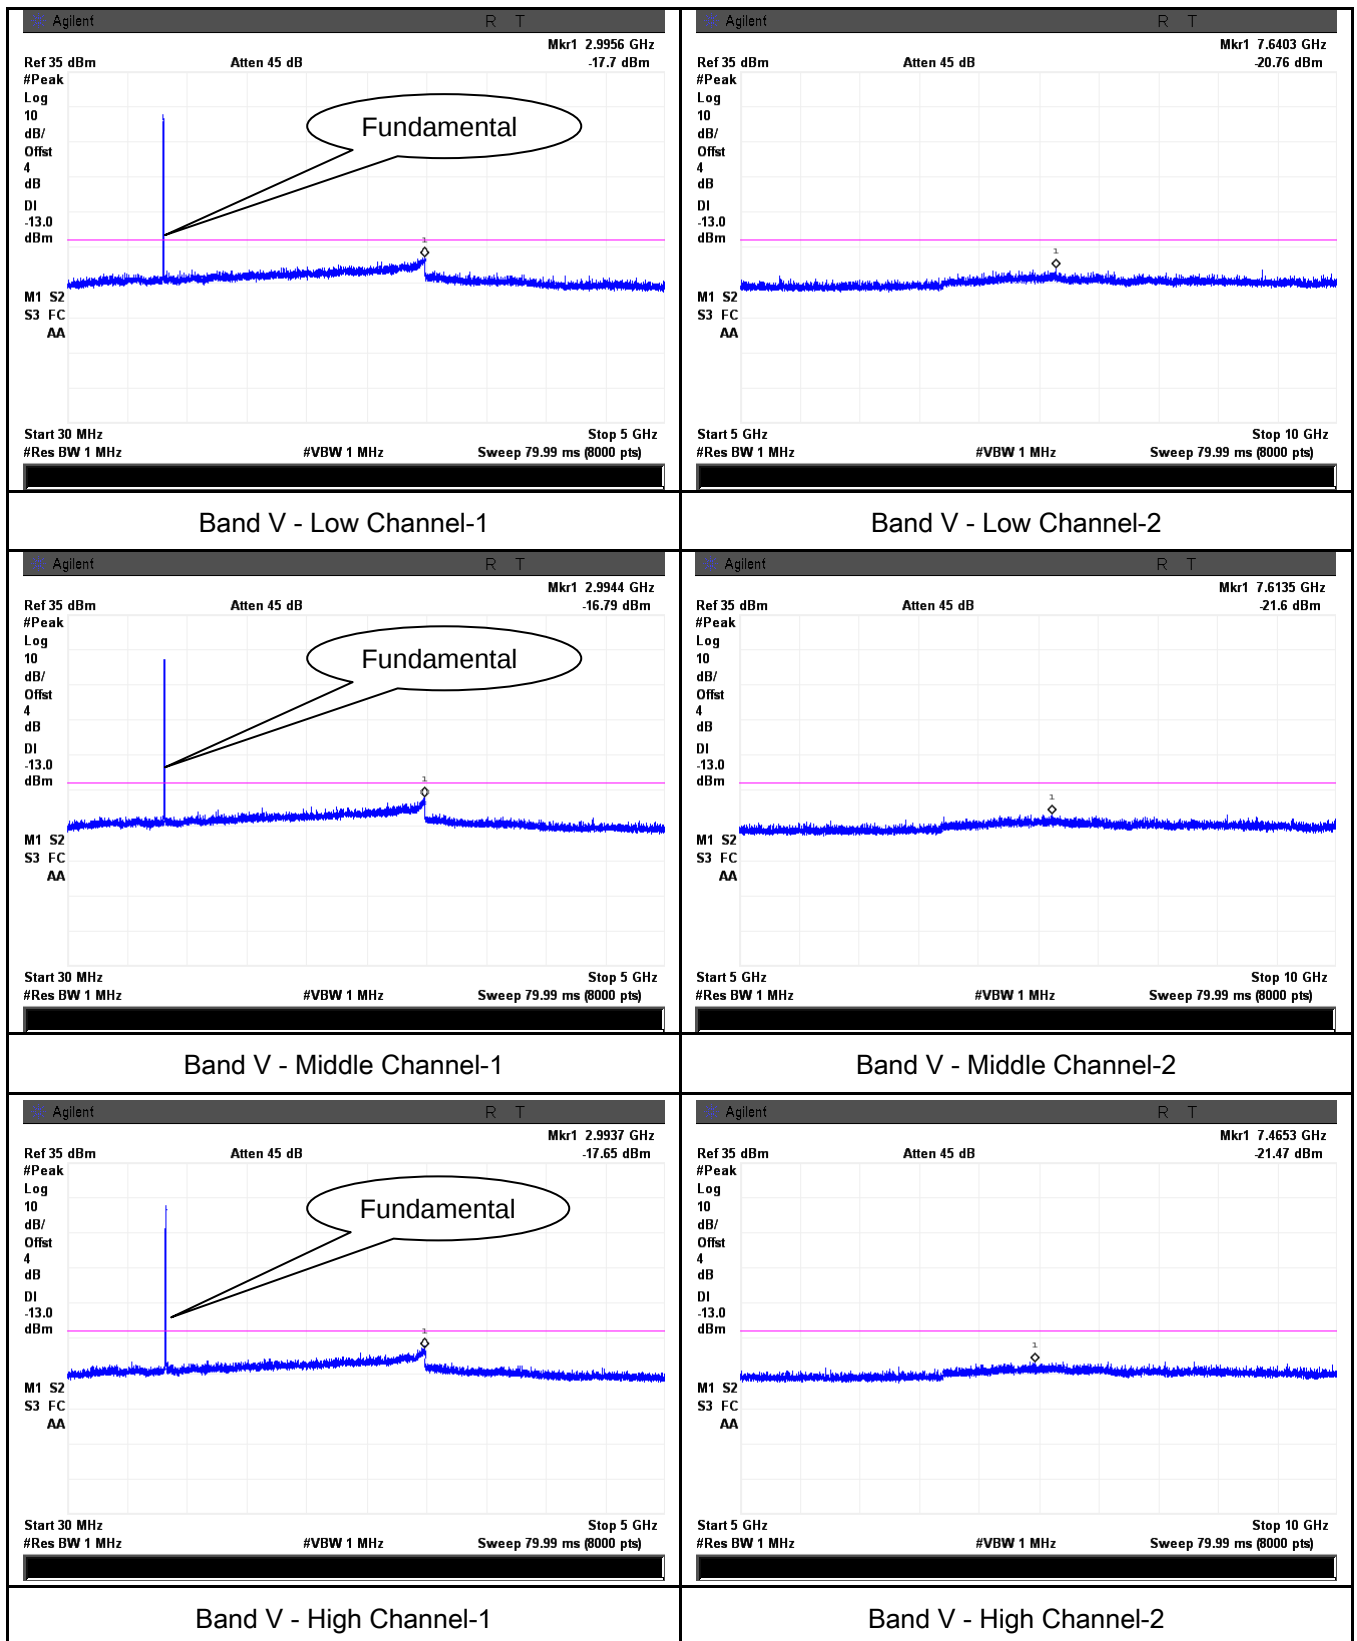

## UMTS-FDD Band II (Part 24E)

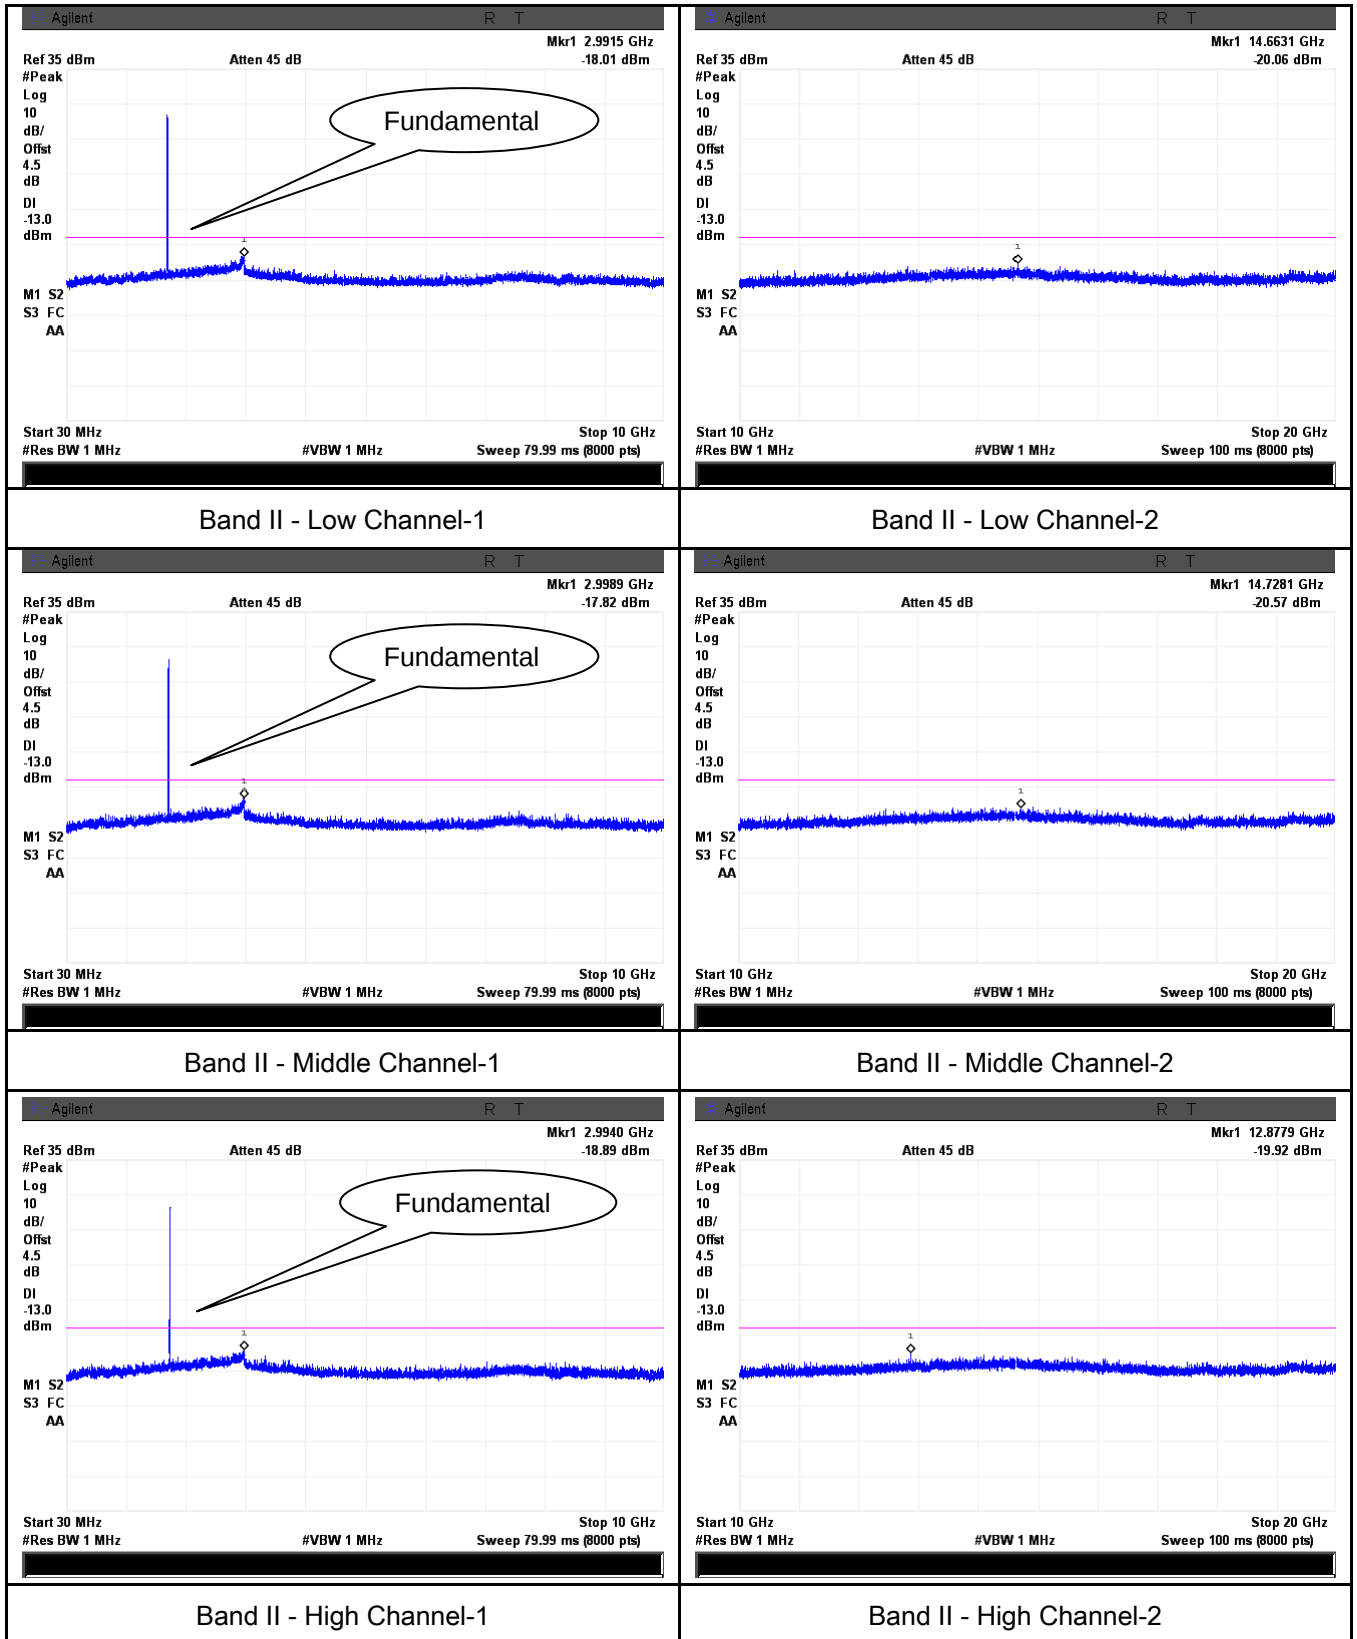

## UMTS-FDD Band IV (Part 27)

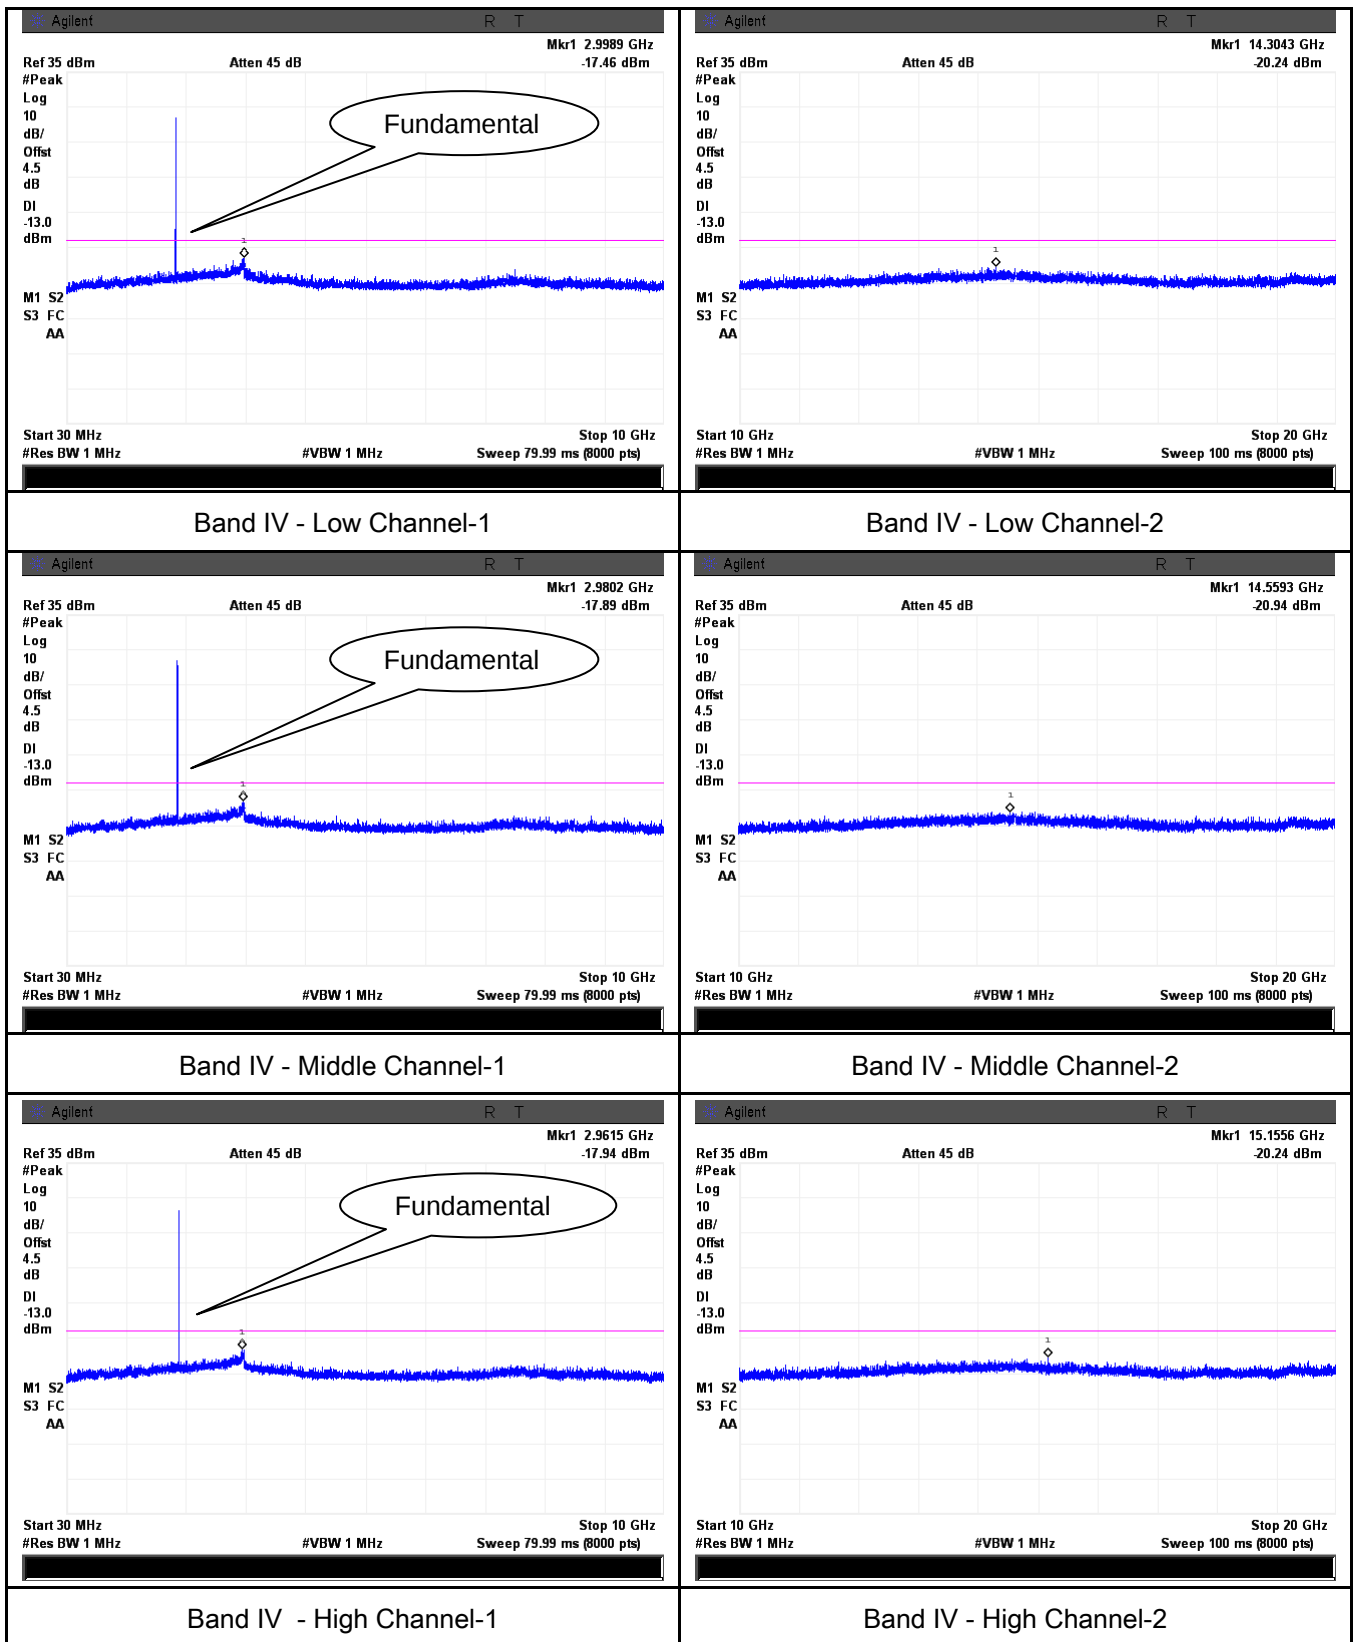


## 6.7 Spurious Radiated Emissions

|                      |                    |
|----------------------|--------------------|
| Temperature          | 25°C               |
| Relative Humidity    | 50%                |
| Atmospheric Pressure | 1008mbar           |
| Test date :          | September 08, 2015 |
| Tested By :          | Winnie Zhang       |

### Requirement(s):

| Spec                                           | Item | Requirement                                                                                                                                                                                                                                                         | Applicable                          |
|------------------------------------------------|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| §2.1053,<br>§22.917 &<br>§24.238<br>§ 27.53(h) | a)   | The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic. | <input checked="" type="checkbox"/> |
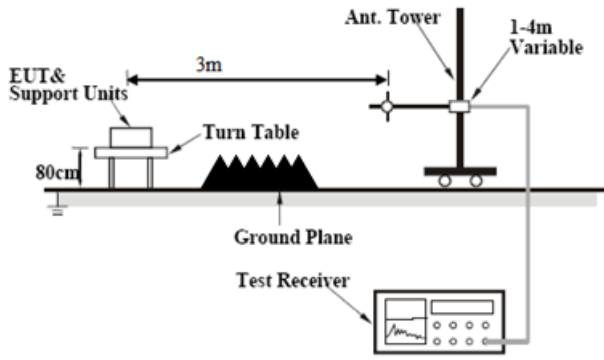
|            |                                                                                     |
|------------|-------------------------------------------------------------------------------------|
| Test setup |  |
|------------|-------------------------------------------------------------------------------------|

|                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Procedure | <ol style="list-style-type: none"> <li>The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.</li> <li>The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.</li> <li>Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.</li> </ol> <p>Sample Calculation:</p> <p>EUT Field Strength = Raw Amplitude (dBμV/m) – Amplifier Gain (dB) + Antenna Factor (dB) + Cable Loss (dB) + Filter Attenuation (dB, if used)</p> |
|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|        |                                                                        |
|--------|------------------------------------------------------------------------|
| Remark |                                                                        |
| Result | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail |

Test Data ☒ Yes ☐ N/A

Test Plot ☐ Yes (See below) ☒ N/A

## Cellular Band (Part 22H) result

### Low channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 1648.4          | -42.95                  | V              | 7.95                         | 0.78            | -35.78                  | -13         | -22.78      |
| 1648.4          | -44.61                  | H              | 7.95                         | 0.78            | -37.44                  | -13         | -24.44      |
| 462.7           | -50.49                  | V              | 6.5                          | 0.30            | -44.29                  | -13         | -31.29      |
| 825.1           | -51.76                  | H              | 6.9                          | 0.44            | -45.30                  | -13         | -32.3       |

### Middle channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 1673.2          | -42.83                  | V              | 7.95                         | 0.78            | -35.66                  | -13         | -22.66      |
| 1673.2          | -44.57                  | H              | 7.95                         | 0.78            | -37.40                  | -13         | -24.4       |
| 462.3           | -50.62                  | V              | 6.5                          | 0.30            | -44.42                  | -13         | -31.42      |
| 825.9           | -51.95                  | H              | 6.9                          | 0.44            | -45.49                  | -13         | -32.49      |

### High channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 1697.6          | -42.94                  | V              | 7.95                         | 0.78            | -35.77                  | -13         | -22.77      |
| 1697.6          | -44.77                  | H              | 7.95                         | 0.78            | -37.60                  | -13         | -24.6       |
| 462.5           | -50.81                  | V              | 6.5                          | 0.30            | -44.61                  | -13         | -31.61      |
| 825.4           | -52.05                  | H              | 6.9                          | 0.44            | -45.59                  | -13         | -32.59      |

## PCS Band (Part24E) result

### Low channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 3700.4          | -47.52                  | V              | 10.25                        | 2.73            | -40.00                  | -13         | -27         |
| 3700.4          | -49.38                  | H              | 10.25                        | 2.73            | -41.86                  | -13         | -28.86      |
| 463.9           | -51.85                  | V              | 6.5                          | 0.30            | -45.65                  | -13         | -32.65      |
| 823.7           | -53.41                  | H              | 6.9                          | 0.44            | -46.95                  | -13         | -33.95      |

### Middle channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 3760            | -47.66                  | V              | 10.25                        | 2.73            | -40.14                  | -13         | -27.14      |
| 3760            | -49.42                  | H              | 10.25                        | 2.73            | -41.90                  | -13         | -28.9       |
| 463.5           | -51.79                  | V              | 6.5                          | 0.30            | -45.59                  | -13         | -32.59      |
| 823.1           | -53.75                  | H              | 6.9                          | 0.44            | -47.29                  | -13         | -34.29      |

### High channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 3819.6          | -47.52                  | V              | 10.36                        | 2.73            | -39.89                  | -13         | -26.89      |
| 3819.6          | -49.87                  | H              | 10.36                        | 2.73            | -42.24                  | -13         | -29.24      |
| 463.4           | -52.14                  | V              | 6.5                          | 0.30            | -45.94                  | -13         | -32.94      |
| 823.9           | -53.96                  | H              | 6.9                          | 0.44            | -47.50                  | -13         | -34.5       |

## UMTS-FDD Band V (Part 22H)

### Low channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 1652.8          | -47.25                  | V              | 7.95                         | 0.78            | -40.08                  | -13         | -27.08      |
| 1652.8          | -45.91                  | H              | 7.95                         | 0.78            | -38.74                  | -13         | -25.74      |
| 460.5           | -51.88                  | V              | 6.5                          | 0.30            | -45.68                  | -13         | -32.68      |
| 829.3           | -50.43                  | H              | 6.9                          | 0.44            | -43.97                  | -13         | -30.97      |

### Middle channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 1670            | -48.62                  | V              | 7.95                         | 0.78            | -41.45                  | -13         | -28.45      |
| 1670            | -45.85                  | H              | 7.95                         | 0.78            | -38.68                  | -13         | -25.68      |
| 460.1           | -51.73                  | V              | 6.5                          | 0.30            | -45.53                  | -13         | -32.53      |
| 829.6           | -50.57                  | H              | 6.9                          | 0.44            | -44.11                  | -13         | -31.11      |

### High channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 1693.2          | -48.59                  | V              | 7.95                         | 0.78            | -41.42                  | -13         | -28.42      |
| 1693.2          | -45.72                  | H              | 7.95                         | 0.78            | -38.55                  | -13         | -25.55      |
| 460.4           | -51.36                  | V              | 6.5                          | 0.30            | -45.16                  | -13         | -32.16      |
| 829.5           | -50.61                  | H              | 6.9                          | 0.44            | -44.15                  | -13         | -31.15      |

## UMTS-FDD Band II (Part 24E)

### Low channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 3704.8          | -48.93                  | V              | 10.25                        | 2.73            | -41.41                  | -13         | -28.41      |
| 3704.8          | -51.17                  | H              | 10.25                        | 2.73            | -43.65                  | -13         | -30.65      |
| 466.3           | -52.36                  | V              | 6.5                          | 0.30            | -46.16                  | -13         | -33.16      |
| 822.7           | -51.22                  | H              | 6.9                          | 0.44            | -44.76                  | -13         | -31.76      |

### Middle channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 3760            | -48.86                  | V              | 10.25                        | 2.73            | -41.34                  | -13         | -28.34      |
| 3760            | -51.24                  | H              | 10.25                        | 2.73            | -43.72                  | -13         | -30.72      |
| 466.9           | -52.51                  | V              | 6.5                          | 0.30            | -46.31                  | -13         | -33.31      |
| 822.3           | -51.75                  | H              | 6.9                          | 0.44            | -45.29                  | -13         | -32.29      |

### High channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 3815.2          | -48.63                  | V              | 10.36                        | 2.73            | -41.00                  | -13         | -28         |
| 3815.2          | -51.49                  | H              | 10.36                        | 2.73            | -43.86                  | -13         | -30.86      |
| 466.5           | -52.81                  | V              | 6.5                          | 0.30            | -46.61                  | -13         | -33.61      |
| 822.8           | -51.56                  | H              | 6.9                          | 0.44            | -45.10                  | -13         | -32.1       |

## UMTS-FDD Band IV (Part 27)

### Low channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 3424.8          | -45.62                  | V              | 10.07                        | 2.52            | -38.07                  | -13         | -25.07      |
| 3424.8          | -44.85                  | H              | 10.07                        | 2.52            | -37.3                   | -13         | -24.3       |
| 244.6           | -55.23                  | V              | 6.5                          | 0.23            | -48.96                  | -13         | -35.96      |
| 451.1           | -52.51                  | H              | 6.5                          | 0.29            | -46.3                   | -13         | -33.3       |

### Middle channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 3480            | -45.47                  | V              | 10.09                        | 2.52            | -37.9                   | -13         | -24.9       |
| 3480            | -44.68                  | H              | 10.09                        | 2.52            | -37.11                  | -13         | -24.11      |
| 244.3           | -55.31                  | V              | 6.5                          | 0.23            | -49.04                  | -13         | -36.04      |
| 451.2           | -52.67                  | H              | 6.5                          | 0.29            | -46.46                  | -13         | -33.46      |


### High channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 3505.2          | -45.33                  | V              | 10.09                        | 2.52            | -37.76                  | -13         | -24.76      |
| 3505.2          | -44.29                  | H              | 10.09                        | 2.52            | -36.72                  | -13         | -23.72      |
| 244.7           | -55.74                  | V              | 6.5                          | 0.23            | -49.47                  | -13         | -36.47      |
| 451.4           | -52.88                  | H              | 6.5                          | 0.29            | -46.67                  | -13         | -33.67      |

## 6.8 Band Edge

|                      |                 |
|----------------------|-----------------|
| Temperature          | 22°C            |
| Relative Humidity    | 53%             |
| Atmospheric Pressure | 1029mbar        |
| Test date :          | August 29, 2015 |
| Tested By :          | Winnie Zhang    |

### Requirement(s):
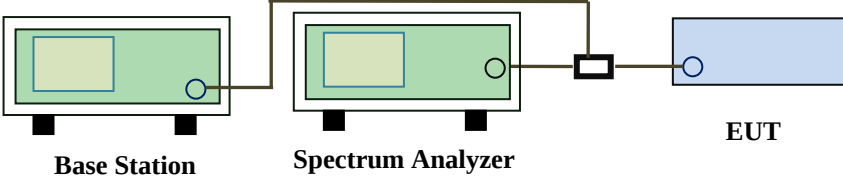
| Spec                                   | Item                                                                                                                                                                                                                                                                                                                                                                                                                   | Requirement                                                                                                                                                                | Applicable                          |
|----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| §22.917(a)<br>§24.238(a)<br>§ 27.53(h) | a)                                                                                                                                                                                                                                                                                                                                                                                                                     | The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. | <input checked="" type="checkbox"/> |
| Test setup                             |  <p>The diagram shows a Base Station (green box) connected to a Spectrum Analyzer (green box) and an EUT (blue box) via a power divider (black box). The Base Station and Spectrum Analyzer are connected to each other, and the Spectrum Analyzer is connected to the power divider, which then splits the signal to the EUT.</p> |                                                                                                                                                                            |                                     |
| Procedure                              | <ul style="list-style-type: none"> <li>- The EUT was connected to Spectrum Analyzer and Base Station via power divider.</li> <li>- The Band Edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.</li> </ul>                                                                                                                                                          |                                                                                                                                                                            |                                     |
| Remark                                 |                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                            |                                     |
| Result                                 | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                            |                                     |

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

### Cellular Band (Part 22H)

| Frequency (MHz) | Emission (dBm) | Limit (dBm) |
|-----------------|----------------|-------------|
| 823.9950        | -14.77         | -13         |
| 849.0175        | -15.15         | -13         |

### PCS Band (Part24E)

| Frequency (MHz) | Emission (dBm) | Limit (dBm) |
|-----------------|----------------|-------------|
| 1849.9950       | -14.99         | -13         |
| 1910.0175       | -15.07         | -13         |

### UMTS-FDD Band V (Part 22H)

| Frequency (MHz) | Emission (dBm) | Limit (dBm) |
|-----------------|----------------|-------------|
| 823.9000        | -25.86         | -13         |
| 849.2000        | -26.73         | -13         |


### UMTS-FDD Band IV (Part 27)

| Frequency (MHz) | Emission (dBm) | Limit (dBm) |
|-----------------|----------------|-------------|
| 1849.8500       | -26.57         | -13         |
| 1910.0500       | -14.74         | -13         |

### UMTS-FDD Band II (Part 24E)


| Frequency (MHz) | Emission (dBm) | Limit (dBm) |
|-----------------|----------------|-------------|
| 1849.8500       | -22.51         | -13         |
| 1910.0500       | -28.12         | -13         |

## Test Plots

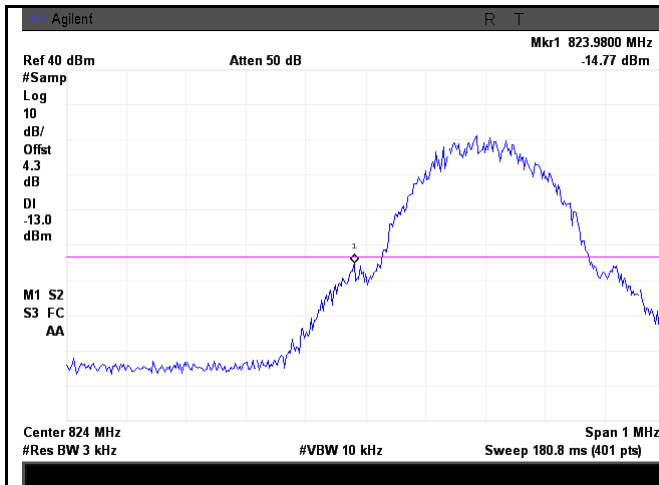


Cellular Band - Low Channel

Note: Offset=Cable loss (4.0) + 10log  
(3.18/3)=4.0+0.3=4.3dB

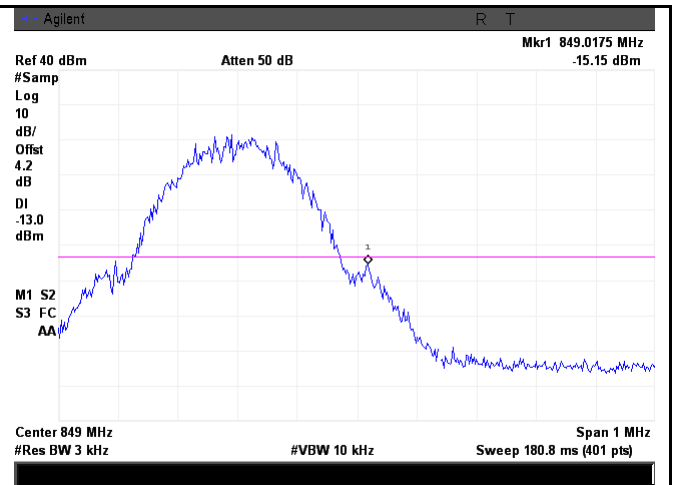


Cellular Band - High Channel

Note: Offset=Cable loss (4.0) + 10log  
(3.07/3)=4.0+0.2=4.2dB

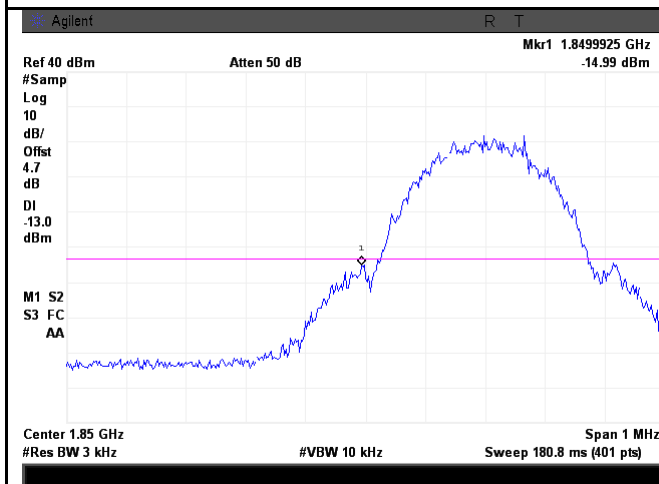


PCS Band - Low Channel

Note: Offset=Cable loss (4.5) + 10log  
(3.17/3)=4.5+0.2=4.7dB

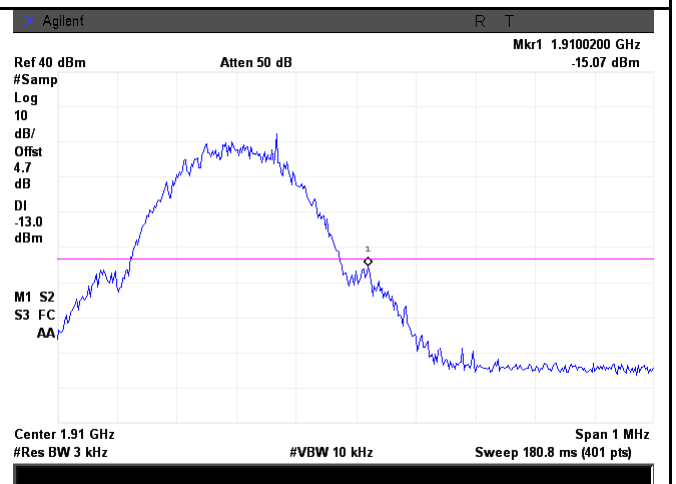


PCS Band - High Channel

Note: Offset=Cable loss (4.5) + 10log  
(3.14/3)=4.5+0.2=4.7dB

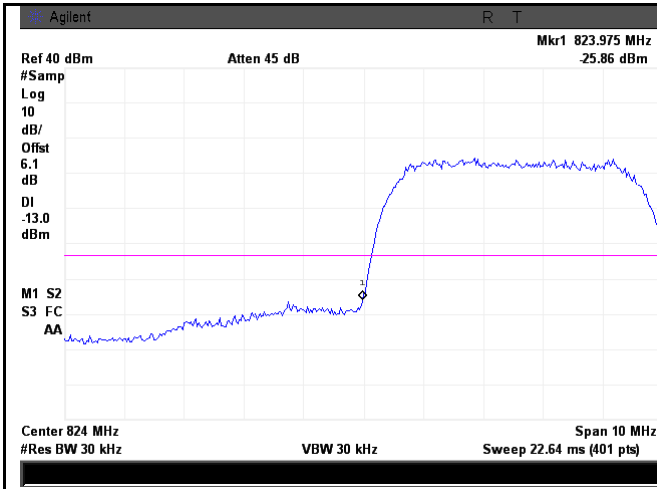


UMTS-FDD Band V - Low Channel

Note: Offset=Cable loss (4.0) + 10log  
(49.06/30)=4.0+2.1=6.1 dB

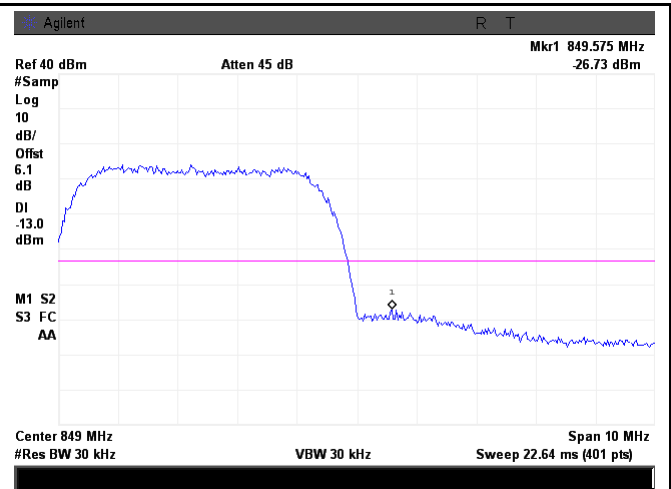


UMTS-FDD Band V - High Channel

Note: Offset=Cable loss (4.0) + 10log  
(48.85/30)=4.0+2.1=6.1 dB

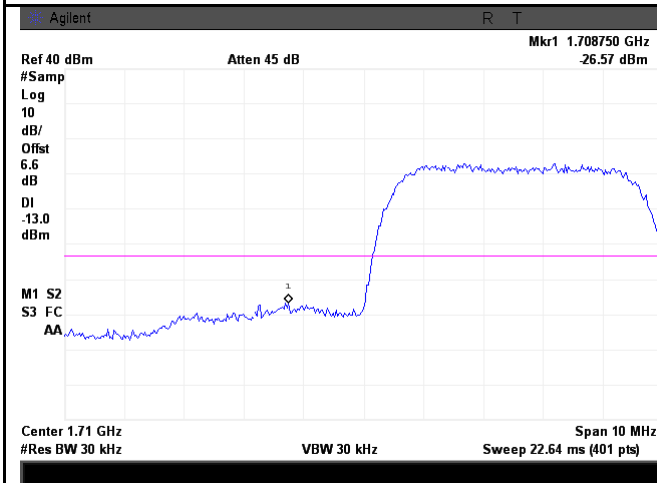

UMTS-FDD Band II - Low Channel


Note: Offset=Cable loss (4.5) + 10log  
(48.60/30)=4.5+2.1=6.6 dB

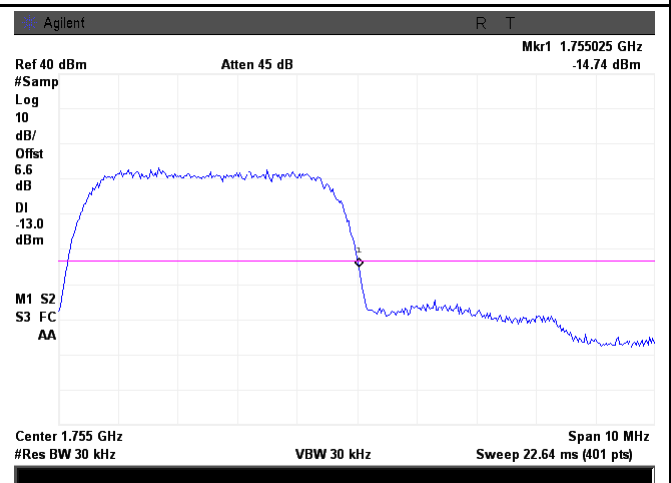

UMTS-FDD Band II - High Channel

Note: Offset=Cable loss (4.5) + 10log  
(48.83/30)=4.5+2.1=6.6 dB


|             |                 |
|-------------|-----------------|
| Test Report | 15050034-FCC-R1 |
| Page        | 44 of 60        |

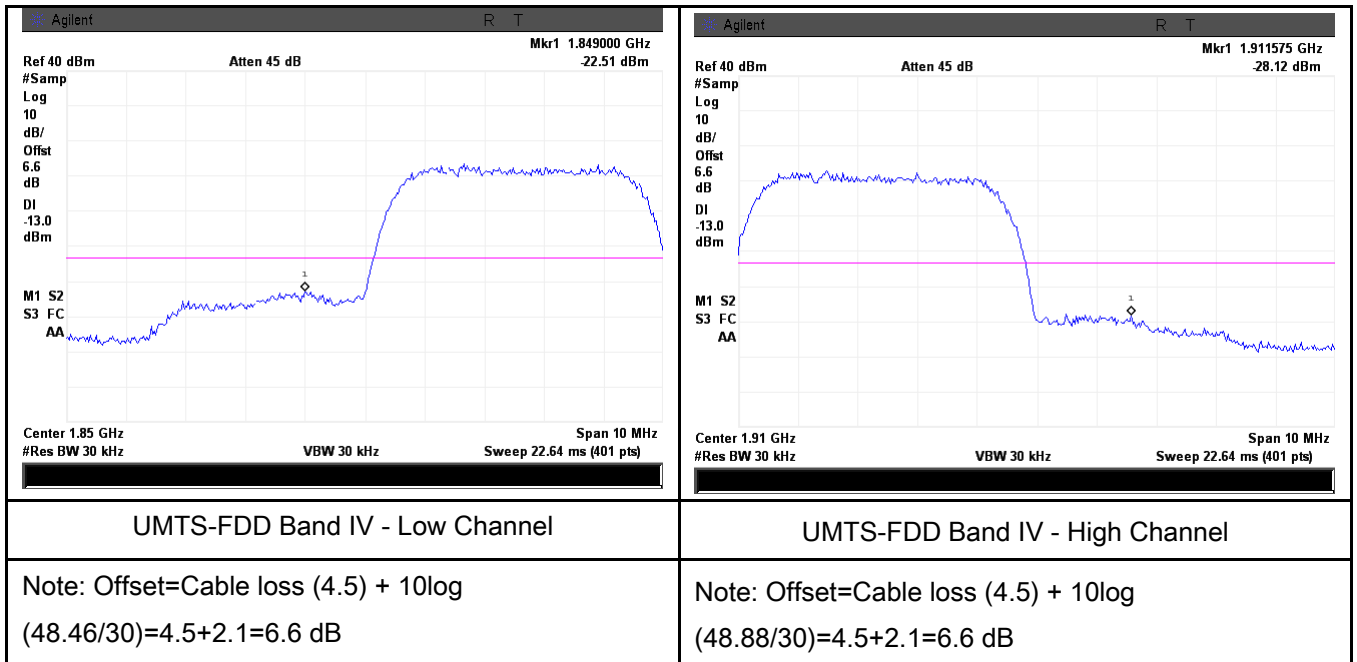

## 6.9 Frequency Stability

|                      |                    |
|----------------------|--------------------|
| Temperature          | 23°C               |
| Relative Humidity    | 58%                |
| Atmospheric Pressure | 1006mbar           |
| Test date :          | September 06, 2015 |
| Tested By :          | Winnie Zhang       |

### Requirement(s):
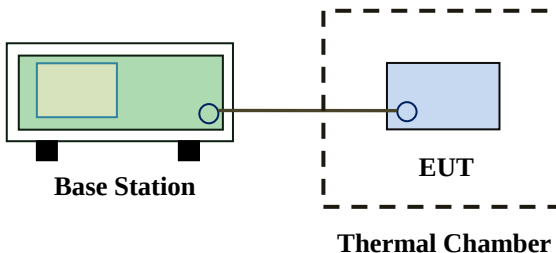
| Spec                                                      | Item                                                                                                                                                                                                                                                                                                                                                                                        | Requirement                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Applicable             |                   |                        |                        |          |      |      |      |           |     |     |      |           |     |     |    |            |     |     |     |            |     |     |     |             |     |     |     |              |      |     |     |                                     |
|-----------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|-------------------|------------------------|------------------------|----------|------|------|------|-----------|-----|-----|------|-----------|-----|-----|----|------------|-----|-----|-----|------------|-----|-----|-----|-------------|-----|-----|-----|--------------|------|-----|-----|-------------------------------------|
| §2.1055,<br>§22.355 &<br>§24.235<br>§ 27.5(h);<br>§ 27.54 | a)                                                                                                                                                                                                                                                                                                                                                                                          | <p>According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:</p> <p>Frequency Tolerance for Transmitters in the Public Mobile Services</p> <table border="1"> <thead> <tr> <th>Frequency Range (MHz)</th><th>Base, fixed (ppm)</th><th>Mobile ≤ 3 watts (ppm)</th><th>Mobile ≤ 3 watts (ppm)</th></tr> </thead> <tbody> <tr> <td>25 to 50</td><td>20.0</td><td>20.0</td><td>50.0</td></tr> <tr> <td>50 to 450</td><td>5.0</td><td>5.0</td><td>50.0</td></tr> <tr> <td>45 to 512</td><td>2.5</td><td>5.0</td><td>.0</td></tr> <tr> <td>821 to 896</td><td>1.5</td><td>2.5</td><td>2.5</td></tr> <tr> <td>928 to 29.</td><td>5.0</td><td>N/A</td><td>N/A</td></tr> <tr> <td>929 to 960.</td><td>1.5</td><td>N/A</td><td>N/A</td></tr> <tr> <td>2110 to 2220</td><td>10.0</td><td>N/A</td><td>N/A</td></tr> </tbody> </table> <p>According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized frequency block.</p> | Frequency Range (MHz)  | Base, fixed (ppm) | Mobile ≤ 3 watts (ppm) | Mobile ≤ 3 watts (ppm) | 25 to 50 | 20.0 | 20.0 | 50.0 | 50 to 450 | 5.0 | 5.0 | 50.0 | 45 to 512 | 2.5 | 5.0 | .0 | 821 to 896 | 1.5 | 2.5 | 2.5 | 928 to 29. | 5.0 | N/A | N/A | 929 to 960. | 1.5 | N/A | N/A | 2110 to 2220 | 10.0 | N/A | N/A | <input checked="" type="checkbox"/> |
| Frequency Range (MHz)                                     | Base, fixed (ppm)                                                                                                                                                                                                                                                                                                                                                                           | Mobile ≤ 3 watts (ppm)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Mobile ≤ 3 watts (ppm) |                   |                        |                        |          |      |      |      |           |     |     |      |           |     |     |    |            |     |     |     |            |     |     |     |             |     |     |     |              |      |     |     |                                     |
| 25 to 50                                                  | 20.0                                                                                                                                                                                                                                                                                                                                                                                        | 20.0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 50.0                   |                   |                        |                        |          |      |      |      |           |     |     |      |           |     |     |    |            |     |     |     |            |     |     |     |             |     |     |     |              |      |     |     |                                     |
| 50 to 450                                                 | 5.0                                                                                                                                                                                                                                                                                                                                                                                         | 5.0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 50.0                   |                   |                        |                        |          |      |      |      |           |     |     |      |           |     |     |    |            |     |     |     |            |     |     |     |             |     |     |     |              |      |     |     |                                     |
| 45 to 512                                                 | 2.5                                                                                                                                                                                                                                                                                                                                                                                         | 5.0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | .0                     |                   |                        |                        |          |      |      |      |           |     |     |      |           |     |     |    |            |     |     |     |            |     |     |     |             |     |     |     |              |      |     |     |                                     |
| 821 to 896                                                | 1.5                                                                                                                                                                                                                                                                                                                                                                                         | 2.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 2.5                    |                   |                        |                        |          |      |      |      |           |     |     |      |           |     |     |    |            |     |     |     |            |     |     |     |             |     |     |     |              |      |     |     |                                     |
| 928 to 29.                                                | 5.0                                                                                                                                                                                                                                                                                                                                                                                         | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | N/A                    |                   |                        |                        |          |      |      |      |           |     |     |      |           |     |     |    |            |     |     |     |            |     |     |     |             |     |     |     |              |      |     |     |                                     |
| 929 to 960.                                               | 1.5                                                                                                                                                                                                                                                                                                                                                                                         | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | N/A                    |                   |                        |                        |          |      |      |      |           |     |     |      |           |     |     |    |            |     |     |     |            |     |     |     |             |     |     |     |              |      |     |     |                                     |
| 2110 to 2220                                              | 10.0                                                                                                                                                                                                                                                                                                                                                                                        | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | N/A                    |                   |                        |                        |          |      |      |      |           |     |     |      |           |     |     |    |            |     |     |     |            |     |     |     |             |     |     |     |              |      |     |     |                                     |
| Test setup                                                |  <p>The diagram illustrates the test setup. On the left, a green rectangular box represents the 'Base Station'. A horizontal line connects it to a blue rectangular box labeled 'EUT' (Equipment Under Test). The 'EUT' is enclosed within a dashed-line rectangular box labeled 'Thermal Chamber'.</p> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                        |                   |                        |                        |          |      |      |      |           |     |     |      |           |     |     |    |            |     |     |     |            |     |     |     |             |     |     |     |              |      |     |     |                                     |

|             |                 |
|-------------|-----------------|
| Test Report | 15050034-FCC-R1 |
| Page        | 46 of 60        |

|           |                                                                                                                                                                                                                                                                                                                                                                    |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Procedure | A communication link was established between EUT and base station. The frequency error was monitored and measured by base station under variation of ambient temperature and variation of primary supply voltage.<br>Limit: The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ( $\pm 2.5\text{ppm}$ ) of the center frequency. |
| Remark    |                                                                                                                                                                                                                                                                                                                                                                    |
| Result    | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail                                                                                                                                                                                                                                                                                             |

Test Data ☒ Yes ☐ N/A

Test Plot ☐ Yes (See below) ☒ N/A

### Cellular Band (Part 22H) result

| Middle Channel, $f_0 = 836.6$ MHz |                                   |                      |                       |             |
|-----------------------------------|-----------------------------------|----------------------|-----------------------|-------------|
| Temperature (°C)                  | Power Supplied (V <sub>DC</sub> ) | Frequency Error (Hz) | Frequency Error (ppm) | Limit (ppm) |
| -10                               | 3.7                               | 17                   | 0.0203                | 2.5         |
| 0                                 |                                   | 19                   | 0.0227                | 2.5         |
| 10                                |                                   | 18                   | 0.0215                | 2.5         |
| 20                                |                                   | 14                   | 0.0167                | 2.5         |
| 30                                |                                   | 16                   | 0.0191                | 2.5         |
| 40                                |                                   | 18                   | 0.0215                | 2.5         |
| 50                                |                                   | 22                   | 0.0263                | 2.5         |
| 55                                |                                   | 29                   | 0.0347                | 2.5         |
| 25                                | 4.2                               | 23                   | 0.0275                | 2.5         |
|                                   | 3.5                               | 27                   | 0.0323                | 2.5         |

### PCS Band (Part 24E) result

| Middle Channel, $f_0 = 1880$ MHz |                                   |                      |                       |             |
|----------------------------------|-----------------------------------|----------------------|-----------------------|-------------|
| Temperature (°C)                 | Power Supplied (V <sub>DC</sub> ) | Frequency Error (Hz) | Frequency Error (ppm) | Limit (ppm) |
| -10                              | 3.7                               | 27                   | 0.0144                | 2.5         |
| 0                                |                                   | 23                   | 0.0122                | 2.5         |
| 10                               |                                   | 21                   | 0.0112                | 2.5         |
| 20                               |                                   | 19                   | 0.0101                | 2.5         |
| 30                               |                                   | 18                   | 0.0096                | 2.5         |
| 40                               |                                   | 12                   | 0.0064                | 2.5         |
| 50                               |                                   | 19                   | 0.0101                | 2.5         |
| 55                               |                                   | 20                   | 0.0106                | 2.5         |
| 25                               | 4.2                               | 22                   | 0.0117                | 2.5         |
|                                  | 3.5                               | 25                   | 0.0133                | 2.5         |

### UMTS-FDD Band V (Part 22H)

| Middle Channel, $f_0 = 835$ MHz |                                   |                      |                       |             |
|---------------------------------|-----------------------------------|----------------------|-----------------------|-------------|
| Temperature (°C)                | Power Supplied (V <sub>DC</sub> ) | Frequency Error (Hz) | Frequency Error (ppm) | Limit (ppm) |
| -10                             | 3.7                               | 15                   | 0.0180                | 2.5         |
| 0                               |                                   | 13                   | 0.0156                | 2.5         |
| 10                              |                                   | 12                   | 0.0144                | 2.5         |
| 20                              |                                   | 16                   | 0.0192                | 2.5         |
| 30                              |                                   | 14                   | 0.0168                | 2.5         |
| 40                              |                                   | 17                   | 0.0204                | 2.5         |
| 50                              |                                   | 10                   | 0.0120                | 2.5         |
| 55                              |                                   | 19                   | 0.0228                | 2.5         |
| 25                              | 4.2                               | 17                   | 0.0204                | 2.5         |
|                                 | 3.5                               | 19                   | 0.0228                | 2.5         |

### UMTS-FDD Band II (Part 24E)

| Middle Channel, $f_0 = 1880$ MHz |                                   |                      |                       |             |
|----------------------------------|-----------------------------------|----------------------|-----------------------|-------------|
| Temperature (°C)                 | Power Supplied (V <sub>DC</sub> ) | Frequency Error (Hz) | Frequency Error (ppm) | Limit (ppm) |
| -10                              | 3.7                               | 12                   | 0.0064                | 2.5         |
| 0                                |                                   | 10                   | 0.0053                | 2.5         |
| 10                               |                                   | 9                    | 0.0048                | 2.5         |
| 20                               |                                   | 7                    | 0.0037                | 2.5         |
| 30                               |                                   | 5                    | 0.0027                | 2.5         |
| 40                               |                                   | 10                   | 0.0053                | 2.5         |
| 50                               |                                   | 12                   | 0.0064                | 2.5         |
| 55                               |                                   | 17                   | 0.0090                | 2.5         |
| 25                               | 4.2                               | 10                   | 0.0053                | 2.5         |
|                                  | 3.5                               | 9                    | 0.0048                | 2.5         |

### UMTS-FDD Band IV (Part 27)


| Middle Channel, $f_0 = 1880$ MHz |                                   |                      |                       |             |
|----------------------------------|-----------------------------------|----------------------|-----------------------|-------------|
| Temperature (°C)                 | Power Supplied (V <sub>DC</sub> ) | Frequency Error (Hz) | Frequency Error (ppm) | Limit (ppm) |
| -10                              | 3.7                               | 8                    | 0.0043                | 2.5         |
| 0                                |                                   | 7                    | 0.0037                | 2.5         |
| 10                               |                                   | 4                    | 0.0021                | 2.5         |
| 20                               |                                   | 5                    | 0.0027                | 2.5         |
| 30                               |                                   | 6                    | 0.0032                | 2.5         |
| 40                               |                                   | 9                    | 0.0048                | 2.5         |
| 50                               |                                   | 3                    | 0.0016                | 2.5         |
| 55                               |                                   | 11                   | 0.0059                | 2.5         |
| 25                               | 4.2                               | 10                   | 0.0053                | 2.5         |
|                                  | 3.5                               | 12                   | 0.0064                | 2.5         |

## Annex A. TEST INSTRUMENT

| Instrument                             | Model           | Serial #   | Cal Date   | Cal Due    | In use                              |
|----------------------------------------|-----------------|------------|------------|------------|-------------------------------------|
| <b>RF Conducted Test</b>               |                 |            |            |            |                                     |
| Agilent ESA-E SERIES SPECTRUM ANALYZER | E4407B          | MY45108319 | 09/17/2014 | 09/16/2015 | <input checked="" type="checkbox"/> |
| Power Splitter                         | 1#              | 1#         | 09/02/2014 | 09/01/2015 | <input checked="" type="checkbox"/> |
| Universal Radio Communication Tester   | CMU200          | 121393     | 09/26/2014 | 09/25/2015 | <input checked="" type="checkbox"/> |
| Temperature/Humidity Chamber           | UHL-270         | 001        | 10/10/2014 | 10/09/2015 | <input checked="" type="checkbox"/> |
| DC Power Supply                        | E3640A          | MY40004013 | 09/18/2014 | 09/17/2015 | <input checked="" type="checkbox"/> |
| <b>Radiated Emissions</b>              |                 |            |            |            |                                     |
| EMI test receiver                      | ESL6            | 100262     | 09/18/2014 | 09/17/2015 | <input checked="" type="checkbox"/> |
| OPT 010 AMPLIFIER (0.1-1300MHz)        | 8447E           | 2727A02430 | 09/01/2015 | 08/31/2016 | <input checked="" type="checkbox"/> |
| Microwave Preamplifier (1 ~ 26.5GHz)   | 8449B           | 3008A02402 | 03/25/2015 | 03/24/2016 | <input checked="" type="checkbox"/> |
| Bilog Antenna (30MHz~6GHz)             | JB6             | A110712    | 09/22/2014 | 09/21/2015 | <input checked="" type="checkbox"/> |
| Bilog Antenna (30MHz~2GHz)             | JB1             | A112017    | 09/22/2014 | 09/21/2015 | <input checked="" type="checkbox"/> |
| Double Ridge Horn Antenna (1 ~18GHz)   | AH-118          | 71259      | 09/25/2014 | 09/24/2015 | <input checked="" type="checkbox"/> |
| Double Ridge Horn Antenna (1 ~18GHz)   | AH-118          | 71283      | 09/25/2014 | 09/24/2015 | <input checked="" type="checkbox"/> |
| SYNTHESIZED SIGNAL GENERATOR           | 8665B           | 3744A01293 | 09/18/2014 | 09/17/2015 | <input checked="" type="checkbox"/> |
| Tunable Notch Filter                   | 3NF-800/1000-S  | AA4        | 09/01/2015 | 08/31/2016 | <input checked="" type="checkbox"/> |
| Tunable Notch Filter                   | 3NF-1000/2000-S | AM 4       | 09/01/2015 | 08/31/2016 | <input checked="" type="checkbox"/> |


## Annex B. EUT And Test Setup Photographs

### Annex B.i. Photograph: EUT External Photo

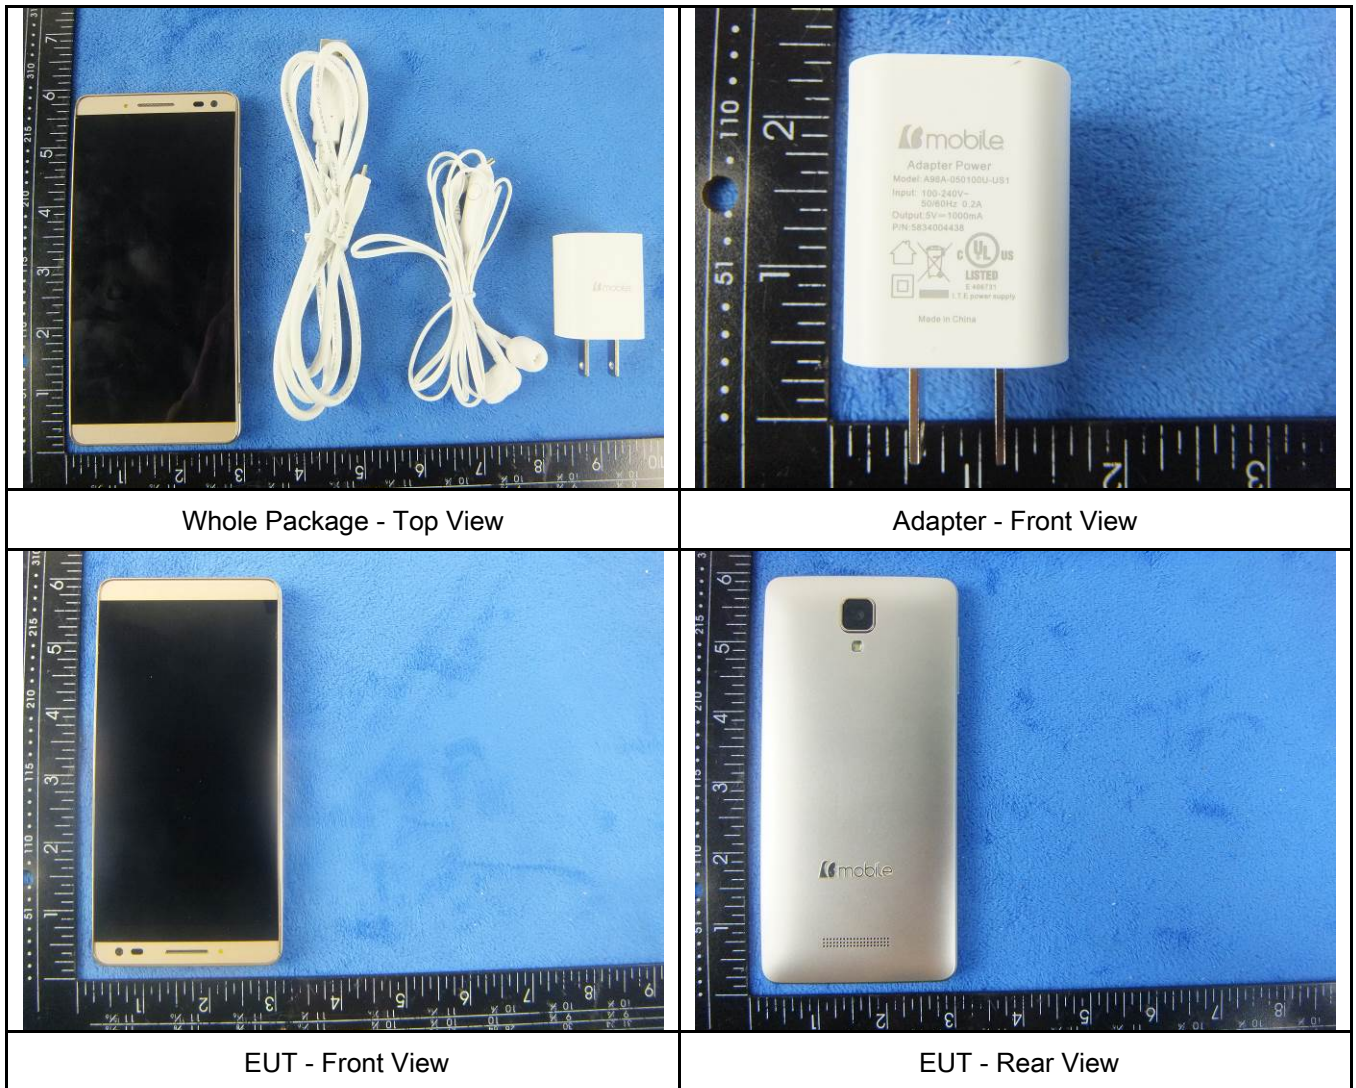





EUT - Top View

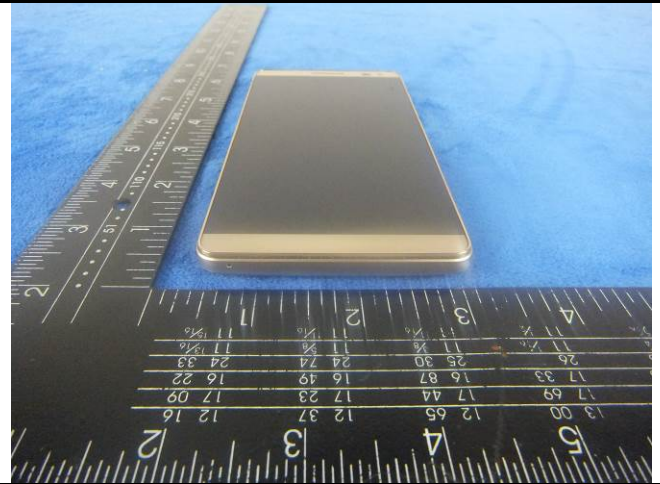

EUT - Bottom View

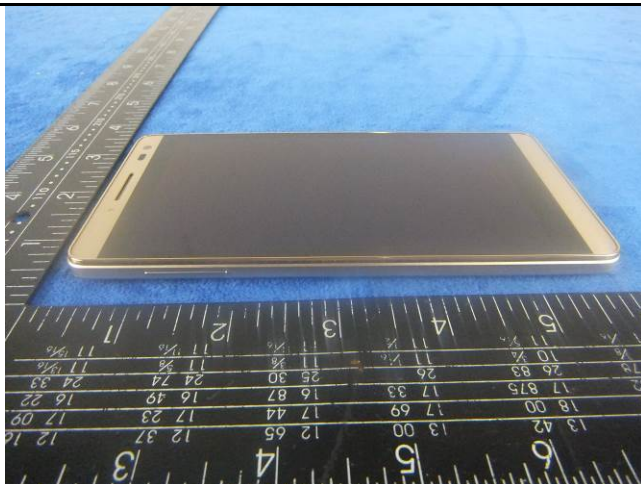

EUT - Left View

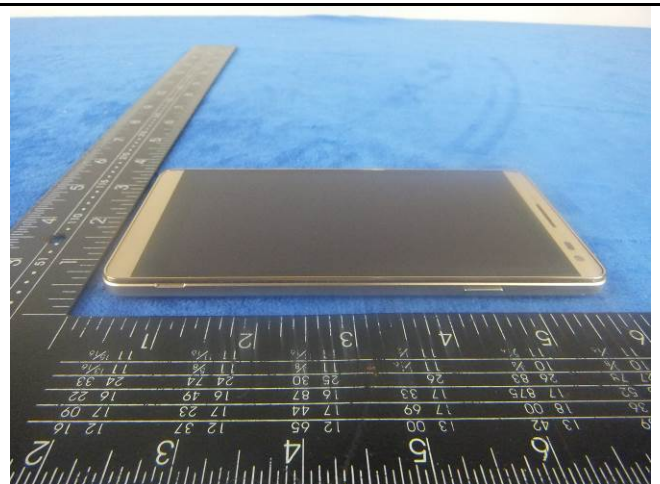


EUT - Right View

## Annex B.ii. Photograph: EUT Internal Photo



Cover Off - Top View 1

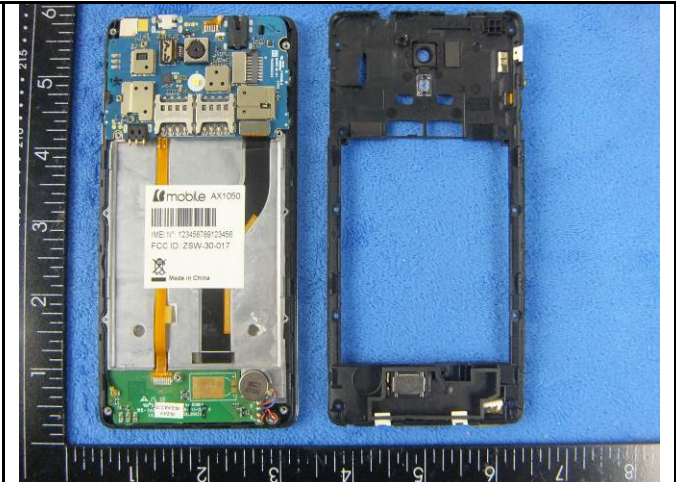


Cover Off - Top View 2




Battery - Top View




Battery - Bottom View

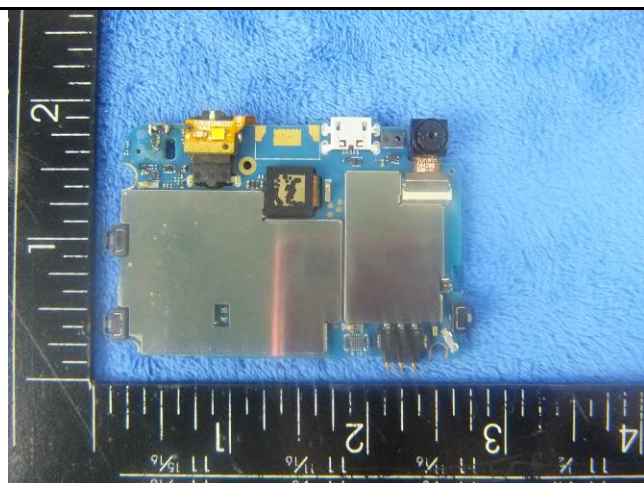


Mainboard With Shielding - Front View

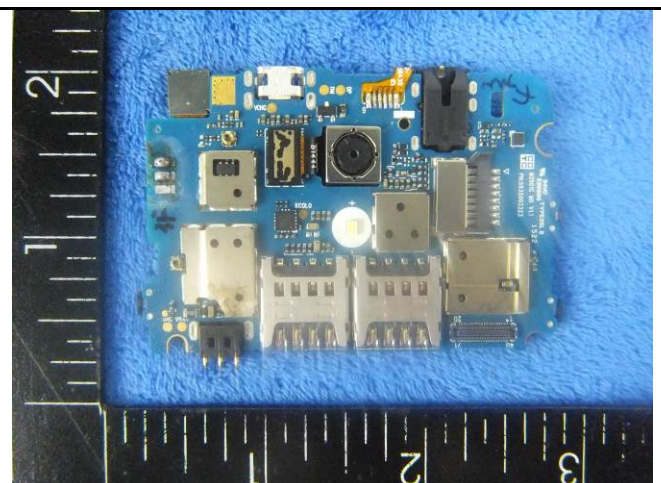

Mainboard With Shielding - Rear View

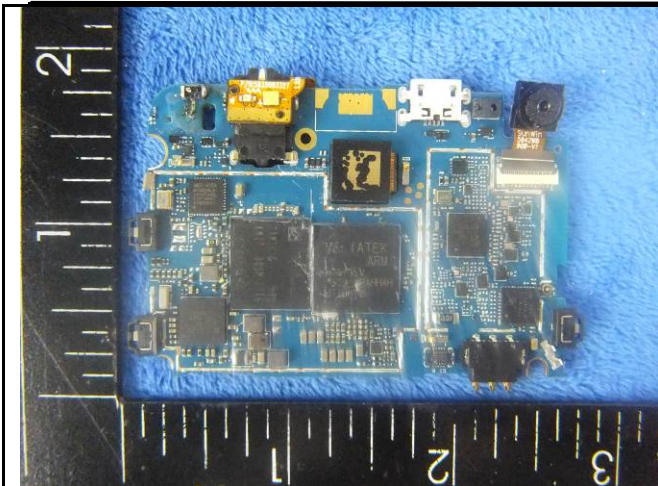

Mainboard Without Shielding - Front View

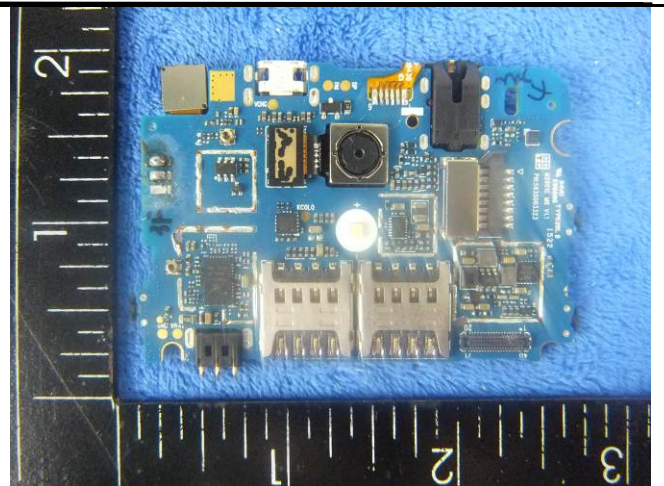


Mainboard Without Shielding - Rear View




LCD - Front View



LCD - Rear View

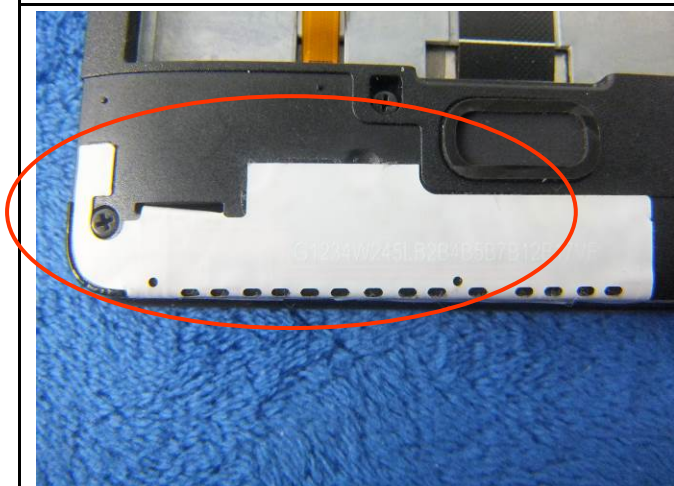

GSM/PCS/UMTS-FDD/LTE Antenna View

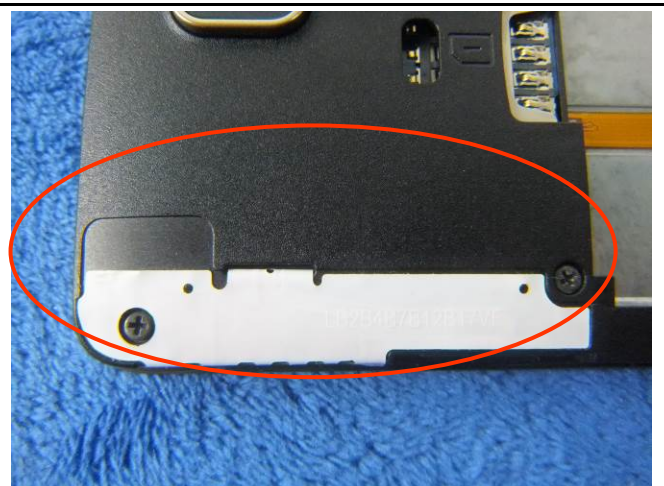


WIFI/BT/BLE - Antenna View

**Annex B.iii. Photograph: Test Setup Photo**



Radiated Spurious Emissions Test Setup Below 1GHz

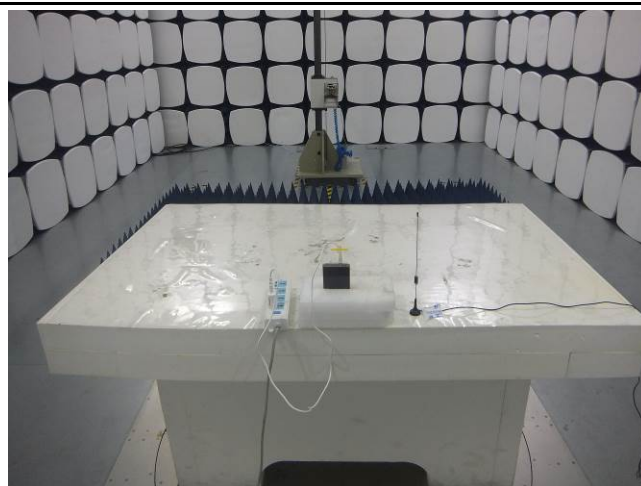


Radiated Spurious Emissions Test Setup Above  
1GHz

## Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

### Annex C.ii. TEST SET UP BLOCK

#### Block Configuration Diagram for Radiated Emissions

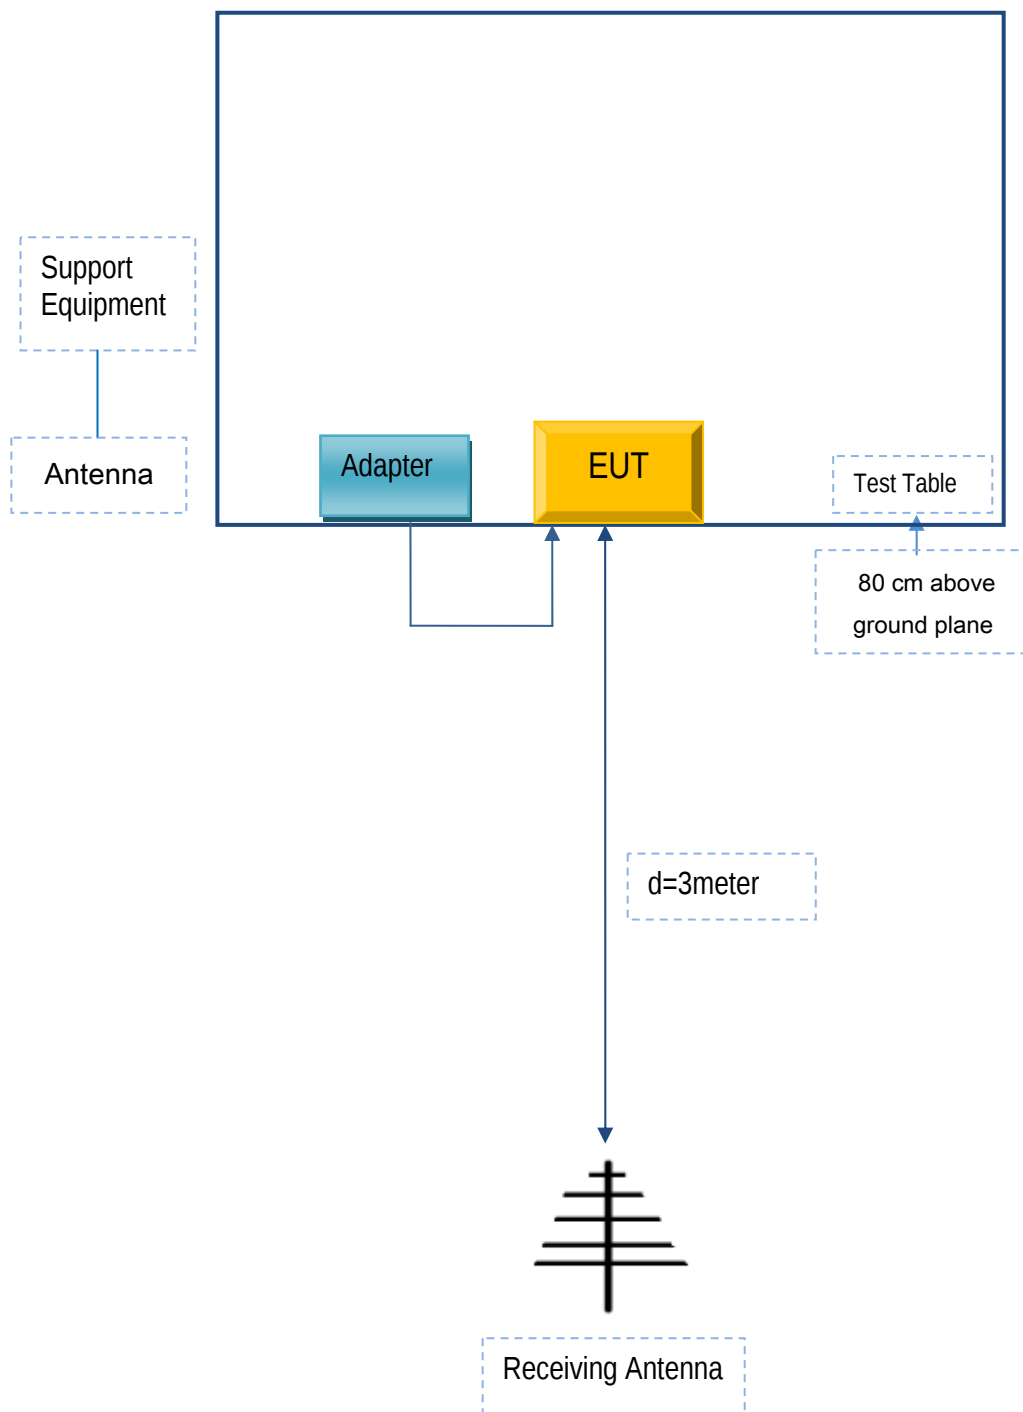

## **Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION**

The following is a description of supporting equipment and details of cables used with the EUT.

| Manufacturer | Equipment Description | Model | Calibration Date | Calibration Due Date |
|--------------|-----------------------|-------|------------------|----------------------|
| N/A          | N/A                   | N/A   | N/A              | N/A                  |

|             |                 |
|-------------|-----------------|
| Test Report | 15050034-FCC-R1 |
| Page        | 58 of 60        |

## Annex C.ii. EUT OPERATING CONKITIONS

N/A

|             |                 |
|-------------|-----------------|
| Test Report | 15050034-FCC-R1 |
| Page        | 59 of 60        |

## Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see attachment

## Annex E. DECLARATION OF SIMILARITY

b Mobile HK limited

To SIEMIC Inc  
775 Montague Expressway  
Milpitas, CA 95035.

### Statement

We, b Mobile HK limited apply a multiple-listing certification for the below models.

Product Name: Mobile phone

Model number: AX1050/L50

FCC ID: ZSW-30-017

We hereby state that these models are identical in interior structure, electrical circuits and components, and just model name is different for the marketing requirement.

Your assistance on this matter is highly appreciated.

Sincerely,  
Name: KA SHING LAM  
Title: Director  
Signature:

For and on behalf of  
**b mobile HK Limited**  
  
.....  
Authorized Signature(s)