



TEST REPORT

Report Reference No. : **TRE1709016404** R/C.....: 21830

FCC ID..... : **ZSW-30-050**

Applicant's name : **b mobile HK Limited**

Address..... : Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street; Kwai Chung; New Territories; Hong Kong.

Manufacturer..... : b mobile HK Limited

Address..... : Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street; Kwai Chung; New Territories; Hong Kong.

Test item description : **Mobile Phone**

Trade Mark : Bmobile

Model/Type reference..... : AX1071

Listed Model(s) : AX1072

Standard : **FCC CFR Title 47 Part 15 Subpart C Section 15.247**

Date of receipt of test sample..... : Sep.20, 2017

Date of testing..... : Sep.21, 2017 - Oct.09, 2017

Date of issue..... : Oct.10, 2017

Result..... : **PASS**

Compiled by
(Position+Printed name+Signature): File administrators Candy Liu

Candy Liu

Supervised by
(Position+Printed name+Signature): Project Engineer : Edward Pan

Edward Pan

Approved by
(Position+Printed name+Signature): RF Manager Hans Hu

Hans Hu

Testing Laboratory Name : **Shenzhen Huatongwei International Inspection Co., Ltd.**

Address..... : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

<u>1.</u>	<u>TEST STANDARDS AND REPORT VERSION</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Report version	3
<u>2.</u>	<u>TEST DESCRIPTION</u>	<u>4</u>
<u>3.</u>	<u>SUMMARY</u>	<u>5</u>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Operation state	6
3.4.	EUT configuration	6
3.5.	Modifications	6
<u>4.</u>	<u>TEST ENVIRONMENT</u>	<u>7</u>
4.1.	Address of the test laboratory	7
4.2.	Test Facility	7
4.3.	Environmental conditions	8
4.4.	Statement of the measurement uncertainty	8
4.5.	Equipments Used during the Test	9
<u>5.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>10</u>
5.1.	Antenna requirement	10
5.2.	Conducted Emissions (AC Main)	11
5.3.	Conducted Peak Output Power	14
5.4.	20 dB Bandwidth	18
5.5.	Carrier Frequencies Separation	22
5.6.	Hopping Channel Number	24
5.7.	Dwell Time	26
5.8.	Pseudorandom Frequency Hopping Sequence	30
5.9.	Restricted band (radiated)	31
5.10.	Band edge and Spurious Emissions (conducted)	36
5.11.	Spurious Emissions (radiated)	56
<u>6.</u>	<u>TEST SETUP PHOTOS</u>	<u>60</u>
<u>7.</u>	<u>EXTERANAL AND INTERNAL PHOTOS</u>	<u>61</u>

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

1.2. Report version

Version No.	Date of issue	Description
00	Oct.10, 2017	Original

2. TEST DESCRIPTION

Test Item	Section in CFR 47	Result	Test Engineer
Antenna Requirement	15.203/15.247 (c)	Pass	William Wang
AC Power Line Conducted Emissions	15.207	Pass	William Wang
Conducted Peak Output Power	15.247 (b)(1)	Pass	William Wang
20 dB Bandwidth	15.247 (a)(1)	Pass	William Wang
Carrier Frequencies Separation	15.247 (a)(1)	Pass	William Wang
Hopping Channel Number	15.247 (a)(1)	Pass	William Wang
Dwell Time	15.247 (a)(1)	Pass	William Wang
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)	Pass	William Wang
Restricted band	15.247(d)/15.205	Pass	William Wang
Radiated Emissions	15.247(d)/15.209	Pass	William Wang

Note: The measurement uncertainty is not included in the test result.

3. SUMMARY

3.1. Client Information

Applicant:	b mobile HK Limited
Address:	Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street; Kwai Chung; New Territories; Hong Kong.
Manufacturer:	b mobile HK Limited
Address:	Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street; Kwai Chung; New Territories; Hong Kong.

3.2. Product Description

Name of EUT:	Mobile Phone
Trade Mark:	Bmobile
Model No.:	AX1071
Listed Model(s):	AX1072
IMEI 1:	355408080203579
IMEI 2:	355408080203868
Power supply:	DC 3.8V From exchange battery
Adapter information:	Input: 100-240Va.c., 50/60Hz, 0.2A Output: 5Vd.c.,1A
Hardware version:	V00
Software version:	MX2135FA_B25_E5017_SA11_N_V01_170906 Web Sep 6 17:20:53 CST 2017
Bluetooth	
Version:	Supported BT4.0+EDR
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	PIFA Antenna
Antenna gain:	0.5 dBi

3.3. Operation state

➤ Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

Channel	Frequency (MHz)
00	2402
01	2403
:	:
39	2441
:	:
77	2479
78	2480

➤ TEST MODE

For RF test items:
The engineering test program was provided and enabled to make EUT continuous transmit
For AC power line conducted emissions:
The EUT was set to connect with the Bluetooth instrument under large package sizes transmission.
For Radiated suprious emissions test item:
The EUT in each of three orthogonal axis emissions had been tested ,but only the worst case (X axis) data recorded in the report.

3.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

/	Manufacturer:	/
	Model No.:	/
/	Manufacturer:	/
	Model No.:	/

3.5. Modifications

No modifications were implemented to meet testing criteria.

4. TEST ENVIRONMENT

4.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

4.2. Test Facility

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 762235

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files.

IC-Registration No.:5377B-1

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No.: 5377B-1.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors in calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd. quality system according to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Here after the best measurement capability for Shenzhen Huatongwei International Inspection Co., Ltd. is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emissions 9kHz~40GHz	1.60 dB	(1)
Radiated spurious emissions 9kHz~40GHz	2.20 dB	(1)
Conducted Emissions 9kHz~30MHz	3.39 dB	(1)
Radiated Emissions 30~1000MHz	4.24 dB	(1)
Radiated Emissions 1~18GHz	5.16 dB	(1)
Radiated Emissions 18~40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

4.5. Equipments Used during the Test

Conducted Emissions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Artificial Mains	Rohde&Schwarz	ESH2-Z5	100028	2016/11/13
2	EMI Test Receiver	Rohde&Schwarz	ESCI3	100038	2016/11/13
3	Pulse Limiter	Rohde&Schwarz	ESHSZ2	100044	2016/11/13
4	EMI Test Software	Rohde&Schwarz	ES-K1 V1.71	-	-

Radiated Emissions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI test receiver	Rohde&Schwarz	ESI 26	100009	2016/11/13
2	Loop Antenna	Rohde&Schwarz	HFH2-Z2	100020	2016/11/13
3	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	538	2016/11/13
4	Horn antenna	ShwarzBeck	9120D	1011	2016/11/13
5	Horn Antenna	SCHWARZBECK	BBHA9170	25841	2016/11/13
6	Amplifier	Sonoma	310N	E009-13	2016/11/13
7	JS Amplifier	Rohde&Schwarz	JS4-00101800-28-5A	F201504	2016/11/13
8	Amplifier	Compliance Direction systems	PAP1-4060	120	2016/11/13
9	High pass filter	Compliance Direction systems	BSU-6	34202	2016/11/13
10	EMI test Software	Rohde&Schwarz	ESK1	-	-
11	EMI test Software	Audix	E3	-	-
12	TURNTABLE	MATURO	TT2.0	-	-
13	ANTENNA MAST	MATURO	TAM-4.0-P	-	-

RF Conducted methods					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Spectrum Analyzer	Rohde&Schwarz	FSP	1164.4391.40	2016/11/13
2	MXA Signal Analyzer	Agilent Technologies	N9020A	MY5050187	2016/11/13

The Cal.Interval was one year.

5. TEST CONDITIONS AND RESULTS

5.1. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Test Result:

☒ **Passed** ☐ **Not Applicable**

The directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.



5.2. Conducted Emissions (AC Main)

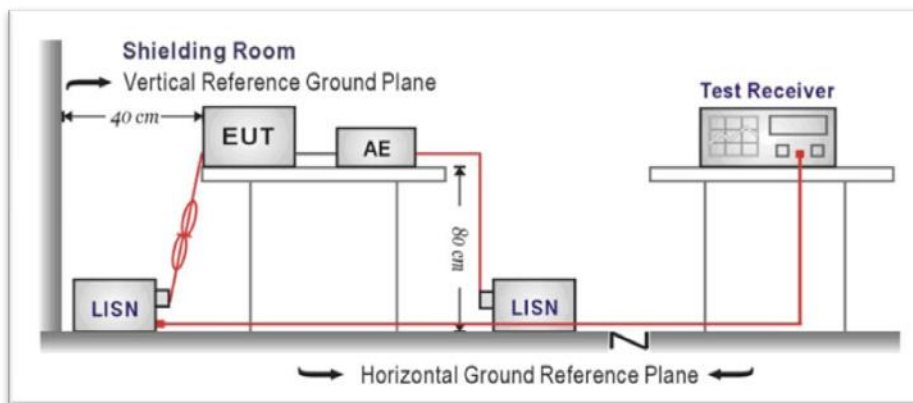
LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION



TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS

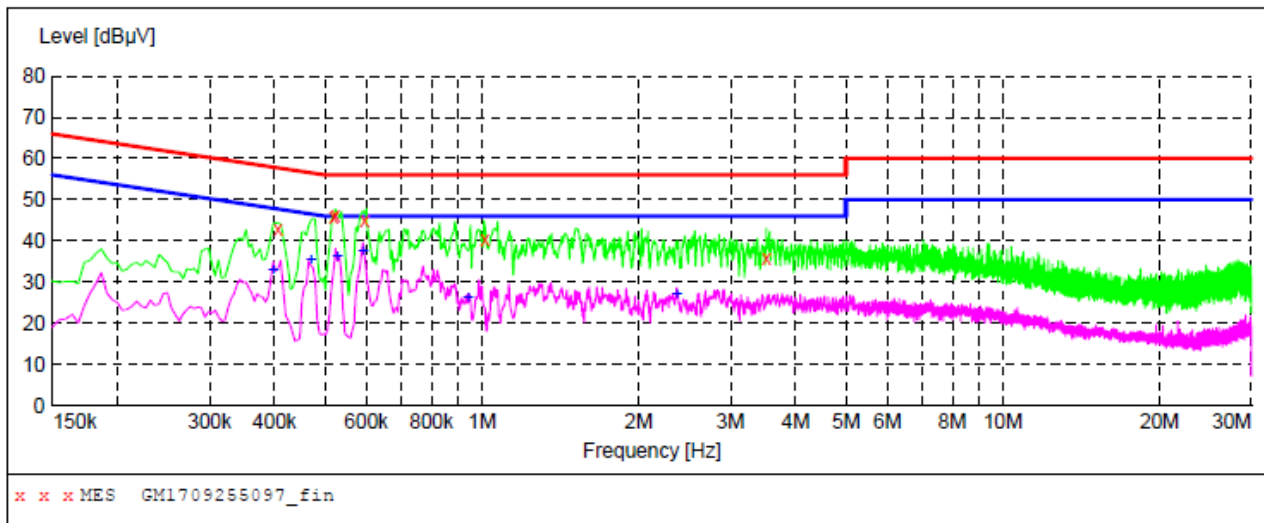
☒ Passed ☐ Not Applicable

Note:

- 1) Transd= Cable lose + Pulse Limiter Factor + Artificial Mains Factor
- 2) Margin= Limit - Level

Test Line:

L

**MEASUREMENT RESULT: "GM1709255097_fin"**

9/25/2017 10:30PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.406500	42.90	10.2	58	14.8	QP	L1	GND
0.519000	45.90	10.2	56	10.1	QP	L1	GND
0.523500	46.30	10.2	56	9.7	QP	L1	GND
0.595500	44.80	10.2	56	11.2	QP	L1	GND
1.014000	40.20	10.2	56	15.8	QP	L1	GND
3.520500	35.70	10.3	56	20.3	QP	L1	GND


MEASUREMENT RESULT: "GM1709255097_fin2"

9/25/2017 10:30PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.397500	32.90	10.2	48	15.0	AV	L1	GND
0.469500	35.50	10.2	47	11.0	AV	L1	GND
0.528000	36.30	10.2	46	9.7	AV	L1	GND
0.591000	37.40	10.2	46	8.6	AV	L1	GND
0.942000	26.20	10.2	46	19.8	AV	L1	GND
2.368500	26.90	10.2	46	19.1	AV	L1	GND

Test Line:

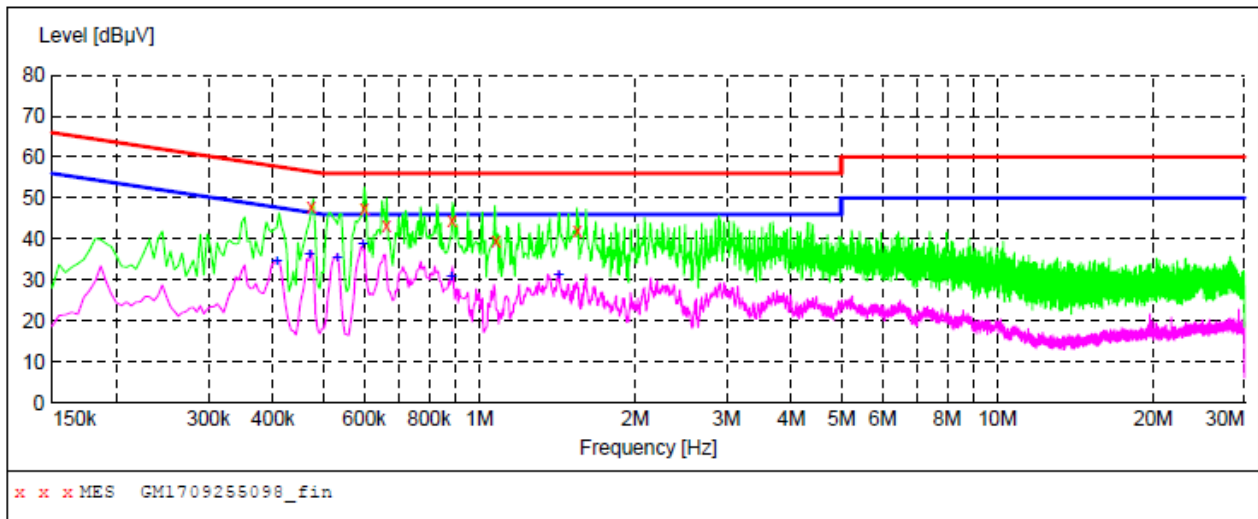N

**MEASUREMENT RESULT: "GM1709255098_fin"**

9/25/2017 10:33PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.474000	47.70	10.2	56	8.7	QP	N	GND
0.600000	47.40	10.2	56	8.6	QP	N	GND
0.663000	43.20	10.2	56	12.8	QP	N	GND
0.888000	44.60	10.1	56	11.4	QP	N	GND
1.077000	39.50	10.2	56	16.5	QP	N	GND
1.549500	42.00	10.2	56	14.0	QP	N	GND

MEASUREMENT RESULT: "GM1709255098_fin2"

9/25/2017 10:33PM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.406500	34.60	10.2	48	13.1	AV	N	GND
0.469500	36.20	10.2	47	10.3	AV	N	GND
0.532500	35.20	10.2	46	10.8	AV	N	GND
0.595500	38.60	10.2	46	7.4	AV	N	GND
0.883500	30.60	10.1	46	15.4	AV	N	GND
1.423500	31.30	10.2	46	14.7	AV	N	GND

5.3. Conducted Peak Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

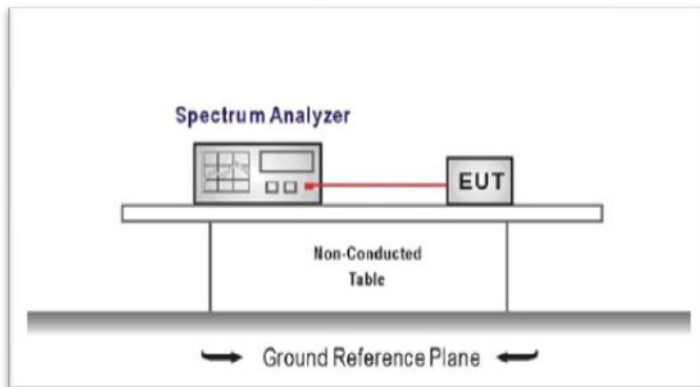TEST CONFIGURATION



TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the pathloss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
 Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 RBW $\geq$ the 20 dB bandwidth of the emission being measured, VBW $\geq$ RBW
 Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.



TEST MODE:


Please refer to the clause 3.3




TEST RESULTS

☒ Passed ☐ Not Applicable

Modulation type	Channel	Output power (dBm)	Limit (dBm)	Result
GFSK	00	1.352	≤ 30.00	Pass
	39	1.610		
	78	2.866		
$\pi/4$ DQPSK	00	0.532	≤ 21.00	Pass
	39	0.559		
	78	1.976		
8DPSK	00	0.825	≤ 21.00	Pass
	39	0.920		
	78	2.221		

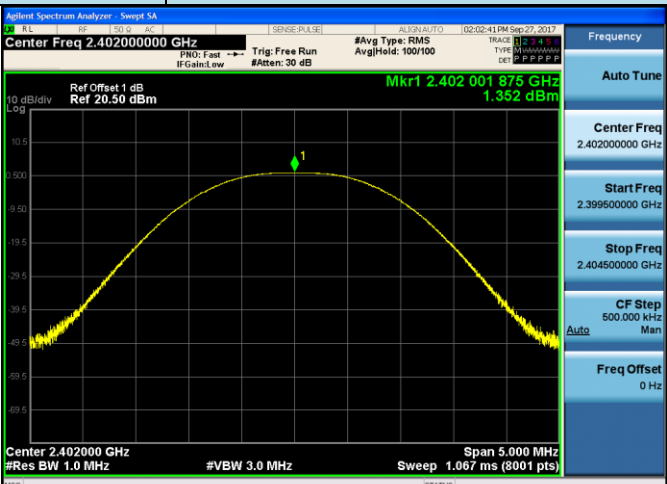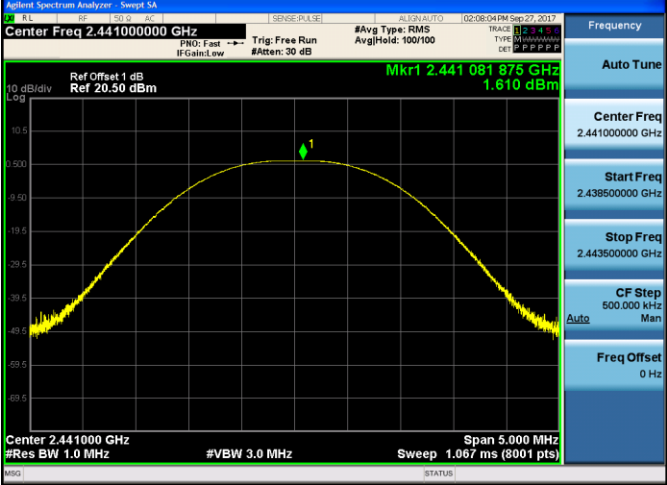Modulation Type:		GFSK
CH00		
CH39		
CH78		

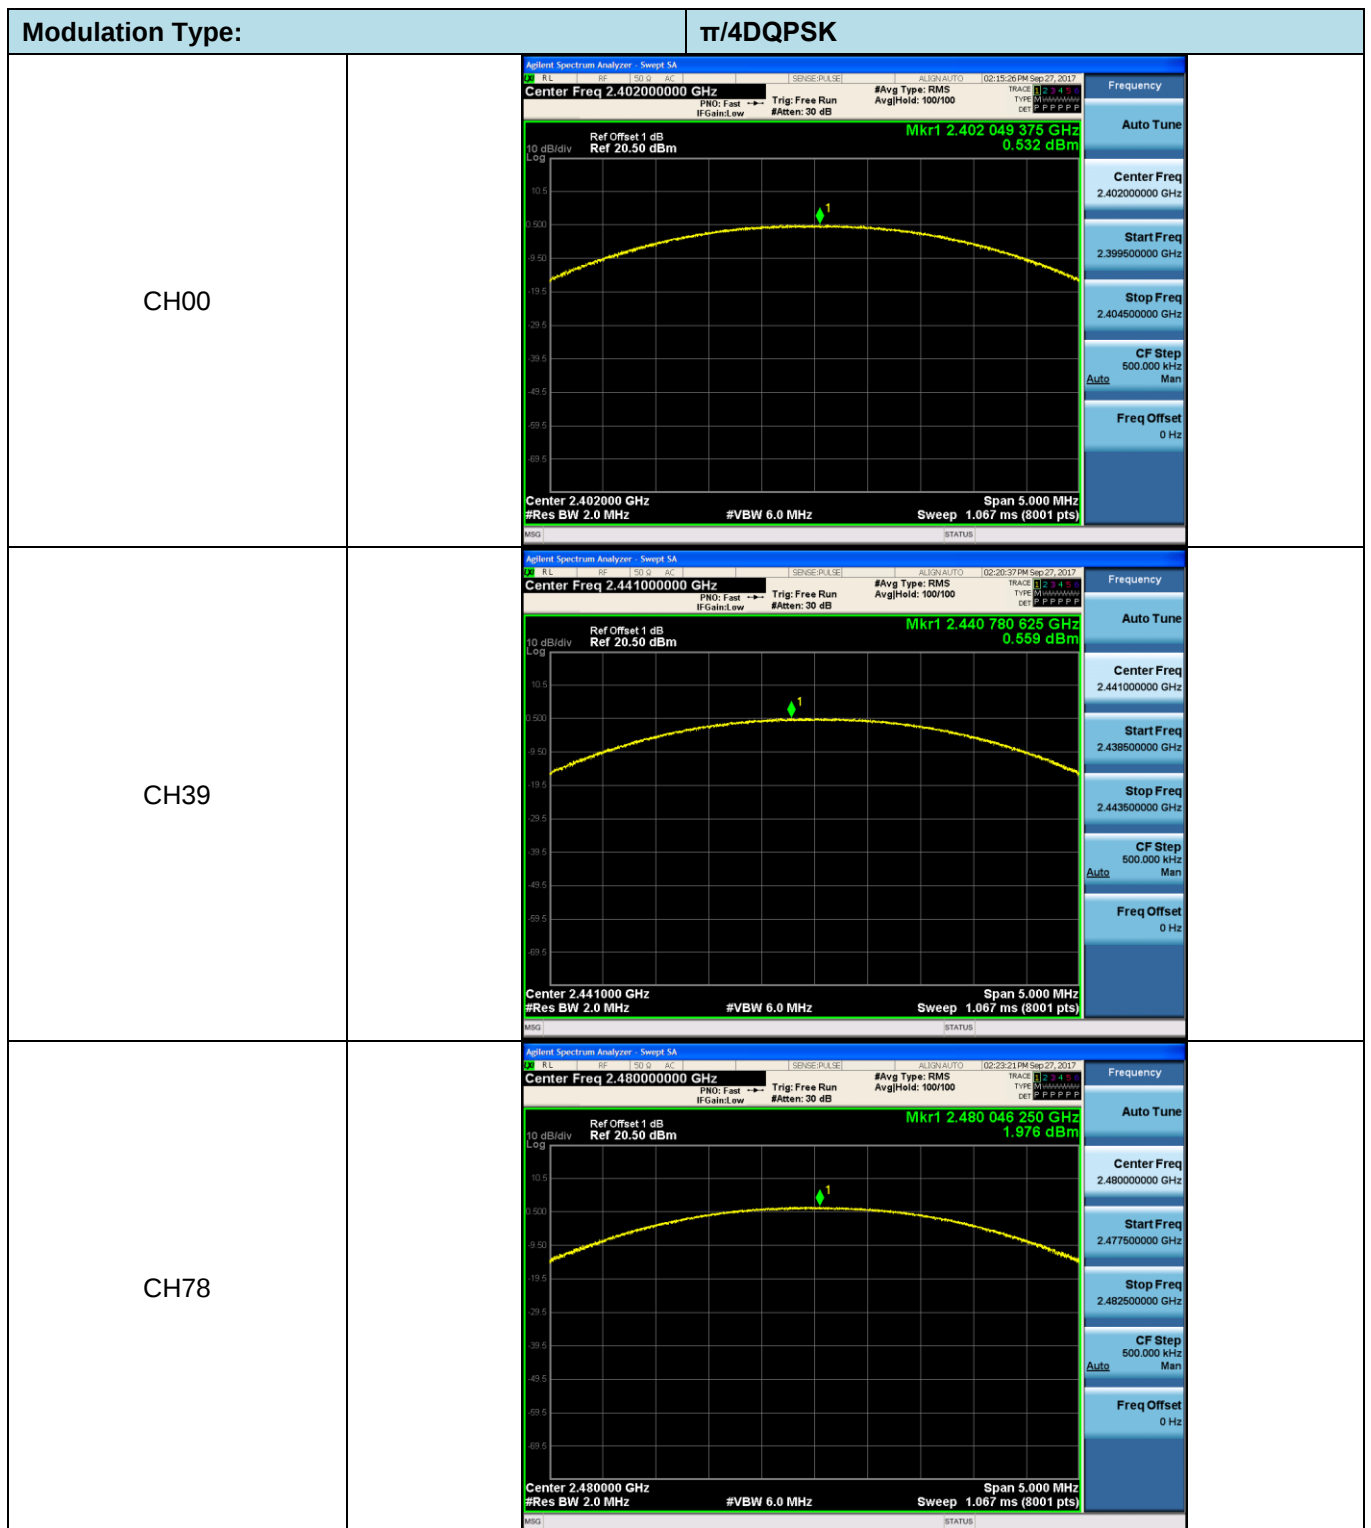

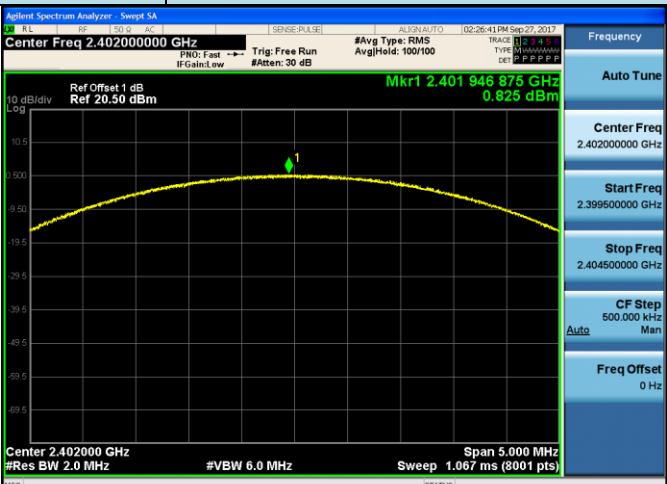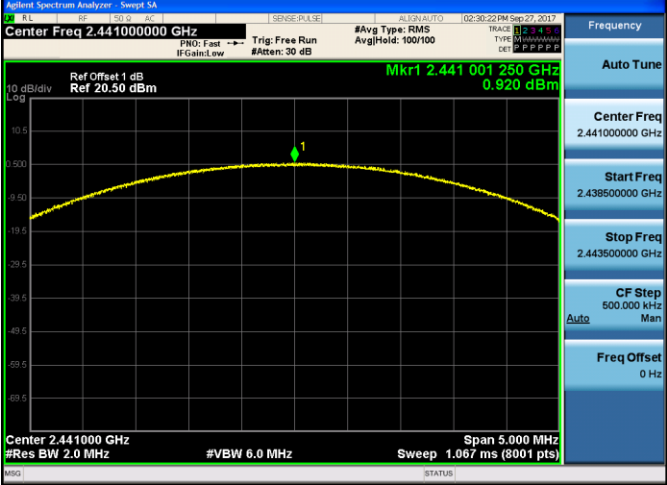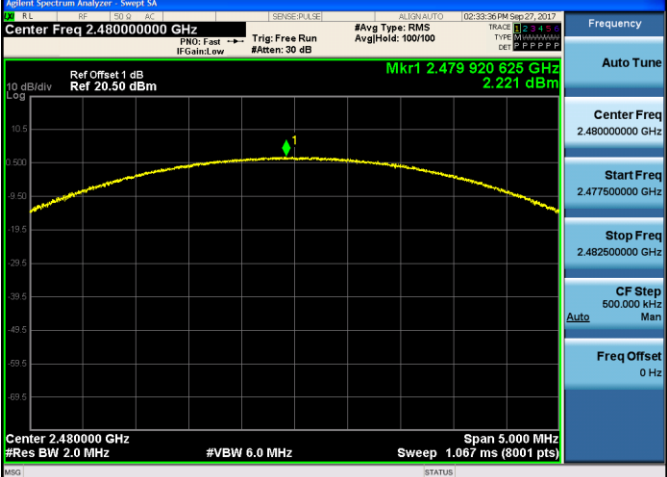
Modulation Type:		8DPSK
CH00		
CH39		
CH78		

5.4. 20 dB Bandwidth

LIMIT

N/A

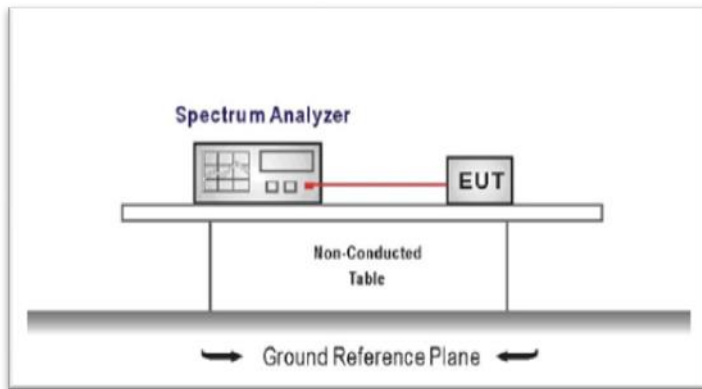TEST CONFIGURATION



TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
 Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
 RBW $\geq$ 1% of the 20 dB bandwidth, VBW $\geq$ RBW
 Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.




TEST MODE:




Please refer to the clause 3.3




TEST RESULTS

☒ Passed ☐ Not Applicable

Modulation type	Channel	20 dB Bandwidth (MHz)	Limit (MHz)	Result
GFSK	00	0.9214	-	Pass
	39	0.9285		
	78	0.9181		
$\pi/4$ DQPSK	00	1.248	-	Pass
	39	1.341		
	78	1.318		
8DPSK	00	1.330	-	Pass
	39	1.292		
	78	1.325		

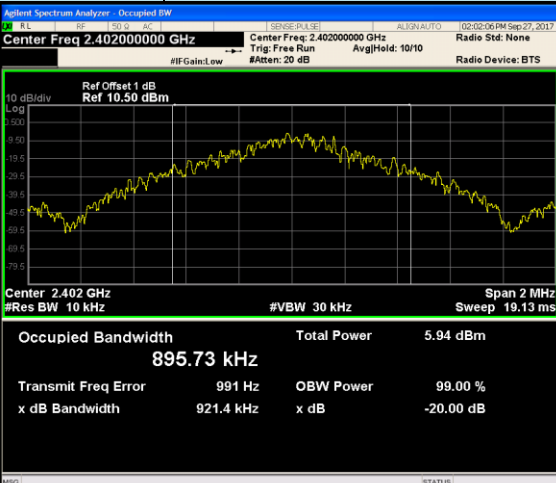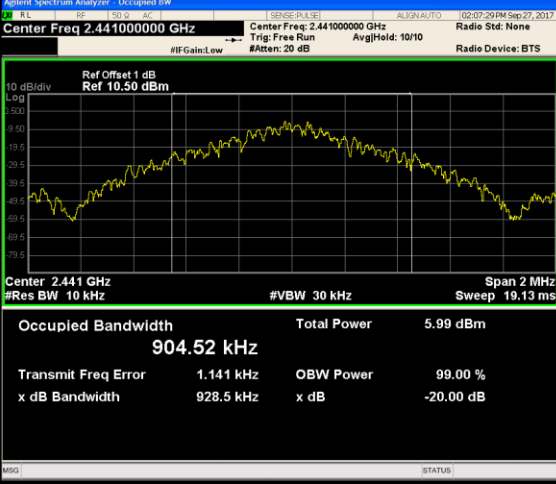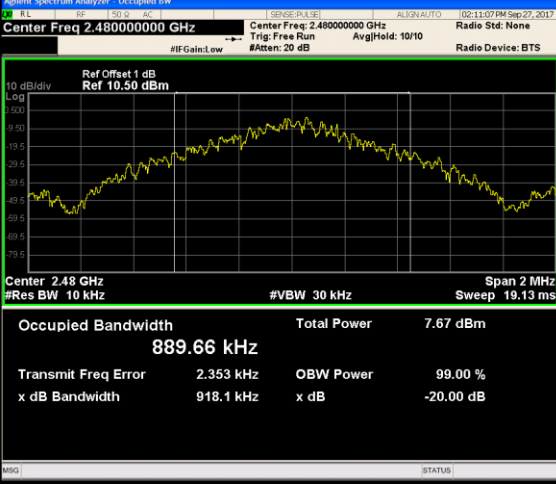Modulation Type:		GFSK	
CH00		 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.402000000 GHz Center Freq: 2.402000000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref Offset 1 dB Ref 10.50 dBm Center 2.402 GHz #Res BW 10 kHz #VBW 30 kHz Span 2 MHz Sweep 19.13 ms Occupied Bandwidth 895.73 kHz Total Power 5.94 dBm Transmit Freq Error 991 Hz OBW Power 99.00 % x dB Bandwidth 921.4 kHz x dB -20.00 dB	Frequency Center Freq 2.402000000 GHz CF Step 200.000 kHz Auto Man Freq Offset 0 Hz
CH39		 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.441000000 GHz Center Freq: 2.441000000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref Offset 1 dB Ref 10.50 dBm Center 2.441 GHz #Res BW 10 kHz #VBW 30 kHz Span 2 MHz Sweep 19.13 ms Occupied Bandwidth 904.52 kHz Total Power 5.99 dBm Transmit Freq Error 1.141 kHz OBW Power 99.00 % x dB Bandwidth 928.5 kHz x dB -20.00 dB	Frequency Center Freq 2.441000000 GHz CF Step 200.000 kHz Auto Man Freq Offset 0 Hz
CH78		 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.480000000 GHz Center Freq: 2.480000000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref Offset 1 dB Ref 10.50 dBm Center 2.48 GHz #Res BW 10 kHz #VBW 30 kHz Span 2 MHz Sweep 19.13 ms Occupied Bandwidth 889.66 kHz Total Power 7.67 dBm Transmit Freq Error 2.353 kHz OBW Power 99.00 % x dB Bandwidth 918.1 kHz x dB -20.00 dB	Frequency Center Freq 2.480000000 GHz CF Step 200.000 kHz Auto Man Freq Offset 0 Hz

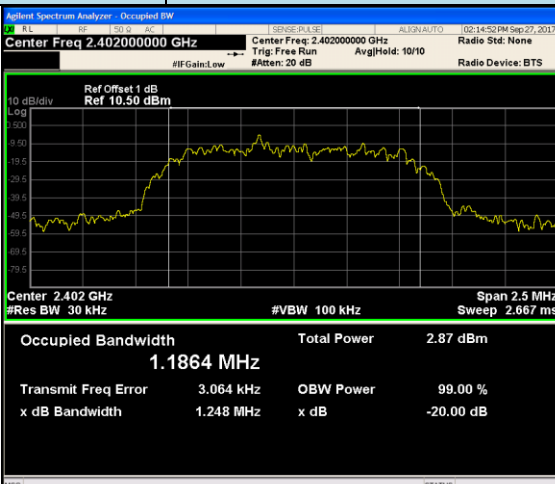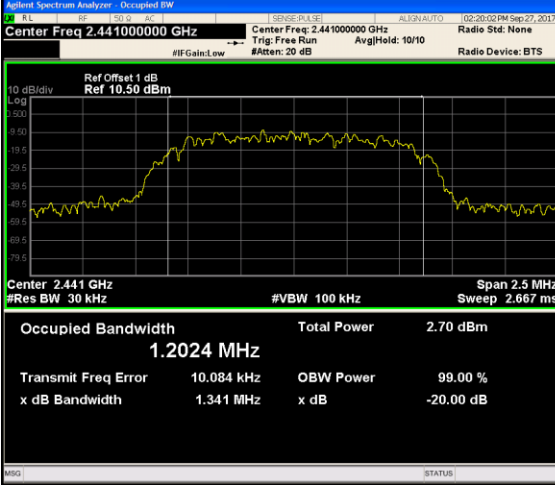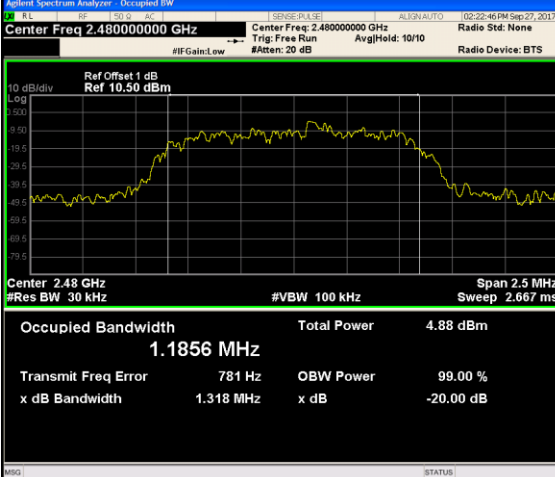Modulation Type:		π/4DQPSK					
CH00		<table><tr><td>Frequency</td></tr><tr><td>Center Freq 2.402000000 GHz</td></tr><tr><td>CF Step 250.000 kHz</td></tr><tr><td>Auto</td></tr><tr><td>Freq Offset 0 Hz</td></tr></table>	Frequency	Center Freq 2.402000000 GHz	CF Step 250.000 kHz	Auto	Freq Offset 0 Hz
Frequency							
Center Freq 2.402000000 GHz							
CF Step 250.000 kHz							
Auto							
Freq Offset 0 Hz							
CH39		<table><tr><td>Frequency</td></tr><tr><td>Center Freq 2.441000000 GHz</td></tr><tr><td>CF Step 250.000 kHz</td></tr><tr><td>Auto</td></tr><tr><td>Freq Offset 0 Hz</td></tr></table>	Frequency	Center Freq 2.441000000 GHz	CF Step 250.000 kHz	Auto	Freq Offset 0 Hz
Frequency							
Center Freq 2.441000000 GHz							
CF Step 250.000 kHz							
Auto							
Freq Offset 0 Hz							
CH78		<table><tr><td>Frequency</td></tr><tr><td>Center Freq 2.480000000 GHz</td></tr><tr><td>CF Step 250.000 kHz</td></tr><tr><td>Auto</td></tr><tr><td>Freq Offset 0 Hz</td></tr></table>	Frequency	Center Freq 2.480000000 GHz	CF Step 250.000 kHz	Auto	Freq Offset 0 Hz
Frequency							
Center Freq 2.480000000 GHz							
CF Step 250.000 kHz							
Auto							
Freq Offset 0 Hz							

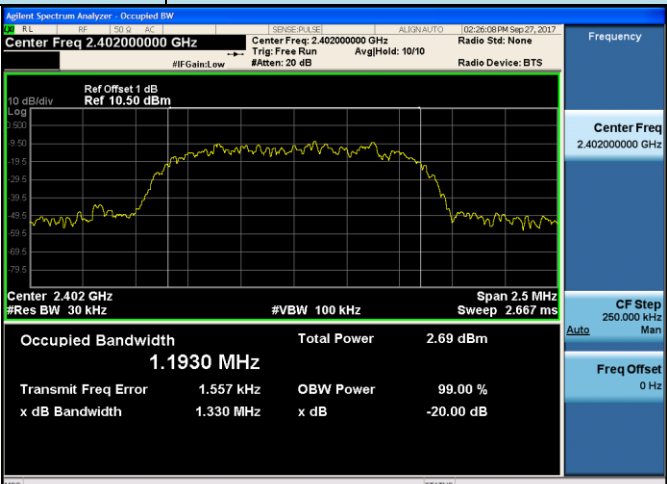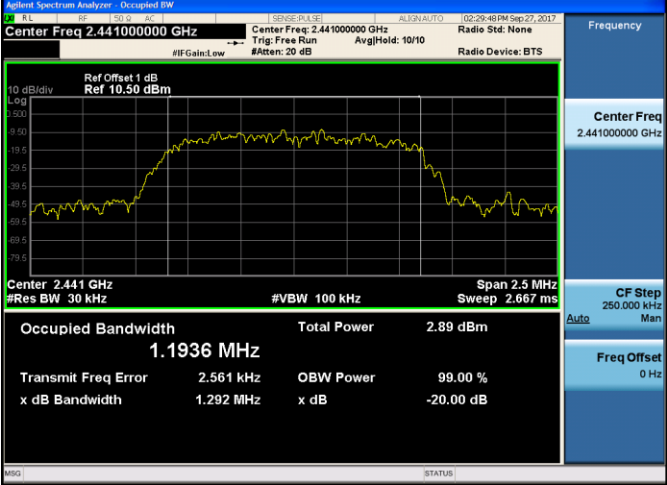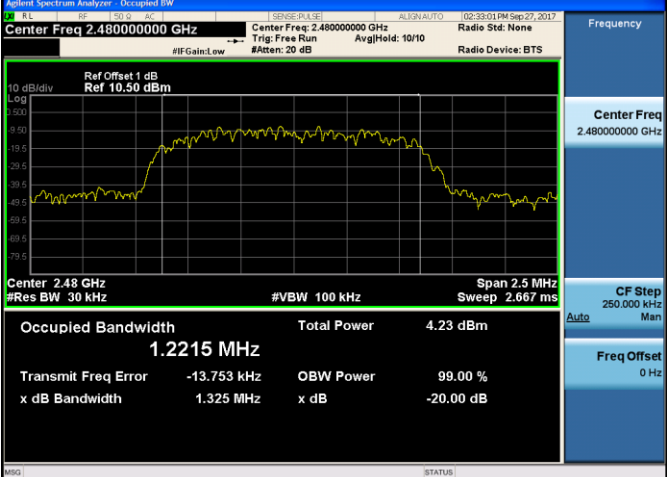
Modulation Type:		8DPSK
CH00		
CH39		
CH78		

5.5. Carrier Frequencies Separation

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25 kHz or the $2/3 \times 20$ dB bandwidth of the hopping channel, whichever is greater.

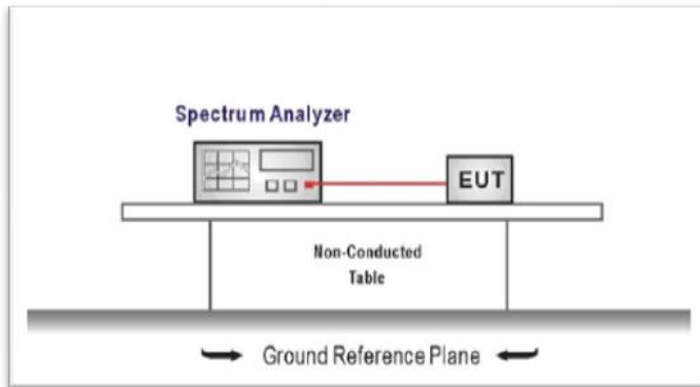TEST CONFIGURATION



TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels
RBW $\geq 1\%$ of the span, VBW $\geq$ RBW
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable

Modulation type	Channel	Carrier Frequencies Separation (MHz)	Limit (MHz) *	Result
GFSK	39	1.086	≥ 0.929	Pass
$\pi/4$ DQPSK	39	1.033	≥ 0.894	Pass
8DPSK	39	1.098	≥ 0.887	Pass

Note:

*: GFSK limit = The maximum 20 dB Bandwidth for GFSK modulation on the section 5.4.

$\pi/4$ DQPSK limit = $2/3 \times$ The maximum 20 dB Bandwidth for $\pi/4$ DQPSK modulation on the section 5.4.

8DPSK limit = $2/3 \times$ The maximum 20 dB Bandwidth for 8DPSK modulation on the section 5.4


GFSK	Agilent Spectrum Analyzer - Sweep SA Marker 1 1.086250000 MHz Ref Offset 1 dB Ref 16.50 dBm ΔMkr1 1.086 25 MHz 0.141 dB Start 2.440500 GHz #Res BW 30 kHz #VBW 100 kHz Stop 2.442500 GHz Sweep 2.133 ms (8001 pts) <table><tr><th>PKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>Δ2</td><td>1</td><td>f (Δ)</td><td>1.086 25 MHz (Δ)</td><td>0.141 dB</td><td></td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td>2.440 907 50 GHz</td><td>-1.466 dBm</td><td></td><td></td><td></td></tr></table> MSO STATUS Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2	PKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f (Δ)	1.086 25 MHz (Δ)	0.141 dB				2	F	1	f	2.440 907 50 GHz	-1.466 dBm			
PKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	Δ2	1	f (Δ)	1.086 25 MHz (Δ)	0.141 dB																							
2	F	1	f	2.440 907 50 GHz	-1.466 dBm																							
$\pi/4$ DQPSK	Agilent Spectrum Analyzer - Sweep SA Marker 1 1.032750000 MHz Ref Offset 1 dB Ref 16.50 dBm ΔMkr1 1.032 75 MHz -4.158 dB Start 2.440500 GHz #Res BW 30 kHz #VBW 100 kHz Stop 2.442500 GHz Sweep 2.133 ms (8001 pts) <table><tr><th>PKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>Δ2</td><td>1</td><td>f (Δ)</td><td>1.032 75 MHz (Δ)</td><td>-4.158 dB</td><td></td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td>2.440 944 75 GHz</td><td>-4.692 dBm</td><td></td><td></td><td></td></tr></table> MSO STATUS Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2	PKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f (Δ)	1.032 75 MHz (Δ)	-4.158 dB				2	F	1	f	2.440 944 75 GHz	-4.692 dBm			
PKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	Δ2	1	f (Δ)	1.032 75 MHz (Δ)	-4.158 dB																							
2	F	1	f	2.440 944 75 GHz	-4.692 dBm																							
8DPSK	Agilent Spectrum Analyzer - Sweep SA Marker 1 1.098250000 MHz Ref Offset 1 dB Ref 16.50 dBm ΔMkr1 1.098 25 MHz 0.864 dB Start 2.440500 GHz #Res BW 30 kHz #VBW 100 kHz Stop 2.442500 GHz Sweep 2.133 ms (8001 pts) <table><tr><th>PKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>Δ2</td><td>1</td><td>f (Δ)</td><td>1.098 25 MHz (Δ)</td><td>0.864 dB</td><td></td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td>2.440 910 00 GHz</td><td>-8.448 dBm</td><td></td><td></td><td></td></tr></table> MSO STATUS Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2	PKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f (Δ)	1.098 25 MHz (Δ)	0.864 dB				2	F	1	f	2.440 910 00 GHz	-8.448 dBm			
PKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	Δ2	1	f (Δ)	1.098 25 MHz (Δ)	0.864 dB																							
2	F	1	f	2.440 910 00 GHz	-8.448 dBm																							

5.6. Hopping Channel Number

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1): Frequency hopping systems in the 2400–2483.5 MHz band shall use at least **15** channels.

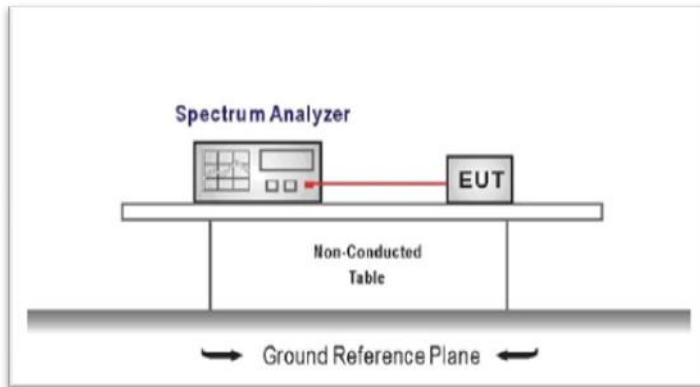TEST CONFIGURATION



TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = the frequency band of operation
RBW $\geq$ 1% of the span, VBW $\geq$ RBW
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable

Modulation type	Channel number	Limit	Result
GFSK	79	≥ 15.00	Pass
$\pi/4$ DQPSK	79		
8DPSK	79		


GFSK		
$\pi/4$ DQPSK		
8DPSK		

5.7. Dwell Time

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):The average time of occupancy on any channel shall not be greater than 0.4 seconds within a pe-riod of 0.4 seconds multiplied by the number of hopping channels employed.

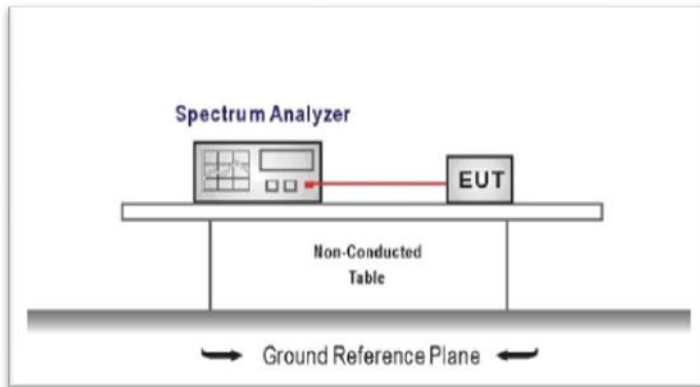TEST CONFIGURATION



TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = zero span, centered on a hopping channel, RBW= 1 MHz, VBW ≥ RBW
Sweep = as necessary to capture the entire dwell time per hopping channel,
Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 3.3




TEST RESULTS




☒ Passed ☐ Not Applicable




Modulation type	Channel	Dwell time (Second)	Limit (Second)	Result
GFSK	DH1	0.118	≤ 0.40	Pass
	DH3	0.261		
	DH5	0.306		
π/4DQPSK	2DH1	0.122	≤ 0.40	Pass
	2DH3	0.261		
	2DH5	0.307		
8DPSK	3DH1	0.122	≤ 0.40	Pass
	3DH3	0.261		
	3DH5	0.307		

Note:

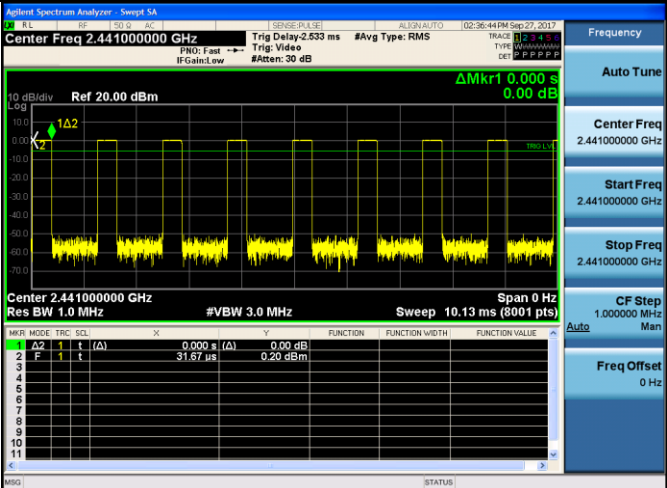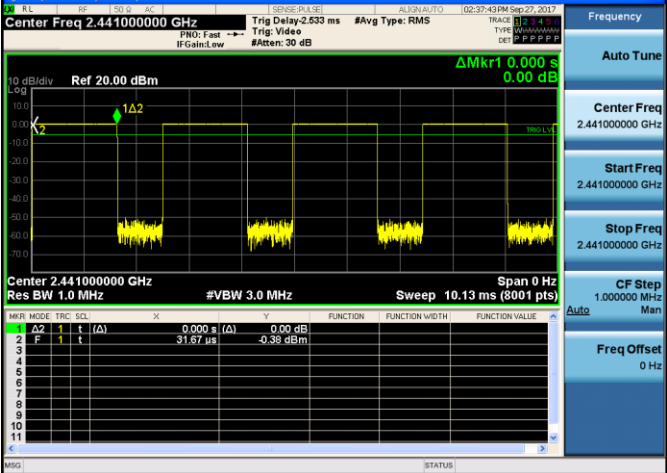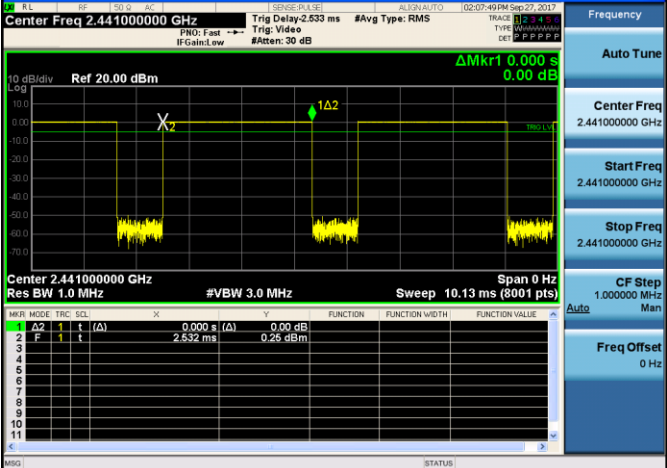1. We have tested all mode at high,middle and low channel,and recoreded worst case at middle channel.
2. Dwell time=Pulse time (ms) × (1600 ÷ 2 ÷ 79) ×31.6 Second for DH1, 2DH1, 3DH1
Dwell time=Pulse time (ms) × (1600 ÷ 4 ÷ 79) ×31.6 Second for DH3, 2DH3, 3DH3
Dwell time=Pulse time (ms) × (1600 ÷ 6 ÷ 79) ×31.6 Second for DH5, 2DH5, 3DH5

Modulation Type:		GFSK
DH1		
DH3		
DH5		

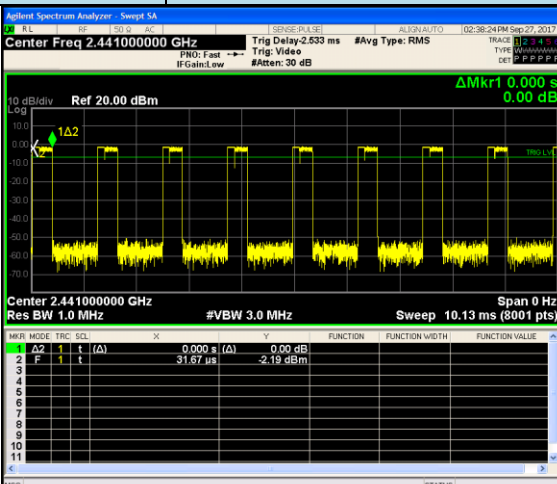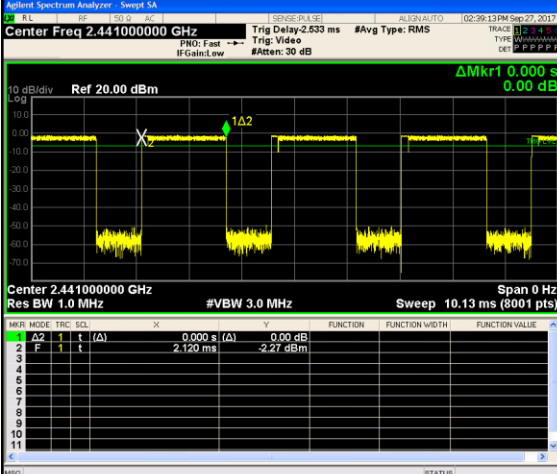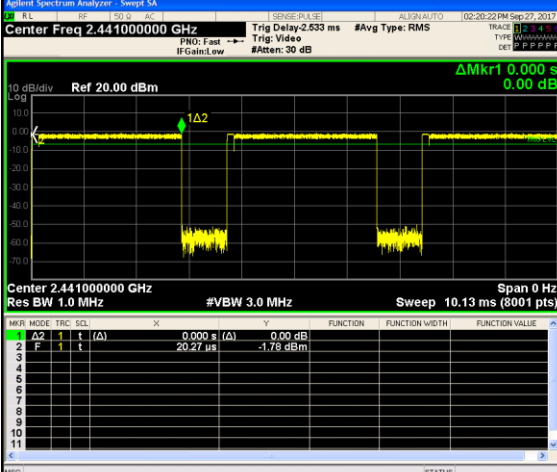Modulation Type:		$\pi/4$ DQPSK																																									
2DH1	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>Δ2</td><td>1</td><td>t</td><td>(Δ)</td><td>0.000 s (Δ)</td><td>0.00 dB</td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>t</td><td>(Δ)</td><td>31.67 μs</td><td>-2.19 dBm</td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	t	(Δ)	0.000 s (Δ)	0.00 dB			2	F	1	t	(Δ)	31.67 μs	-2.19 dBm			<table><tr><td>Frequency</td><td>Auto Tune</td></tr><tr><td>Center Freq</td><td>2.441000000 GHz</td></tr><tr><td>Start Freq</td><td>2.441000000 GHz</td></tr><tr><td>Stop Freq</td><td>2.441000000 GHz</td></tr><tr><td>CF Step</td><td>1.000000 MHz</td></tr><tr><td>Auto</td><td>Man</td></tr><tr><td>Freq Offset</td><td>0 Hz</td></tr></table>	Frequency	Auto Tune	Center Freq	2.441000000 GHz	Start Freq	2.441000000 GHz	Stop Freq	2.441000000 GHz	CF Step	1.000000 MHz	Auto	Man	Freq Offset	0 Hz
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																			
1	Δ2	1	t	(Δ)	0.000 s (Δ)	0.00 dB																																					
2	F	1	t	(Δ)	31.67 μs	-2.19 dBm																																					
Frequency	Auto Tune																																										
Center Freq	2.441000000 GHz																																										
Start Freq	2.441000000 GHz																																										
Stop Freq	2.441000000 GHz																																										
CF Step	1.000000 MHz																																										
Auto	Man																																										
Freq Offset	0 Hz																																										
2DH3	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>Δ2</td><td>1</td><td>t</td><td>(Δ)</td><td>0.000 s (Δ)</td><td>0.00 dB</td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>t</td><td>(Δ)</td><td>2.120 ms</td><td>-2.27 dBm</td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	t	(Δ)	0.000 s (Δ)	0.00 dB			2	F	1	t	(Δ)	2.120 ms	-2.27 dBm			<table><tr><td>Frequency</td><td>Auto Tune</td></tr><tr><td>Center Freq</td><td>2.441000000 GHz</td></tr><tr><td>Start Freq</td><td>2.441000000 GHz</td></tr><tr><td>Stop Freq</td><td>2.441000000 GHz</td></tr><tr><td>CF Step</td><td>1.000000 MHz</td></tr><tr><td>Auto</td><td>Man</td></tr><tr><td>Freq Offset</td><td>0 Hz</td></tr></table>	Frequency	Auto Tune	Center Freq	2.441000000 GHz	Start Freq	2.441000000 GHz	Stop Freq	2.441000000 GHz	CF Step	1.000000 MHz	Auto	Man	Freq Offset	0 Hz
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																			
1	Δ2	1	t	(Δ)	0.000 s (Δ)	0.00 dB																																					
2	F	1	t	(Δ)	2.120 ms	-2.27 dBm																																					
Frequency	Auto Tune																																										
Center Freq	2.441000000 GHz																																										
Start Freq	2.441000000 GHz																																										
Stop Freq	2.441000000 GHz																																										
CF Step	1.000000 MHz																																										
Auto	Man																																										
Freq Offset	0 Hz																																										
2DH5	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>Δ2</td><td>1</td><td>t</td><td>(Δ)</td><td>0.000 s (Δ)</td><td>0.00 dB</td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>t</td><td>(Δ)</td><td>20.27 μs</td><td>-1.78 dBm</td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	t	(Δ)	0.000 s (Δ)	0.00 dB			2	F	1	t	(Δ)	20.27 μs	-1.78 dBm			<table><tr><td>Frequency</td><td>Auto Tune</td></tr><tr><td>Center Freq</td><td>2.441000000 GHz</td></tr><tr><td>Start Freq</td><td>2.441000000 GHz</td></tr><tr><td>Stop Freq</td><td>2.441000000 GHz</td></tr><tr><td>CF Step</td><td>1.000000 MHz</td></tr><tr><td>Auto</td><td>Man</td></tr><tr><td>Freq Offset</td><td>0 Hz</td></tr></table>	Frequency	Auto Tune	Center Freq	2.441000000 GHz	Start Freq	2.441000000 GHz	Stop Freq	2.441000000 GHz	CF Step	1.000000 MHz	Auto	Man	Freq Offset	0 Hz
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																			
1	Δ2	1	t	(Δ)	0.000 s (Δ)	0.00 dB																																					
2	F	1	t	(Δ)	20.27 μs	-1.78 dBm																																					
Frequency	Auto Tune																																										
Center Freq	2.441000000 GHz																																										
Start Freq	2.441000000 GHz																																										
Stop Freq	2.441000000 GHz																																										
CF Step	1.000000 MHz																																										
Auto	Man																																										
Freq Offset	0 Hz																																										

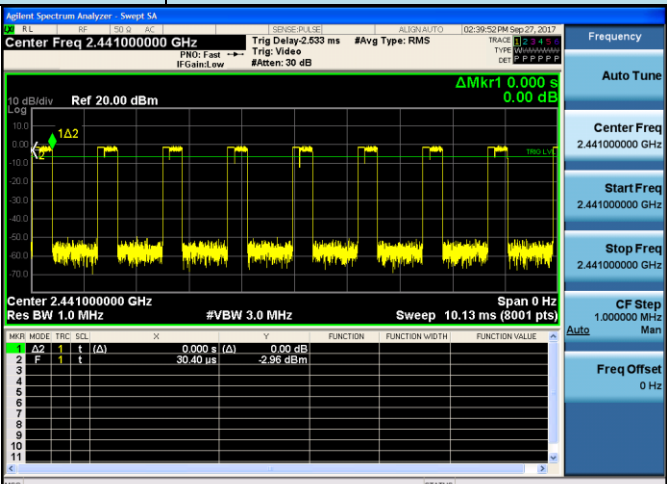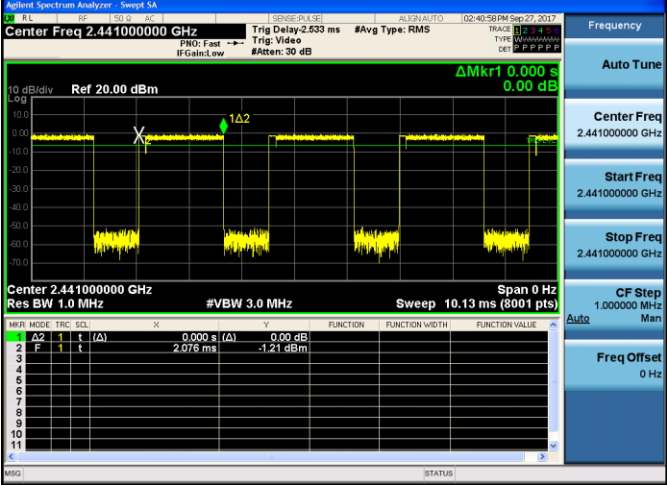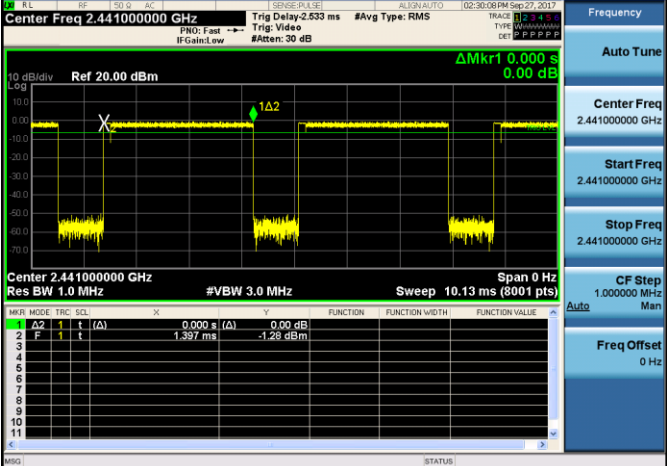Modulation Type:		8DPSK
3DH1		Frequency Auto Tune Center Freq 2.441000000 GHz Start Freq 2.441000000 GHz Stop Freq 2.441000000 GHz CF Step 1.000000 MHz Man Freq Offset 0 Hz
3DH3		Frequency Auto Tune Center Freq 2.441000000 GHz Start Freq 2.441000000 GHz Stop Freq 2.441000000 GHz CF Step 1.000000 MHz Man Freq Offset 0 Hz
3DH5		Frequency Auto Tune Center Freq 2.441000000 GHz Start Freq 2.441000000 GHz Stop Freq 2.441000000 GHz CF Step 1.000000 MHz Man Freq Offset 0 Hz

5.8. Pseudorandom Frequency Hopping Sequence

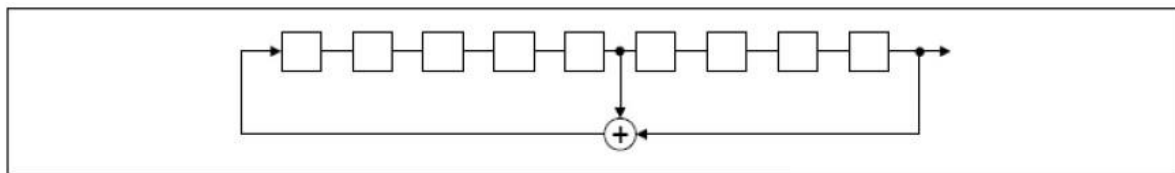
LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

TEST RESULTS


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

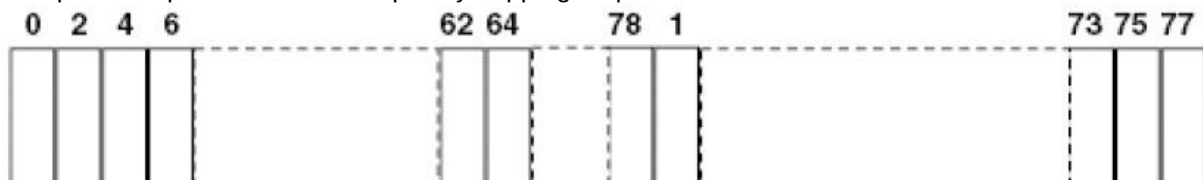An example of pseudorandom frequency hopping sequence as follows:



Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

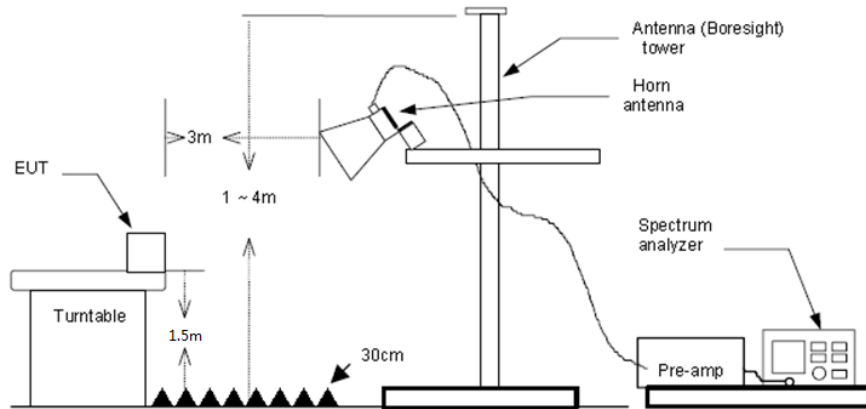
5.9. Restricted band (radiated)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION



TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:
RBW=1 MHz, VBW=3 MHz Peak detector for Peak value
RBW=1 MHz, VBW=10 Hz Peak detector for Average value.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS


☒ Passed ☐ Not Applicable


Note:


- 1) Final level= Read level + Antenna Factor+ Cable Loss- Preamp Factor
- 2) Have pre-scan all modulation mode, found the GFSK modulation which it was worst case, so only the worst case's data on the test report.
- 3) The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.

CH00									
Frequency (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	Polarization	Test value
2310.00	36.66	28.05	6.62	37.65	33.68	74.00	-40.32	Vertical	Peak
2390.03	36.93	27.65	6.75	37.87	33.46	74.00	-40.54	Vertical	Peak
2310.00	35.25	28.05	6.62	37.65	32.27	74.00	-41.73	Horizontal	Peak
2390.03	36.60	27.65	6.75	37.87	33.13	74.00	-40.87	Horizontal	Peak

CH78									
Frequency (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	Polarization	Test value
2483.50	58.14	27.26	6.83	37.87	54.36	74.00	-19.64	Vertical	Peak
2500.00	34.64	27.20	6.84	37.87	30.81	74.00	-43.19	Vertical	Peak
2483.50	60.11	27.26	6.83	37.87	56.33	74.00	-17.67	Horizontal	Peak
2500.00	35.72	27.20	6.84	37.87	31.89	74.00	-42.11	Horizontal	Peak
2483.50	24.75	27.26	6.83	37.87	20.97	54.00	-33.03	Vertical	Average
2500.00	22.87	27.20	6.84	37.87	19.04	54.00	-34.96	Vertical	Average
2483.50	24.27	27.26	6.83	37.87	20.49	54.00	-33.51	Horizontal	Average
2500.00	22.44	27.20	6.84	37.87	18.61	54.00	-35.39	Horizontal	Average

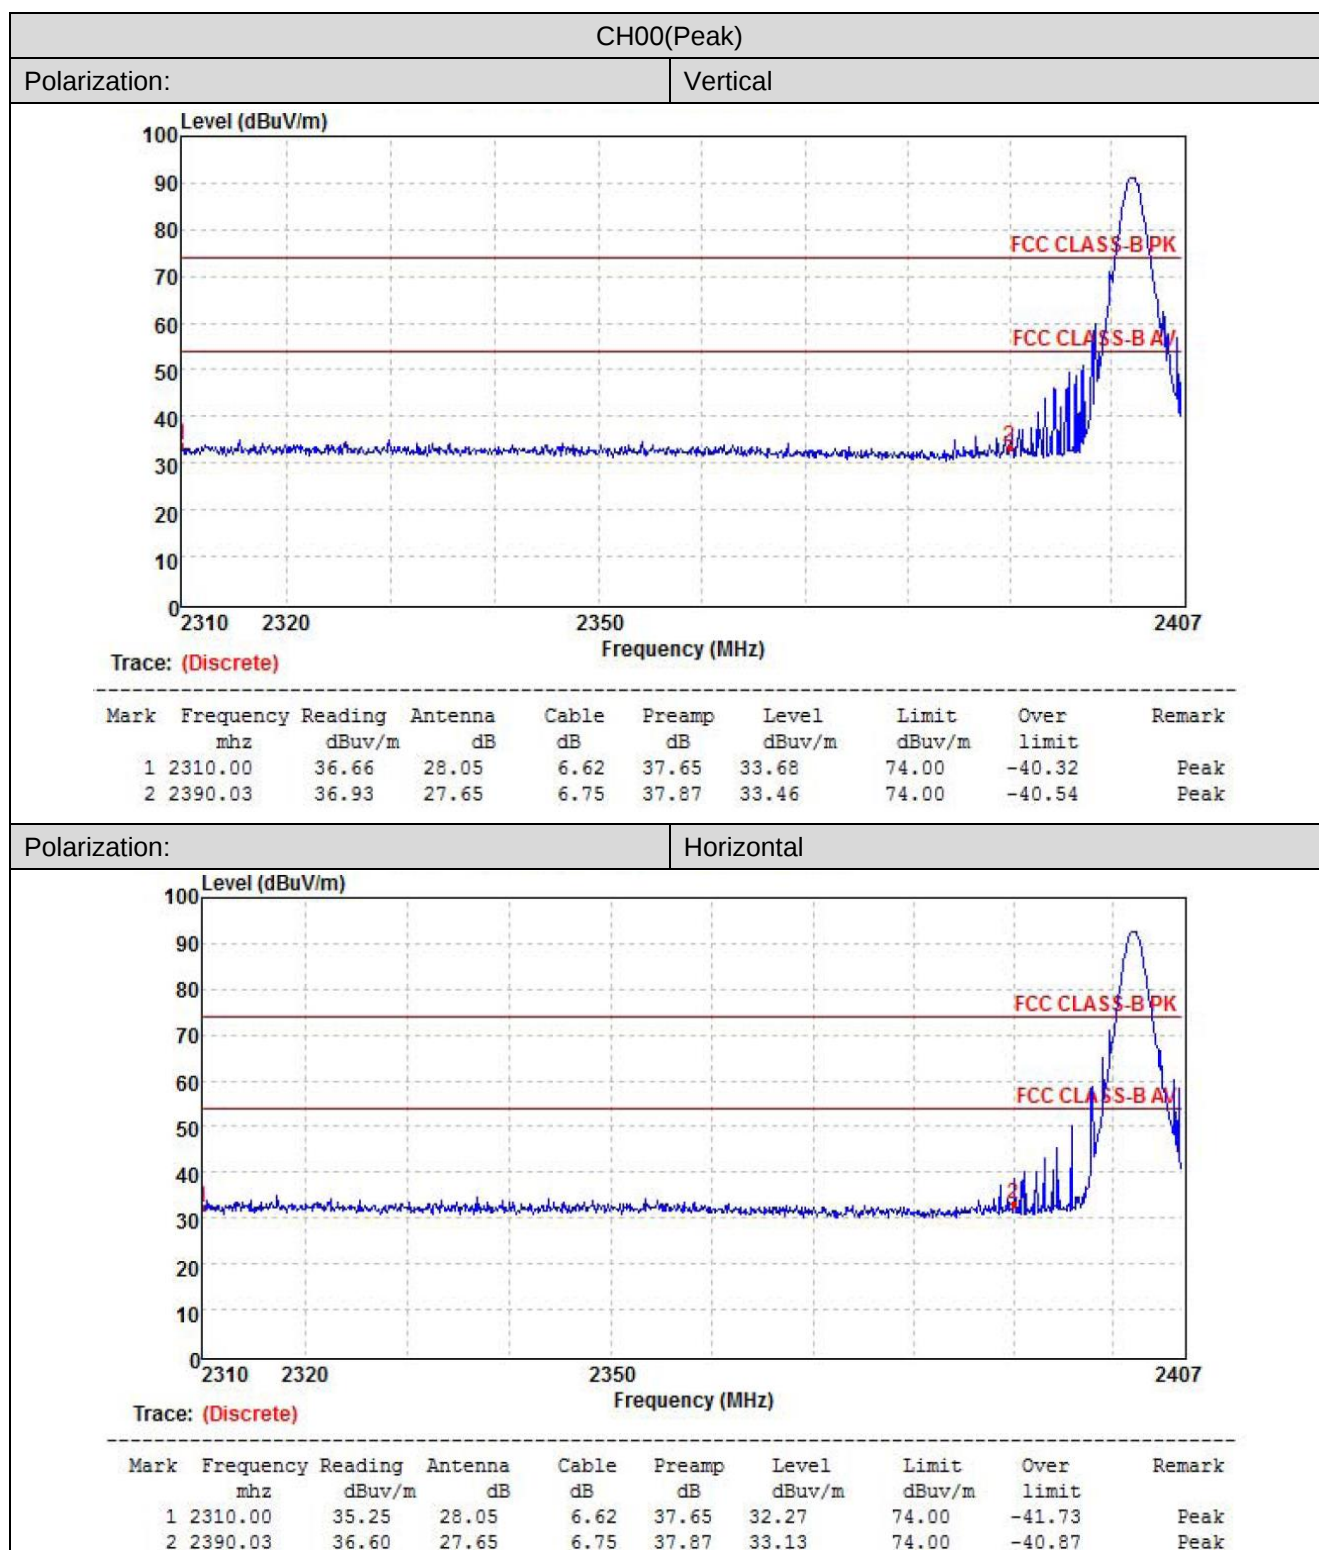

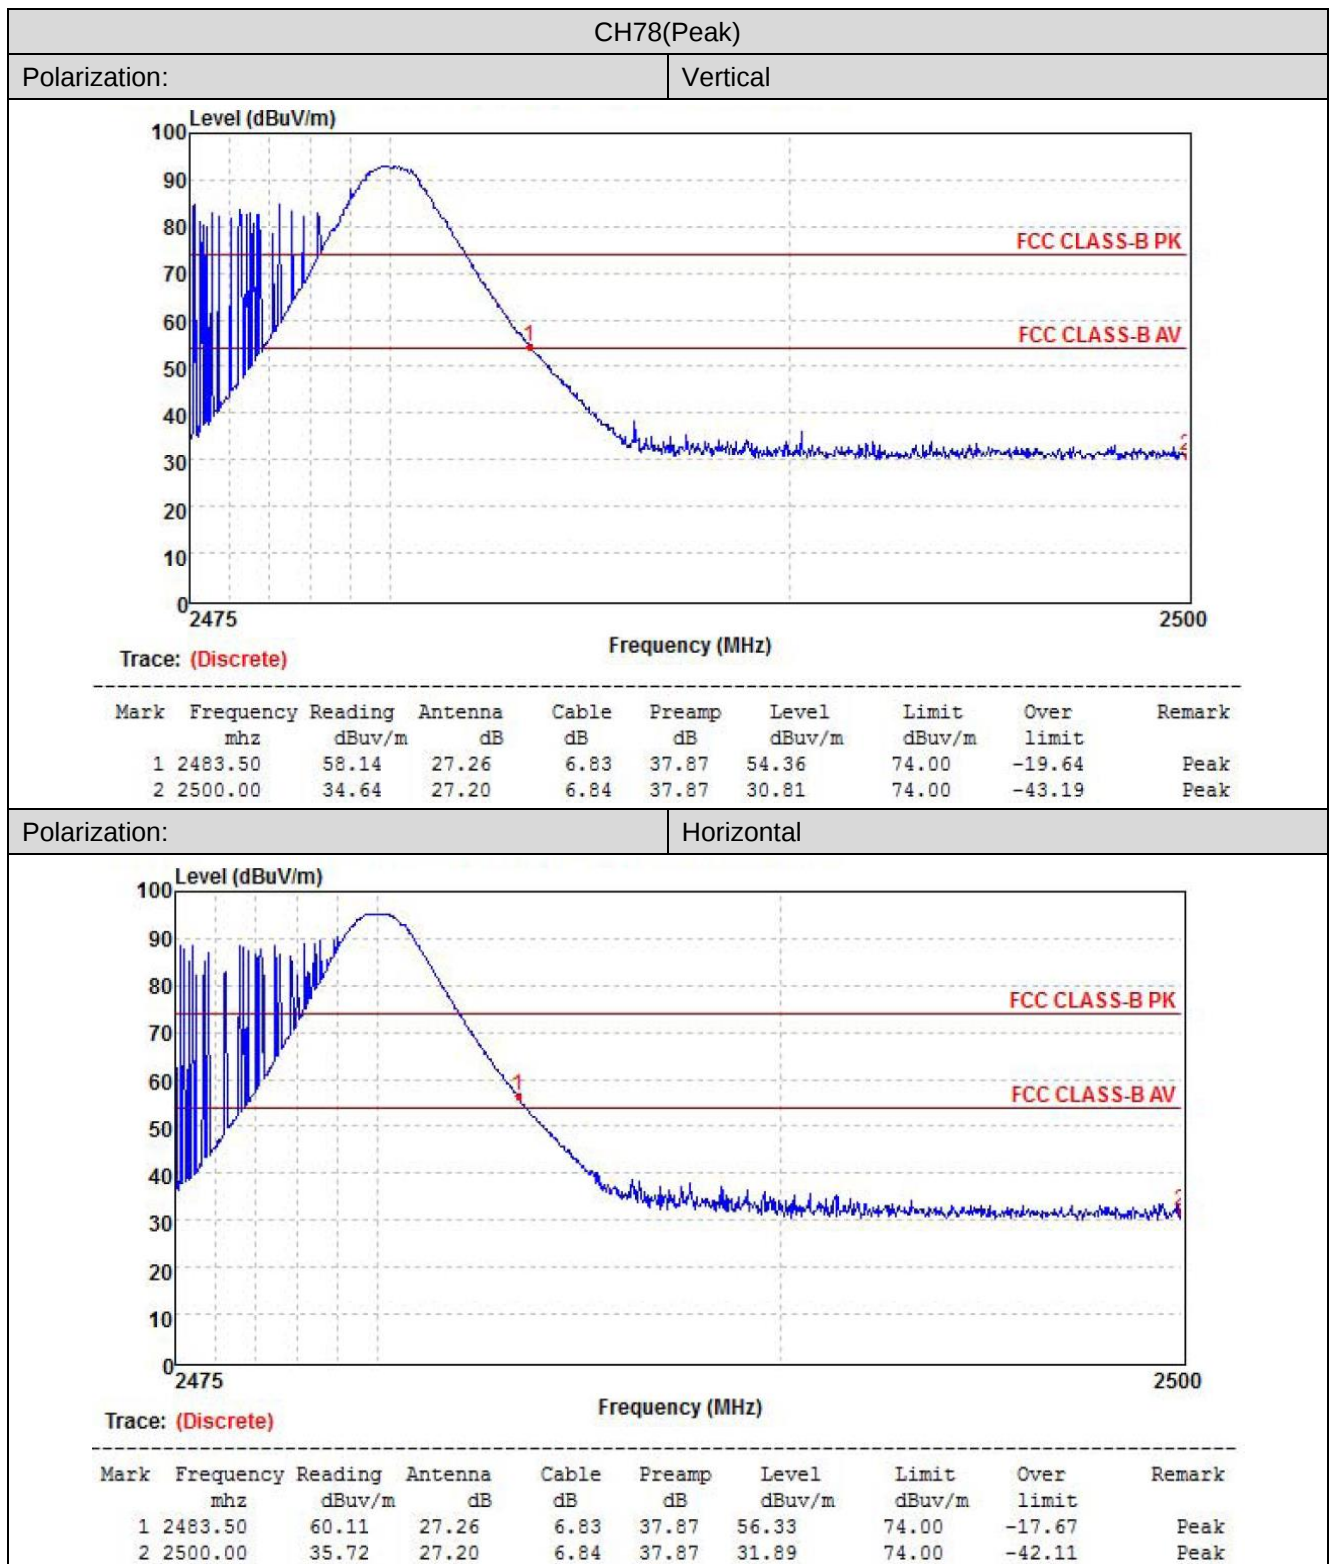

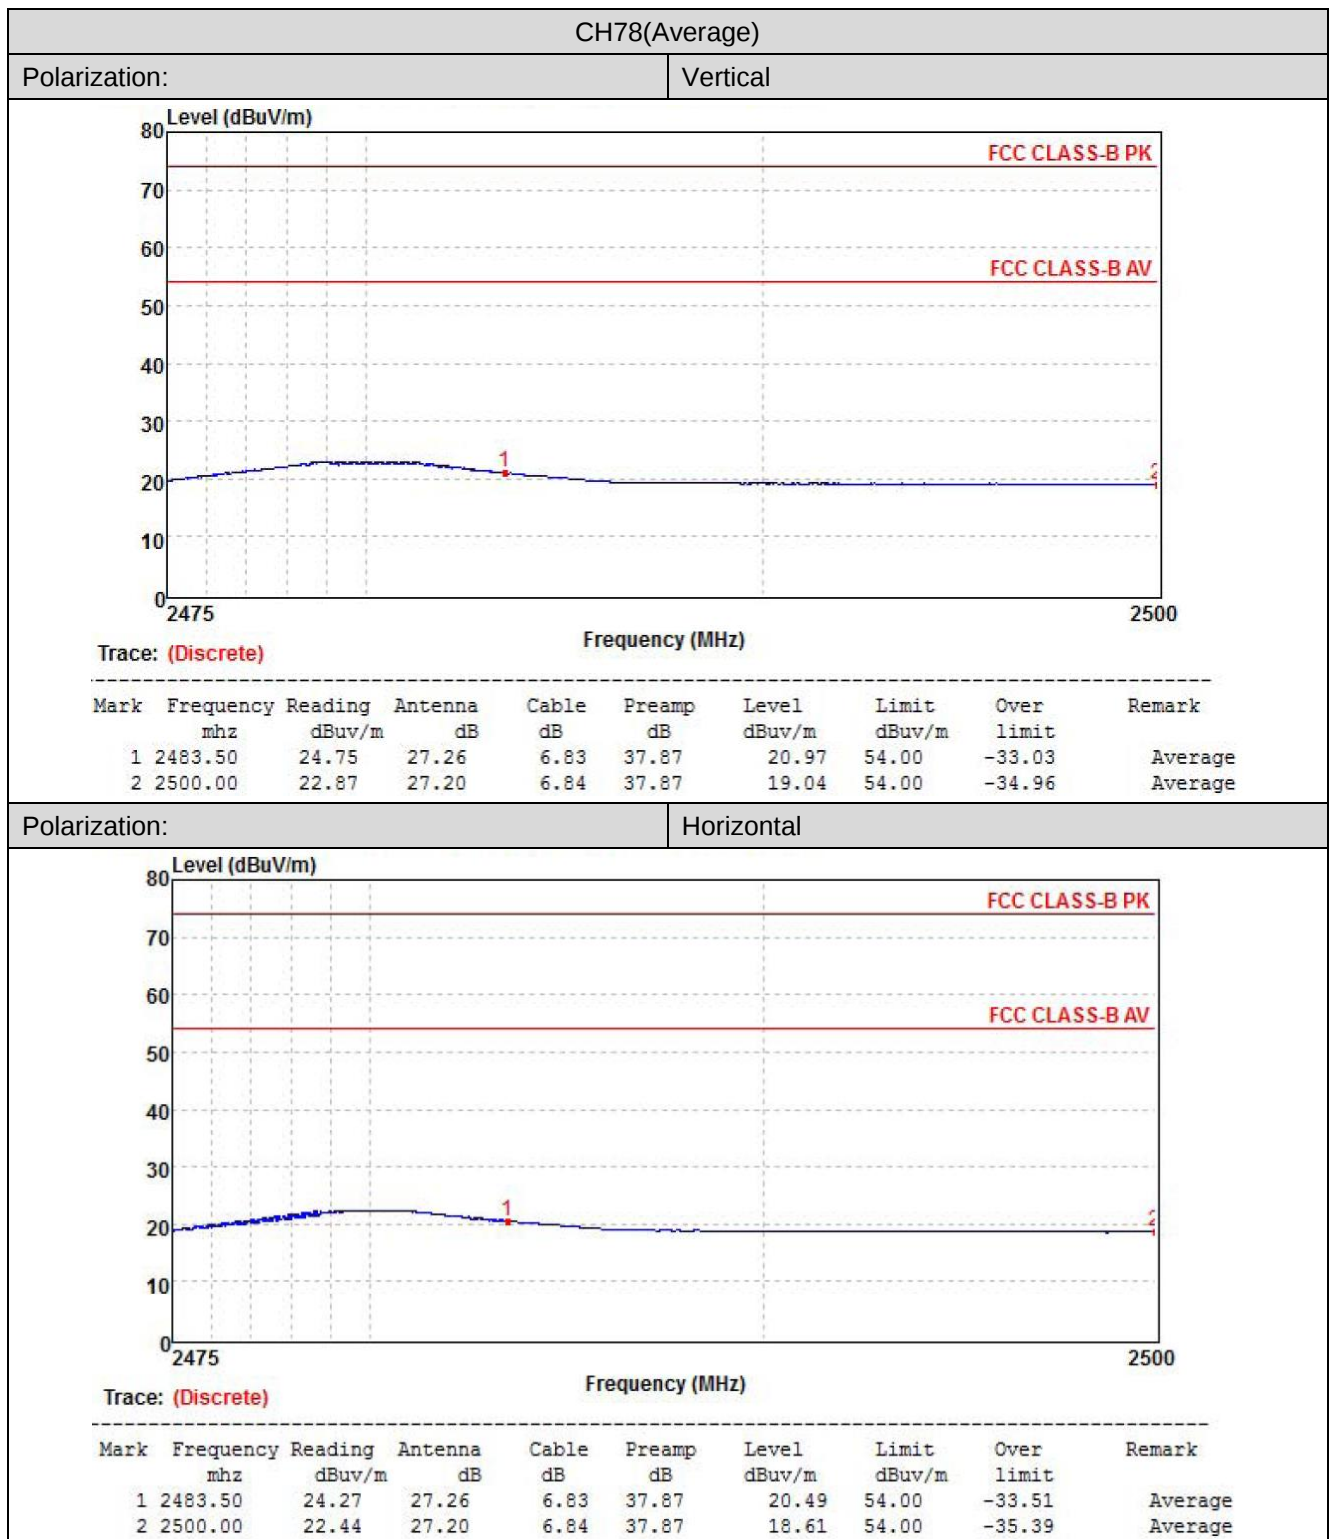


5.10. Band edge and Spurious Emissions (conducted)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

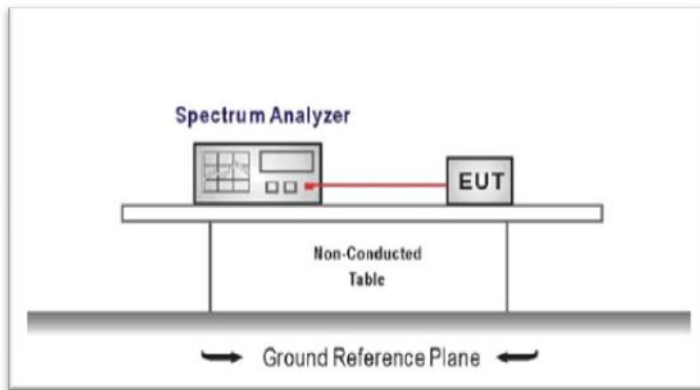TEST CONFIGURATION



TEST PROCEDURE

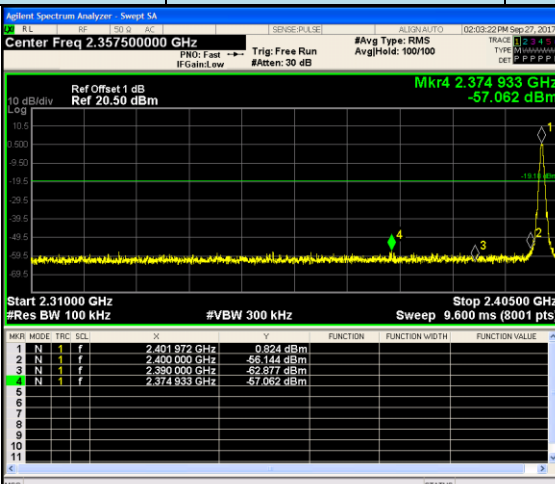
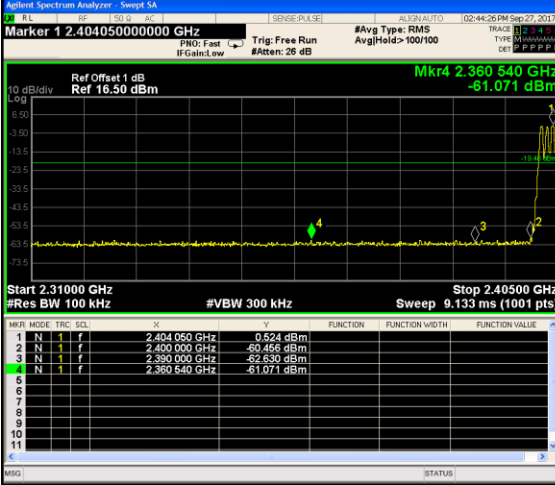
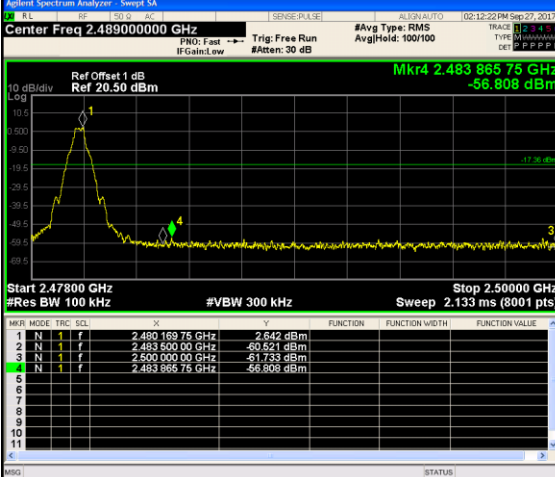
1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
RBW = 100 kHz, VBW $\geq$ RBW
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:


Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable

Test Item:	Band edge	Modulation type:	GFSK
CH00 No hopping mode		Frequency Auto Tune Center Freq 2.357500000 GHz StartFreq 2.310000000 GHz Stop Freq 2.405000000 GHz CF Step 9.500000 MHz Man Freq Offset 0 Hz	
CH00 Hopping mode		Peak Search NextPeak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--RefLvl More 1 of 2	
CH78 No hopping mode		Frequency Auto Tune Center Freq 2.489000000 GHz StartFreq 2.478000000 GHz Stop Freq 2.500000000 GHz CF Step 2.200000 MHz Man Freq Offset 0 Hz	

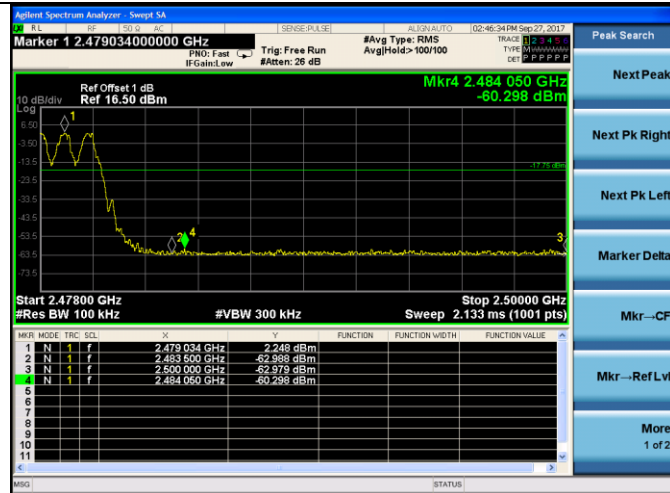CH78
Hopping mode



Test Item:	Band edge	Modulation type:	$\pi/4$ DQPSK
CH00 No hopping mode	Agilent Spectrum Analyzer - Swept SA RL BP 50 AC SENSE: PULSE ALPHA: AUTO 02:16:07 PM Sep 27, 2017 Center Freq 2.357500000 GHz PRF: Fast IF Gain: Low Trig: Free Run #Atten: 30 dB #Avg Type: RMS AvgHeld: 100/100 TRACE 1 TYPE: MARGINAL DET: P P P P P Ref Offset 1 dB Ref 20.50 dBm Mkr4 2.349 413 GHz -57.929 dBm 10 dB/div Log 0.500 0.600 0.700 0.800 0.900 1.000 1.100 1.200 1.300 1.400 1.500 1.600 1.700 1.800 1.900 2.000 2.100 2.200 2.300 2.400 2.500 2.600 2.700 2.800 2.900 3.000 3.100 3.200 3.300 3.400 3.500 3.600 3.700 3.800 3.900 4.000 4.100 4.200 4.300 4.400 4.500 4.600 4.700 4.800 4.900 5.000 5.100 5.200 5.300 5.400 5.500 5.600 5.700 5.800 5.900 6.000 6.100 6.200 6.300 6.400 6.500 6.600 6.700 6.800 6.900 7.000 7.100 7.200 7.300 7.400 7.500 7.600 7.700 7.800 7.900 8.000 8.100 8.200 8.300 8.400 8.500 8.600 8.700 8.800 8.900 9.000 9.100 9.200 9.300 9.400 9.500 9.600 9.700 9.800 9.900 10.000 10.100 10.200 10.300 10.400 10.500 10.600 10.700 10.800 10.900 11.000 11.100 11.200 11.300 11.400 11.500 11.600 11.700 11.800 11.900 12.000 12.100 12.200 12.300 12.400 12.500 12.600 12.700 12.800 12.900 13.000 13.100 13.200 13.300 13.400 13.500 13.600 13.700 13.800 13.900 14.000 14.100 14.200 14.300 14.400 14.500 14.600 14.700 14.800 14.900 15.000 15.100 15.200 15.300 15.400 15.500 15.600 15.700 15.800 15.900 16.000 16.100 16.200 16.300 16.400 16.500 16.600 16.700 16.800 16.900 17.000 17.100 17.200 17.300 17.400 17.500 17.600 17.700 17.800 17.900 18.000 18.100 18.200 18.300 18.400 18.500 18.600 18.700 18.800 18.900 19.000 19.100 19.200 19.300 19.400 19.500 19.600 19.700 19.800 19.900 20.000 20.100 20.200 20.300 20.400 20.500 20.600 20.700 20.800 20.900 21.000 21.100 21.200 21.300 21.400 21.500 21.600 21.700 21.800 21.900 22.000 22.100 22.200 22.300 22.400 22.500 22.600 22.700 22.800 22.900 23.000 23.100 23.200 23.300 23.400 23.500 23.600 23.700 23.800 23.900 24.000 24.100 24.200 24.300 24.400 24.500 24.600 24.700 24.800 24.900 25.000 25.100 25.200 25.300 25.400 25.500 25.600 25.700 25.800 25.900 26.000 26.100 26.200 26.300 26.400 26.500 26.600 26.700 26.800 26.900 27.000 27.100 27.200 27.300 27.400 27.500 27.600 27.700 27.800 27.900 28.000 28.100 28.200 28.300 28.400 28.500 28.600 28.700 28.800 28.900 29.000 29.100 29.200 29.300 29.400 29.500 29.600 29.700 29.800 29.900 30.000 30.100 30.200 30.300 30.400 30.500 30.600 30.700 30.800 30.900 31.000 31.100 31.200 31.300 31.400 31.500 31.600 31.700 31.800 31.900 32.000 32.100 32.200 32.300 32.400 32.500 32.600 32.700 32.800 32.900 33.000 33.100 33.200 33.300 33.400 33.500 33.600 33.700 33.800 33.900 34.000 34.100 34.200 34.300 34.400 34.500 34.600 34.700 34.800 34.900 35.000 35.100 35.200 35.300 35.400 35.500 35.600 35.700 35.800 35.900 36.000 36.100 36.200 36.300 36.400 36.500 36.600 36.700 36.800 36.900 37.000 37.100 37.200 37.300 37.400 37.500 37.600 37.700 37.800 37.900 38.000 38.100 38.200 38.300 38.400 38.500 38.600 38.700 38.800 38.900 39.000 39.100 39.200 39.300 39.400 39.500 39.600 39.700 39.800 39.900 40.000 40.100 40.200 40.300 40.400 40.500 40.600 40.700 40.800 40.900 41.000 41.100 41.200 41.300 41.400 41.500 41.600 41.700 41.800 41.900 42.000 42.100 42.200 42.300 42.400 42.500 42.600 42.700 42.800 42.900 43.000 43.100 43.200 43.300 43.400 43.500 43.600 43.700 43.800 43.900 44.000 44.100 44.200 44.300 44.400 44.500 44.600 44.700 44.800 44.900 45.000 45.100 45.200 45.300 45.400 45.500 45.600 45.700 45.800 45.900 46.000 46.100 46.200 46.300 46.400 46.500 46.600 46.700 46.800 46.900 47.000 47.100 47.200 47.300 47.400 47.500 47.600 47.700 47.800 47.900 48.000 48.100 48.200 48.300 48.400 48.500 48.600 48.700 48.800 48.900 49.000 49.100 49.200 49.300 49.400 49.500 49.600 49.700 49.800 49.900 50.000 50.100 50.200 50.300 50.400 50.500 50.600 50.700 50.800 50.900 51.000 51.100 51.200 51.300 51.400 51.500 51.600 51.700 51.800 51.900 52.000 52.100 52.200 52.300 52.400 52.500 52.600 52.700 52.800 52.900 53.000 53.100 53.200 53.300 53.400 53.500 53.600 53.700 53.800 53.900 54.000 54.100 54.200 54.300 54.400 54.500 54.600 54.700 54.800 54.900 55.000 55.100 55.200 55.300 55.400 55.500 55.600 55.700 55.800 55.900 56.000 56.100 56.200 56.300 56.400 56.500 56.600 56.700 56.800 56.900 57.000 57.100 57.200 57.300 57.400 57.500 57.600 57.700 57.800 57.900 58.000 58.100 58.200 58.300 58.400 58.500 58.600 58.700 58.800 58.900 59.000 59.100 59.200 59.300 59.400 59.500 59.600 59.700 59.800 59.900 60.000 60.100 60.200 60.300 60.400 60.500 60.600 60.700 60.800 60.900 61.000 61.100 61.200 61.300 61.400 61.500 61.600 61.700 61.800 61.900 62.000 62.100 62.200 62.300 62.400 62.500 62.600 62.700 62.800 62.900 63.000 63.100 63.200 63.300 63.400 63.500 63.600 63.700 63.800 63.900 64.000 64.100 64.200 64.300 64.400 64.500 64.600 64.700 64.800 64.900 65.000 65.100 65.200 65.300 65.400 65.500 65.600 65.700 65.800 65.900 66.000 66.100 66.200 66.300 66.400 66.500 66.600 66.700 66.800 66.900 67.000 67.100 67.200 67.300 67.400 67.500 67.600 67.700 67.800 67.900 68.000 68.100 68.200 68.300 68.400 68.500 68.600 68.700 68.800 68.900 69.000 69.100 69.200 69.300 69.400 69.500 69.600 69.700 69.800 69.900 70.000 70.100 70.200 70.300 70.400 70.500 70.600 70.700 70.800 70.900 71.000 71.100 71.200 71.300 71.400 71.500 71.600 71.700 71.800 71.900 72.000 72.100 72.200 72.300 72.400 72.500 72.600 72.700 72.800 72.900 73.000 73.100 73.200 73.300 73.400 73.500 73.600 73.700 73.800 73.900 74.000 74.100 74.200 74.300 74.400 74.500 74.600 74.700 74.800 74.900 75.000 75.100 75.200 75.300 75.400 75.500 75.600 75.700 75.800 75.900 76.000 76.100 76.200 76.300 76.400 76.500 76.600 76.700 76.800 76.900 77.000 77.100 77.200 77.300 77.400 77.500 77.600 77.700 77.800 77.900 78.000 78.100 78.200 78.300 78.400 78.500 78.600 78.700 78.800 78.900 79.000 79.100 79.200 79.300 79.400 79.500 79.600 79.700 79.800 79.900 80.000 80.100 80.200 80.300 80.400 80.500 80.600 80.700 80.800 80.900 81.000 81.100 81.200 81.300 81.400 81.500 81.600 81.700 81.800 81.900 82.000 82.100 82.200 82.300 82.400 82.500 82.600 82.700 82.800 82.900 83.000 83.100 83.200 83.300 83.400 83.500 83.600 83.700 83.800 83.900 84.000 84.100 84.200 84.300 84.400 84.500 84.600 84.700 84.800 84.900 85.000 85.100 85.200 85.300 85.400 85.500 85.600 85.700 85.800 85.900 86.000 86.100 86.200 86.300 86.400 86.500 86.600 86.700 86.800 86.900 87.000 87.100 87.200 87.300 87.400 87.500 87.600 87.700 87.800 87.900 88.000 88.100 88.200 88.300 88.400 88.500 88.600 88.700 88.800 88.900 89.000 89.100 89.200 89.300 89.400 89.500 89.600 89.700 89.800 89.900 90.000 90.100 90.200 90.300 90.400 90.500 90.600 90.700 90.800 90.900 91.000 91.100 91.200 91.300 91.400 91.500 91.600 91.700 91.800 91.900 92.000 92.100 92.200 92.300 92.400 92.500 92.600 92.700 92.800 92.900 93.000 93.100 93.200 93.300 93.400 93.500 93.600 93.700 93.800 93.900 94.000 94.100 94.200 94.300 94.400 94.500 94.600 94.700 94.800 94.900 95.000 95.100 95.200 95.300 95.400 95.500 95.600 95.700 95.800 95.900 96.000 96.100 96.200 96.300 96.400 96.500 96.600 96.700 96.800 96.900 97.000 97.100 97.200 97.300 97.400 97.500 97.600 97.700 97.800 97.900 98.000 98.100 98.200 98.300 98.400 98.500 98.600 98.700 98.800 98.900 99.000 99.100 99.200 99.300 99.400 99.500 99.600 99.700 99.800 99.900 100.000 100.100 100.200 100.300 100.400 100.500 100.600 100.700 100.800 100.900 101.000 101.100 101.200 101.300 101.400 101.500 101.600 101.700 101.800 101.900 102.000 102.100 102.200 102.300 102.400 102.500 102.600 102.700 102.800 102.900 103.000 103.100 103.200 103.300 103.400 103.500 103.600 103.700 103.800 103.900 104.000 104.100 104.200 104.300 104.400 104.500 104.600 104.700 104.800 104.900 105.000 105.100 105.200 105.300 105.400 105.500 105.600 105.700 105.800 105.900 106.000 106.100 106.200 106.300 106.400 106.500 106.600 106.700 106.800 106.900 107.000 107.100 107.200 107.300 107.400 107.500 107.600 107.700 107.800 107.900 108.000 108.100 108.200 108.300 108.400 108.500 108.600 108.700 108.800 108.900 109.000 109.100 109.200 109.300 109.400 109.500 109		

CH78
Hopping mode

