

FCC TEST REPORT

Client Information:

Applicant: Shenzhen Uniwisdom Technologies Co., Ltd.
Applicant add.: Bldg 91 101 (Bldg.91-94) 2nd Industrial Zone, Lisonglang, Gongming Street, GuangMing District, Shenzhen, China
Manufacturer: Shenzhen Uniwisdom Technologies Co., Ltd.
Manufacturer add.: Bldg 91 101 (Bldg.91-94) 2nd Industrial Zone, Lisonglang, Gongming Street, GuangMing District, Shenzhen, China

Product Information:

Product Name: Mixing console
Model No.: LV12
Serial Model: N/A
Brand Name: HARBINGER
FCC ID: ZTJ-LV12

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Prepared By:

Dongguan Yaxu (AiT) Technology Limited

No.22, Jinqianling Third Street, Jitigang, Huangjiang, Dongguan,
Guangdong, China

Tel.: +86-769-8202 0499 Fax.: +86-769-8202 0495

Date of Receipt: May 06, 2021

Date of Test: May 06, 2021 ~Aug. 27, 2021

Date of Issue: Aug. 31, 2021

Test Result: Pass

This device described above has been tested by Dongguan Yaxu (AiT) Technology Limited and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

Note: This report shall not be reproduced except in full, without the written approval of Dongguan Yaxu (AiT) Technology Limited, this document may be altered or revised by Dongguan Yaxu (AiT) Technology Limited, personal only, and shall be noted in the revision of the document. This test report must not be used by the client to claim product endorsement.

Reviewed by:


Simba Huang

Approved by:


Seal.chen

1 Contents

	Page
COVER PAGE	
1 CONTENTS	2
2 TEST SUMMARY.....	4
2.1 Statement of the Measurement Uncertainty	4
2.2 Measurement Uncertainty.....	4
3 TEST FACILITY	5
3.1 Deviation from standard	5
3.2 Abnormalities from standard conditions	5
3.3 Environmental conditions.....	5
3.4 Test Location.....	5
4 GENERAL INFORMATION.....	6
4.1 Test frequencies.....	7
4.2 Description of Test setup.....	9
4.3 EUT Peripheral List.....	9
4.4 Test Peripheral List	9
5 EQUIPMENT USED DURING TEST.....	10
6 TEST RESULTS AND MEASUREMENT DATA.....	12
6.1 Antenna requirement	12
6.2 Conducted Emissions	13
6.3 Conducted Peak Output Power	16
6.4 20dB Emission Bandwidth	20
6.5 Carrier Frequencies Separation	23
6.6 Hopping Channel Number	26
6.7 Dwell Time	28
6.8 Band Edge	32
6.8.1 Conducted Emission Method	32
6.8.2 Radiated Emission Method.....	35
6.9 Spurious Emission	38
6.9.1 Conducted Emission Method	38
6.9.2 Radiated Emission Method.....	41
7 TEST SETUP PHOTO.....	49
8 EUT CONSTRUCTIONAL DETAILS.....	49

Revision History

Revision	Issue Date	Revisions	Revised By
000	Aug. 31, 2021	Initial Issue	Seal Chen

2 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)(iii)	Pass
Dwell Time	15.247 (a)(1)(iii)	Pass
Radiated Emission and Restrict Bands	15.205/15.209	Pass
Conducted Unwanted emissions and Band Edge	15.247(d)	Pass

Note The measurement uncertainty is not included in the test result.

2.1 Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the AIT quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

2.2 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	0.009MHz-30MHz	3.10dB	(1)
Radiated Emission	30MHz-1GHz	3.75dB	(1)
Radiated Emission	1GHz-18GHz	3.88dB	(1)
Radiated Emission	18GHz-40GHz	3.88dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	1.20dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

3 Test Facility

The test facility is recognized, certified or accredited by the following organizations:

CNAS- Registration No: L6177

FCC Designation Number:CN1313

Test Firm Registration Number:703111

Dongguan Yaxu (AiT) technology Limited is accredited to ISO/IEC 17025:2017 general Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the competence of testing and calibration laboratories) on Aug.04, 2020

3.1 Deviation from standard

None

3.2 Abnormalities from standard conditions

None

3.3 Environmental conditions

RF Conducted Testing:	
Temperature:	24.6℃
Humidity:	52.4%
Atmospheric pressure:	101kPa
Test by:	Simba Huang

3.4 Test Location

Dongguan Yaxu (AiT) Technology Limited

Address: No.22, Jinqianling 3rd Street, Jitigang, Huangjiang,Dongguan, Guangdong, China

Tel.: +86-769-8202 0499

Fax.: +86-769-8202 0495

4 General Information

EUT Name:	Mixing console
Model No:	LV12
Serial Model:	N/A
Brand Name:	HARBINGER
Test sample(s) ID:	21050607-1
Sample(s) Status:	Engineer sample
Serial No.:	N/A
Operation frequency:	2402MHz~2480MHz
Channel Number:	79
Modulation Type:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Modulation Technology:	FHSS
Antenna Type:	PCB Antenna
Antenna Gain:	0dBi
H/W No.:	N/A
S/W No.:	N/A
Power supply:	DC $\pm 15V$ from adapter (MODEL: QXA15-1515 V1.0; INPUT: AC 100-240V, 50/60Hz 0.5A; OUTPUT: DC $\pm 15V$, 500mA)
Battery:	N/A
Model different:	N/A
Note:	For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

4.1 Test frequencies

EUT channels and frequencies list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454	--	--
26	2428	53	2455	--	--

Note:


In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Transmitting mode	Keep the EUT in continuously transmitting mode.		
Test software:	BK3266_Test setup		
Frequency	2402 MHz	2441 MHz	2480 MHz
Parameters(1Mbps)	Default	Default	Default
Parameters(2Mbps)	Default	Default	Default
Parameters(3Mbps)	Default	Default	Default

Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.

4.2 Description of Test setup

EUT was tested in normal configuration (Please See following Block diagrams)

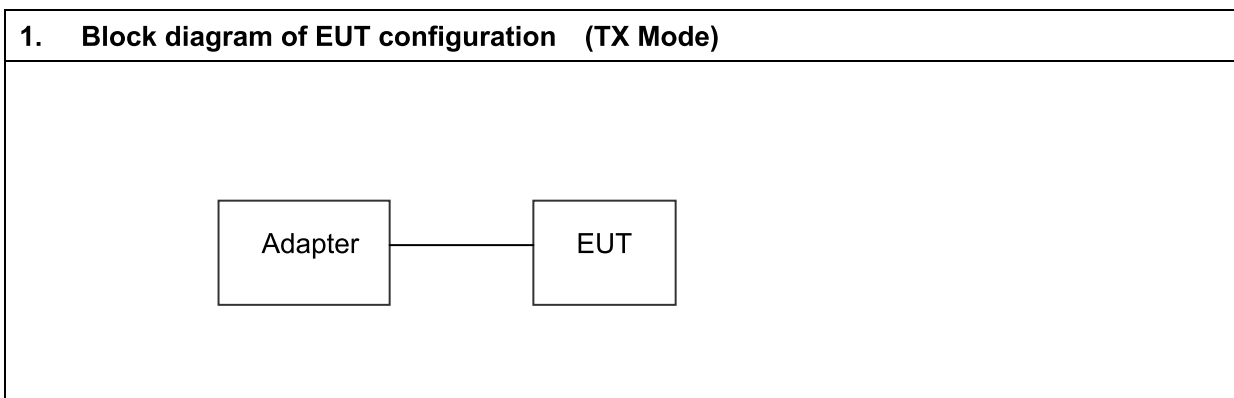

4.3 EUT Peripheral List

No.	Equipment	Manufacturer	EMC Compliance	Model No.	Serial No.	Power cord	Signal cord
1	Adapter	N/A	N/A	QXA15-1 515 V1.0	N/A	N/A	N/A

4.4 Test Peripheral List

No.	Equipment	Manufacturer	EMC Compliance	Model No.	Serial No.	Power cord	Signal cord
1	N/A	N/A	N/A	N/A	N/A	N/A	N/A

5 Equipment Used during Test

No	Test Equipment	Manufacturer	Model No	Serial No	Cal. Date	Cal. Due Date
1	Spectrum Analyzer	R&S	FSV40	101470	2020.08.28	2021.08.27
2	EMI Measuring Receiver	R&S	ESR	101160	2020.08.28	2021.08.27
3	Low Noise Pre Amplifier	HP	HP8447E	1937A01855	2020.08.28	2021.08.27
4	Low Noise Pre Amplifier	Tsj	MLA-0120-A02-34	2648A04738	2020.08.28	2021.08.27
5	Passive Loop	ETS	6512	00165355	2020.09.05	2022.09.04
6	TRILOG Super Broadband test Antenna	SCHWARZBECK	VULB9160	9160-3206	2020.07.25	2023.07.24
7	Broadband Horn Antenna	SCHWARZBECK	BBHA9120D	452	2020.07.25	2023.07.24
8	SHF-EHF Horn Antenna 15-40GHz	SCHWARZBECK	BBHA9170	BBHA9170367d	2020.07.25	2023.07.24
9	EMI Test Receiver	R&S	ESCI	100124	2020.08.28	2021.08.27
10	LISN	Kyoritsu	KNW-242	8-837-4	2020.08.28	2021.08.27
11	LISN	R&S	ESH3-Z2	0357.8810.54-101161-S2	2020.08.28	2021.08.27
12	Pro.Temp&Humi.chamber	MENTEK	MHP-150-1C	MAA08112501	2020.08.28	2021.08.27
13	RF Automatic Test system	MW	MW100-RFCB	21033016	2020.08.28	2021.08.27
14	Signal Generator	Agilent	N5182A	MY50143009	2020.08.28	2021.08.27
15	Wideband Radio communication tester	R&S	CMW500	1201.0002K50	2020.08.28	2021.08.27
16	RF Automatic Test system	MW	MW100-RFCB	21033016	2020.08.28	2021.08.27
17	DC power supply	ZHAOXIN	RXN-305D-2	28070002559	N/A	N/A
18	RE Software	EZ	EZ-EMC_RE	Ver.AIT-03A	N/A	N/A
19	CE Software	EZ	EZ-EMC_CE	Ver.AIT-03A	N/A	N/A
20	RF Software	MW	MTS 8310	2.0.0.0	N/A	N/A
21	temporary antenna connector(Note)	NTS	R001	N/A	N/A	N/A

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

No	Test Equipment	Manufacturer	Model No	Serial No	Cal. Date	Cal. Due Date
1	Spectrum Analyzer	R&S	FSV40	101470	2021.08.27	2022.08.26
2	EMI Measuring Receiver	R&S	ESR	101160	2021.08.27	2022.08.26
3	Low Noise Pre Amplifier	HP	HP8447E	1937A01855	2021.08.27	2022.08.26
4	Low Noise Pre Amplifier	Tsj	MLA-0120-A02-34	2648A04738	2021.08.27	2022.08.26
5	Passive Loop	ETS	6512	00165355	2020.09.05	2022.09.04
6	TRILOG Super Broadband test Antenna	SCHWARZBECK	VULB9160	9160-3206	2020.07.25	2023.07.24
7	Broadband Horn Antenna	SCHWARZBECK	BBHA9120D	452	2020.07.25	2023.07.24
8	SHF-EHF Horn Antenna 15-40GHz	SCHWARZBECK	BBHA9170	BBHA9170367d	2020.07.25	2023.07.24
9	EMI Test Receiver	R&S	ESCI	100124	2021.08.27	2022.08.26
10	LISN	Kyoritsu	KNW-242	8-837-4	2021.08.27	2022.08.26
11	LISN	R&S	ESH3-Z2	0357.8810.54-101161-S2	2021.08.27	2022.08.26
12	Pro.Temp&Humi.chamber	MENTEK	MHP-150-1C	MAA08112501	2021.08.27	2022.08.26
13	RF Automatic Test system	MW	MW100-RFCB	21033016	2021.08.27	2022.08.26
14	Signal Generator	Agilent	N5182A	MY50143009	2021.08.27	2022.08.26
15	Wideband Radio communication tester	R&S	CMW500	1201.0002K50	2021.08.27	2022.08.26
16	RF Automatic Test system	MW	MW100-RFCB	21033016	2021.08.27	2022.08.26
17	DC power supply	ZHAOXIN	RXN-305D-2	28070002559	N/A	N/A
18	RE Software	EZ	EZ-EMC_RE	Ver.AIT-03A	N/A	N/A
19	CE Software	EZ	EZ-EMC_CE	Ver.AIT-03A	N/A	N/A
20	RF Software	MW	MTS 8310	2.0.0.0	N/A	N/A
21	temporary antenna connector(Note)	NTS	R001	N/A	N/A	N/A


Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

6 Test results and Measurement Data

6.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
E.U.T Antenna:	
<i>The antenna is PCB antenna, the best case gain of the is 0dBi, reference to the appendix II for details</i>	

6.2 Conducted Emissions

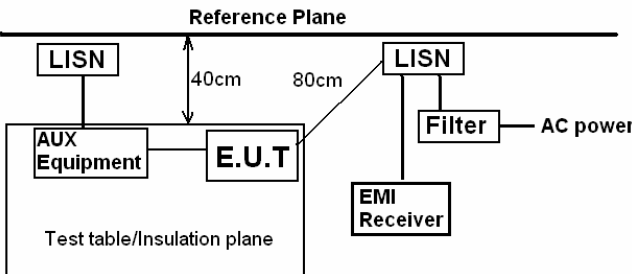
Test Requirement:	FCC Part15 C Section 15.207					
Test Method:	ANSI C63.10:2013					
Test Frequency Range:	150KHz to 30MHz					
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto					
Limit:	Frequency range (MHz)		Limit (dBuV)			
			Quasi-peak		Average	
	0.15-0.5		66 to 56*		56 to 46*	
	0.5-5		56		46	
	5-30		60		50	
	* Decreases with the logarithm of the frequency.					
Test setup:	Reference Plane  Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m					
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.					
Test Instruments:	Refer to section 5.0 for details					
Test mode:	Refer to section 4.1 for details					
Test environment:	Temp.:	24.6 °C	Humid.:	52.4%	Press.:	101mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Remark: Both high and low voltages have been tested to show only the worst low voltage test data.

Measurement data:

Pre-scan all test modes, found worst case at GFSK 2480MHz, and so only show the test result of GFSK 2480MHz

Model name:	LV12	Test Date :	2021-08-26
Temperature:	24.6° C	Relative Humidity:	52.4%
ATM Pressure:	101 kPa	Test by:	Simba Huang
Phase :	Line	Test Result:	☒ Pass ☐ Fail

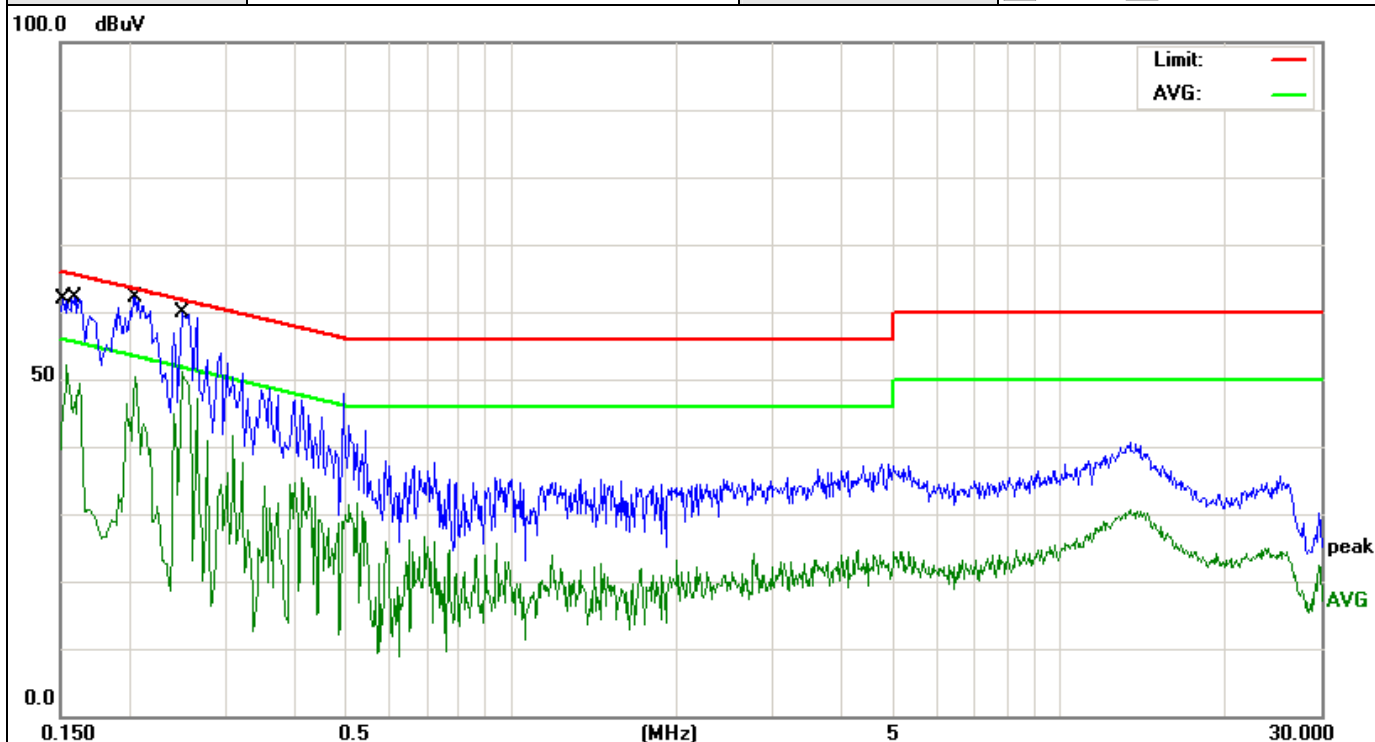


Remark: Factor = Antenna Factor + Cable Loss +Pluse limiter.

Measurement Result=Reading Level +Correct Factor;

Over Limit= Measurement Result- Limit;

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1539	48.67	3.49	52.16	55.78	-3.62	AVG
2		0.1590	59.34	2.81	62.15	65.51	-3.36	QP
3		0.2038	58.20	2.07	60.27	63.45	-3.18	QP
4	*	0.2058	48.20	2.06	50.26	53.37	-3.11	AVG
5		0.2500	56.70	1.86	58.56	61.75	-3.19	QP
6		0.2500	46.60	1.86	48.46	51.75	-3.29	AVG

Model name:	LV12	Test Date :	2021-08-26
Temperature:	24.6° C	Relative Humidity:	52.4%
ATM Pressure:	101 kPa	Test by:	Simba Huang
Phase :	Neutral	Test Result:	☒ Pass ☐ Fail

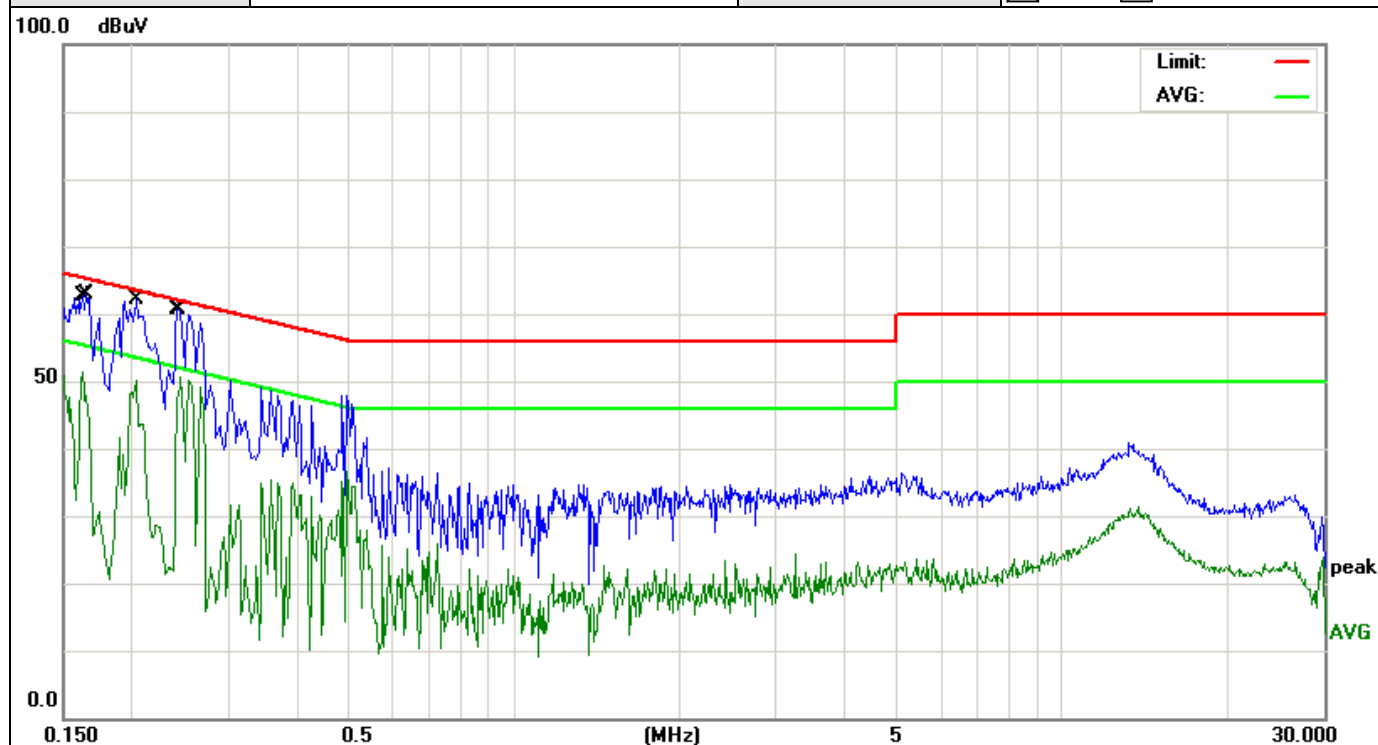

Remark: Factor = Antenna Factor + Cable Loss +Pluse limiter.

Measurement Result=Reading Level +Correct Factor;


Over Limit= Measurement Result- Limit;

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1621	48.79	2.64	51.43	55.35	-3.92	AVG
2	*	0.1650	59.50	2.59	62.09	65.20	-3.11	QP
3		0.2038	58.20	2.07	60.27	63.45	-3.18	QP
4		0.2038	48.03	2.07	50.10	53.45	-3.35	AVG
5		0.2419	56.90	1.88	58.78	62.03	-3.25	QP
6		0.2459	46.90	1.87	48.77	51.89	-3.12	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.

6.3 Conducted Peak Output Power

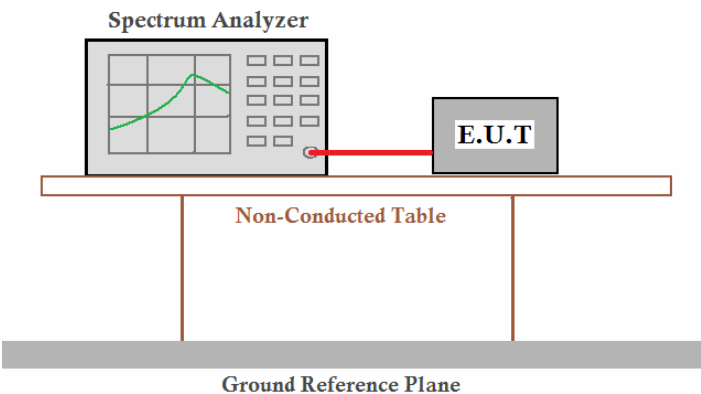
Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Limit:	30dBm(for GFSK),20.97dBm(for EDR)
Test setup:	
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 4.1 for details
Test results:	Pass

Measurement Data


Mode	Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
GFSK	Lowest	4.83	30.00	Pass
	Middle	4.88		
	Highest	4.75		
$\pi/4$ -DQPSK	Lowest	0.39	20.97	Pass
	Middle	0.97		
	Highest	1.17		
8-DPSK	Lowest	2.1	20.97	Pass
	Middle	1.86		
	Highest	2.27		

Test plot as follows:


Test mode:	GFSK mode
------------	-----------

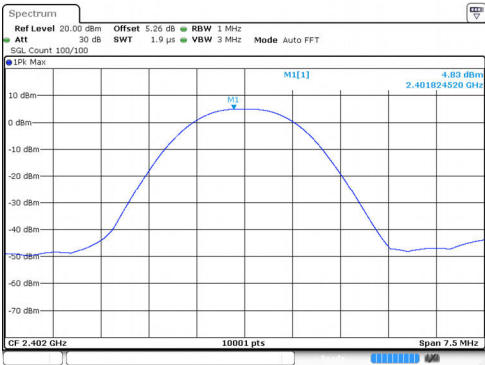

Lowest channel

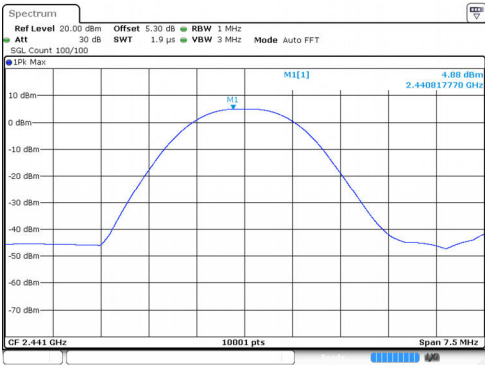


Middle channel

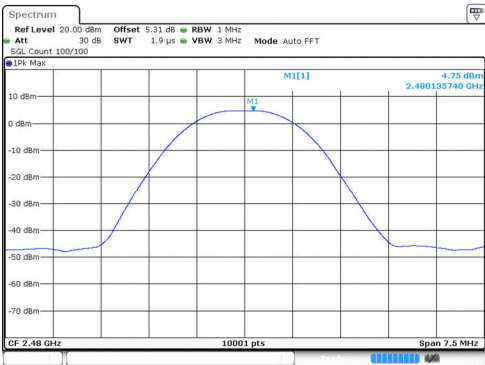


Highest channel


Test mode:	$\pi/4$ -DQPSK mode
------------	---------------------

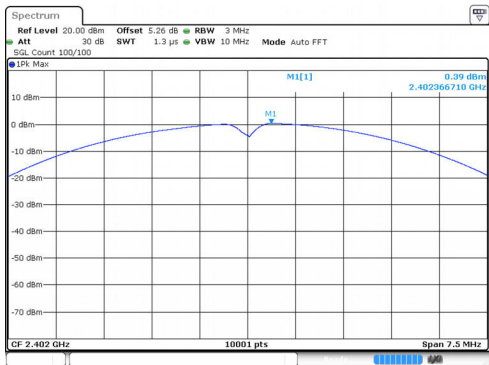

Lowest channel

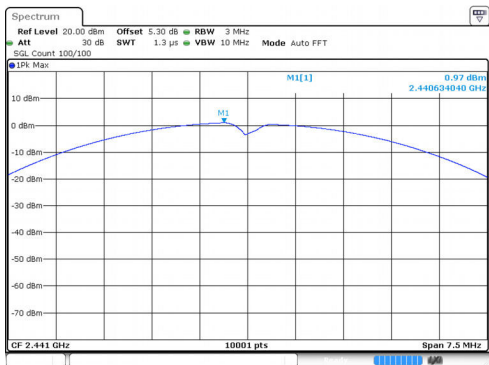


Middle channel

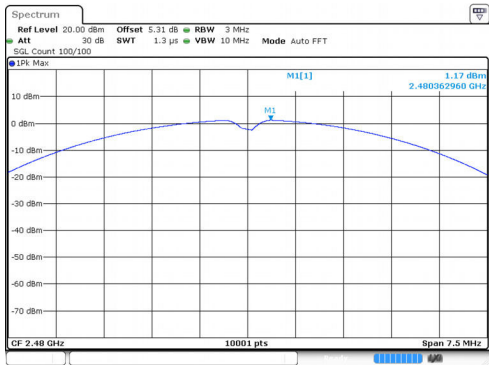


Highest channel


Test mode:	8-DPSK mode
------------	-------------

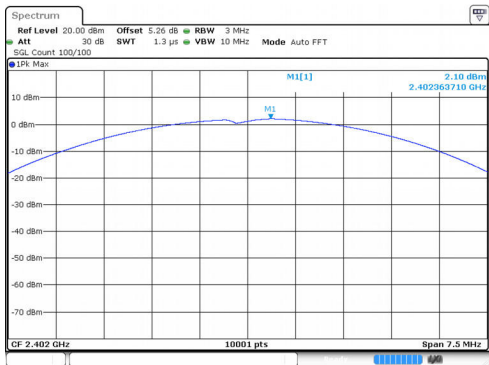

Lowest channel

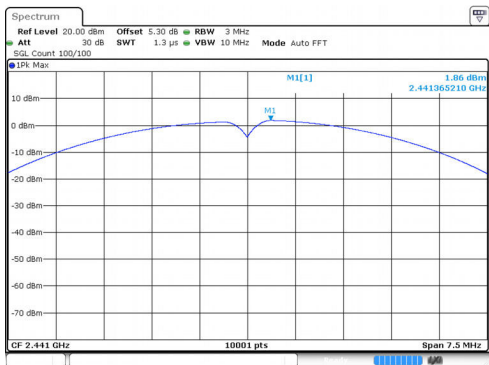


Middle channel

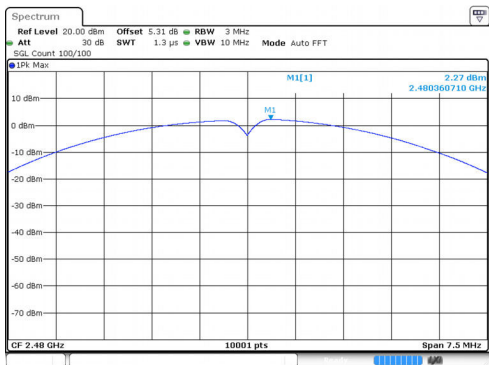

Highest channel

6.4 20dB Emission Bandwidth

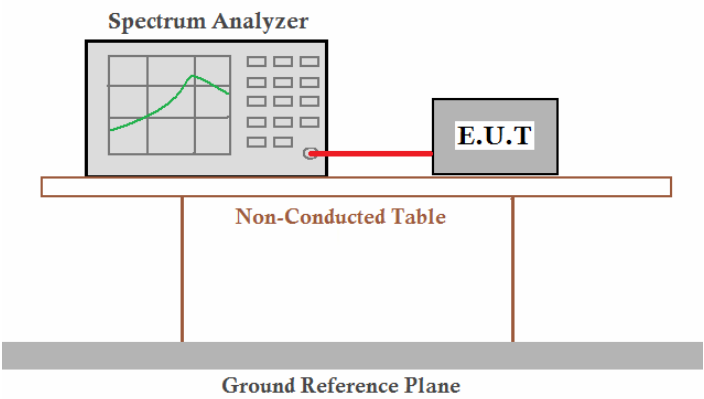Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Limit:	N/A
Test setup:	
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 4.1 for details
Test results:	Pass

Measurement Data


Mode	Test channel	20dB Emission Bandwidth (MHz)	Result
GFSK	Lowest	0.884	Pass
	Middle	0.891	
	Highest	0.929	
8-DPSK	Lowest	1.396	Pass
	Middle	1.415	
	Highest	1.412	

Note:


- During the test, pre-scan the GFSK, $\pi/4$ -DQPSK, 8-DPSK modulation, found the GFSK& 8-DPSK modulation which it is worse case, and show in this report.

Test plot as follows:


Test mode:	GFSK mode
------------	-----------

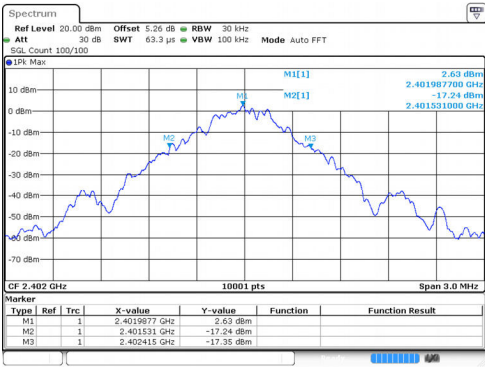

Lowest channel

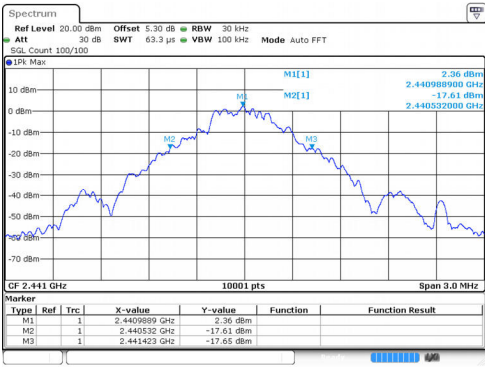


Middle channel

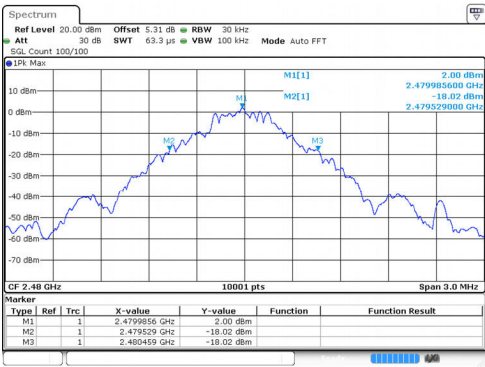


Highest channel

Test mode:


8-DPSK mode

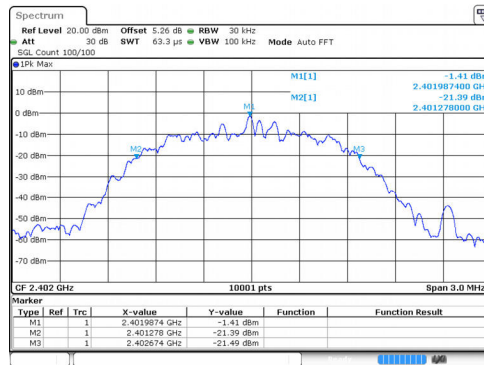

Lowest channel

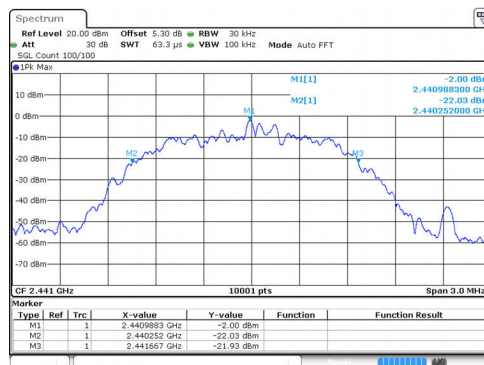


Middle channel

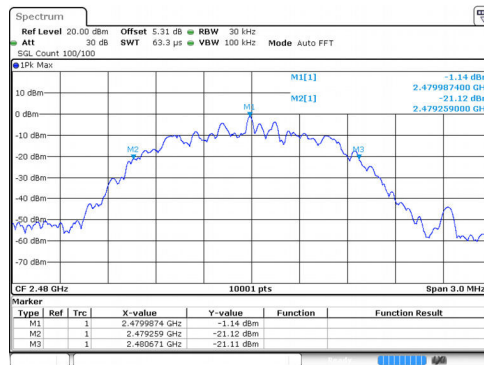

Highest channel

6.5 Carrier Frequencies Separation

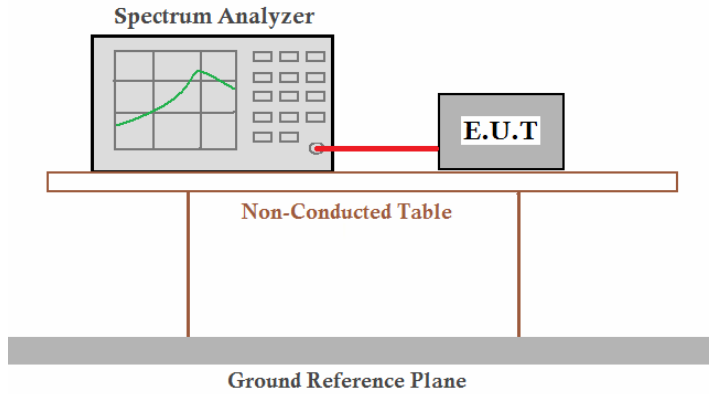Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100KHz, VBW=300KHz, detector=Peak
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Test setup:	
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 4.1 for details
Test results:	Pass

Measurement Data


Mode	Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
GFSK	Lowest	1.029	589.3333	Pass
	Middle	1.001	594	Pass
	Highest	1.029	619.3333	Pass
8-DPSK	Lowest	0.953	945.3333	Pass
	Middle	1.098	918	Pass
	Highest	1.065	952	Pass

Note:


- According to section 7.4
- During the test, pre-scan the GFSK, $\pi/4$ -DQPSK, 8-DPSK modulation, found the GFSK & 8-DPSK modulation which it is worse case, and show in this report.
 -

Test plot as follows:


Modulation mode:	GFSK
------------------	------

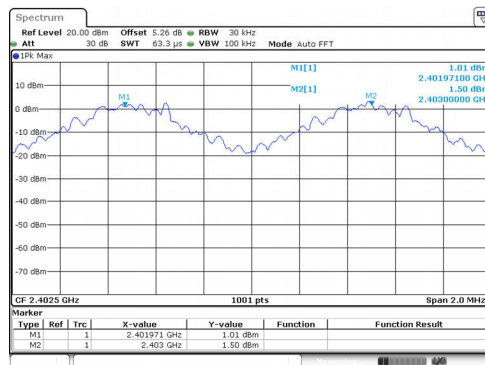

Lowest channel

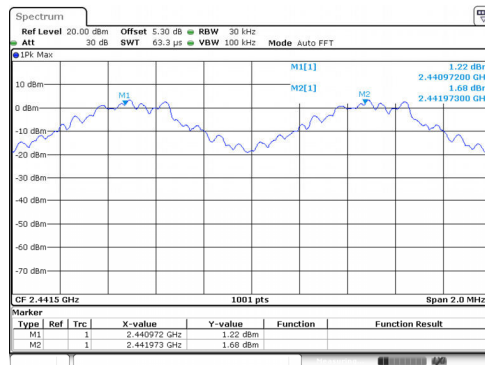


Middle channel

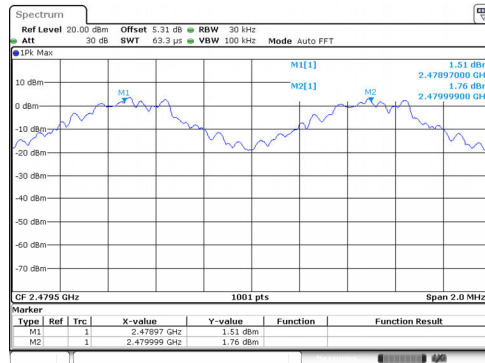


Highest channel


Test mode:	8-DPSK
------------	--------

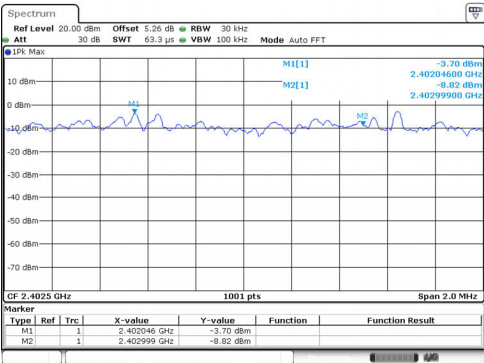

Lowest channel

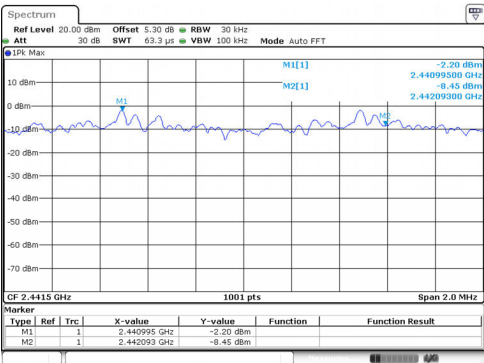

Middle channel

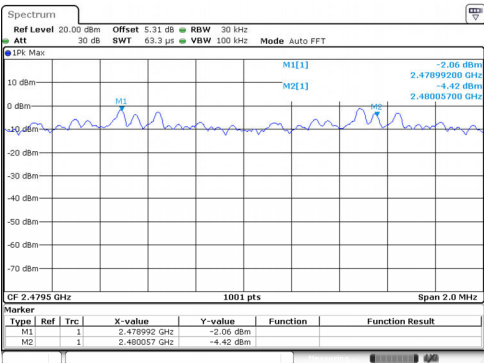

Highest channel