


11.4. Test result

Test Engineer:	NA	Test Site:	RF Test System 5#
Ambient Condition:	24.3-27.2°C,39.2-44.2%RH	Test Date:	2026.4.8
Test Power Supply:	DC 5V from PC	Sample Number:	DDT-Q26030329



Test Mode	Antenna	Frequency [MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
Lora Hybrid SF7	Ant1	Hop	108.85	3	0.762	≤0.4	PASS
Lora Hybrid SF9	Ant1	Hop	357.547	1	0.358	≤0.4	PASS
Lora Hybrid SF10	Ant1	Hop	329.942	1	0.330	≤0.4	PASS

11.5. Test graphs



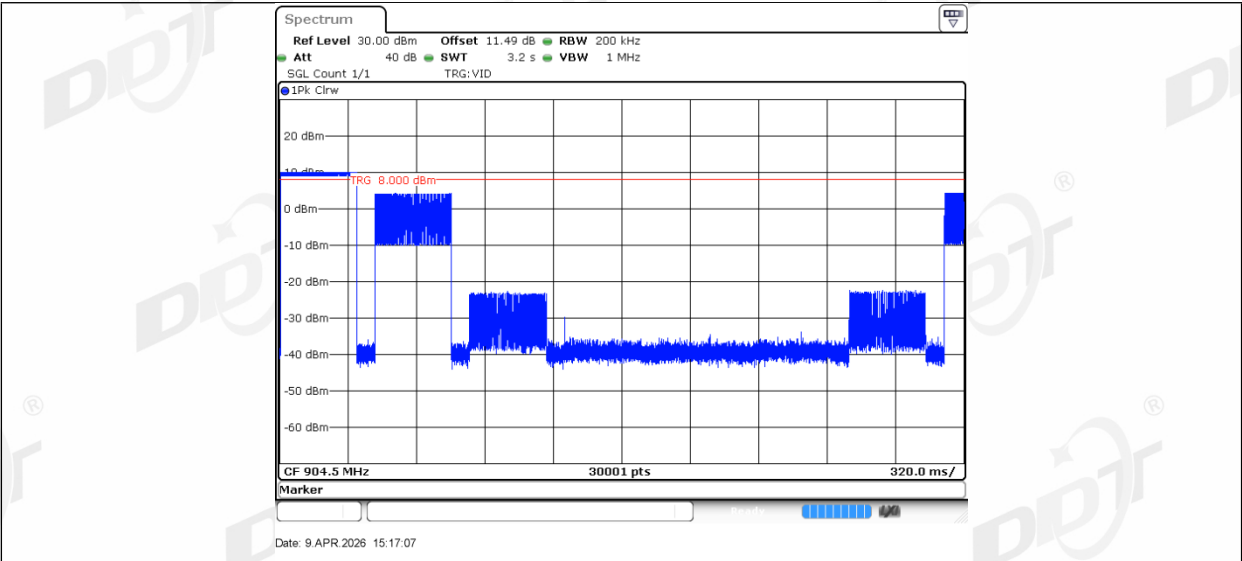

Lora Hybrid SF10_Hop

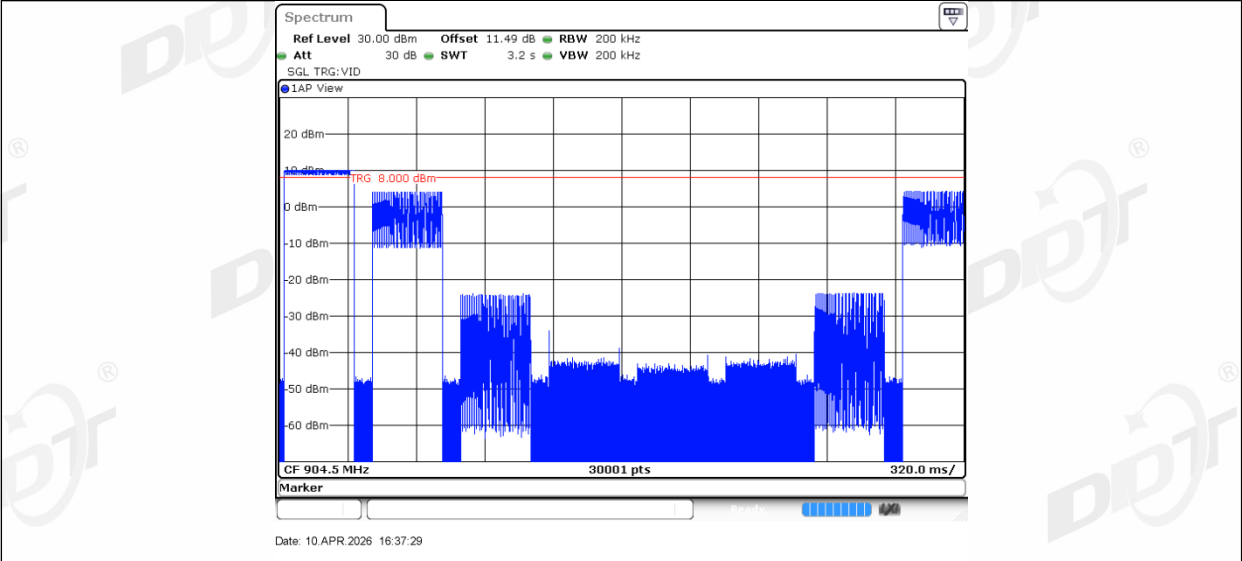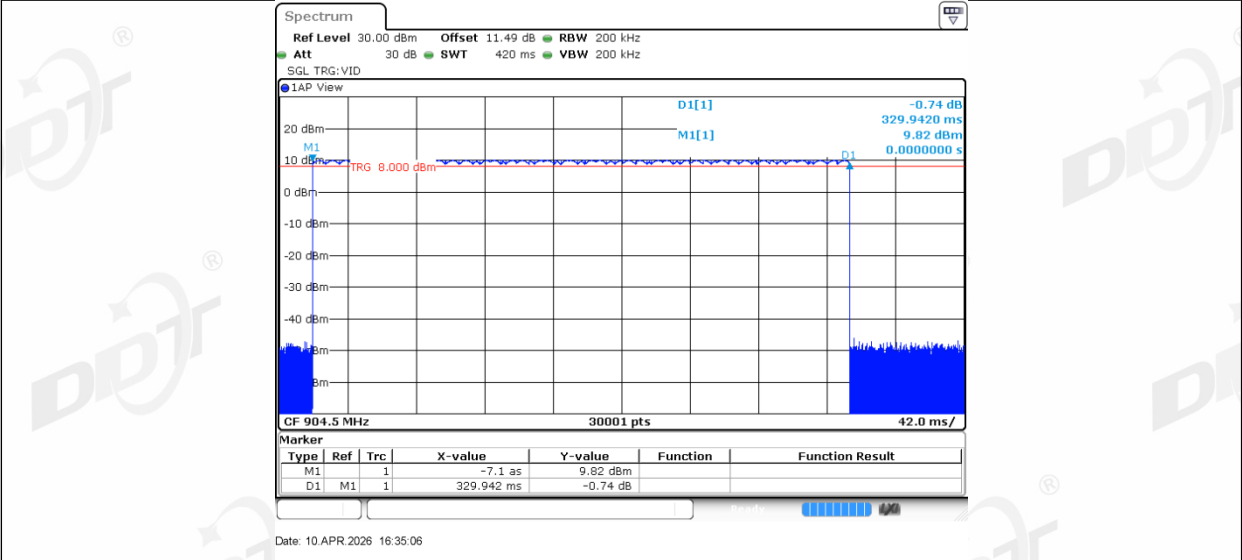



12. Radiated Emission

12.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2027/02/27
RF cable	Zhongke Junchuang	Z805UF-NJ-NJ-10M	DDT-ZC05591	2026/10/10
RF cable	Zhongke Junchuang	Z805UF-NJ-NJ-3M	DDT-ZC05590	2026/10/10
RF cable	Zhongke Junchuang	JCTB510-NJW-NJW-0.6M	DDT-ZC04595	2026/10/10
RF cable	Zhongke Junchuang	JCT40P-2.92J-2.92J-1M	DDT-ZC03802	2026/10/10
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2026/10/10
RF cable	Zhongke Junchuang	JCT40P-2.92J-2.92J-5M	DDT-ZC03800	2026/10/10
Radiation disturbance fully automated test software	Tonscend	JS32-RE	DDT-ZC02739	/
Pre-amplifier	SONOMA	310N	DDT-ZC01969	2026/07/06
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2027/03/05
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2026/08/10
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2027/02/27
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2027/02/27
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2027/02/27
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2027/03/04
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2026/07/25
Hochgewinn-Hornantenne	SCHWARZBEC K	BBHA 9120 D	DDT-ZC02129	2026/08/11
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2026/08/18
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2027/02/27
Band Reject Filter Group	Tonscend	JS0806-F	DDT-ZC05733	/
Hochgewinn-Hornantenne	SCHWARZBEC K	BBHA 9120 D	DDT-ZC05922	2027/01/06
Broadband Preamplifier	HPX	BP-01G-18G	DDT-ZC05923	2027/01/06
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2027/03/05
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2027/03/04
Signal & Spectrum analyzer	R&S	FSV40-N	DDT-ZC04979	2026/07/04
SPECTRUM ANALYZER	R&S	FSU26	DDT-ZC00236	2026/07/06

12.2. Block diagram of test setup

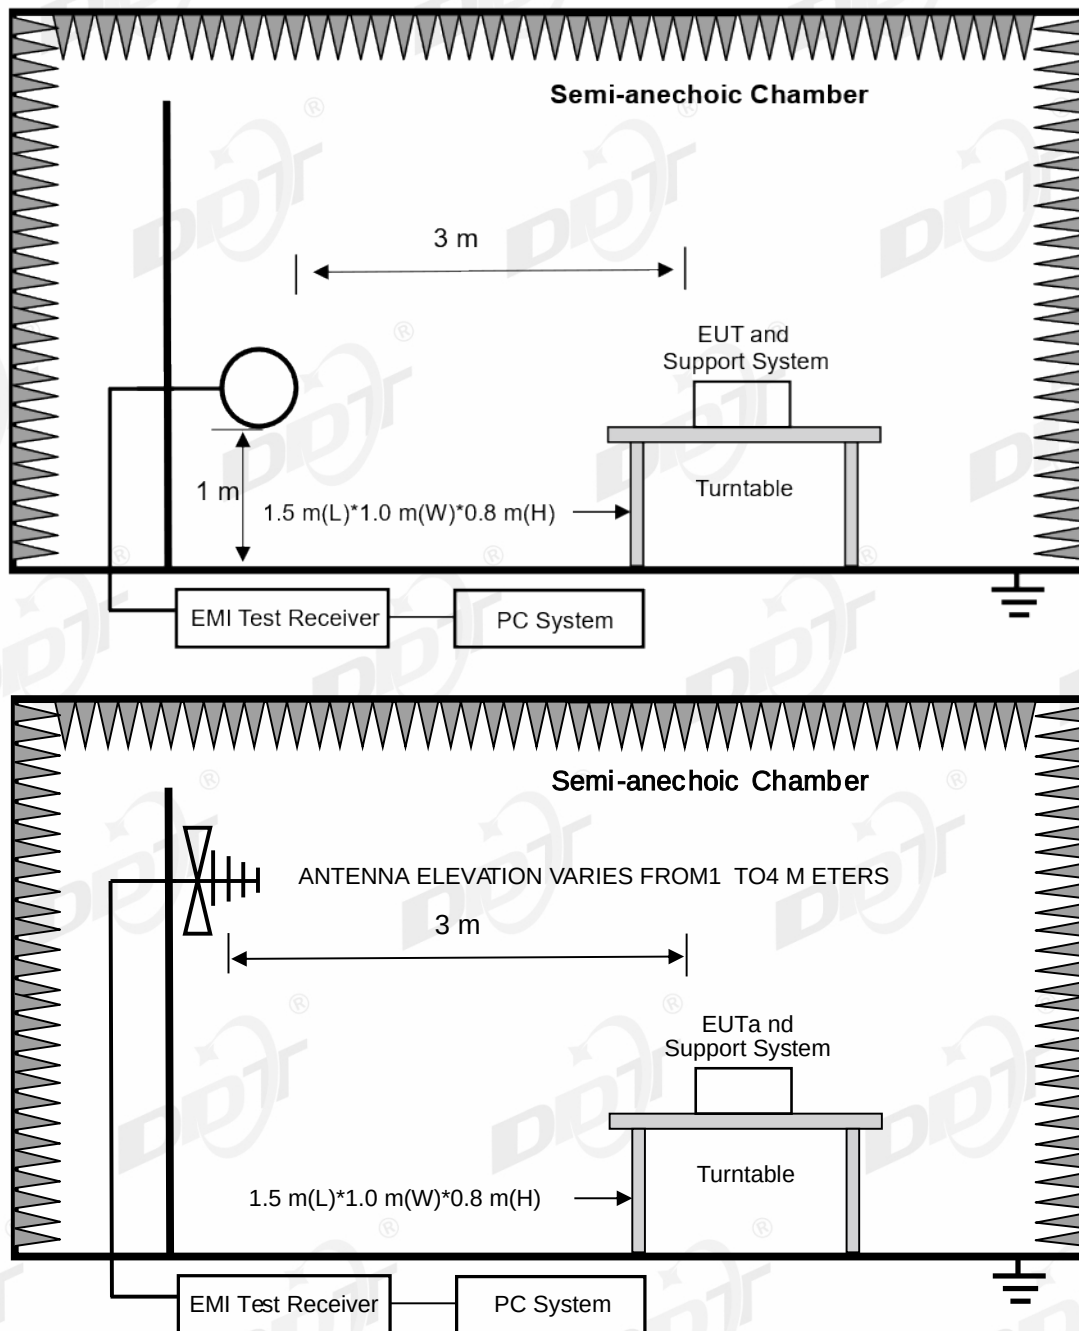

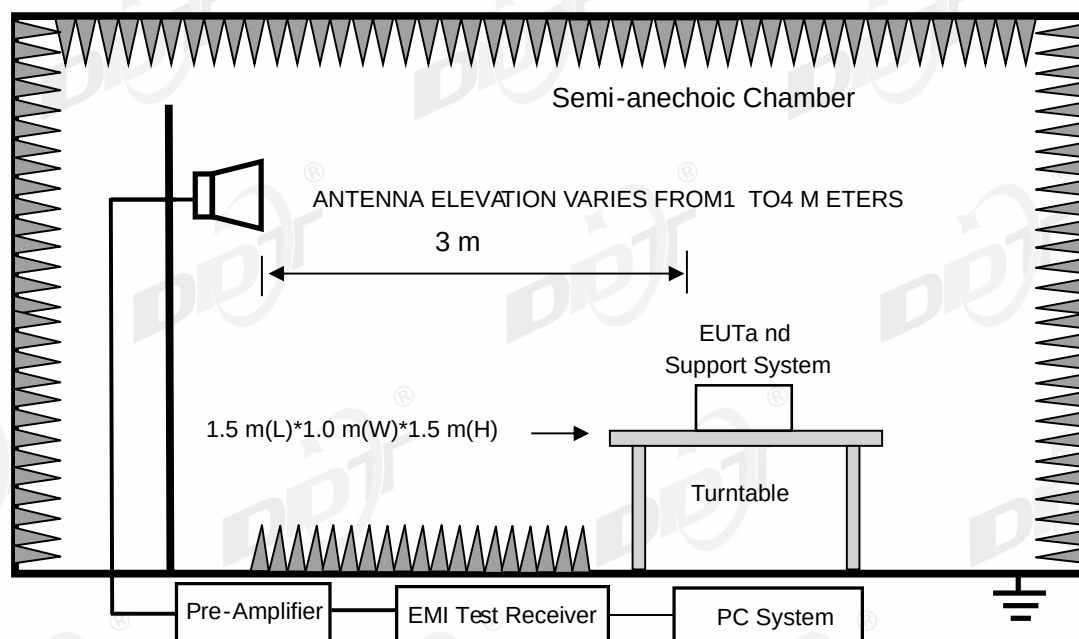

12.3. Limits

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

²Above 38.6

RSS-Gen section 8.10 Restricted frequency bands*

MHz	MHz	MHz	GHz
0.090-0.110	12.51975-12.52025	240-285	3.5-4.4
0.495-0.505	12.57675-12.57725	322-335.4	4.5-5.15
2.1735-2.1905	13.36-13.41	399.9-410	5.35-5.46
3.020-3.026	16.42-16.423	608-614	7.25-7.75
4.125-4.128	16.69475-16.69525	960-1427	8.025-8.5
4.1772&4.17775	16.80425-16.80475	1435-1626.5	9.0-9.2
4.2072&4.20775	25.5-25.67	1645.5-1646.5	9.3-9.5
5.677-5.683	37.5-38.25	1660-1710	10.6-12.7
6.215-6.218	73-74.6	1718.8-1722.2	13.25-13.4
6.26775-6.26825	74.8-75.2	2200-2300	14.47-14.5
6.31175-6.31225	108-138	2310-2390	15.35-16.2
8.291-8.294	149.9-150.05	2483.5-2500	17.7-21.4
8.362-8.366	156.52475-156.52525	2655-2900	22.01-23.12
8.37625-8.38675	156.7-156.9	3260-3267	23.6-24.0
8.41425-8.41475	162.0125-167.17	3332-3339	31.2-31.8
12.29-12.293	167.72-173.2	3345.8-3358	36.43-36.5
			Above 38.6

* Certain frequency bands listed in table and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

(2) FCC 15.209 Limit & RSS-Gen section 8.9 Limit

FREQUENCY	DISTANCE	FIELD STRENGTHS LIMIT	
MHz	Meters	uV/m	dBuV/m
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30~88	3	100	40.0
88~216	3	150	43.5
216~960	3	200	46.0
960~1000	3	500	54.0
Above 1000	3	74.0 dBuV/m(Peak)	
		54.0 dBuV/m(Average)	

Note:

(1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3m}(\text{dBuV/m}) = \text{Limit}_{30m}(\text{dBuV/m}) + 40\log(30m/3m)$$

(3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, and the emissions appearing within RSS-Gen section 8.10 Restricted frequency bands shall not exceed the limits shown in RSS-Gen section 8.9, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits and RSS-Gen section 8.9 limits.

12.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

12.5. Test procedure

(1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.

(2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna(1 GHz-18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna(18 GHz-40 GHz)	1 m

According ANSI C63.10 clause 6.4.6 and 6.5.3, for measurements below 30 MHz, Antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1 m above the ground. For measurement above 30MHz, the trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10 clause 4.1.5.2.2 procedure for average measure.

(8) For portable device, X axis, Y axis, Z axis are tested, and worse setup is reported.

(9) According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

(10) For 30 MHz ~ 25 GHz: (Scan with all mode, the worst case is reported)


(11) For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in worst mode.

12.6. Test result

PASS. (See below detailed test result)

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-04-10 **Tested By:** Cao Jie
Test Mode: TX Lora Mode **Power Supply:** Battery
Condition: Temp:24.4°C;Humi:61.7% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26030329-2E\FCC Below 1G\4
Memo: Sample Number:S26030329-001

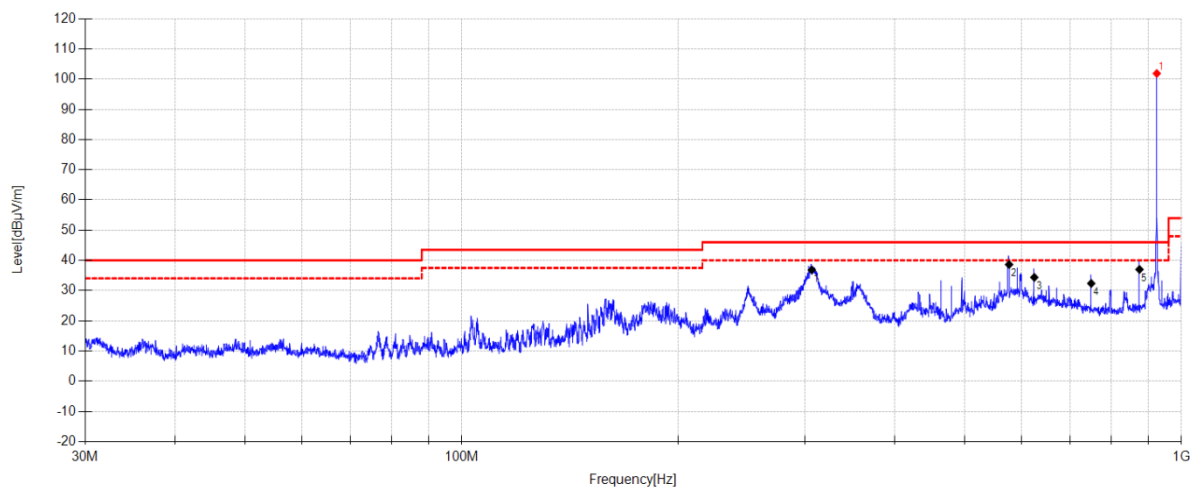

Suspected Data List												
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Height [cm]	Detector	Polarity
1	924.473	104.46	22.00	7.17	-31.75	101.88	46.00	-55.88	260	105	PK	Horizontal


NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Height [cm]	Detector	Polarity
1	306.611	50.14	13.77	5.31	36.81	46.00	9.19	335	105	QP	Horizontal
2	576.304	46.36	18.73	6.31	38.61	46.00	7.39	38	105	QP	Horizontal
3	624.699	42.1	18.72	6.46	34.37	46.00	11.63	335	105	QP	Horizontal
4	749.626	38.35	20.03	6.78	32.36	46.00	13.64	83	105	QP	Horizontal
5	874.657	40.64	21.33	7.07	36.99	46.00	9.01	359	105	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-04-10 **Tested By:** Cao Jie
Test Mode: TX Lora Mode **Power Supply:** Battery
Condition: Temp:24.4°C;Humi:61.7% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26030329-2E\FCC Below 1G\5
Memo: Sample Number:S26030329-001

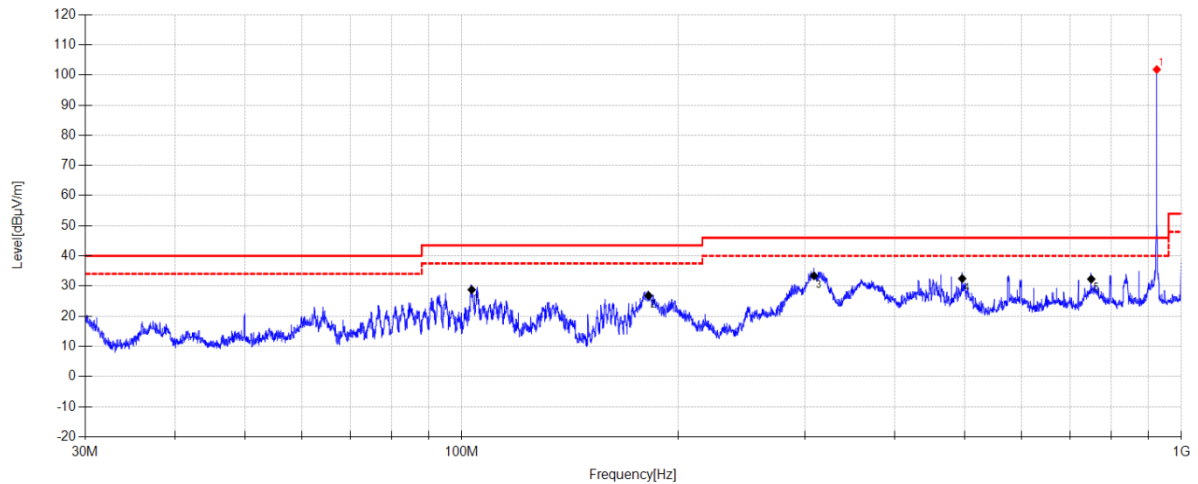**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Height [cm]	Detector	Polarity
1	924.473	104.39	22.00	7.17	-31.75	101.81	46.00	-55.81	252	105	PK	Vertical


NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Height [cm]	Detector	Polarity
1	103.272	45.85	10.89	4.32	28.76	43.50	14.74	324	105	QP	Vertical
2	181.855	45.48	8.94	4.77	26.81	43.50	16.69	243	105	QP	Vertical
3	308.769	46.87	13.60	5.32	33.38	46.00	12.62	146	105	QP	Vertical
4	496.004	42.38	16.66	6.03	32.47	46.00	13.53	305	105	QP	Vertical
5	749.626	38.28	20.03	6.78	32.29	46.00	13.71	55	105	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-04-05 **Tested By:** Cao Jie
Test Mode: TX Lora DTS SF7 925.1MHz Mode **Power Supply:** DC 5V
Condition: Temp:24.4°C;Humi:61.7% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26030329-2E\FCC ABOVE 1G 900M\36
Memo: Sample Number:S26030329-001

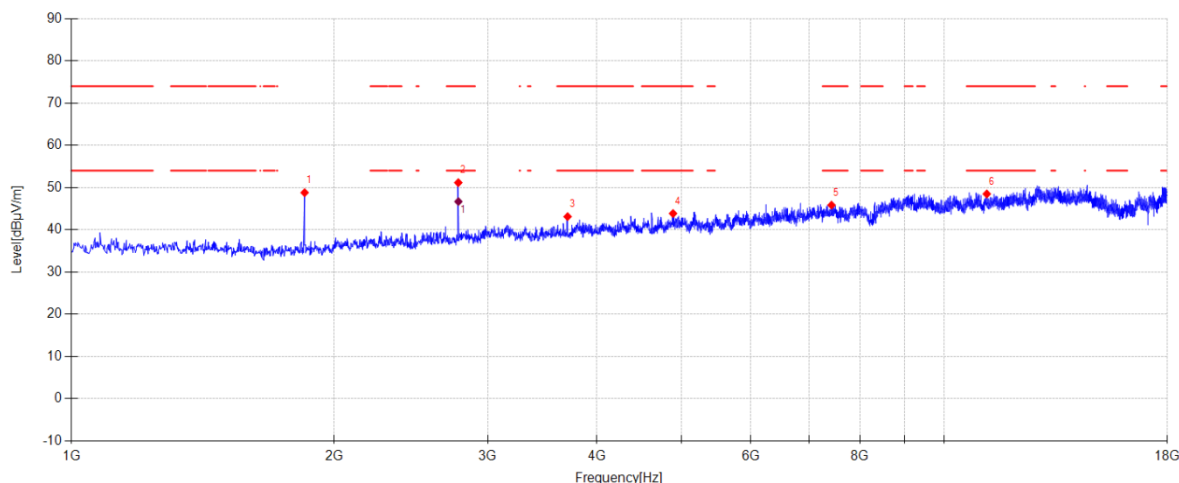**Suspected Data List**

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1850.000	57.90	25.60	3.21	-37.93	48.78	-	-	PK	Horizontal
2	2774.800	57.36	28.65	4.19	-39.05	51.15	74.00	22.85	PK	Horizontal
3	3701.300	48.25	29.90	4.53	-39.58	43.10	74.00	30.90	PK	Horizontal
4	4887.900	45.41	33.05	5.17	-39.79	43.84	74.00	30.16	PK	Horizontal
5	7424.300	43.27	36.65	5.77	-39.86	45.83	74.00	28.17	PK	Horizontal
6	11181.300	41.78	38.82	7.48	-39.60	48.48	74.00	25.52	PK	Horizontal

Final Data List


N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2775.320	52.88	28.65	4.19	46.67	54.00	7.33	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-04-05 **Tested By:** Cao Jie
Test Mode: TX Lora DTS SF7 925.1MHz Mode **Power Supply:** DC 5V
Condition: Temp:24.4°C;Humi:61.7% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26030329-2E\FCC ABOVE 1G 900M\37
Memo: Sample Number:S26030329-001

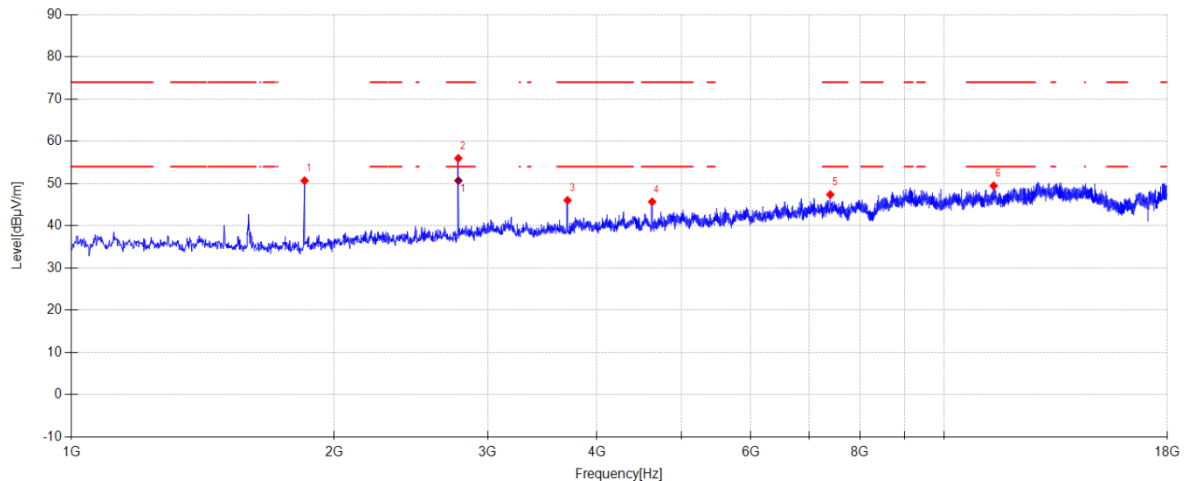

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1850.000	59.79	25.60	3.21	-37.93	50.67	-	-	PK	Vertical
2	2774.800	62.18	28.65	4.19	-39.05	55.97	74.00	18.03	PK	Vertical
3	3701.300	51.17	29.90	4.53	-39.58	46.02	74.00	27.98	PK	Vertical
4	4626.100	48.86	31.56	5.00	-39.76	45.66	74.00	28.34	PK	Vertical
5	7400.500	44.78	36.70	5.76	-39.86	47.38	74.00	26.62	PK	Vertical
6	11387.000	41.86	39.64	7.56	-39.60	49.46	74.00	24.54	PK	Vertical

Final Data List


N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2775.325	56.90	28.65	4.19	50.69	54.00	3.31	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-04-05 **Tested By:** Cao Jie
Test Mode: TX Lora DTS SF7 923.3MHz Mode **Power Supply:** DC 5V
Condition: Temp:24.4°C;Humi:61.7% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26030329-2E\FCC ABOVE 1G 900M\38
Memo: Sample Number:S26030329-001

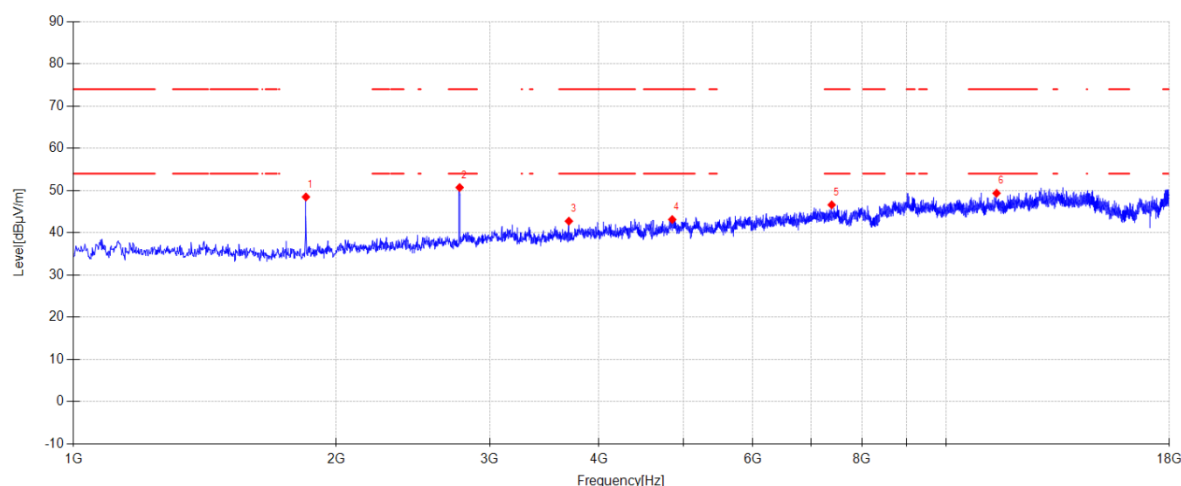

Suspected Data List


N O.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1846.600	57.58	25.60	3.21	-37.92	48.47	-	-	PK	Horizontal
2	2769.700	57.02	28.55	4.19	-39.05	50.71	74.00	23.29	PK	Horizontal
3	3694.500	47.94	29.85	4.53	-39.58	42.74	74.00	31.26	PK	Horizontal
4	4852.200	44.86	32.91	5.15	-39.79	43.13	74.00	30.87	PK	Horizontal
5	7388.600	43.93	36.77	5.76	-39.86	46.60	74.00	27.40	PK	Horizontal
6	11412.500	41.69	39.68	7.58	-39.60	49.35	74.00	24.65	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-04-05 **Tested By:** Cao Jie
Test Mode: TX Lora DTS SF7 923.3MHz Mode **Power Supply:** DC 5V
Condition: Temp:24.4°C;Humi:61.7% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26030329-2E\FCC ABOVE 1G 900M\39
Memo: Sample Number:S26030329-001

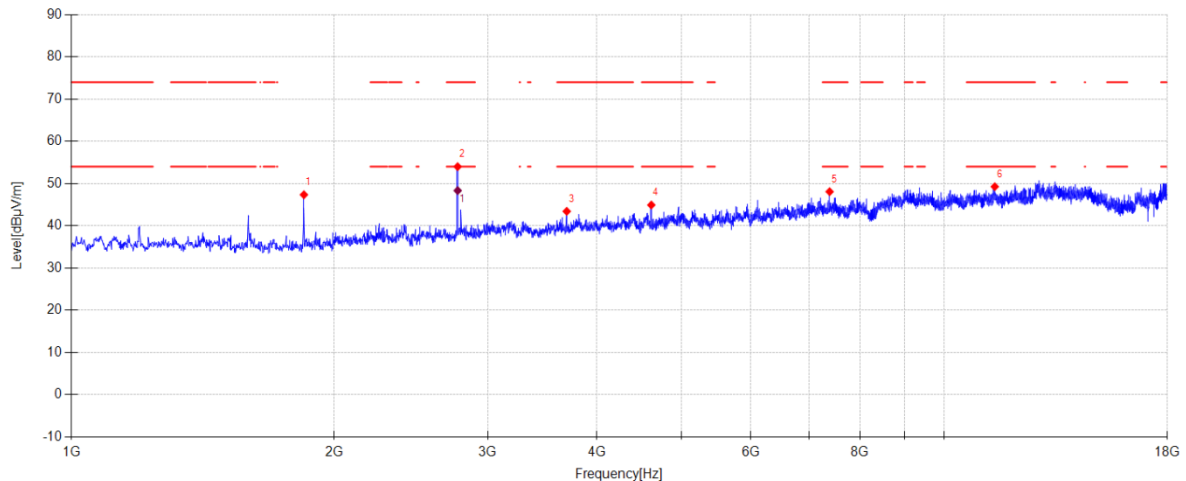**Suspected Data List**

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1846.600	56.45	25.60	3.21	-37.92	47.34	-	-	PK	Vertical
2	2769.700	60.30	28.55	4.19	-39.05	53.99	74.00	20.01	PK	Vertical
3	3692.800	48.63	29.83	4.53	-39.58	43.41	74.00	30.59	PK	Vertical
4	4615.900	48.18	31.50	4.99	-39.76	44.91	74.00	29.09	PK	Vertical
5	7386.900	45.38	36.78	5.76	-39.86	48.06	74.00	25.94	PK	Vertical
6	11419.300	41.67	39.61	7.58	-39.60	49.26	74.00	24.74	PK	Vertical

Final Data List


N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2769.960	54.63	28.55	4.19	48.32	54.00	5.68	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-04-05 **Tested By:** Cao Jie
Test Mode: TX Lora DTS SF7 927.5MHz Mode **Power Supply:** DC 5V
Condition: Temp:24.4°C;Humi:61.7% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26030329-2E\FCC ABOVE 1G 900M\40
Memo: Sample Number:S26030329-001

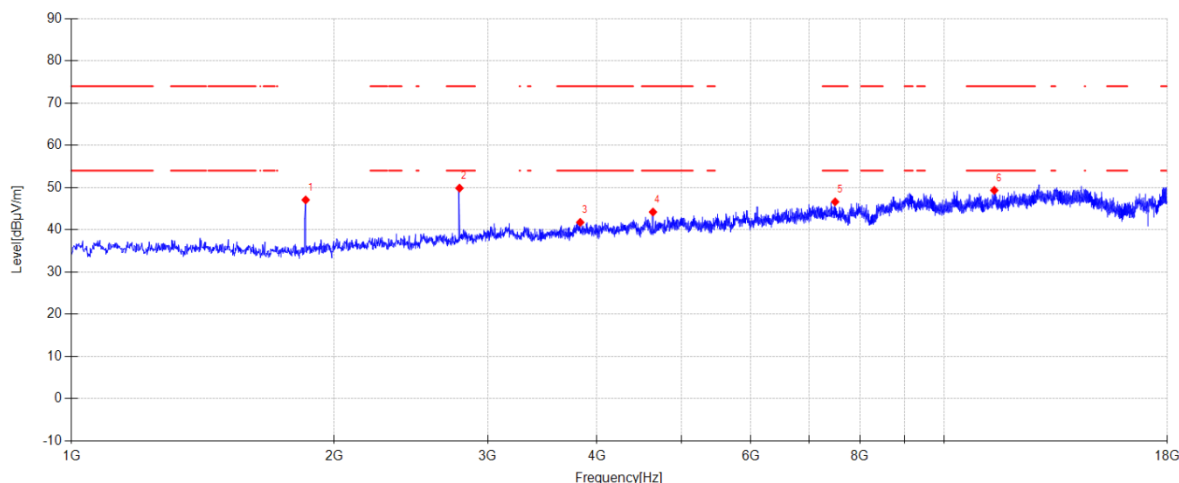**Suspected Data List**


N O.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1855.100	56.12	25.66	3.22	-37.94	47.06	-	-	PK	Horizontal
2	2783.300	55.91	28.80	4.20	-39.06	49.85	74.00	24.15	PK	Horizontal
3	3827.100	46.26	30.57	4.55	-39.63	41.75	74.00	32.25	PK	Horizontal
4	4636.300	47.33	31.62	5.00	-39.76	44.19	74.00	29.81	PK	Horizontal
5	7495.700	43.80	36.87	5.79	-39.85	46.61	74.00	27.39	PK	Horizontal
6	11404.000	41.59	39.76	7.57	-39.60	49.32	74.00	24.68	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-04-05 **Tested By:** Cao Jie
Test Mode: TX Lora DTS SF7 927.5MHz Mode **Power Supply:** DC 5V
Condition: Temp:24.4°C;Humi:61.7% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26030329-2E\FCC ABOVE 1G 900M\41
Memo: Sample Number:S26030329-001

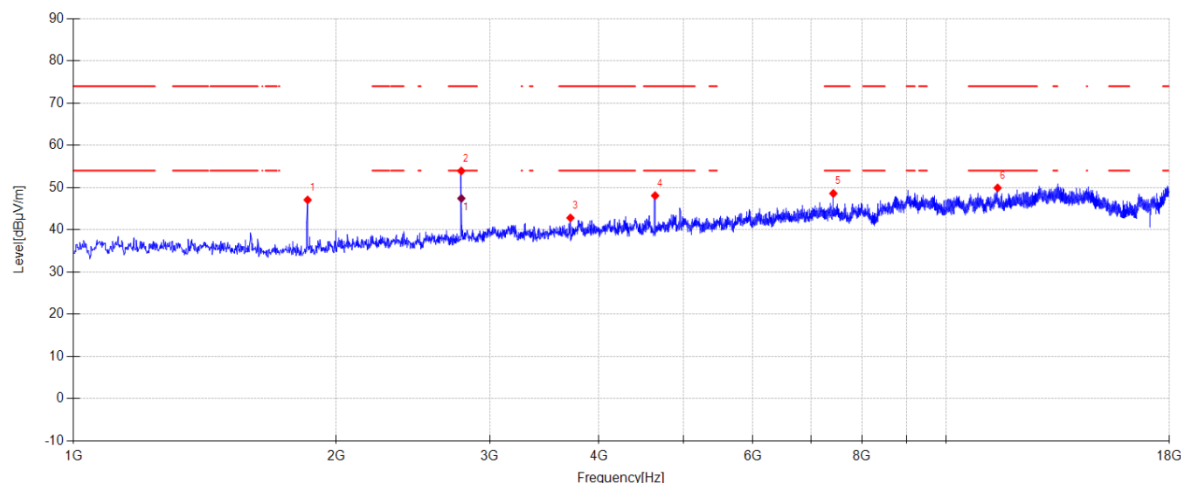

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1855.100	56.11	25.66	3.22	-37.94	47.05	-	-	PK	Vertical
2	2781.600	60.01	28.77	4.20	-39.06	53.92	74.00	20.08	PK	Vertical
3	3709.800	47.97	29.88	4.53	-39.58	42.80	74.00	31.20	PK	Vertical
4	4638.000	51.20	31.63	5.00	-39.76	48.07	74.00	25.93	PK	Vertical
5	7420.900	46.02	36.66	5.77	-39.86	48.59	74.00	25.41	PK	Vertical
6	11444.800	42.57	39.35	7.59	-39.60	49.91	74.00	24.09	PK	Vertical

Final Data List


N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2782.470	53.50	28.77	4.20	47.41	54.00	6.59	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-04-15 **Tested By:** Cao Jie
Test Mode: TX Lora DTS SF8 904.6MHz Mode **Power Supply:** DC 5V
Condition: Temp:24.4°C;Humi:61.7% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26030329-2E\FCC ABOVE 1G 900M\44
Memo: Sample Number:S26030329-001

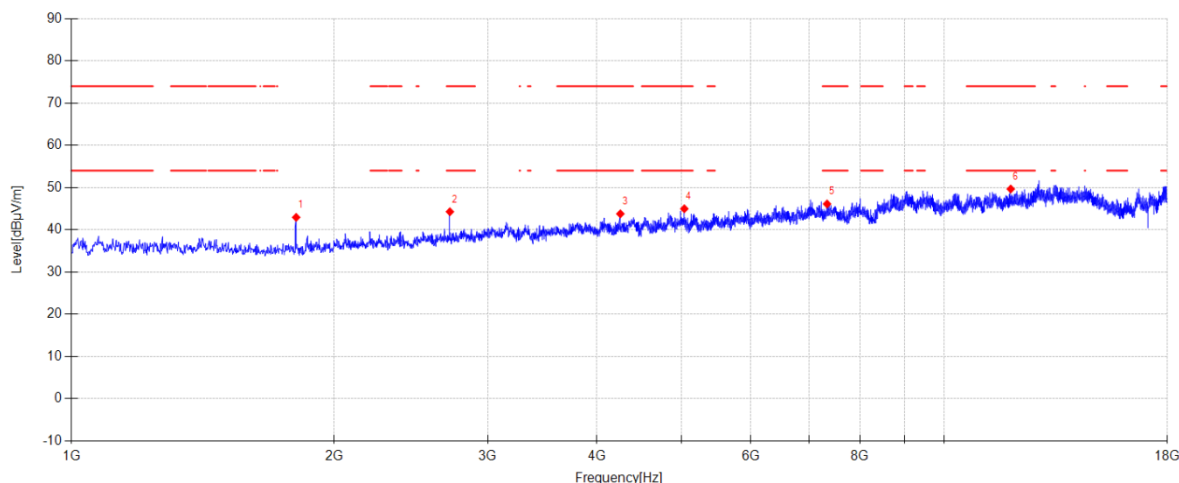**Suspected Data List**


N O.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1809.200	52.01	25.60	3.18	-37.86	42.93	-	-	PK	Horizontal
2	2713.600	51.20	27.91	4.13	-38.98	44.26	74.00	29.74	PK	Horizontal
3	4253.800	47.49	31.26	4.74	-39.73	43.76	74.00	30.24	PK	Horizontal
4	5035.800	46.42	33.07	5.26	-39.79	44.96	74.00	29.04	PK	Horizontal
5	7337.600	43.23	37.00	5.74	-39.87	46.10	74.00	27.90	PK	Horizontal
6	11910.600	42.93	38.55	7.77	-39.60	49.65	74.00	24.35	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-04-15 **Tested By:** Cao Jie
Test Mode: TX Lora DTS SF8 904.6MHz Mode **Power Supply:** DC 5V
Condition: Temp:24.4°C;Humi:61.7% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26030329-2E\FCC ABOVE 1G 900M\45
Memo: Sample Number:S26030329-001

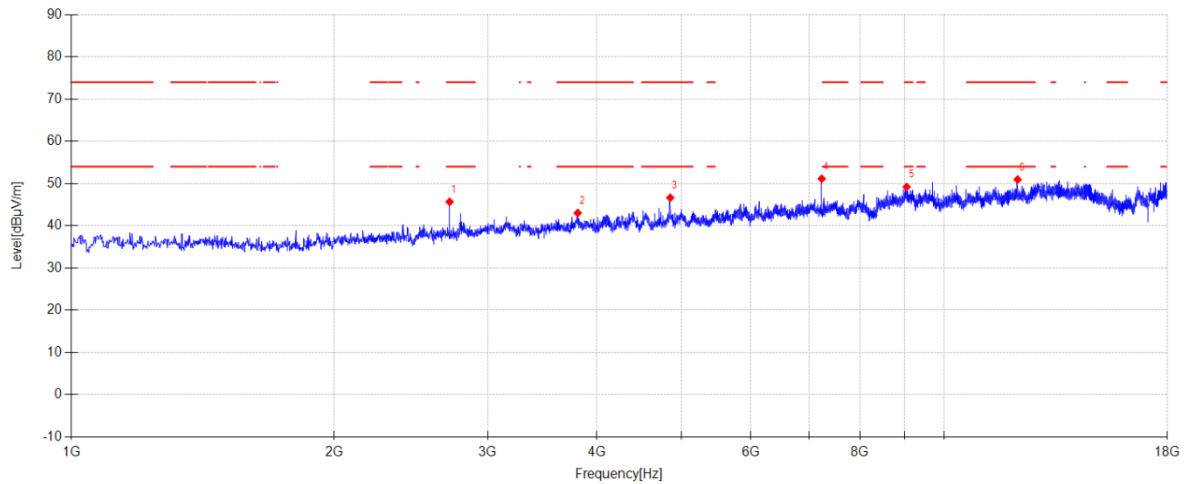

Suspected Data List


N O.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2711.900	52.61	27.90	4.13	-38.98	45.66	74.00	28.34	PK	Vertical
2	3801.600	47.21	30.88	4.54	-39.62	43.01	74.00	30.99	PK	Vertical
3	4852.200	48.37	32.91	5.15	-39.79	46.64	74.00	27.36	PK	Vertical
4	7235.600	48.48	36.83	5.70	-39.88	51.13	-	-	PK	Vertical
5	9051.200	42.18	38.88	6.79	-38.66	49.19	74.00	24.81	PK	Vertical
6	12128.200	43.21	39.42	7.81	-39.50	50.94	74.00	23.06	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-04-15 **Tested By:** Cao Jie
Test Mode: TX Lora Hybrid SF10 903.9MHz Mode **Power Supply:** DC 5V
Condition: Temp:24.4°C;Humi:61.7% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26030329-2E\FCC ABOVE 1G 900M\42
Memo: Sample Number:S26030329-001

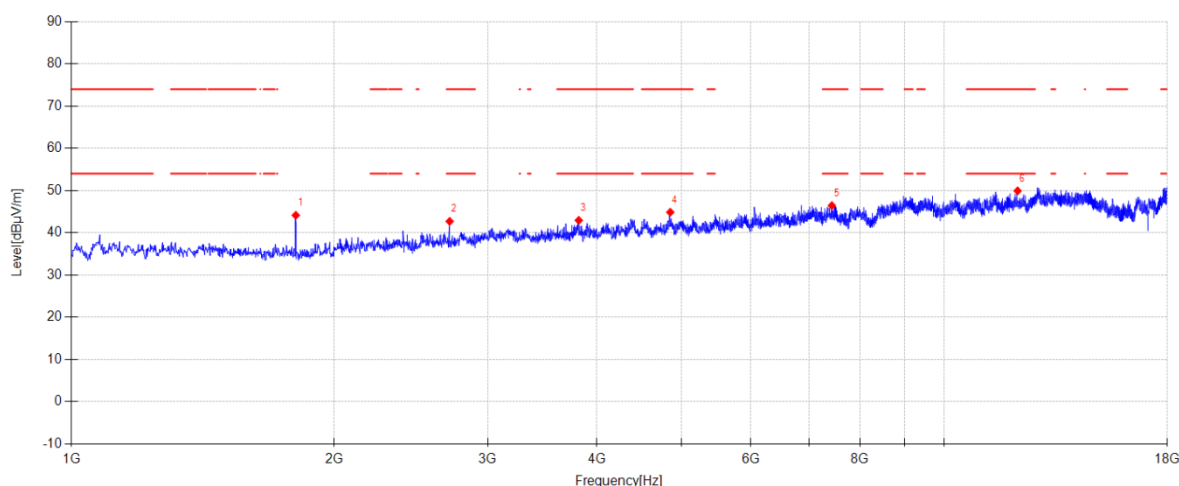

Suspected Data List


N O.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1807.500	53.21	25.60	3.17	-37.85	44.13	-	-	PK	Horizontal
2	2711.900	49.64	27.90	4.13	-38.98	42.69	74.00	31.31	PK	Horizontal
3	3811.800	47.24	30.76	4.55	-39.62	42.93	74.00	31.07	PK	Horizontal
4	4852.200	46.58	32.91	5.15	-39.79	44.85	74.00	29.15	PK	Horizontal
5	7431.100	43.88	36.64	5.77	-39.86	46.43	74.00	27.57	PK	Horizontal
6	12128.200	42.19	39.42	7.81	-39.50	49.92	74.00	24.08	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-04-15 **Tested By:** Cao Jie
Test Mode: TX Lora Hybrid SF10 903.9MHz Mode **Power Supply:** DC 5V
Condition: Temp:24.4°C;Humi:61.7% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26030329-2E\FCC ABOVE 1G 900M\43
Memo: Sample Number:S26030329-001

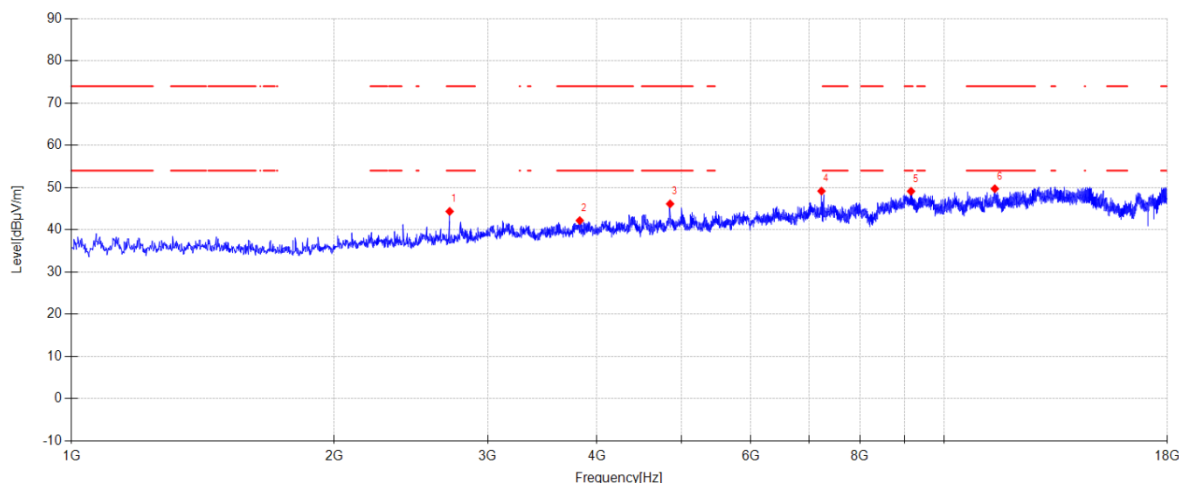**Suspected Data List**


N O.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2711.900	51.28	27.90	4.13	-38.98	44.33	74.00	29.67	PK	Vertical
2	3822.000	46.61	30.64	4.55	-39.63	42.17	74.00	31.83	PK	Vertical
3	4850.500	47.86	32.90	5.15	-39.79	46.12	74.00	27.88	PK	Vertical
4	7230.500	46.56	36.77	5.70	-39.88	49.15	-	-	PK	Vertical
5	9156.600	42.17	38.92	6.78	-38.77	49.10	74.00	24.90	PK	Vertical
6	11421.000	42.14	39.59	7.58	-39.60	49.71	74.00	24.29	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-04-15 **Tested By:** Cao Jie
Test Mode: TX Lora Hybrid SF10 904.5MHz Mode **Power Supply:** DC 5V
Condition: Temp:24.4°C;Humi:61.7% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26030329-2E\FCC ABOVE 1G 900M\46
Memo: Sample Number:S26030329-001

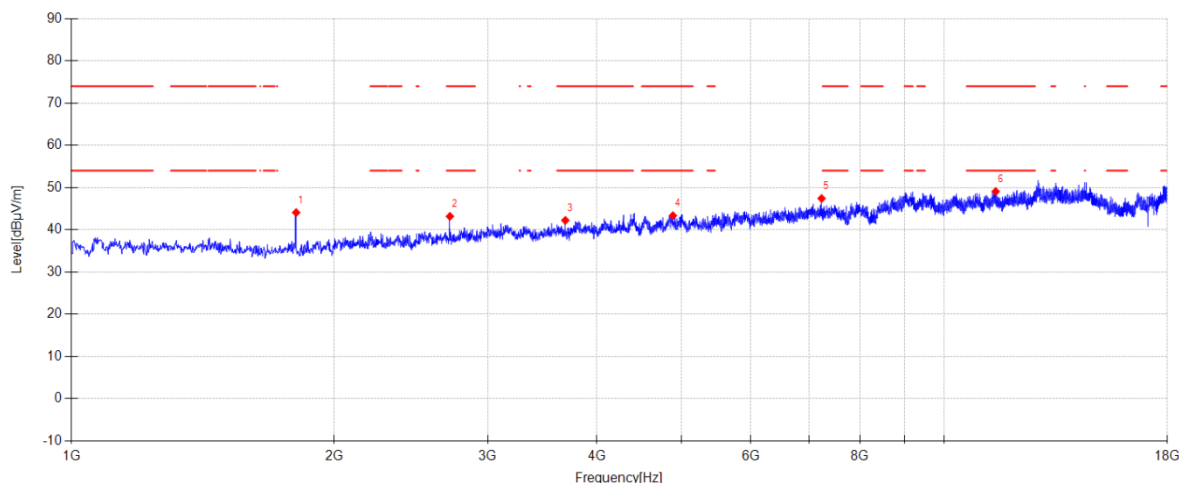**Suspected Data List**


N O.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1809.200	53.15	25.60	3.18	-37.86	44.07	-	-	PK	Horizontal
2	2713.600	50.10	27.91	4.13	-38.98	43.16	74.00	30.84	PK	Horizontal
3	3679.200	47.57	29.69	4.53	-39.57	42.22	74.00	31.78	PK	Horizontal
4	4886.200	44.92	33.04	5.17	-39.79	43.34	74.00	30.66	PK	Horizontal
5	7232.200	44.80	36.79	5.70	-39.88	47.41	-	-	PK	Horizontal
6	11446.500	41.73	39.34	7.59	-39.60	49.06	74.00	24.94	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-04-15 **Tested By:** Cao Jie
Test Mode: TX Lora Hybrid SF10 904.5MHz Mode **Power Supply:** DC 5V
Condition: Temp:24.4°C;Humi:61.7% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26030329-2E\FCC ABOVE 1G 900M\47
Memo: Sample Number:S26030329-001

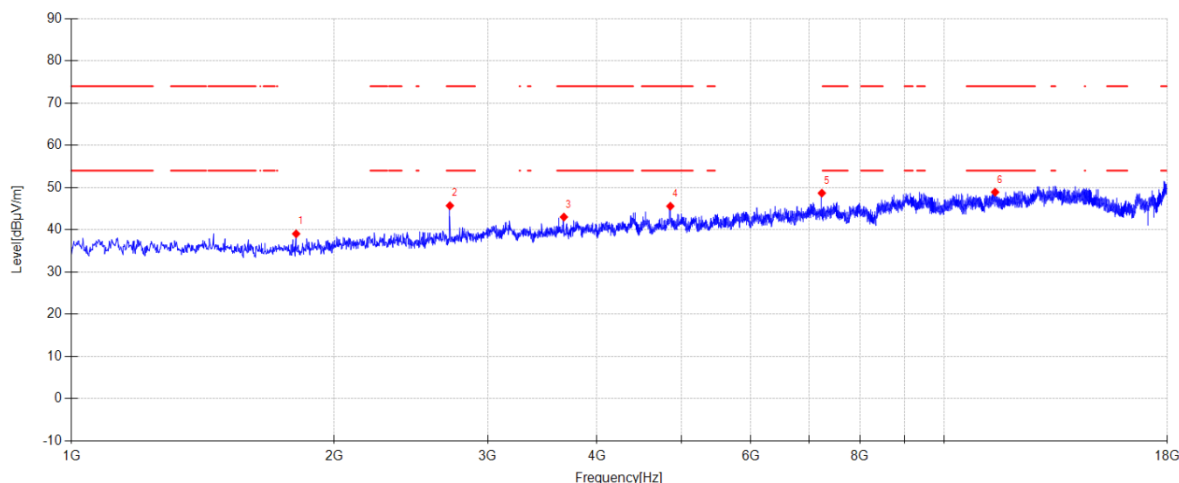**Suspected Data List**


N O.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1809.200	48.11	25.60	3.18	-37.86	39.03	-	-	PK	Vertical
2	2713.600	52.63	27.91	4.13	-38.98	45.69	74.00	28.31	PK	Vertical
3	3665.600	48.49	29.56	4.53	-39.57	43.01	74.00	30.99	PK	Vertical
4	4853.900	47.29	32.92	5.15	-39.79	45.57	74.00	28.43	PK	Vertical
5	7237.300	46.00	36.85	5.70	-39.88	48.67	-	-	PK	Vertical
6	11429.500	41.41	39.51	7.58	-39.60	48.90	74.00	25.10	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-04-15 **Tested By:** Cao Jie
Test Mode: TX Lora Hybrid SF10 905.3MHz Mode **Power Supply:** DC 5V
Condition: Temp:24.4°C;Humi:61.7% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26030329-2E\FCC ABOVE 1G 900M\48
Memo: Sample Number:S26030329-001

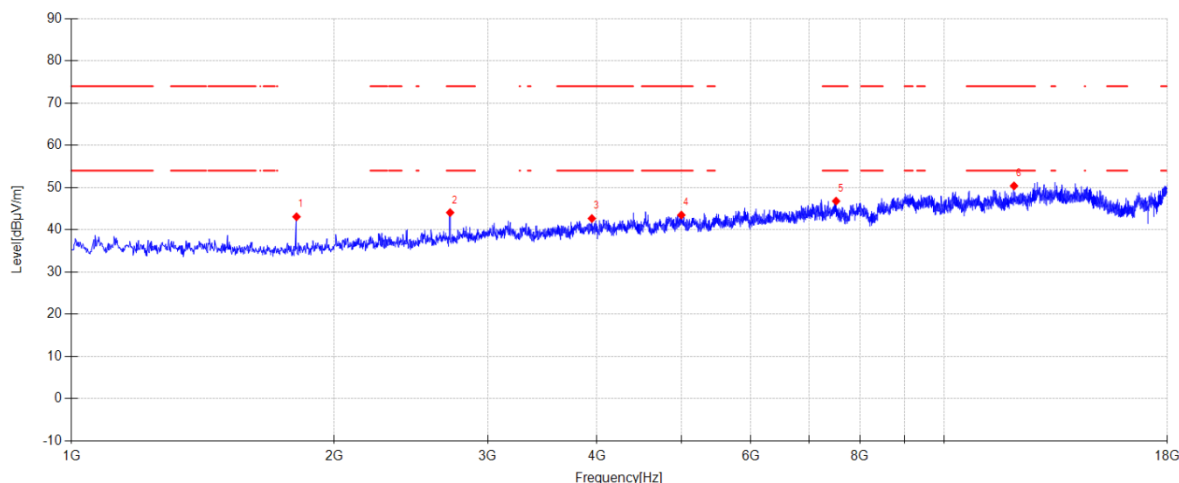

Suspected Data List


N O.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1810.900	52.15	25.60	3.18	-37.86	43.07	-	-	PK	Horizontal
2	2715.300	51.00	27.92	4.13	-38.99	44.06	74.00	29.94	PK	Horizontal
3	3946.100	47.43	30.35	4.56	-39.68	42.66	74.00	31.34	PK	Horizontal
4	4996.700	45.01	33.01	5.25	-39.80	43.47	74.00	30.53	PK	Horizontal
5	7514.400	44.13	36.70	5.80	-39.85	46.78	74.00	27.22	PK	Horizontal
6	12014.300	43.09	39.07	7.81	-39.59	50.38	74.00	23.62	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-04-15 **Tested By:** Cao Jie
Test Mode: TX Lora Hybrid SF10 905.3MHz Mode **Power Supply:** DC 5V
Condition: Temp:24.4°C;Humi:61.7% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26030329-2E\FCC ABOVE 1G 900M\49
Memo: Sample Number:S26030329-001

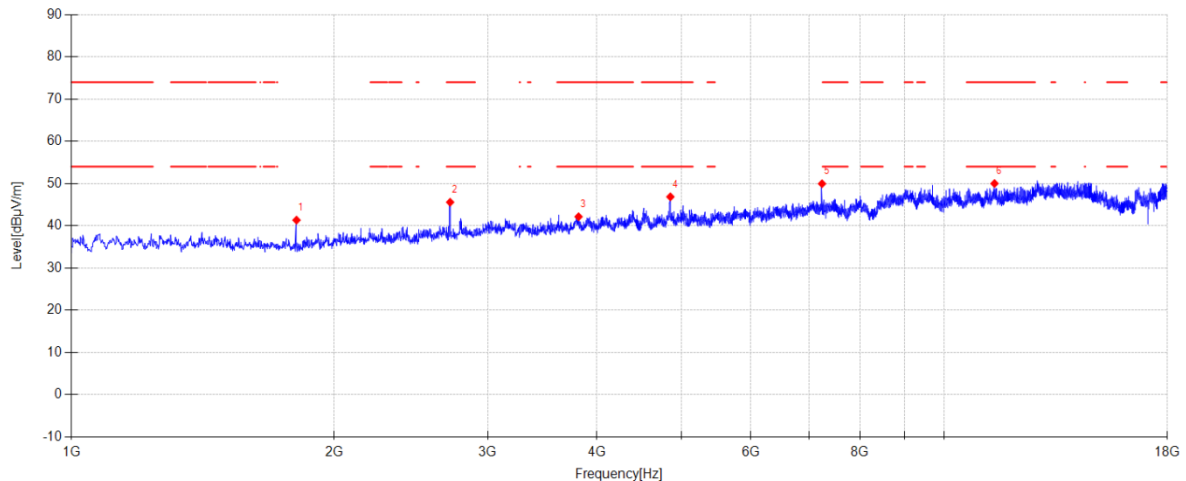**Suspected Data List**


N O.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1810.900	50.41	25.60	3.18	-37.86	41.33	-	-	PK	Vertical
2	2715.300	52.51	27.92	4.13	-38.99	45.57	74.00	28.43	PK	Vertical
3	3810.100	46.42	30.78	4.55	-39.62	42.13	74.00	31.87	PK	Vertical
4	4853.900	48.57	32.92	5.15	-39.79	46.85	74.00	27.15	PK	Vertical
5	7240.700	47.24	36.89	5.70	-39.88	49.95	-	-	PK	Vertical
6	11410.800	42.34	39.69	7.57	-39.60	50.00	74.00	24.00	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

13. RF Conducted Spurious Emissions

13.1. Block diagram of test setup

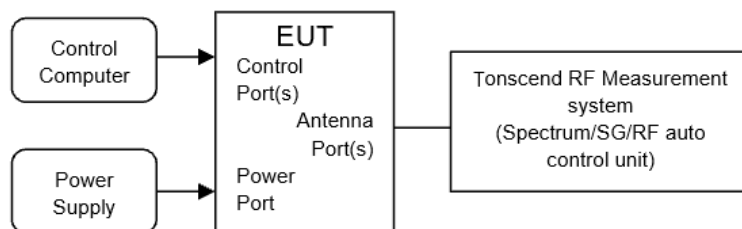

13.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

13.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.
- (4) Set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{Span/RBW}$
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold

Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band


13.4. Test result


Test Engineer:	Tan Shaofeng	Test Site:	RF Test System 5#
Ambient Condition:	24.3-27.2℃,39.2-44.2%RH	Test Date:	2026.4.8
Test Power Supply:	DC 5V from PC	Sample Number:	DDT-Q26030329


Mode	Frequency [MHz]	Verdict
Lora Hybrid SF7	903.9	Pass
	904.5	Pass
	905.3	Pass
Lora Hybrid SF9	903.9	Pass
	904.5	Pass
	905.3	Pass
Lora Hybrid SF10	903.9	Pass
	904.5	Pass
	905.3	Pass

Mode	Frequency [MHz]	Verdict
Lora DTS SF7	923.3	Pass
	925.1	Pass
	927.5	Pass
Lora DTS SF7 SF12	923.3	Pass
	925.1	Pass
	927.5	Pass
Lora DTS SF7 SF8	904.6	Pass


13.5. Test graphs

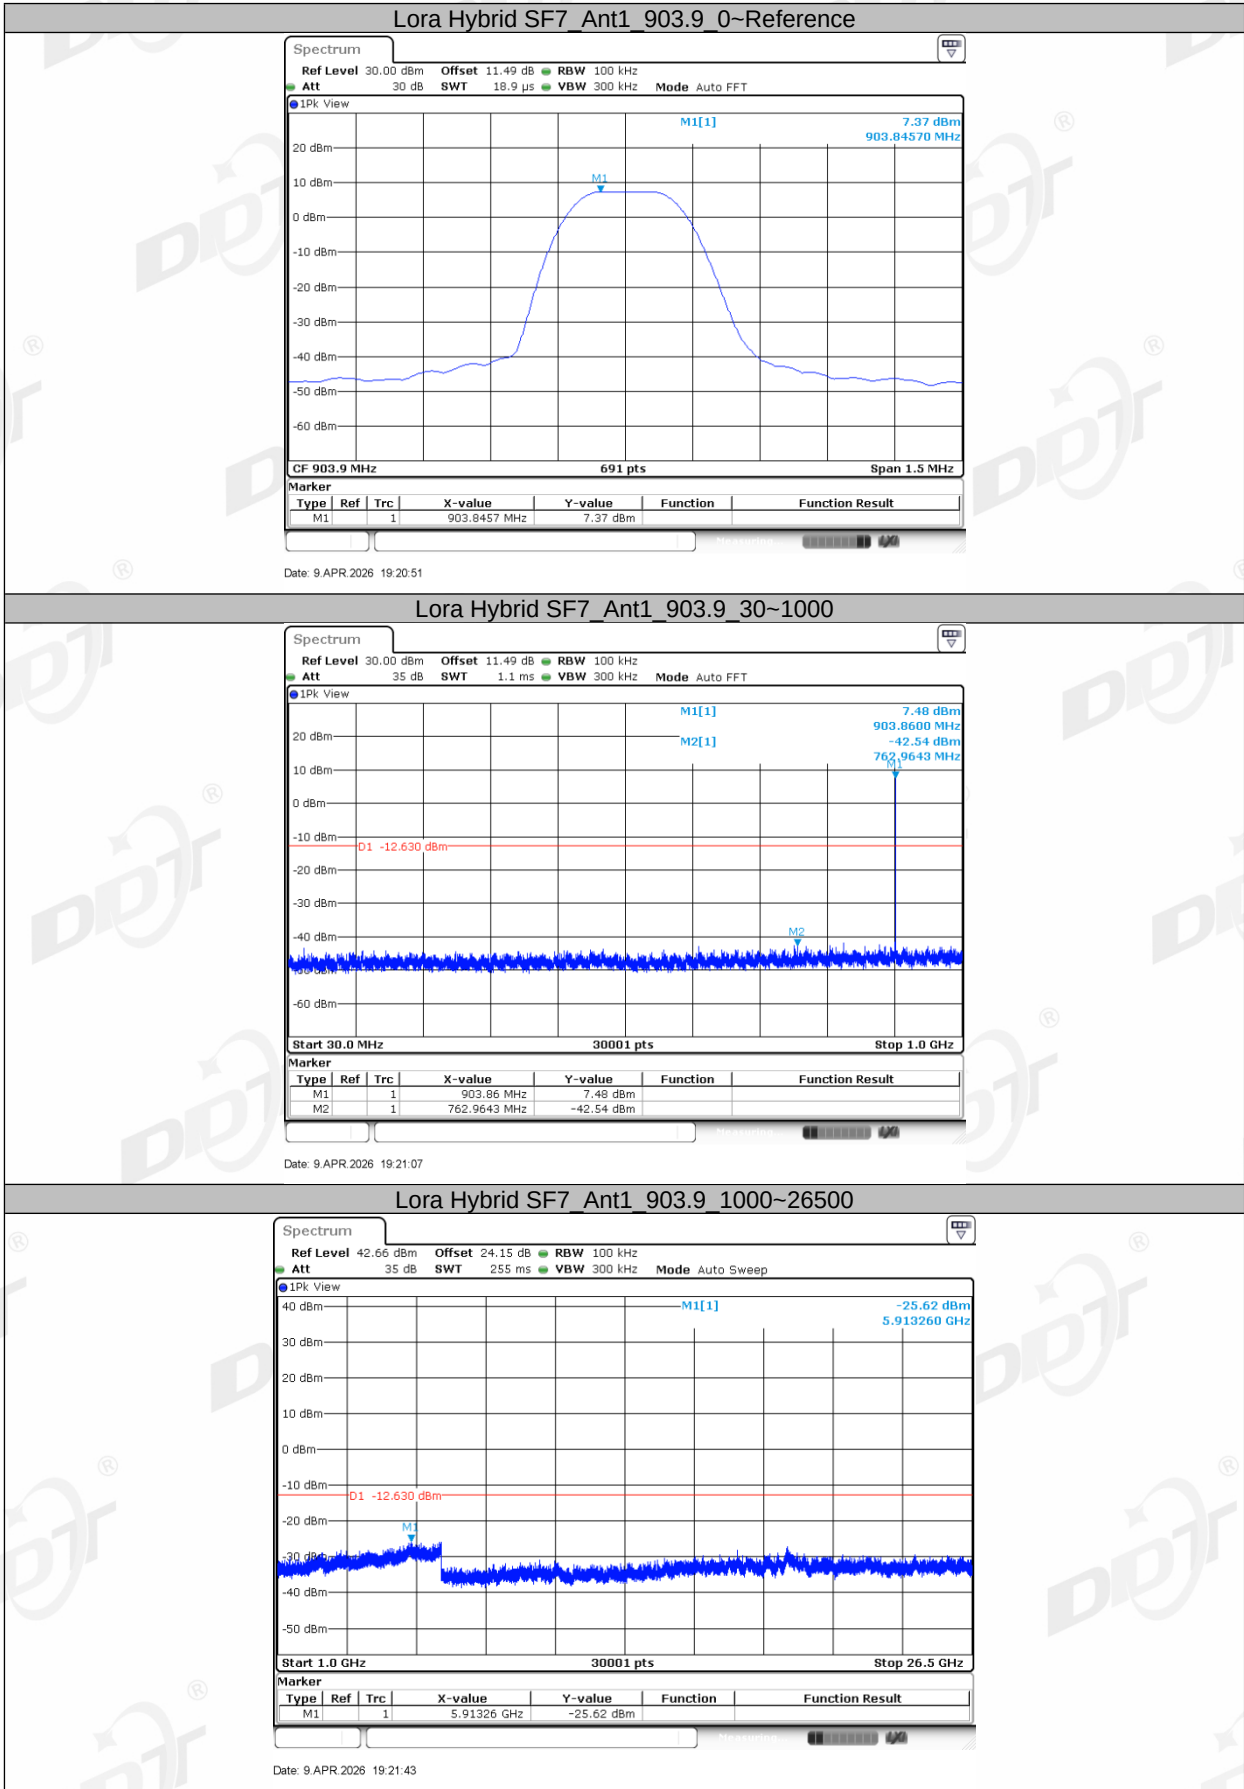

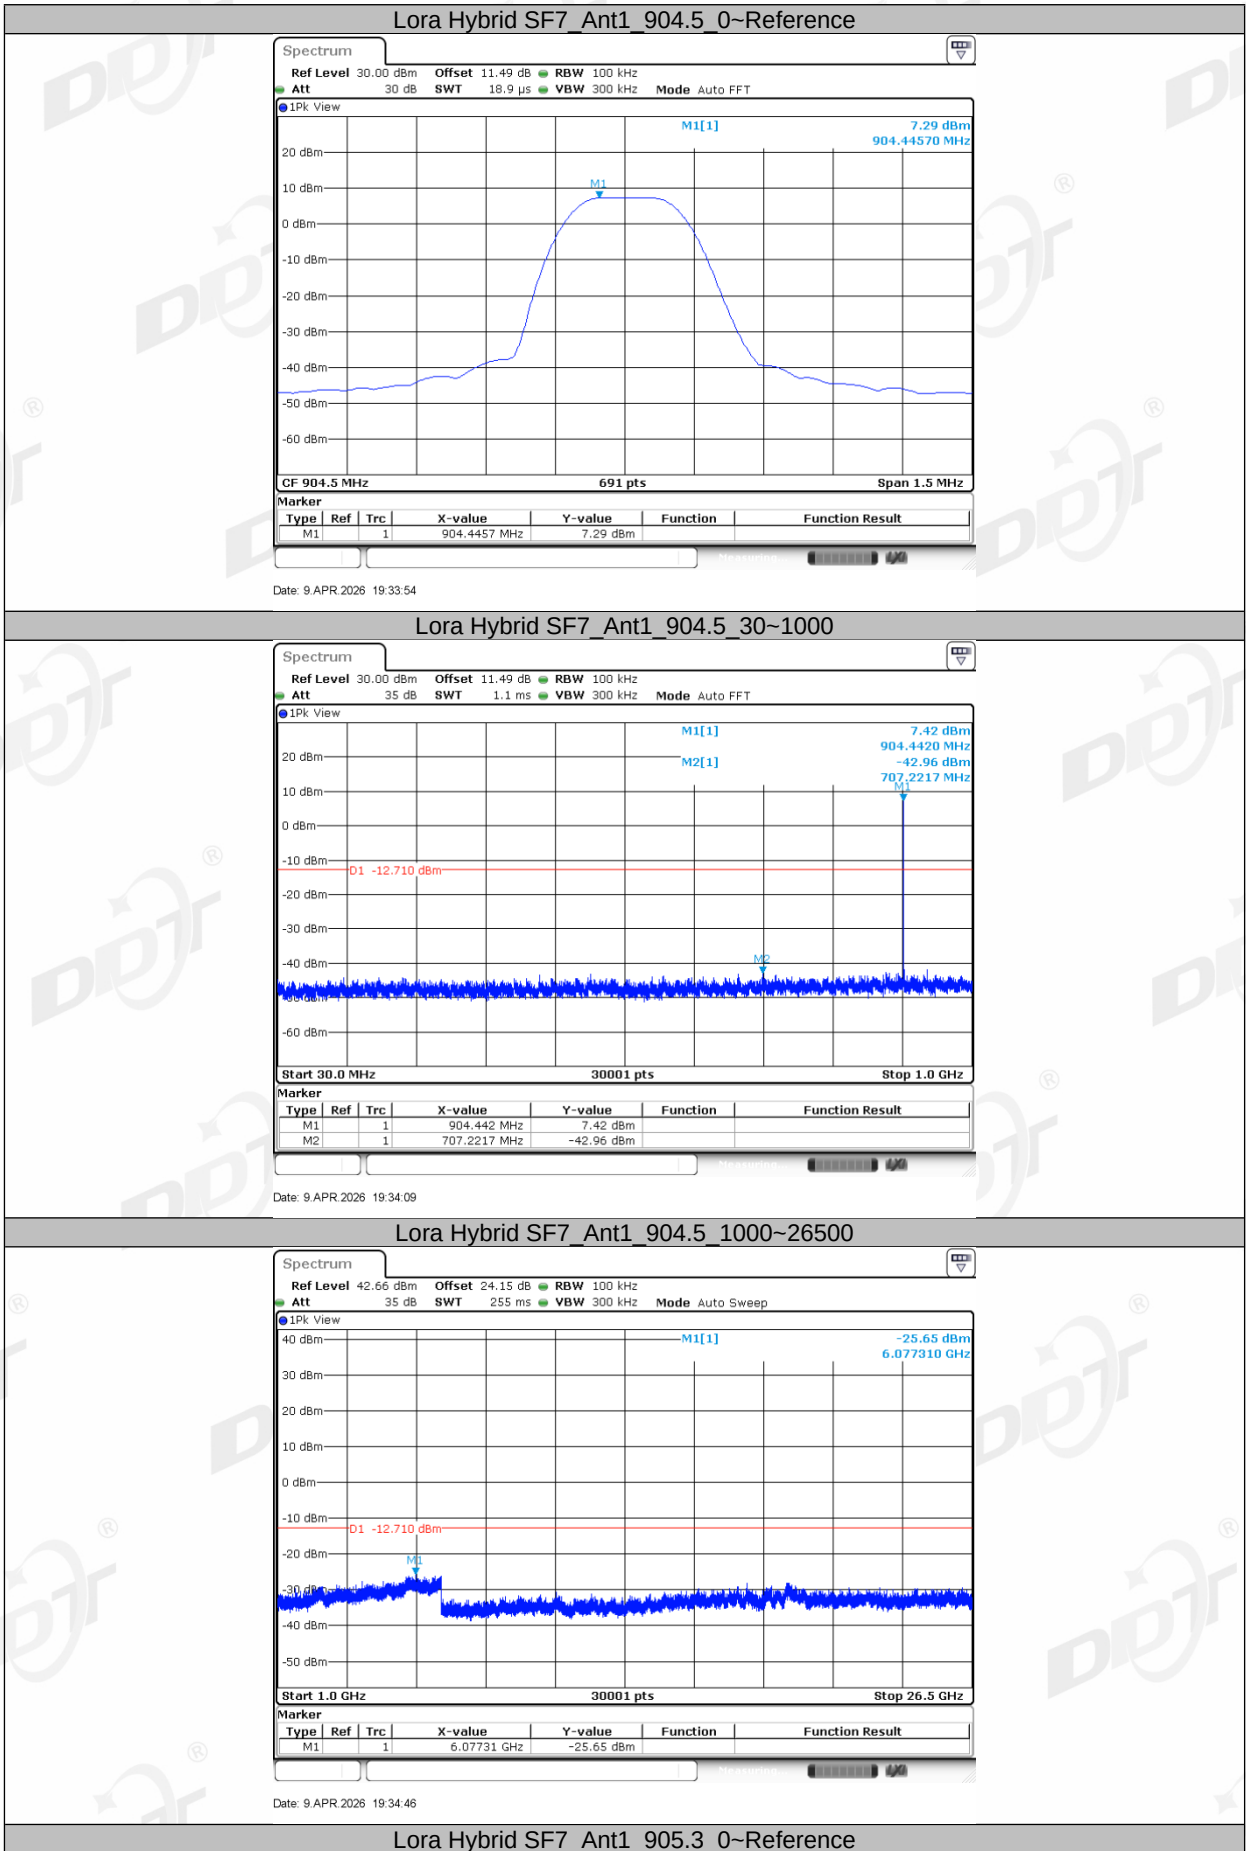


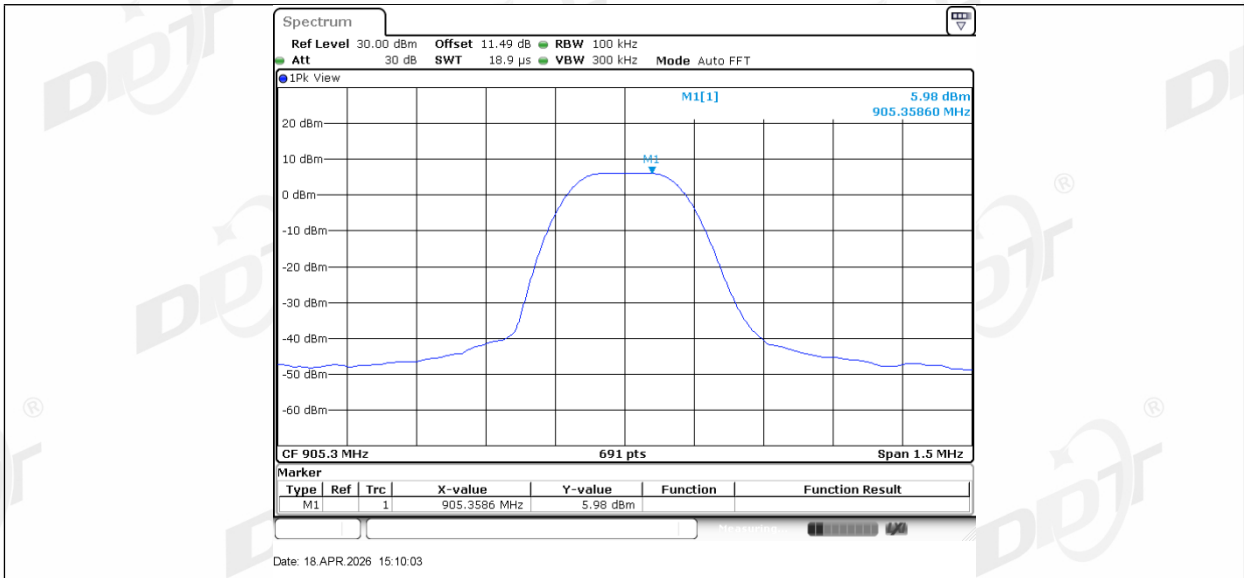


Lora Hybrid SF7_Ant1_905.3_30~1000

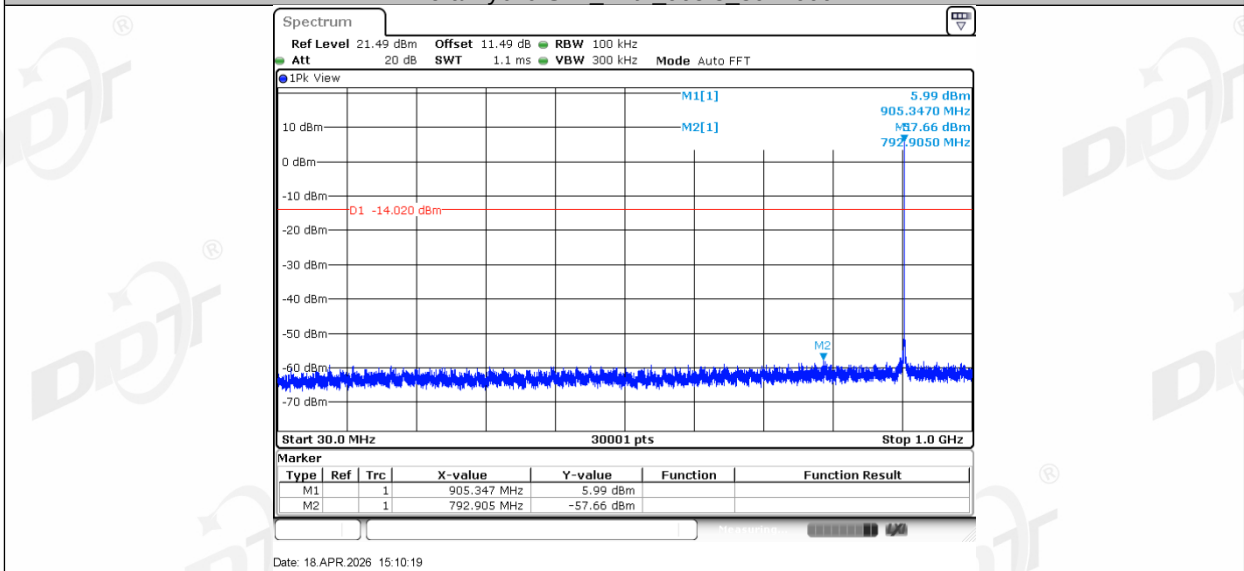


Lora Hybrid SF7_Ant1_905.3_1000~26500

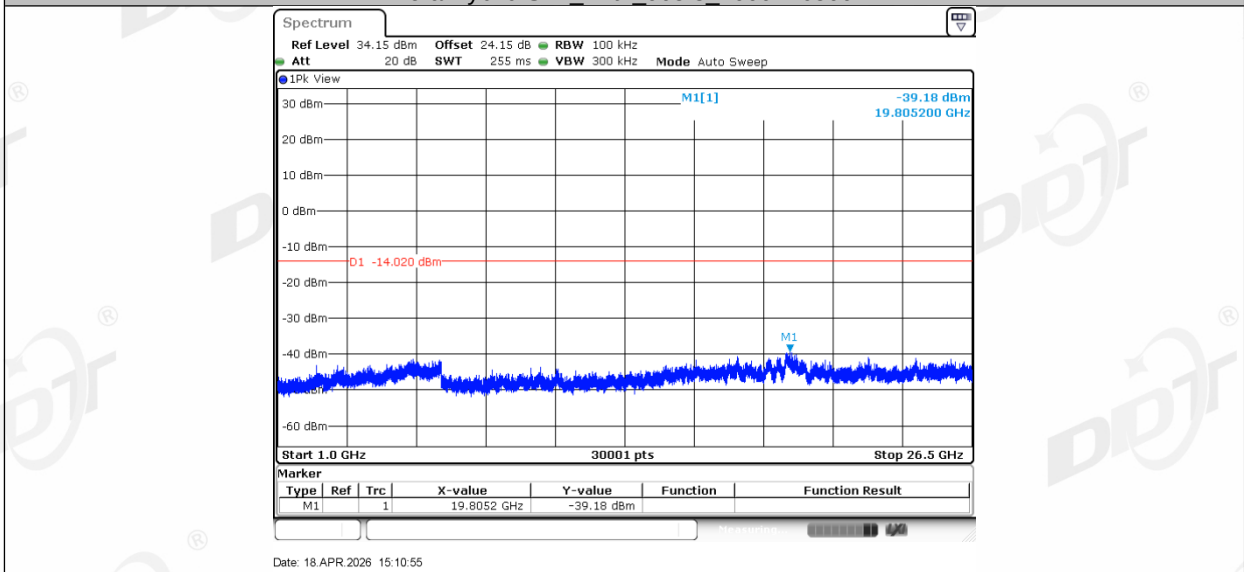


Lora Hybrid SF9_Ant1_903.9_0~Reference

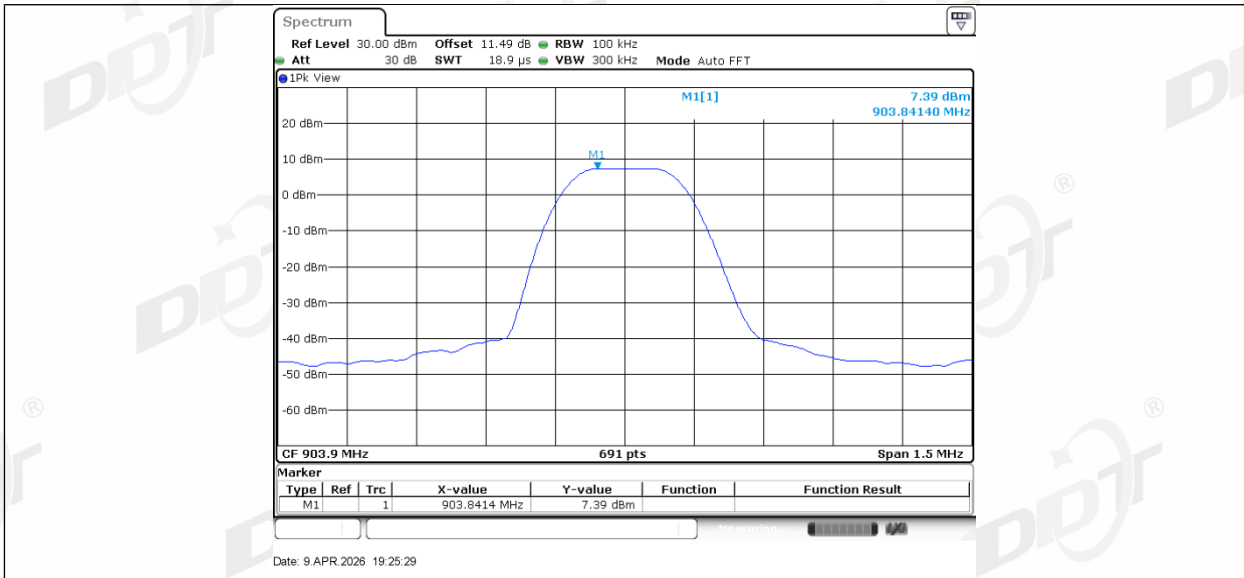


Lora Hybrid SF9_Ant1_903.9_30~1000

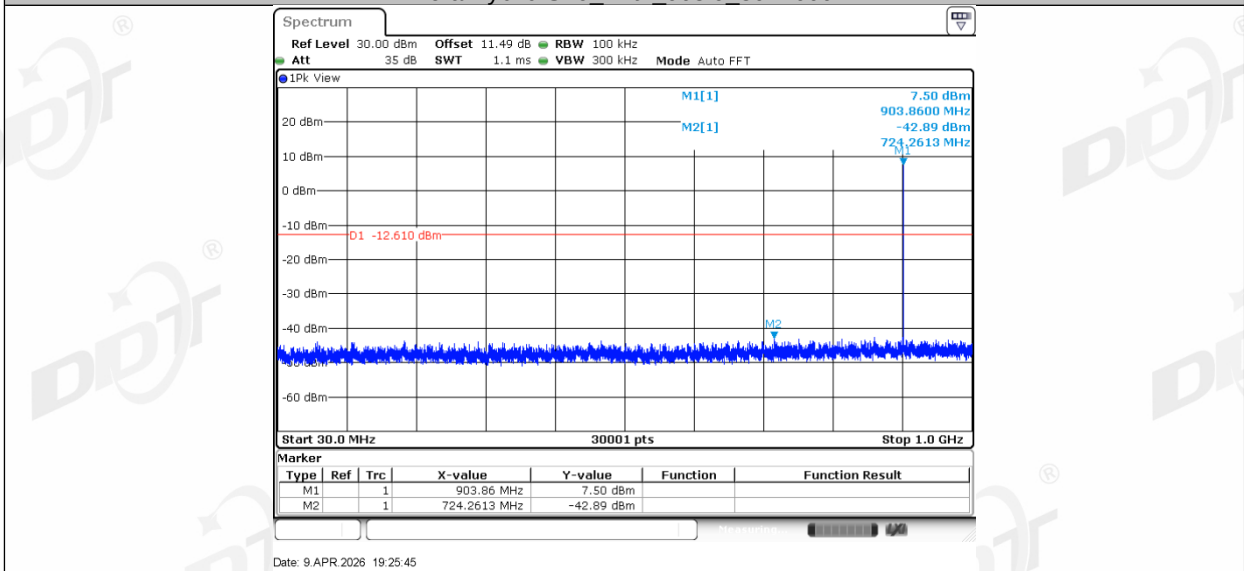


Lora Hybrid SF9_Ant1_903.9_1000~26500

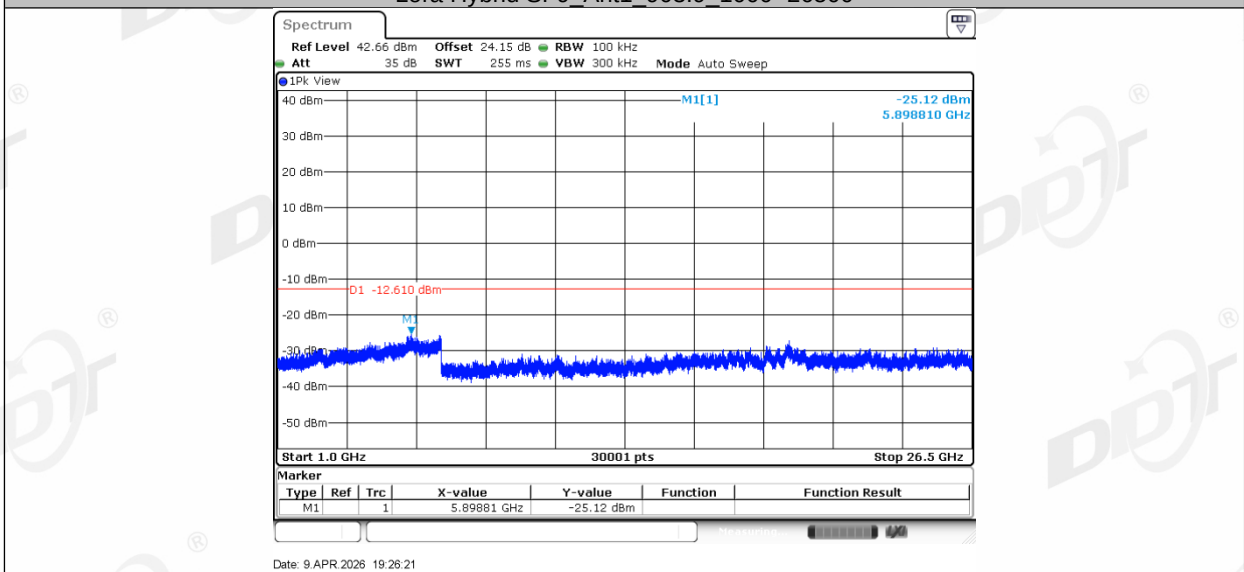


Lora Hybrid SF9_Ant1_904.5_0~Reference

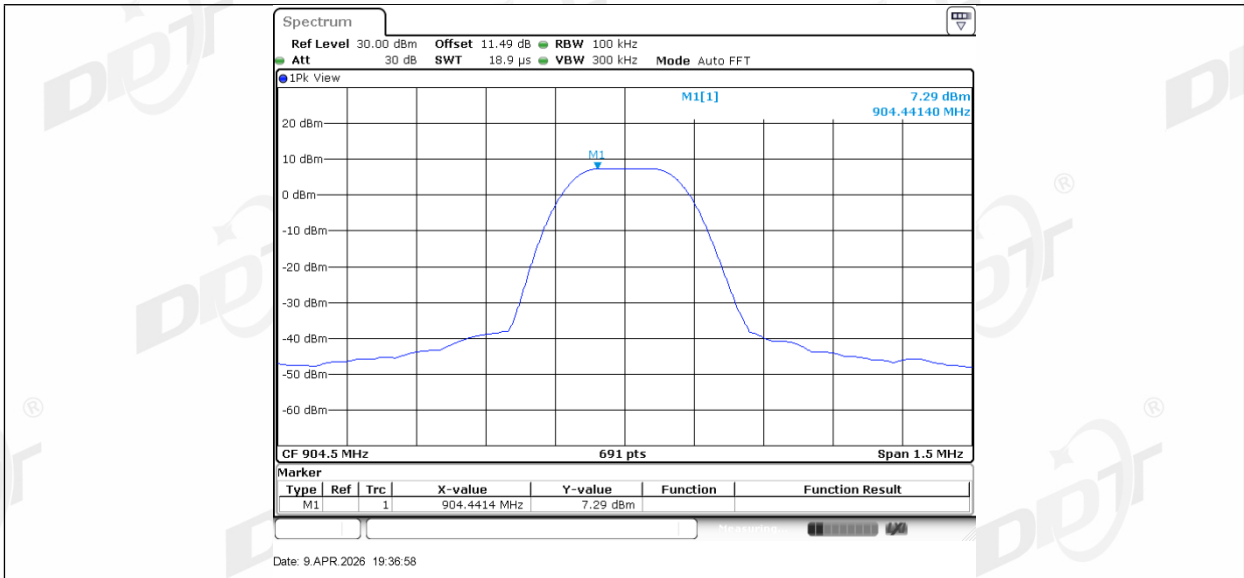


Lora Hybrid SF9_Ant1_904.5_30~1000

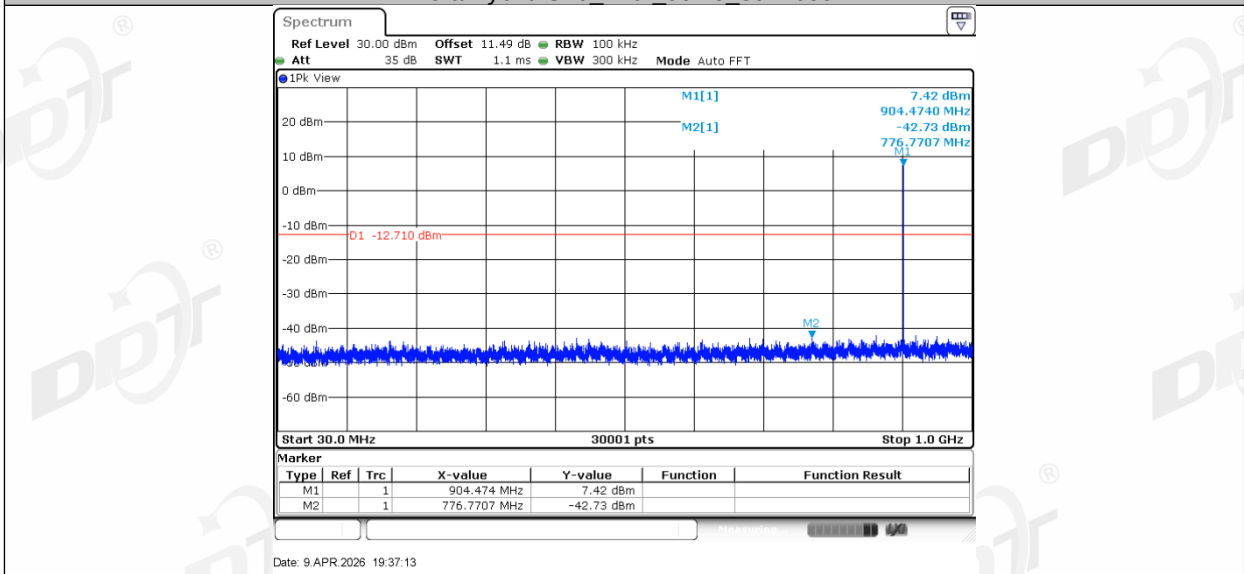


Lora Hybrid SF9_Ant1_904.5_1000~26500

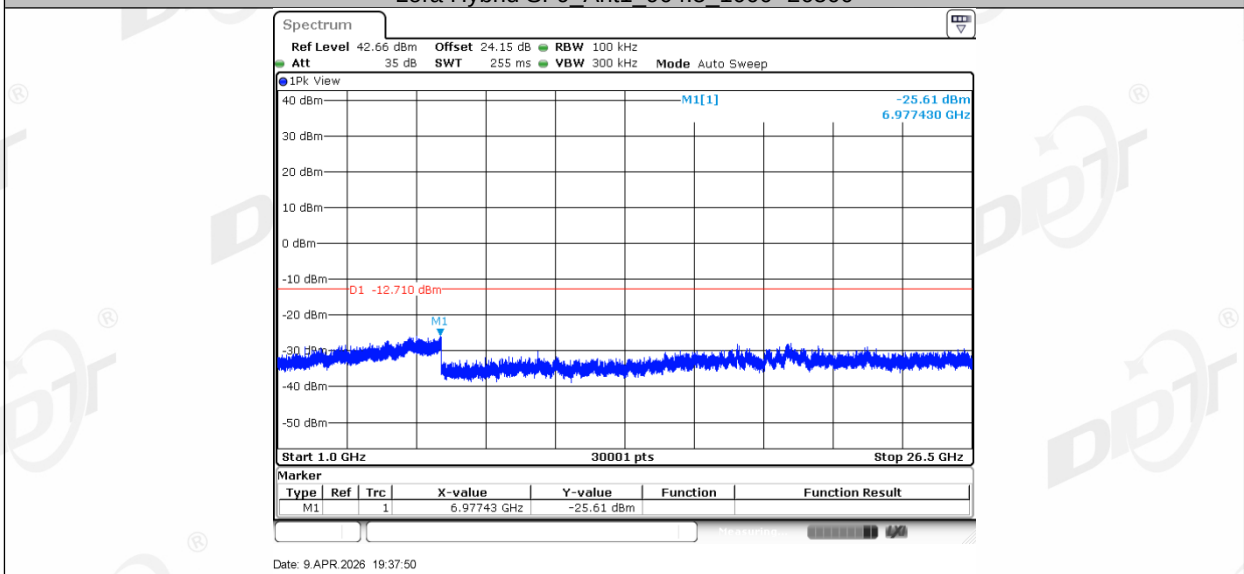


Lora Hybrid SF9_Ant1_905.3_0~Reference

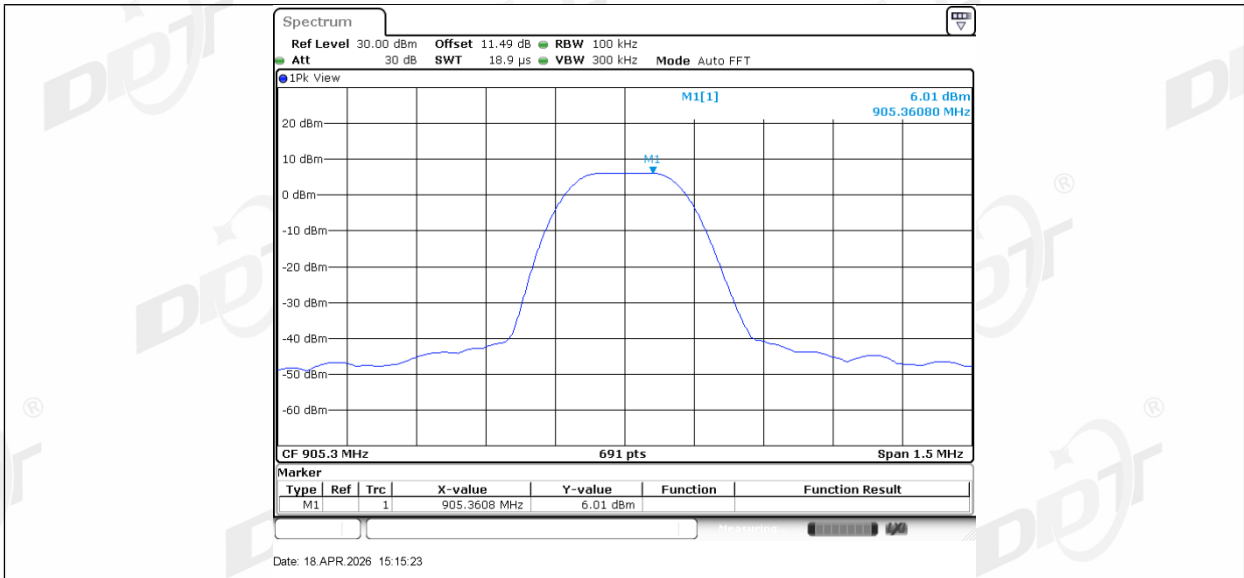


Lora Hybrid SF9_Ant1_905.3_30~1000

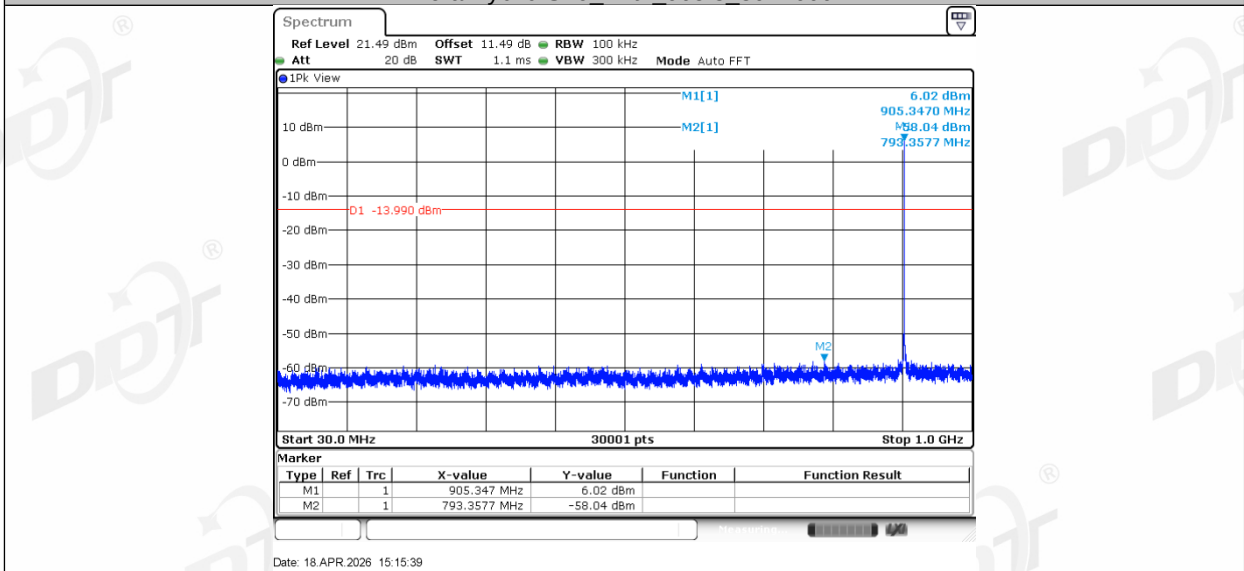


Lora Hybrid SF9_Ant1_905.3_1000~26500

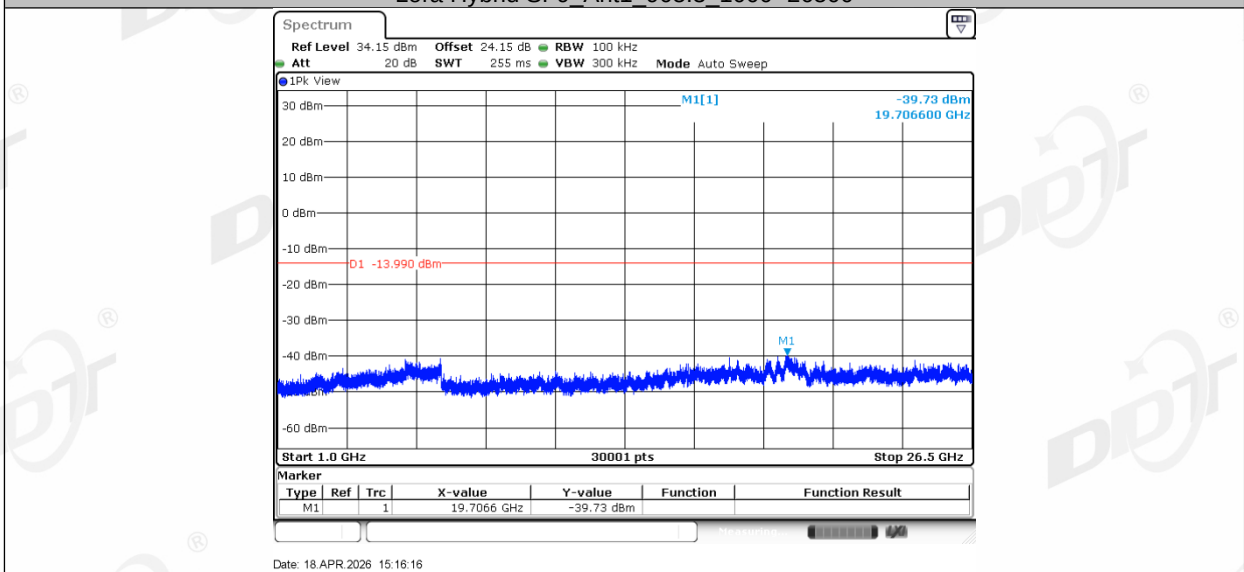


Lora Hybrid SF10_Ant1_903.9_0~Reference

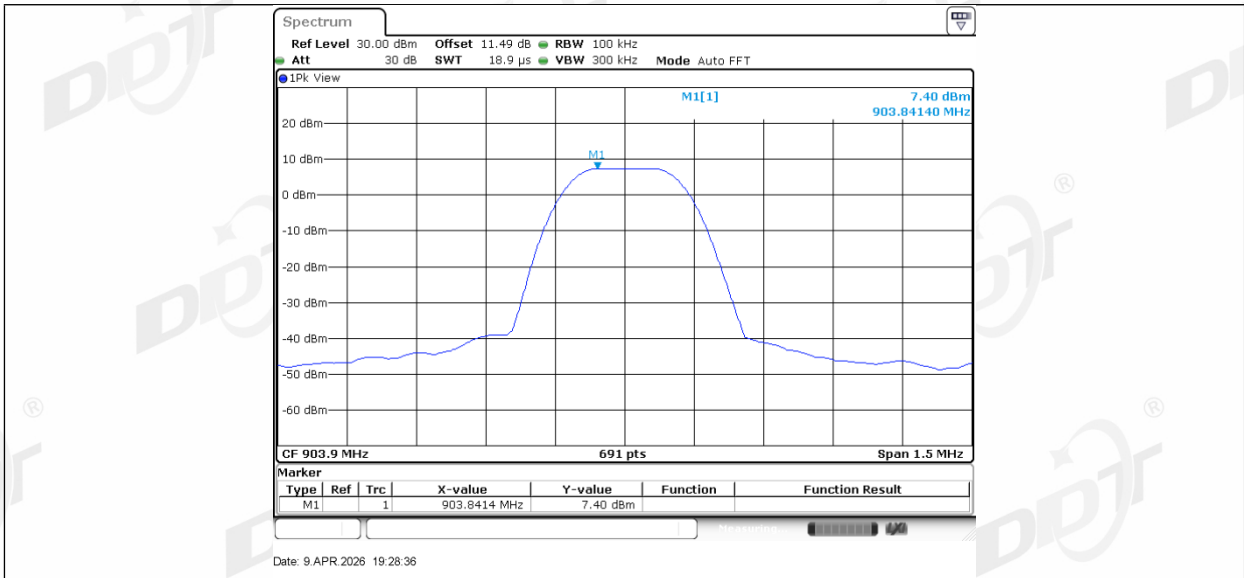


Lora Hybrid SF10_Ant1_903.9_30~1000

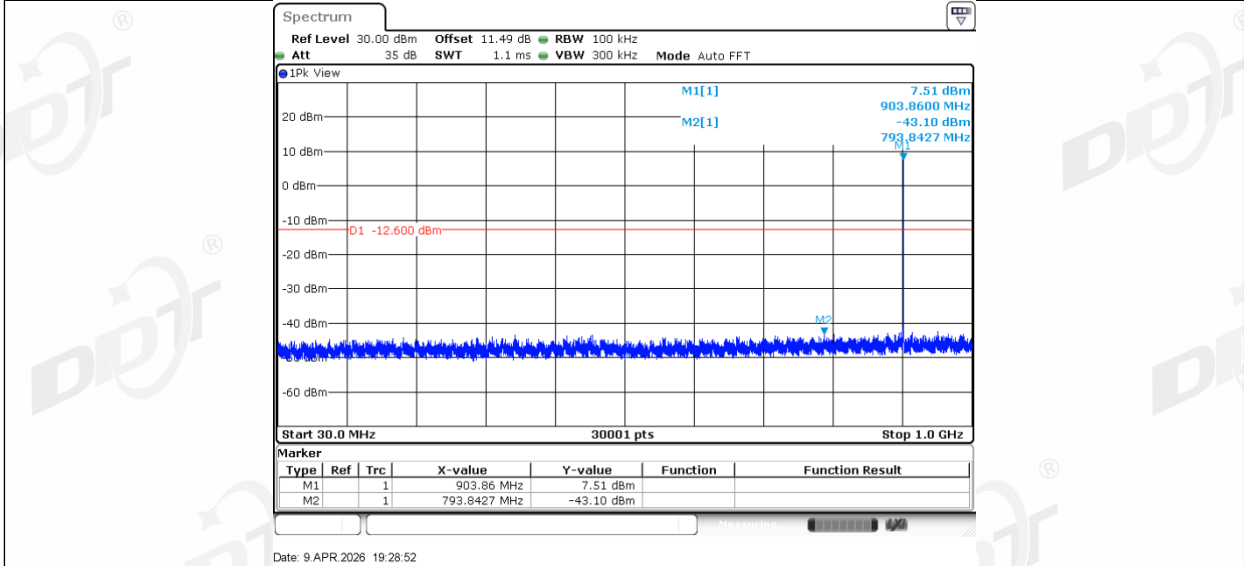


Lora Hybrid SF10_Ant1_903.9_1000~26500

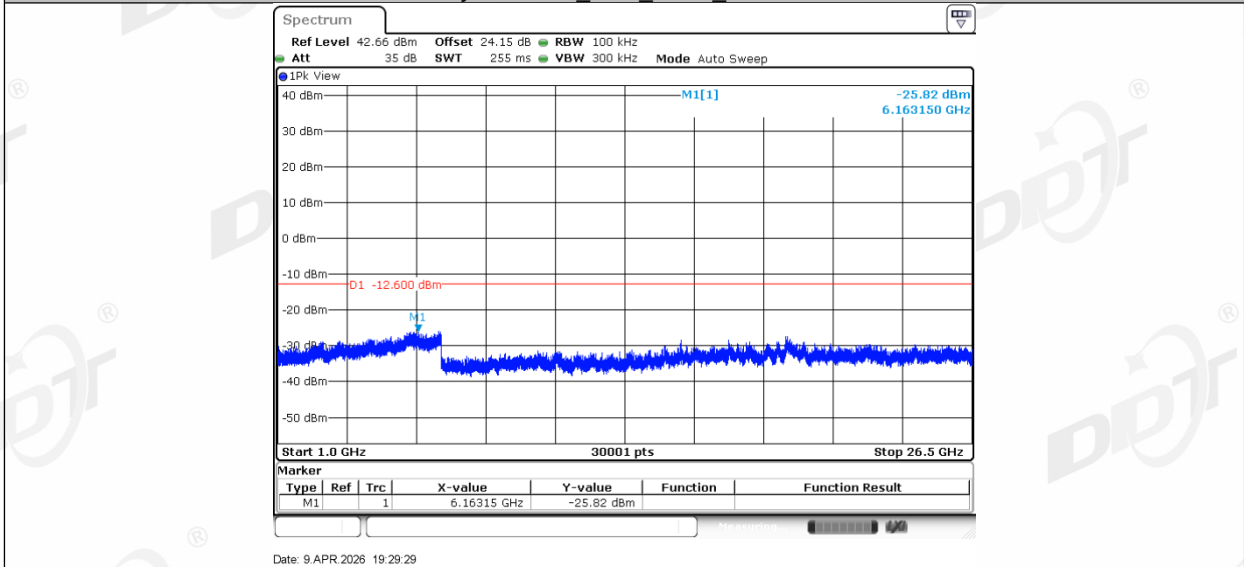


Lora Hybrid SF10_Ant1_904.5_0~Reference

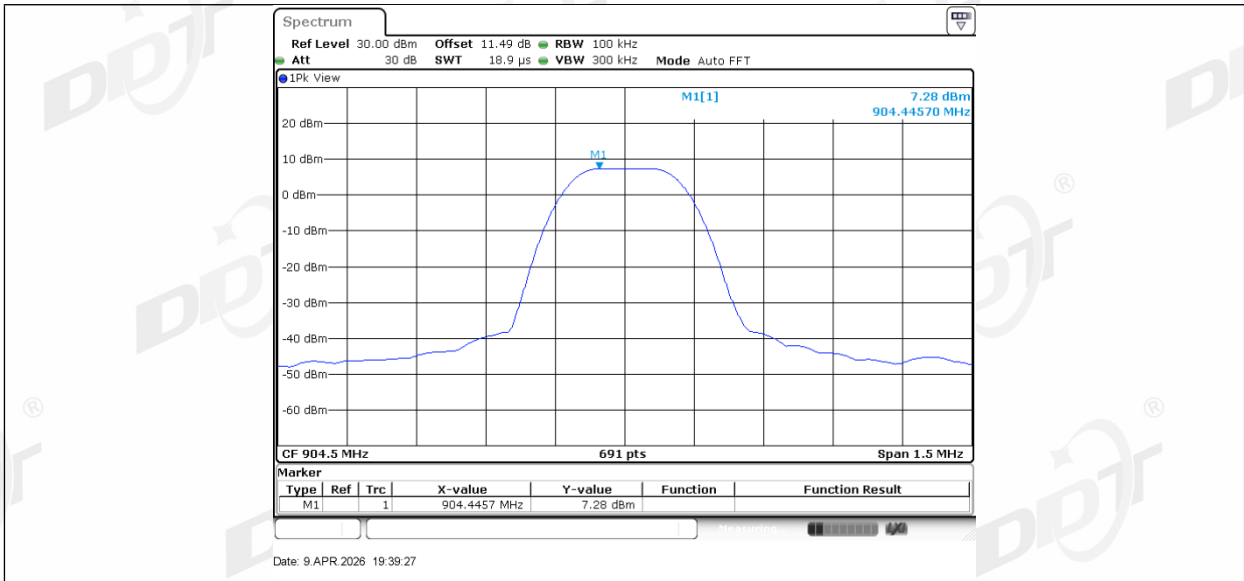


Lora Hybrid SF10_Ant1_904.5_30~1000

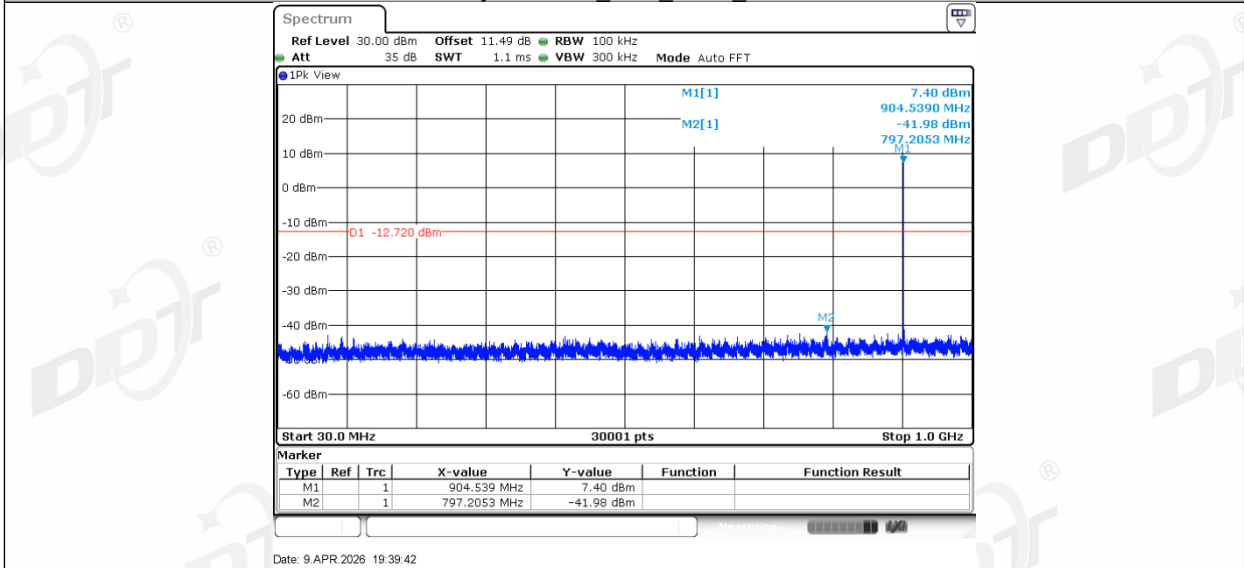


Lora Hybrid SF10_Ant1_904.5_1000~26500

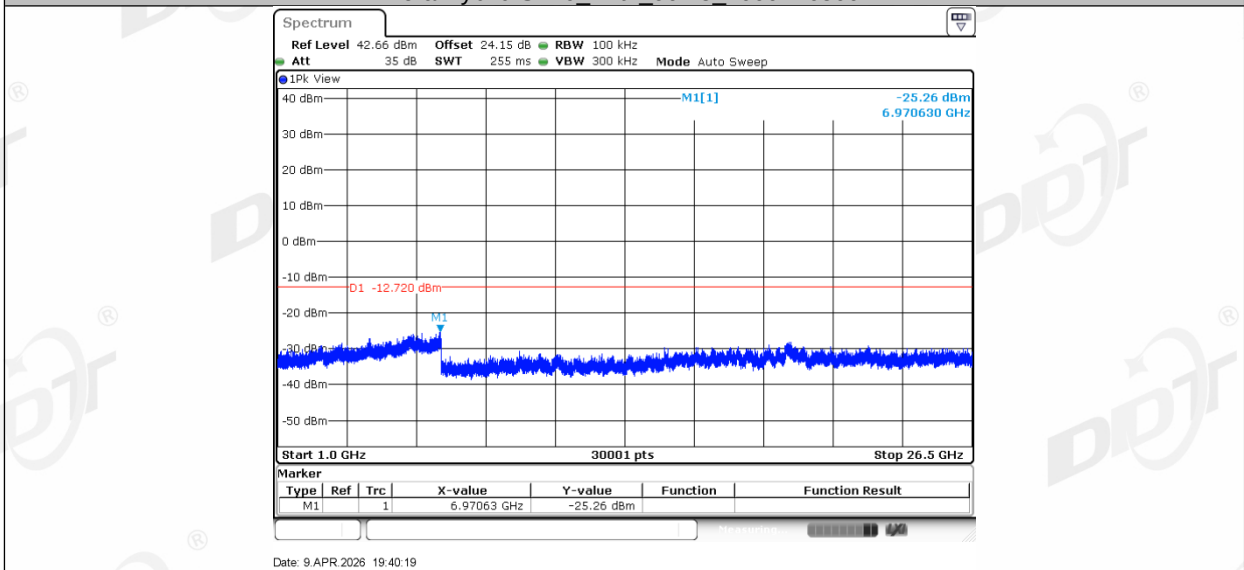


Lora Hybrid SF10_Ant1_905.3_0~Reference

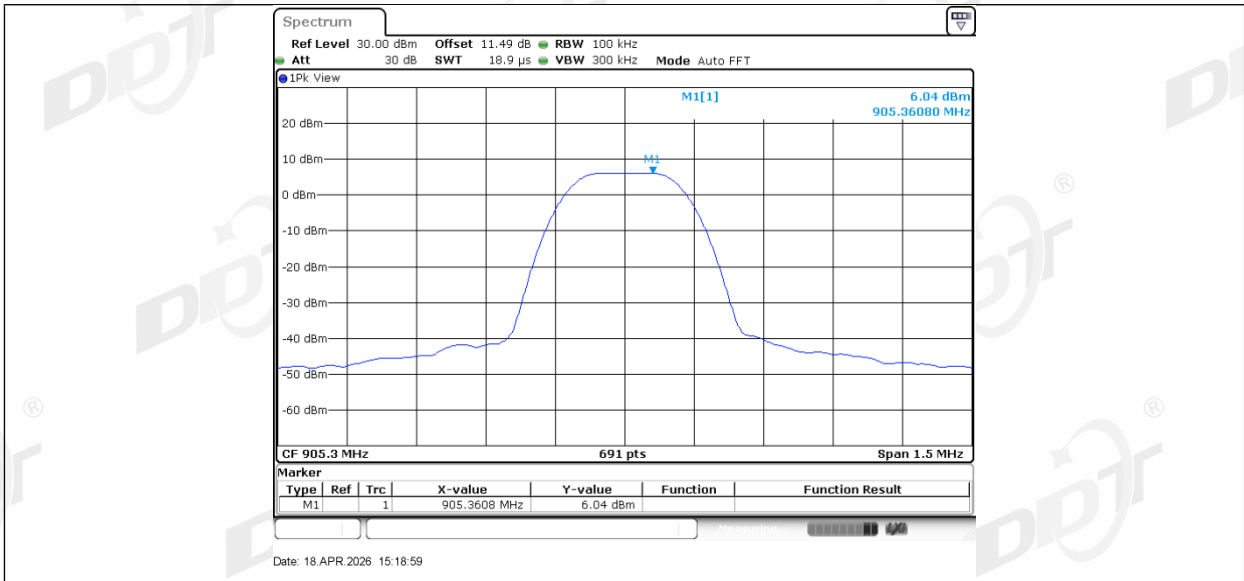



Lora Hybrid SF10_Ant1_905.3_30~1000

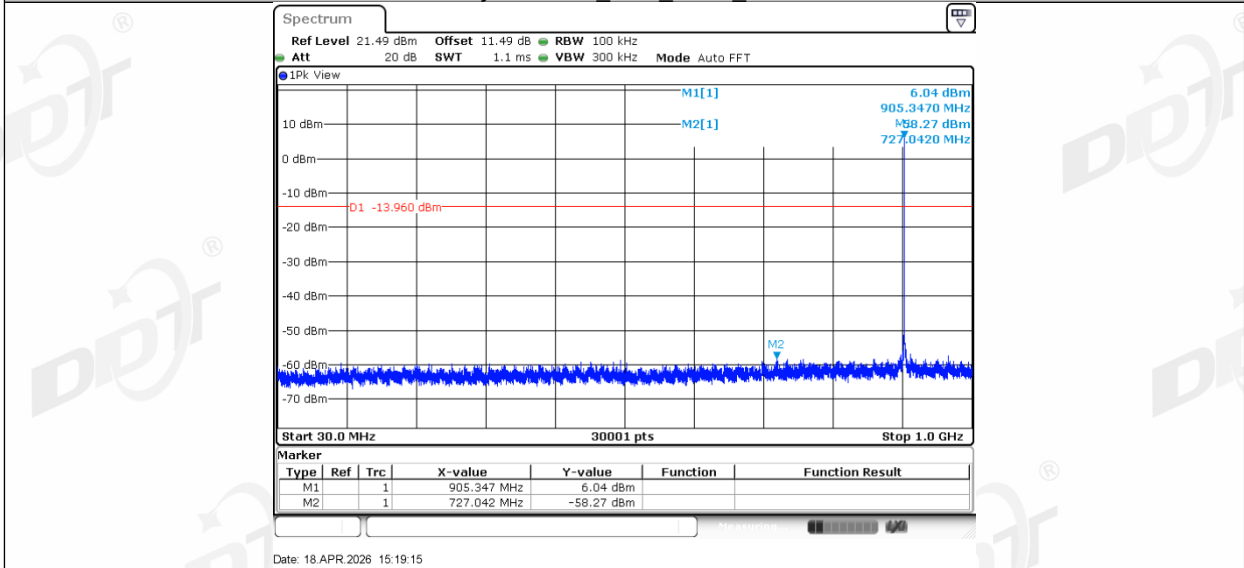


Lora Hybrid SF10_Ant1_905.3_1000~26500

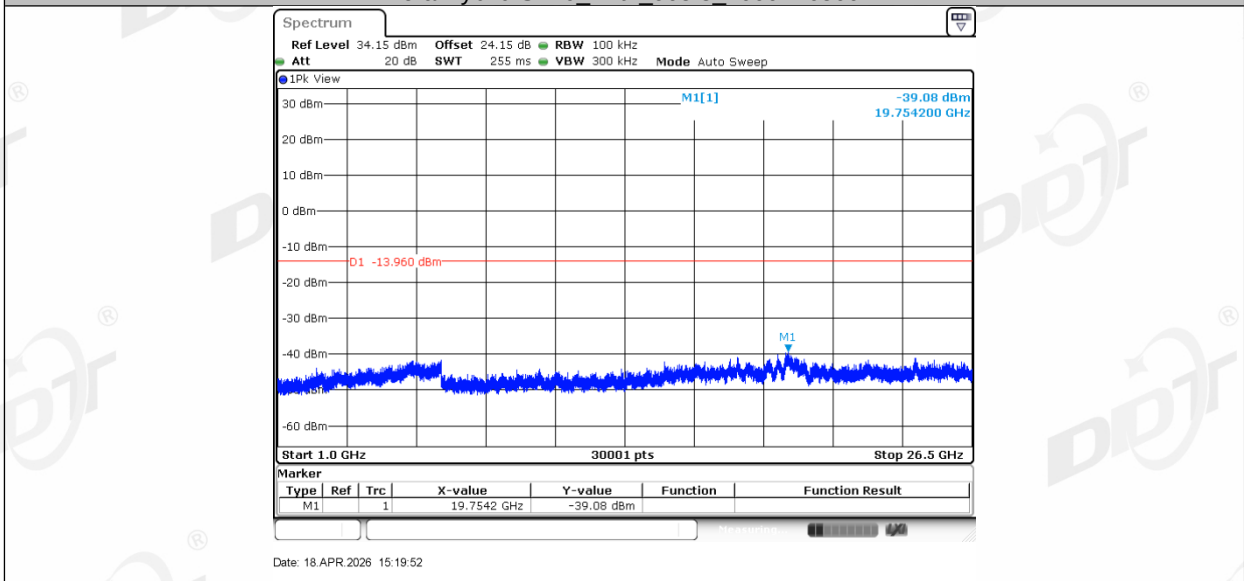

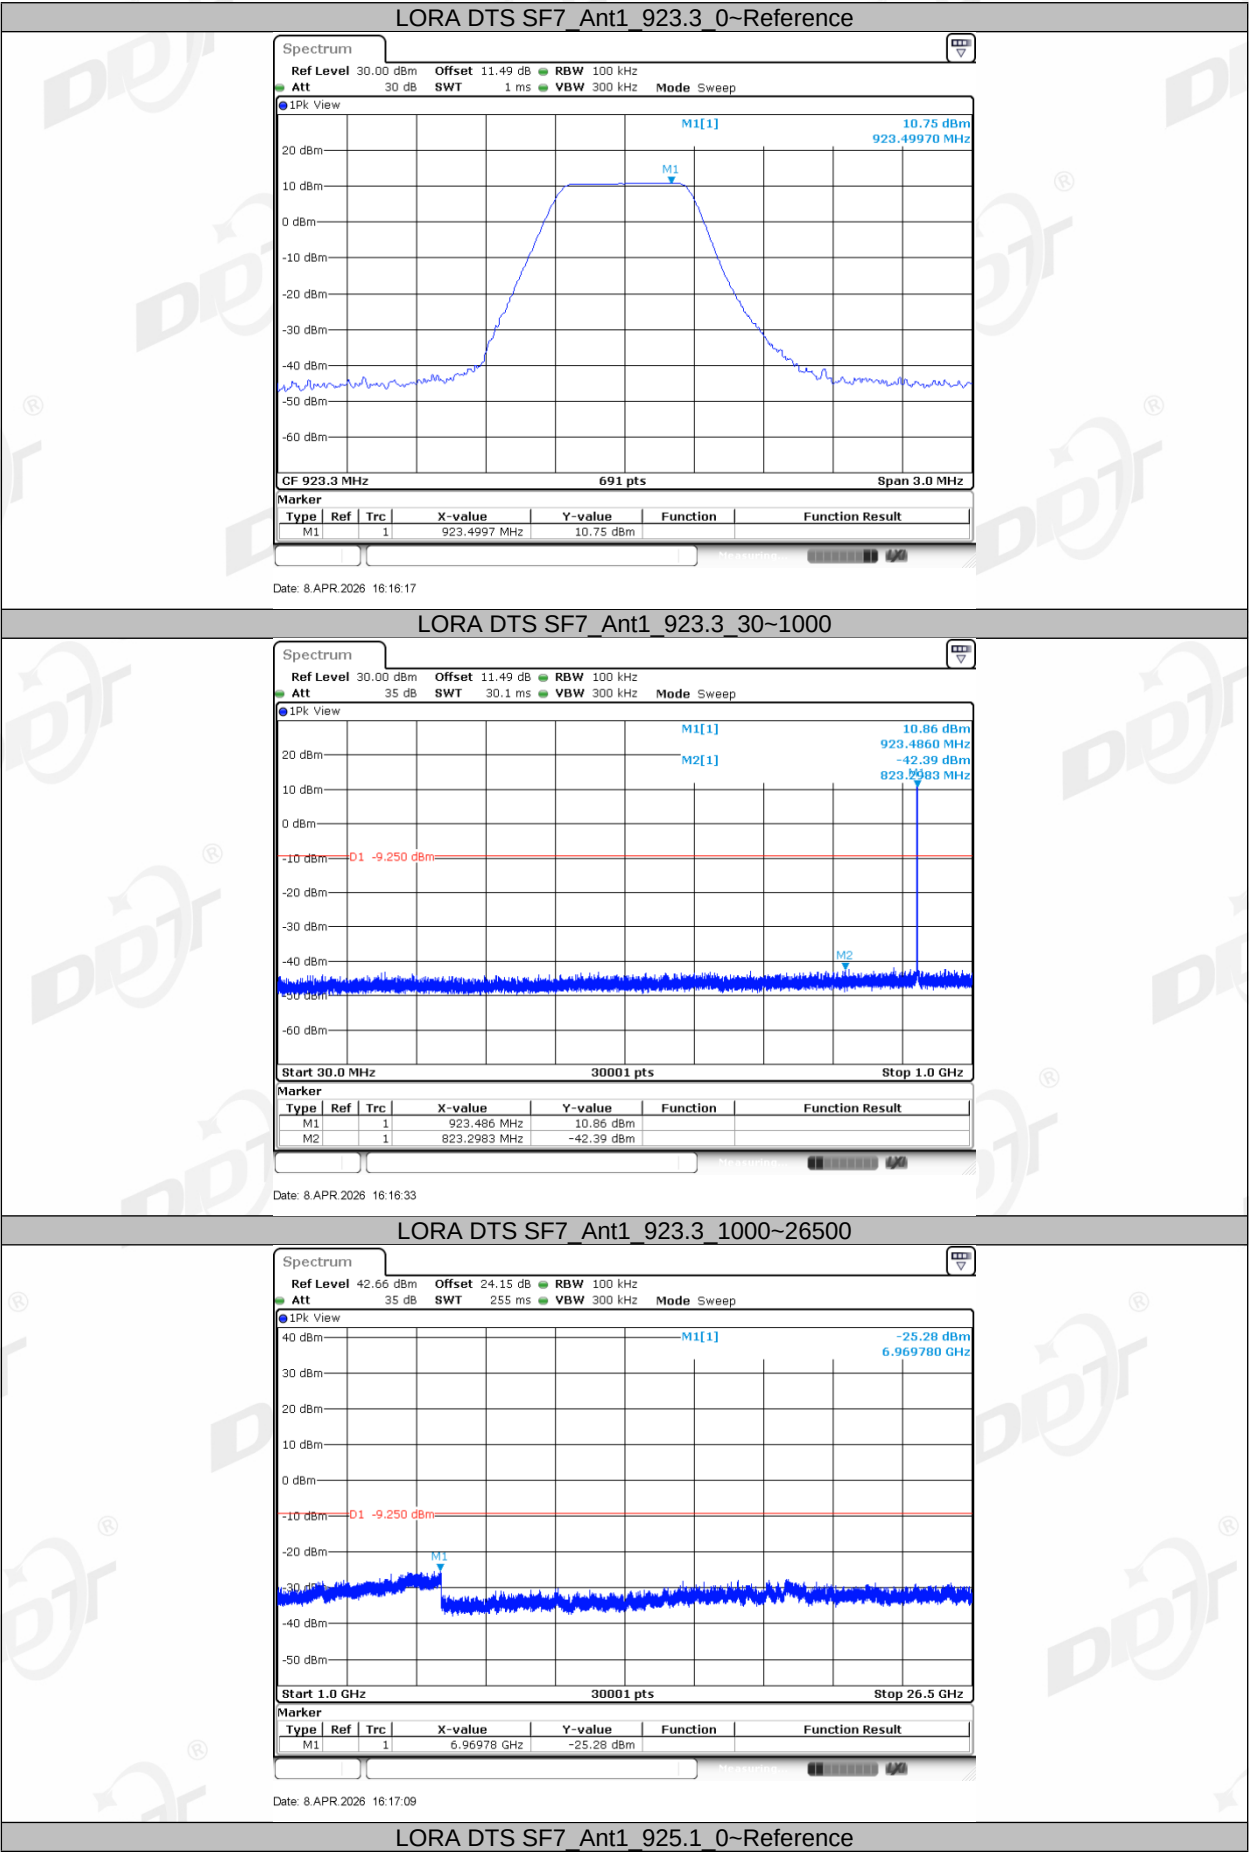


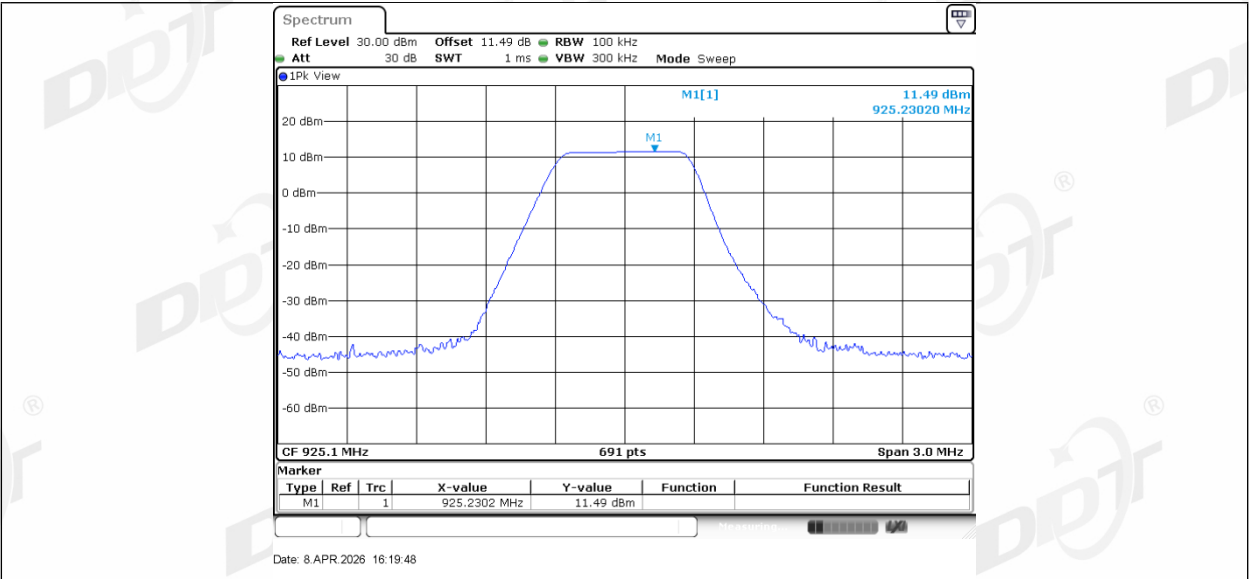


LORA DTS SF7_Ant1_925.1_30~1000

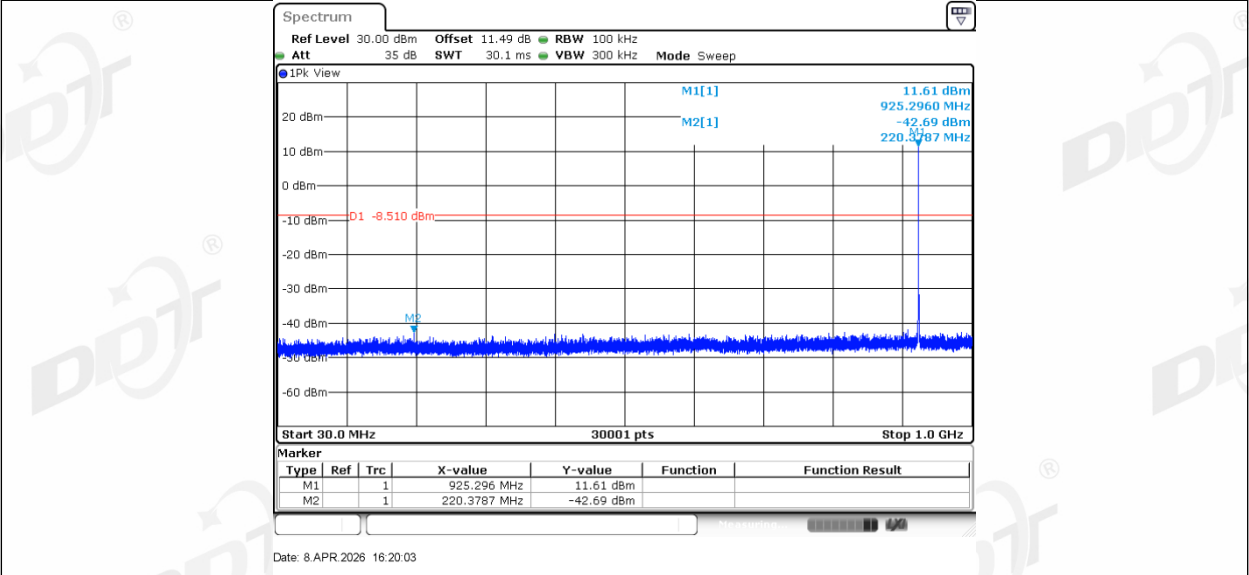


LORA DTS SF7_Ant1_925.1_1000~26500

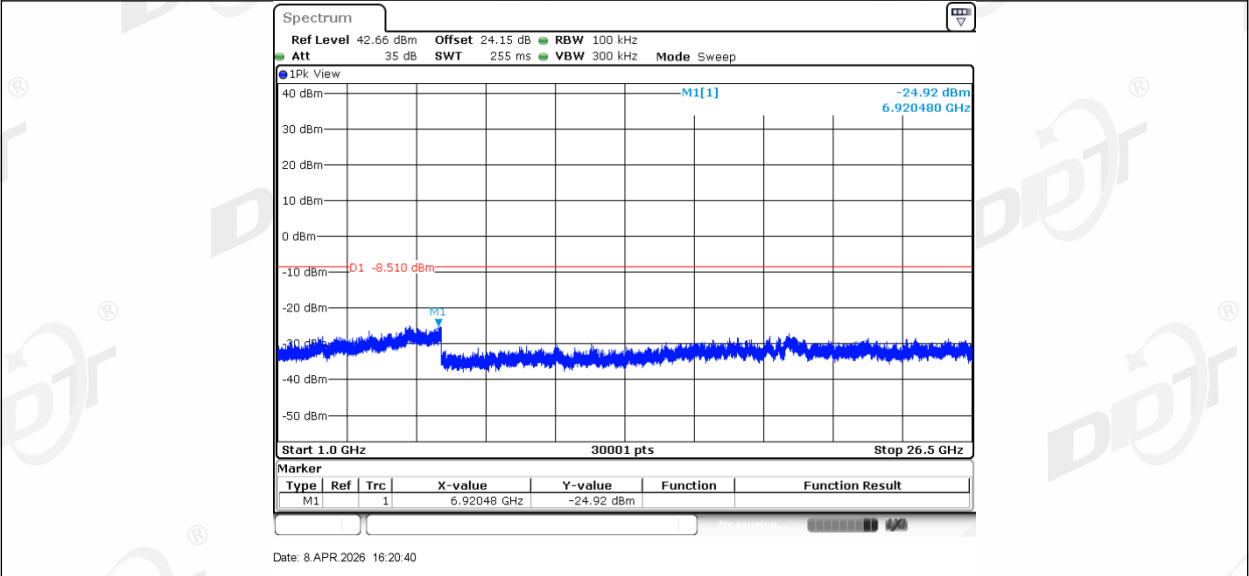


LORA DTS SF7_Ant1_927.5_0~Reference

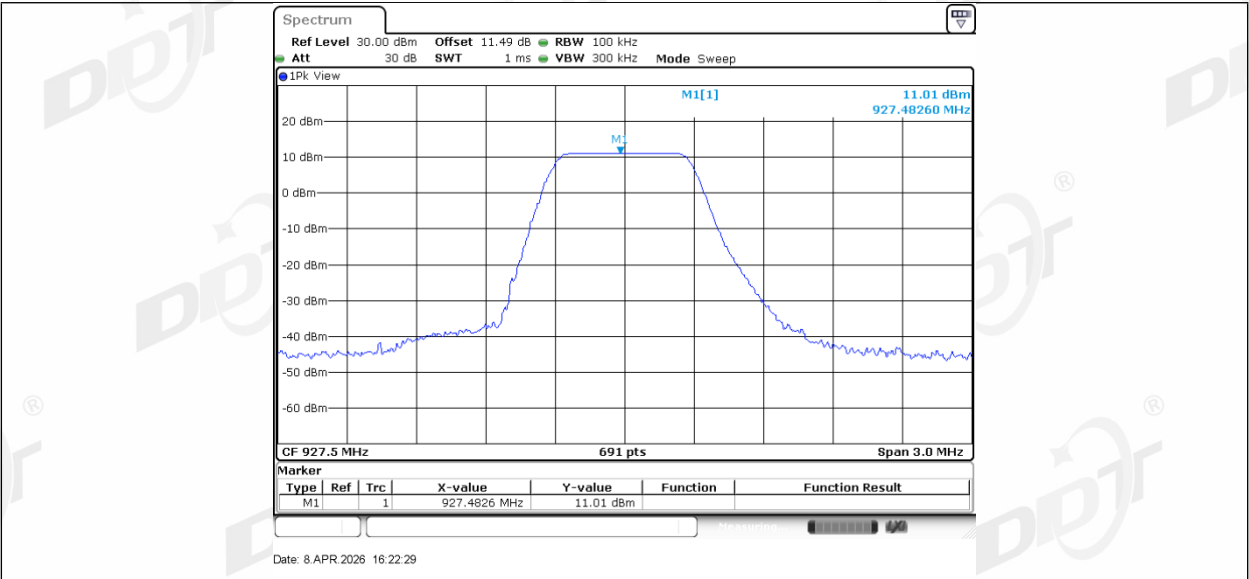


LORA DTS SF7_Ant1_927.5_30~1000

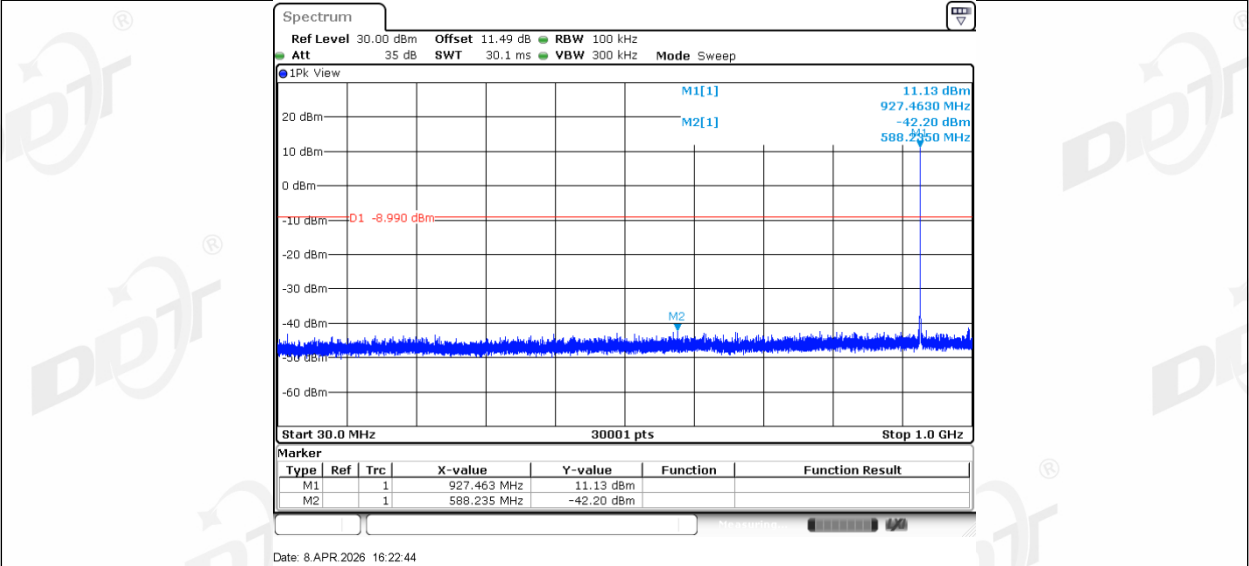


LORA DTS SF7_Ant1_927.5_1000~26500

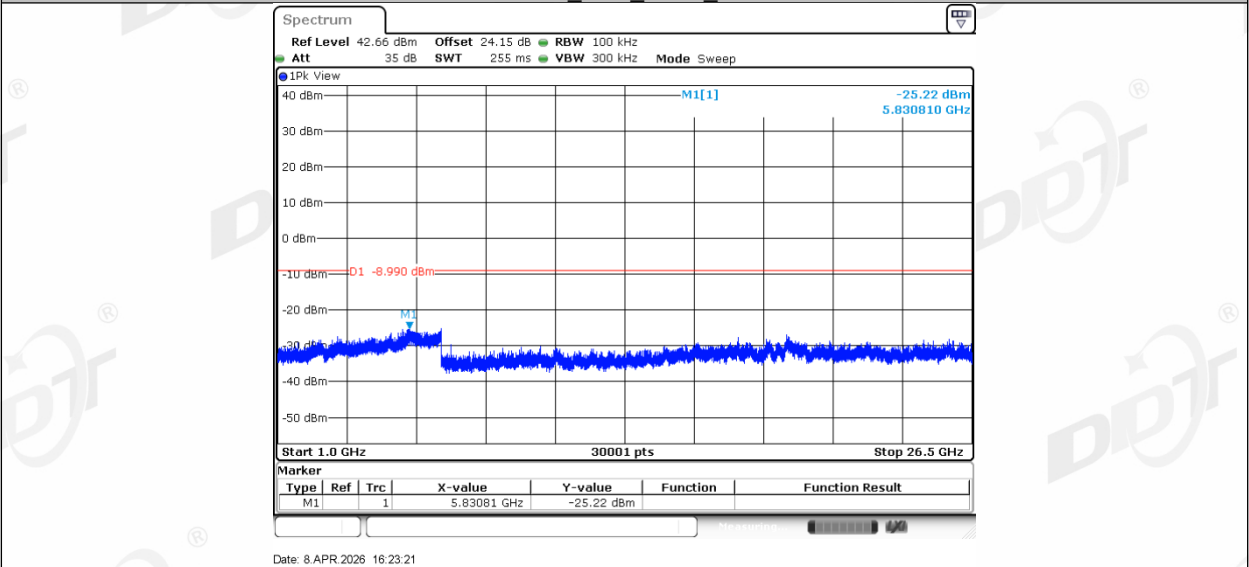


LORA DTS SF12_Ant1_923.3_0~Reference

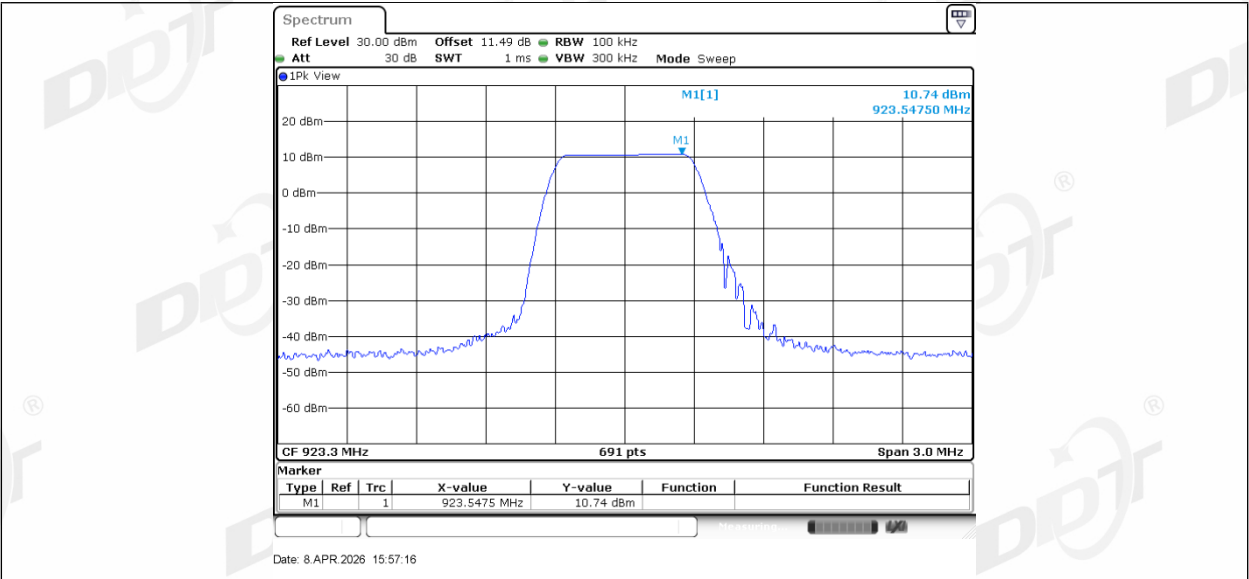


LORA DTS SF12_Ant1_923.3_30~1000

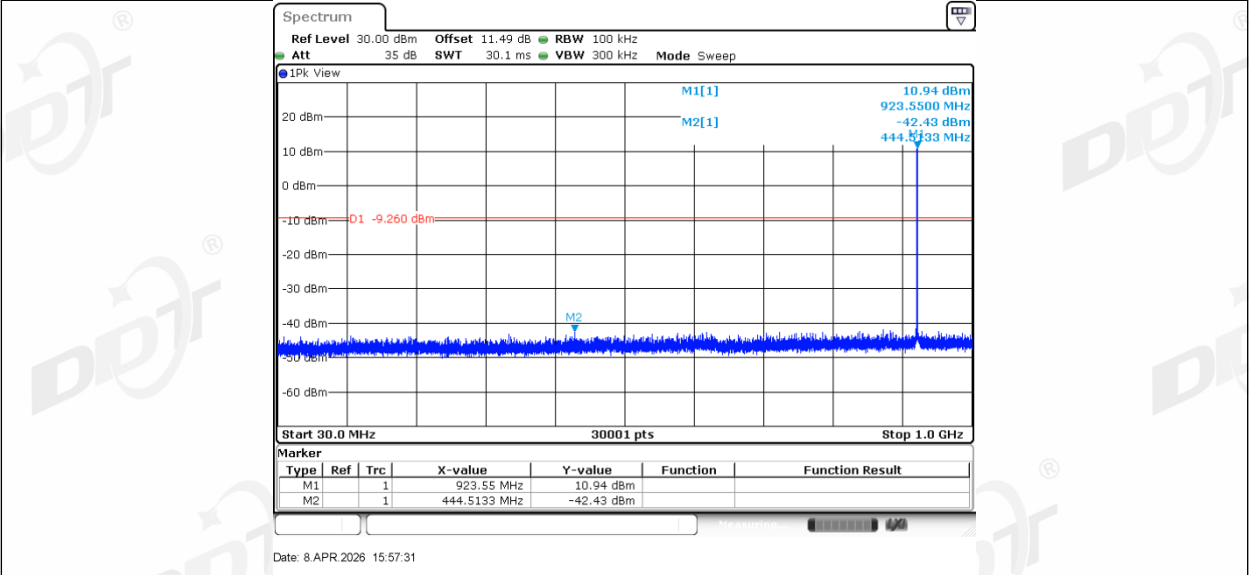


LORA DTS SF12_Ant1_923.3_1000~26500

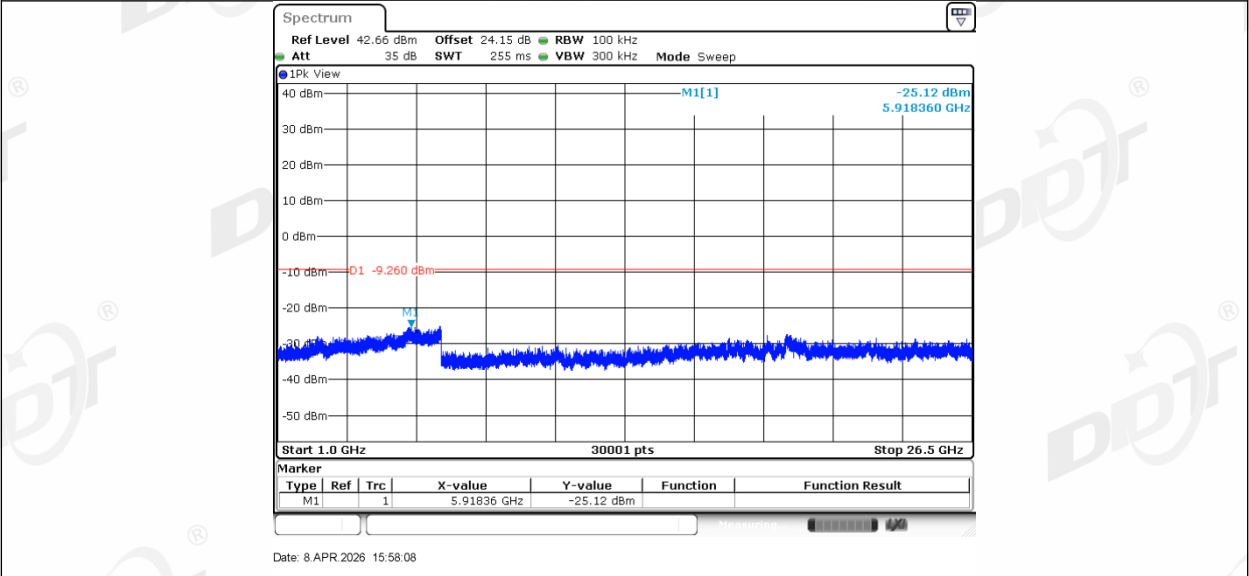


LORA DTS SF12_Ant1_925.1_0~Reference

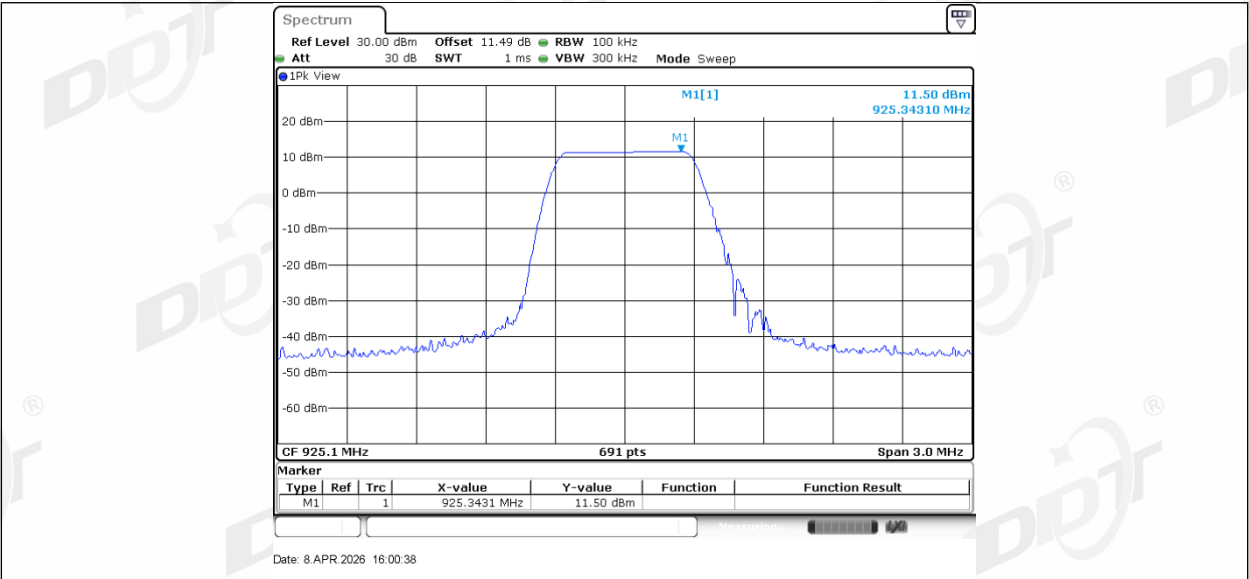


LORA DTS SF12_Ant1_925.1_30~1000

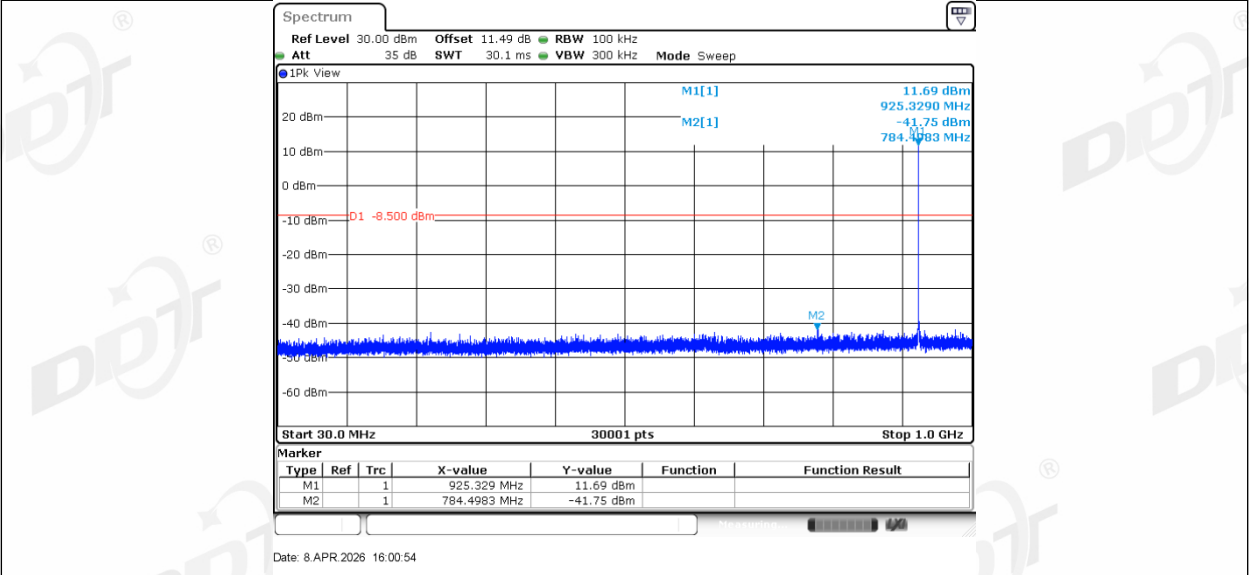


LORA DTS SF12_Ant1_925.1_1000~26500

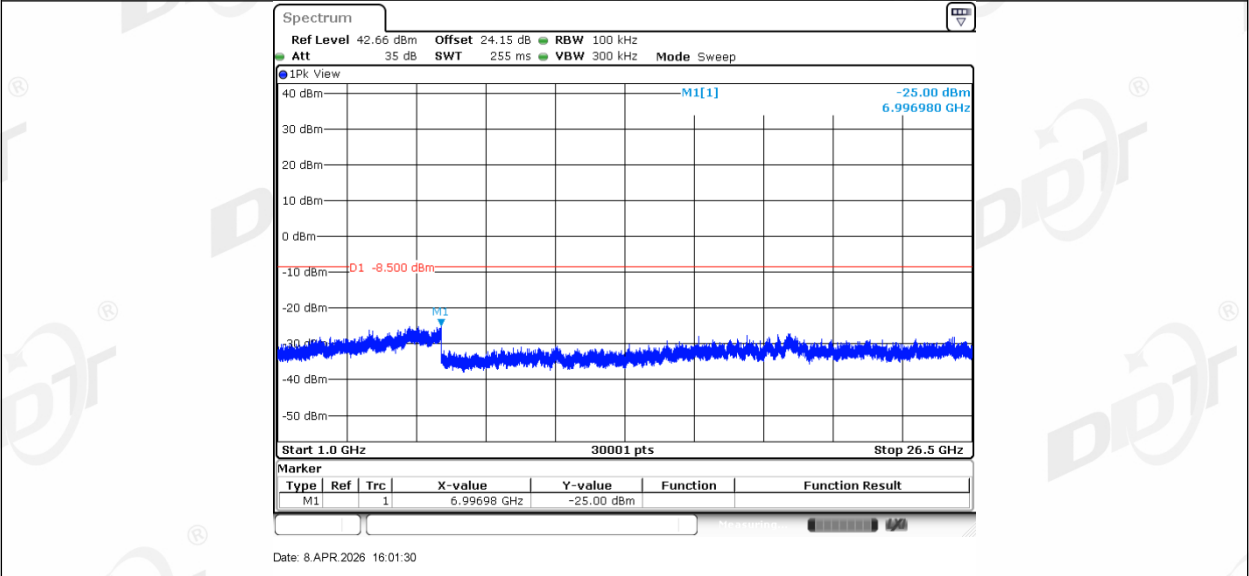


LORA DTS SF12_Ant1_927.5_0~Reference

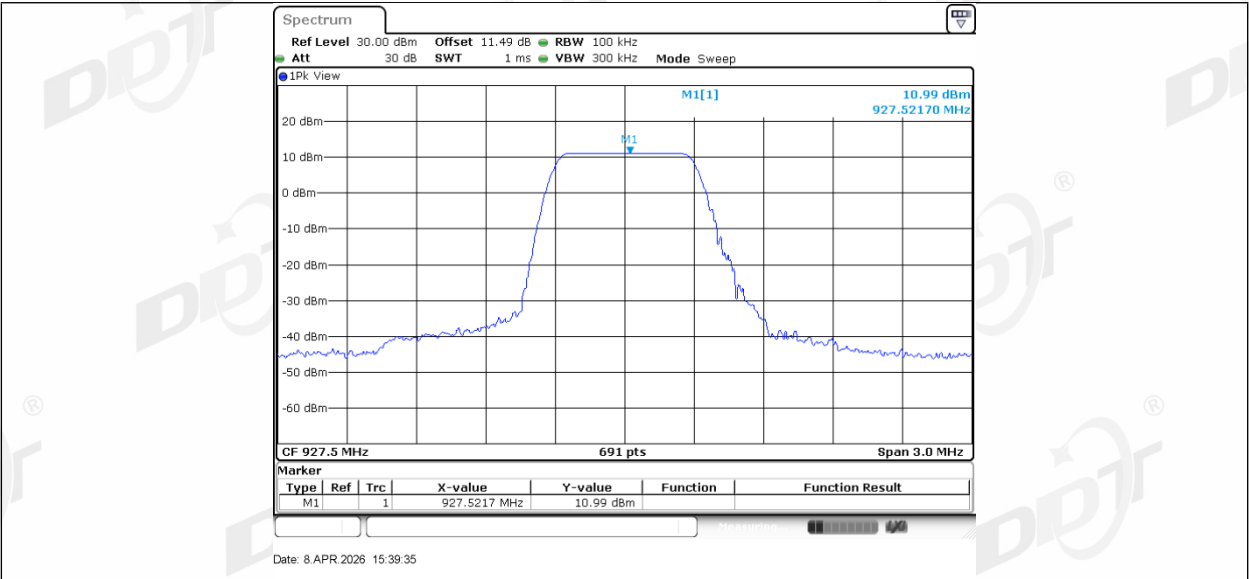


LORA DTS SF12_Ant1_927.5_30~1000

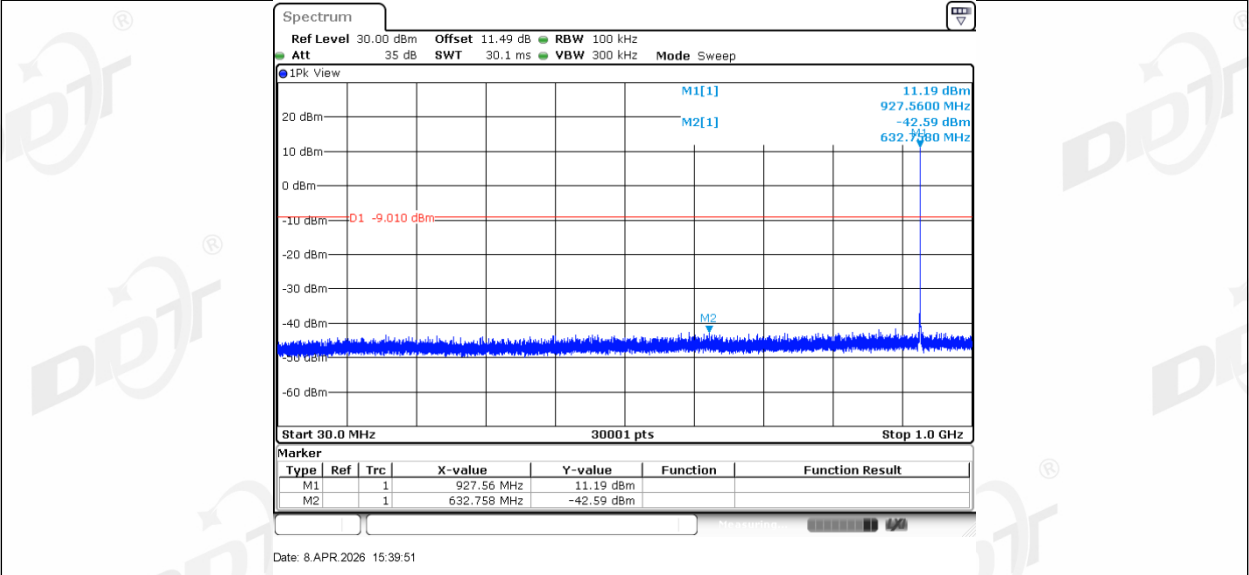


LORA DTS SF12_Ant1_927.5_1000~26500

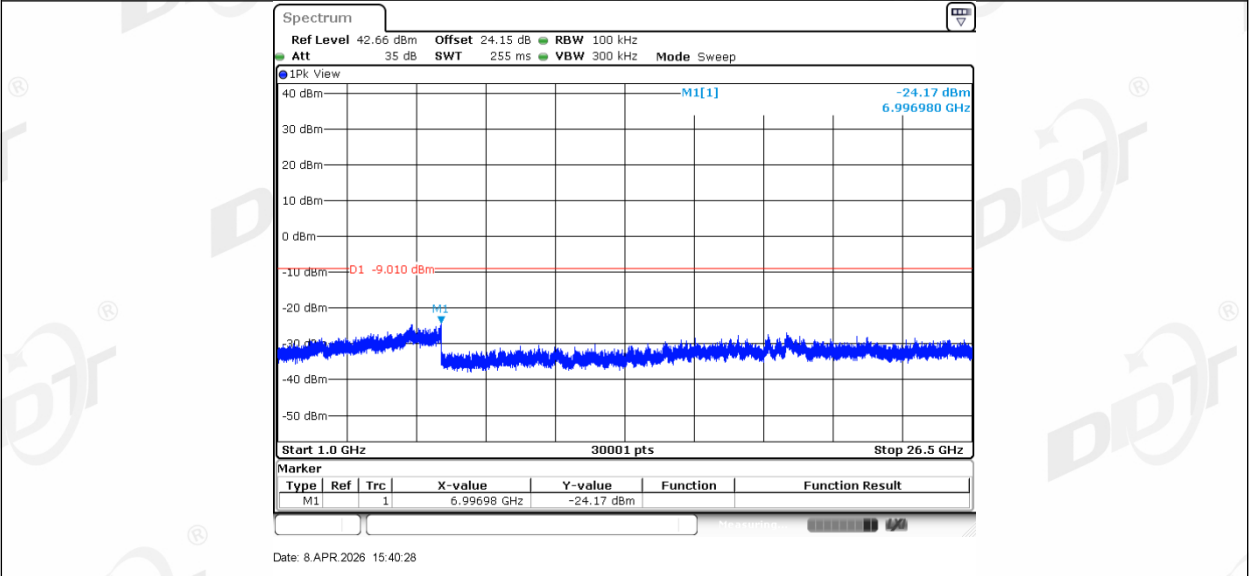


LORA DTS SF8_Ant1_904.6_0~Reference

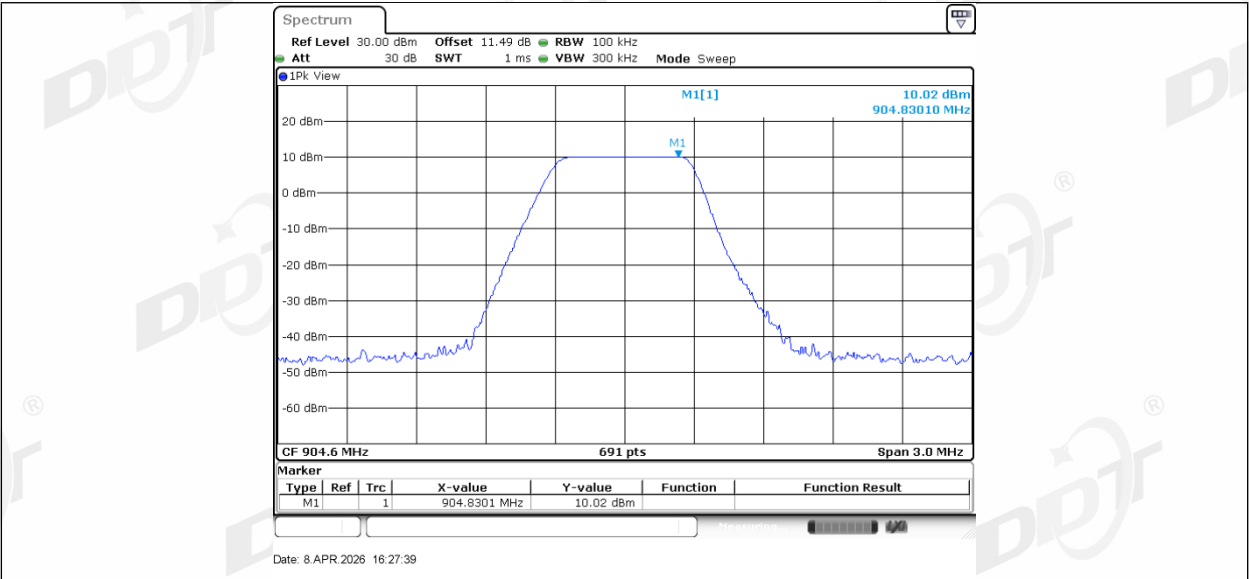

LORA DTS SF8 Ant1 904.6 30~1000

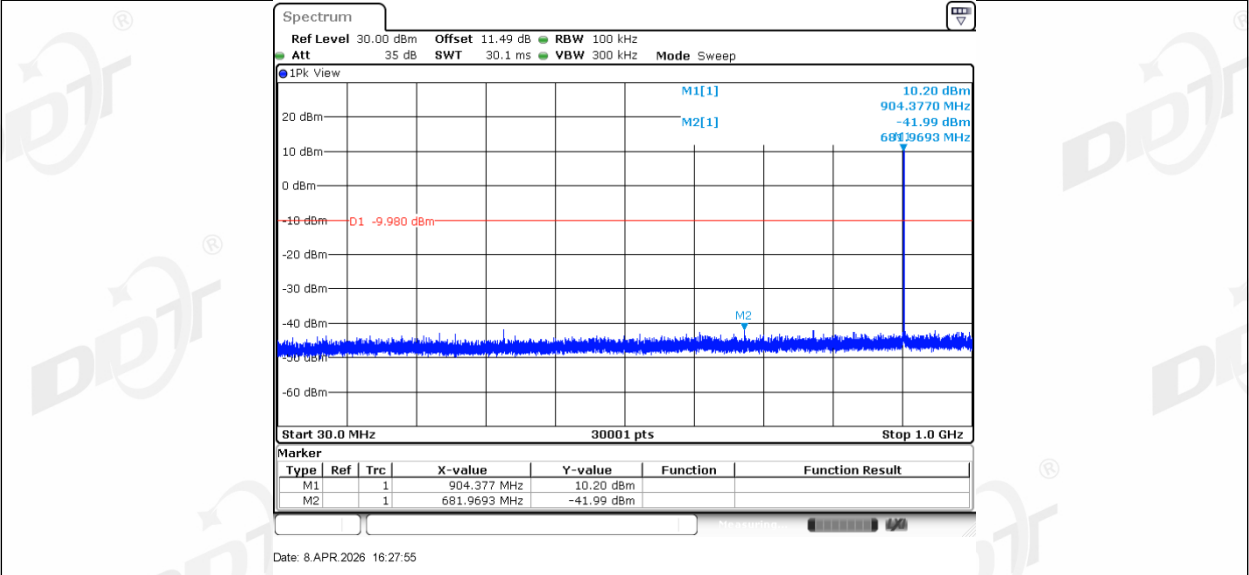

LORA DTS SF8 Ant1 904.6 1000~26500

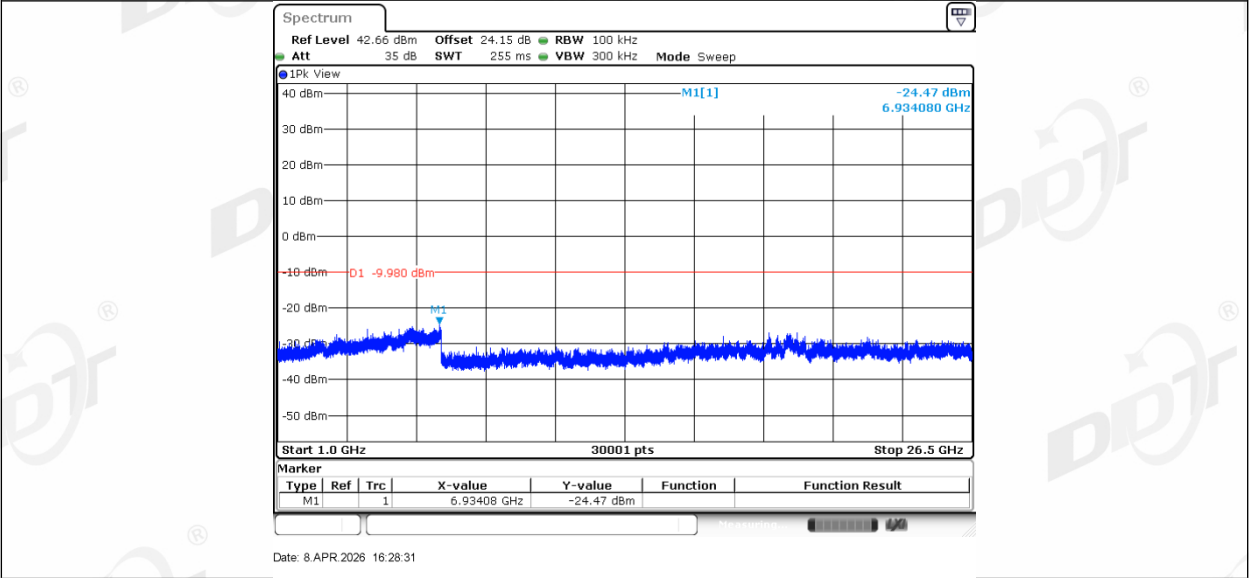

14. Antenna Requirements

14.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For intentional device, according to RSS-Gen issue 5 section 6.8.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

14.2. Result

The antenna used for this product as Antenna information described in section 2.1 of the report, and there is no other antenna than that furnished by the responsible party shall be used with the device.

16. Photos of the EUT

Please refer to DDT-Q26030329-1E appendix I

-----End Report-----