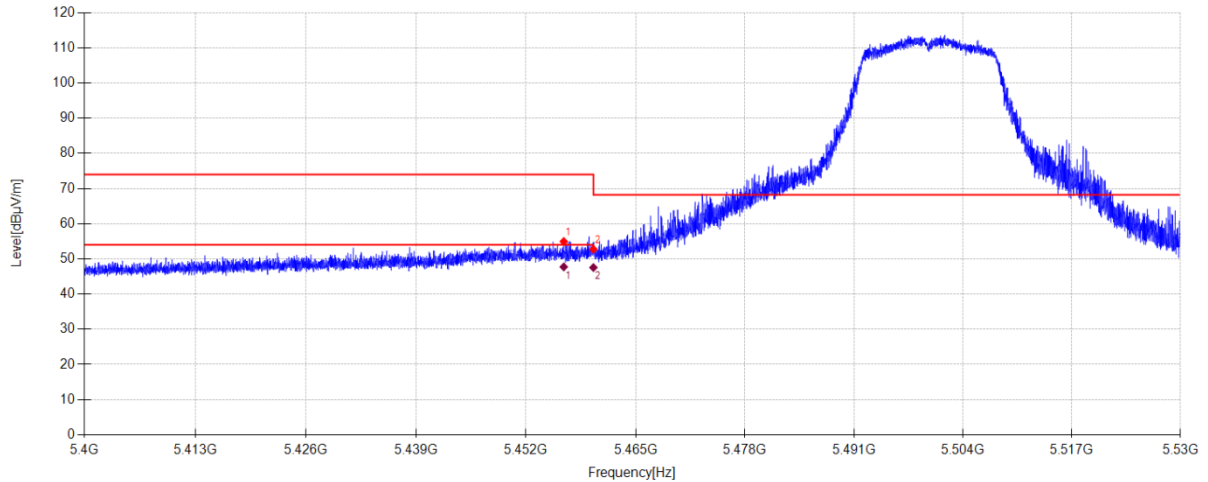


TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-06**Tested By:** Zhong Nan**Test Mode:** TX 11A 5500MHz Mode**Power Supply:** DC 5V**Condition:** Temp:24.7°C;Humi:49.6%**Test Site:** 4# Fully Anechoic Room**File Path:** d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\67**Memo:** Sample Number: S26062423-003**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.485	48.65	33.80	-27.50	54.95	74.00	19.05	PK	Horizontal
2	5460.000	46.43	33.80	-27.50	52.73	68.20	15.47	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.485	41.43	33.80	-27.50	47.73	54.00	6.27	AV	Horizontal
2	5460.000	41.24	33.80	-27.50	47.54	54.00	6.46	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-06

Tested By:

Zhong Nan

Test Mode:

TX 11A 5500MHz Mode

Power Supply:

DC 5V

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\68

Memo:

Sample Number: S26062423-003

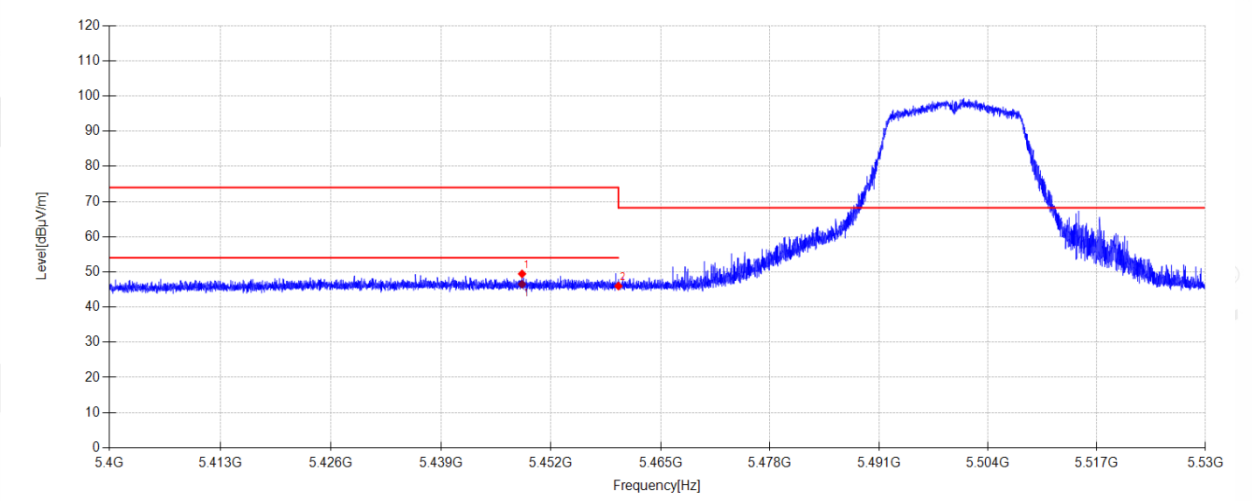

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5448.594	43.16	33.80	-27.52	49.44	74.00	24.56	PK	Vertical
2	5460.000	39.68	33.80	-27.50	45.98	68.20	22.22	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5448.594	40.21	33.80	-27.52	46.49	54.00	7.51	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-06

Tested By:

Zhong Nan

Test Mode:

TX 11A 5700MHz Mode

Power Supply:

DC 5V

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\65

Memo:

Sample Number: S26062423-003

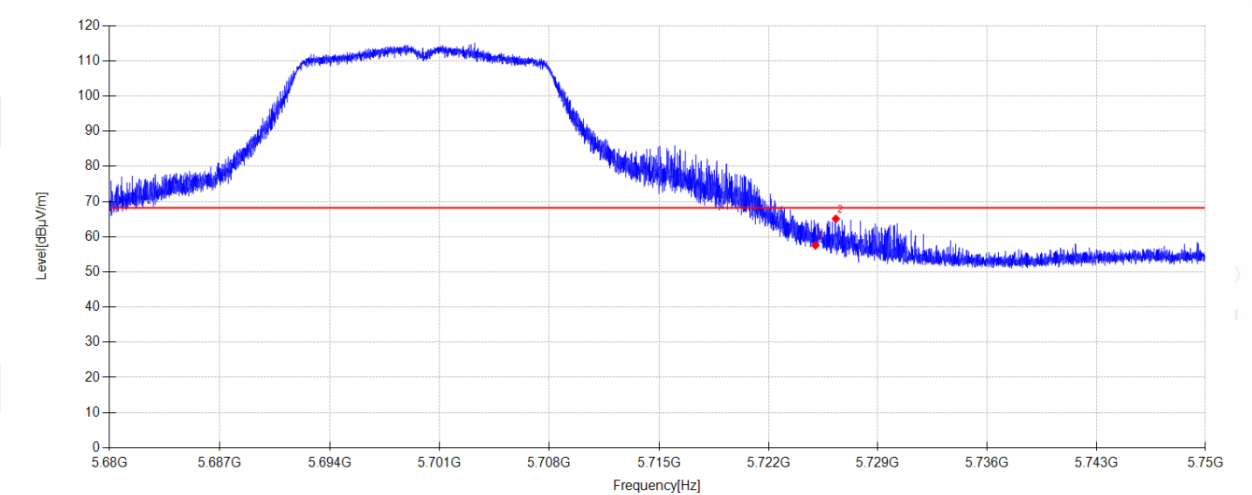

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	50.16	34.30	-26.92	57.54	68.20	10.66	PK	Horizontal
2	5726.305	57.72	34.31	-26.92	65.11	68.20	3.09	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-06

Tested By:

Zhong Nan

Test Mode:

TX 11A 5700MHz Mode

Power Supply:

DC 5V

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\66

Memo:

Sample Number: S26062423-003

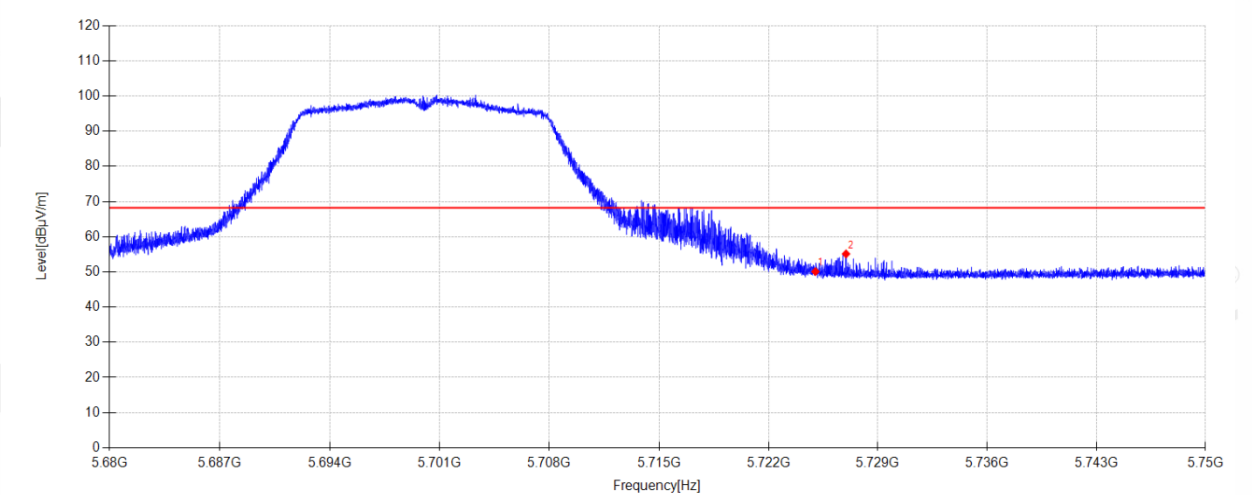


Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.71	34.30	-26.92	50.09	68.20	18.11	PK	Vertical
2	5726.956	47.72	34.31	-26.92	55.11	68.20	13.09	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-06 **Tested By:** Zhong Nan
Test Mode: TX N20 5180MHz Mode **Power Supply:** DC 5V
Condition: Temp:24.7°C;Humi:49.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\79
Memo: Sample Number: S26062423-003

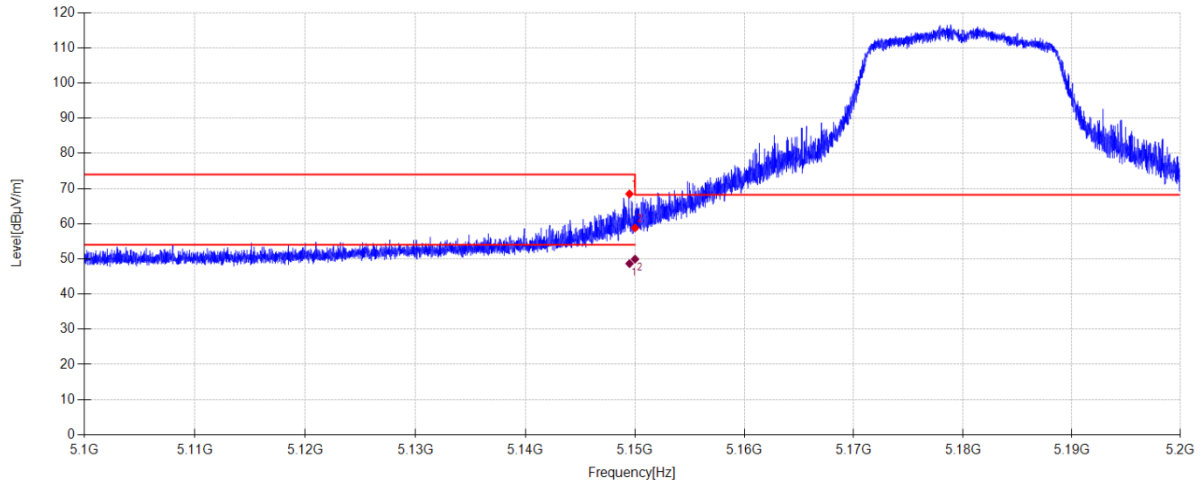**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5149.500	62.98	33.90	-28.41	68.47	74.00	5.53	PK	Horizontal
2	5150.000	53.30	33.90	-28.41	58.79	68.20	9.41	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5149.500	43.17	33.90	-28.41	48.66	54.00	5.34	AV	Horizontal
2	5150.000	44.45	33.90	-28.41	49.94	54.00	4.06	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-06 **Tested By:** Zhong Nan
Test Mode: TX N20 5180MHz Mode **Power Supply:** DC 5V
Condition: Temp:24.7°C;Humi:49.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\80
Memo: Sample Number: S26062423-003

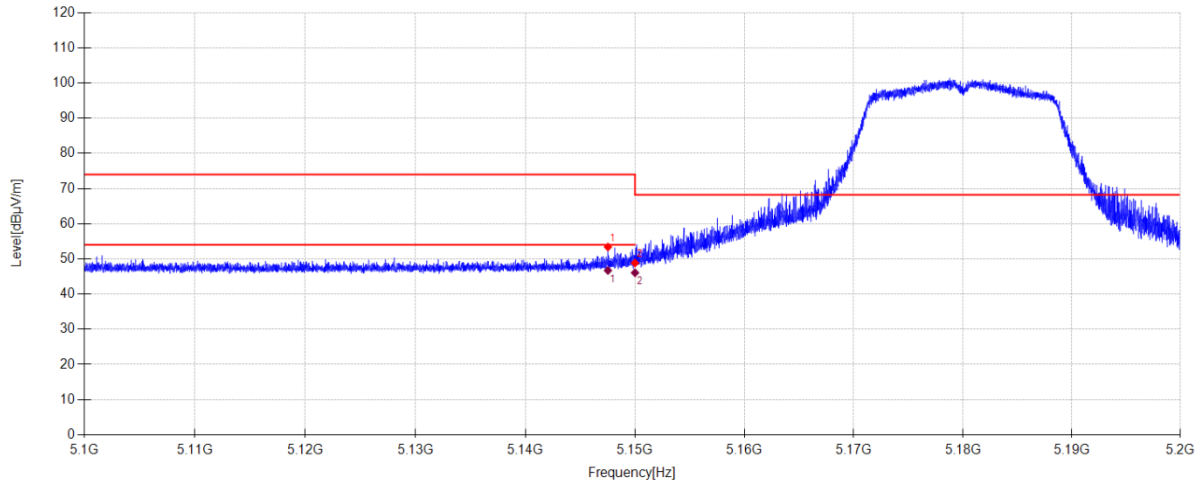**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.530	47.90	33.90	-28.42	53.38	74.00	20.62	PK	Vertical
2	5150.000	43.34	33.90	-28.41	48.83	68.20	19.37	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.530	41.23	33.90	-28.42	46.71	54.00	7.29	AV	Vertical
2	5150.000	40.57	33.90	-28.41	46.06	54.00	7.94	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-06 **Tested By:** Zhong Nan
Test Mode: TX N20 5320MHz Mode **Power Supply:** DC 5V
Condition: Temp:24.7°C;Humi:49.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\77
Memo: Sample Number: S26062423-003

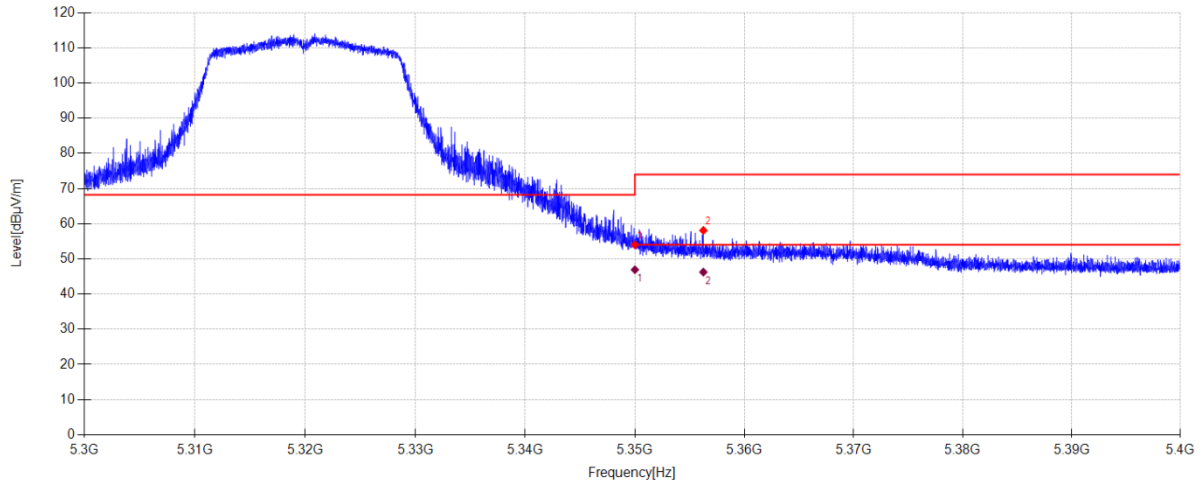

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	47.68	33.70	-27.39	53.99	68.20	14.21	PK	Horizontal
2	5356.250	51.81	33.70	-27.42	58.09	74.00	15.91	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	40.61	33.70	-27.39	46.92	54.00	7.08	AV	Horizontal
2	5356.250	39.97	33.70	-27.42	46.25	54.00	7.75	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-06

Tested By:

Zhong Nan

Test Mode:

TX N20 5320MHz Mode

Power Supply:

DC 5V

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\78

Memo:

Sample Number: S26062423-003

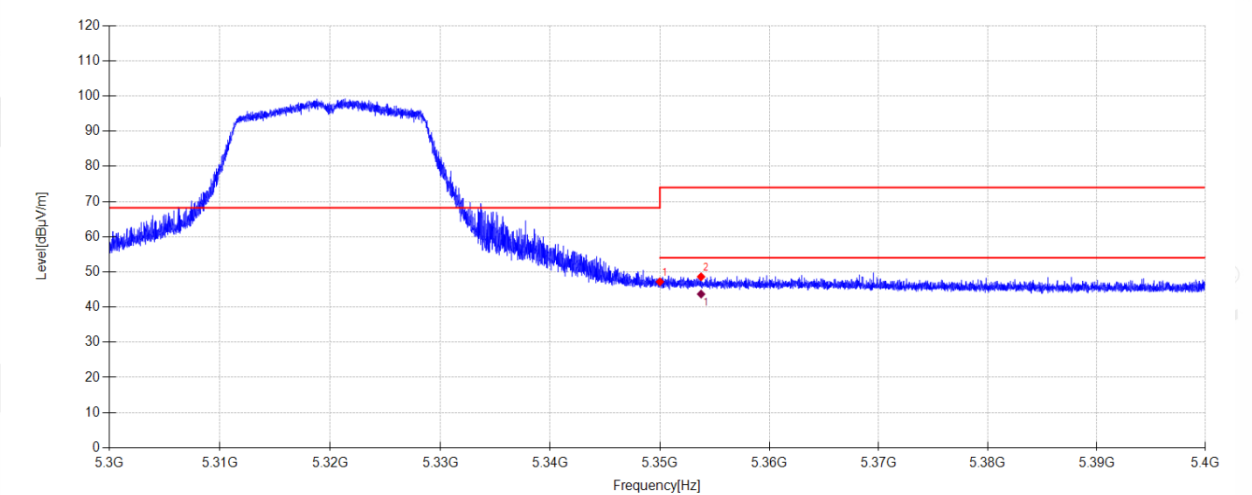

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	40.89	33.70	-27.39	47.20	68.20	21.00	PK	Vertical
2	5353.760	42.32	33.70	-27.41	48.61	74.00	25.39	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5353.760	37.41	33.70	-27.41	43.70	54.00	10.30	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-06

Tested By:

Zhong Nan

Test Mode:

TX N20 5500MHz Mode

Power Supply:

DC 5V

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\75

Memo:

Sample Number: S26062423-003

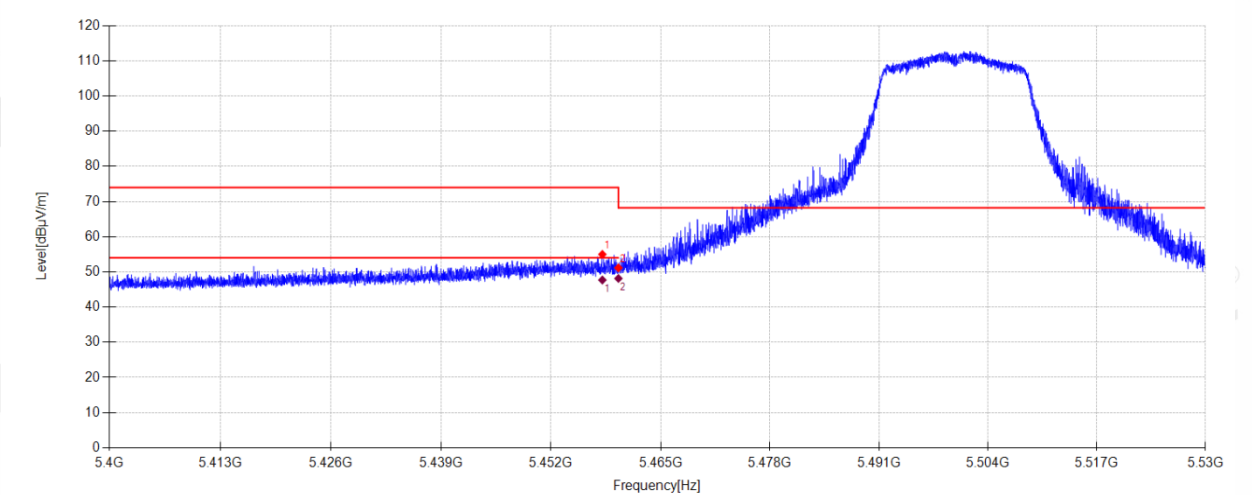

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.097	48.68	33.80	-27.50	54.98	74.00	19.02	PK	Horizontal
2	5460.000	44.85	33.80	-27.50	51.15	68.20	17.05	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.097	41.39	33.80	-27.50	47.69	54.00	6.31	AV	Horizontal
2	5460.000	41.84	33.80	-27.50	48.14	54.00	5.86	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-06

Tested By:

Zhong Nan

Test Mode:

TX N20 5500MHz Mode

Power Supply:

DC 5V

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\76

Memo:

Sample Number: S26062423-003

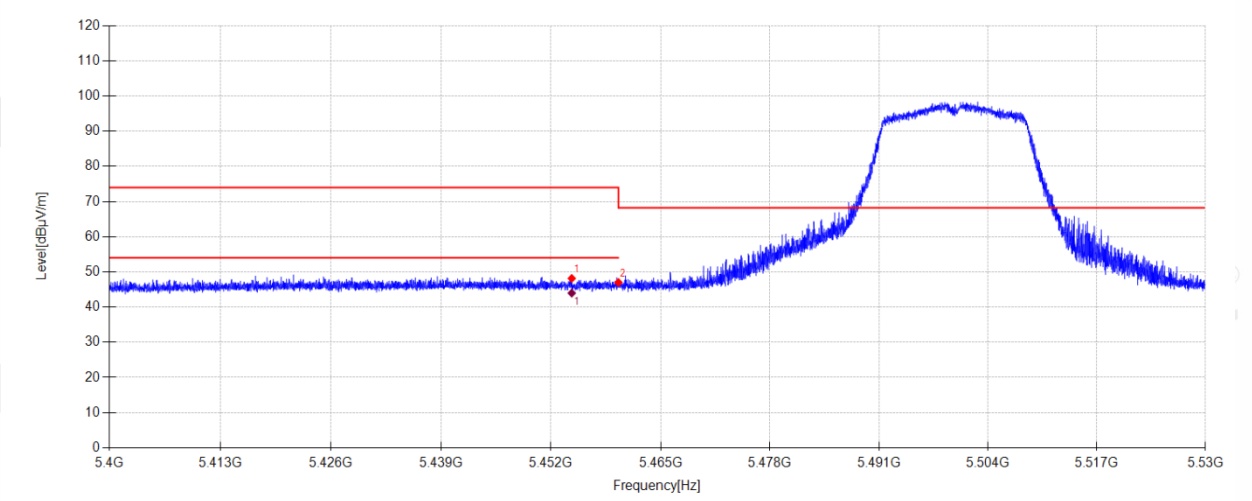

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.470	41.86	33.80	-27.51	48.15	74.00	25.85	PK	Vertical
2	5460.000	40.70	33.80	-27.50	47.00	68.20	21.20	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.470	37.68	33.80	-27.51	43.97	54.00	10.03	AV	Vertical

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-06

Tested By:

Zhong Nan

Test Mode:

TX N20 5700MHz Mode

Power Supply:

DC 5V

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\73

Memo:

Sample Number: S26062423-003

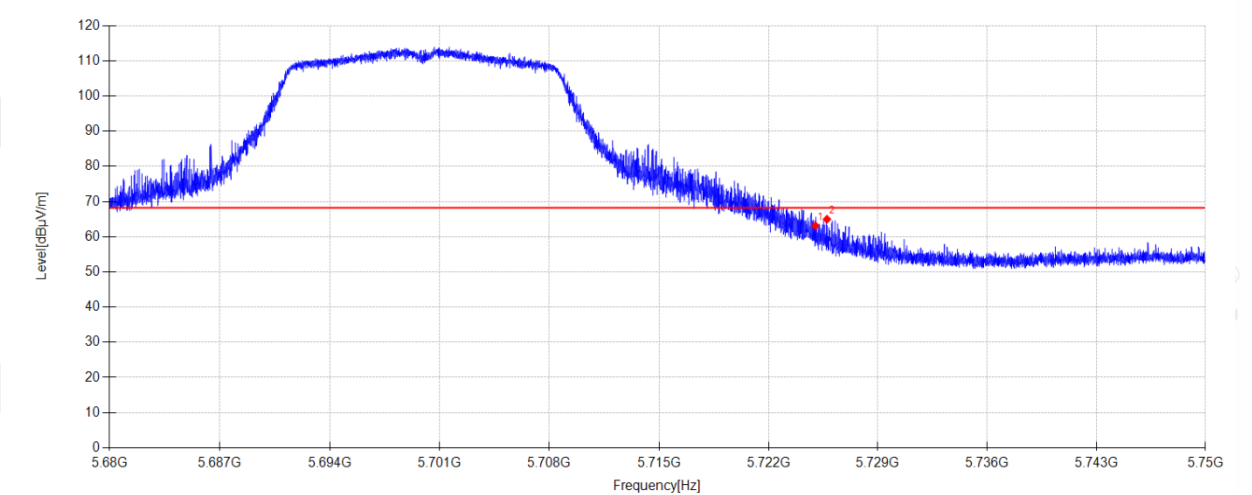

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	55.74	34.30	-26.92	63.12	68.20	5.08	PK	Horizontal
2	5725.738	57.60	34.30	-26.92	64.98	68.20	3.22	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-06

Tested By:

Zhong Nan

Test Mode:

TX N20 5700MHz Mode

Power Supply:

DC 5V

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\74

Memo:

Sample Number: S26062423-003

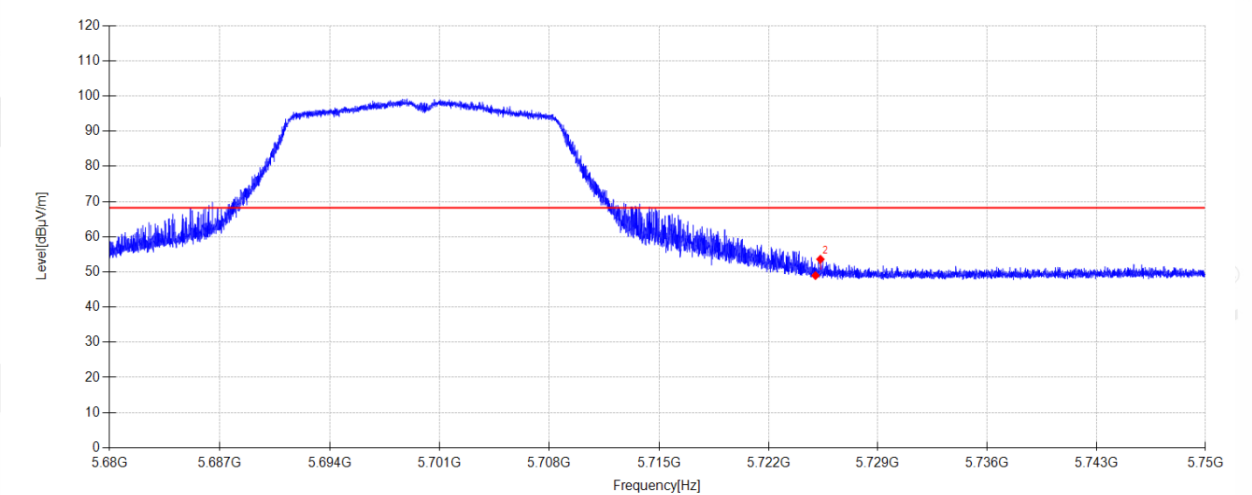

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.57	34.30	-26.92	48.95	68.20	19.25	PK	Vertical
2	5725.318	46.22	34.30	-26.92	53.60	68.20	14.60	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-07

Tested By: Cao Jie

Test Mode: TX N40 5190MHz Mode


Power Supply: DC 5V

Condition: Temp:24.7°C;Humi:49.6%

Test Site: 4# Fully Anechoic Room

File Path: d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\81

Memo: Sample Number: S26062423-003

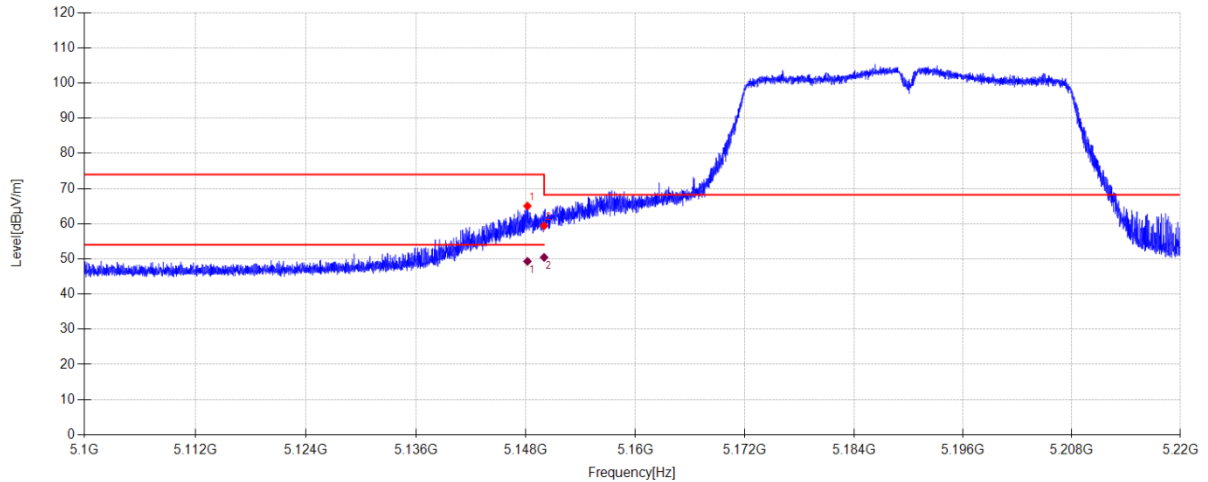

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.180	59.54	33.90	-28.42	65.02	74.00	8.98	PK	Horizontal
2	5150.000	53.90	33.90	-28.40	59.40	68.20	8.80	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.178	43.82	33.90	-28.42	49.30	54.00	4.70	AV	Horizontal
2	5150.000	44.94	33.90	-28.41	50.43	54.00	3.57	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-07

Tested By: Cao Jie

Test Mode: TX N40 5190MHz Mode


Power Supply: DC 5V

Condition: Temp:24.7°C;Humi:49.6%

Test Site: 4# Fully Anechoic Room

File Path: d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\82

Memo: Sample Number: S26062423-003

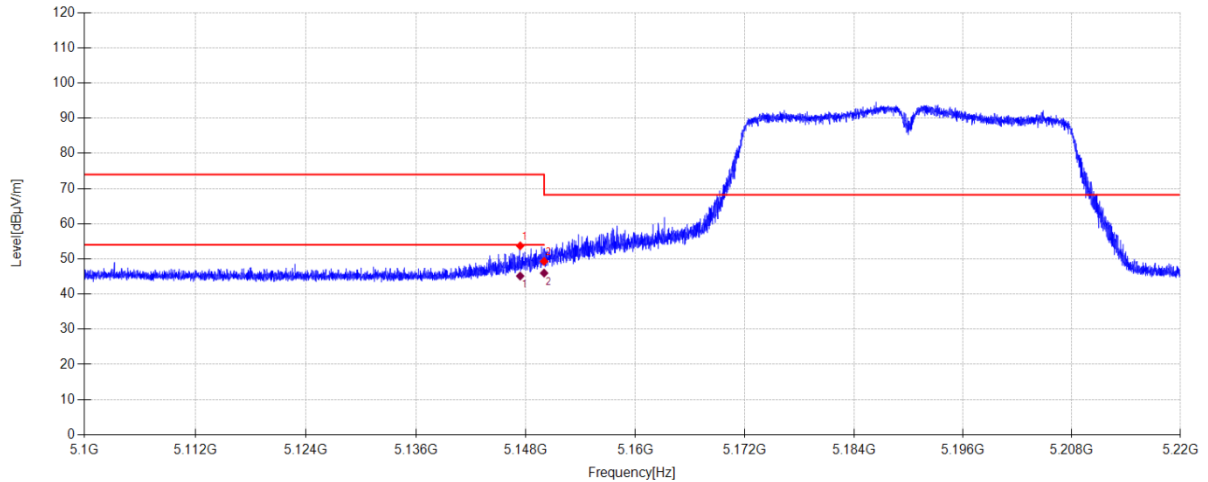

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.388	48.22	33.91	-28.42	53.71	74.00	20.29	PK	Vertical
2	5150.000	43.80	33.90	-28.40	49.30	68.20	18.90	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.388	39.64	33.91	-28.42	45.13	54.00	8.87	AV	Vertical
2	5150.000	40.47	33.90	-28.40	45.97	54.00	8.03	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-07 **Tested By:** Cao Jie
Test Mode: TX N40 5310MHz Mode **Power Supply:** DC 5V
Condition: Temp:24.7°C;Humi:49.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\83
Memo: Sample Number: S26062423-003

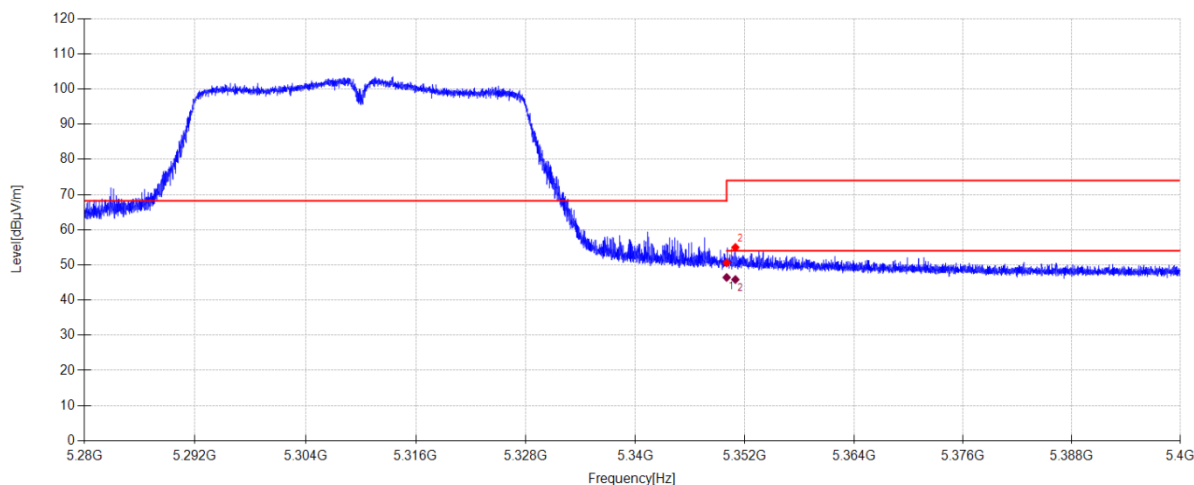**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	44.25	33.70	-27.39	50.56	68.20	17.64	PK	Horizontal
2	5350.956	48.66	33.70	-27.39	54.97	74.00	19.03	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	40.12	33.70	-27.39	46.43	54.00	7.57	AV	Horizontal
2	5350.956	39.53	33.70	-27.39	45.84	54.00	8.16	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-07

Tested By:

Cao Jie

Test Mode:

TX N40 5310MHz Mode

Power Supply:

DC 5V

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\84

Memo:

Sample Number: S26062423-003

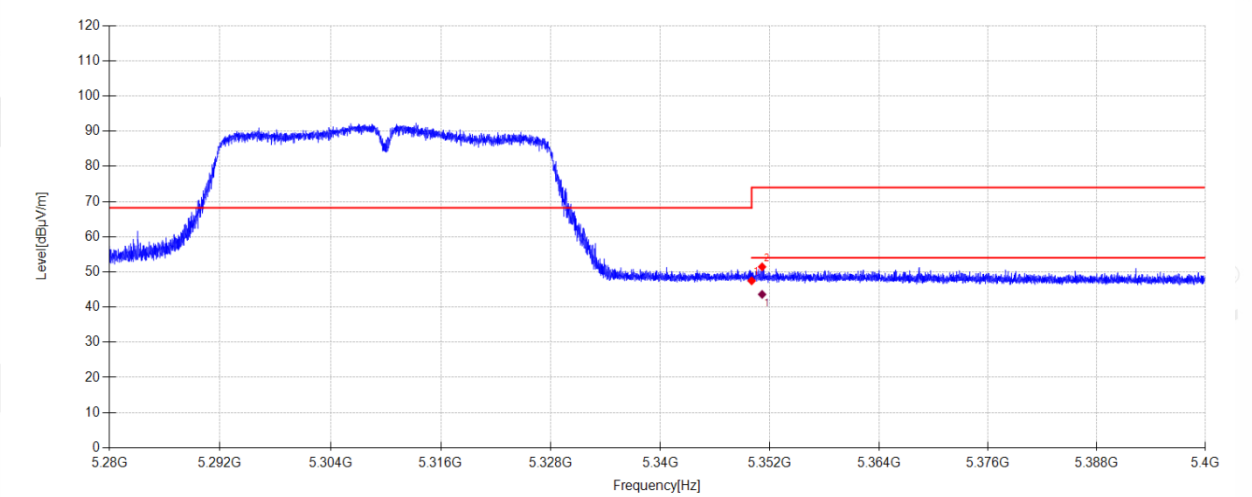

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	41.15	33.70	-27.39	47.46	68.20	20.74	PK	Vertical
2	5351.148	45.13	33.70	-27.39	51.44	74.00	22.56	PK	Vertical


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5351.148	37.29	33.70	-27.39	43.60	54.00	10.40	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-08 **Tested By:** Liang Rijing
Test Mode: TX N40 5510MHz Mode **Power Supply:** DC 5V
Condition: Temp:24.7°C;Humi:49.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\85
Memo: Sample Number: S26062423-003

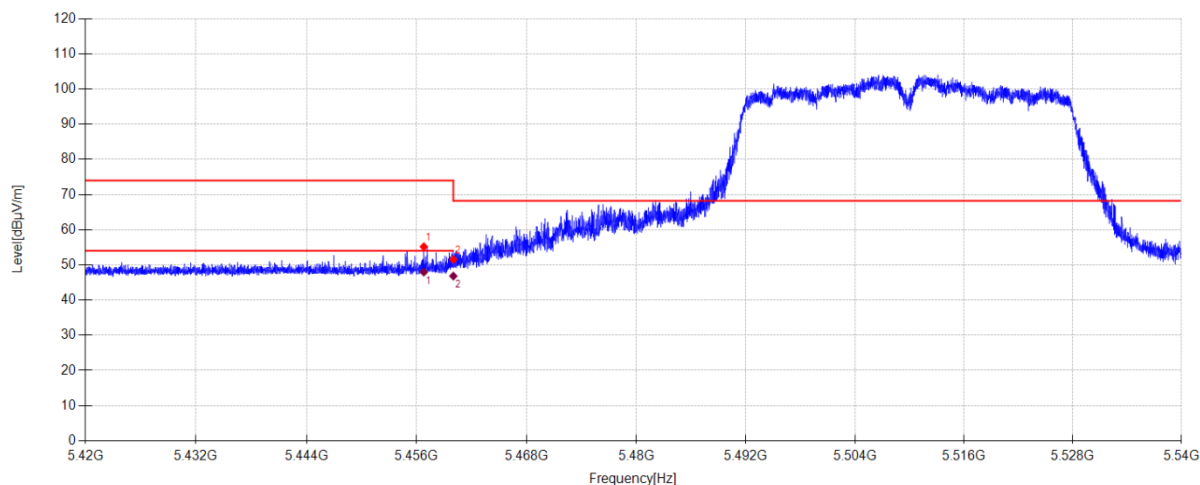

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.780	48.87	33.80	-27.50	55.17	74.00	18.83	PK	Horizontal
2	5460.000	45.25	33.80	-27.50	51.55	68.20	16.65	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.780	41.65	33.80	-27.50	47.95	54.00	6.05	AV	Horizontal
2	5460.000	40.52	33.80	-27.50	46.82	54.00	7.18	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-08 **Tested By:** Liang Rijing
Test Mode: TX N40 5510MHz Mode **Power Supply:** DC 5V
Condition: Temp:24.7°C;Humi:49.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\86
Memo: Sample Number: S26062423-003

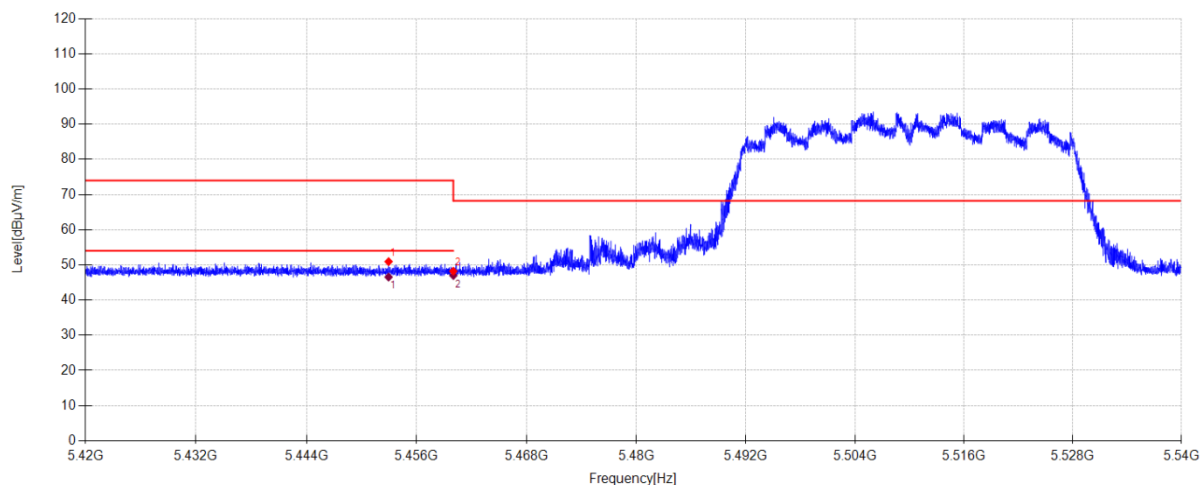

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.940	44.65	33.80	-27.51	50.94	74.00	23.06	PK	Vertical
2	5460.000	41.91	33.80	-27.50	48.21	68.20	19.99	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.940	40.25	33.80	-27.51	46.54	54.00	7.46	AV	Vertical
2	5460.000	40.68	33.80	-27.50	46.98	54.00	7.02	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-08

Tested By:

Liang Rijing

Test Mode:

TX N40 5670MHz Mode

Power Supply:

DC 5V

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\87

Memo:

Sample Number: S26062423-003

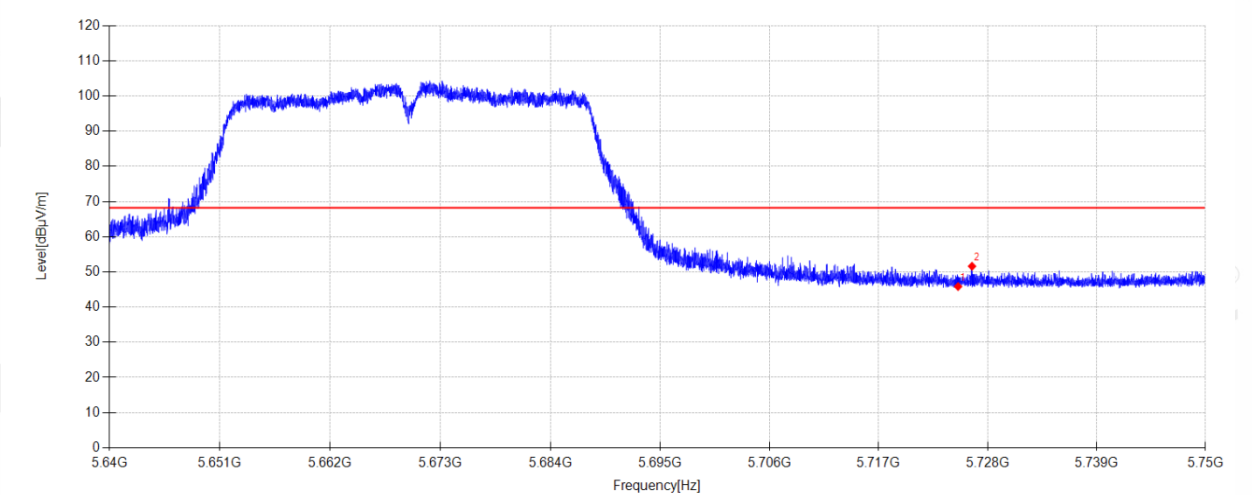

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	38.46	34.30	-26.92	45.84	68.20	22.36	PK	Horizontal
2	5726.405	44.21	34.31	-26.92	51.60	68.20	16.60	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-08

Tested By:

Liang Rijing

Test Mode:

TX N40 5670MHz Mode

Power Supply:

DC 5V

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\88

Memo:

Sample Number: S26062423-003

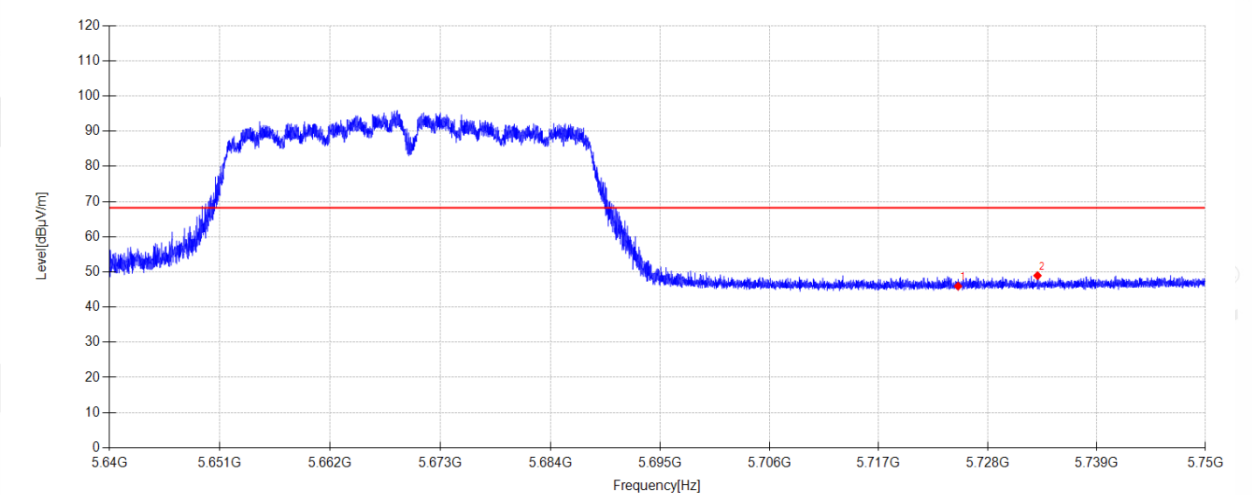

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	38.56	34.30	-26.92	45.94	68.20	22.26	PK	Vertical
2	5733.016	41.51	34.33	-26.90	48.94	68.20	19.26	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-08

Tested By:

Liang Rijing

Test Mode:

TX AC20 5180MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\43

Memo:

Sample Number: S26062423-008

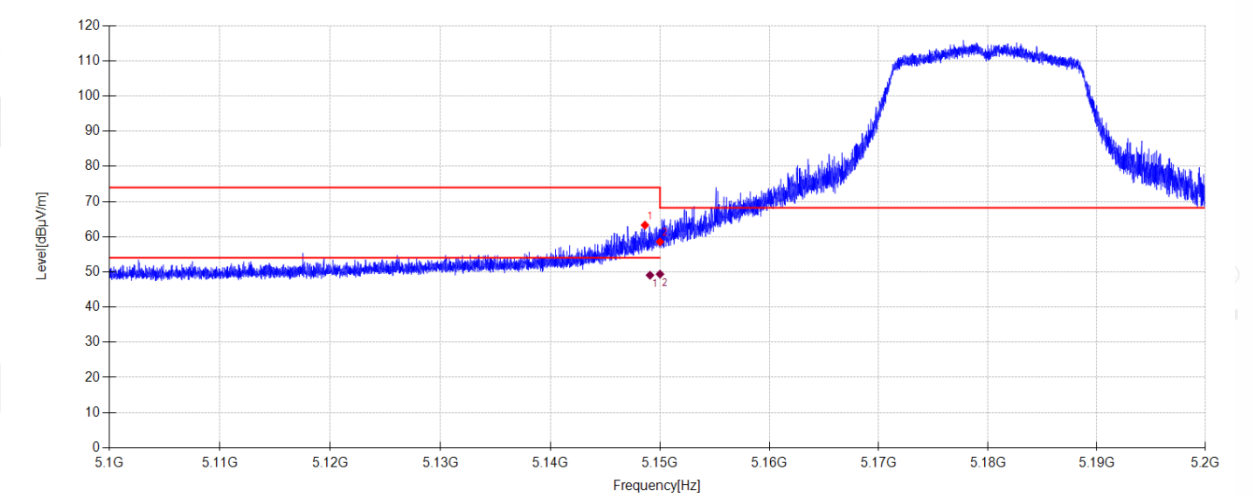

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.630	57.81	33.90	-28.41	63.30	74.00	10.70	PK	Horizontal
2	5150.000	53.05	33.90	-28.41	58.54	68.20	9.66	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5149.088	43.57	33.90	-28.41	49.06	54.00	4.94	AV	Horizontal
2	5150.000	43.87	33.90	-28.41	49.36	54.00	4.64	AV	Horizontal

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-08

Tested By:

Liang Rijing

Test Mode:

TX AC20 5180MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\44

Memo:

Sample Number: S26062423-008

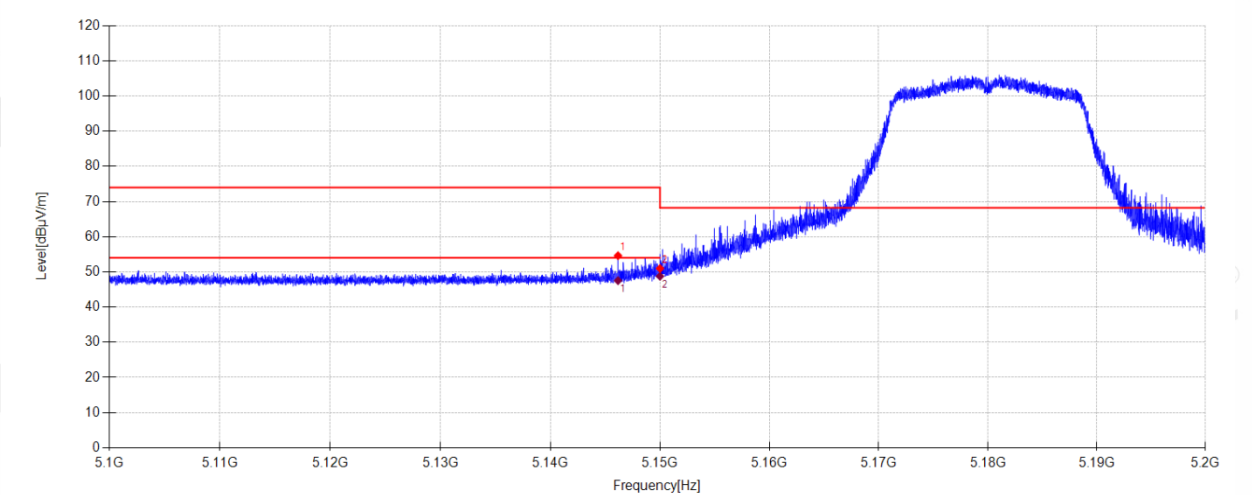

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5146.170	49.14	33.91	-28.43	54.62	74.00	19.38	PK	Vertical
2	5150.000	45.49	33.90	-28.41	50.98	68.20	17.22	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5146.170	42.03	33.91	-28.43	47.51	54.00	6.49	AV	Vertical
2	5150.000	43.26	33.90	-28.41	48.75	54.00	5.25	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-08

Tested By:

Liang Rijing

Test Mode:

TX AC20 5320MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\41

Memo:

Sample Number: S26062423-008

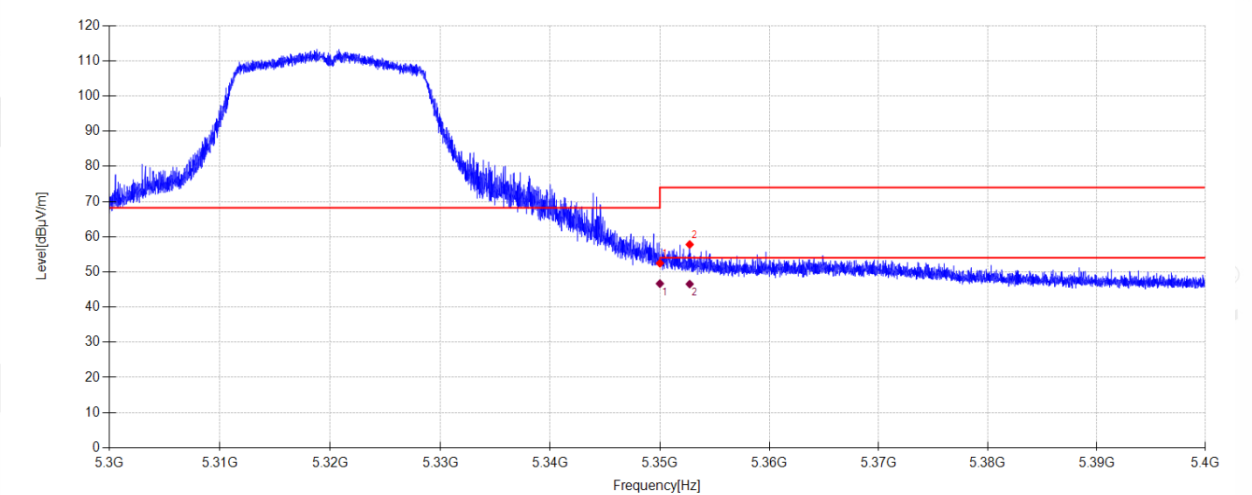

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	46.15	33.70	-27.39	52.46	68.20	15.74	PK	Horizontal
2	5352.720	51.49	33.70	-27.40	57.79	74.00	16.21	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	40.36	33.70	-27.39	46.67	54.00	7.33	AV	Horizontal
2	5352.720	40.24	33.70	-27.40	46.54	54.00	7.46	AV	Horizontal

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-08

Tested By:

Liang Rijing

Test Mode:

TX AC20 5320MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\42

Memo:

Sample Number: S26062423-008

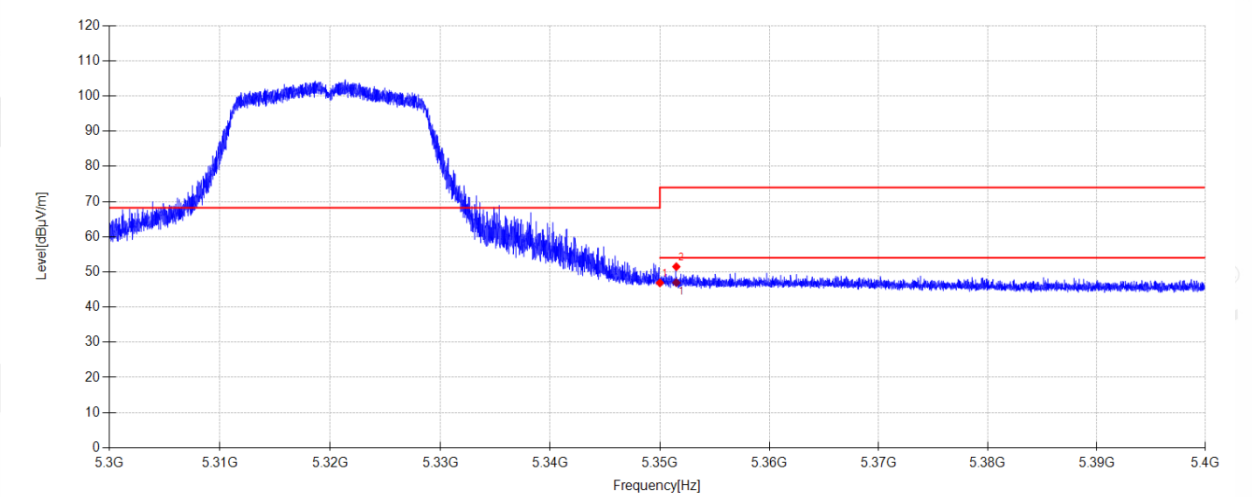

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	40.56	33.70	-27.39	46.87	68.20	21.33	PK	Vertical
2	5351.500	45.18	33.70	-27.40	51.48	74.00	22.52	PK	Vertical


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5351.500	40.63	33.70	-27.40	46.93	54.00	7.07	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

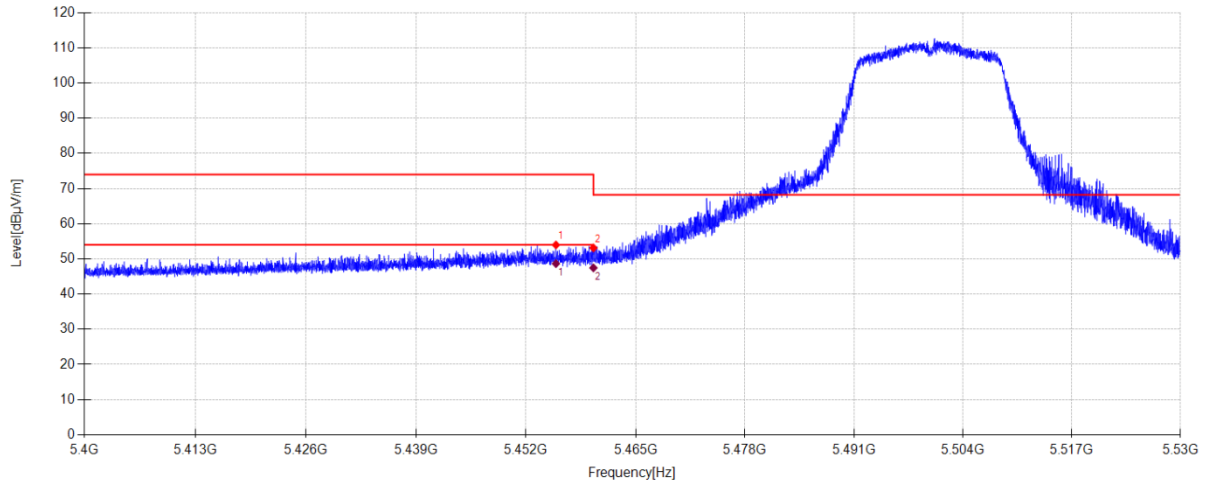Test Date: 2026-07-08**Tested By:** Liang Rijing**Test Mode:** TX AC20 5500MHz Mode**Power Supply:** Battery**Condition:** Temp:24.7°C;Humi:49.6%**Test Site:** 4# Fully Anechoic Room**File Path:** d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\39**Memo:** Sample Number: S26062423-008

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.562	47.68	33.80	-27.51	53.97	74.00	20.03	PK	Horizontal
2	5460.000	46.83	33.80	-27.50	53.13	68.20	15.07	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.562	42.36	33.80	-27.51	48.65	54.00	5.35	AV	Horizontal
2	5460.000	41.15	33.80	-27.50	47.45	54.00	6.55	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-08

Tested By:

Liang Rijing

Test Mode:

TX AC20 5500MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\40

Memo:

Sample Number: S26062423-008

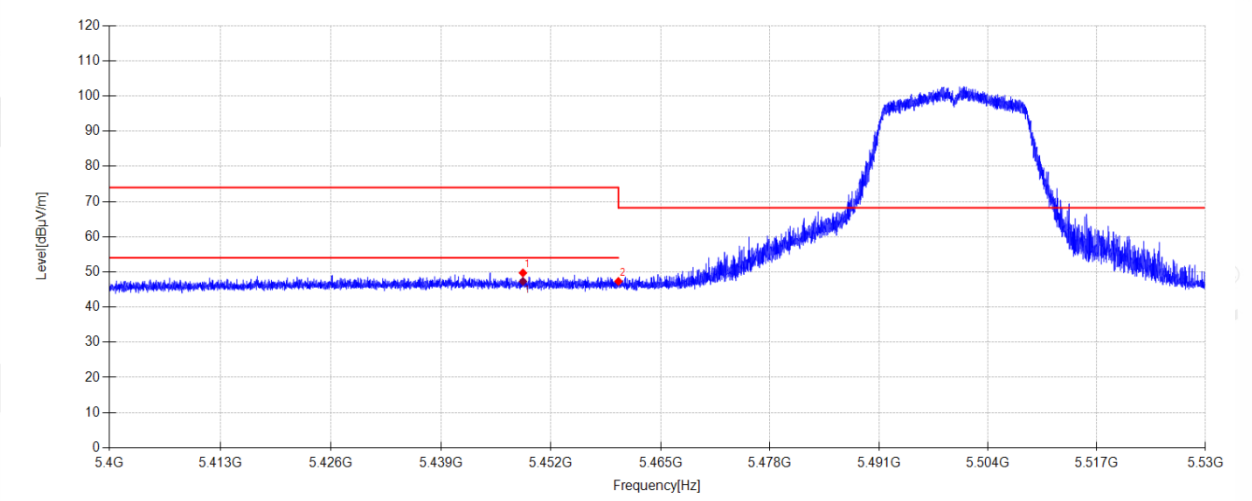

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5448.698	43.44	33.80	-27.52	49.72	74.00	24.28	PK	Vertical
2	5460.000	41.02	33.80	-27.50	47.32	68.20	20.88	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5448.698	41.02	33.80	-27.52	47.30	54.00	6.70	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-08

Tested By:

Liang Rijing

Test Mode:

TX AC20 5700MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\37

Memo:

Sample Number: S26062423-008

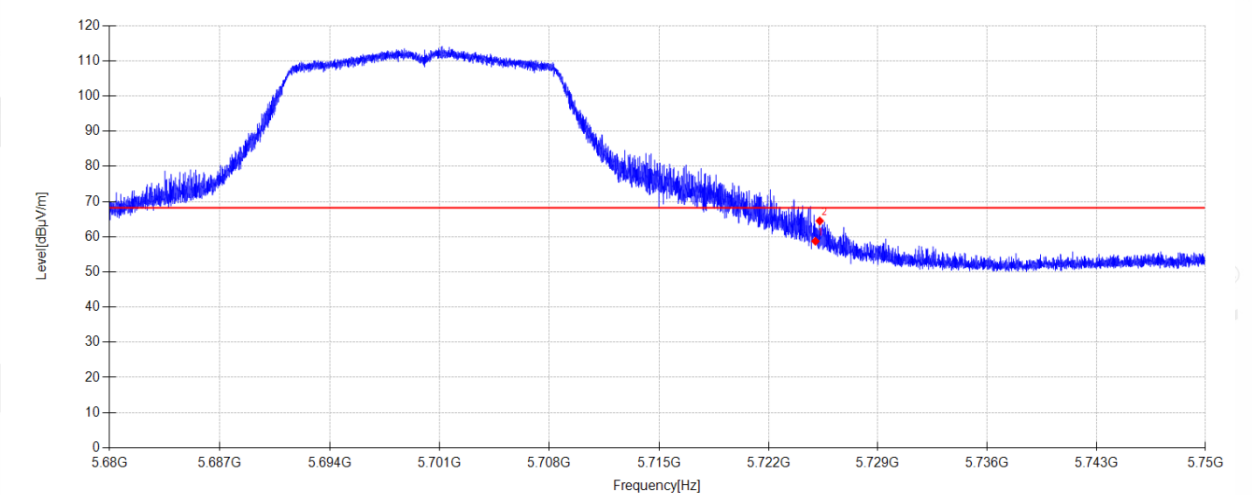

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	51.34	34.30	-26.92	58.72	68.20	9.48	PK	Horizontal
2	5725.276	57.11	34.30	-26.92	64.49	68.20	3.71	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-08

Tested By:

Liang Rijing

Test Mode:

TX AC20 5700MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\38

Memo:

Sample Number: S26062423-008

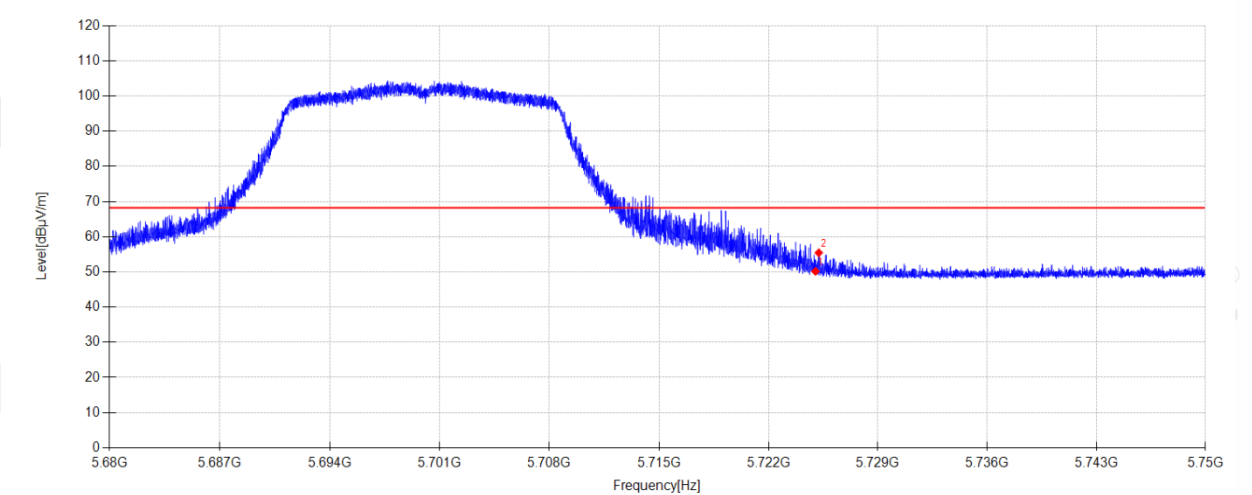

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.79	34.30	-26.92	50.17	68.20	18.03	PK	Vertical
2	5725.213	48.06	34.30	-26.92	55.44	68.20	12.76	PK	Vertical


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-08 **Tested By:** Liang Rijing
Test Mode: TX AX20 5180MHz Mode **Power Supply:** DC 5V
Condition: Temp:24.7°C;Humi:49.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\89
Memo: Sample Number: S26062423-003

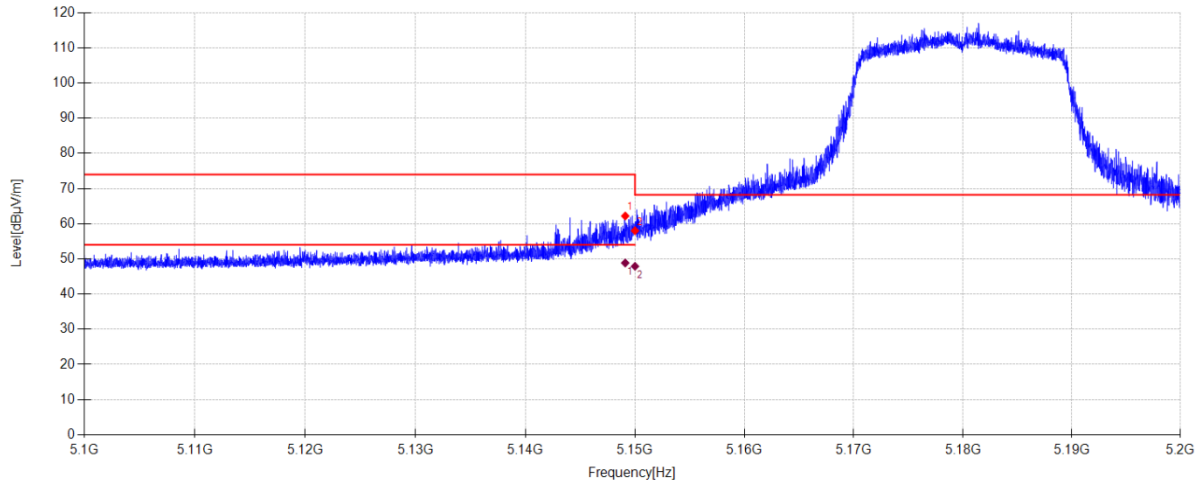**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5149.110	56.71	33.90	-28.41	62.20	74.00	11.80	PK	Horizontal
2	5150.000	52.53	33.90	-28.41	58.02	68.20	10.18	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5149.110	43.36	33.90	-28.41	48.85	54.00	5.15	AV	Horizontal
2	5150.000	42.40	33.90	-28.41	47.89	54.00	6.11	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-08 **Tested By:** Liang Rijing
Test Mode: TX AX20 5180MHz Mode **Power Supply:** DC 5V
Condition: Temp:24.7°C;Humi:49.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\90
Memo: Sample Number: S26062423-003

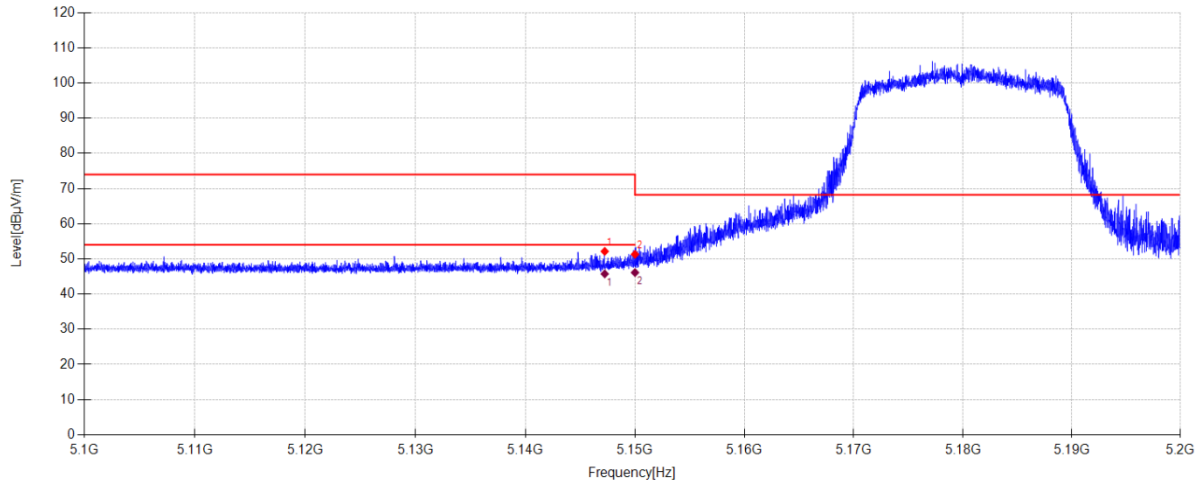**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.240	46.65	33.91	-28.42	52.14	74.00	21.86	PK	Vertical
2	5150.000	45.82	33.90	-28.41	51.31	68.20	16.89	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.240	40.25	33.91	-28.42	45.74	54.00	8.26	AV	Vertical
2	5150.000	40.63	33.90	-28.41	46.12	54.00	7.88	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-08

Tested By:

Liang Rijing

Test Mode:

TX AX20 5180MHz Mode

Power Supply:

DC 5V

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\91

Memo:

Sample Number: S26062423-003

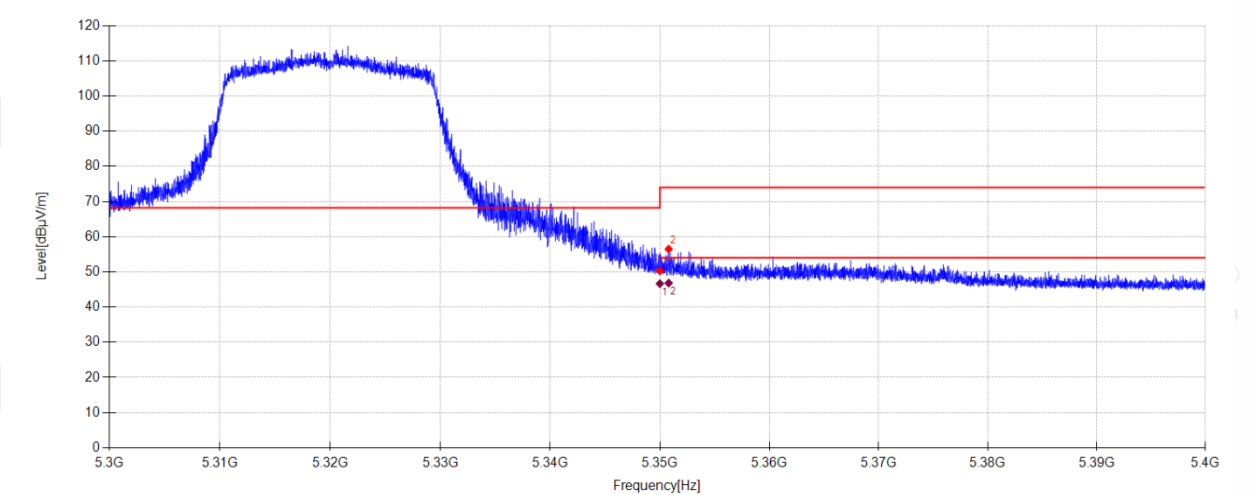

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	43.96	33.70	-27.39	50.27	68.20	17.93	PK	Horizontal
2	5350.800	50.18	33.70	-27.39	56.49	74.00	17.51	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	40.36	33.70	-27.39	46.67	54.00	7.33	AV	Horizontal
2	5350.800	40.52	33.70	-27.39	46.83	54.00	7.17	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-08

Tested By:

Liang Rijing

Test Mode:

TX AX20 5320MHz Mode

Power Supply:

DC 5V

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\92

Memo:

Sample Number: S26062423-003

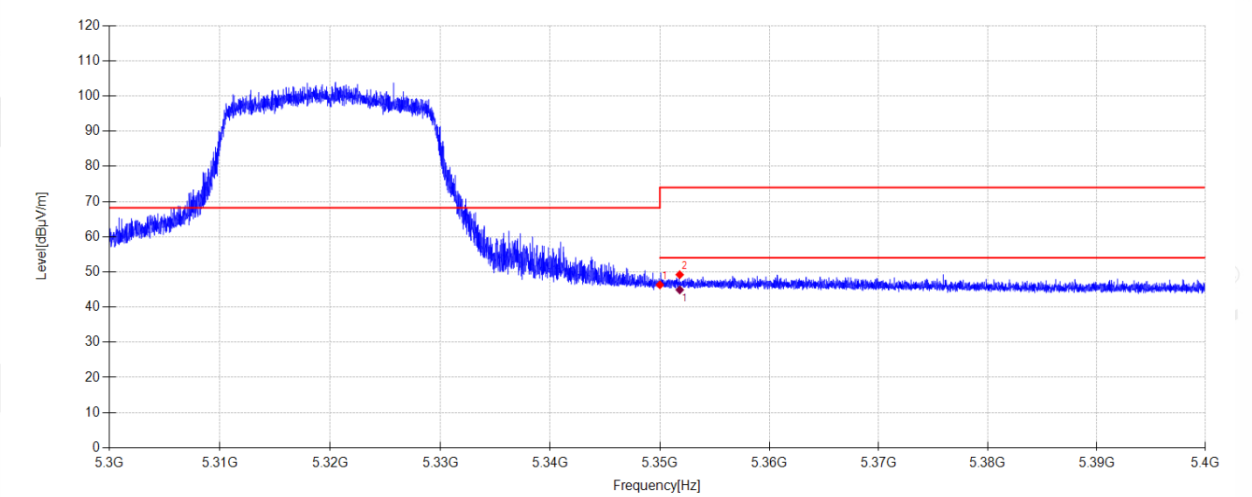

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	40.01	33.70	-27.39	46.32	68.20	21.88	PK	Vertical
2	5351.810	42.91	33.70	-27.40	49.21	74.00	24.79	PK	Vertical


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5351.810	38.59	33.70	-27.40	44.89	54.00	9.11	AV	Vertical

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-08 **Tested By:** Liang Rijing
Test Mode: TX AX20 5500MHz Mode **Power Supply:** DC 5V
Condition: Temp:24.7°C;Humi:49.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\93
Memo: Sample Number: S26062423-003

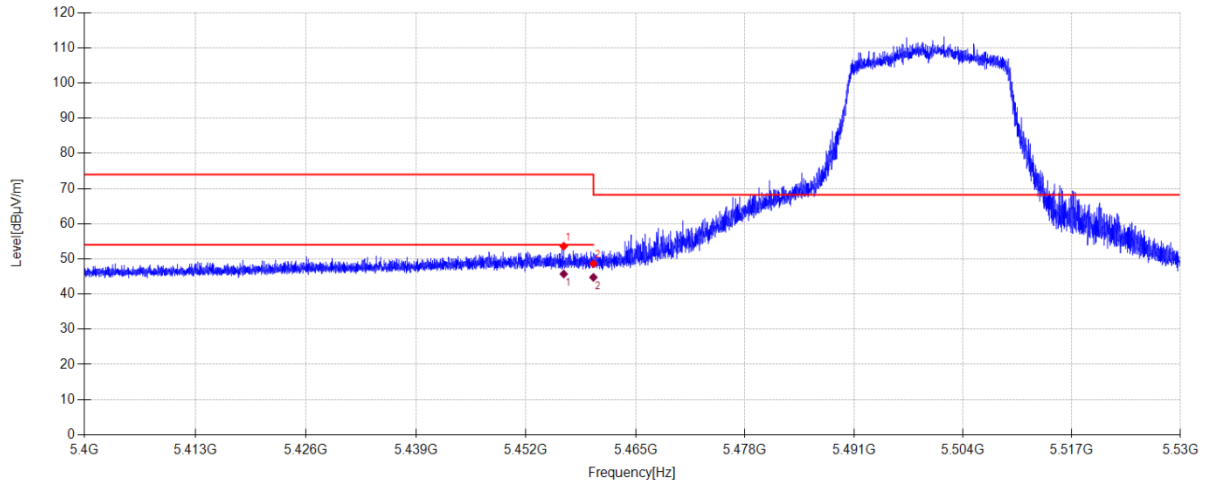

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.485	47.30	33.80	-27.50	53.60	74.00	20.40	PK	Horizontal
2	5460.000	42.32	33.80	-27.50	48.62	68.20	19.58	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.485	39.41	33.80	-27.50	45.71	54.00	8.29	AV	Horizontal
2	5460.000	38.45	33.80	-27.50	44.75	54.00	9.25	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-08

Tested By:

Liang Rijing

Test Mode:

TX AX20 5500MHz Mode

Power Supply:

DC 5V

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\94

Memo:

Sample Number: S26062423-003

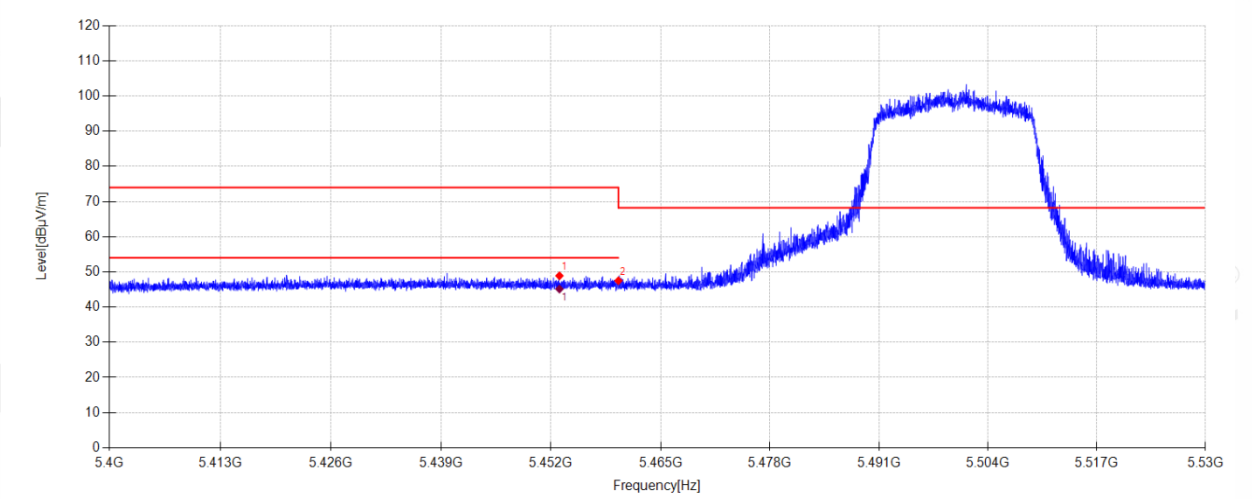

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.014	42.60	33.80	-27.51	48.89	74.00	25.11	PK	Vertical
2	5460.000	41.20	33.80	-27.50	47.50	68.20	20.70	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.014	38.84	33.80	-27.51	45.13	54.00	8.87	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-08

Tested By:

Liang Rijing

Test Mode:

TX AX20 5700MHz Mode

Power Supply:

DC 5V

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\95

Memo:

Sample Number: S26062423-003

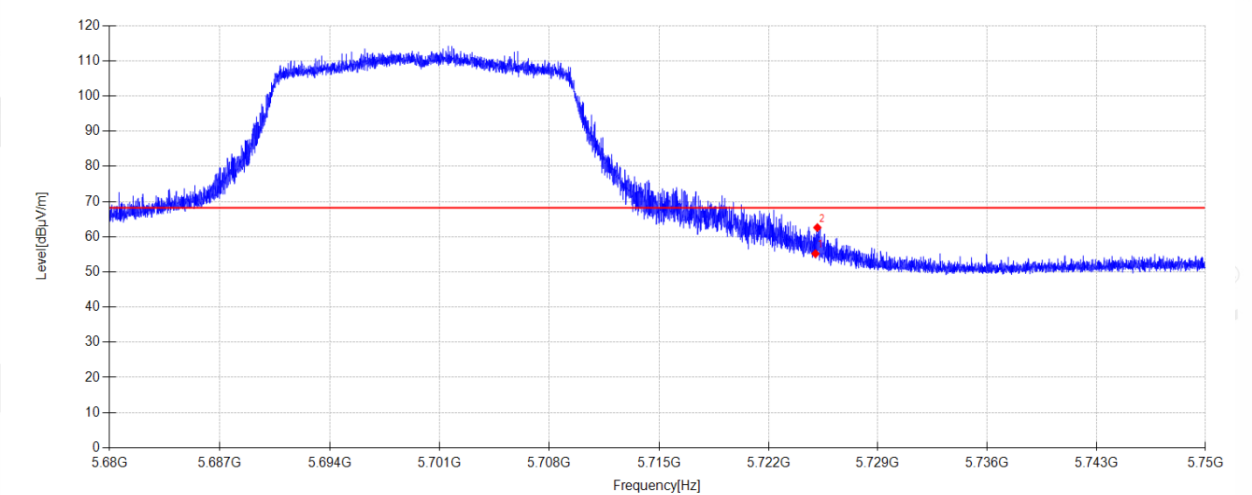

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	47.80	34.30	-26.92	55.18	68.20	13.02	PK	Horizontal
2	5725.122	55.21	34.30	-26.92	62.59	68.20	5.61	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-08

Tested By:

Liang Rijing

Test Mode:

TX AX20 5700MHz Mode

Power Supply:

DC 5V

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5G 0706\96

Memo:

Sample Number: S26062423-003

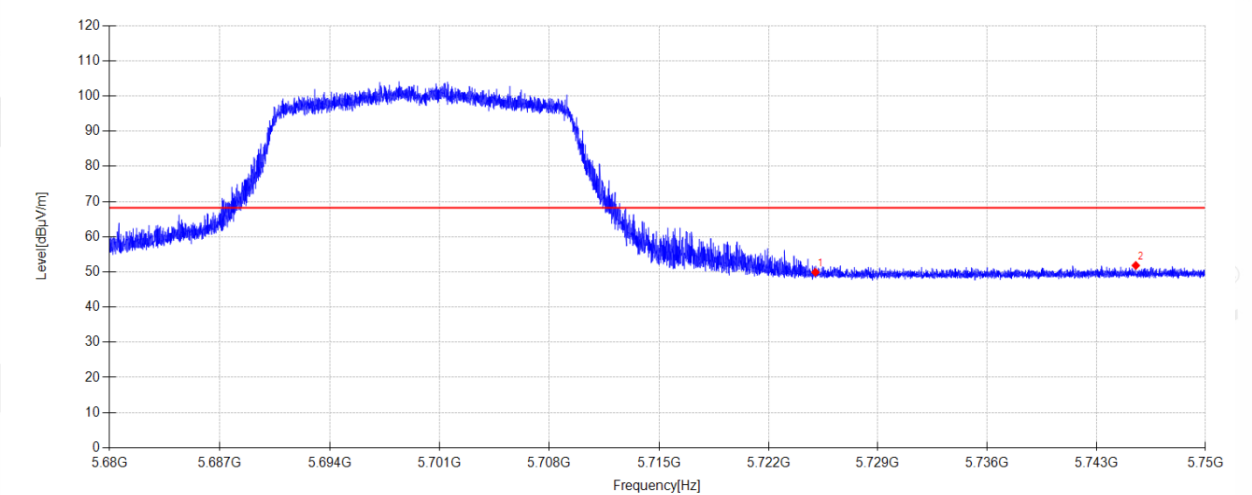

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.52	34.30	-26.92	49.90	68.20	18.30	PK	Vertical
2	5745.534	44.33	34.38	-26.88	51.83	68.20	16.37	PK	Vertical


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-09 **Tested By:** Cao Jie
Test Mode: TX 11A 5720MHz Mode **Power Supply:** DC 5V
Condition: Temp:24.7°C;Humi:49.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G KUAYUE 0706\1
Memo: Sample Number: S26062423-003

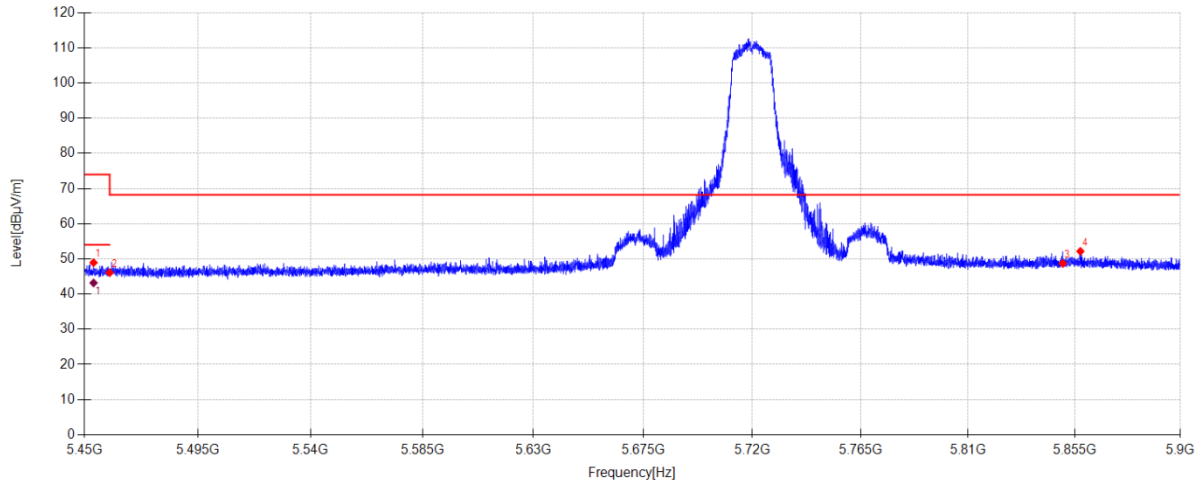**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.645	42.65	33.80	-27.51	48.94	74.00	25.06	PK	Horizontal
2	5460.000	39.79	33.80	-27.50	46.09	68.20	22.11	PK	Horizontal
3	5850.000	40.36	34.80	-26.45	48.71	68.20	19.49	PK	Horizontal
4	5857.475	43.75	34.81	-26.41	52.15	68.20	16.05	PK	Horizontal


Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.645	36.88	33.80	-27.51	43.17	54.00	10.83	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

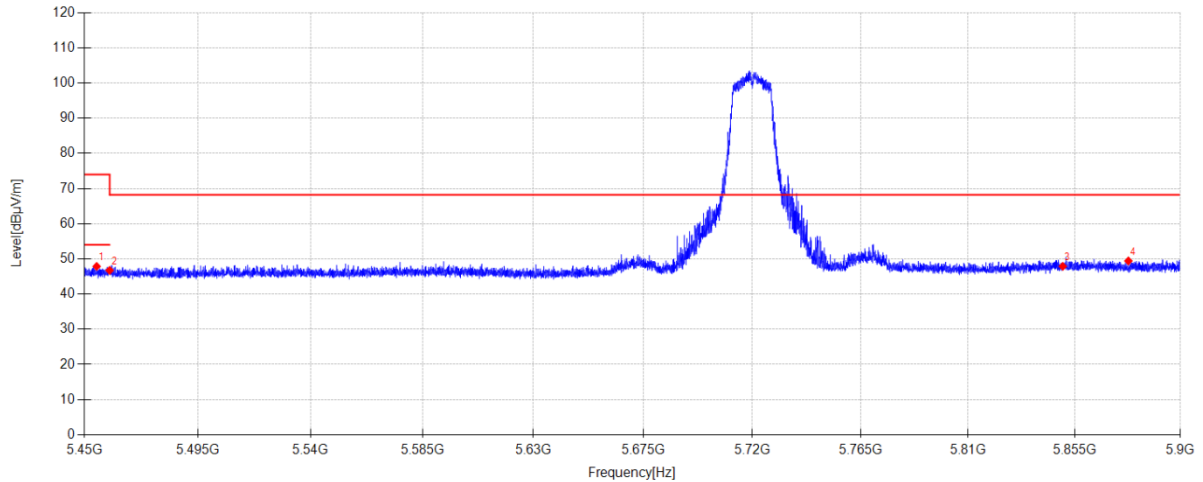Test Date: 2026-07-09**Tested By:** Cao Jie**Test Mode:** TX 11A 5720MHz Mode**Power Supply:** DC 5V**Condition:** Temp:24.7°C;Humi:49.6%**Test Site:** 4# Fully Anechoic Room**File Path:** d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G KUAYUE 0706\2**Memo:** Sample Number: S26062423-003**Suspected Data List**


NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.860	41.59	33.80	-27.51	47.88	74.00	26.12	PK	Vertical
2	5460.000	40.44	33.80	-27.50	46.74	68.20	21.46	PK	Vertical
3	5850.000	39.54	34.80	-26.45	47.89	68.20	20.31	PK	Vertical
4	5877.860	40.86	34.86	-26.29	49.43	68.20	18.77	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-09 **Tested By:** Cao Jie
Test Mode: TX 11N20 5720MHz Mode **Power Supply:** DC 5V
Condition: Temp:24.7°C;Humi:49.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G KUAYUE 0706\3
Memo: Sample Number: S26062423-003

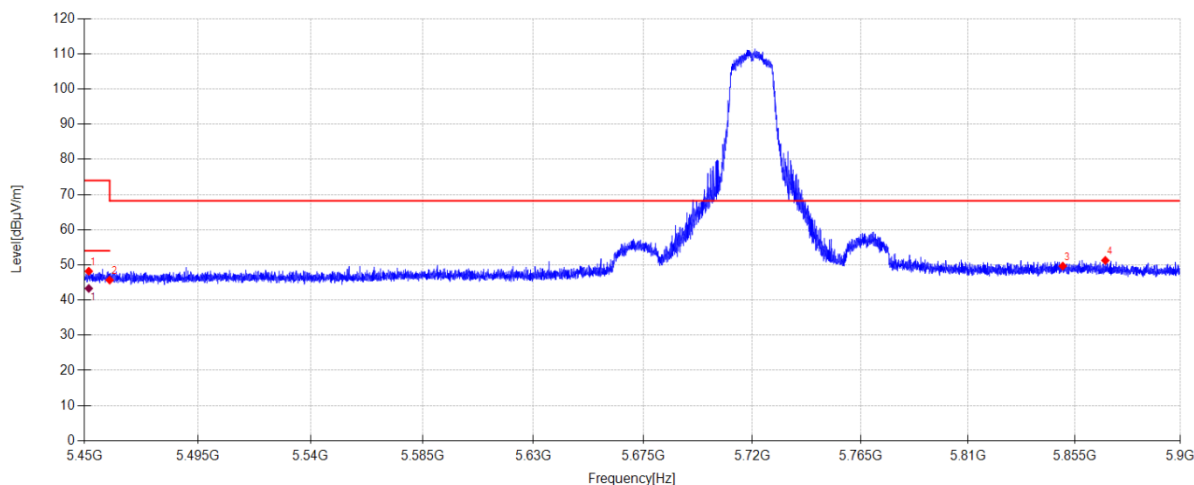**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.755	41.90	33.80	-27.51	48.19	74.00	25.81	PK	Horizontal
2	5460.000	39.38	33.80	-27.50	45.68	68.20	22.52	PK	Horizontal
3	5850.000	41.31	34.80	-26.45	49.66	68.20	18.54	PK	Horizontal
4	5868.050	42.78	34.84	-26.35	51.27	68.20	16.93	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.755	37.02	33.80	-27.51	43.31	54.00	10.69	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-09 **Tested By:** Cao Jie
Test Mode: TX 11N20 5720MHz Mode **Power Supply:** DC 5V
Condition: Temp:24.7°C;Humi:49.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G KUAYUE 0706\4
Memo: Sample Number: S26062423-003

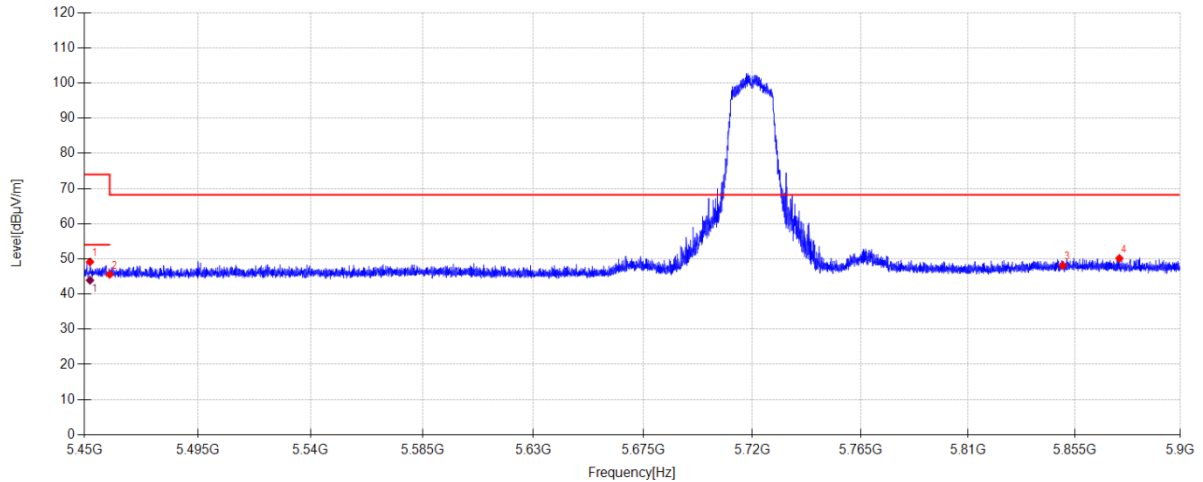**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.250	42.85	33.80	-27.51	49.14	74.00	24.86	PK	Vertical
2	5460.000	39.29	33.80	-27.50	45.59	68.20	22.61	PK	Vertical
3	5850.000	39.76	34.80	-26.45	48.11	68.20	20.09	PK	Vertical
4	5874.035	41.60	34.85	-26.31	50.14	68.20	18.06	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.250	37.64	33.80	-27.51	43.93	54.00	10.07	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-09 **Tested By:** Cao Jie
Test Mode: TX 11N40 5710MHz Mode **Power Supply:** DC 5V
Condition: Temp:24.7°C;Humi:49.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G KUAYUE 0706\5
Memo: Sample Number: S26062423-003

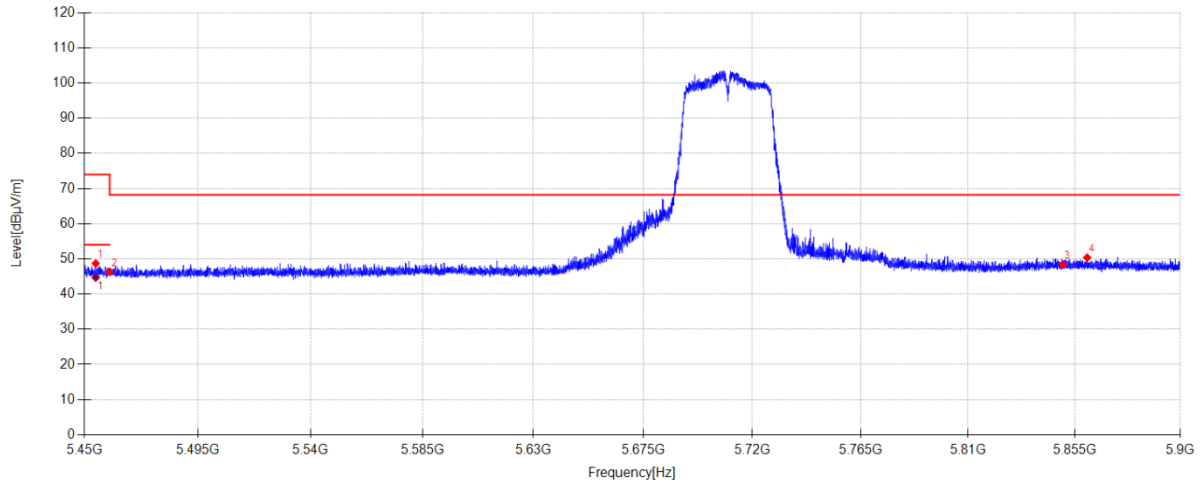**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.500	42.40	33.80	-27.51	48.69	74.00	25.31	PK	Horizontal
2	5460.000	40.00	33.80	-27.50	46.30	68.20	21.90	PK	Horizontal
3	5850.000	40.06	34.80	-26.45	48.41	68.20	19.79	PK	Horizontal
4	5860.355	41.92	34.82	-26.39	50.35	68.20	17.85	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.500	38.42	33.80	-27.51	44.71	54.00	9.29	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-09 **Tested By:** Cao Jie
Test Mode: TX 11N40 5710MHz Mode **Power Supply:** DC 5V
Condition: Temp:24.7°C;Humi:49.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G KUAYUE 0706\6
Memo: Sample Number: S26062423-003

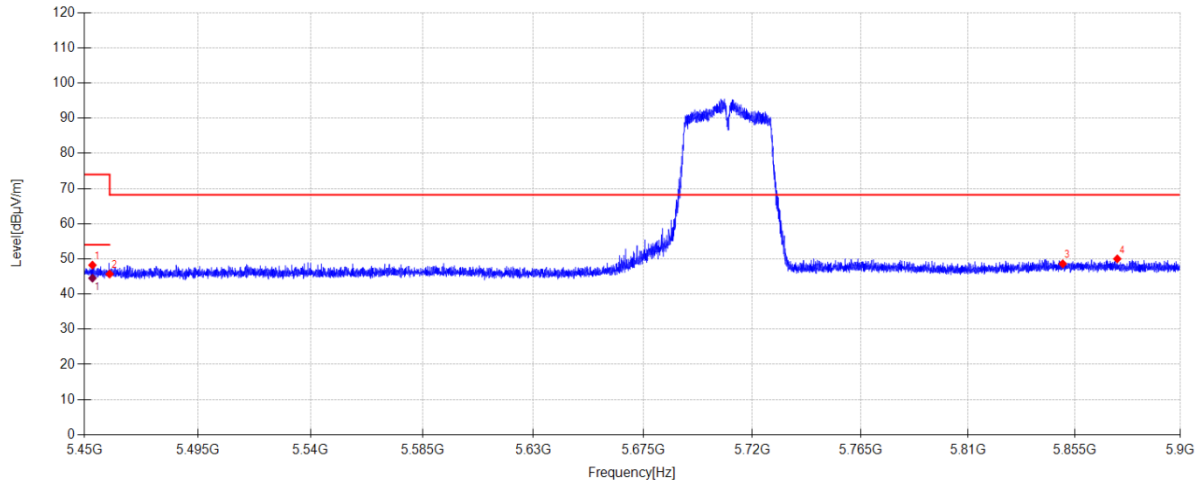**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.195	41.94	33.80	-27.51	48.23	74.00	25.77	PK	Vertical
2	5460.000	39.40	33.80	-27.50	45.70	68.20	22.50	PK	Vertical
3	5850.000	40.26	34.80	-26.45	48.61	68.20	19.59	PK	Vertical
4	5873.135	41.48	34.85	-26.32	50.01	68.20	18.19	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.195	38.24	33.80	-27.51	44.53	54.00	9.47	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-09 **Tested By:** Cao Jie
Test Mode: TX 11AX20 5720MHz Mode **Power Supply:** DC 5V
Condition: Temp:24.7°C;Humi:49.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G KUAYUE 0706\7
Memo: Sample Number: S26062423-003

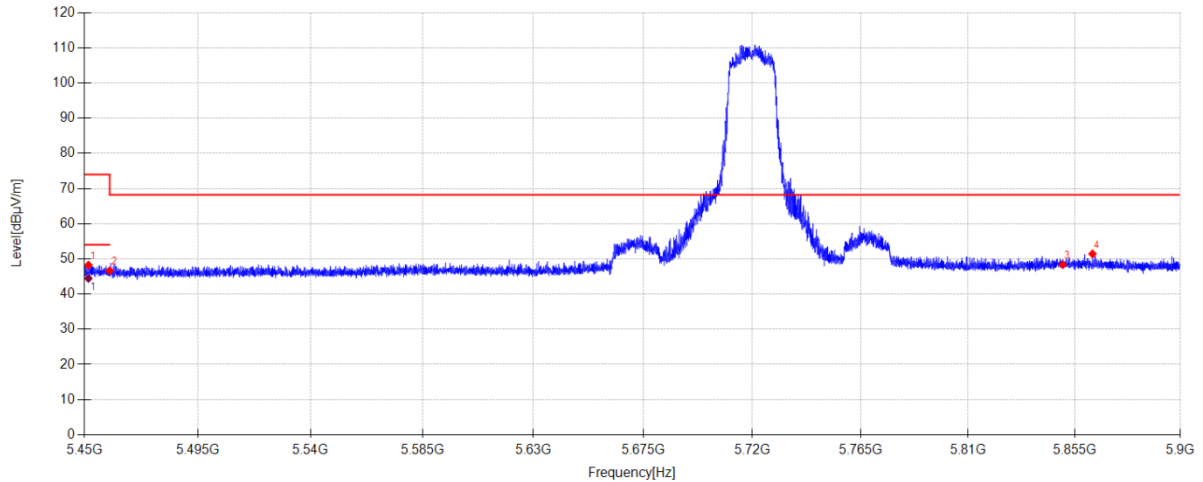**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.620	41.95	33.80	-27.51	48.24	74.00	25.76	PK	Horizontal
2	5460.000	40.33	33.80	-27.50	46.63	68.20	21.57	PK	Horizontal
3	5850.000	40.00	34.80	-26.45	48.35	68.20	19.85	PK	Horizontal
4	5862.605	42.98	34.83	-26.38	51.43	68.20	16.77	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.620	38.17	33.80	-27.51	44.46	54.00	9.54	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-09 **Tested By:** Cao Jie
Test Mode: TX 11AX20 5720MHz Mode **Power Supply:** DC 5V
Condition: Temp:24.7°C;Humi:49.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G KUAYUE 0706\8
Memo: Sample Number: S26062423-003

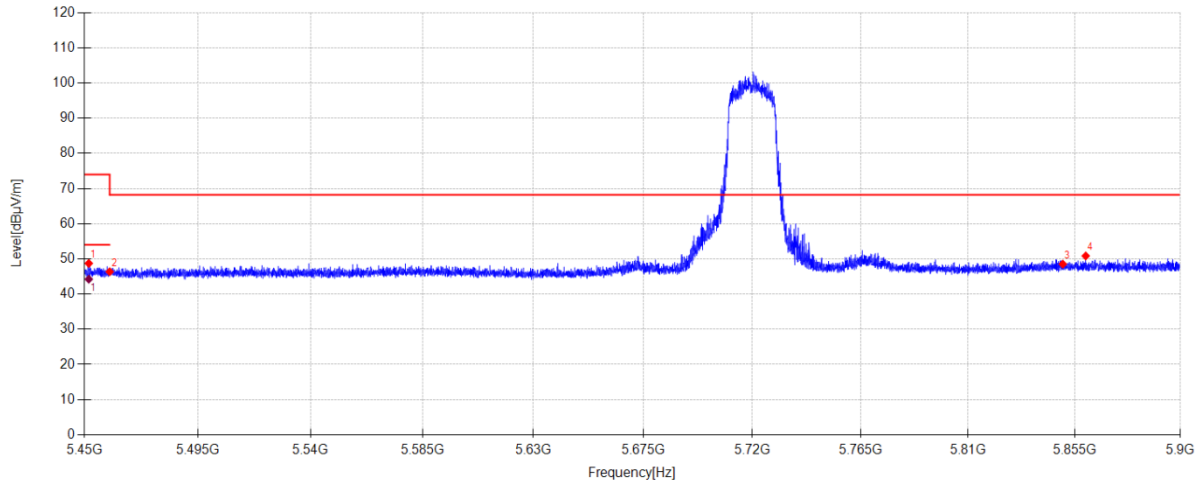**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.755	42.44	33.80	-27.51	48.73	74.00	25.27	PK	Vertical
2	5460.000	40.06	33.80	-27.50	46.36	68.20	21.84	PK	Vertical
3	5850.000	40.18	34.80	-26.45	48.53	68.20	19.67	PK	Vertical
4	5859.725	42.42	34.82	-26.40	50.84	68.20	17.36	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.755	37.94	33.80	-27.51	44.23	54.00	9.77	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-10 **Tested By:** Cao Jie
Test Mode: TX AC20 5720MHz Mode **Power Supply:** DC 5V
Condition: Temp:24.7°C;Humi:49.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G KUAYUE 0706\9
Memo: Sample Number: S26062423-003

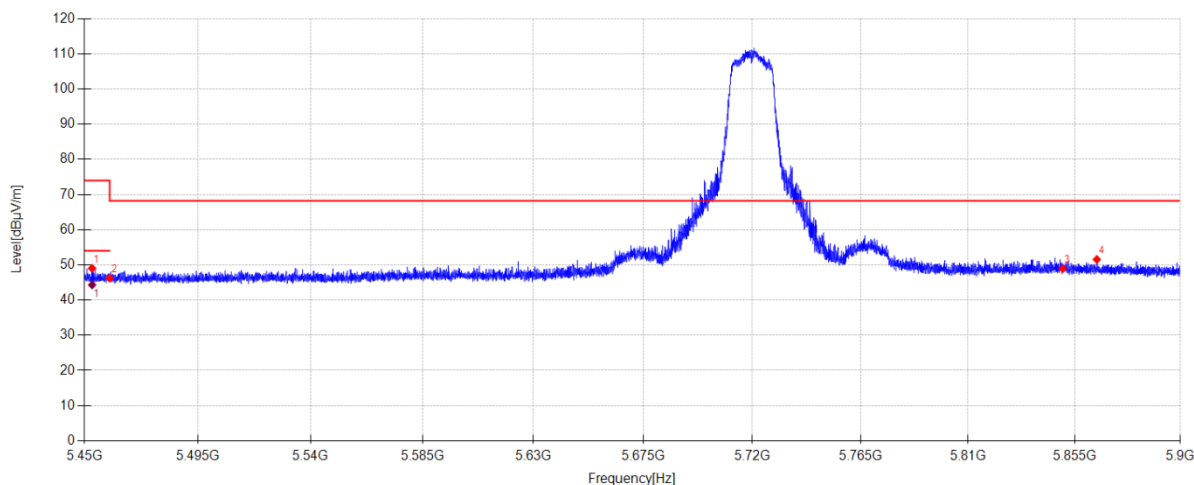**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.060	42.74	33.80	-27.51	49.03	74.00	24.97	PK	Horizontal
2	5460.000	39.92	33.80	-27.50	46.22	68.20	21.98	PK	Horizontal
3	5850.000	40.59	34.80	-26.45	48.94	68.20	19.26	PK	Horizontal
4	5864.450	43.09	34.83	-26.37	51.55	68.20	16.65	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.060	38.02	33.80	-27.51	44.31	54.00	9.69	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-10 **Tested By:** Cao Jie
Test Mode: TX AC20 5720MHz Mode **Power Supply:** DC 5V
Condition: Temp:24.7°C;Humi:49.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G KUAYUE 0706\10
Memo: Sample Number: S26062423-003

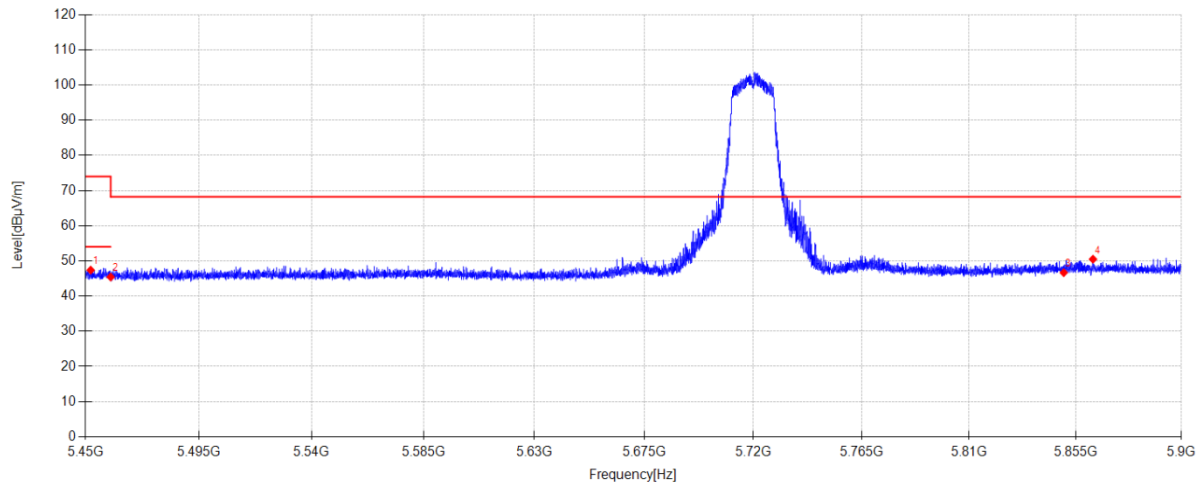**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.115	41.09	33.80	-27.51	47.38	74.00	26.62	PK	Vertical
2	5460.000	39.12	33.80	-27.50	45.42	68.20	22.78	PK	Vertical
3	5850.000	38.31	34.80	-26.45	46.66	68.20	21.54	PK	Vertical
4	5862.380	42.05	34.82	-26.38	50.49	68.20	17.71	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-09

Tested By:

Cao Jie

Test Mode:

TX 11A 5745MHz Mode

Power Supply:

DC 5V

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26062423-2E\FCC ABOVE 1G 5.8G 0706\7

Memo:

Sample Number: S26062423-003

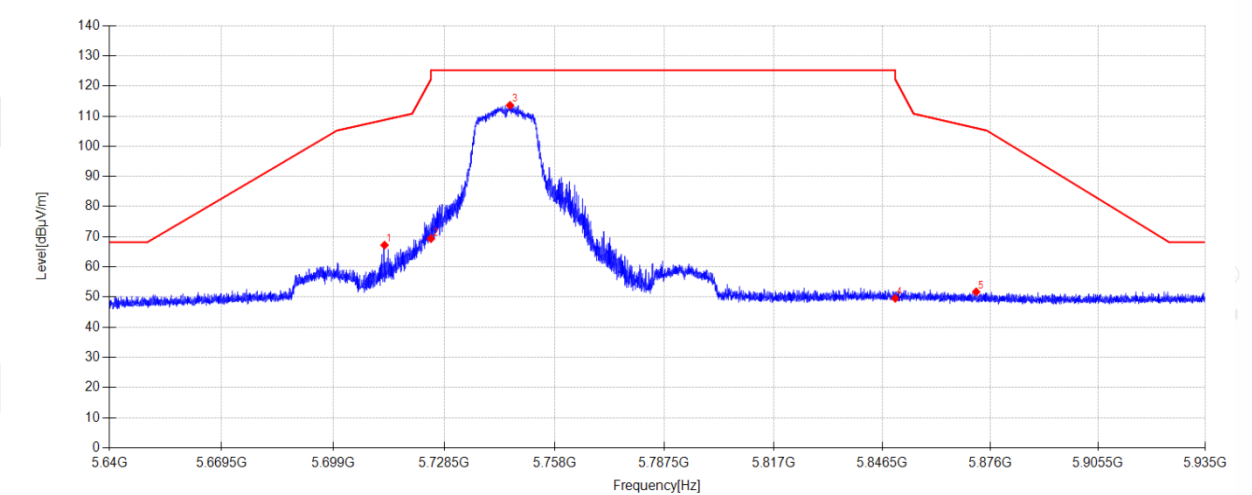

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5712.659	59.90	34.25	-26.95	67.20	108.74	41.54	PK	Horizontal
2	5725.000	61.98	34.30	-26.92	69.36	122.20	52.84	PK	Horizontal
3	5746.112	106.07	34.38	-26.87	113.58	125.20	11.62	PK	Horizontal
4	5850.000	41.21	34.80	-26.45	49.56	122.20	72.64	PK	Horizontal
5	5872.077	43.20	34.84	-26.32	51.72	106.02	54.30	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.