

TEST REPORT

Reference No...... : WTX26X05129840W004
FCC ID..... : ZVS-LWT7
Applicant..... : invoxia
Address..... : 8 ESPLANADE DE LA MANUFACTURE, 92130 Issy-Les-Moulineaux
France
Manufacturer..... : INVOXIA SAS
Address..... : 8 ESPLANADE DE LA MANUFACTURE, 92130 ISSYLES MOULINEAUX
Product Name..... : LWT7
Model No...... : LWT7
FCC Part 2.1093
Standards..... : IEEE Std C95.1: 2019
IEEE C95.3: 2021
IEC/IEEE 62209-1528:2020
Date of Receipt sample..... : 2026-05-12
Date of Test..... : 2026-05-18 to 2026-05-28
Date of Issue..... : 2026-06-08
Test Report Form No...... : WTX_Part2_1093W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.


Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:



Lily Yang /Project Engineer

Approved by:



Jason Su/Manager

TABLE OF CONTENTS

1. General Information	4
1.1 Product Description for Equipment Under Test (EUT)	4
1.2 Test Standards	6
1.3 Test Methodology	6
1.4 Test Facility	6
2. Summary of Test Results	7
3. Specific Absorption Rate (SAR)	8
3.1 Introduction	8
3.2 SAR Definition	8
4. SAR Measurement System	9
4.1 The Measurement System	9
4.2 Probe	9
4.3 Probe Calibration Process	11
4.4 Phantom	12
4.5 Device Holder	12
4.6 Test Equipment List	13
5. Tissue Simulating Liquids	14
5.1 Composition of Tissue Simulating Liquid	14
5.2 Tissue Dielectric Parameters for Head and Body Phantoms	15
5.3 Tissue Calibration Result	16
6. SAR Measurement Evaluation	17
6.1 Purpose of System Performance Check	17
6.2 System Setup	17
6.3 Validation Results	18
7. EUT Testing Position	19
7.1 Body Position	19
7.2 EUT Antenna Position	19
7.3 EUT Testing Position	20
8. SAR Measurement Procedures	21
8.1 Measurement Procedures	21
8.2 Spatial Peak SAR Evaluation	21
8.3 Area & Zoom Scan Procedures	22
8.4 Volume Scan Procedures	22
8.5 SAR Averaged Methods	22
8.6 Power Drift Monitoring	22
9. SAR Test Result	23
9.1 Conducted RF Output Power	23
9.2 Test Results for Standalone SAR Test	30
9.3 Simultaneous Multi-band Transmission SAR Analysis	33
10. Measurement Uncertainty	34
10.1 Uncertainty for SAR Test	34
Annex A. Plots of System Performance Check	36
Annex B. Plots of SAR Measurement	42
Annex C. EUT Photos	50
Annex D. Test Setup Photos	52
Annex E. Calibration Certificate	55

Report version

Version No.	Date of issue	Description
Rev.00	2026-06-08	Original
/	/	/

1. General Information

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT:	
Product Name:	LWT7
Brand Name:	/
Model No.:	LWT7
Adding Model(s):	/
Rated Voltage:	Type-C DC5V Battery DC3.7V
Note: The test data is gathered from a production sample provided by the manufacturer.	

Technical Characteristics of EUT:	
4G	
Support Networks:	FDD-LTE
Support Band:	FDD-LTE Band 2, 4, 12, 13
Uplink Frequency:	FDD-LTE Band 2: Tx: 1850-1910MHz, FDD-LTE Band 4: Tx: 1710-1755MHz, FDD-LTE Band 12: Tx: 699-716MHz, FDD-LTE Band 13: Tx: 777-787MHz,
Downlink Frequency:	FDD-LTE Band 2: Rx: 1930-1990MHz, FDD-LTE Band 4: Rx: 2110-2155MHz, FDD-LTE Band 12: Rx: 729-746MHz, FDD-LTE Band 13: Rx: 746-756MHz,
RF Output Power:	FDD-LTE Band 2: 23.31dBm, FDD-LTE Band 4: 24.16dBm, FDD-LTE Band 12: 23.74dBm, FDD-LTE Band 13: 23.89dBm,
Type of Modulation:	QPSK, 16QAM
Antenna Type:	PCB Antenna
Antenna Gain:	FDD-LTE Band 2: 2.7dBi, FDD-LTE Band 4: 1.0dBi, FDD-LTE Band 12: 1.7dBi, FDD-LTE Band 13: 1.8dBi,
Bluetooth	
Bluetooth Version:	V4.2 (LE mode)
Frequency Range:	2402-2480MHz
RF Output Power:	3.77dBm (Conducted)
Data Rate:	1Mbps

Modulation:	GFSK
Quantity of Channels:	40
Channel Separation:	2MHz
Type of Antenna:	printed antenna
Antenna Gain:	1.6dBi
<i>Note: The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

1.2 Test Standards

The following report is accordance with FCC 47 CFR Part 2.1093, IEEE Std C95.1: 2019, IEEE C95.3: 2021, KDB 447498 D01 v06, KDB 648474 D04 v01r03, KDB 248227 D01 v02r02, KDB 941225 D01 v03r01, KDB 941225 D05 v02r05 , and KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02.

The objective is to determine compliance with FCC Part 2.1093 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which is result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02. The public notice KDB 447498 D01 v06 for Mobile and Portable Devices RF Exposure Procedure also.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010. Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464 A and the CAB identifier is CN0057.

2. Summary of Test Results

The maximum results of Specific Absorption Rate (SAR) have found during testing are as follows:

Frequency Band	Body (0mm Gap)	SAR _{1g} Limit (W/kg)
	Maximum SAR _{1g} (W/kg)	
LTE	0.479	1.6
Simultaneous Transmission	0.584	1.6

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2.1093 and IEEE Std C95.1: 2019 and had been tested in accordance with the measurement methods and procedure specified in KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02.

3. Specific Absorption Rate (SAR)

3.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4. SAR Measurement System

4.1 The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.




The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.

4.2 Probe

For the measurements the Specific Dosimetric E-Field Probe SSE2 0725-EPGO-446, and refer to the calibration report for probe parameters.

Probe calibration is realized, in compliance with IEC/IEEE 62209-1528:2020 STD, with CALISAR, Antenna proprietary calibration system. The calibration is performed with the IEC/IEEE 62209-1528:2020 annexes technique using reference guide at the five frequencies.

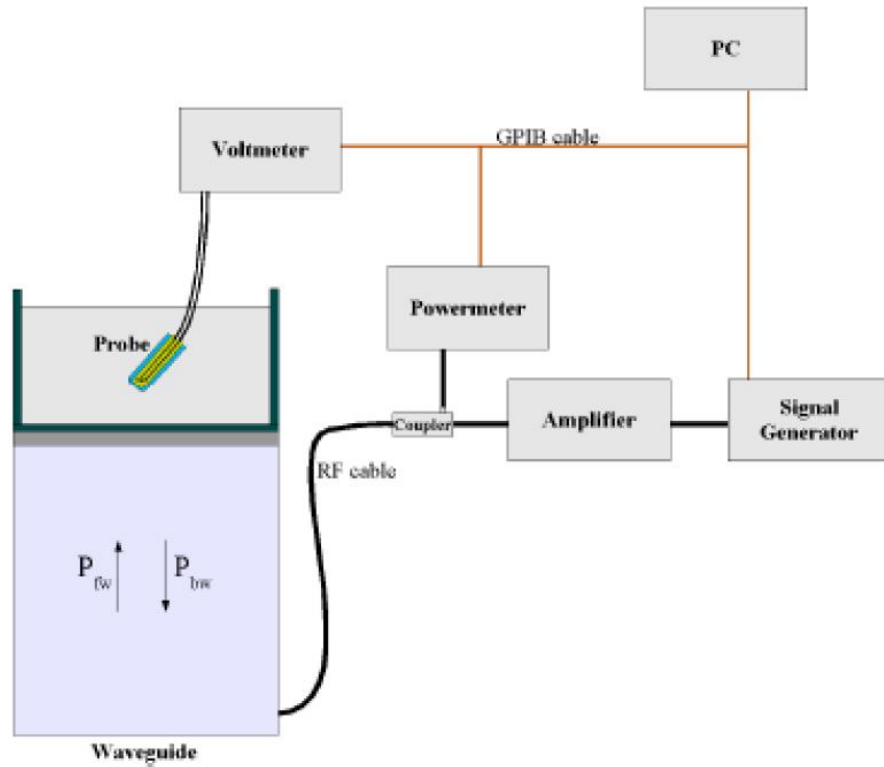

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\delta} \cos^2\left(\pi \frac{y}{a}\right) e^{-2z/\delta}$$

Where :

P_{fw} = Forward Power

P_{bw} = Backward Power

a and b =Waveguide dimensions

δ = Skin depth

Keithley configuration:

Rate = Medium; Filter = ON; RDGS = 10; Filter type = Moving Average; Range auto after each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it. The calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N) = SAR(N)/V_{lin}(N) \quad (N=1,2,3)$$

The linearised output voltage $V_{lin}(N)$ is obtained from the displayed output voltage $V(N)$ using

$$V_{lin}(N) = V(N) * (1 + V(N)/DCP(N)) \quad (N=1,2,3)$$

where DCP is the diode compression point in mV.

4.3 Probe Calibration Process

Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. SATIMO Probe calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an with CALISAR, Antenna proprietary calibration system.

Free Space Assessment Procedure

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1mW/cm².

Temperature Assessment Procedure

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where:

- Δt = exposure time (30 seconds),
- C = heat capacity of tissue (brain or muscle),
- ΔT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T/\Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. The electric field in the simulated tissue can be used to estimate SAR by equating the thermally derived SAR to that with the E- field component.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

σ = simulated tissue conductivity,


ρ = Tissue density (1.25 g/cm³ for brain tissue)

4.4 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

4.5 Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.

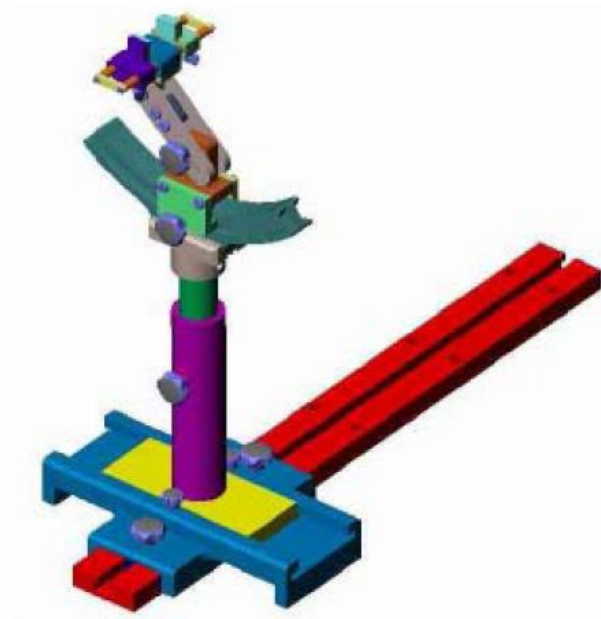

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005


4.6 Test Equipment List

Fixed asset Number	Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
WTXE1105A1002	E-Field Probe	MVG	SSE2	0725-EPGO-446	2026-03-03	2027-03-02
WTXE1053A1001-001	750MHz Dipole	MVG	SID750	SN 47/21 DIP 0G750-620	2025-10-22	2028-10-21
WTXE1053A1001-004	1800MHz Dipole	MVG	SID1800	SN 47/12 DIP 1G800-206	2025-10-22	2028-10-21
WTXE1053A1001-005	1900MHz Dipole	MVG	SID1900	SN 47/12 DIP 1G900-207	2025-12-31	2028-12-30
WTXE1053A1001-011	Dielectric Probe	SATIMO	SCLMP	SN 47/12 OCPG49	2026-02-05	2027-02-04
WTXE1075A1003	Power meter	Keithley	3500	1232959	2026-02-05	2027-02-04
WTXE1075A1002	Power meter	Keithley	3500	1162591	2026-02-05	2027-02-04
WTXE1104A1003	EXG Analog Signal Generator	KEYSIGHT	N5173B	MY61252892	2026-02-06	2027-02-05
WTXE1022A1002	GSM Tester	Rohde & Schwarz	CMU200	114403	2026-02-06	2027-02-05
WTXE1105A1001	Communications Tester	Rohde & Schwarz	CMW500	170903	2026-02-05	2027-02-04
WTXW1105A1137	Vector Network Analzers	Rohde & Schwarz	ZVB 8	101525	2026-02-06	2027-02-05
WTXE1076A1001	Power Divider	HP	11636B	JC-2017-10-002	2026-02-05	2027-02-04
WTXW1105A1135	RF Attenuator	Pasternack	N-JK	/	2026-02-05	2027-02-04
WTXW1105A1136	RF Attenuator	Pasternack	N-JK	/	2026-02-05	2027-02-04
WTXE1103A1003	Attenuator	Pasternack	PE4007-4	/	2026-02-05	2027-02-04
WTXE1091A1001	UXM 5G Wireless Test Platform	KEYSIGHT	E7515B	MY57450525	2026-02-06	2027-02-05

5. Tissue Simulating Liquids

5.1 Composition of Tissue Simulating Liquid

For the measurement of the field distribution inside the SAM phantom with SMTIMO, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. Please see the following photos for the liquid height.

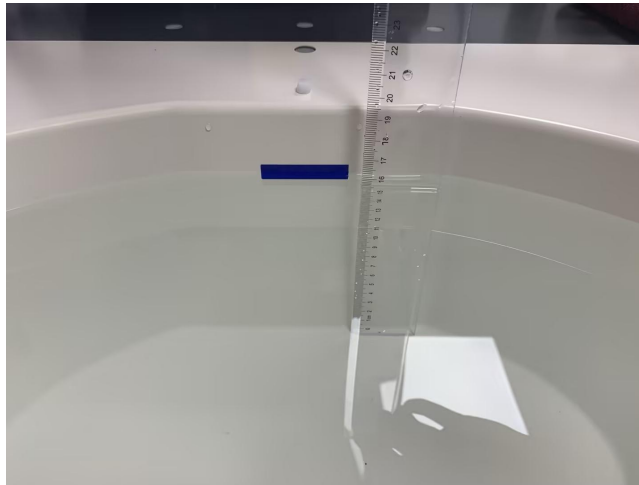

Liquid Height for Head/Body SAR

The Composition of Tissue Simulating Liquid

Frequency (MHz)	Water (%)	Salt (%)	Sugar (%)	HEC (%)	Preventol (%)	DGBE (%)
Head						
750	41.1	1.4	57.0	0.2	0.3	0
835	40.3	1.38	57.9	0.24	0.18	0
900	40.3	1.38	57.9	0.24	0.18	0
1800-2000	55.24	0.31	0	0	0	44.45
2300	55.40	0.08	0	0	0	44.52
2450	55.00	0	0	0	0	45.00
2600	55.242	0.306	0	0	0	44.452
3500	71.6	1.3	10.9	0.7	0.7	14.8
3700	71.7	1.3	10.8	0.6	0.8	14.8

Frequency (MHz)	Water (%)	Hexyl Carbitol (%)	Triton X-100 (%)
Head/Body			
5000-6000	65.52	17.24	17.24

5.2 Tissue Dielectric Parameters for Head and Body Phantoms

According to FCC KDBs, IEC/IEEE 62209-1528:2020 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

Target Frequency (MHz)	Head		Body	
	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity (σ)	Permittivity (ϵ_r)
150	0.76	52.3	0.80	61.9
300	0.87	45.3	0.92	58.2
450	0.87	43.5	0.94	56.7
750	0.89	41.9	0.96	55.5
835	0.90	41.5	0.97	55.2
900	0.97	41.5	1.05	55.0
915	0.98	41.5	1.06	55.0
1450	1.20	40.5	1.30	54.0
1610	1.29	40.3	1.40	53.8
1800-2000	1.40	40.0	1.52	53.3
2100	1.49	39.8	1.62	53.2
2300	1.67	39.5	1.81	52.9
2450	1.80	39.2	1.95	52.7
2600	1.96	39.0	2.16	52.5
3000	2.40	38.5	2.73	52.0
5200	4.66	36.0	5.30	49.0
5400	4.86	35.8	5.53	48.7
5600	5.07	35.5	5.77	48.5
5800	5.27	35.3	6.00	48.2

5.3 Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using COMOSAR Dielectric Probe Kit and an Agilent Network Analyzer.

Calibration Result for Dielectric Parameters of Tissue Simulating Liquid

Head Tissue Simulating Liquid									
Freq. MHz	Temp. (°C)	Conductivity			Permittivity			Limit (%)	Date
		Reading (σ)	Target (σ)	Delta (%)	Reading (ϵ_r)	Target (ϵ_r)	Delta (%)		
750	22.8	0.92	0.89	3.37	42.53	41.9	1.50	±5	2026-05-22
1800	22.5	1.42	1.40	1.43	40.96	40.0	2.40	±5	2026-05-25
1900	22.5	1.43	1.40	2.14	41.47	40.0	3.68	±5	2026-05-26


6. SAR Measurement Evaluation

6.1 Purpose of System Performance Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

6.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator at frequency 835MHz, 1800MHz, 1900MHz, 2450MHz, 2600MHz, and 5GHz. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom.

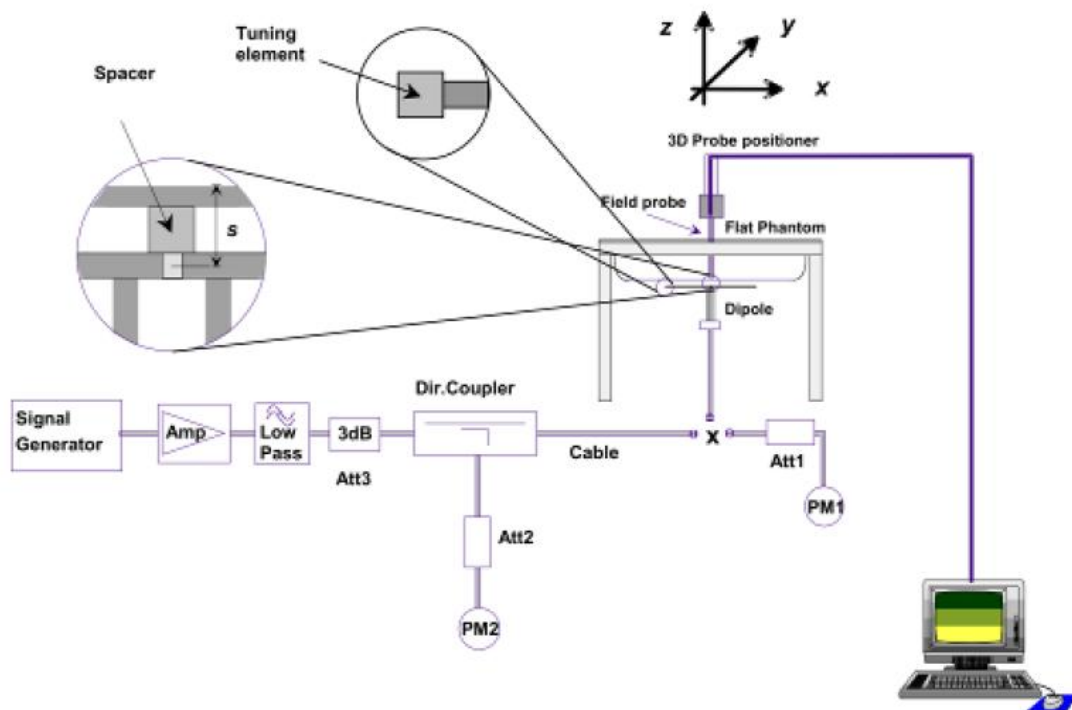

System Verification Setup Block Diagram



Setup Photo of Dipole Antenna

The output power on 750MHz/835MHz/900MHz dipole port must be calibrated to 24dBm (250mW) before dipole is connected.

The output power on 1800MHz/1900MHz/2300MHz/2450MHz/2600MHz/5GHz dipole port must be calibrated to 20dBm (100mW) before dipole is connected.

6.3 Validation Results

Comparing to the original SAR value provided by SATIMO, the validation data should be within its specification of 10 %. Table 6.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion.

Frequency	Power	Targeted SAR _{1g}	Measured SAR _{1g}	Normalized SAR _{1g}	Tolerance	Date
MHz	(mw)	(W/kg)	(W/kg)	(W/kg)	(%)	
750	250	8.54	2.215	8.818	3.26	2026-05-22
1800	100	38.50	3.825	38.250	-0.65	2026-05-25
1900	100	39.60	4.123	41.230	4.12	2026-05-26

Remark: Referring to IEC/IEEE 62209-1528:2020, the system check shall be performed at a test frequency that is within ±10% or ±100 MHz of the compliance test mid-band frequency, so the 1750 MHz system verification is made of 1800MHz Dipole.

Targeted and Measurement SAR

Please refer to Annex A for the plots of system performance check.

7. EUT Testing Position

7.1 Body Position

- (a) To position the device parallel to the phantom surface with each side.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device surface and the flat phantom to 0mm.

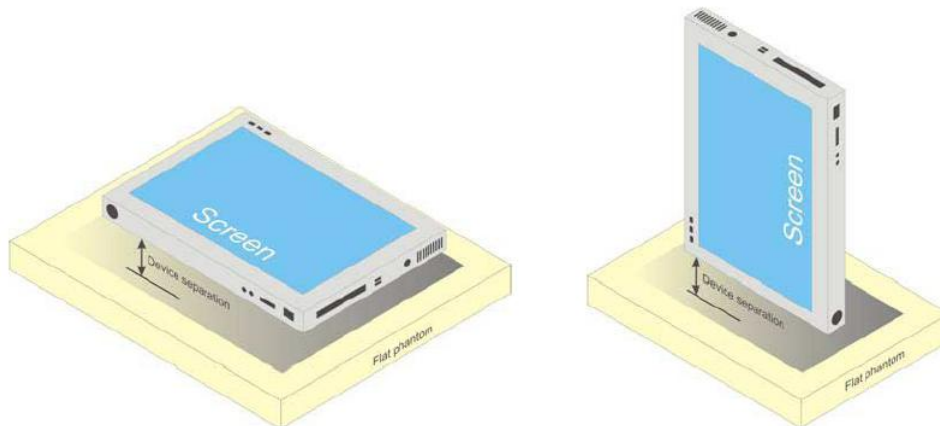


Illustration for Body Position

7.2 EUT Antenna Position



Block Diagram for EUT Antenna Position

Distance of EUT antenna-to-edge/surface(mm),						
Antennas	Back side	Front side	Left Edge	Right Edge	Top Edge	Bottom Edge
WWAN	<25	<25	<25	<25	83	<25

7.3 EUT Testing Position

Body mode SAR assessments are required for this device. This EUT was tested in different positions for different SAR test modes, more information as below:

Body SAR tests, Test distance: 0mm						
Antennas	Front Side	Back Side	Right Side	Left Side	Top Side	Bottom Side
WWAN	Yes	Yes	Yes	Yes	No	Yes

Remark:

- Referring to KDB 447498 D01 v06, KDB 941225 D06, this device is tested in direct contact (no gap) with flat phantom. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.
- Referring to KDB 648474 D04 Handset SAR v01r03, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg

Please refer to Annex D for the EUT test setup photos.

8. SAR Measurement Procedures

8.1 Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the highest power channel.
- (b) Keep EUT to radiate maximum output power or 100% factor (if applicable)
- (c) Measure output power through RF cable and power meter.
- (d) Place the EUT in the positions as Annex D demonstrates.
- (e) Set scan area, grid size and other setting on the SATIMO software.
- (f) Measure SAR results for the highest power channel on each testing position.
- (g) Find out the largest SAR result on these testing positions of each band
- (h) Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.2 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The SATIMO software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine. The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for 300 MHz to 3 GHz, and 8x8x8 points with step size 4, 4 and 2.5 mm for 3 GHz to 6 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

8.4 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing (step-size is 4, 4 and 2.5 mm). When all volume scan were completed, the software can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.5 SAR Averaged Methods

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10g and 1 g requires a very fine resolution in the three dimensional scanned data array.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In SATIMO measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

9. SAR Test Result

9.1 Conducted RF Output Power

Band	Bandwidth	Modulation	Channel	RB Size	RB Start	NBIndex	Conducted Power(dBm)	Verdict
Band2	5MHz	18625	QPSK	1	0	Low	22.21	PASS
Band2	5MHz	18625	QPSK	1	5	Low	22.22	PASS
Band2	5MHz	18625	QPSK	6	0	Low	22.24	PASS
Band2	5MHz	18900	QPSK	1	0	Low	22.76	PASS
Band2	5MHz	18900	QPSK	1	5	Low	22.75	PASS
Band2	5MHz	18900	QPSK	6	0	Low	22.74	PASS
Band2	5MHz	19175	QPSK	1	0	High	22.64	PASS
Band2	5MHz	19175	QPSK	1	5	High	22.73	PASS
Band2	5MHz	19175	QPSK	6	0	High	22.90	PASS
Band2	5MHz	18625	16QAM	1	0	Low	22.25	PASS
Band2	5MHz	18625	16QAM	1	5	Low	22.22	PASS
Band2	5MHz	18625	16QAM	6	0	Low	22.29	PASS
Band2	5MHz	18900	16QAM	1	0	Low	22.76	PASS
Band2	5MHz	18900	16QAM	1	5	Low	22.75	PASS
Band2	5MHz	18900	16QAM	6	0	Low	22.74	PASS
Band2	5MHz	19175	16QAM	1	0	High	22.84	PASS
Band2	5MHz	19175	16QAM	1	5	High	22.90	PASS
Band2	5MHz	19175	16QAM	6	0	High	22.89	PASS
Band2	10MHz	18650	QPSK	1	0	Low	22.34	PASS
Band2	10MHz	18650	QPSK	1	5	Low	22.35	PASS
Band2	10MHz	18650	QPSK	6	0	Low	22.36	PASS
Band2	10MHz	18900	QPSK	1	0	Low	22.80	PASS
Band2	10MHz	18900	QPSK	1	5	Low	22.80	PASS
Band2	10MHz	18900	QPSK	6	0	Low	22.80	PASS
Band2	10MHz	19150	QPSK	1	0	High	22.87	PASS
Band2	10MHz	19150	QPSK	1	5	High	22.87	PASS
Band2	10MHz	19150	QPSK	6	0	High	22.86	PASS
Band2	10MHz	18650	16QAM	1	0	Low	22.33	PASS
Band2	10MHz	18650	16QAM	1	5	Low	22.35	PASS
Band2	10MHz	18650	16QAM	6	0	Low	22.34	PASS
Band2	10MHz	18900	16QAM	1	0	Low	22.79	PASS
Band2	10MHz	18900	16QAM	1	5	Low	22.79	PASS
Band2	10MHz	18900	16QAM	6	0	Low	22.79	PASS
Band2	10MHz	19150	16QAM	1	0	High	22.87	PASS
Band2	10MHz	19150	16QAM	1	5	High	22.87	PASS
Band2	10MHz	19150	16QAM	6	0	High	22.87	PASS

Band2	15MHz	18675	QPSK	1	0	Low	23.28	PASS
Band2	15MHz	18675	QPSK	1	5	Low	23.27	PASS
Band2	15MHz	18675	QPSK	6	0	Low	23.28	PASS
Band2	15MHz	18900	QPSK	1	0	Low	23.12	PASS
Band2	15MHz	18900	QPSK	1	5	Low	23.12	PASS
Band2	15MHz	18900	QPSK	6	0	Low	23.11	PASS
Band2	15MHz	19125	QPSK	1	0	High	23.11	PASS
Band2	15MHz	19125	QPSK	1	5	High	23.16	PASS
Band2	15MHz	19125	QPSK	6	0	High	23.17	PASS
Band2	15MHz	18675	16QAM	1	0	Low	23.27	PASS
Band2	15MHz	18675	16QAM	1	5	Low	23.28	PASS
Band2	15MHz	18675	16QAM	6	0	Low	23.28	PASS
Band2	15MHz	18900	16QAM	1	0	Low	23.10	PASS
Band2	15MHz	18900	16QAM	1	5	Low	23.11	PASS
Band2	15MHz	18900	16QAM	6	0	Low	23.15	PASS
Band2	15MHz	19125	16QAM	1	0	High	23.12	PASS
Band2	15MHz	19125	16QAM	1	5	High	23.17	PASS
Band2	15MHz	19125	16QAM	6	0	High	23.16	PASS
Band2	20MHz	18700	QPSK	1	0	Low	23.27	PASS
Band2	20MHz	18700	QPSK	1	5	Low	23.28	PASS
Band2	20MHz	18700	QPSK	6	0	Low	23.27	PASS
Band2	20MHz	18900	QPSK	1	0	Low	23.16	PASS
Band2	20MHz	18900	QPSK	1	5	Low	23.17	PASS
Band2	20MHz	18900	QPSK	6	0	Low	23.14	PASS
Band2	20MHz	19100	QPSK	1	0	High	23.17	PASS
Band2	20MHz	19100	QPSK	1	5	High	23.22	PASS
Band2	20MHz	19100	QPSK	6	0	High	23.20	PASS
Band2	20MHz	18700	16QAM	1	0	Low	23.27	PASS
Band2	20MHz	18700	16QAM	1	5	Low	23.31	PASS
Band2	20MHz	18700	16QAM	6	0	Low	23.26	PASS
Band2	20MHz	18900	16QAM	1	0	Low	23.15	PASS
Band2	20MHz	18900	16QAM	1	5	Low	23.12	PASS
Band2	20MHz	18900	16QAM	6	0	Low	23.14	PASS
Band2	20MHz	19100	16QAM	1	0	High	23.21	PASS
Band2	20MHz	19100	16QAM	1	5	High	23.23	PASS
Band2	20MHz	19100	16QAM	6	0	High	23.20	PASS

Band	Bandwidth	Modulation	Channel	RB Size	RB Start	NBIndex	Conducted Power(dBm)	Verdict
Band4	5MHz	19975	QPSK	1	0	Low	23.78	PASS
Band4	5MHz	19975	QPSK	1	5	Low	23.78	PASS
Band4	5MHz	19975	QPSK	6	0	Low	23.76	PASS
Band4	5MHz	20175	QPSK	1	0	Low	23.63	PASS
Band4	5MHz	20175	QPSK	1	5	Low	23.63	PASS
Band4	5MHz	20175	QPSK	6	0	Low	23.62	PASS
Band4	5MHz	20375	QPSK	1	0	High	23.69	PASS
Band4	5MHz	20375	QPSK	1	5	High	23.69	PASS
Band4	5MHz	20375	QPSK	6	0	High	23.88	PASS
Band4	5MHz	19975	16QAM	1	0	Low	23.76	PASS
Band4	5MHz	19975	16QAM	1	5	Low	23.76	PASS
Band4	5MHz	19975	16QAM	6	0	Low	23.61	PASS
Band4	5MHz	20175	16QAM	1	0	Low	23.62	PASS
Band4	5MHz	20175	16QAM	1	5	Low	23.63	PASS
Band4	5MHz	20175	16QAM	6	0	Low	23.42	PASS
Band4	5MHz	20375	16QAM	1	0	High	23.88	PASS
Band4	5MHz	20375	16QAM	1	5	High	23.88	PASS
Band4	5MHz	20375	16QAM	6	0	High	23.88	PASS
Band4	10MHz	20000	QPSK	1	0	Low	23.89	PASS
Band4	10MHz	20000	QPSK	1	5	Low	23.90	PASS
Band4	10MHz	20000	QPSK	6	0	Low	23.92	PASS
Band4	10MHz	20175	QPSK	1	0	Low	23.74	PASS
Band4	10MHz	20175	QPSK	1	5	Low	23.75	PASS
Band4	10MHz	20175	QPSK	6	0	Low	23.73	PASS
Band4	10MHz	20350	QPSK	1	0	High	23.80	PASS
Band4	10MHz	20350	QPSK	1	5	High	23.90	PASS
Band4	10MHz	20350	QPSK	6	0	High	23.81	PASS
Band4	10MHz	20000	16QAM	1	0	Low	23.89	PASS
Band4	10MHz	20000	16QAM	1	5	Low	23.90	PASS
Band4	10MHz	20000	16QAM	6	0	Low	23.90	PASS
Band4	10MHz	20175	16QAM	1	0	Low	23.73	PASS
Band4	10MHz	20175	16QAM	1	5	Low	23.74	PASS
Band4	10MHz	20175	16QAM	6	0	Low	23.74	PASS
Band4	10MHz	20350	16QAM	1	0	High	23.82	PASS
Band4	10MHz	20350	16QAM	1	5	High	23.84	PASS
Band4	10MHz	20350	16QAM	6	0	High	23.82	PASS
Band4	15MHz	20025	QPSK	1	0	Low	24.10	PASS
Band4	15MHz	20025	QPSK	1	5	Low	24.09	PASS
Band4	15MHz	20025	QPSK	6	0	Low	24.02	PASS

Band4	15MHz	20175	QPSK	1	0	Low	23.93	PASS
Band4	15MHz	20175	QPSK	1	5	Low	23.95	PASS
Band4	15MHz	20175	QPSK	6	0	Low	23.97	PASS
Band4	15MHz	20325	QPSK	1	0	High	24.07	PASS
Band4	15MHz	20325	QPSK	1	5	High	24.12	PASS
Band4	15MHz	20325	QPSK	6	0	High	24.13	PASS
Band4	15MHz	20025	16QAM	1	0	Low	23.97	PASS
Band4	15MHz	20025	16QAM	1	5	Low	24.09	PASS
Band4	15MHz	20025	16QAM	6	0	Low	24.02	PASS
Band4	15MHz	20175	16QAM	1	0	Low	23.96	PASS
Band4	15MHz	20175	16QAM	1	5	Low	23.83	PASS
Band4	15MHz	20175	16QAM	6	0	Low	23.95	PASS
Band4	15MHz	20325	16QAM	1	0	High	24.04	PASS
Band4	15MHz	20325	16QAM	1	5	High	24.14	PASS
Band4	15MHz	20325	16QAM	6	0	High	24.12	PASS
Band4	20MHz	20050	QPSK	1	0	Low	23.53	PASS
Band4	20MHz	20050	QPSK	1	5	Low	23.57	PASS
Band4	20MHz	20050	QPSK	6	0	Low	23.56	PASS
Band4	20MHz	20175	QPSK	1	0	Low	23.97	PASS
Band4	20MHz	20175	QPSK	1	5	Low	23.98	PASS
Band4	20MHz	20175	QPSK	6	0	Low	24.02	PASS
Band4	20MHz	20300	QPSK	1	0	High	24.04	PASS
Band4	20MHz	20300	QPSK	1	5	High	24.11	PASS
Band4	20MHz	20300	QPSK	6	0	High	24.13	PASS
Band4	20MHz	20050	16QAM	1	0	Low	23.44	PASS
Band4	20MHz	20050	16QAM	1	5	Low	23.53	PASS
Band4	20MHz	20050	16QAM	6	0	Low	23.48	PASS
Band4	20MHz	20175	16QAM	1	0	Low	24.03	PASS
Band4	20MHz	20175	16QAM	1	5	Low	24.02	PASS
Band4	20MHz	20175	16QAM	6	0	Low	23.97	PASS
Band4	20MHz	20300	16QAM	1	0	High	24.11	PASS
Band4	20MHz	20300	16QAM	1	5	High	24.11	PASS
Band4	20MHz	20300	16QAM	6	0	High	24.16	PASS

Band	Bandwidth	Modulation	Channel	RB Size	RB Start	NBIndex	Conducted Power(dBm)	Verdict
Band12	5MHz	23035	QPSK	1	0	Low	23.55	PASS
Band12	5MHz	23035	QPSK	1	5	Low	23.56	PASS
Band12	5MHz	23035	QPSK	6	0	Low	23.64	PASS
Band12	5MHz	23095	QPSK	1	0	Low	23.69	PASS
Band12	5MHz	23095	QPSK	1	5	Low	23.66	PASS
Band12	5MHz	23095	QPSK	6	0	Low	23.43	PASS
Band12	5MHz	23155	QPSK	1	0	High	23.64	PASS
Band12	5MHz	23155	QPSK	1	5	High	23.64	PASS
Band12	5MHz	23155	QPSK	6	0	High	23.42	PASS
Band12	5MHz	23035	16QAM	1	0	Low	23.60	PASS
Band12	5MHz	23035	16QAM	1	5	Low	23.62	PASS
Band12	5MHz	23035	16QAM	6	0	Low	23.64	PASS
Band12	5MHz	23095	16QAM	1	0	Low	23.68	PASS
Band12	5MHz	23095	16QAM	1	5	Low	23.65	PASS
Band12	5MHz	23095	16QAM	6	0	Low	23.72	PASS
Band12	5MHz	23155	16QAM	1	0	High	23.64	PASS
Band12	5MHz	23155	16QAM	1	5	High	23.64	PASS
Band12	5MHz	23155	16QAM	6	0	High	23.64	PASS
Band12	10MHz	23060	QPSK	1	0	Low	23.61	PASS
Band12	10MHz	23060	QPSK	1	5	Low	23.69	PASS
Band12	10MHz	23060	QPSK	6	0	Low	23.59	PASS
Band12	10MHz	23095	QPSK	1	0	Low	23.68	PASS
Band12	10MHz	23095	QPSK	1	5	Low	23.65	PASS
Band12	10MHz	23095	QPSK	6	0	Low	23.66	PASS
Band12	10MHz	23130	QPSK	1	0	High	23.56	PASS
Band12	10MHz	23130	QPSK	1	5	High	23.63	PASS
Band12	10MHz	23130	QPSK	6	0	High	23.62	PASS
Band12	10MHz	23060	16QAM	1	0	Low	23.62	PASS
Band12	10MHz	23060	16QAM	1	5	Low	23.69	PASS
Band12	10MHz	23060	16QAM	6	0	Low	23.68	PASS
Band12	10MHz	23095	16QAM	1	0	Low	23.68	PASS
Band12	10MHz	23095	16QAM	1	5	Low	23.74	PASS
Band12	10MHz	23095	16QAM	6	0	Low	23.66	PASS
Band12	10MHz	23130	16QAM	1	0	High	23.57	PASS
Band12	10MHz	23130	16QAM	1	5	High	23.56	PASS
Band12	10MHz	23130	16QAM	6	0	High	23.57	PASS

Band	Bandwidth	Modulation	Channel	RB Size	RB Start	NBIndex	Conducted Power(dBm)	Verdict
Band13	5MHz	23205	QPSK	1	0	Low	23.71	PASS
Band13	5MHz	23205	QPSK	1	5	Low	23.77	PASS
Band13	5MHz	23205	QPSK	6	0	Low	23.76	PASS
Band13	5MHz	23230	QPSK	1	0	Low	23.77	PASS
Band13	5MHz	23230	QPSK	1	5	Low	23.76	PASS
Band13	5MHz	23230	QPSK	6	0	Low	23.80	PASS
Band13	5MHz	23255	QPSK	1	0	High	23.82	PASS
Band13	5MHz	23255	QPSK	1	5	High	23.84	PASS
Band13	5MHz	23255	QPSK	6	0	High	23.88	PASS
Band13	5MHz	23205	16QAM	1	0	Low	23.74	PASS
Band13	5MHz	23205	16QAM	1	5	Low	23.76	PASS
Band13	5MHz	23205	16QAM	6	0	Low	23.75	PASS
Band13	5MHz	23230	16QAM	1	0	Low	23.76	PASS
Band13	5MHz	23230	16QAM	1	5	Low	23.77	PASS
Band13	5MHz	23230	16QAM	6	0	Low	23.80	PASS
Band13	5MHz	23255	16QAM	1	0	High	23.81	PASS
Band13	5MHz	23255	16QAM	1	5	High	23.85	PASS
Band13	5MHz	23255	16QAM	6	0	High	23.88	PASS
Band13	10MHz	23230	QPSK	1	0	Low	23.77	PASS
Band13	10MHz	23230	QPSK	1	5	Low	23.89	PASS
Band13	10MHz	23230	QPSK	6	0	Low	23.78	PASS
Band13	10MHz	23230	16QAM	1	0	Low	23.77	PASS
Band13	10MHz	23230	16QAM	1	5	Low	23.79	PASS
Band13	10MHz	23230	16QAM	6	0	Low	23.78	PASS

Remark:

1. Per KDB941225 D05 v02r05, Start with the largest channel bandwidth then measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle, and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. 6 When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.
2. Per KDB941225 D05 v02r05, the procedures required for 1 RB allocation in 5.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.
3. Per KDB941225 D05 v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations, and the highest reported SAR for 1 RB and 50% RB allocation in 5.2.1 and 5.2.2 are ≤ 0.8

W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

4. Per KDB941225 D05 v02r05, for each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in 5.2.1, 5.2.2, and 5.2.3 to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is > ½ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

Bluetooth - Maximum Output Power					
Test Mode	Data Rate	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
GFSK(LE)	1Mbps	CH 00	2402	3.74	4.0
		CH 19	2440	3.71	4.0
		CH 39	2480	3.77	4.0

Remark:

Bluetooth maximum output power is 1.767dBm and Maximum Tune-Up output power is 2.0dBm,. Per KDB 447498 D01 V06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}$$

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

Bluetooth:

Tune-Up Power (dBm)	Max. Power (mW)	Distance (mm)	Frequency (GHz)	Result	Limit
4.0	2.51	5	2.48	0.791	3

The exclusion thresholds is $0.791 < 3$, therefore, the RF exposure evaluation is not required.

9.2 Test Results for Standalone SAR Test

Body SAR

LTE Band 2–Body SAR Test (Gap: 0mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR 1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
1.	16QAM 20MHz 1RB	Back Face	1860	23.31	24.0	1.172	0.113	0.132
	16QAM 20MHz 1RB	Front Face	1860	23.31	24.0	1.172	0.189	0.222
	16QAM 20MHz 1RB	Right Side	1860	23.31	24.0	1.172	0.021	0.025
	16QAM 20MHz 1RB	Left Side	1860	23.31	24.0	1.172	0.056	0.066
	16QAM 20MHz 1RB	Bottom Side	1860	23.31	24.0	1.172	0.040	0.047
	16QAM 20MHz 50%RB	Back Face	1860	23.31	24.0	1.172	0.086	0.101
	16QAM 20MHz 50%RB	Front Face	1860	23.31	24.0	1.172	0.166	0.195
	16QAM 20MHz 50%RB	Right Side	1860	23.31	24.0	1.172	0.010	0.012
	16QAM 20MHz 50%RB	Left Side	1860	23.31	24.0	1.172	0.042	0.049
	16QAM 20MHz 50%RB	Bottom Side	1860	23.31	24.0	1.172	0.020	0.023

LTE Band 4–Body SAR Test (Gap: 0mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR 1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
2.	16QAM 20MHz 6RB	Back Face	1745	24.16	25.0	1.213	0.395	0.479
	16QAM 20MHz 6RB	Front Face	1745	24.16	25.0	1.213	0.391	0.474
	16QAM 20MHz 6RB	Right Side	1745	24.16	25.0	1.213	0.142	0.172
	16QAM 20MHz 6RB	Left Side	1745	24.16	25.0	1.213	0.010	0.012
	16QAM 20MHz 6RB	Bottom Side	1745	24.16	25.0	1.213	0.010	0.012
	16QAM 20MHz 50%RB	Back Face	1745	24.16	25.0	1.213	0.376	0.456
	16QAM 20MHz 50%RB	Front Face	1745	24.16	25.0	1.213	0.353	0.428
	16QAM 20MHz 50%RB	Right Side	1745	24.16	25.0	1.213	0.122	0.148
	16QAM 20MHz 50%RB	Left Side	1745	24.16	25.0	1.213	0.009	0.011
	16QAM 20MHz 50%RB	Bottom Side	1745	24.16	25.0	1.213	0.009	0.011

LTE Band 12–Body SAR Test (Gap: 0mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR 1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
3.	16QAM 10MHz 1RB	Back Face	707.5	23.74	24.0	1.062	0.174	0.185
	16QAM 10MHz 1RB	Front Face	707.5	23.74	24.0	1.062	0.224	0.238
	16QAM 10MHz 1RB	Right Side	707.5	23.74	24.0	1.062	0.166	0.176
	16QAM 10MHz 1RB	Left Side	707.5	23.74	24.0	1.062	0.185	0.196
	16QAM 10MHz 1RB	Bottom Side	707.5	23.74	24.0	1.062	0.057	0.061
	16QAM 10MHz 50%RB	Back Face	707.5	23.74	24.0	1.062	0.131	0.139
	16QAM 10MHz 50%RB	Front Face	707.5	23.74	24.0	1.062	0.166	0.176
	16QAM 10MHz 50%RB	Right Side	707.5	23.74	24.0	1.062	0.119	0.126
	16QAM 10MHz 50%RB	Left Side	707.5	23.74	24.0	1.062	0.139	0.148
	16QAM 10MHz 50%RB	Bottom Side	707.5	23.74	24.0	1.062	0.046	0.049

LTE Band 13–Body SAR Test (Gap: 0mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR 1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
4.	QPSK 10MHz 1RB	Back Face	782	23.89	24.0	1.026	0.362	0.371
	QPSK 10MHz 1RB	Front Face	782	23.89	24.0	1.026	0.207	0.212
	QPSK 10MHz 1RB	Right Side	782	23.89	24.0	1.026	0.222	0.228
	QPSK 10MHz 1RB	Left Side	782	23.89	24.0	1.026	0.219	0.225
	QPSK 10MHz 1RB	Bottom Side	782	23.89	24.0	1.026	0.064	0.066
	QPSK 10MHz 50%RB	Back Face	782	23.89	24.0	1.026	0.325	0.333
	QPSK 10MHz 50%RB	Front Face	782	23.89	24.0	1.026	0.197	0.202
	QPSK 10MHz 50%RB	Right Side	782	23.89	24.0	1.026	0.163	0.167
	QPSK 10MHz 50%RB	Left Side	782	23.89	24.0	1.026	0.196	0.201
	QPSK 10MHz 50%RB	Bottom Side	782	23.89	24.0	1.026	0.051	0.052

Remark:

- 1) Per KDB 447498 D01 v06, if the highest output channel SAR for each exposure position ≤ 0.8 W/kg other channels SAR tests are not necessary.
- 2) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 3) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 4) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from

the 1-g SAR limit).

5) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

9.3 Simultaneous Multi-band Transmission SAR Analysis

List of Mode for Simultaneous Multi-band Transmission

No.	Configurations	Body SAR
1	LTE(Data) + Bluetooth(Data)	Yes

Remark:

1. According to the KDB 447498 D01 v06, when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x]$

W/kg for test separation distances ≤ 50 mm;

where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.

For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01 v06 as below:

Bluetooth:

Tune-Up Power (dBm)	Max. Power (mW)	Distance (mm)	Frequency (GHz)	X	SAR(1g) 5mm
4.0	2.51	5/10	2.480	7.5	0.105

2. The maximum SAR summation is calculated based on the same configuration and test position.

Body SAR

WWAN and WLAN

	WWAN		Bluetooth	Summed SAR (W/kg)
Position	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	LTE	0.479	0.105	0.584
Front	LTE	0.474	0.105	0.579
Right side	LTE	0.228	0.105	0.333
Left side	LTE	0.225	0.105	0.330
Bottom side	LTE	--	0.105	0.105
Top side	LTE	0.066	0.105	0.171

10. Measurement Uncertainty

10.1 Uncertainty for SAR Test

Input quantity X_i (source of uncertainty)	Ref.	Prob. Dist PDF_i	Unc. $a(x_i)$	Div. q_i	$u(x_i) =$ $a(x_i)/q_i$	c_i (1 g; 10 g)	$u(y) = c_i \cdot u(x_i)$	v_i or v_{eff}
Measurement System errors								
Probe calibration	8.4.1.1	N	7.00	2	3.5	1	3.5	∞
Probe calibration drift	8.4.1.2	R	0	$\sqrt{3}$	0	1	0	∞
Probe linearity and detection limit	8.4.1.3	R	5.00	$\sqrt{3}$	2.89	1	2.89	∞
Broadband signal	8.4.1.4	R	0	$\sqrt{3}$	0	1	0	∞
Probe isotropy	8.4.1.5	R	2.50	$\sqrt{3}$	1.44	1	1.44	∞
Other probe and data acquisition errors	8.4.1.6	N	0.02	1	0.02	1	0.02	∞
RF ambient and noise	8.4.1.7	N	0	1	0	1	0	∞
Probe positioning errors	8.4.1.8	N	1.40	1	1.40	$2/TM$	0.70	
Data processing errors	8.4.1.9	N	0.05	1	0.05	1	0.05	∞
Phantom and device (DUT or validation antenna) errors								
Measurement of phantom conductivity(σ)	8.4.2.1	N	4.00	1	4.00	c_{ϵ}, c_{σ}	4.00	∞
Temperature effects (medium)	8.4.2.2	R	2.50	$\sqrt{3}$	1.44	c_{ϵ}, c_{σ}	1.44	∞
Shell permittivity	8.4.2.3	R	5.00	$\sqrt{3}$	2.88	See 8.4.2.3	2.88	∞
Distance between the radiating element of the DUT and the phantom medium	8.4.2.4	N	0.03	1	0.03	2	0.02	∞
Repeatability of positioning the DUT or source against the phantom	8.4.2.5	N	0.05	1	0.05	1	0.05	5
Device holder effects	8.4.2.6	N	5.00	1	5.00	1	5.00	
Effect of operating mode on probe sensitivity	8.4.2.7	R	0	$\sqrt{3}$	0	1	0	∞
Time-average SAR	8.4.2.8	R	0	$\sqrt{3}$	0	1	0	∞
Variation in SAR due to drift in output of DUT	8.4.2.9	N	5.00	1	5.00	1	5.00	
Validation antenna uncertainty (validation measurement only)	8.4.2.10	N	0	1	0	1	0	
Uncertainty in accepted power	8.4.2.11	N	0	1	0	1	0	

(validation measurement only)								
Corrections to the SAR result								
Phantom deviation from target (ϵ', σ)	8.4.3.1	N	0.05	1	0.05	1	0.05	
SAR scaling	8.4.3.2	R	2.00	$\sqrt{3}$	1.15	1	1.15	
Combined Standard Uncertainty		RSS			10.11		10.11	$V_{\text{eff}}^{\text{C}}$
Expanded uncertainty, U		K=2			20.23		20.23	

Annex A. Plots of System Performance Check

MEASUREMENT 1

Type: Validation measurement
Date of measurement: 2026-05-22
Measurement duration: 15 minutes 50 seconds
E-field Probe: SSE2 - 0725-EPGO-446; ConvF: 1.50; Calibrated: 2026-03-03


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Dipole
Band	CW750
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results

Frequency (MHz)	750.000000
Relative Permittivity (real part)	42.533643
Conductivity (S/m)	0.924571
Ambient Temperature	22.8
Liquid Temperature	22.8

C. SAR Surface and Volume

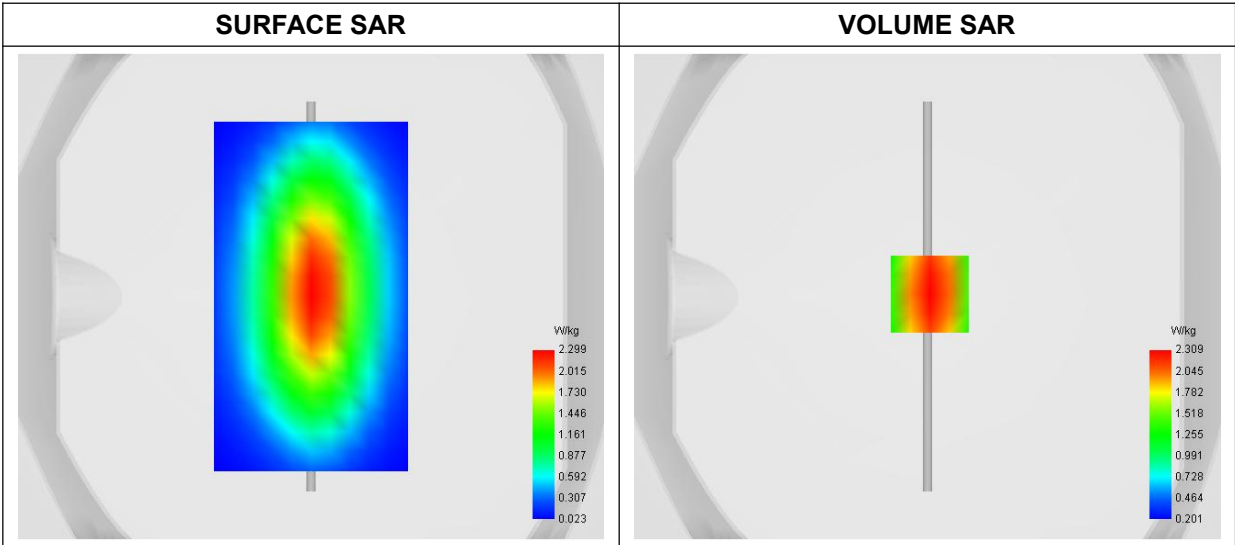


Maximum location: X=1.00, Y=1.00 ; SAR Peak: 3.18 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	1.435
SAR 1g (W/Kg)	2.215
Variation (%)	-0.150
Horizontal validation criteria: minimum distance (mm)	14.74142
Vertical validation criteria: SAR ratio M2/M1 (%)	62.304141

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	3.197	2.309	1.556	1.075	0.754	0.521	0.361

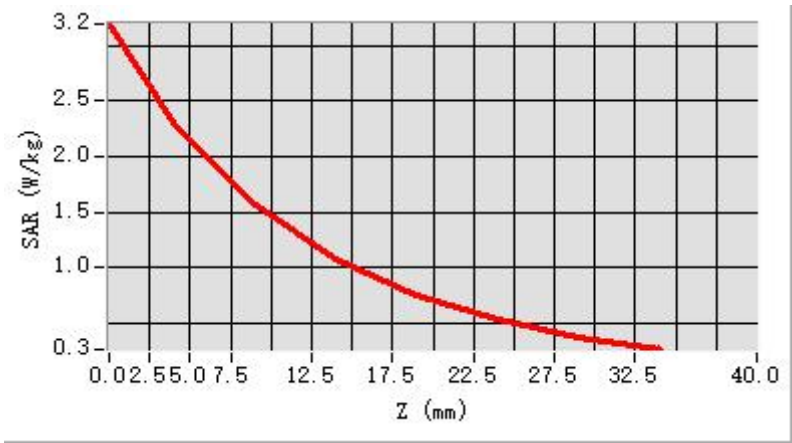

MEASUREMENT 2

Type: Validation measurement
Date of measurement: 2026-05-25
Measurement duration: 25 minutes 31 seconds
E-field Probe: SSE2 - 0725-EPGO-446; ConvF: 1.24; Calibrated: 2026-03-03


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Validation plane
Device Position	Dipole
Band	CW1800
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results

Frequency (MHz)	1800.000000
Relative Permittivity (real part)	40.961586
Conductivity (S/m)	1.422117
Ambient Temperature	22.5
Liquid Temperature	22.5

C. SAR Surface and Volume

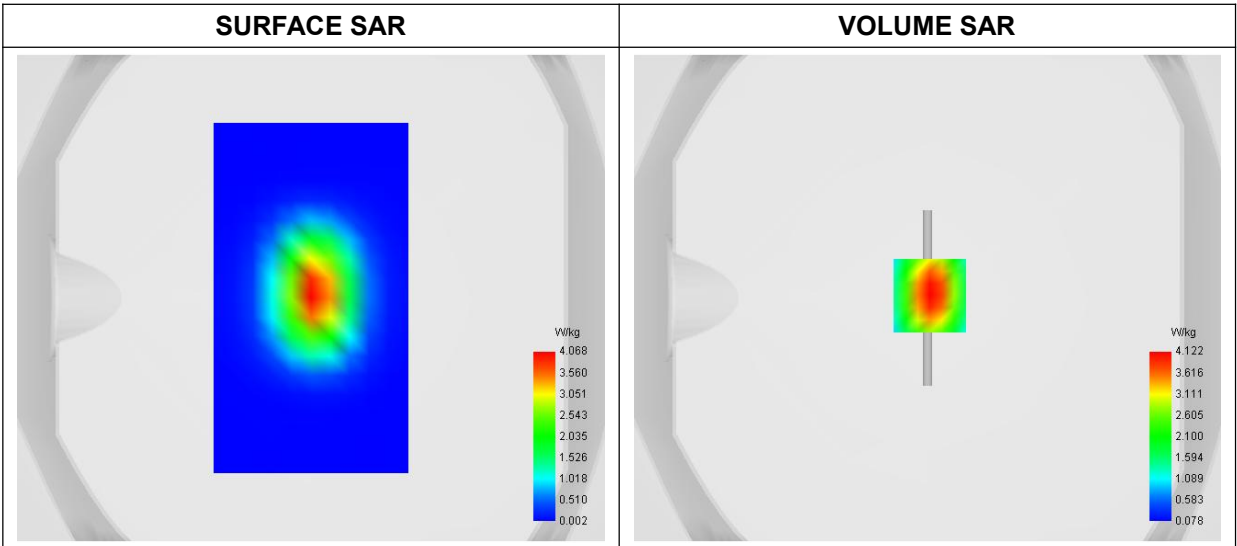

Maximum location: X=1.00, Y=1.00 ; SAR Peak: 6.51 W/kg


D. SAR 1g & 10g

SAR 10g (W/Kg)	2.000
----------------	-------

SAR 1g (W/Kg)	3.825
Variation (%)	0.390
Horizontal validation criteria: minimum distance (mm)	14.142136
Vertical validation criteria: SAR ratio M2/M1 (%)	62.023045

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00	20.00	24.00	28.00
SAR (W/Kg)	6.536	4.122	2.557	1.609	1.028	0.649	0.410	0.259

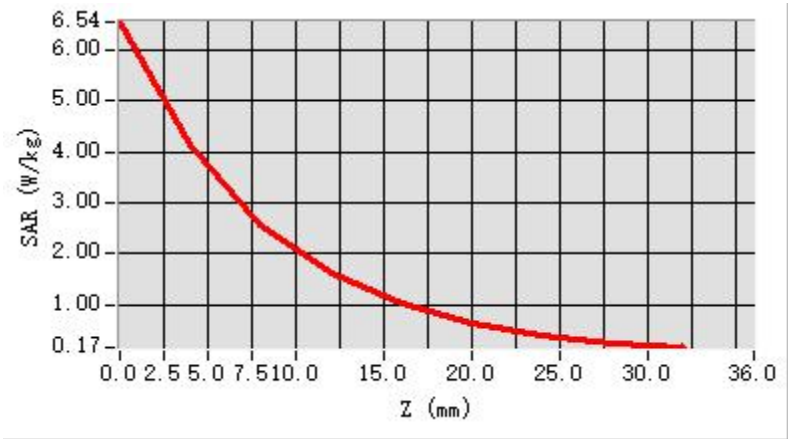

MEASUREMENT 3

Type: Validation measurement
Date of measurement: 2026-05-26
Measurement duration: 25 minutes 31 seconds
E-field Probe: SSE2 - 0725-EPGO-446; ConvF: 1.24; Calibrated: 2026-03-03


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative Permittivity (real part)	41.472372
Conductivity (S/m)	1.434126
Ambient Temperature	22.5
Liquid Temperature	22.5

C. SAR Surface and Volume

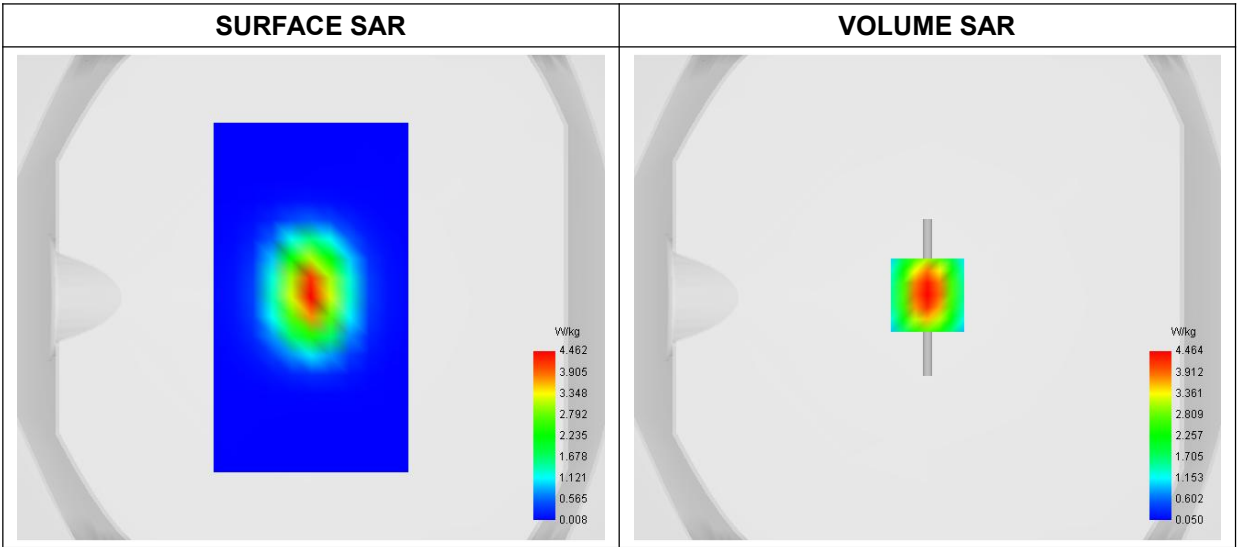


Maximum location: X=0.00, Y=1.00 ; SAR Peak: 7.29 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	2.040
SAR 1g (W/Kg)	4.123
Variation (%)	-0.040
Horizontal validation criteria: minimum distance (mm)	14.142136
Vertical validation criteria: SAR ratio M2/M1 (%)	58.933526

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00	20.00	24.00	28.00
SAR (W/Kg)	7.347	4.464	2.631	1.585	0.954	0.571	0.342	0.205

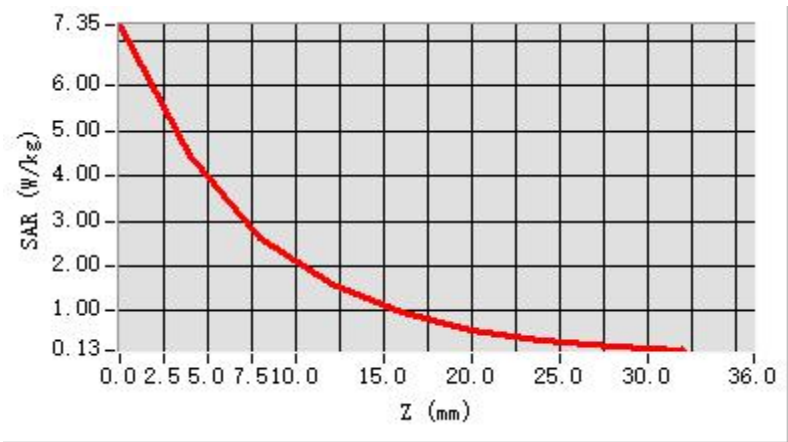

Annex B. Plots of SAR Measurement

MEASUREMENT 1

Type: Measurement (Complete)
Date of measurement: 2026-05-25
Measurement duration: 25 minutes 31 seconds
E-field Probe: SSE2 - 0725-EPGO-446; ConvF: 1.24; Calibrated: 2026-03-03


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat Plane
Device Position	Front
Band	LTE Band 2
Channels	6QAM, 20MHz, 1RB, Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1860.000000
Relative Permittivity (real part)	40.9646124
Conductivity (S/m)	1.423698
Ambient Temperature	22.5
Liquid Temperature	22.5

C. SAR Surface and Volume

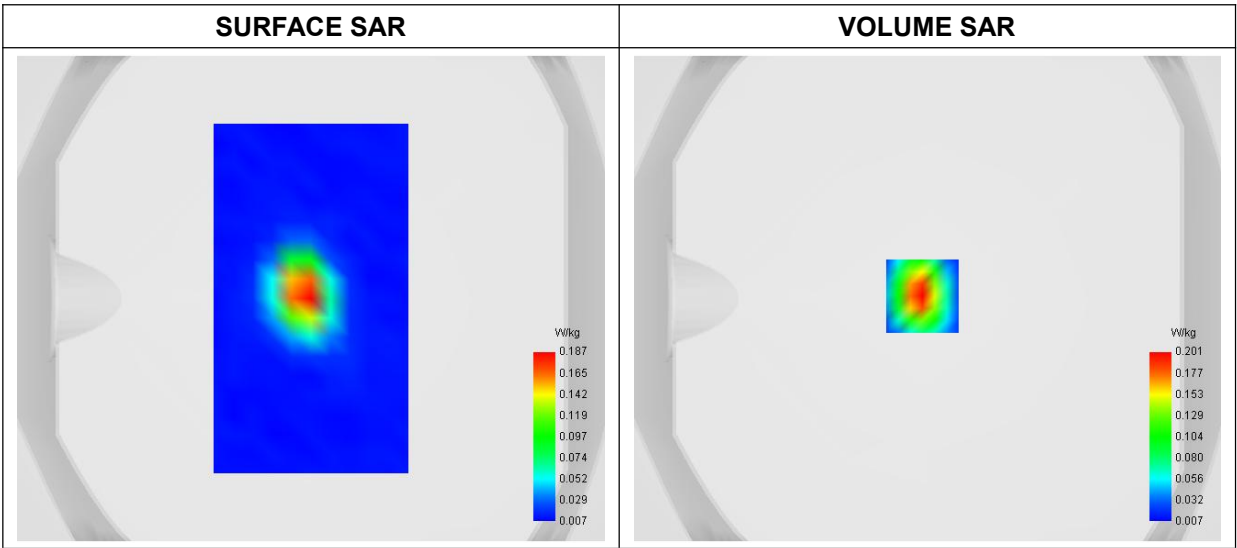


Maximum location: X=-2.00, Y=1.00 ; SAR Peak: 0.38 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.081
SAR 1g (W/Kg)	0.189
Variation (%)	1.330
Horizontal validation criteria: minimum distance (mm)	10.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	48.186922

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00	20.00	24.00	28.00
SAR (W/Kg)	0.385	0.201	0.097	0.078	0.050	0.033	0.021	0.014

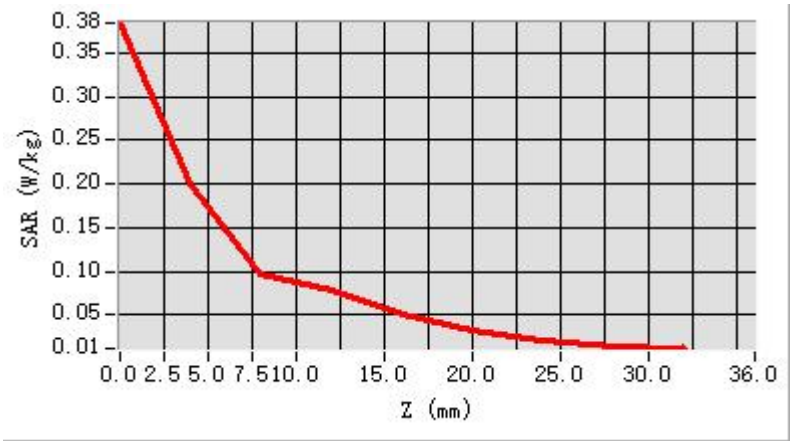

MEASUREMENT 2

Type: Measurement (Complete)
Date of measurement: 2026-05-25
Measurement duration: 25 minutes 31 seconds
E-field Probe: SSE2 - 0725-EPGO-446; ConvF: 1.24; Calibrated: 2026-03-03


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 4
Channels	16QAM 20MHz 6RB, High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1745.000000
Relative Permittivity (real part)	40.132275
Conductivity (S/m)	1.350987
Ambient Temperature	22.0
Liquid Temperature	22.2

C. SAR Surface and Volume

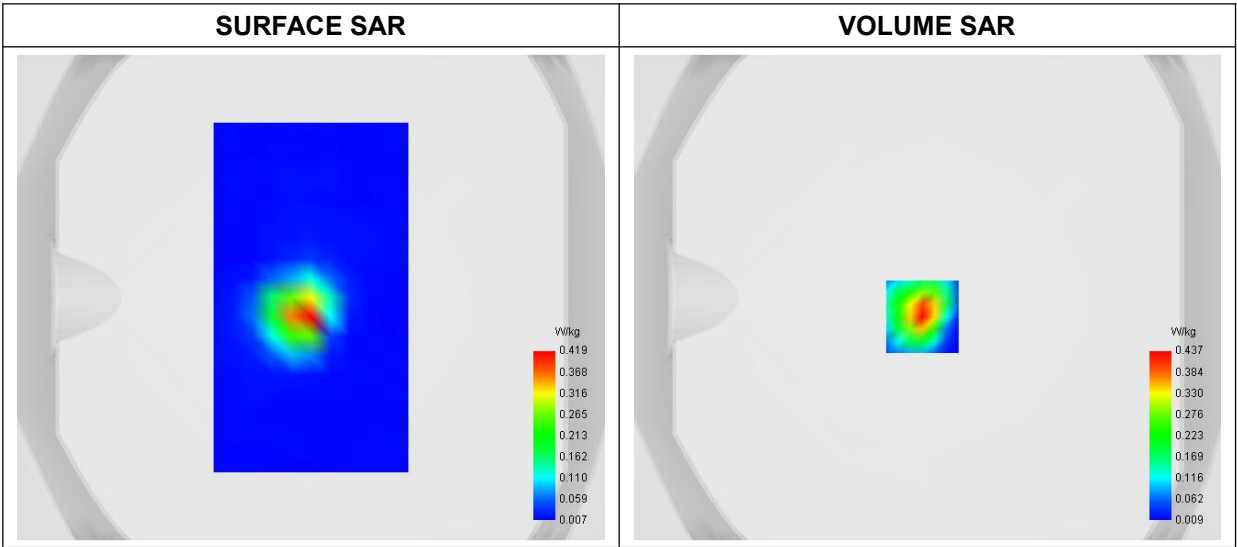


Maximum location: X=-2.00, Y=-8.00 ; SAR Peak: 0.86 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.154
SAR 1g (W/Kg)	0.395
Variation (%)	2.250
Horizontal validation criteria: minimum distance (mm)	10.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	45.624176

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00	20.00	24.00	28.00
SAR (W/Kg)	0.882	0.437	0.188	0.129	0.073	0.041	0.023	0.013

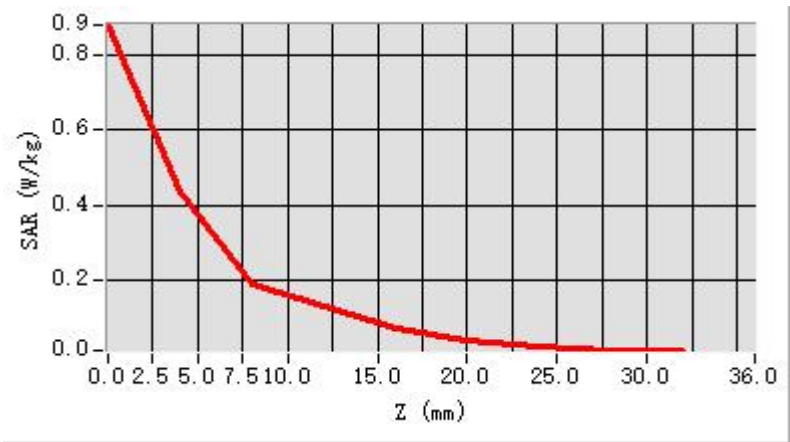

MEASUREMENT 3

Type: Measurement (Complete)
Date of measurement: 2026-05-22
Measurement duration: 15 minutes 50 seconds
E-field Probe: SSE2 - 0725-EPGO-446; ConvF: 1.50; Calibrated: 2026-03-03


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Flat Plane
Device Position	Front
Band	LTE Band 12
Channels	16QAM, 10MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	707.5000000
Relative Permittivity (real part)	42.531866
Conductivity (S/m)	0.923665
Ambient Temperature	22.8
Liquid Temperature	22.8

C. SAR Surface and Volume

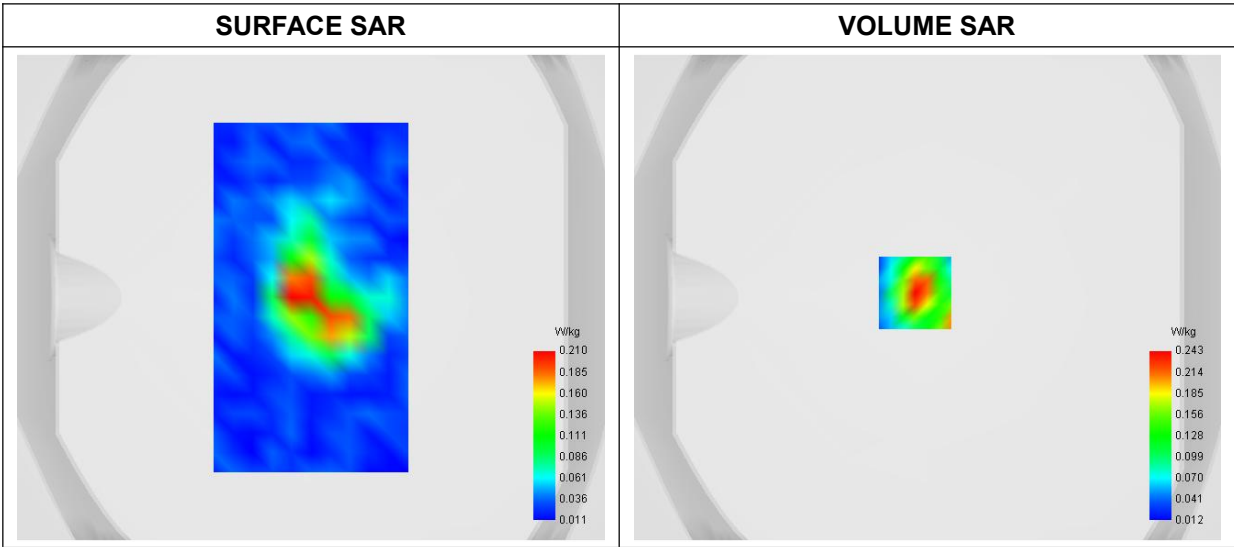


Maximum location: X=-5.00, Y=2.00 ; SAR Peak: 0.46 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.099
SAR 1g (W/Kg)	0.224
Variation (%)	1.740
Horizontal validation criteria: minimum distance (mm)	10.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	54.427982

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.466	0.243	0.132	0.067	0.040	0.026	0.017

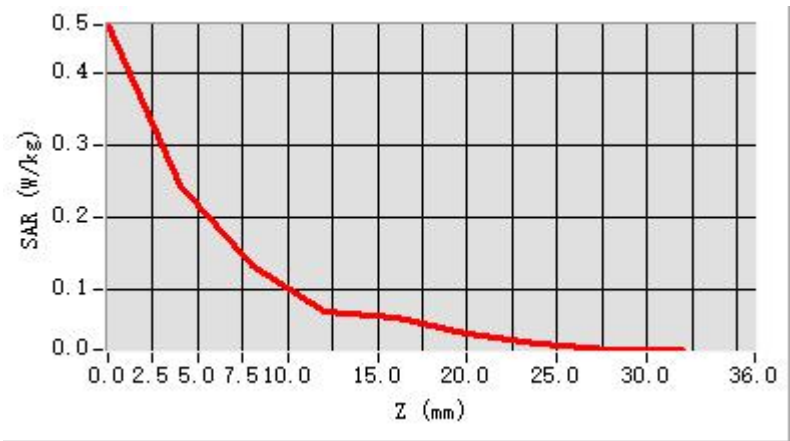

MEASUREMENT 4

Type: Measurement (Complete)
Date of measurement: 2026-05-22
Measurement duration: 15 minutes 50 seconds
E-field Probe: SSE2 - 0725-EPGO-446; ConvF: 1.50; Calibrated: 2026-03-03


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 13
Channels	QPSK, 10MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	782.000000
Relative Permittivity (real part)	42.531866
Conductivity (S/m)	0.923696
Ambient Temperature	22.0
Liquid Temperature	22.2

C. SAR Surface and Volume

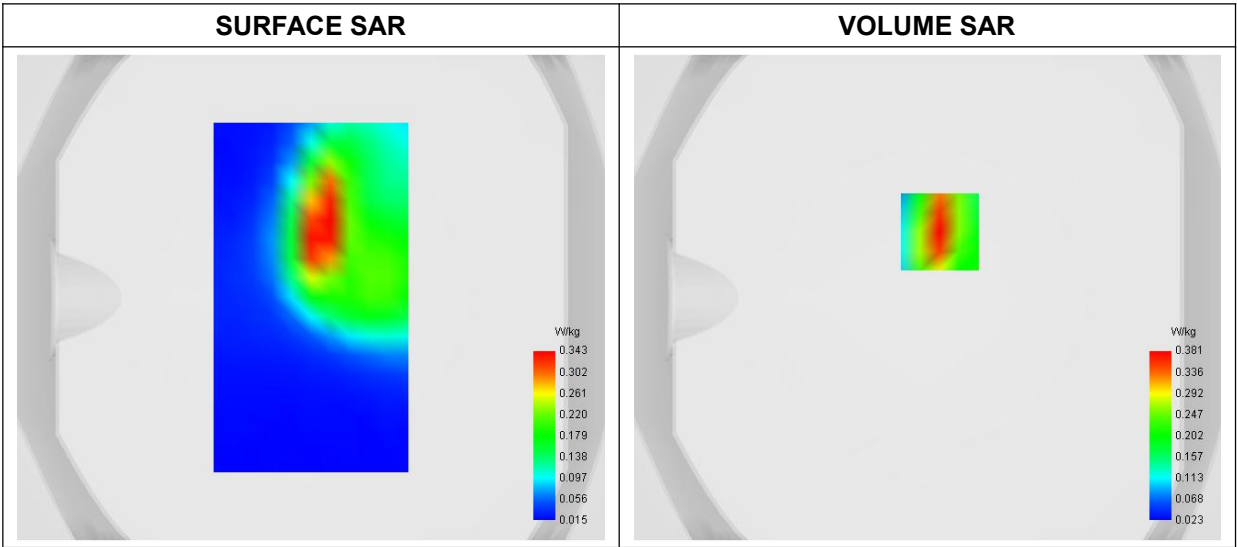


Maximum location: X=5.00, Y=27.00 ; SAR Peak: 0.63 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.191
SAR 1g (W/Kg)	0.362
Variation (%)	0.200
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	54.390240

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.643	0.381	0.207	0.129	0.095	0.061	0.040

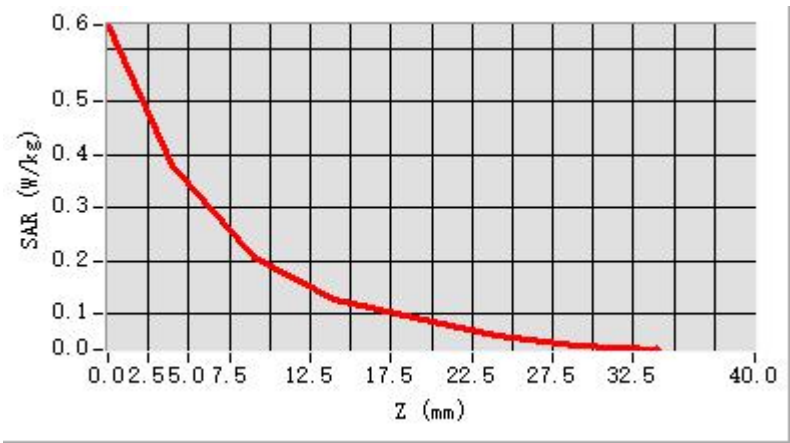

Annex C. EUT Photos



EUT View 1



EUT View 2



Antenna View

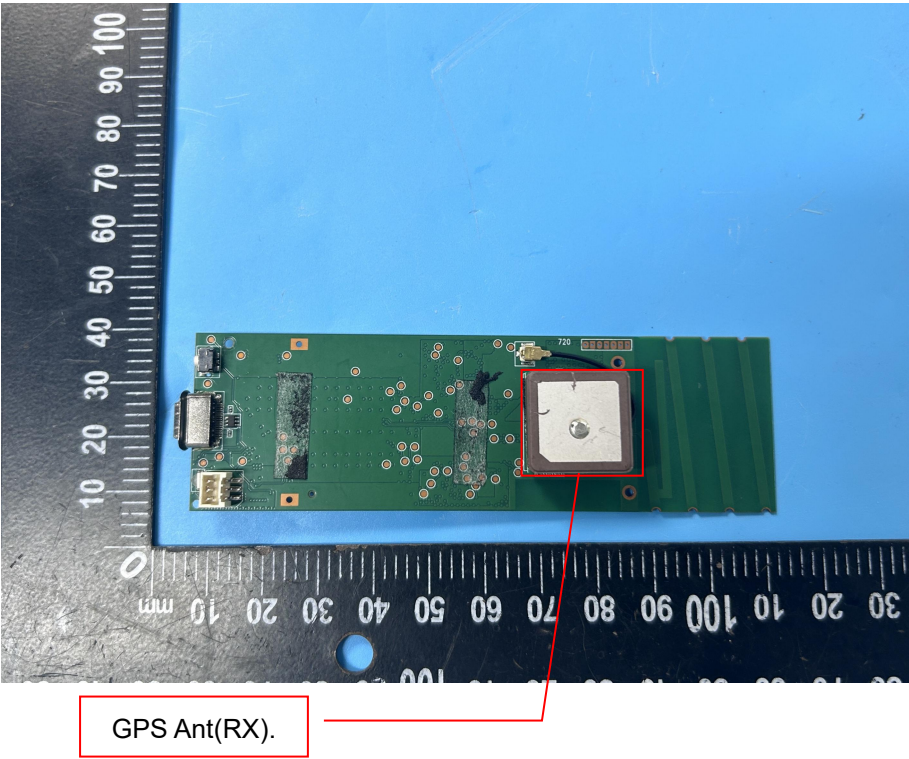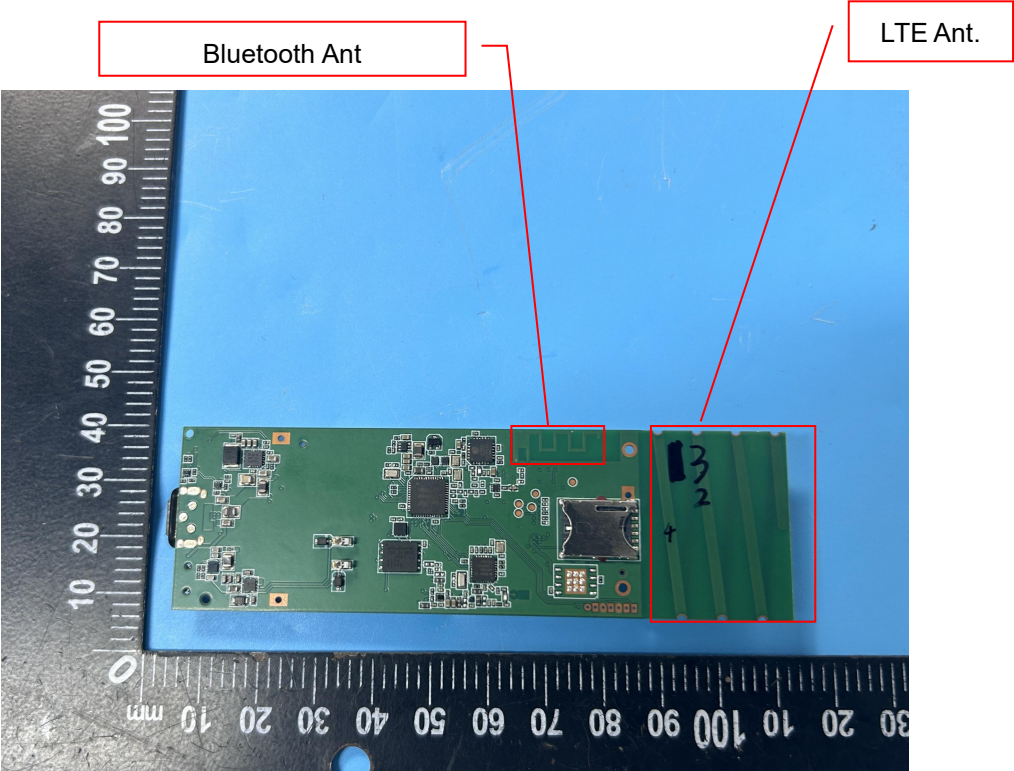

Annex D. Test Setup Photos

Body mode Exposure Conditions

Test distance: 0mm

Body Front



Body Back



Body Right



Body Left



Body Bottom



Annex E. Calibration Certificate

Please refer to the exhibit for the calibration certificate

******* END OF REPORT *******