
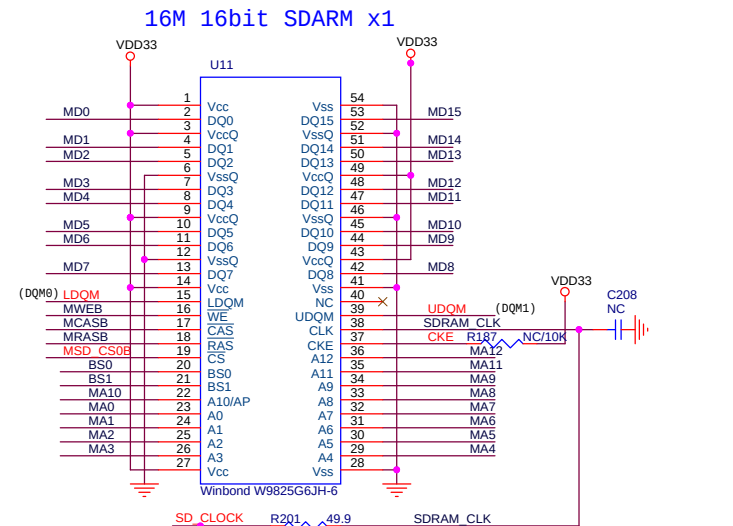





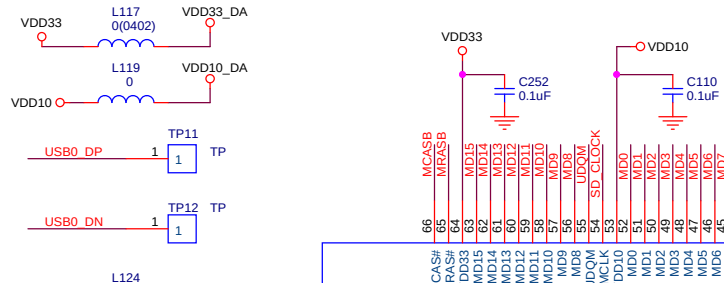




Title			
270-NB0-FW151A004A0			
Size	Document Number		Rev
Custom	CPU/SDRAM/FLASH		A
Date:	Friday, July 27, 2012	Sheet	3 of 7


Strap Pin Definition

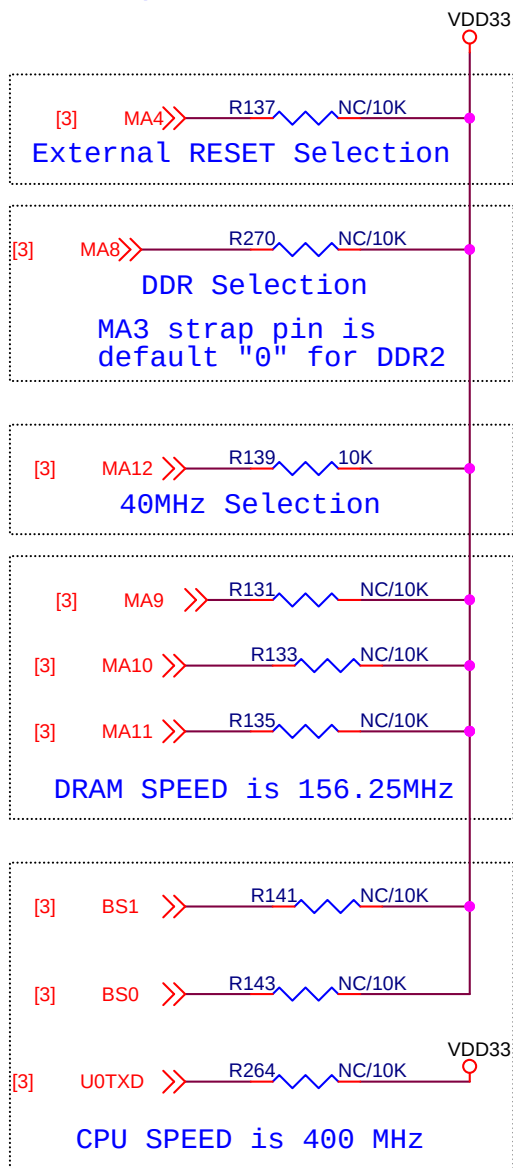











pin name	function name	function detail
PIN_M_A4	ENABLE_EXT_RSTN	ENABLE_EXT_RSTN
		1=enable 0=disable
PIN_M_A8	DRAM_TYPE[1]	DRAM_TYPE[1]
		1=DDR 0=SDR (Default)
PIN_M_A3	DRAM_TYPE[0]_INV	DRAM_TYPE[0]_INV
		1=DDR1 0=DDR2 (Default)
PIN_M_A12	sel_40m	1=40MHZ 0=25MHZ(default)

PIN_M_A9 PIN_M_A10 PIN_M_A11	ck_m2x_freq_sel[0] ck_m2x_freq_sel[1] ck_m2x_freq_sel[2]	ck_m2x_freq_sel[2:0] (MHZ)	
		000:	156.25
		001:	Reserved
		010:	Reserved
		100:	Reserved
		101:	125
		110:	Reserved
		011:	Reserved
		111:	168.75


DDR_BS1 DDR_BS0 U0TXD	ck_cpu_freq_sel[3] ck_cpu_freq_sel[2] ck_cpu_freq_sel[1]	ck_cpu_freq_sel[3:1] (MHZ)	
		000:	400MHZ
		001:	380MHZ
		010:	360MHZ
		100:	320MHZ
		101:	300MHZ
		110:	280MHZ
		011:	340MHZ
		111:	260MHZ





Title		
270-NB0-FW151A004A0		
Size A	Document Number Configure Interface	Rev A
Date:	Friday, July 27, 2012	Sheet 4 of 7

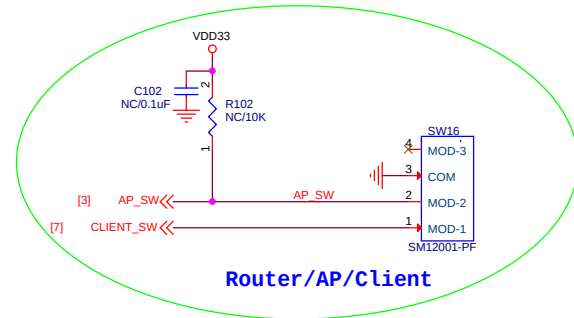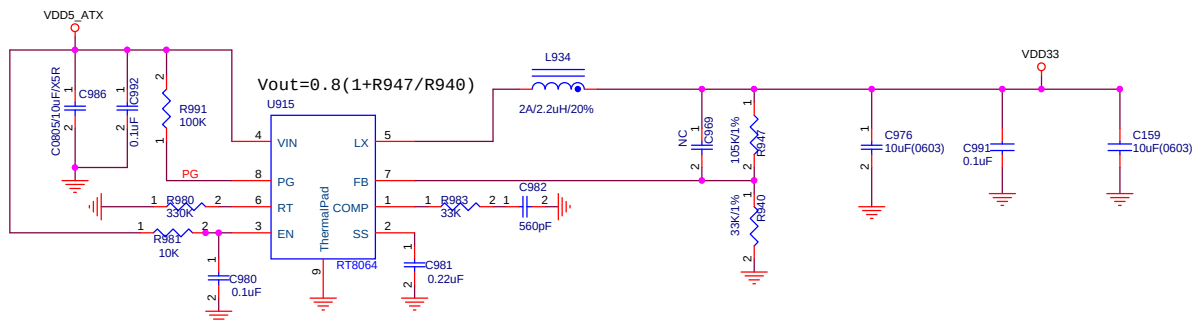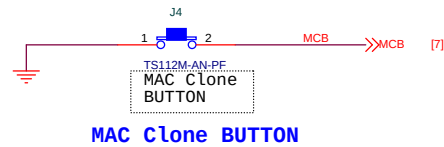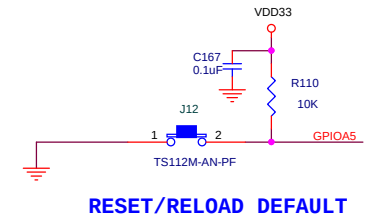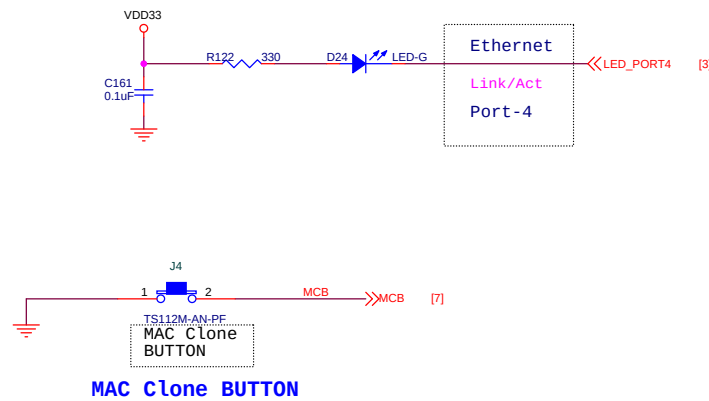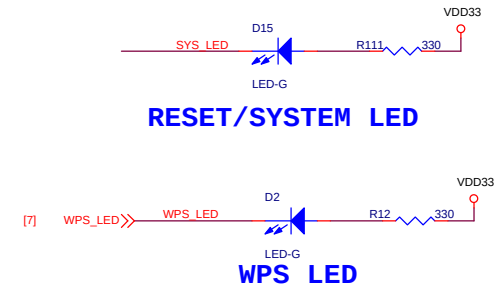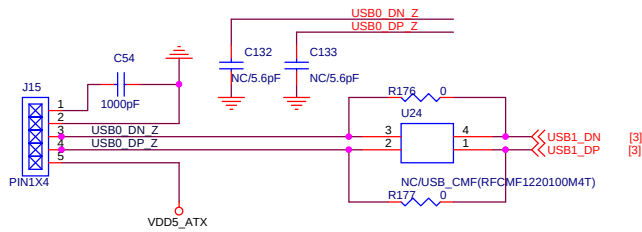

	Router	AP	Client
AP_SW	1	0	1
CLIENT_SW	1	1	0

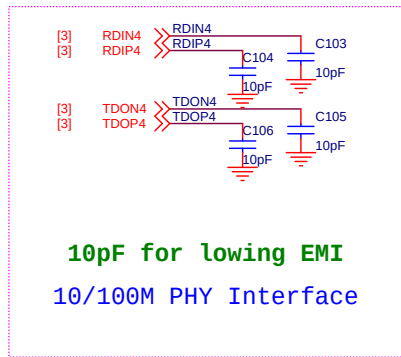

Ethernet Transformer

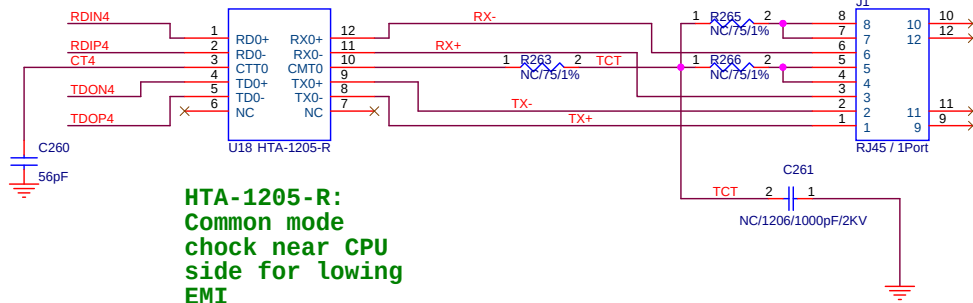

Title		
270-NB0-FW151A004A0		
Size B	Document Number	Rev A
MDI 10/100M		
Date: Friday, July 27, 2012	Sheet 6	of 7

