



[Test mode: TX low channel 5745MHz]; [Polarity: Vertical]

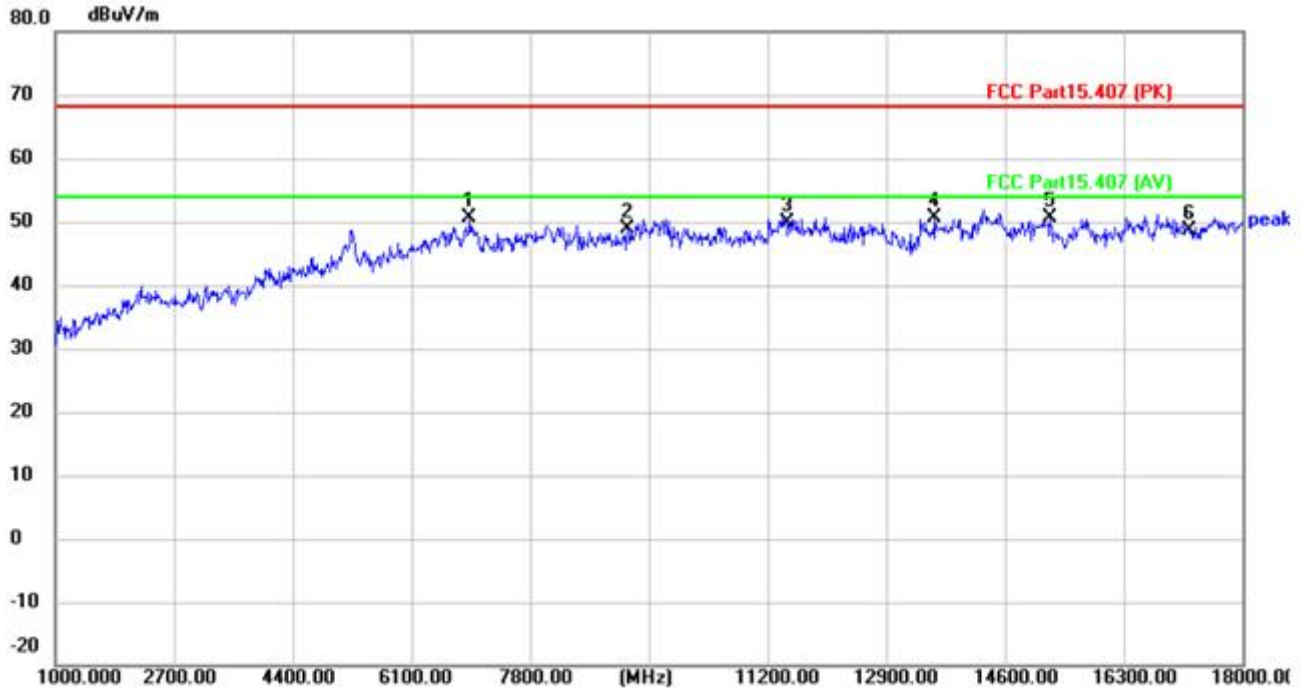

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		6933.000	38.42	12.24	50.66	68.20	-17.54	peak
2		9194.000	36.14	12.69	48.83	68.20	-19.37	peak
3		11490.00	34.97	14.81	49.78	68.20	-18.42	peak
4	*	13597.00	37.85	12.90	50.75	68.20	-17.45	peak
5		15246.00	41.08	9.48	50.56	68.20	-17.64	peak
6		17235.00	38.09	10.49	48.58	68.20	-19.62	peak

Test Result: Pass


[Test mode: TX middle channel 5785MHz]; [Polarity: Horizontal]

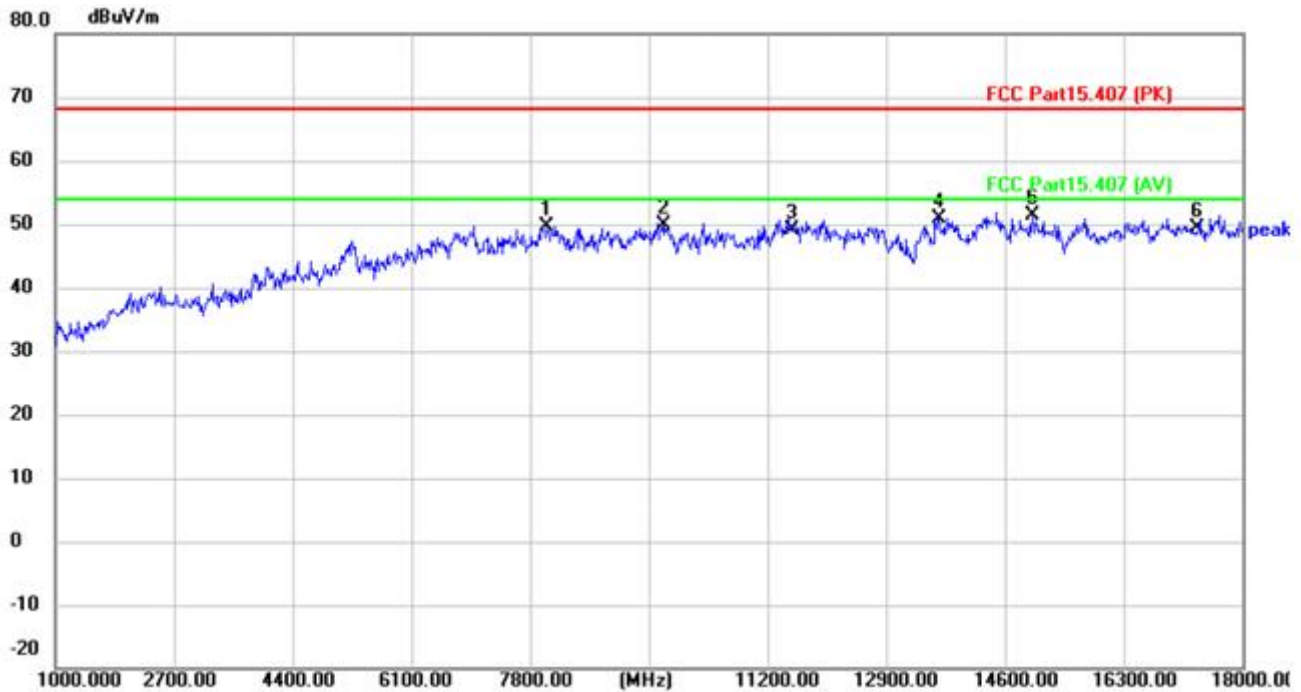

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		8038.000	38.00	11.68	49.68	68.20	-18.52	peak
2		9721.000	36.15	13.65	49.80	68.20	-18.40	peak
3		11570.00	34.35	14.80	49.15	68.20	-19.05	peak
4		13648.00	38.83	12.17	51.00	68.20	-17.20	peak
5	*	14991.00	41.93	9.37	51.30	68.20	-16.90	peak
6		17355.00	39.39	9.98	49.37	68.20	-18.83	peak

Test Result: Pass


[Test mode: TX middle channel 5785MHz]; [Polarity: Vertical]

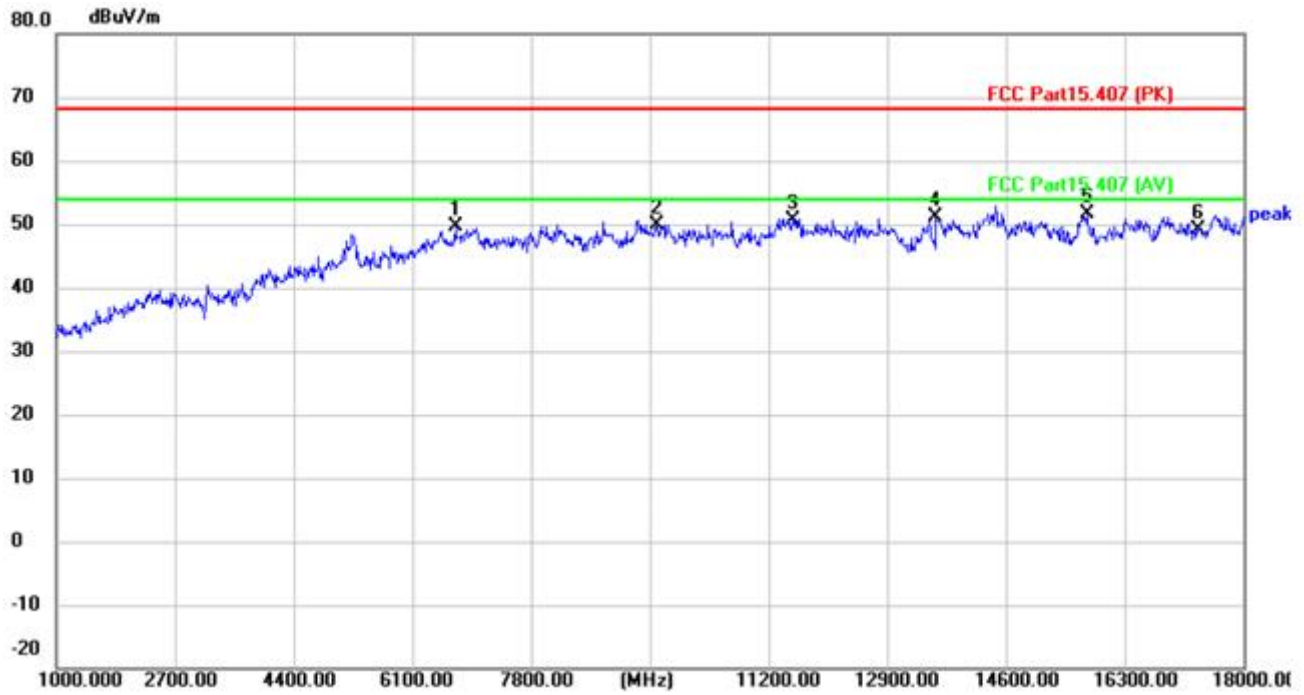

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		6712.000	38.21	11.34	49.55	68.20	-18.65	peak
2		9602.000	37.06	12.93	49.99	68.20	-18.21	peak
3		11570.00	35.76	14.80	50.56	68.20	-17.64	peak
4		13597.00	38.16	12.90	51.06	68.20	-17.14	peak
5	*	15756.00	42.59	9.06	51.65	68.20	-16.55	peak
6		17355.00	39.22	9.98	49.20	68.20	-19.00	peak

Test Result: Pass

[Test mode: TX High channel 5825MHz]; [Polarity: Horizontal]

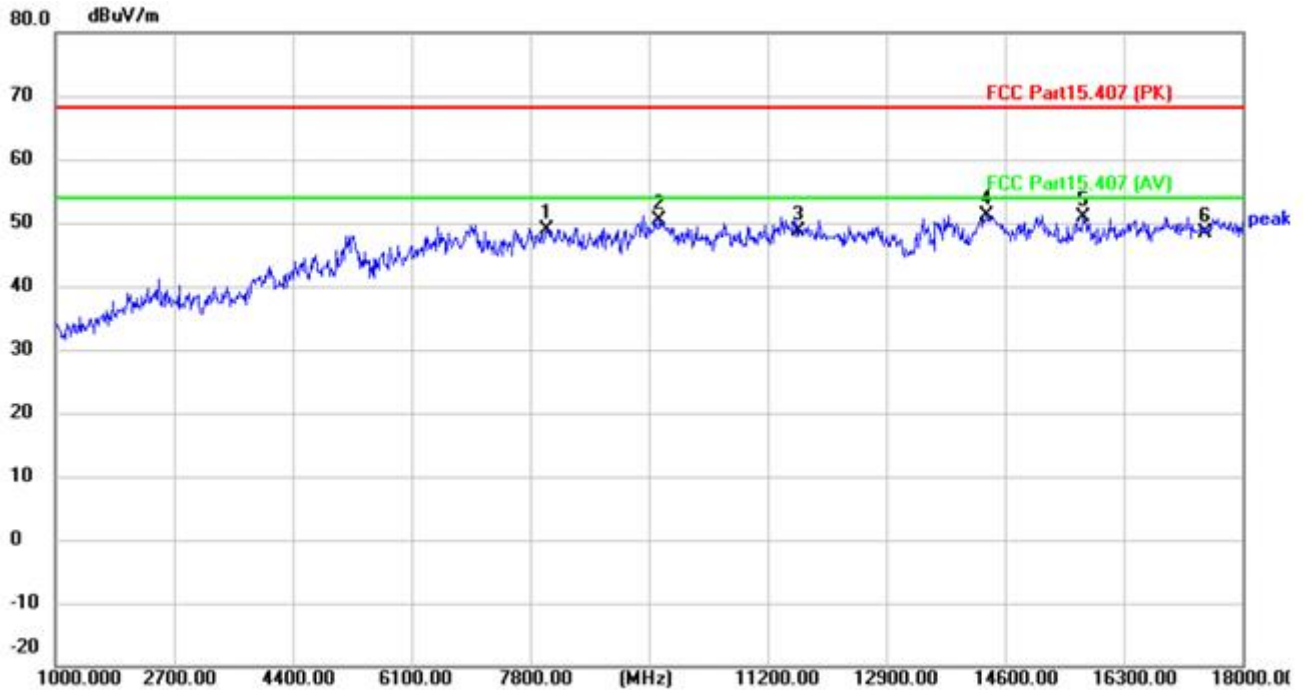

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		8038.000	37.19	11.68	48.87	68.20	-19.33	peak
2		9653.000	36.77	13.52	50.29	68.20	-17.91	peak
3		11650.00	34.55	14.12	48.67	68.20	-19.53	peak
4	*	14345.00	40.28	10.91	51.19	68.20	-17.01	peak
5		15722.00	41.65	9.32	50.97	68.20	-17.23	peak
6		17475.00	38.60	9.77	48.37	68.20	-19.83	peak

Test Result: Pass

[Test mode: TX High channel 5825MHz]; [Polarity: Vertical]



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		7647.000	38.45	10.46	48.91	68.20	-19.29	peak
2		9772.000	36.05	13.73	49.78	68.20	-18.42	peak
3		11650.00	35.52	14.12	49.64	68.20	-18.56	peak
4		14277.00	39.35	10.96	50.31	68.20	-17.89	peak
5	*	15739.00	41.85	9.19	51.04	68.20	-17.16	peak
6		17475.00	38.79	9.77	48.56	68.20	-19.64	peak

Test Result: Pass

6.11 Radiated emissions which fall in the restricted bands

Test Standard	47 CFR Part 15, Subpart E 15.407
Test Method	KDB 789033 D02 II G
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX


6.11.1 Limit

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

6.11.2 Test setup


Below 1GHz:

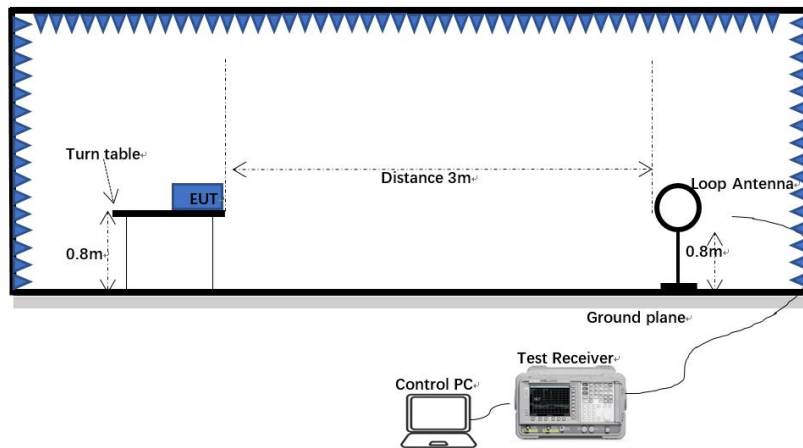

30MHz-1GHz:

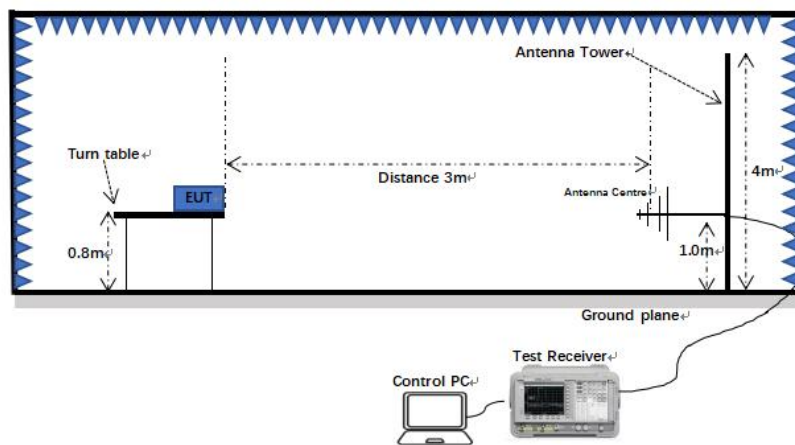

Above 1GHz:

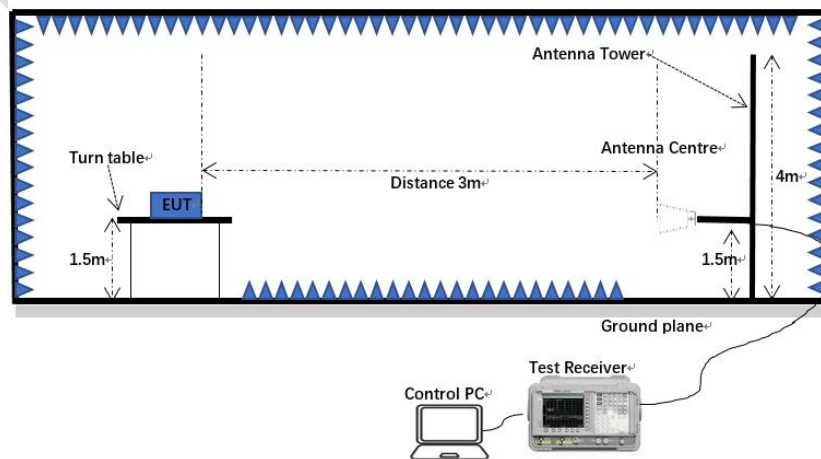

6.11.3 Procedure

- a) For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h) Test the EUT in the lowest channel, the middle channel, the highest channel.
- i) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j) Repeat above procedures until all frequencies measured was complete.


Note 1: Level (dBuV) = Reading (dBuV) + Factor (dB/m)

Note 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

6.11.4 Test data

Remark: During the test, pre-scan the 802.11a/n/ac/ax mode, and found 20MHz for the 802.11a mode which it is worse case, and found 40MHz for the 802.11n40 mode and found 80MHz for the 802.11ax80 mode which it is worse case, only the worse case was recorded in the report.


[Test mode: TX low channel 802.11a 5180MHz]; [Polarity: Horizontal]

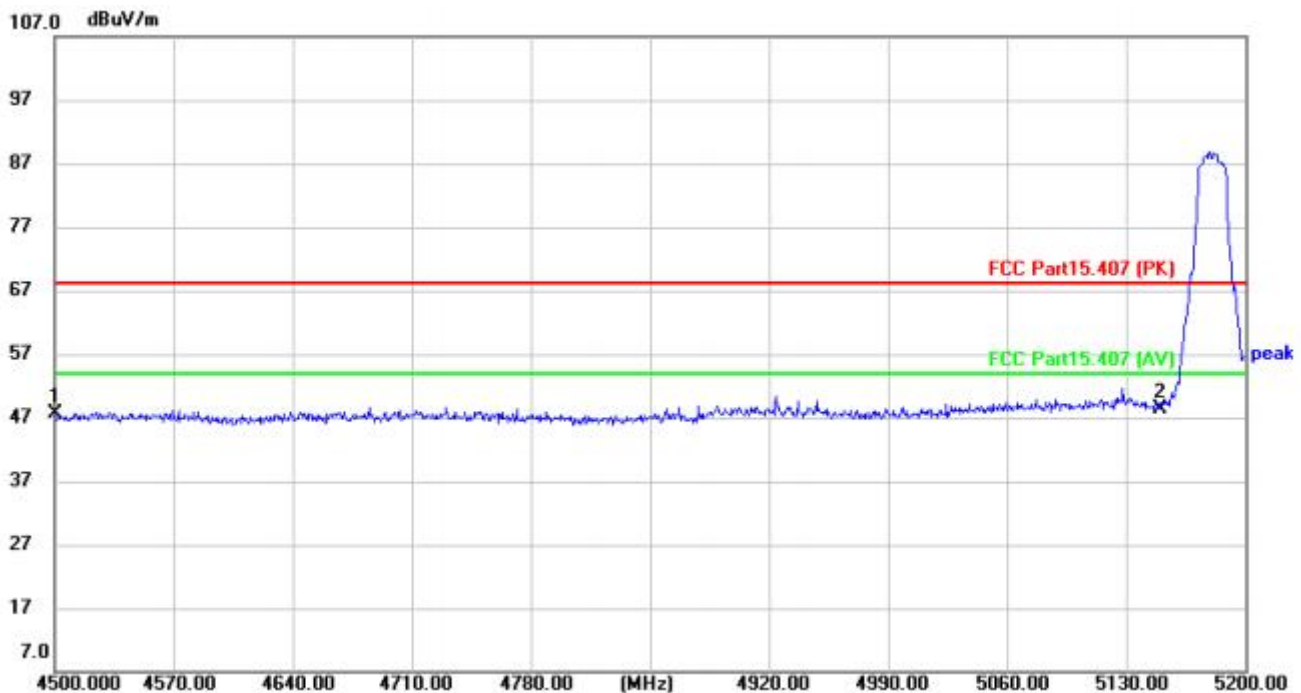

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4500.000	44.59	3.02	47.61	68.20	-20.59	peak
2	*	5150.000	42.40	5.93	48.33	68.20	-19.87	peak

Test Result: Pass


[Test mode:TX low channel 802.11a 5180MHz]; [Polarity: Vertical]

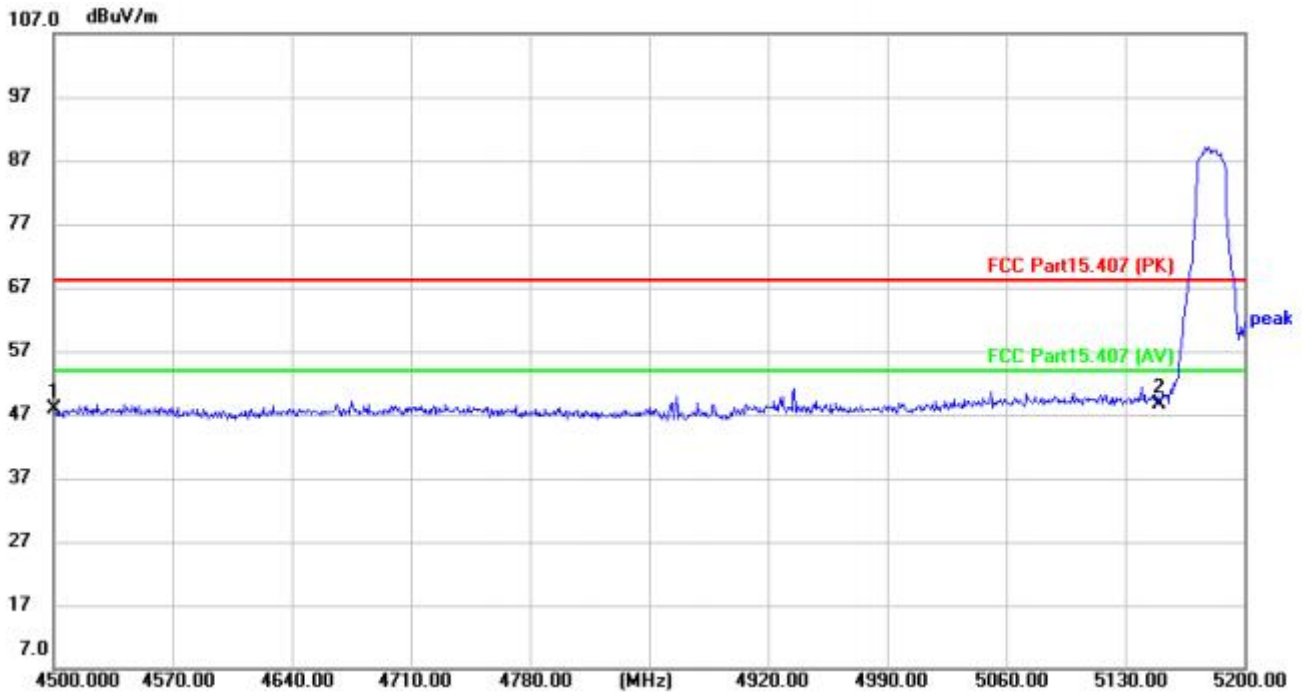

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4500.000	44.85	3.02	47.87	68.20	-20.33	peak
2	*	5150.000	42.81	5.93	48.74	68.20	-19.46	peak

Test Result: Pass


[Test mode: TX high channel 802.11a 5240MHz]; [Polarity: Horizontal]

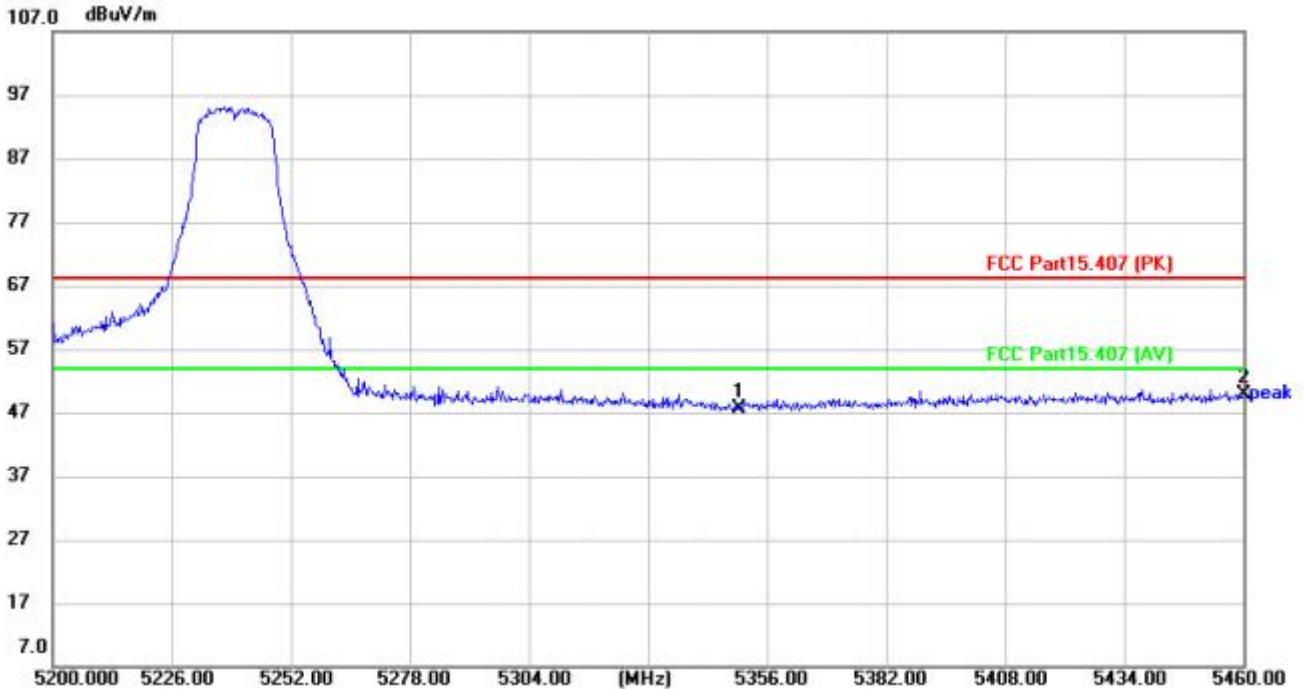

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dBuV/m	dB	
1		5350.000	42.42	5.21	47.63	68.20	-20.57	peak
2	*	5460.000	43.92	5.91	49.83	68.20	-18.37	peak

Test Result: Pass


[Test mode:TX high channel 802.11a 5240MHz]; [Polarity: Vertical]

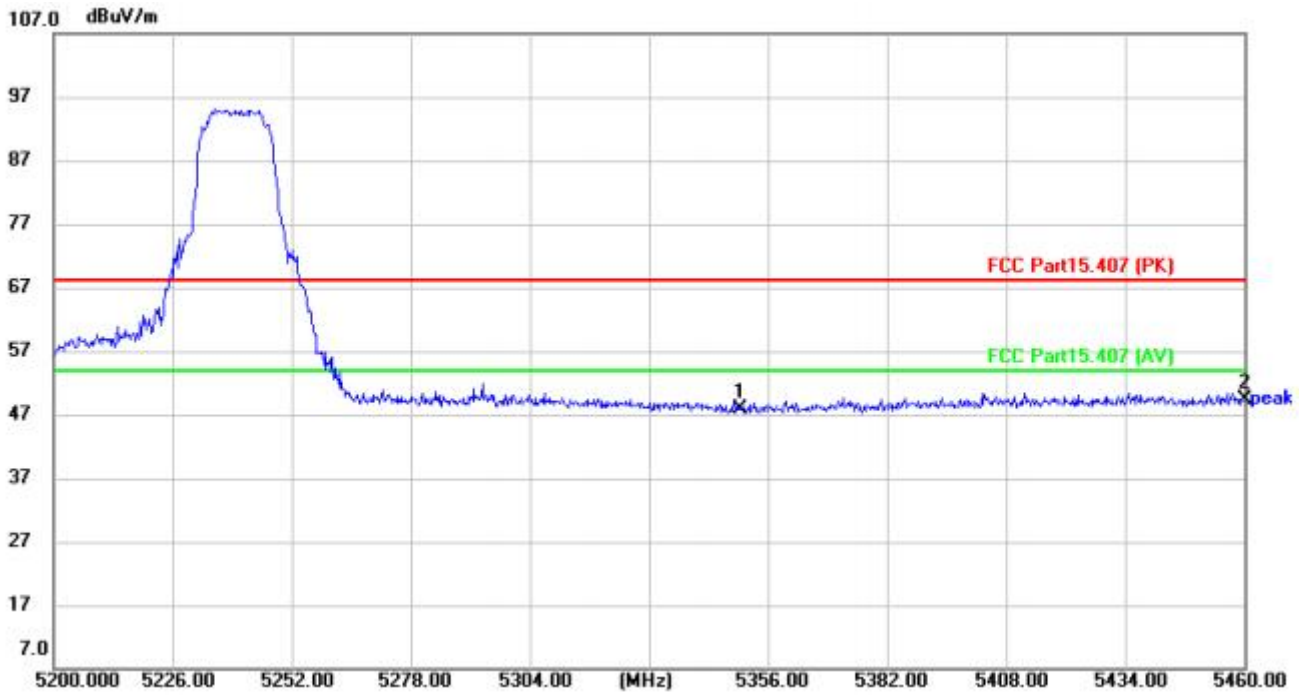

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5350.000	42.62	5.21	47.83	68.20	-20.37	peak
2	*	5460.000	43.35	5.91	49.26	68.20	-18.94	peak

Test Result: Pass


[Test mode: TX low channel 802.11n40 5190MHz]; [Polarity: Horizontal]

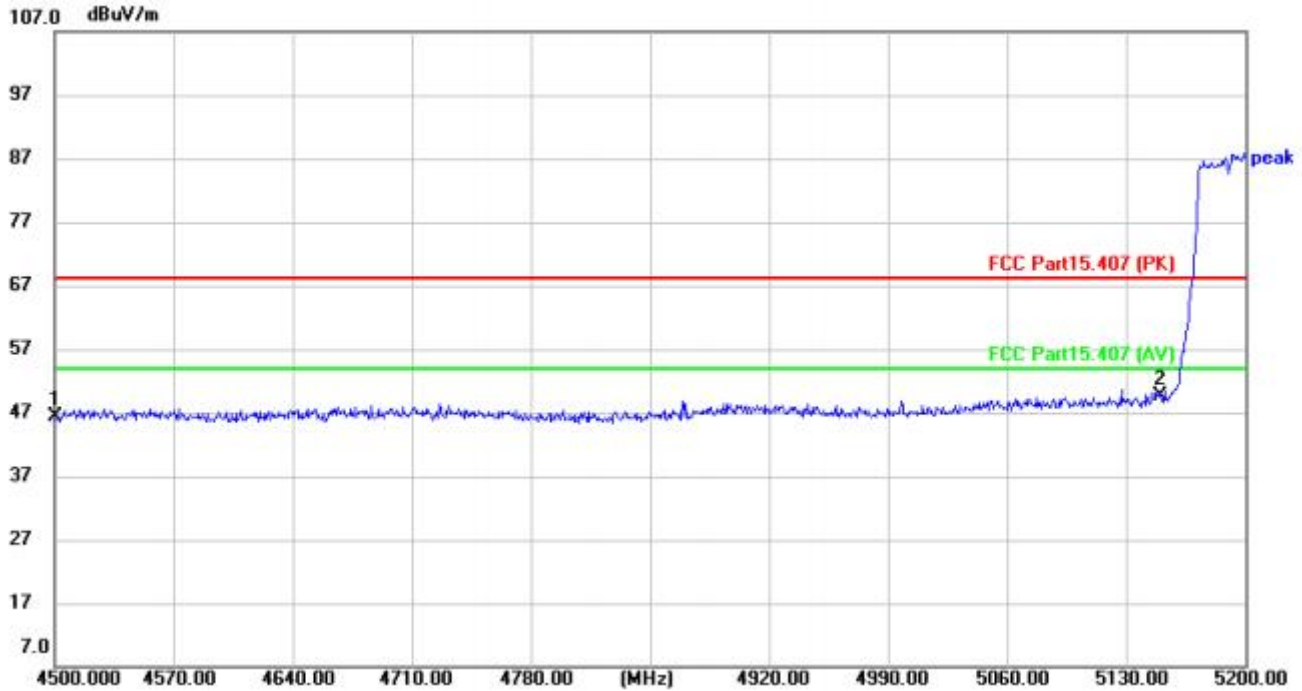

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4500.000	43.40	3.02	46.42	68.20	-21.78	peak
2	*	5150.000	43.79	5.93	49.72	68.20	-18.48	peak

Test Result: Pass

[Test mode: TX low channel 802.11n40 5190MHz]; [Polarity: Vertical]

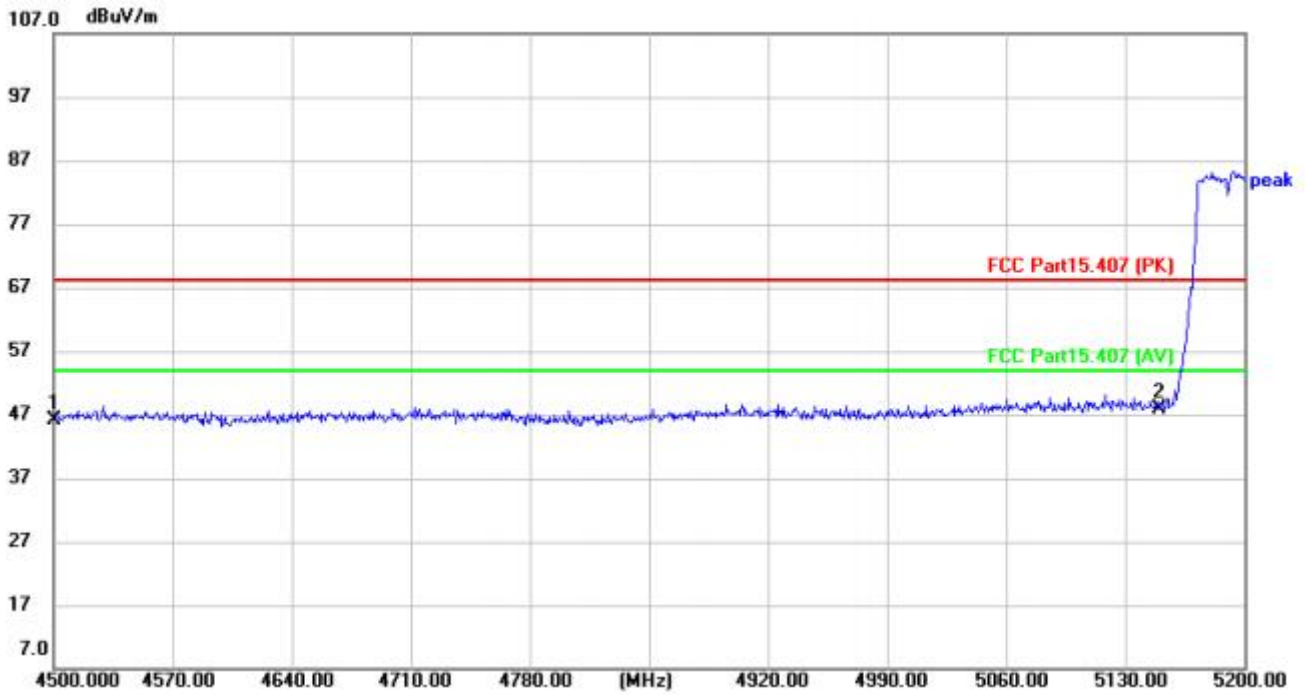

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4500.000	43.04	3.02	46.06	68.20	-22.14	peak
2	*	5150.000	41.99	5.93	47.92	68.20	-20.28	peak

Test Result: Pass


[Test mode: TX high channel 802.11n40 5230MHz]; [Polarity: Horizontal]



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5350.000	42.17	5.21	47.38	68.20	-20.82	peak
2	*	5460.000	42.66	5.91	48.57	68.20	-19.63	peak

Test Result: Pass


[Test mode: TX high channel 802.11n40 5230MHz]; [Polarity: Vertical]

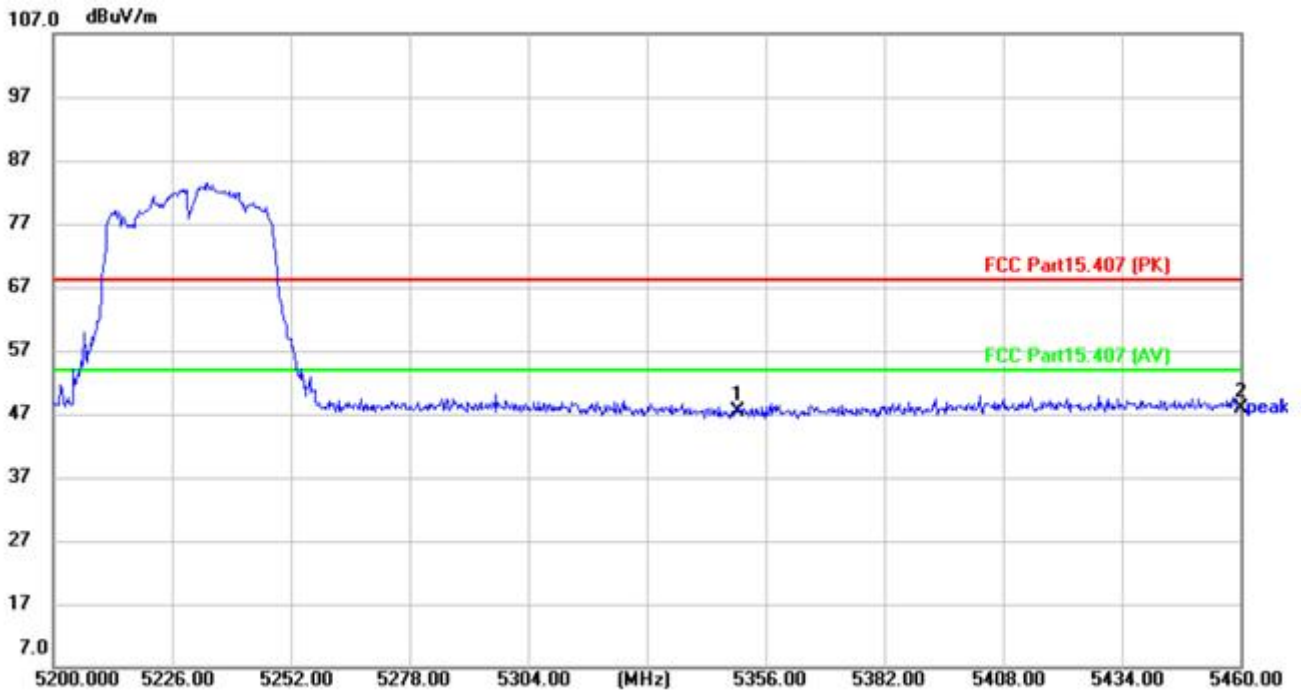

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5350.000	42.06	5.21	47.27	68.20	-20.93	peak
2	*	5460.000	42.00	5.91	47.91	68.20	-20.29	peak

Test Result: Pass


[Test mode: TX 802.11ax 80 5210MHz]; [Polarity: Horizontal]

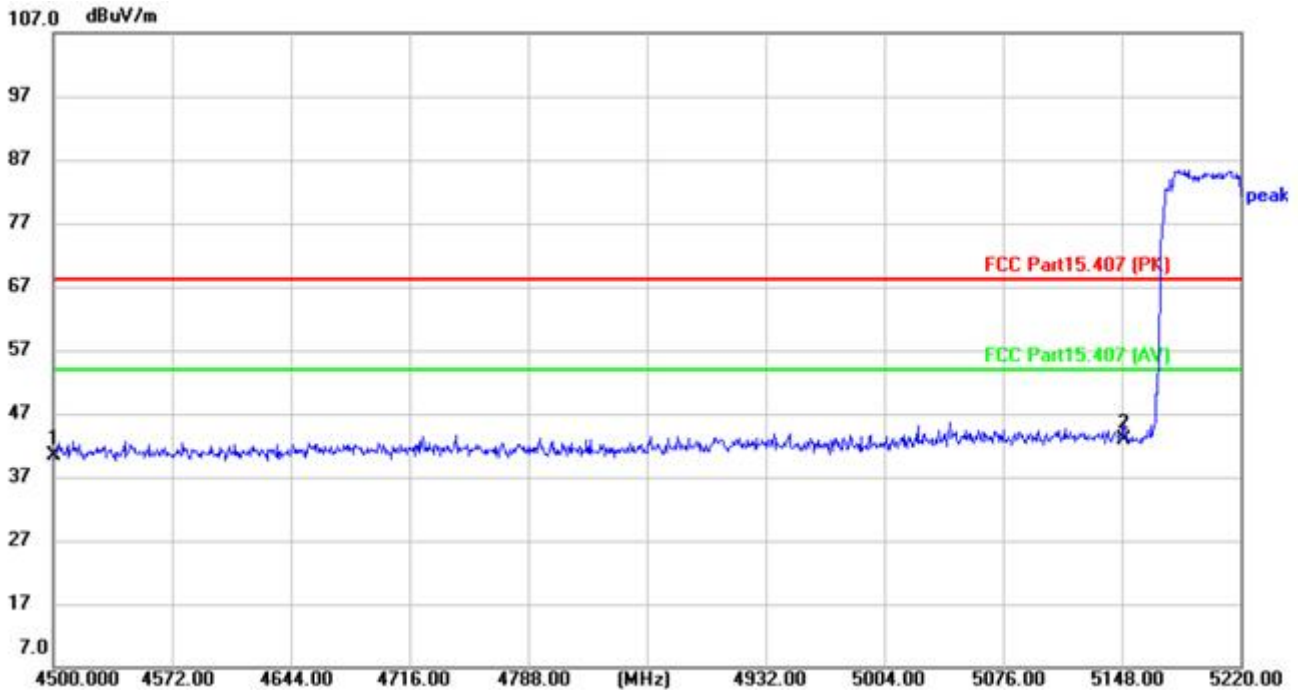

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4500.000	37.33	3.02	40.35	68.20	-27.85	peak
2	*	5150.000	36.92	5.93	42.85	68.20	-25.35	peak

Test Result: Pass

[Test mode: TX 802.11ax 80 5210MHz]; [Polarity: Vertical]

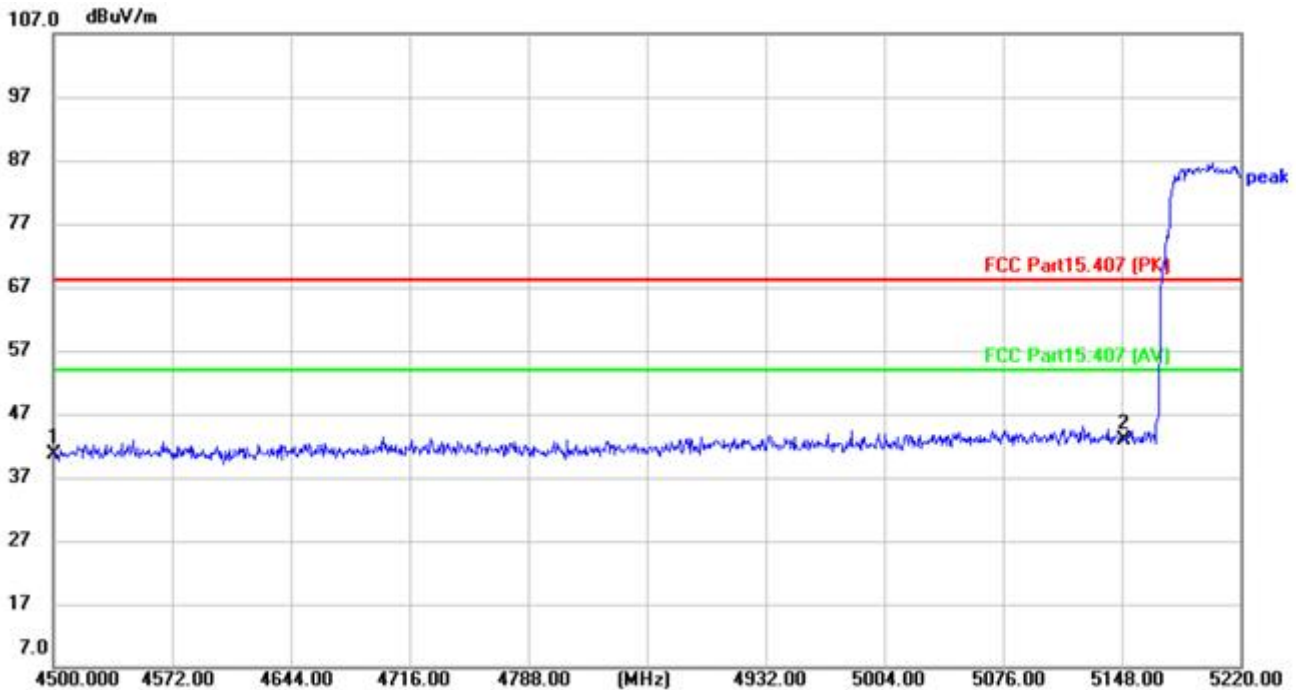

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4500.000	37.70	3.02	40.72	68.20	-27.48	peak
2	*	5150.000	36.93	5.93	42.86	68.20	-25.34	peak

Test Result: Pass


[Test mode: TX 802.11ax 80 5210MHz]; [Polarity: Horizontal]



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dBuV/m	dB	
1		5350.000	43.49	5.21	48.70	68.20	-19.50	peak
2	*	5460.000	42.83	5.91	48.74	68.20	-19.46	peak

Test Result: Pass


[Test mode: TX 802.11ax 80 5210MHz]; [Polarity: Vertical]

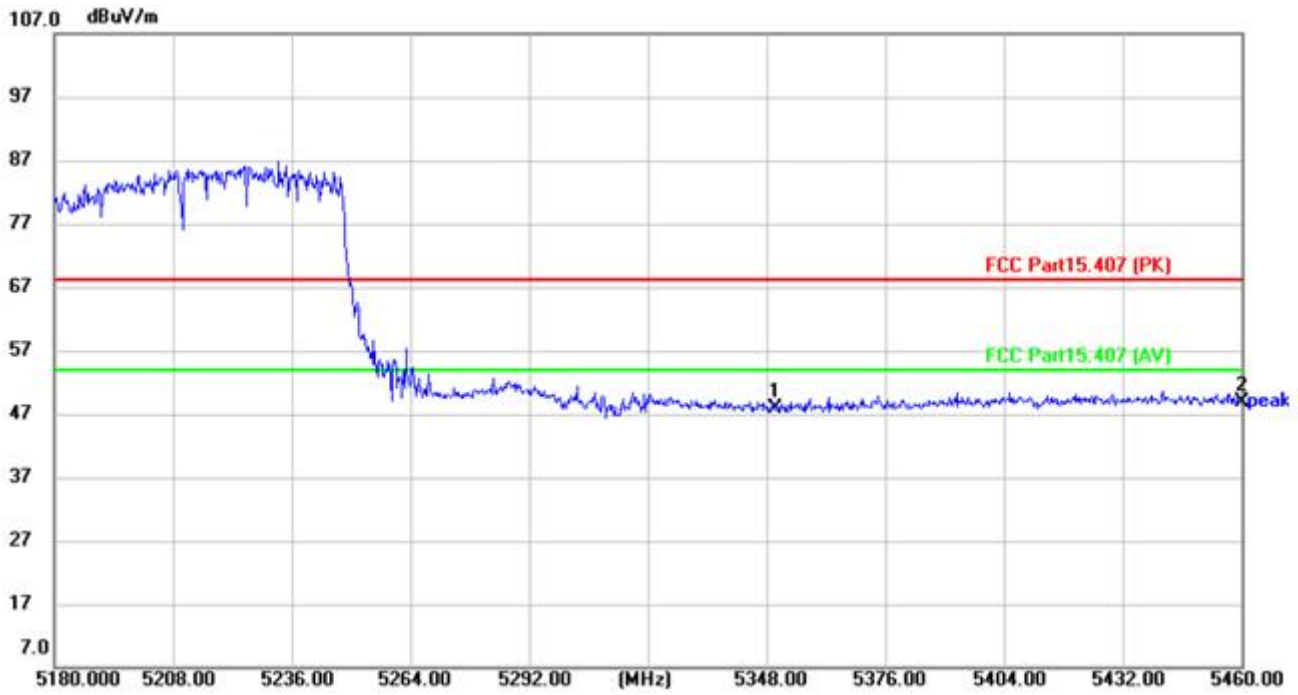

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5350.000	42.75	5.21	47.96	68.20	-20.24	peak
2	*	5460.000	42.93	5.91	48.84	68.20	-19.36	peak

Test Result: Pass


[Test mode: TX low channel 802.11a 5260MHz]; [Polarity: Horizontal]

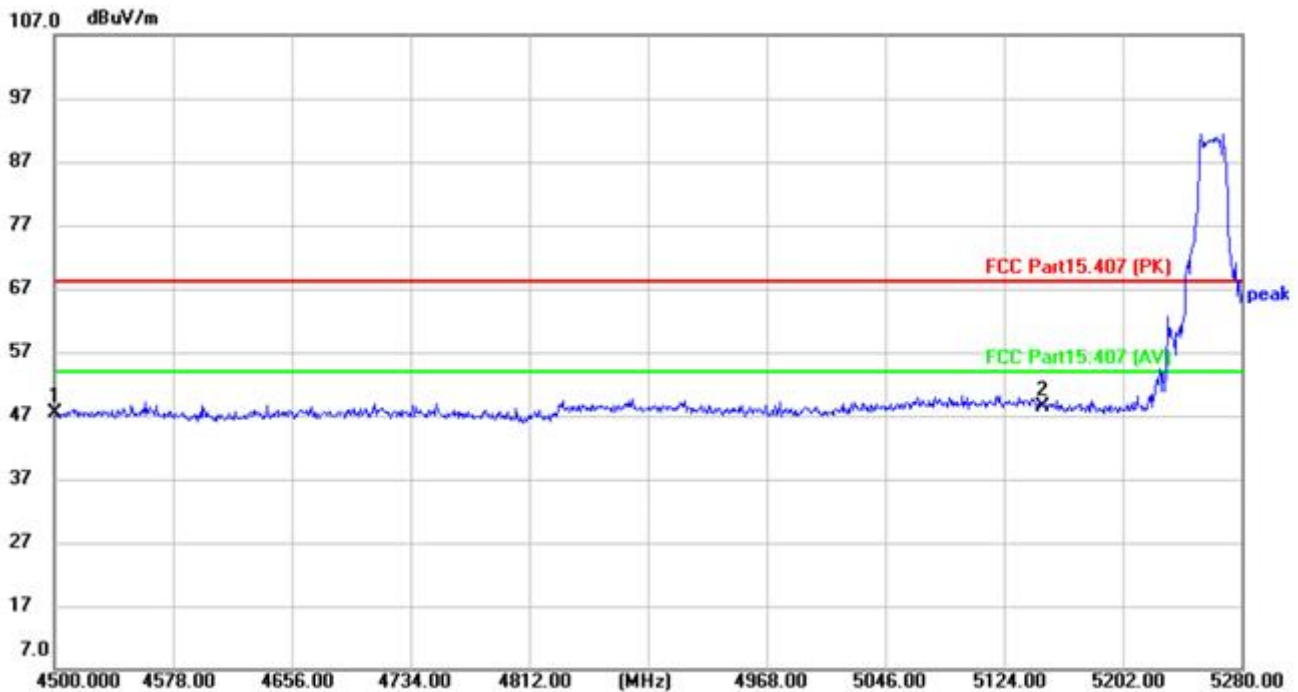

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dBuV/m	dB	
1		4500.000	44.36	3.02	47.38	68.20	-20.82	peak
2	*	5150.000	42.54	5.93	48.47	68.20	-19.73	peak

Test Result: Pass


[Test mode:TX low channel 802.11a 5260MHz]; [Polarity: Vertical]

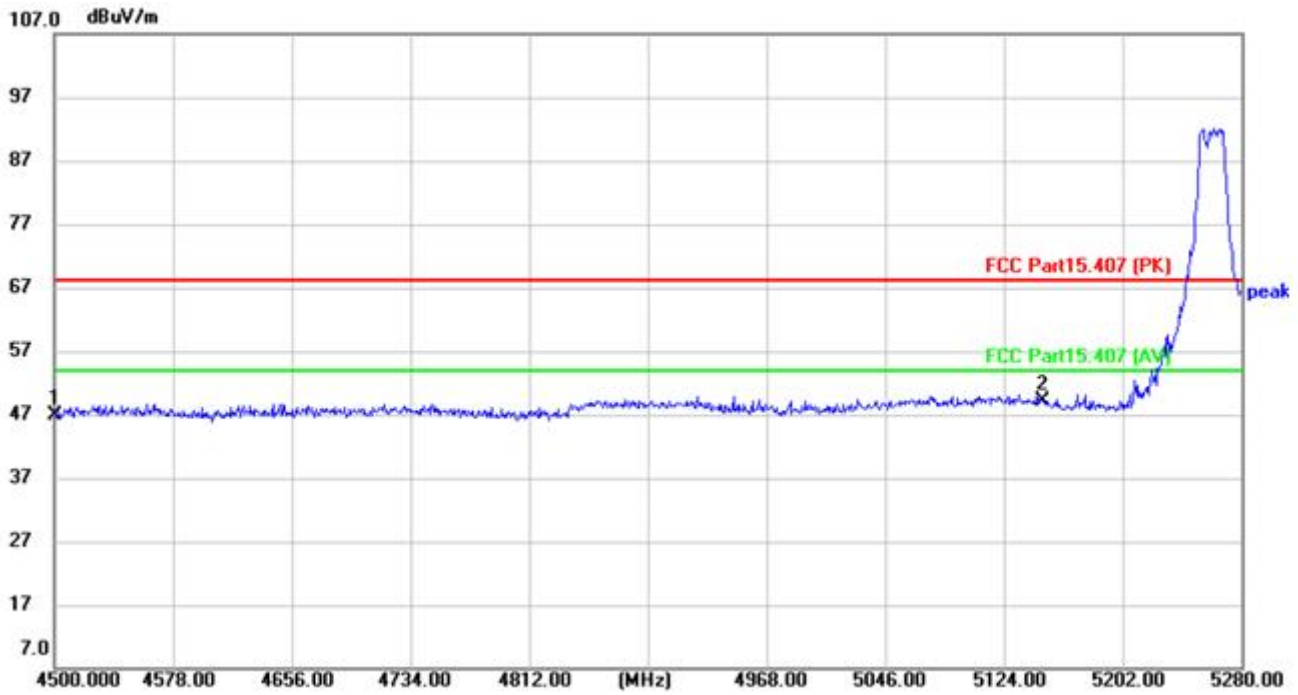

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4500.000	43.91	3.02	46.93	68.20	-21.27	peak
2	*	5150.000	43.31	5.93	49.24	68.20	-18.96	peak

Test Result: Pass


[Test mode: TX high channel 802.11a 5320MHz]; [Polarity: Horizontal]

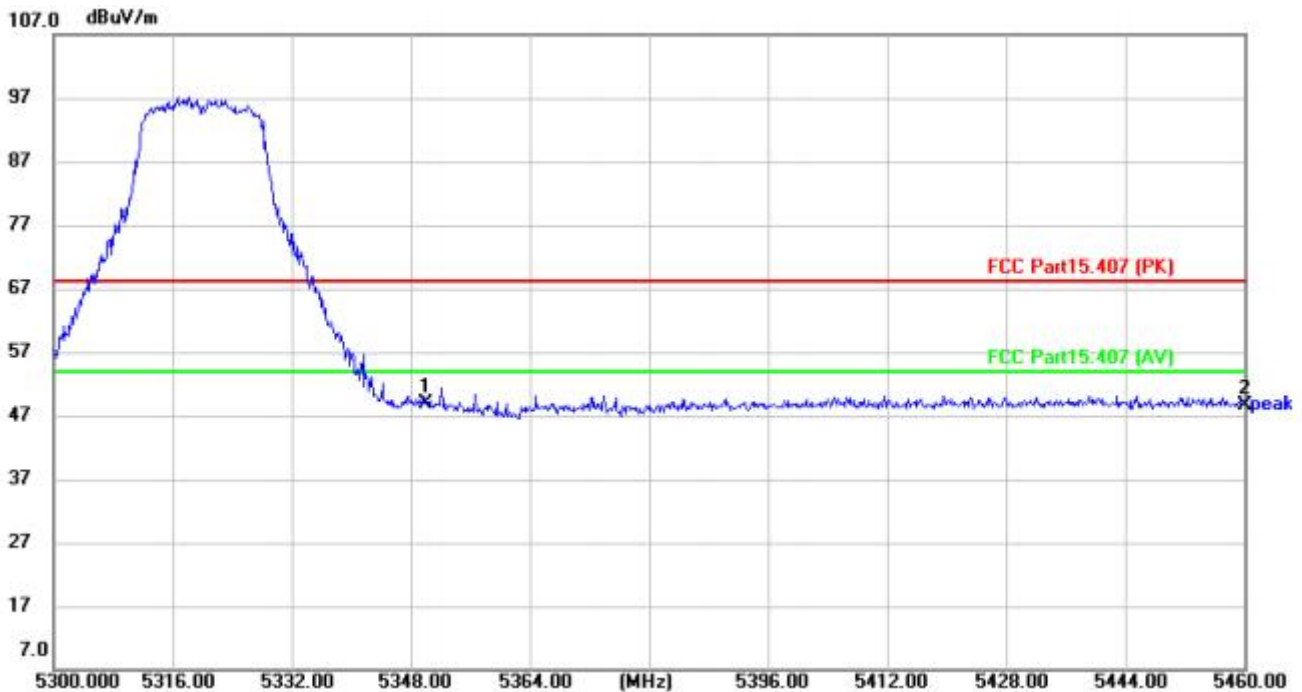

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	5350.000	43.56	5.21	48.77	68.20	-19.43	peak
2		5460.000	42.84	5.91	48.75	68.20	-19.45	peak

Test Result: Pass


[Test mode:TX high channel 802.11a 5320MHz]; [Polarity: Vertical]

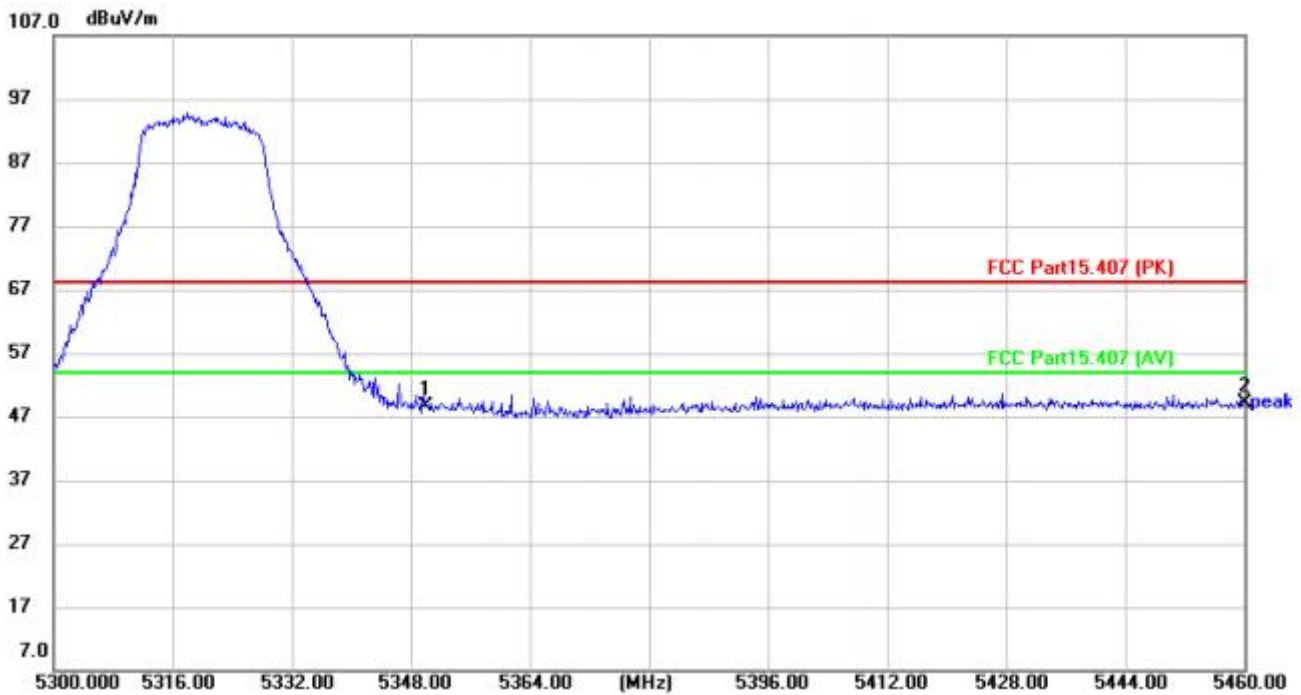

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5350.000	43.36	5.21	48.57	68.20	-19.63	peak
2	*	5460.000	43.34	5.91	49.25	68.20	-18.95	peak

Test Result: Pass


[Test mode: TX low channel 802.11n40 5270MHz]; [Polarity: Horizontal]

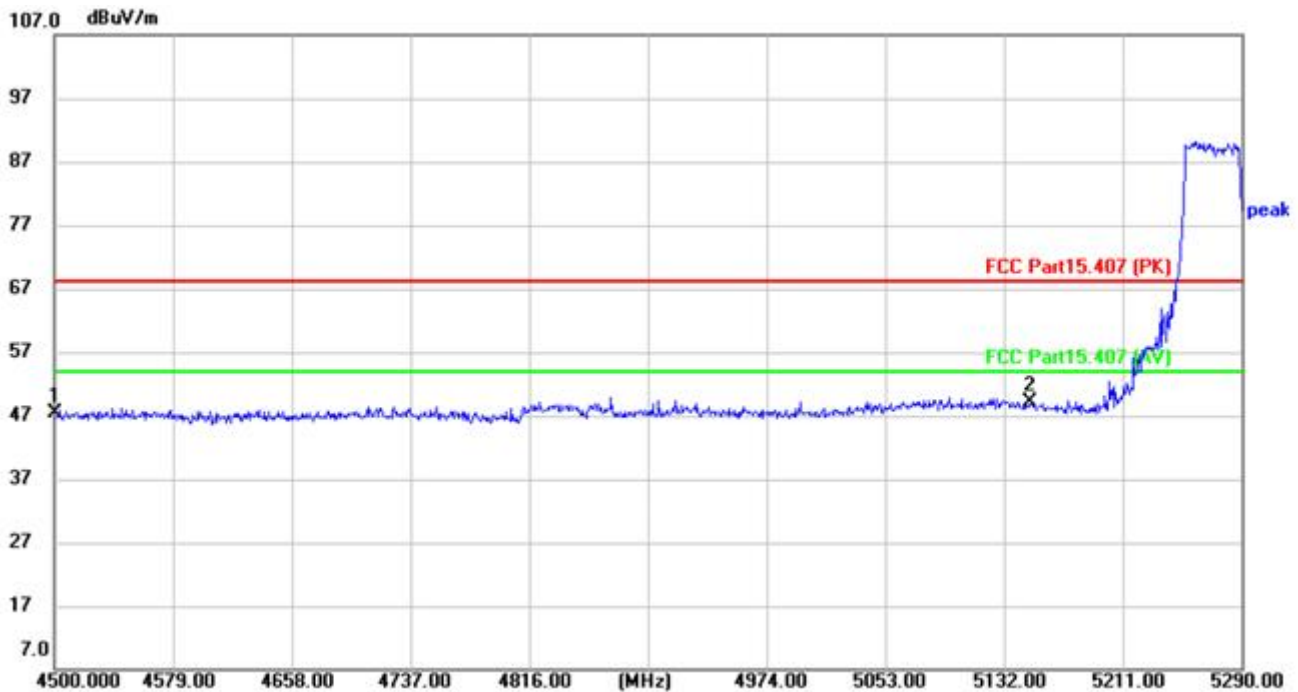

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4500.000	44.48	3.02	47.50	68.20	-20.70	peak
2	*	5150.000	43.32	5.93	49.25	68.20	-18.95	peak

Test Result: Pass

[Test mode:TX low channel 802.11n40 5270MHz]; [Polarity: Vertical]

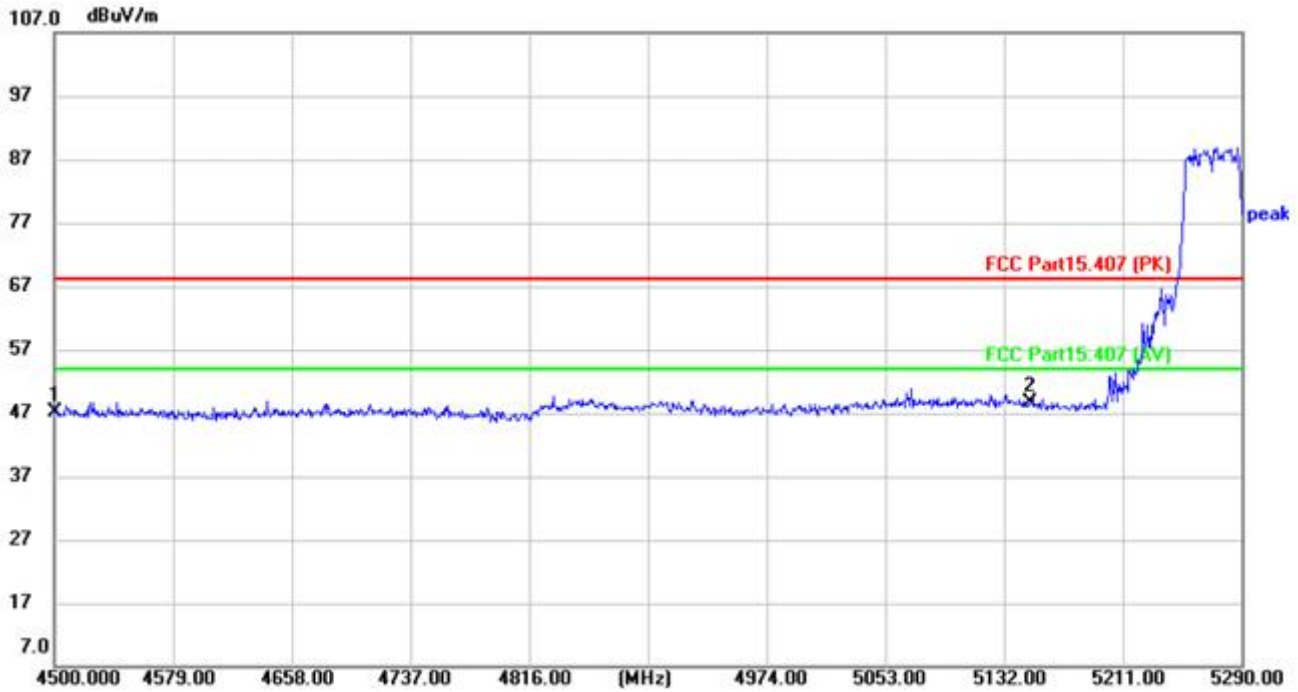

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4500.000	44.08	3.02	47.10	68.20	-21.10	peak
2	*	5150.000	42.71	5.93	48.64	68.20	-19.56	peak

Test Result: Pass


[Test mode: TX high channel 802.11n40 5310MHz]; [Polarity: Horizontal]



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5350.000	43.68	5.21	48.89	68.20	-19.31	peak
2		5460.000	42.26	5.91	48.17	68.20	-20.03	peak

Test Result: Pass


[Test mode:TX high channel 802.11n40 5310MHz]; [Polarity: Vertical]

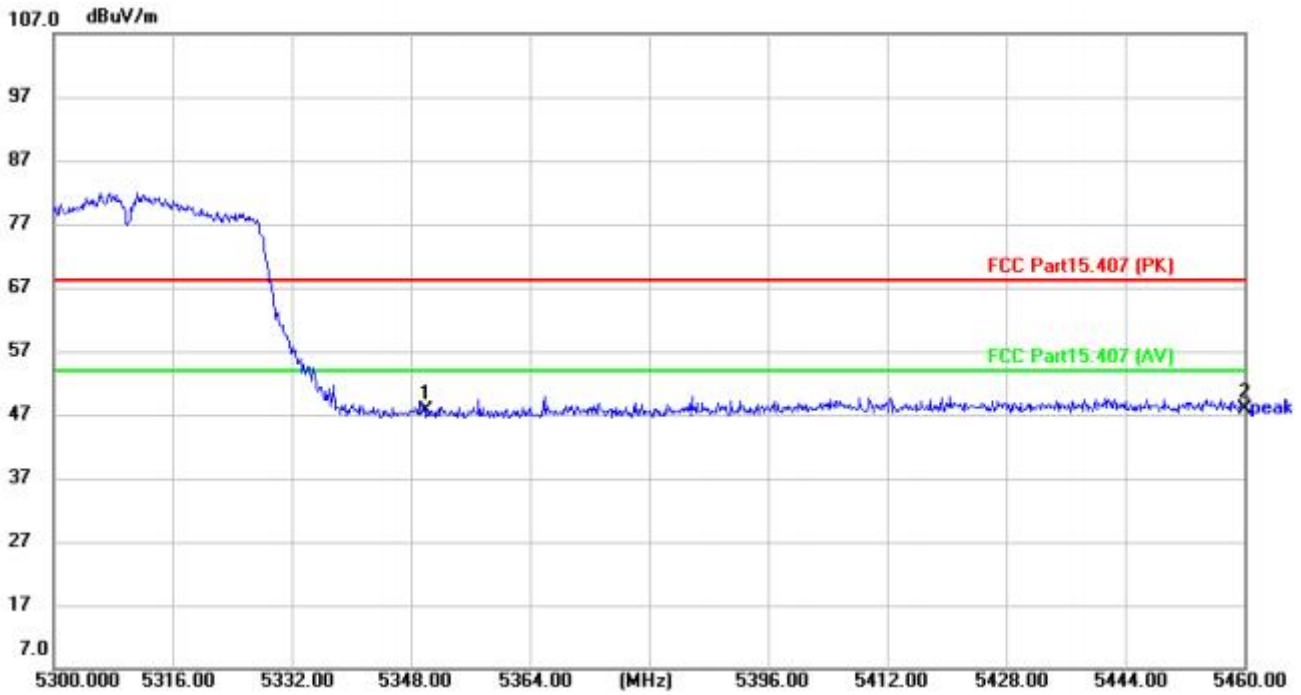

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5350.000	42.35	5.21	47.56	68.20	-20.64	peak
2	*	5460.000	42.09	5.91	48.00	68.20	-20.20	peak

Test Result: Pass


[Test mode: TX 802.11ax 80 5290MHz]; [Polarity: Horizontal]

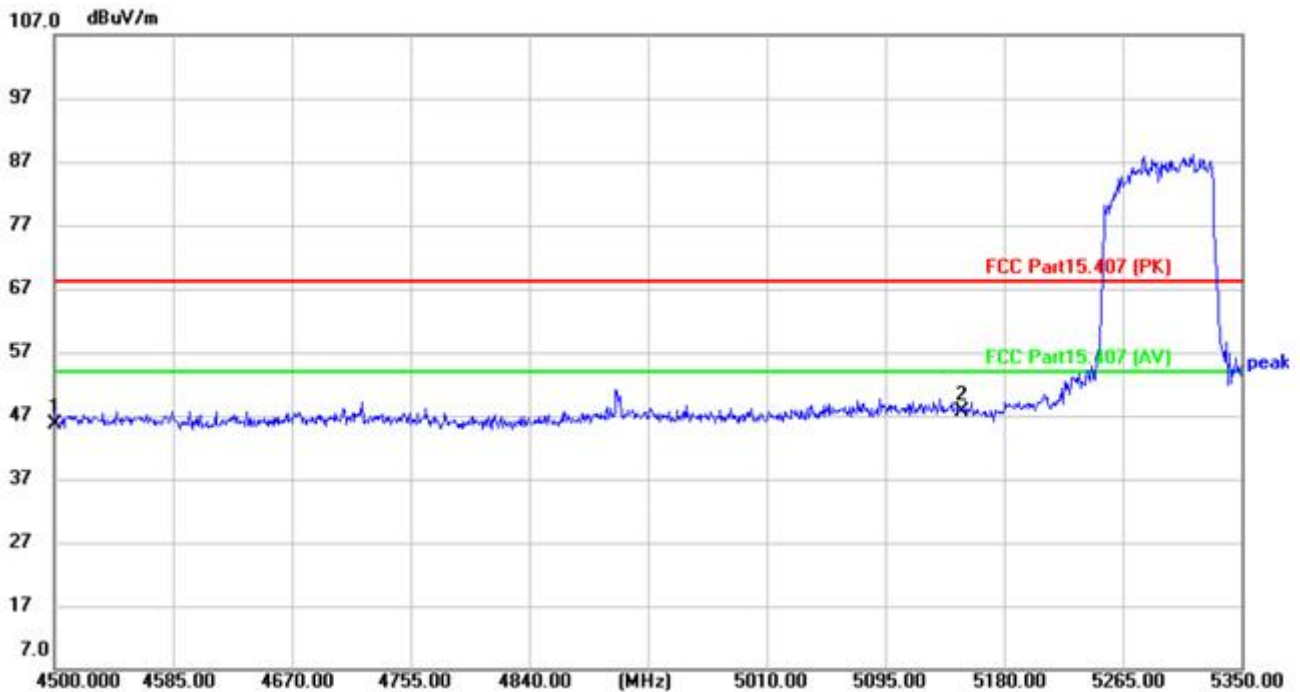

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4500.000	42.67	3.02	45.69	68.20	-22.51	peak
2	*	5150.000	41.71	5.93	47.64	68.20	-20.56	peak

Test Result: Pass

[Test mode: TX 802.11ax 80 5290MHz]; [Polarity: Vertical]

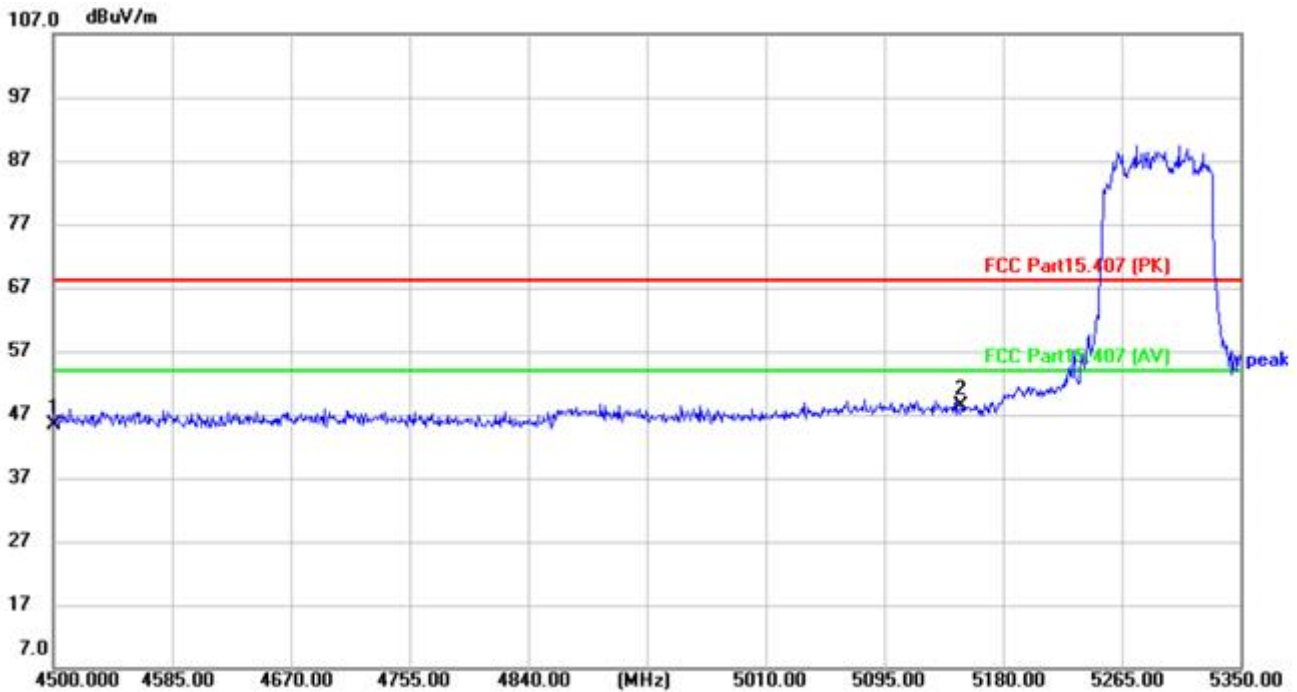

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4500.000	42.44	3.02	45.46	68.20	-22.74	peak
2	*	5150.000	42.56	5.93	48.49	68.20	-19.71	peak

Test Result: Pass


[Test mode: TX 802.11ax 80 5290MHz]; [Polarity: Horizontal]



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5350.000	41.92	5.21	47.13	68.20	-21.07	peak
2	*	5460.000	42.85	5.91	48.76	68.20	-19.44	peak

Test Result: Pass


[Test mode: TX 802.11ax 80 5290MHz]; [Polarity: Vertical]

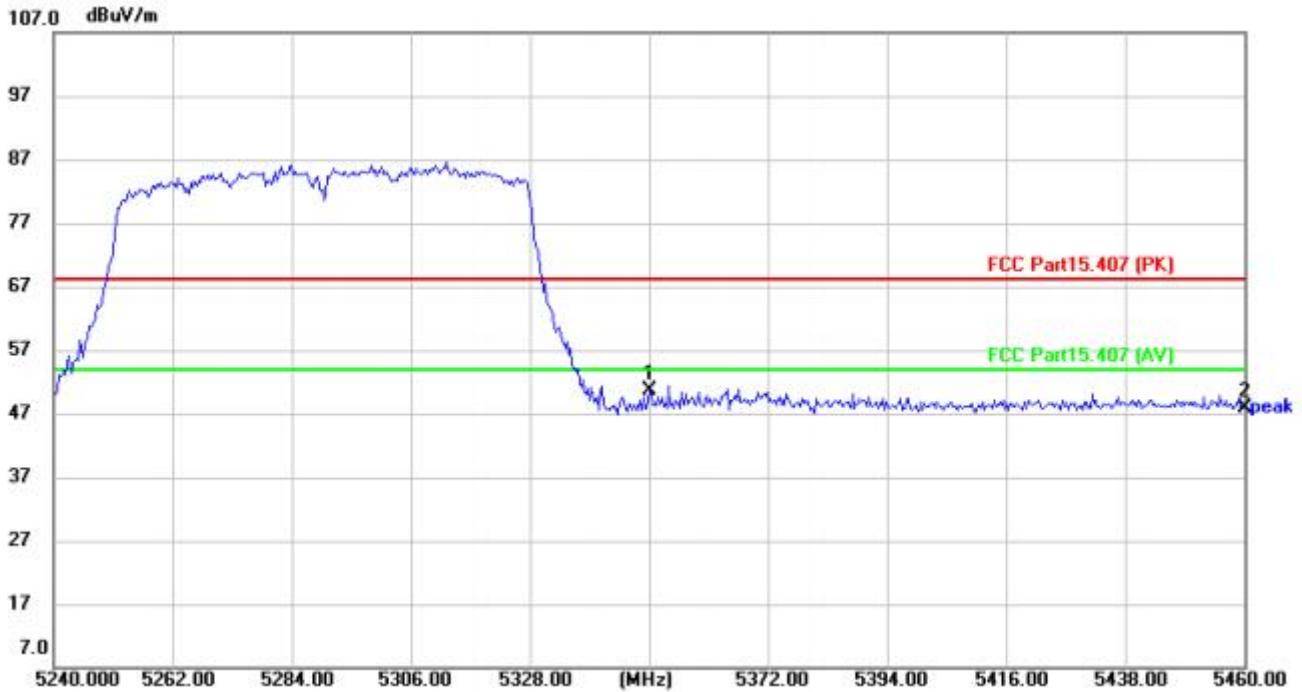

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5350.000	45.30	5.21	50.51	68.20	-17.69	peak
2		5460.000	41.99	5.91	47.90	68.20	-20.30	peak

Test Result: Pass


[Test mode: TX low channel 802.11a 5500MHz]; [Polarity: Horizontal]

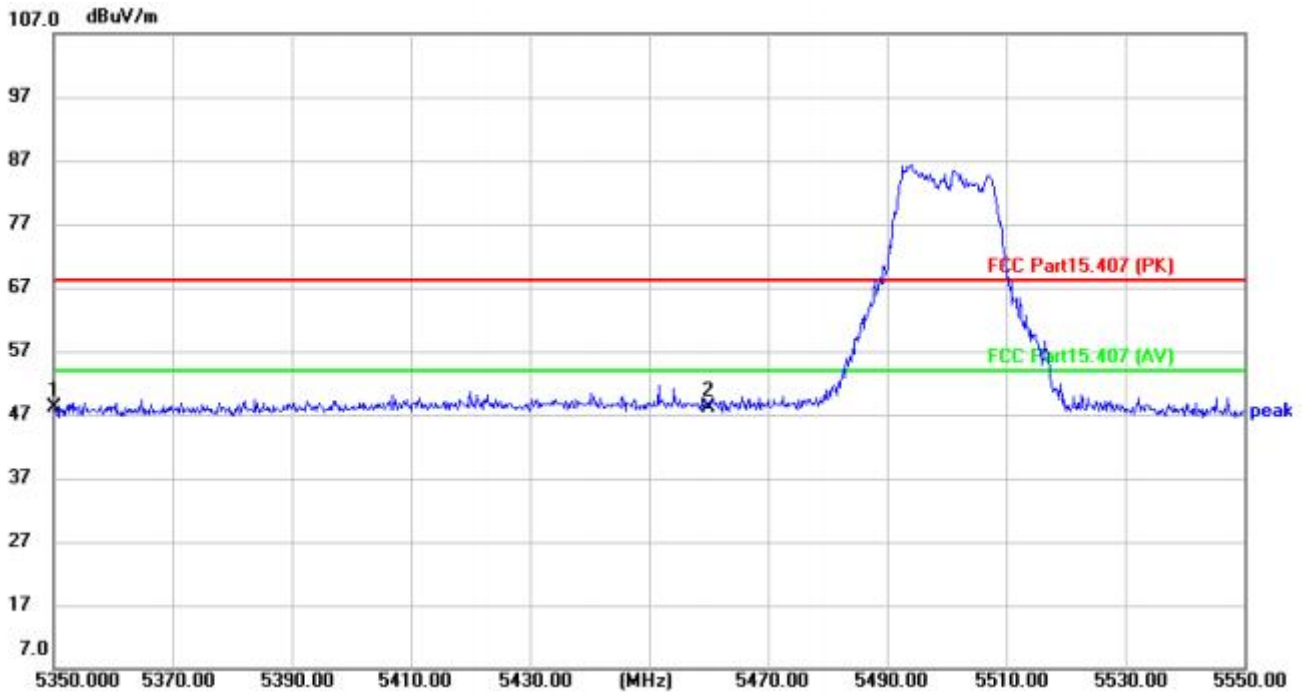

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	5350.000	42.85	5.21	48.06	68.20	-20.14	peak
2		5460.000	42.12	5.91	48.03	68.20	-20.17	peak

Test Result: Pass


[Test mode:TX low channel 802.11a 5500MHz]; [Polarity: Vertical]

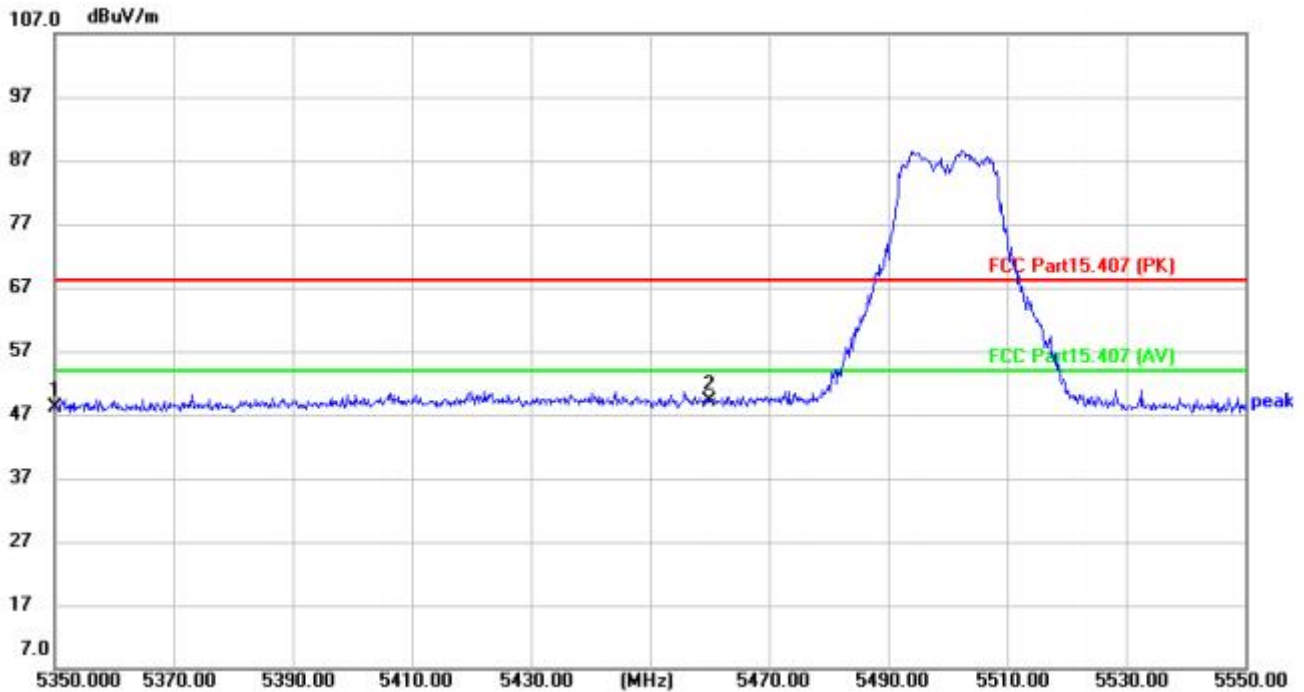

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5350.000	42.85	5.21	48.06	68.20	-20.14	peak
2	*	5460.000	43.22	5.91	49.13	68.20	-19.07	peak

Test Result: Pass


[Test mode: TX high channel 802.11a 5700MHz]; [Polarity: Horizontal]

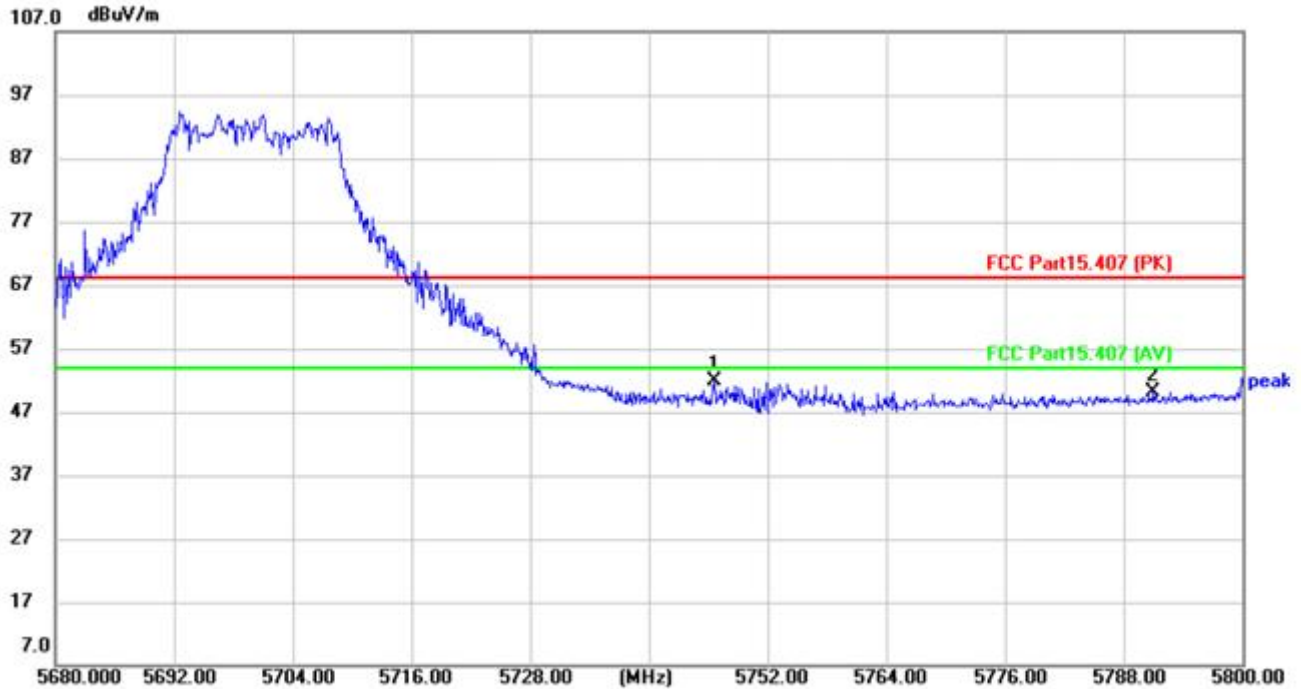

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5746.600	46.01	5.98	51.99	68.20	-16.21	peak
2		5791.000	43.31	6.76	50.07	68.20	-18.13	peak

Test Result: Pass


[Test mode:TX high channel 802.11a 5700MHz]; [Polarity: Vertical]

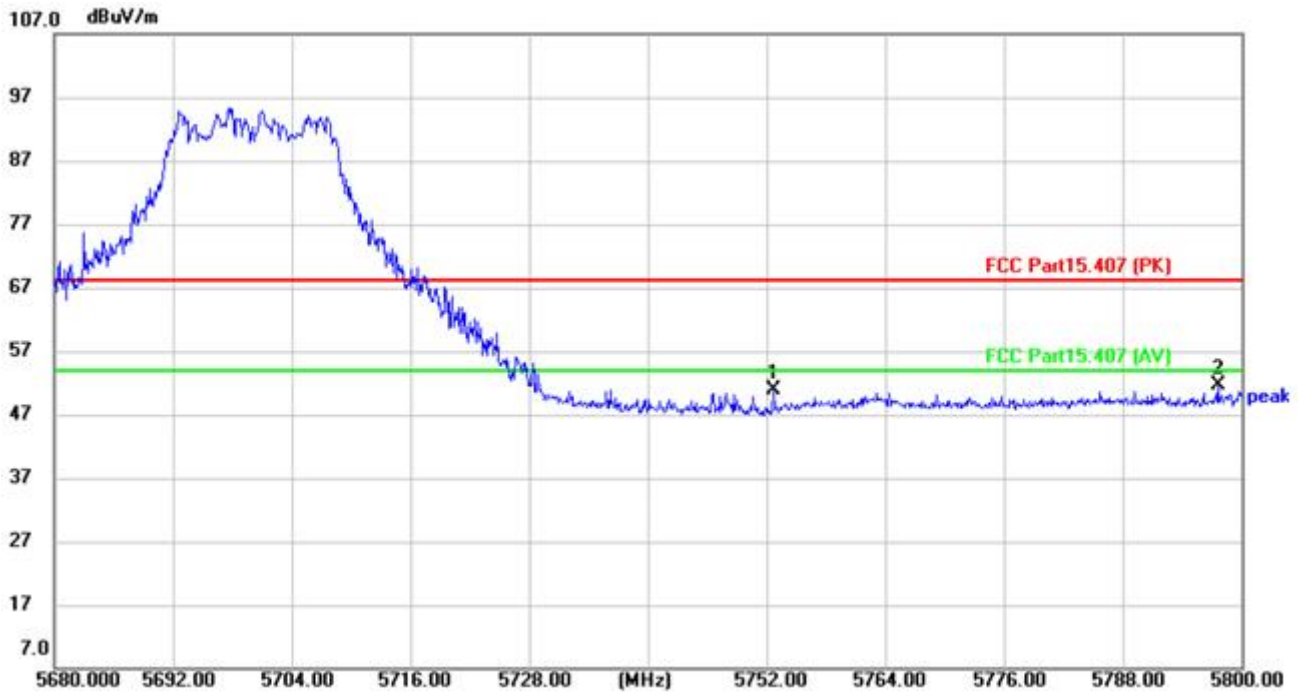

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5752.720	44.86	5.97	50.83	68.20	-17.37	peak
2	*	5797.600	44.81	6.89	51.70	68.20	-16.50	peak

Test Result: Pass


[Test mode: TX low channel 802.11n40 5510MHz]; [Polarity: Horizontal]

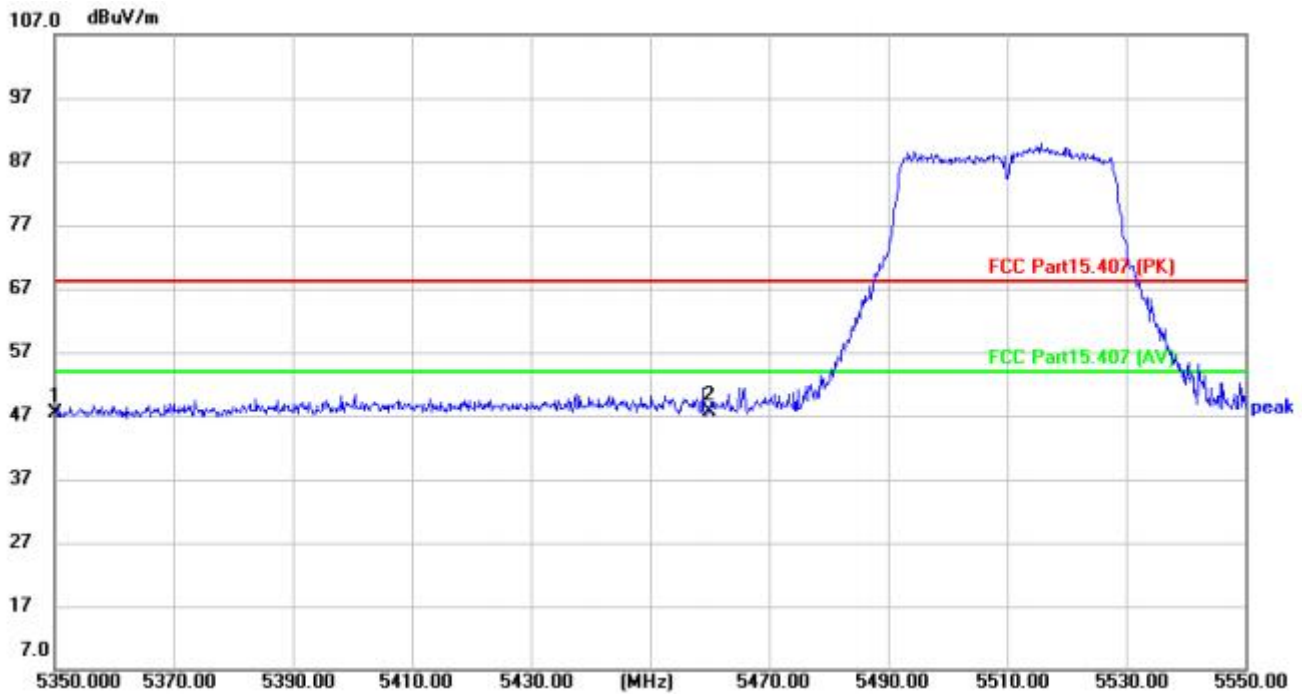

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dBuV/m	dB	
1		5350.000	42.14	5.21	47.35	68.20	-20.85	peak
2	*	5460.000	41.82	5.91	47.73	68.20	-20.47	peak

Test Result: Pass


[Test mode: TX low channel 802.11n40 5510MHz]; [Polarity: Vertical]

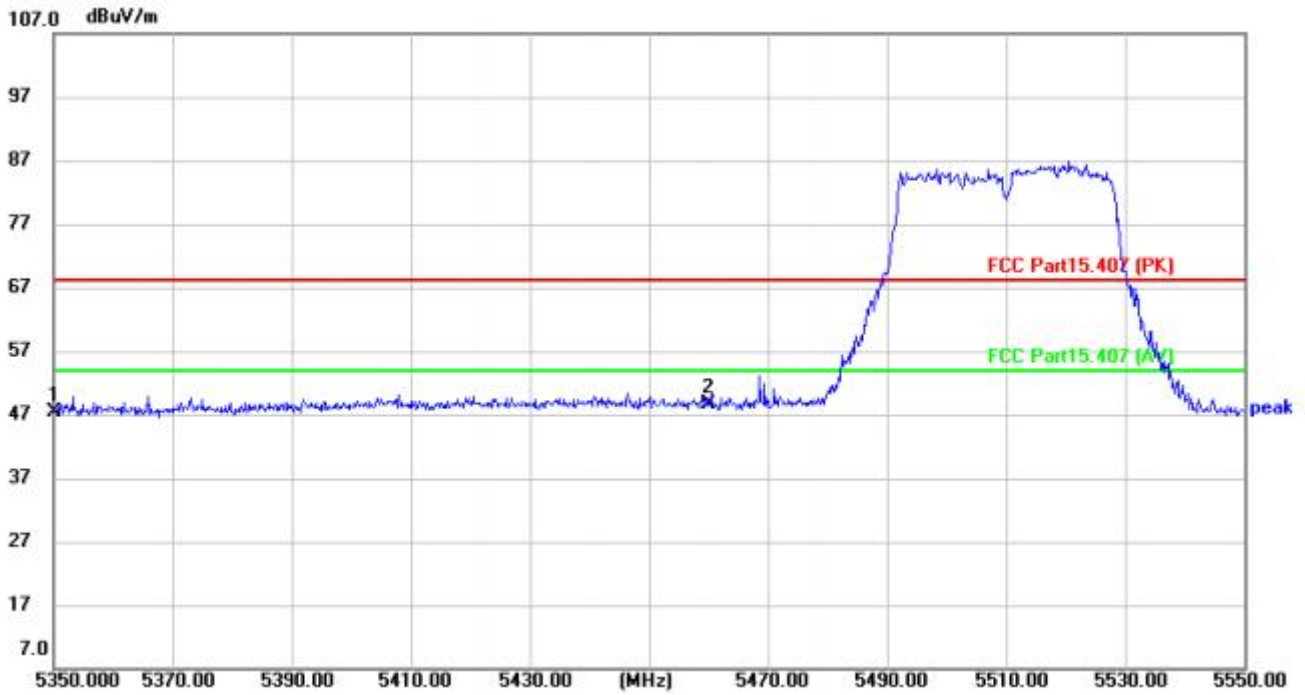

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dBuV/m	dB	
1		5350.000	42.15	5.21	47.36	68.20	-20.84	peak
2	*	5460.000	42.65	5.91	48.56	68.20	-19.64	peak

Test Result: Pass


[Test mode: TX high channel 802.11n40 5670MHz]; [Polarity: Horizontal]

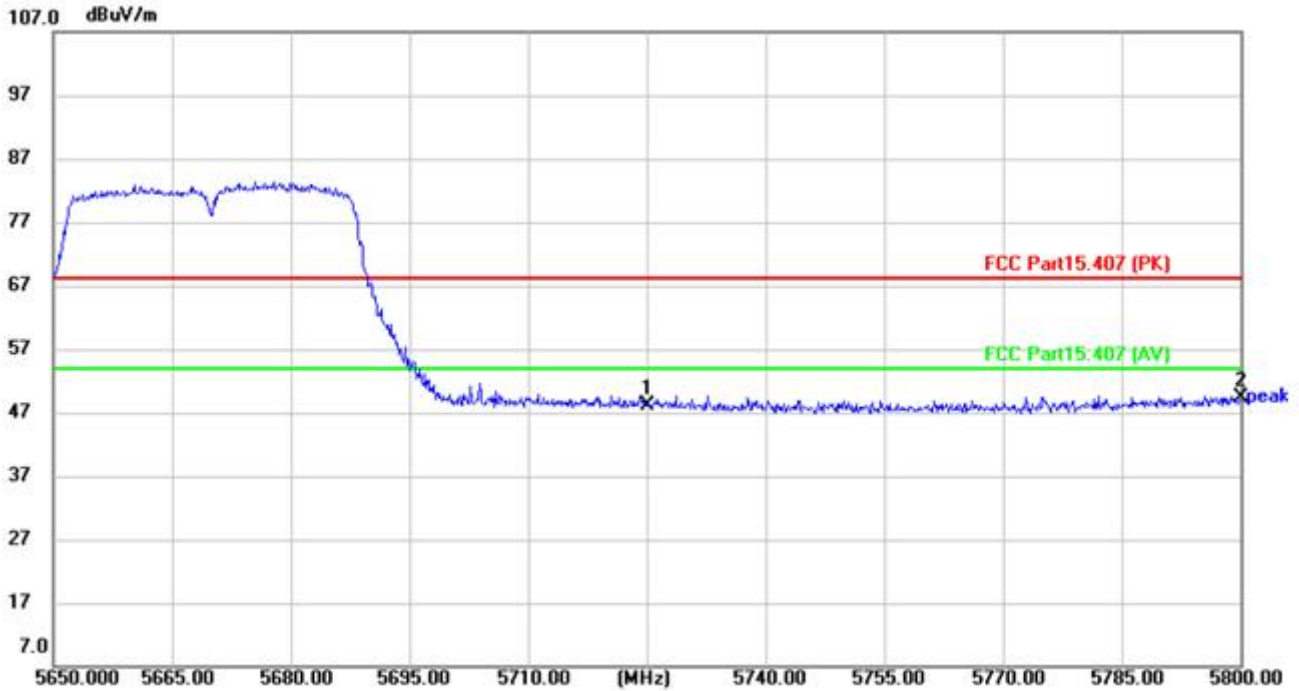

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	41.87	6.36	48.23	68.20	-19.97	peak
2	*	5800.000	42.33	6.94	49.27	68.20	-18.93	peak

Test Result: Pass


[Test mode: TX high channel 802.11n40 5670MHz]; [Polarity: Vertical]

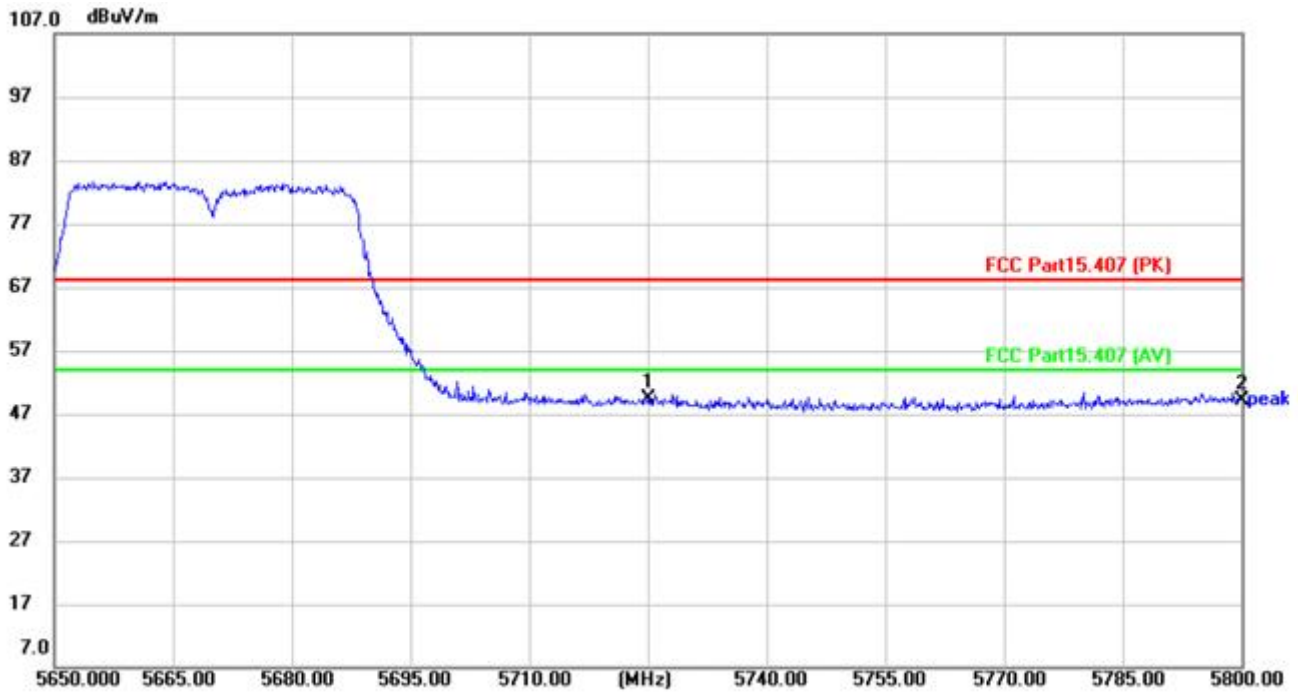

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5725.000	42.92	6.36	49.28	68.20	-18.92	peak
2		5800.000	42.12	6.94	49.06	68.20	-19.14	peak

Test Result: Pass


[Test mode: TX 802.11ax 80 5530MHz]; [Polarity: Horizontal]

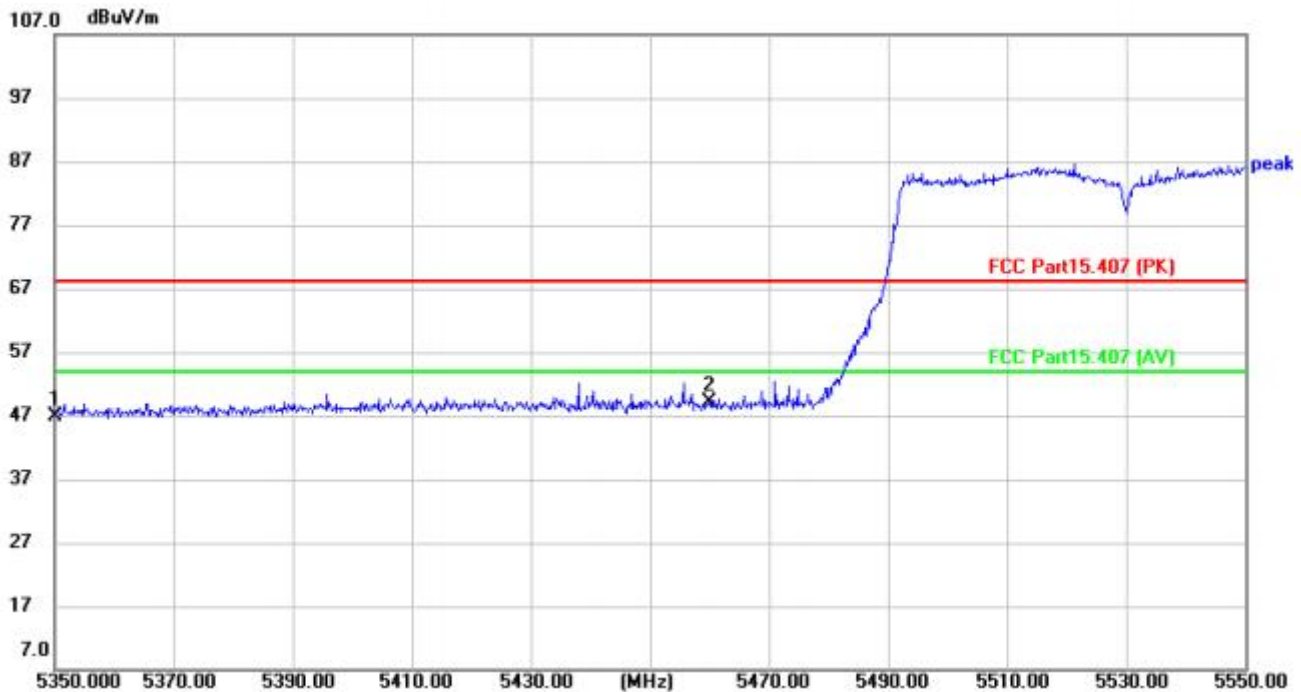

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5350.000	41.72	5.21	46.93	68.20	-21.27	peak
2	*	5460.000	43.31	5.91	49.22	68.20	-18.98	peak

Test Result: Pass


[Test mode: TX 802.11ax 80 5530MHz]; [Polarity: Vertical]

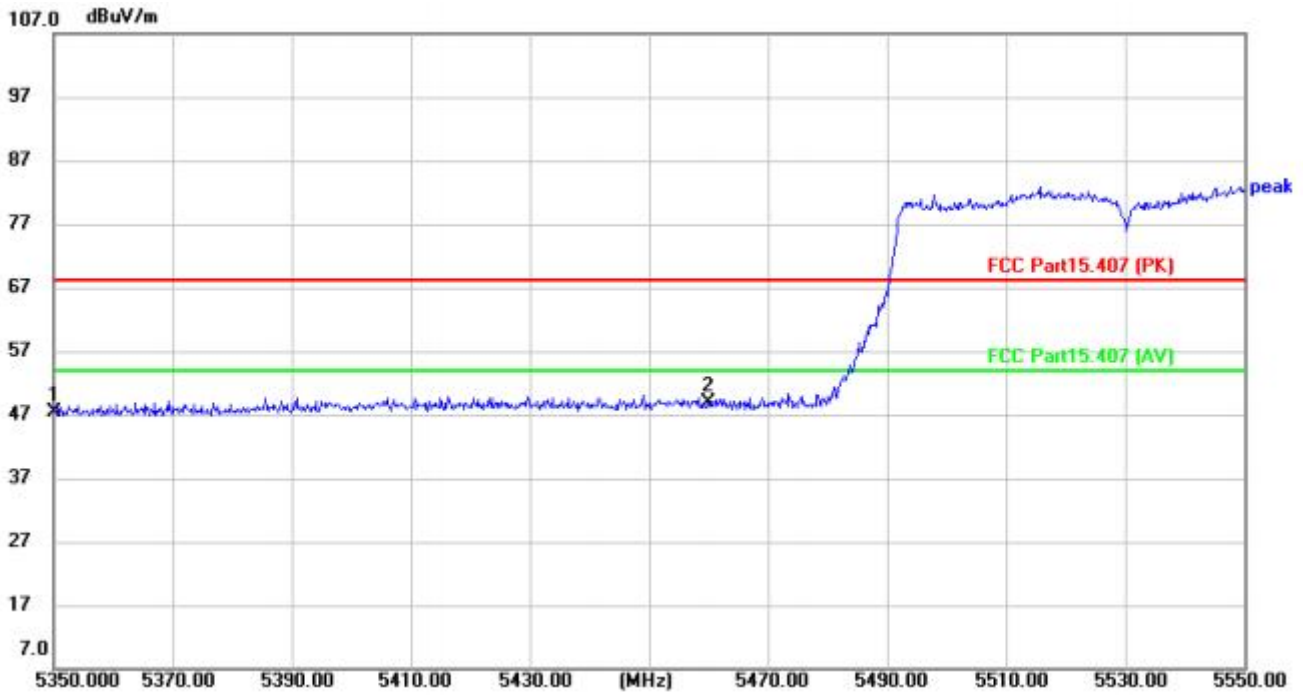

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5350.000	42.14	5.21	47.35	68.20	-20.85	peak
2	*	5460.000	42.88	5.91	48.79	68.20	-19.41	peak

Test Result: Pass


[Test mode: TX 802.11ax 80 5530MHz]; [Polarity: Horizontal]

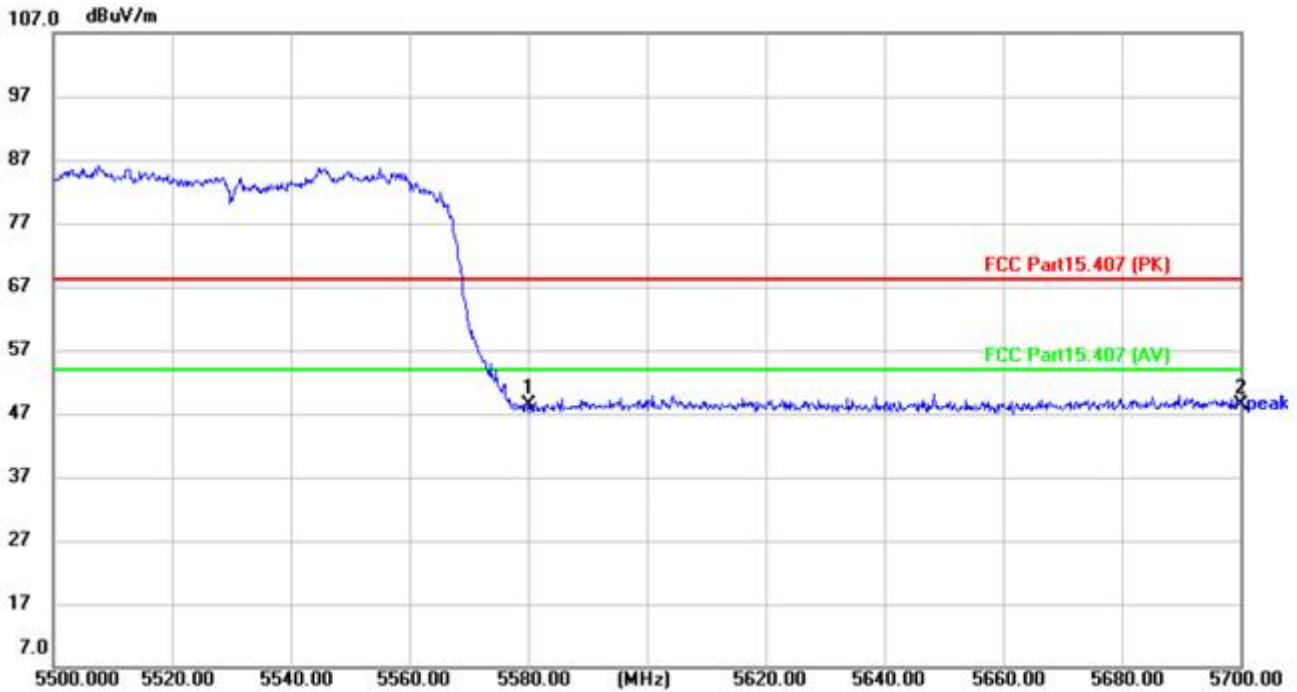

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5580.000	42.32	6.13	48.45	68.20	-19.75	peak
2		5700.000	41.64	6.79	48.43	68.20	-19.77	peak

Test Result: Pass


[Test mode: TX 802.11ax 80 5530MHz]; [Polarity: Vertical]

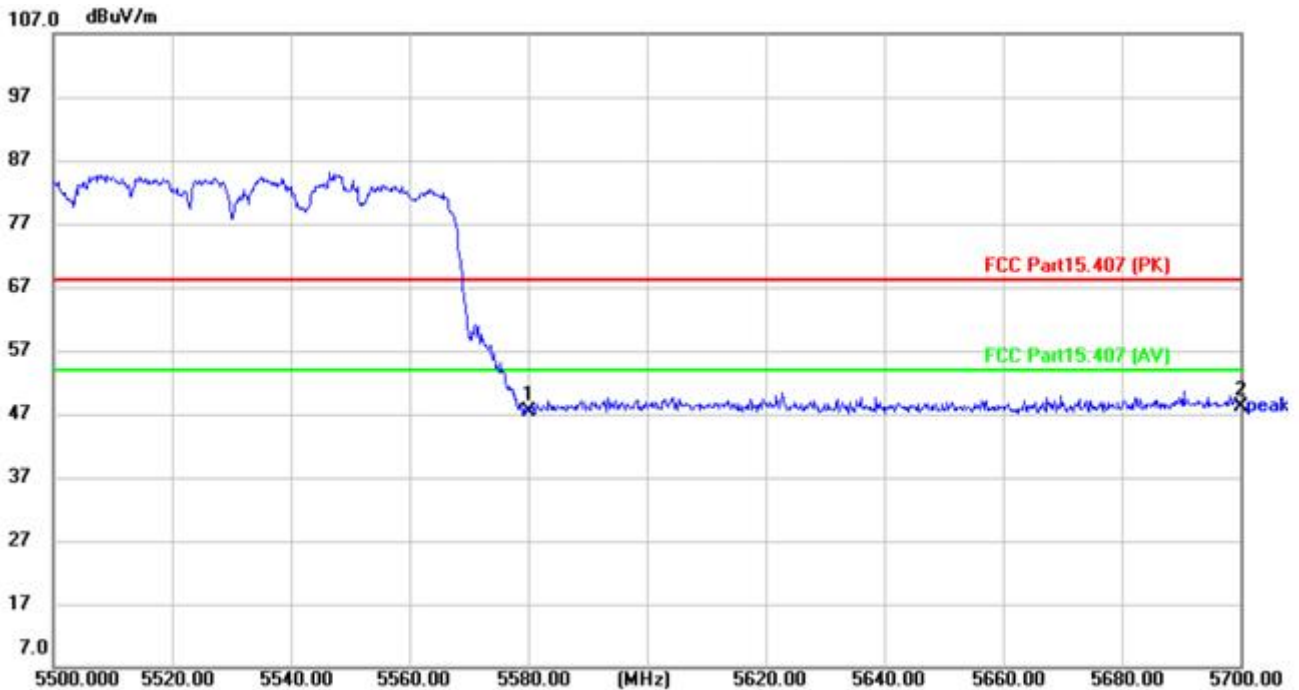

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5580.000	41.36	6.13	47.49	68.20	-20.71	peak
2	*	5700.000	41.39	6.79	48.18	68.20	-20.02	peak

Test Result: Pass


[Test mode: TX low channel 802.11a 5745MHz]; [Polarity: Horizontal]

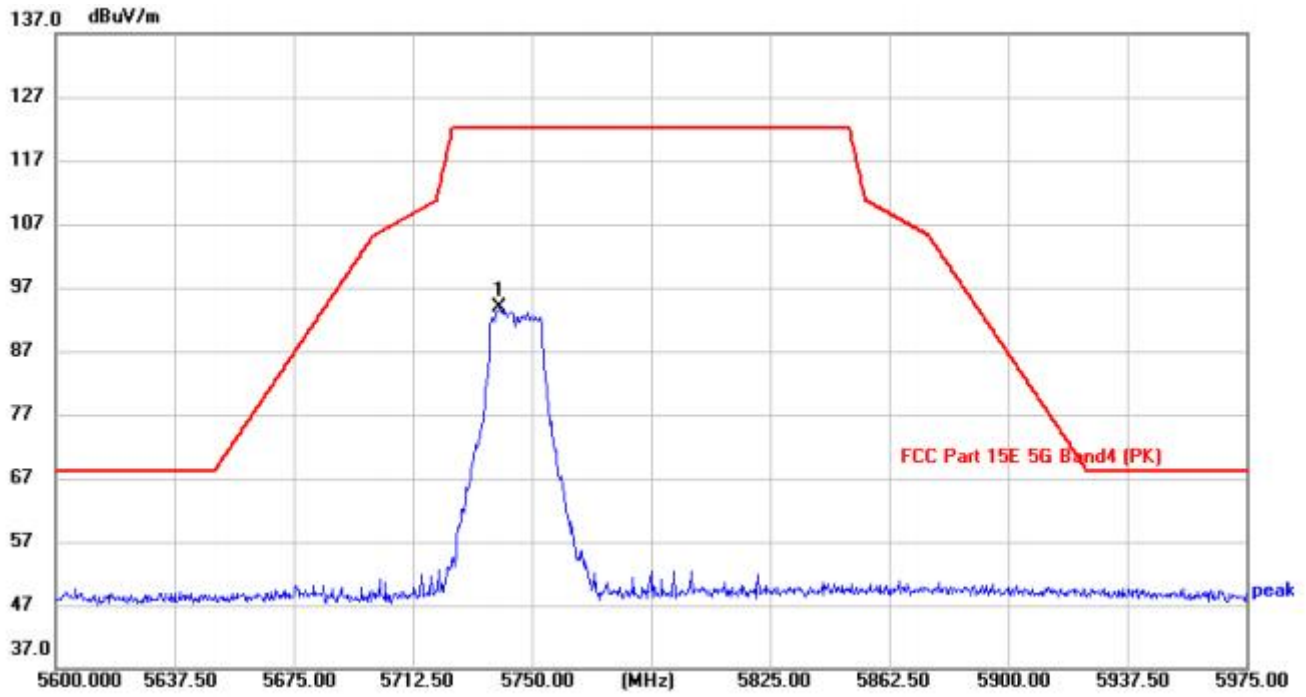

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	5739.875	87.75	6.10	93.85	122.2	-28.35	peak

Test Result: Pass


[Test mode:TX low channel 802.11a 5745MHz]; [Polarity: Vertical]

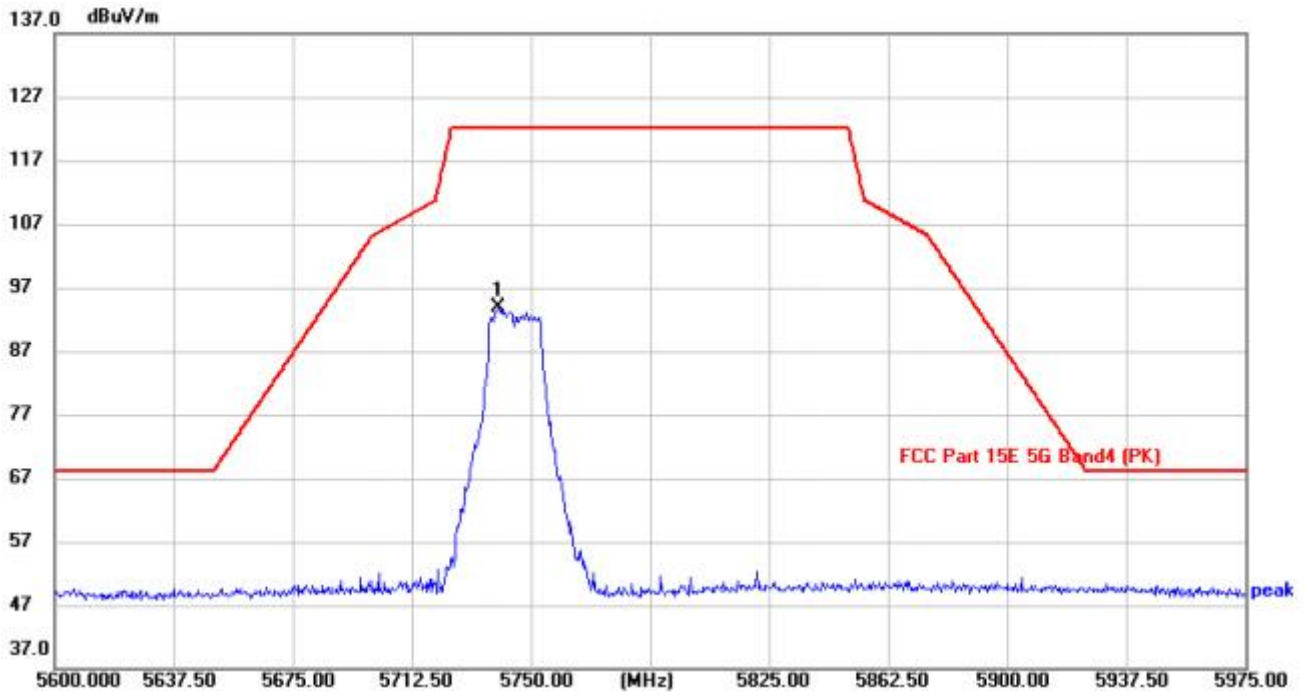

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	5739.875	87.75	6.10	93.85	122.2	-28.35	peak

Test Result: Pass


[Test mode: TX high channel 802.11a 5825MHz]; [Polarity: Horizontal]

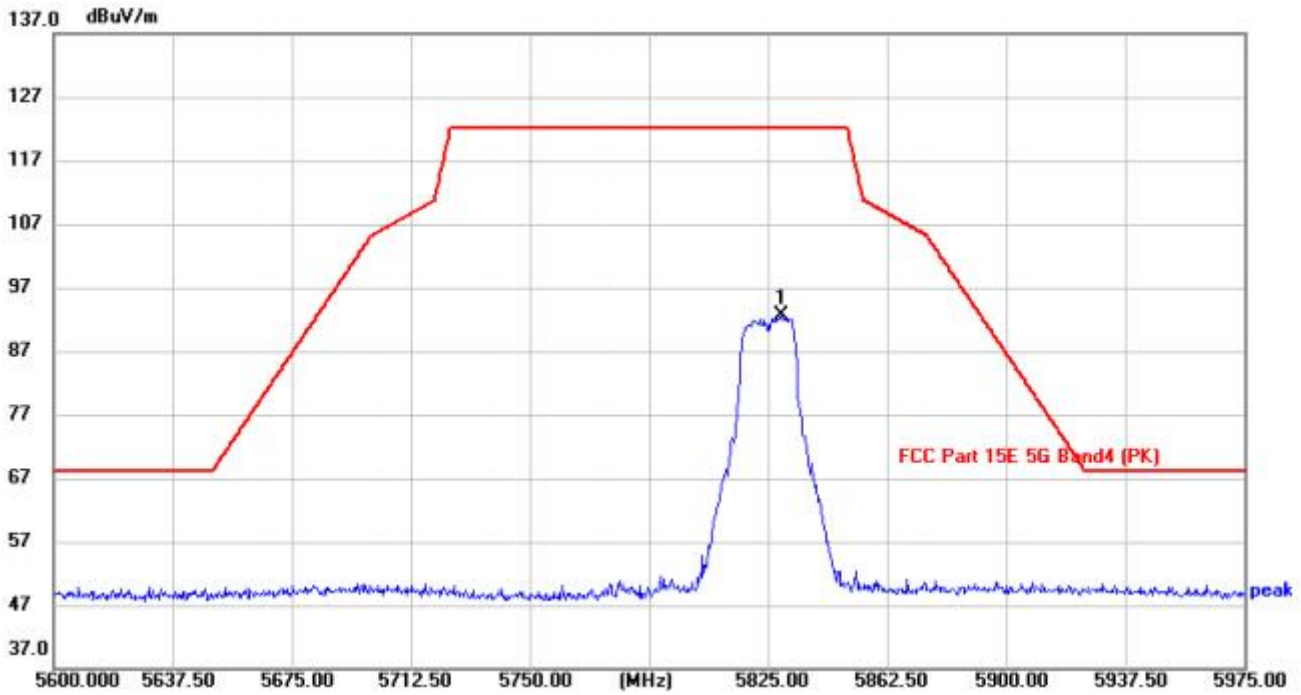

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	5829.125	85.84	6.83	92.67	122.2	-29.53	peak

Test Result: Pass


[Test mode:TX high channel 802.11a 5825MHz]; [Polarity: Vertical]

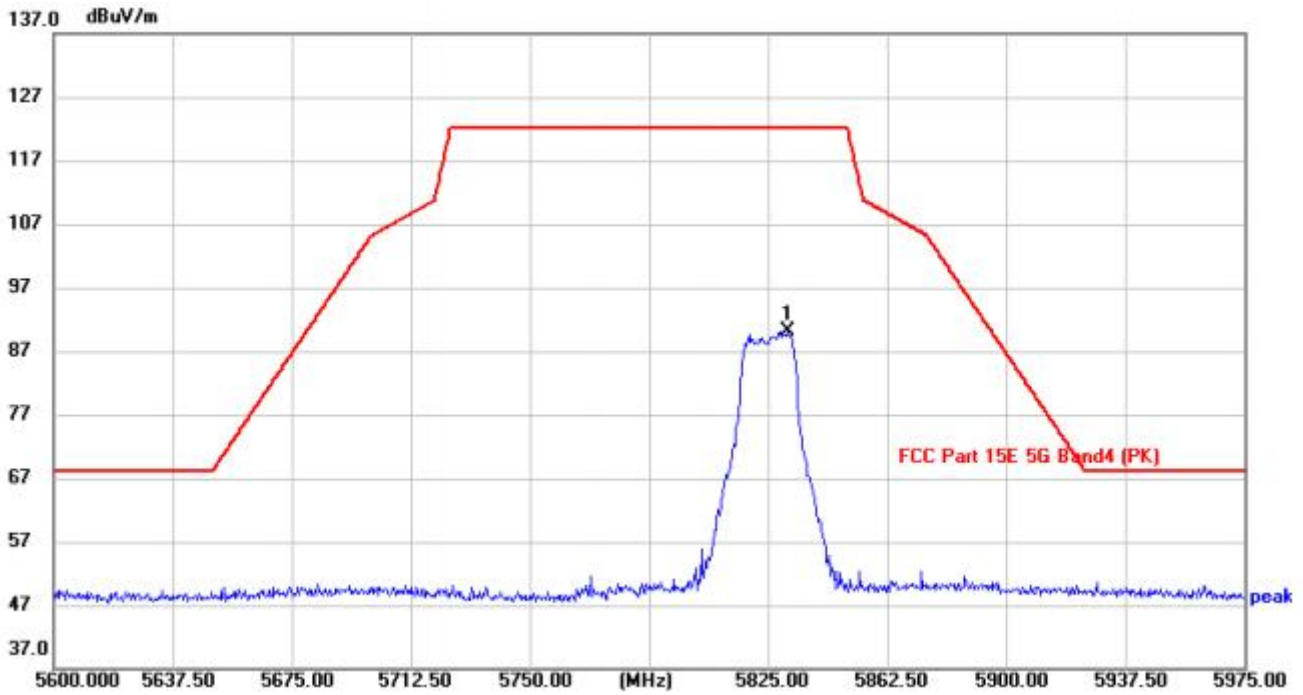

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	5831.000	83.41	6.83	90.24	122.2	-31.96	peak

Test Result: Pass


[Test mode: TX low channel 802.11n40 5755MHz]; [Polarity: Horizontal]

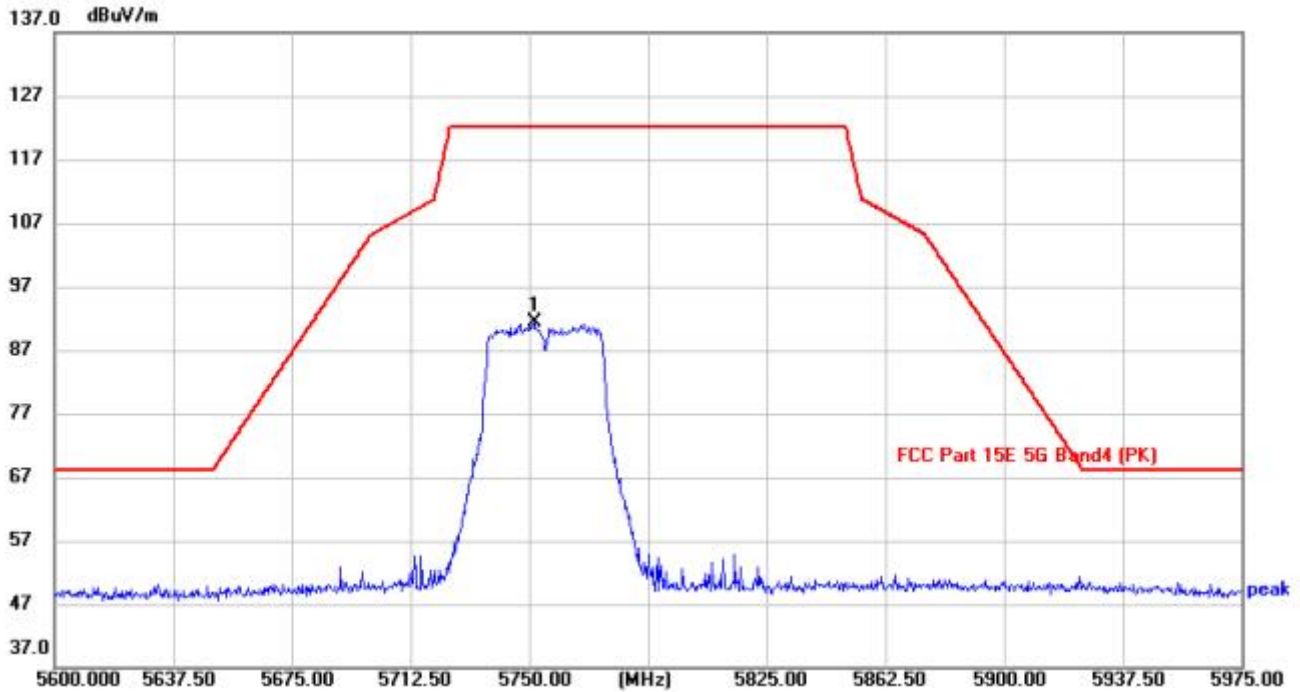

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	5751.500	85.49	5.95	91.44	122.2	-30.76	peak

Test Result: Pass

[Test mode: TX low channel 802.11n40 5755MHz]; [Polarity: Vertical]

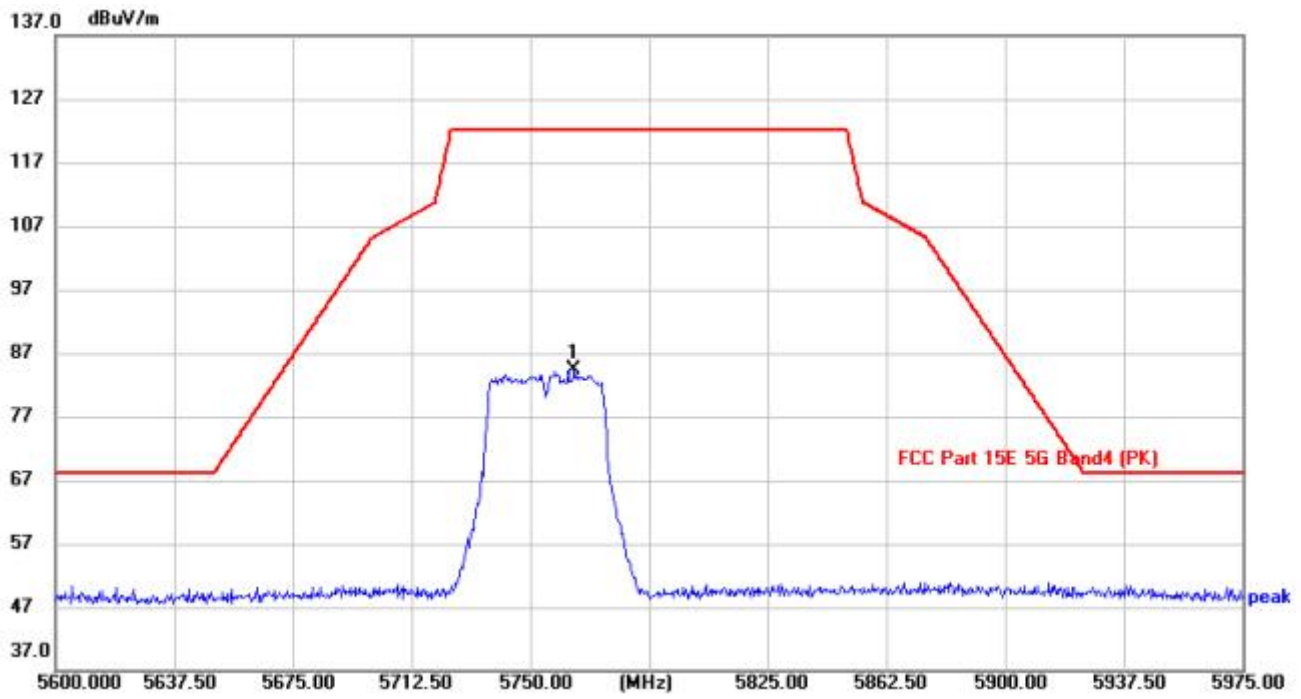

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	5763.875	78.13	6.21	84.34	122.2	-37.86	peak

Test Result: Pass